



TEST REPORT

APPLICANT : Reliance Communications LLC

PRODUCT NAME : Orbic Speed 5G

MODEL NAME : R500L5S6

BRAND NAME : Orbic

FCC ID : 2ABGH-R500L5S6

STANDARD(S) : 47 CFR Part 2
47 CFR Part 22 Subpart H
47 CFR Part 24 Subpart E
47 CFR Part 27 Subpart L

RECEIPT DATE : 2021-02-25

TEST DATE : 2021-03-22 to 2021-06-16

ISSUE DATE : 2022-08-16

Edited by:

Peng Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Maximum E.R.P./E.I.R.P. and Emission Designator	5
1.4. Test Standards and Results	6
1.5. Environmental Conditions	7
2. 47 CFR Part 2, Part 22H , 24E&27L Requirements	8
2.1. Conducted RF Output Power	8
2.2. Peak to Average Ratio	12
2.3. Occupied Bandwidth	16
2.4. Frequency Stability	21
2.5. Conducted Out of Band Emissions	24
2.6. Band Edge	28
2.7. Determining E.R.P. and/or E.I.R.P. from conducted RF output power measurements	30
2.8. Radiated Out of Band Emissions	34
Annex A Test Uncertainty	46
Annex B Testing Laboratory Information	47

Change History		
Version	Date	Reason for change
1.0	2022-08-16	First edition





1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Reliance Communications LLC
Applicant Address:	1560 Fifth Ave BayShore, NY 11706
Manufacturer:	Unimaxcomm
Manufacturer Address:	35F,HBC HuiLong Center Building-II Minzhi Street,Longhua, Shenzhen, P.R. China 518110

1.2. Equipment Under Test (EUT) Description

Product Name:	Orbic Speed 5G	
Serial No.:	2#	
Hardware Version:	V1.2	
Software Version:	ORB500L5S6_V1.0.6_BVT-NA	
Modulation Type:	WCDMA Mode with QPSK Modulation HSDPA Mode with QPSK Modulation HSUPA Mode with QPSK Modulation HSPA+ Mode with 16QAM Modulation	
Operating Frequency Range:	WCDMA Band V	Tx: 824MHz-849MHz Rx: 869MHz-894MHz
	WCDMA Band IV	Tx: 1710MHz-1755MHz Rx: 2110MHz-2155MHz
	WCDMA Band II	Tx: 1850MHz-1910MHz Rx: 1930MHz-1990MHz
Antenna Type:	PIFA Antenna	
Antenna Gain:	WCDMA Band V:	-0.10dBi
	WCDMA Band IV:	3.68dBi
	WCDMA Band II:	3.80dBi





Accessory Information:	Battery	
	Brand Name:	Orbic
	Model No.:	BTE-4401
	Serial No.:	N/A
	Capacity:	4400mAh
	Rated Voltage:	3.80V
	Charge Limit:	4.35V
	Manufacturer:	HUIZHOU DXDRAGON INC
	AC Adapter	
	Brand Name:	Orbic
Model No.:		TPA-23A050200UU01
Serial No.:		N/A
Rated Output:		5V=2A
Rated Input:		100-240V~50/60Hz, 0.3A
Manufacturer:		Dongguan summer electronics Co., LTD

Note 1: This test report is variant from the original report (Report No.: SZ22050178W03, FCC ID: 2ABGH-R500L5S6), based on the similarity between before, only changed the applicant address and enable LTE B17 by software. However, there is no other evaluation for LTE B17 due to the band is completely covered by LTE B12 and its power level setting also same as LTE B12. The changes do not affect the results in this report.

Note 2: The transmitter (Tx) frequency arrangement of the WCDMA Band V used by the EUT can be represented with the formula $F(n)=826.4+0.2*(n-4132)$, $4132 \leq n \leq 4233$; the lowest, middle and highest channel numbers (ARFCNs) used and tested in this report are separately 4132 (826.4MHz), 4182(836.4MHz) and 4233 (846.6MHz).

Note 3: The transmitter (Tx) frequency arrangement of the WCDMA IV band used by the EUT can be represented with the formula $F(n)=1712.4+0.2*(n-1312)$, $1312 \leq n \leq 1513$; the lowest, middle and highest channel numbers (ARFCNs) used and tested in this report are separately 1312 (1712.4MHz), 1413 (1732.6MHz) and 1513 (1752.6MHz).

Note 4: The transmitter (Tx) frequency arrangement of the WCDMA Band II used by the EUT can be represented with the formula $F(n)=1852.4+0.2*(n-9262)$, $9262 \leq n \leq 9538$; the lowest, middle and highest channel numbers (ARFCNs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

Note 5: All test modes and data rates were considered and evaluated respectively by performing full test. Test modes are chosen to be reported as the worst case below:

- WCDMA mode for WCDMA band V;
- WCDMA mode for WCDMA band IV;
- WCDMA mode for WCDMA band II;





REPORT No. : SZ22070206W03

Note 6: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Maximum E.R.P./E.I.R.P. and Emission Designator

Test Mode	Maximum E.R.P./E.I.R.P. (W)	Emission Designator
WCDMA Band V	0.163	4M14F9W
WCDMA Band IV	0.714	4M15F9W
WCDMA Band II	0.708	4M15F9W

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn





1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22, Part 24 and Part 27 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-12 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-12 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-12 Edition)	Personal Communications Services
4	47 CFR Part 27 (10-1-12 Edition)	Miscellaneous Wireless Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	2.1046	Conducted RF Output Power	Jun. 10, 2021	Chen Hao Ling Keye	PASS _{Note1}	No deviation
2	24.232(d)	Peak -Average Ratio	Mar. 22, 2021	Ling Keye	PASS _{Note1}	No deviation
3	2.1049	Occupied Bandwidth	Mar. 22, 2021	Ling Keye	PASS _{Note1}	No deviation
4	2.1055, 22.355, 24.235, 27.54	Frequency Stability	Jun. 16, 2021	Ling Keye	PASS _{Note1}	No deviation
5	2.1051, 22.917(a), 24.238(a), 27.53(h)	Conducted Out of Band Emissions	Mar. 22, 2021	Ling Keye	PASS _{Note1}	No deviation
6	2.1051, 22.917(a), 24.238(a), 27.53(h)	Band Edge	Mar. 22, 2021	Ling Keye	PASS _{Note1}	No deviation
7	22.913(a), 24.232(c) 27.50(d)	Transmitter Radiated Power (EIPR/E.R.P.)	Jun. 10, 2021	Gao Jianrou	PASS _{Note1}	No deviation
8	2.1051, 22.917(a),	Radiated Out of Band	Apr. 09, 2021	Gao Jianrou	PASS _{Note1}	No deviation





24.238(a), 27.53(h)	Emissions				
------------------------	-----------	--	--	--	--

Note 1: The test results of these test items in this report refer to the test report (Report No.: SZ22050178W03).

Note 2: The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03r01 and ANSI/TIA-603-E-2016.

Note 3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 24.5dB contains two parts that cable loss 14.5dB and Attenuator 10dB.

Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 5: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.47 CFR Part 2, Part 22H , 24E&27L Requirements


2.1. Conducted RF Output Power

2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2. Test Description

Test Setup:

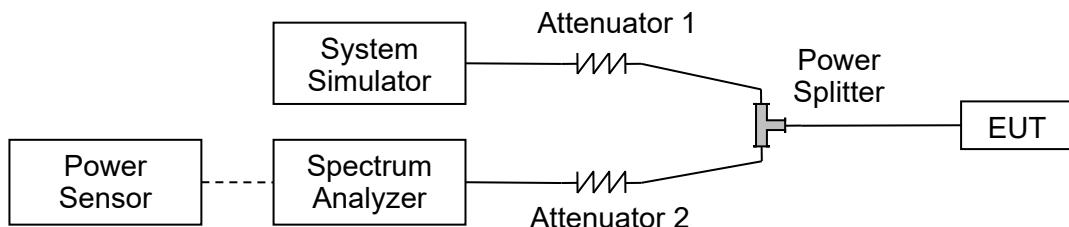

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.





2.1.3. Test Results

WCDMA Band V	Average Power (dBm)		
TX Channel	4132	4182	4233
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2Kbps	24.38	24.04	23.80
HSDPA Subtest-1	22.38	22.19	22.31
HSDPA Subtest-2	22.30	22.13	22.36
HSDPA Subtest-3	21.88	21.88	21.79
HSDPA Subtest-4	21.86	21.68	21.78
DC-HSDPA Subtest-1	22.41	22.35	22.38
DC-HSDPA Subtest-2	22.43	22.36	22.39
DC-HSDPA Subtest-3	21.91	21.85	21.93
DC-HSDPA Subtest-4	21.91	21.83	21.92
HSUPA Subtest-1	22.30	22.43	22.23
HSUPA Subtest-2	21.86	21.82	21.75
HSUPA Subtest-3	22.32	22.28	22.23
HSUPA Subtest-4	22.31	22.18	22.25
HSUPA Subtest-5	22.34	22.24	22.34
HSUPA+ (16QAM) Subtest-1	22.39	22.29	22.31





WCDMA Band IV	Average Power (dBm)		
TX Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2Kbps	24.34	24.61	24.86
HSDPA Subtest-1	22.89	23.11	23.03
HSDPA Subtest-2	22.92	23.04	22.97
HSDPA Subtest-3	22.43	22.55	22.58
HSDPA Subtest-4	22.43	22.66	22.51
DC-HSDPA Subtest-1	22.99	23.12	23.13
DC-HSDPA Subtest-2	22.92	23.14	23.12
DC-HSDPA Subtest-3	22.42	22.67	22.60
DC-HSDPA Subtest-4	22.41	22.61	22.63
HSUPA Subtest-1	22.91	23.05	23.02
HSUPA Subtest-2	22.39	22.60	22.57
HSUPA Subtest-3	22.93	22.97	23.01
HSUPA Subtest-4	22.87	23.01	23.04
HSUPA Subtest-5	22.99	22.96	22.99
HSUPA+ (16QAM) Subtest-1	22.87	23.10	22.94





WCDMA Band II	Average Power (dBm)		
TX Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2Kbps	24.70	24.54	24.30
HSDPA Subtest-1	22.72	22.90	22.92
HSDPA Subtest-2	22.75	22.85	22.95
HSDPA Subtest-3	22.36	22.50	22.48
HSDPA Subtest-4	22.26	22.40	22.38
DC-HSDPA Subtest-1	22.88	22.94	22.95
DC-HSDPA Subtest-2	22.90	22.91	22.97
DC-HSDPA Subtest-3	22.35	22.42	22.45
DC-HSDPA Subtest-4	22.36	22.40	22.43
HSUPA Subtest-1	22.71	22.83	22.83
HSUPA Subtest-2	22.27	22.35	22.44
HSUPA Subtest-3	22.82	22.84	22.83
HSUPA Subtest-4	22.70	22.81	22.86
HSUPA Subtest-5	22.81	22.93	22.82
HPA+ (16QAM) Subtest-1	22.76	22.87	22.86




2.2. Peak to Average Ratio

2.2.1. Requirement

According to FCC 24.232(d) and 27.50(d), the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2. Test Description

Test Setup:

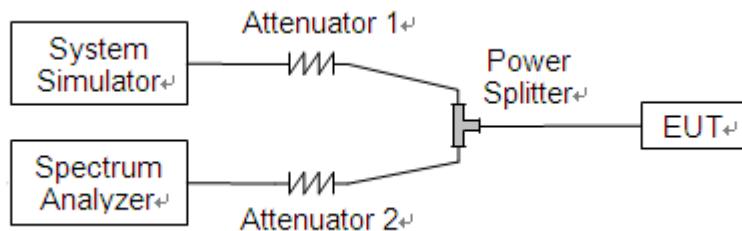

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2.2.3. Test procedure

1 .For GSM/EDGE operating mode:

- Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
- Set EUT in maximum output power, and triggered the burst signal.
- Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.

2. For UMTS operating mode:

- Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.





2.2.4. Test Result


The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:

WCDMA Band IV						
Mode	Channel	Frequency (MHz)	Peak to Average ratio (dB)	Limit (dB)	Verdict	
WCDMA	1312	1712.4	2.94	13	PASS	
	1413	1732.6	2.96		PASS	
	1513	1752.6	2.85		PASS	

WCDMA Band II						
Mode	Channel	Frequency (MHz)	Peak to Average ratio (dB)	Limit (dB)	Verdict	
WCDMA	9262	1852.4	2.76	13	PASS	
	9400	1880.0	2.80		PASS	
	9538	1907.6	2.77		PASS	



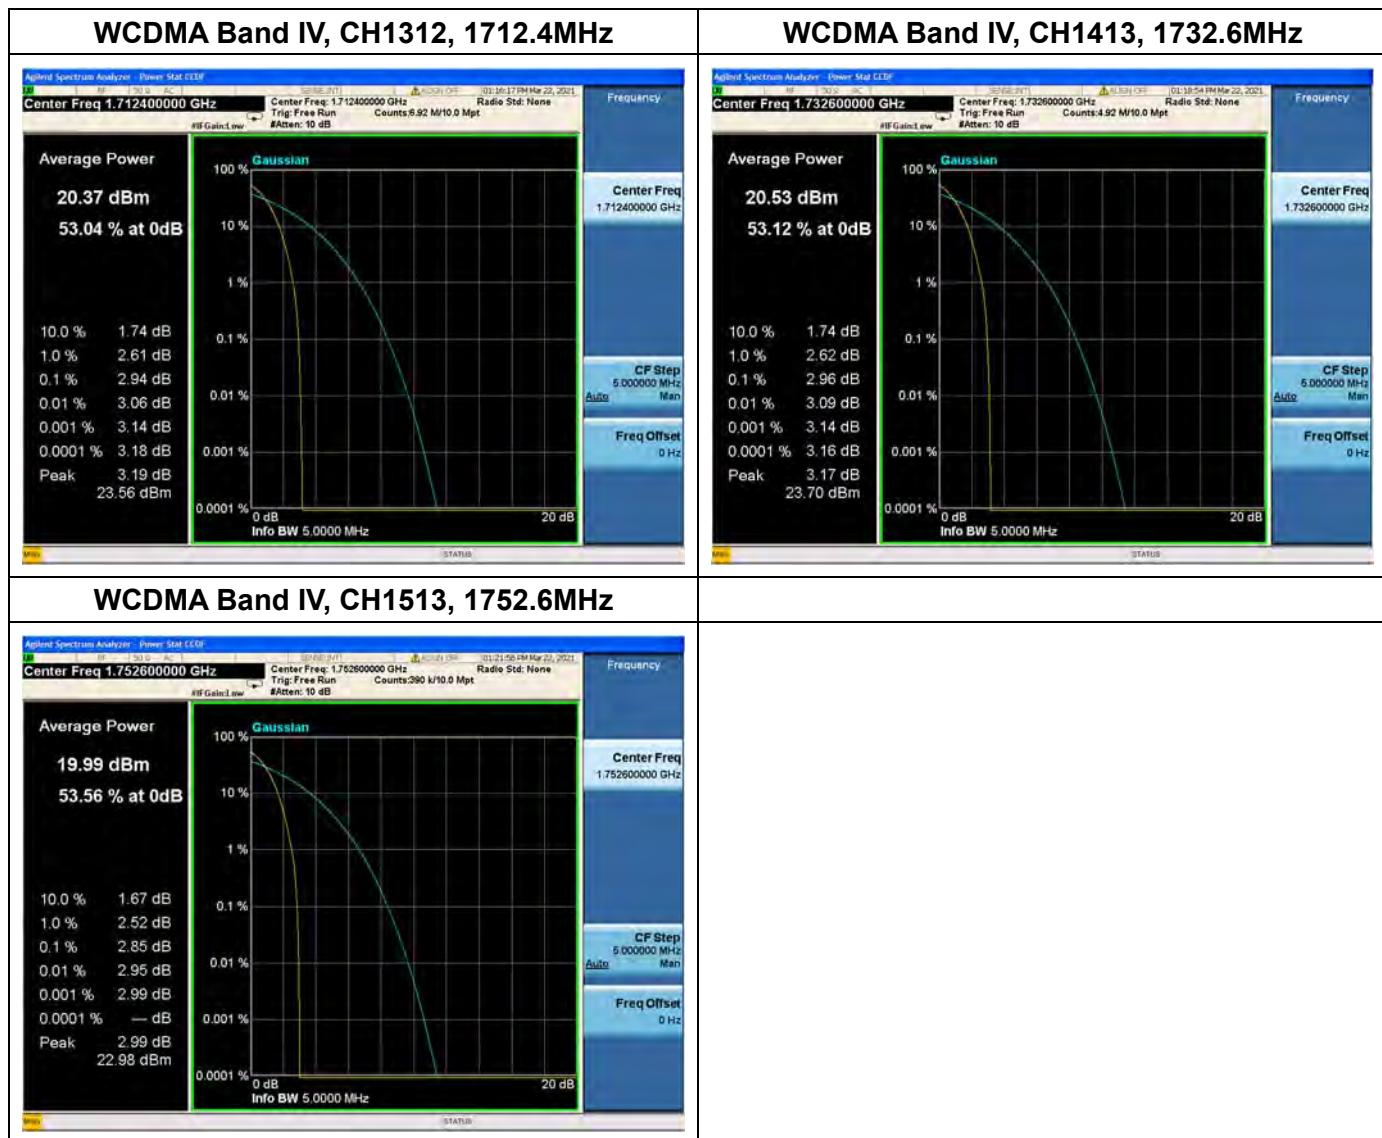

WCDMA Band II, CH9262, 1852.4MHz	WCDMA Band II, CH9400, 1880.0MHz
 <p>Agilent Spectrum Analyzer - Power Stat CDF</p> <p>Center Freq 1.852400000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 10 dB</p> <p>Average Power 19.62 dBm 53.81 % at 0dB</p> <p>10.0 % 1.63 dB 1.0 % 2.45 dB 0.1 % 2.76 dB 0.01 % 2.87 dB 0.001 % 2.91 dB 0.0001 % 2.93 dB Peak 2.95 dB 22.57 dBm</p> <p>100 % 10 % 1 % 0.1 % 0.01 % 0.001 % 0.0001 %</p> <p>0 dB 20 dB</p> <p>Info BW 5.0000 MHz</p> <p>Min STATUS</p>	 <p>Agilent Spectrum Analyzer - Power Stat CDF</p> <p>Center Freq 1.880000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 10 dB</p> <p>Average Power 19.92 dBm 53.74 % at 0dB</p> <p>10.0 % 1.64 dB 1.0 % 2.48 dB 0.1 % 2.80 dB 0.01 % 2.90 dB 0.001 % 2.94 dB 0.0001 % 2.98 dB Peak 3.02 dB 22.94 dBm</p> <p>100 % 10 % 1 % 0.1 % 0.01 % 0.001 % 0.0001 %</p> <p>0 dB 20 dB</p> <p>Info BW 5.0000 MHz</p> <p>Min STATUS</p>
<p>WCDMA Band II, CH9538, 1907.6MHz</p>  <p>Agilent Spectrum Analyzer - Power Stat CDF</p> <p>Center Freq 1.907600000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 10 dB</p> <p>Average Power 19.97 dBm 53.65 % at 0dB</p> <p>10.0 % 1.63 dB 1.0 % 2.45 dB 0.1 % 2.77 dB 0.01 % 2.89 dB 0.001 % 2.93 dB 0.0001 % 2.95 dB Peak 2.97 dB 22.94 dBm</p> <p>100 % 10 % 1 % 0.1 % 0.01 % 0.001 % 0.0001 %</p> <p>0 dB 20 dB</p> <p>Info BW 5.0000 MHz</p> <p>Min STATUS</p>	




2.3. Occupied Bandwidth

2.3.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

2.3.2. Test Description

Test Setup:

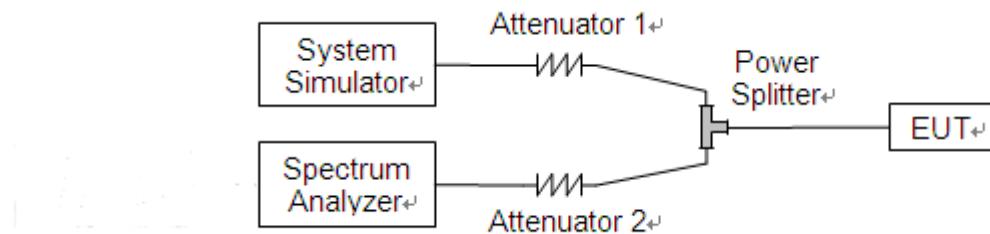

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.





2.3.3. Test Result




WCDMA Band V				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA	4132	826.4	4.13	4.73
	4182	836.4	4.14	4.70
	4233	846.6	4.14	4.70

WCDMA Band IV				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA	1312	1712.4	4.15	4.72
	1413	1732.6	4.14	4.72
	1513	1752.6	4.15	4.72

WCDMA Band II				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA	9262	1852.4	4.14	4.72
	9400	1880.0	4.14	4.72
	9538	1907.6	4.15	4.73



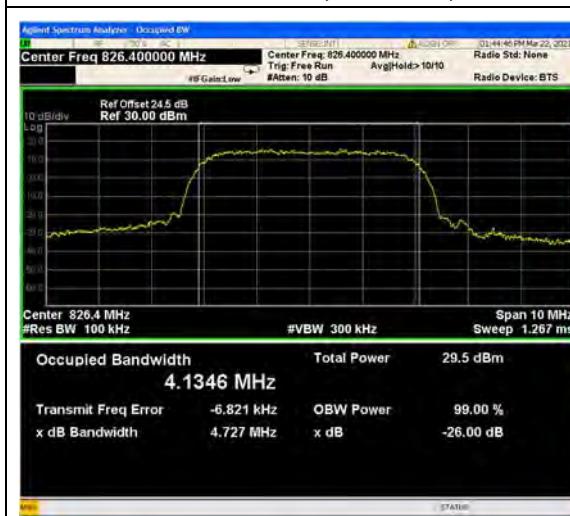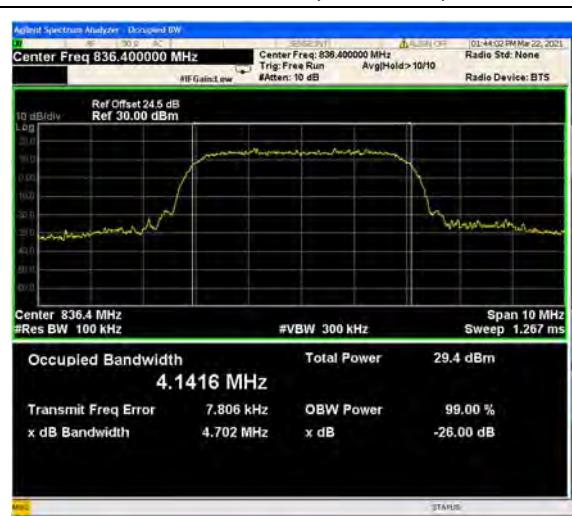

WCDMA Band V, CH4132, 826.4MHz	WCDMA Band V, CH4182, 836.4MHz
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 826.400000 MHz</p> <p>Ref Offset 24.5 dB</p> <p>Ref 30.00 dBm</p> <p>Center 826.4 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 10 MHz</p> <p>Sweep 1.267 ms</p> <p>Occupied Bandwidth 4.1346 MHz</p> <p>Transmit Freq Error -6.821 kHz</p> <p>x dB Bandwidth 4.727 MHz</p> <p>Total Power 29.5 dBm</p> <p>OBW Power 99.00 %</p> <p>x dB -26.00 dB</p> <p>CF Step 1.000000 MHz</p> <p>Freq Offset 0 Hz</p> <p>Auto</p> <p>Manual</p> <p>STATUS</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 836.400000 MHz</p> <p>Ref Offset 24.5 dB</p> <p>Ref 30.00 dBm</p> <p>Center 836.4 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 10 MHz</p> <p>Sweep 1.267 ms</p> <p>Occupied Bandwidth 4.1416 MHz</p> <p>Transmit Freq Error 7.806 kHz</p> <p>x dB Bandwidth 4.702 MHz</p> <p>Total Power 29.4 dBm</p> <p>OBW Power 99.00 %</p> <p>x dB -26.00 dB</p> <p>CF Step 1.000000 MHz</p> <p>Freq Offset 0 Hz</p> <p>Auto</p> <p>Manual</p> <p>STATUS</p>
WCDMA Band V, CH4233, 846.6MHz	
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 846.600000 MHz</p> <p>Ref Offset 24.5 dB</p> <p>Ref 30.00 dBm</p> <p>Center 846.6 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 10 MHz</p> <p>Sweep 1.267 ms</p> <p>Occupied Bandwidth 4.1365 MHz</p> <p>Transmit Freq Error 4.540 kHz</p> <p>x dB Bandwidth 4.700 MHz</p> <p>Total Power 28.7 dBm</p> <p>OBW Power 99.00 %</p> <p>x dB -26.00 dB</p> <p>CF Step 1.000000 MHz</p> <p>Freq Offset 0 Hz</p> <p>Auto</p> <p>Manual</p> <p>STATUS</p>	





REPORT No. : SZ22070206W03

WCDMA Band IV, CH1312, 1712.4MHz

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.712400000 GHz

Ref Offset 24.5 dB

Ref 30.00 dBm

10 dB/div

Log

Center 1.712 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 10 MHz

Sweep 1.267 ms

Occupied Bandwidth

4.1523 MHz

Transmit Freq Error

12.266 kHz

x dB Bandwidth

4.715 MHz

OBW Power

99.00 %

x dB

-26.00 dB

Frequency

Center Freq 1.712400000 GHz

CF Step 1.000000 MHz

Auto

Freq Offset 0 Hz

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.732600000 GHz

Ref Offset 24.5 dB

Ref 30.00 dBm

10 dB/div

Log

Center 1.733 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 10 MHz

Sweep 1.267 ms

Occupied Bandwidth

4.1397 MHz

Transmit Freq Error

1.453 kHz

x dB Bandwidth

4.717 MHz

OBW Power

99.00 %

x dB

-26.00 dB

Frequency

Center Freq 1.732600000 GHz

CF Step 1.000000 MHz

Auto

Freq Offset 0 Hz

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.752600000 GHz

Ref Offset 24.5 dB

Ref 30.00 dBm

10 dB/div

Log

Center 1.753 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 10 MHz

Sweep 1.267 ms

Occupied Bandwidth

4.1492 MHz

Transmit Freq Error

4.094 kHz

x dB Bandwidth

4.720 MHz

OBW Power

99.00 %

x dB

-26.00 dB

Frequency


Center Freq 1.752600000 GHz

CF Step 1.000000 MHz

Auto

Freq Offset 0 Hz



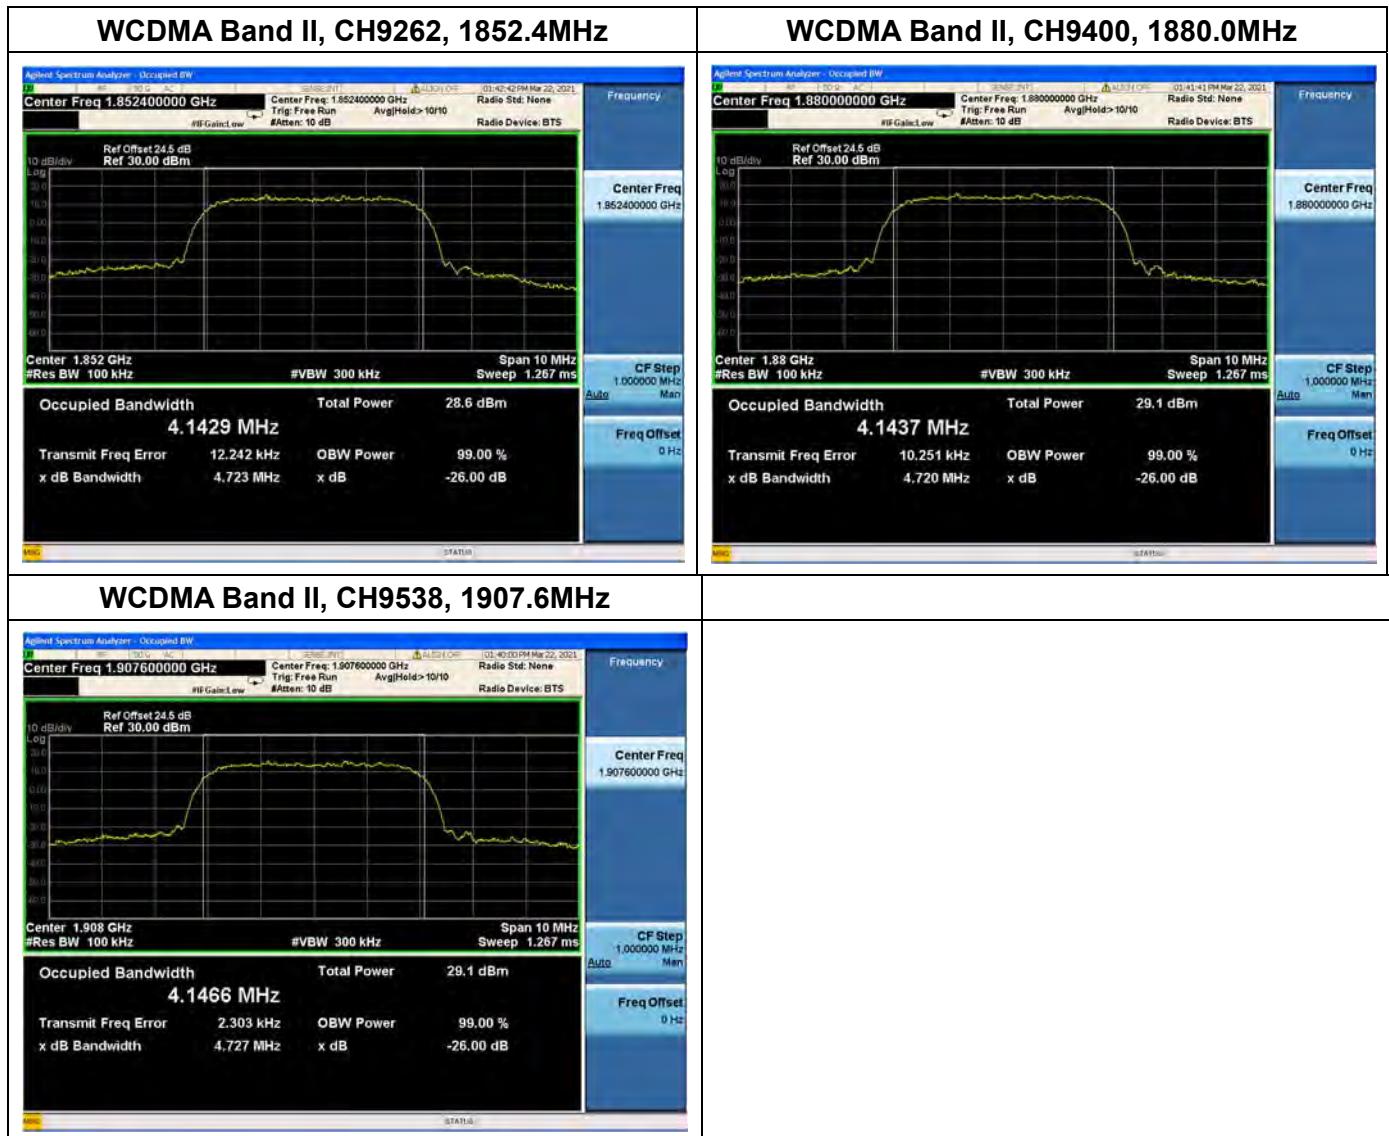

2.4. Frequency Stability

2.4.1. Requirement


According to FCC section 22.355, 24.235 and 27.54 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Note: The operating temperature of EUT is from 0°C to 55°C, which are specified by the applicant.

2.4.2. Test Description

Test Setup:

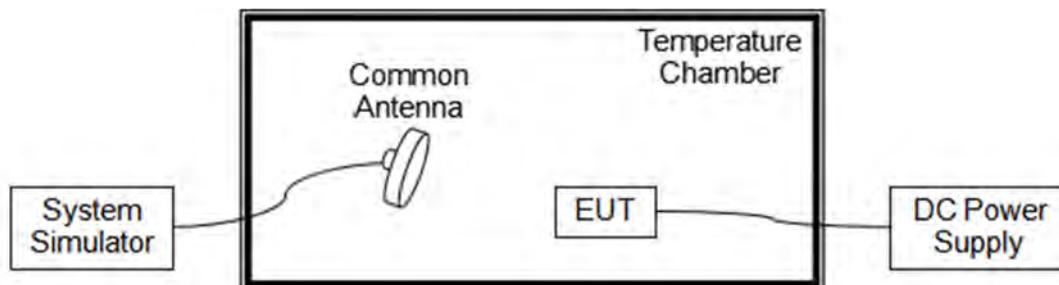

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.





2.4.3. Test Result

The nominal, highest and lowest extreme voltages are separately 3.80V, 4.20V and 3.60V, which are specified by the applicant; the normal temperature here used is 20°C.

WCDMA Band V, CH4182, 836.4MHz					
Limit = ± 2.5 ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.80	+20(Ref)	-22	-0.026	PASS
Normal		0	-20	-0.024	
Normal		+10	20	0.024	
Normal		+20	23	0.027	
Normal		+30	17	0.020	
Normal		+40	-13	-0.016	
Normal		+50	-40	-0.048	
Normal		+55	-12	-0.014	
High	4.20	+20	29	0.035	
BATT.ENDPOINT	3.60	+20	-21	-0.026	

WCDMA Band IV, CH1413, 1732.6MHz					
Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.80	+20(Ref)	21	0.012	PASS
Normal		0	33	0.019	
Normal		+10	-26	-0.015	
Normal		+20	13	0.008	
Normal		+30	-30	-0.017	
Normal		+40	27	0.016	
Normal		+50	10	0.006	
Normal		+55	-13	-0.008	
High	4.20	+20	15	0.009	
BATT.ENDPOINT	3.60	+20	-55	-0.032	





REPORT No. : SZ22070206W03

WCDMA Band II, CH9400, 1880.0MHz
Limit =Within Authorized Band

Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.80	+20(Ref)	27	0.014	PASS
Normal		0	-56	-0.030	
Normal		+10	50	0.027	
Normal		+20	-17	-0.009	
Normal		+30	47	0.025	
Normal		+40	-16	-0.009	
Normal		+50	41	0.022	
Normal		+55	21	0.011	
High	4.20	+20	10	0.005	
BATT.ENDPOINT	3.60	+20	-43	-0.023	

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn




2.5. Conducted Out of Band Emissions

2.5.1. Requirement

According to FCC section 22.917(a), 24.238(a) and 27.53(h) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency.

2.5.2. Test Description

Test Setup:



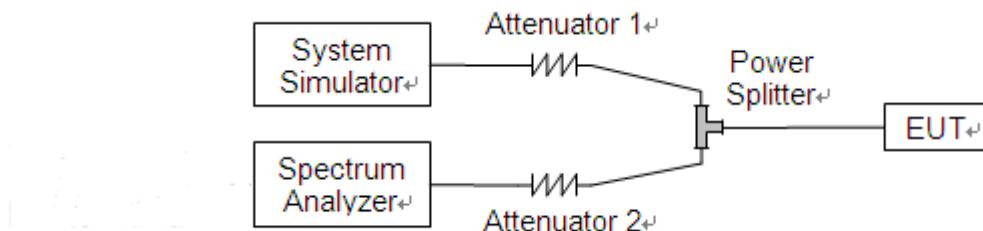


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.





2.5.3. Test Result

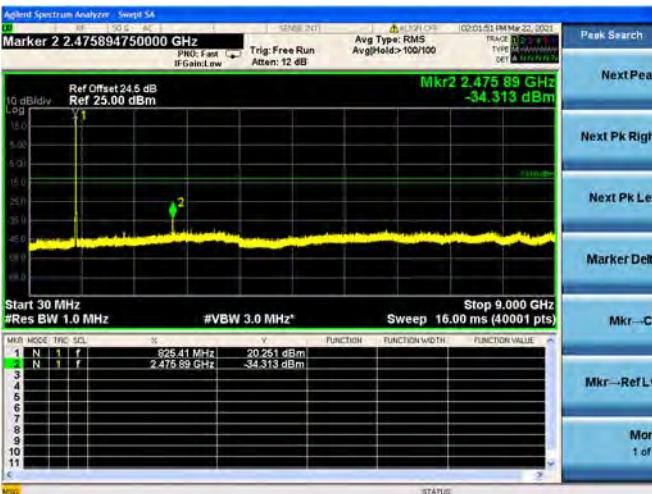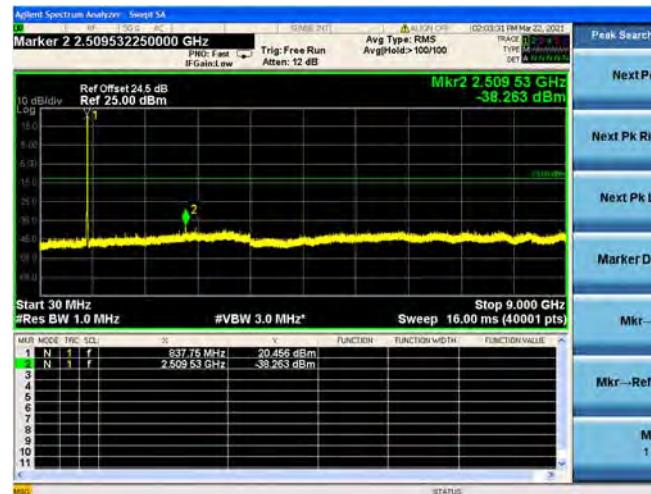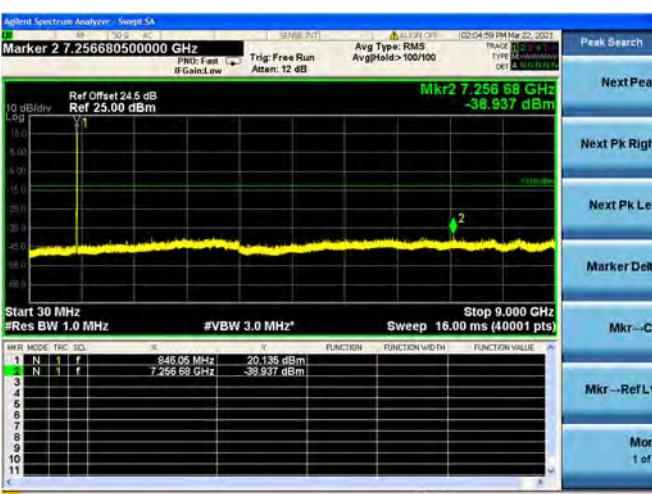
WCDMA Band V, CH4132, 826.4MHz	WCDMA Band V, CH4182, 836.4MHz
 <p>Marker 2 2.475894750000 GHz PRO: Fast IFGain:Low Trig: Free Run Atten: 12 dB Avg Type: RMS AvgHold:>100/100 Ref Offset 24.5 dB Ref 25.00 dBm Mkr2 2.475.89 GHz -34.313 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 16.00 ms (40001 pts) Mkr--CF Mkr--RefLvl More 1 of 2</p>	 <p>Marker 2 2.509532250000 GHz PRO: Fast IFGain:Low Trig: Free Run Atten: 12 dB Avg Type: RMS AvgHold:>100/100 Ref Offset 24.5 dB Ref 25.00 dBm Mkr2 2.509.53 GHz -38.263 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 16.00 ms (40001 pts) Mkr--CF Mkr--RefLvl More 1 of 2</p>
 <p>Marker 2 7.256680500000 GHz PRO: Fast IFGain:Low Trig: Free Run Atten: 12 dB Avg Type: RMS AvgHold:>100/100 Ref Offset 24.5 dB Ref 25.00 dBm Mkr2 7.256.68 GHz -38.937 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 16.00 ms (40001 pts) Mkr--CF Mkr--RefLvl More 1 of 2</p>	






REPORT No. : SZ22070206W03


WCDMA Band IV, CH1312, 1712.4MHz

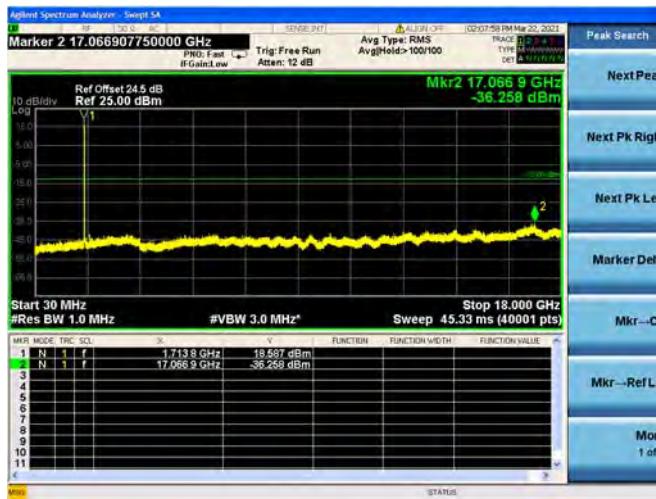


WCDMA Band IV, CH1413, 1732.6MHz

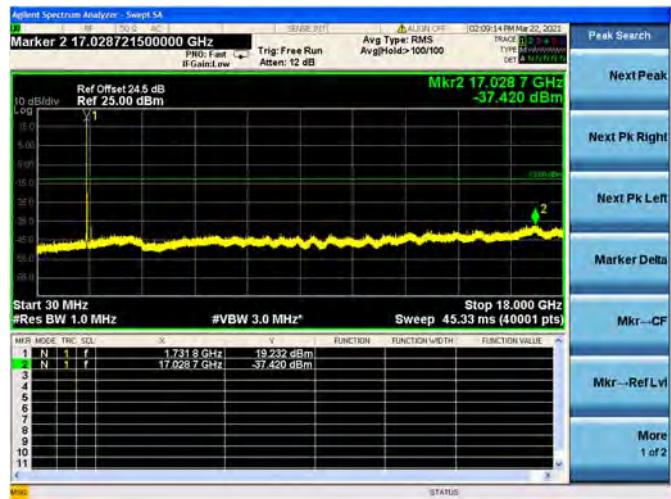

WCDMA Band IV, CH1513, 1752.6MHz

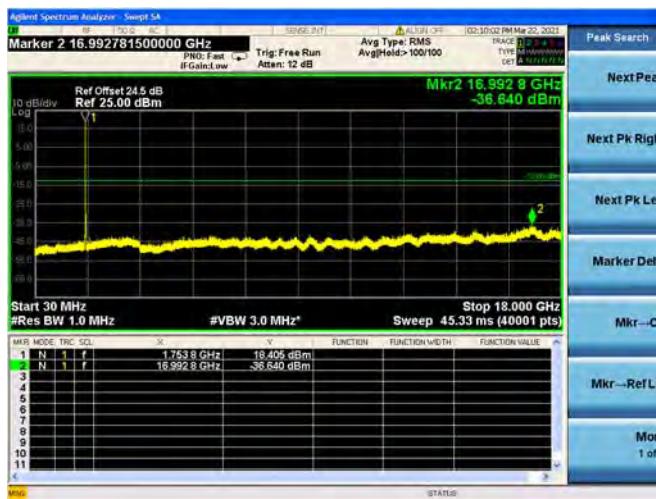

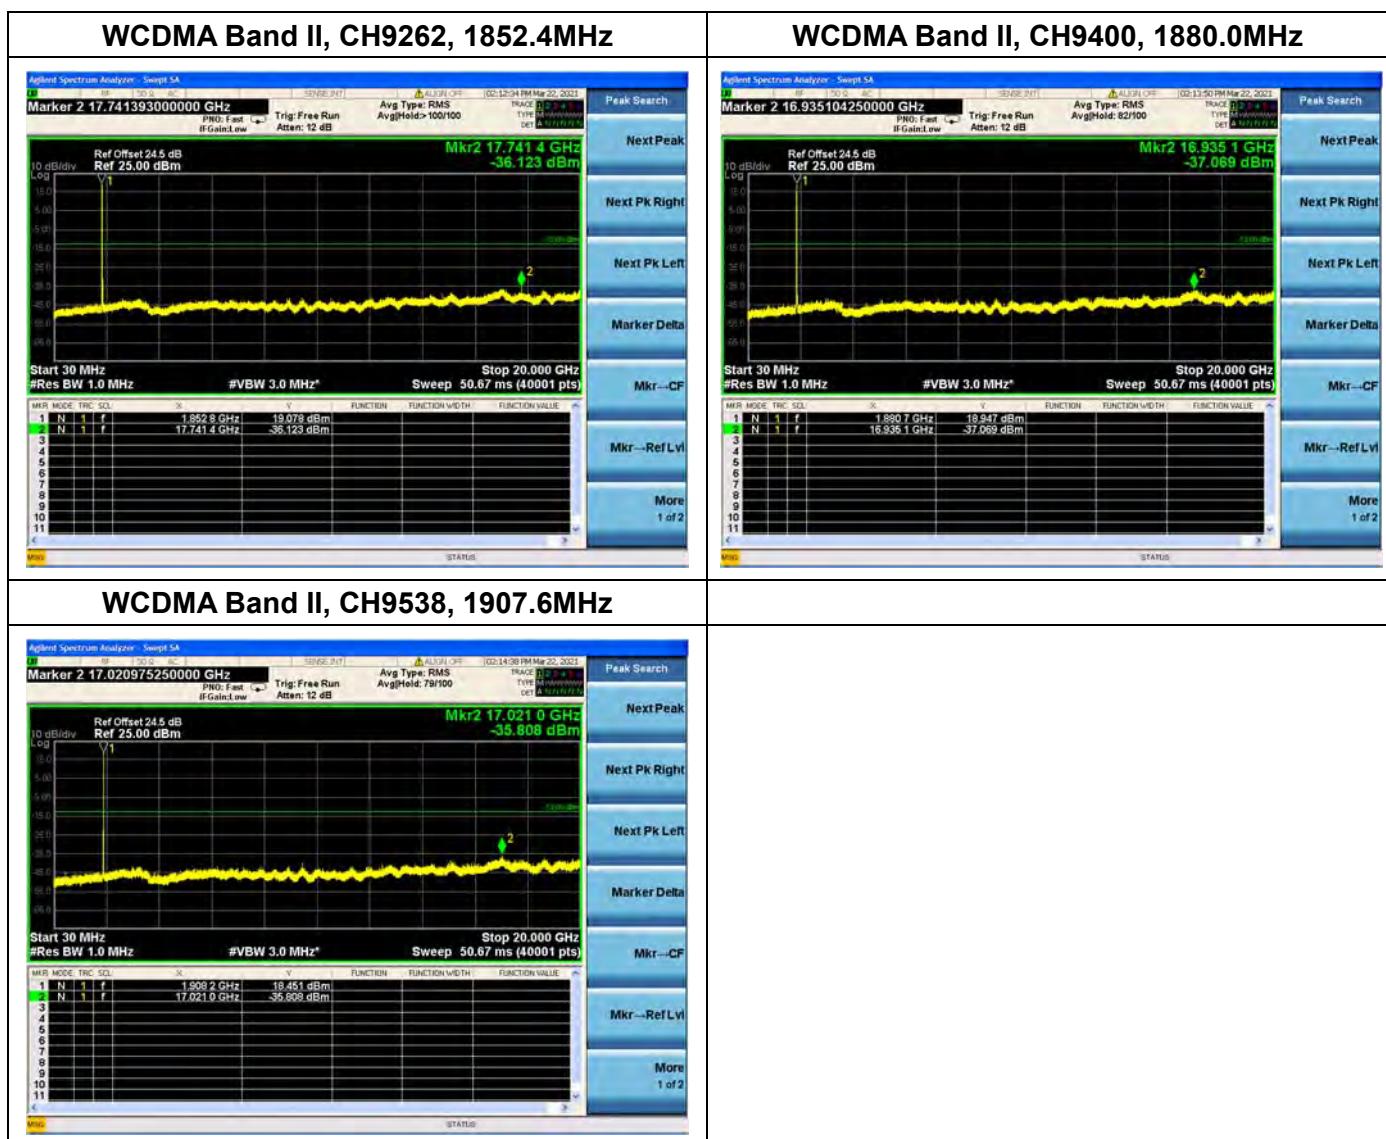


2.6. Band Edge

2.6.1. Requirement

According to FCC section 22.917(a), 24.238(a) and 27.53(h) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB.

2.6.2. Test Description

Test Setup:

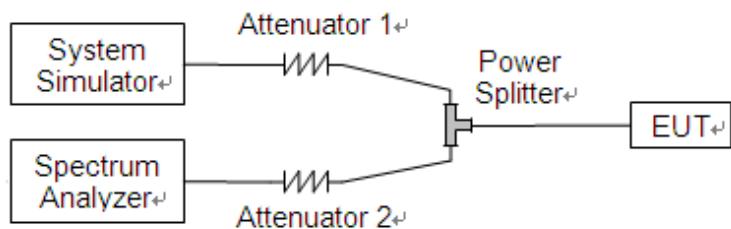

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2.6.3. Test Result

The lowest and highest channels are tested to verify the band edge emissions.





REPORT No. : SZ22070206W03

WCDMA Band V, CH4132, 826.4MHz




WCDMA Band IV, CH1312, 1712.4MHz



WCDMA Band II, CH9262, 1852.4MHz




WCDMA Band V, CH4233, 846.6MHz

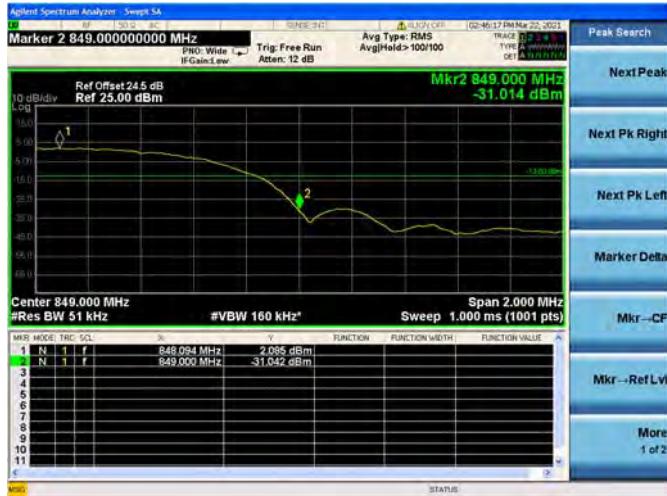

WCDMA Band IV, CH1513, 1752.6MHz



WCDMA Band II, CH9538, 1907.6MHz

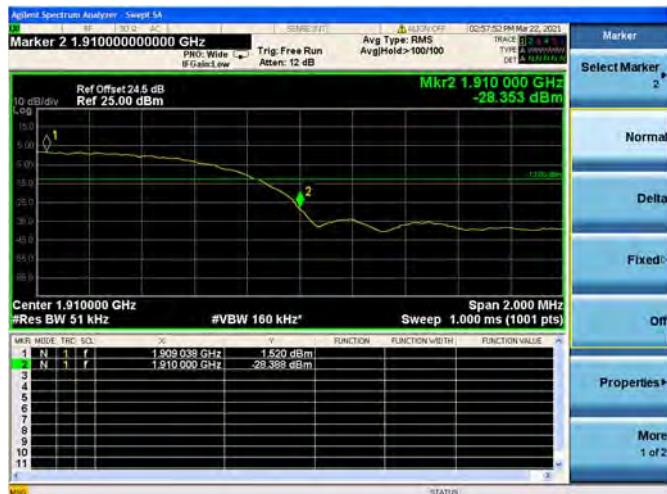

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuanDong Province, P.R.China

Tel: 86-755-36698555 Fax: 86-755-36698525
[Http://www.morlab.cn](http://www.morlab.cn) E-mail: service@morlab.cn





2.7. Determining E.R.P. and/or E.I.R.P. from conducted RF output power measurements

2.7.1. Requirement

According to FCC section 22.913, the Effective Radiated Power (E.R.P.) of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

According to FCC section 27.50, mobile, and portable (hand-held) stations is limited to 1 Watts e.i.r.p. peak power.

2.7.2. Test Description

The test setups refer to section 2.1.3

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded. Please refer to section 2.1.3 of this report.

The relevant equation for determining the maximum E.R.P. or E.I.R.P. from the measured RF output power is given in Equation (1) as follows:

$$\text{E.R.P. or E.I.R.P.} = P_{\text{Meas}} + G_T$$

Where:

E.R.P. or E.I.R.P. effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (E.R.P.) or dBi (E.I.R.P.)

For devices utilizing multiple antennas, see ANSI C63.25-2015 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

The following equations demonstrate the mathematical relationship between E.R.P. and E.I.R.P.:

a) $\text{E.R.P.} = \text{E.I.R.P.} - 2.15$, where E.R.P. and E.I.R.P. are expressed in consistent units.

b) $\text{E.I.R.P.} = \text{E.R.P.} + 2.15$, where E.R.P. and E.I.R.P. are expressed in consistent units.





2.7.3. Test Result

WCDMA Band V							
Band	Channel	Frequency (MHz)	Measured E.R.P.		Limit		Verdict
			dBm	W	dBm	W	
WCDMA	4132	826.4	22.13	0.163	38.5	7	PASS
	4182	836.4	21.79	0.151			PASS
	4233	846.6	21.55	0.143			PASS
HSDPA	4132	826.4	20.13	0.103	38.5	7	PASS
	4182	836.4	19.94	0.099			PASS
	4233	846.6	20.11	0.103			PASS
DC-HSD PA	4132	826.4	20.18	0.104	38.5	7	PASS
	4182	836.4	20.11	0.103			PASS
	4233	846.6	20.14	0.103			PASS
HSUPA	4132	826.4	20.09	0.102	38.5	7	PASS
	4182	836.4	20.18	0.104			PASS
	4233	846.6	20.09	0.102			PASS
HSPA+	4132	826.4	20.14	0.103	38.5	7	PASS
	4182	836.4	20.04	0.101			PASS
	4233	846.6	20.06	0.101			PASS

Note 1: For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.





WCDMA Band IV							
Band	Channel	Frequency (MHz)	Measured E.I.R.P.		Limit		Verdict
			dBm	W	dBm	W	
WCDMA	1312	1712.4	28.02	0.634	30	1	PASS
	1413	1732.6	28.29	0.675			PASS
	1513	1752.6	28.54	0.714			PASS
HSDPA	1312	1712.4	26.60	0.457	30	1	PASS
	1413	1732.6	26.79	0.478			PASS
	1513	1752.6	26.71	0.469			PASS
DC-HSD PA	1312	1712.4	26.67	0.465	30	1	PASS
	1413	1732.6	26.82	0.481			PASS
	1513	1752.6	26.81	0.480			PASS
HSUPA	1312	1712.4	26.67	0.465	30	1	PASS
	1413	1732.6	26.73	0.471			PASS
	1513	1752.6	26.72	0.470			PASS
HSPA+	1312	1712.4	26.55	0.452	30	1	PASS
	1413	1732.6	26.78	0.476			PASS
	1513	1752.6	26.62	0.459			PASS

Note 1: For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.





WCDMA Band II							
Band	Channel	Frequency (MHz)	Measured E.I.R.P.		Limit		Verdict
			dBm	W	dBm	W	
WCDMA	9262	1852.4	28.50	0.708	33	2	PASS
	9400	1880.0	28.34	0.682			PASS
	9538	1907.6	28.10	0.646			PASS
HSDPA	9262	1852.4	26.55	0.452	33	2	PASS
	9400	1880.0	26.70	0.468			PASS
	9538	1907.6	26.75	0.473			PASS
DC-HSD PA	9262	1852.4	26.70	0.468	33	2	PASS
	9400	1880.0	26.74	0.472			PASS
	9538	1907.6	26.77	0.475			PASS
HSUPA	9262	1852.4	26.62	0.459	33	2	PASS
	9400	1880.0	26.73	0.471			PASS
	9538	1907.6	26.66	0.463			PASS
HSPA+	9262	1852.4	22.76	0.189	33	2	PASS
	9400	1880.0	22.87	0.194			PASS
	9538	1907.6	22.86	0.193			PASS

Note 1: For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.




2.8. Radiated Out of Band Emissions

2.8.1. Requirement


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency.

2.8.2. Test Description

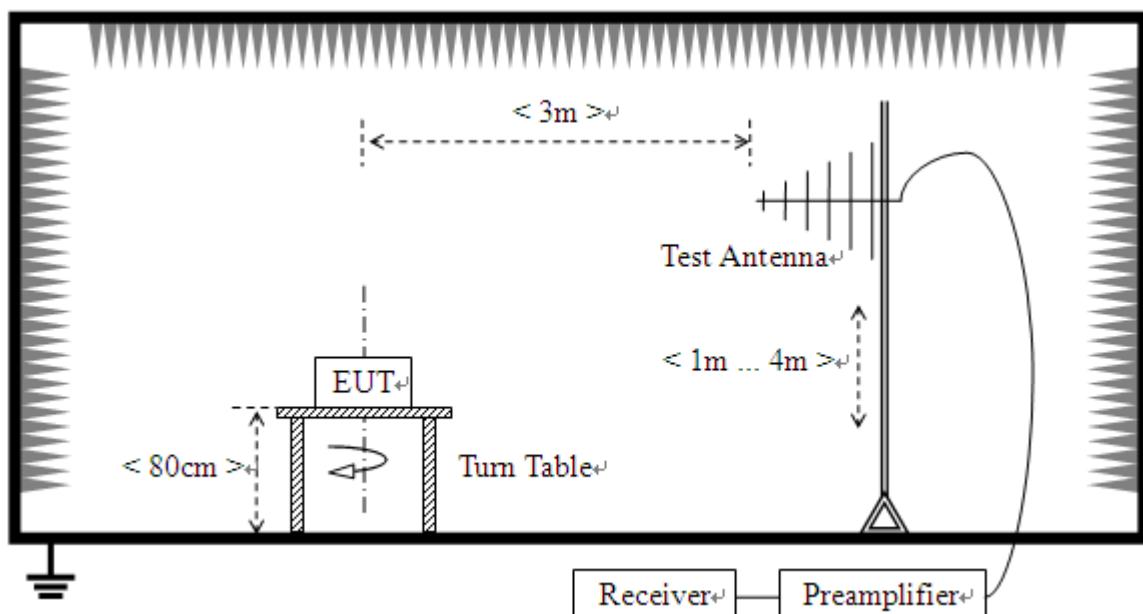

(For the test frequency from 30MHz to 1GHz)



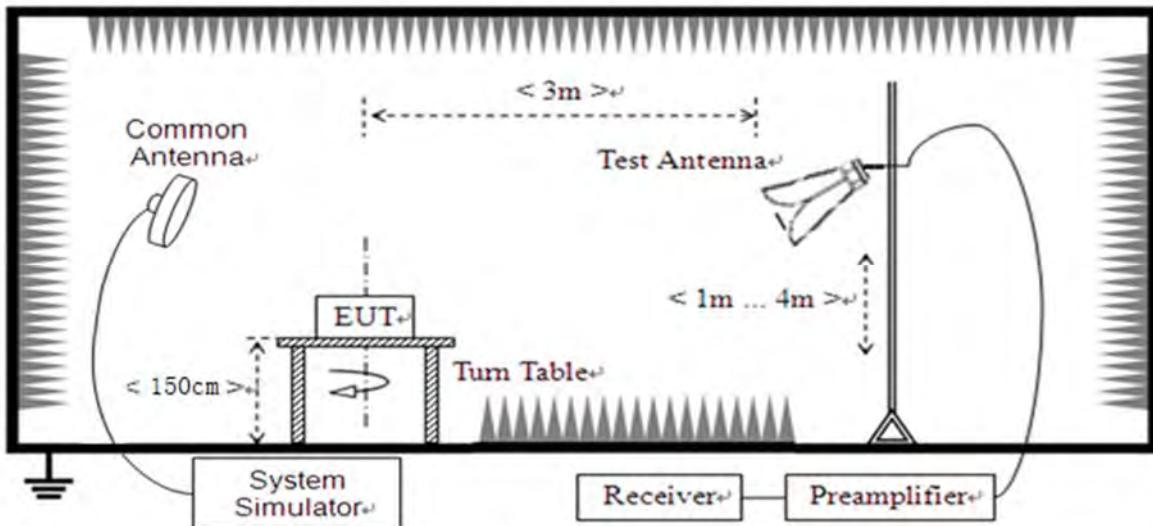

(For the test frequency above 1GHz)

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

Note: When doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.8.3. Test Procedure

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.





2.8.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

$$A_{TOT} = L_{CABLES} + A_{SUBST}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

P_{SUBST_TX} is signal generator level,

P_{SUBST_RX} is receiver level,

L_{SUBST_CABLES} is cable losses including TX cable,

$G_{SUBST_TX_ANT}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of A_{TOT} .

Note1: The power of the EUT transmitting frequency should be ignored.


Note2: All test mode and condition mentioned were considered and evaluated respectively by performing full test, only the worst data were recorded and reported.

Note3: All spurious emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note4: N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.



WCDMA Band V(WCDMA), Low Channel

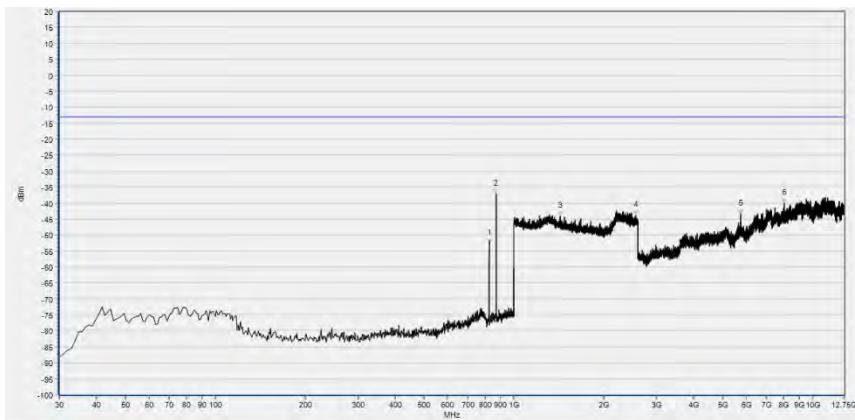


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	826.370	-52.63	-13.00	Horizontal	N/A
2	871.960	-37.30	-13.00	Horizontal	N/A
3	1426.411	-44.10	-13.00	Horizontal	PASS
4	2552.621	-43.92	-13.00	Horizontal	PASS
5	5739.689	-43.55	-13.00	Horizontal	PASS
6	8017.394	-40.13	-13.00	Horizontal	PASS

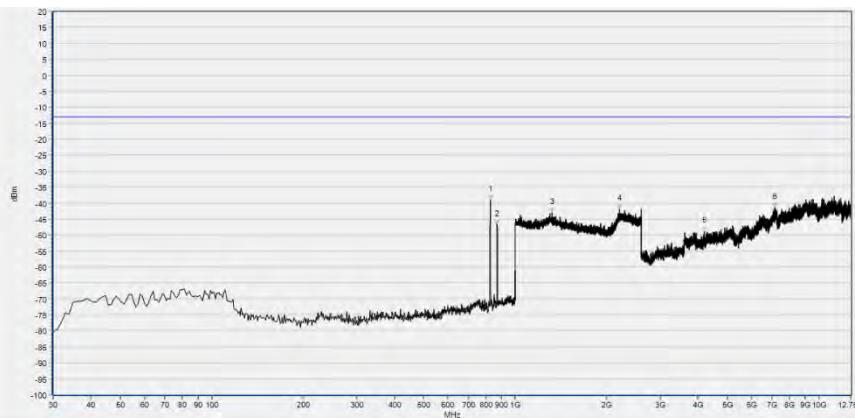


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	827.340	-38.94	-13.00	Vertical	N/A
2	871.960	-46.84	-13.00	Vertical	N/A
3	1322.689	-43.04	-13.00	Vertical	PASS
4	2198.559	-41.94	-13.00	Vertical	PASS
5	4198.454	-48.90	-13.00	Vertical	PASS
6	7170.176	-41.52	-13.00	Vertical	PASS



WCDMA Band V(WCDMA), Mid Channel

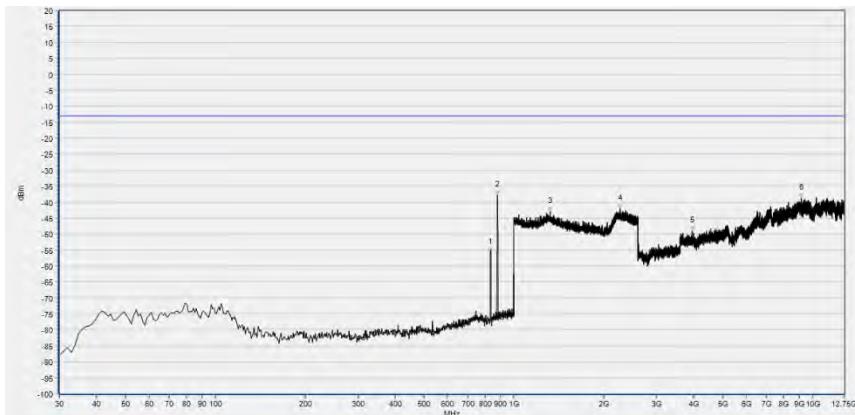


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	834.130	-55.80	-13.00	Horizontal	N/A
2	879.720	-37.79	-13.00	Horizontal	N/A
3	1323.329	-43.05	-13.00	Horizontal	PASS
4	2267.707	-42.15	-13.00	Horizontal	PASS
5	3940.044	-49.04	-13.00	Horizontal	PASS
6	9148.863	-38.76	-13.00	Horizontal	PASS

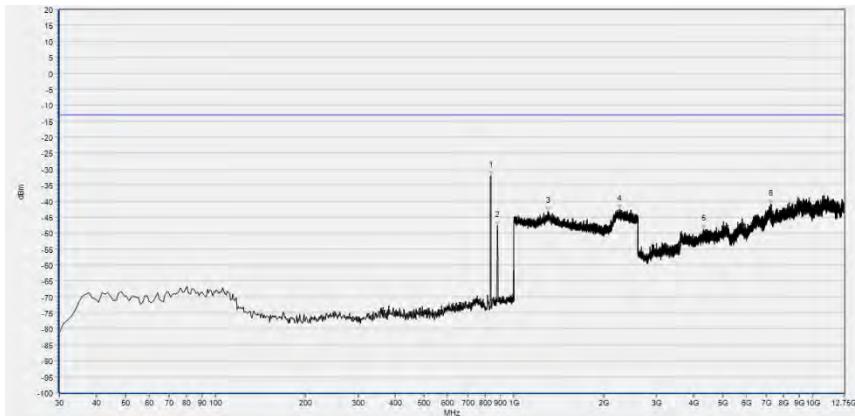


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	835.100	-32.03	-13.00	Vertical	N/A
2	881.660	-47.70	-13.00	Vertical	N/A
3	1300.280	-43.25	-13.00	Vertical	PASS
4	2254.262	-42.51	-13.00	Vertical	PASS
5	4322.122	-48.93	-13.00	Vertical	PASS
6	7216.321	-40.91	-13.00	Vertical	PASS



WCDMA Band V(WCDMA), High Channel

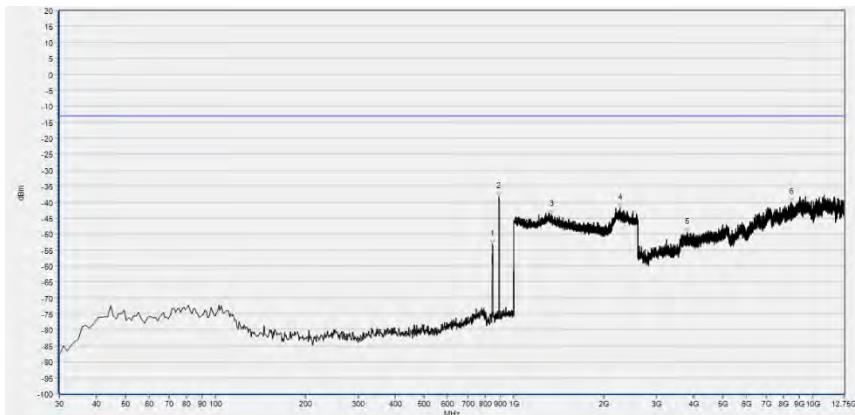


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	847.710	-53.39	-13.00	Horizontal	N/A
2	890.390	-38.40	-13.00	Horizontal	N/A
3	1338.695	-43.86	-13.00	Horizontal	PASS
4	2267.707	-41.94	-13.00	Horizontal	PASS
5	3810.838	-49.59	-13.00	Horizontal	PASS
6	8465.921	-40.21	-13.00	Horizontal	PASS

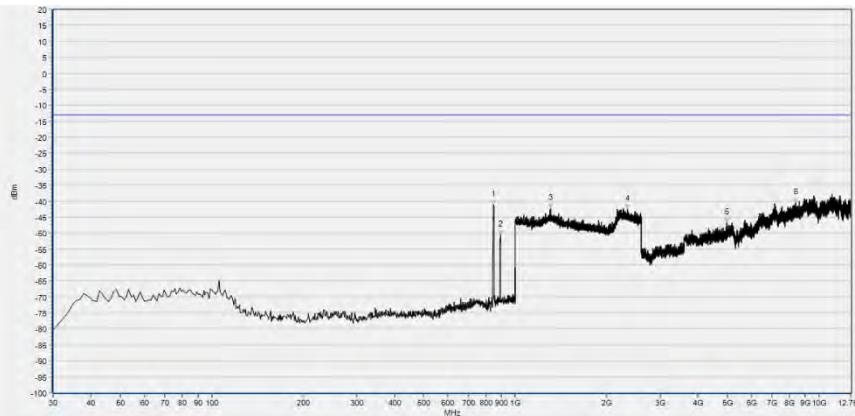


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	847.710	-41.22	-13.00	Vertical	N/A
2	893.300	-50.61	-13.00	Vertical	N/A
3	1304.762	-42.42	-13.00	Vertical	PASS
4	2336.214	-42.54	-13.00	Vertical	PASS
5	4977.378	-46.80	-13.00	Vertical	PASS
6	8403.164	-40.65	-13.00	Vertical	PASS



WCDMA Band IV(WCDMA), Low Channel

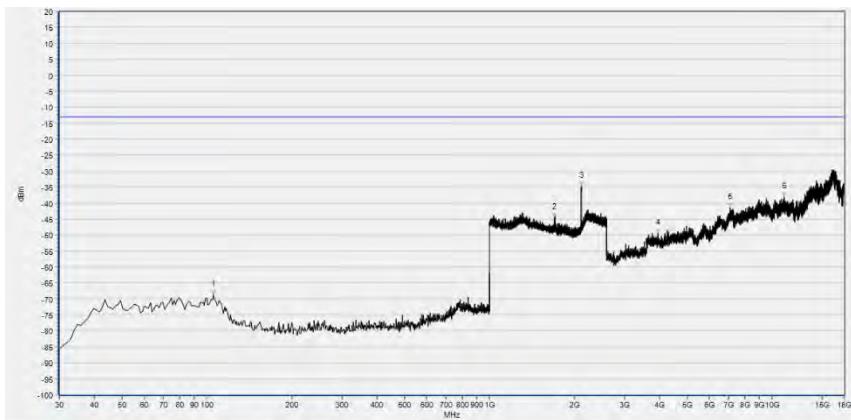


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	105.660	-68.79	-13.00	Horizontal	PASS
2	1696.599	-44.52	-13.00	Horizontal	N/A
3	2112.765	-34.81	-13.00	Horizontal	N/A
4	3947.045	-49.41	-13.00	Horizontal	PASS
5	7117.221	-41.56	-13.00	Horizontal	PASS
6	11057.538	-38.18	-13.00	Horizontal	PASS

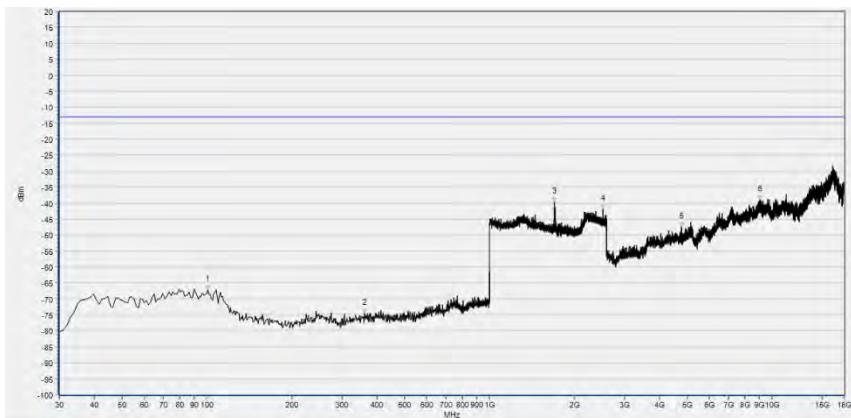


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	100.810	-67.25	-13.00	Vertical	PASS
2	360.770	-74.58	-13.00	Vertical	PASS
3	1694.678	-39.64	-13.00	Vertical	N/A
4	2517.407	-41.90	-13.00	Vertical	PASS
5	4767.594	-47.53	-13.00	Vertical	PASS
6	9052.373	-39.02	-13.00	Vertical	PASS



WCDMA Band IV(WCDMA), Mid Channel

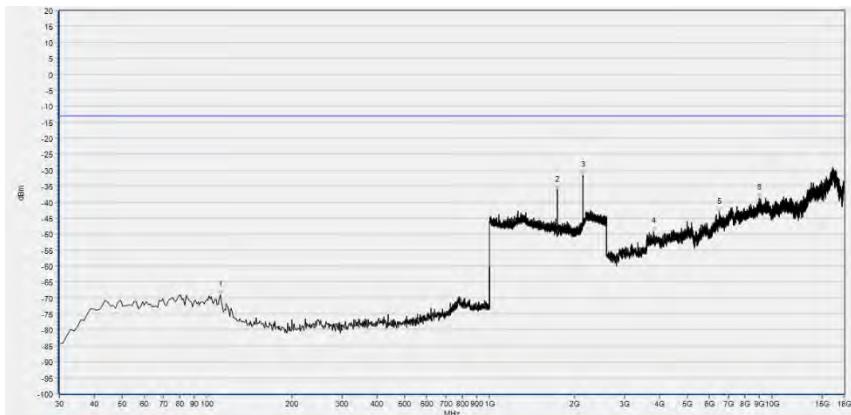


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	111.480	-69.08	-13.00	Horizontal	PASS
2	1738.856	-36.22	-13.00	Horizontal	N/A
3	2141.577	-31.70	-13.00	Horizontal	N/A
4	3801.418	-49.34	-13.00	Horizontal	PASS
5	6517.912	-43.20	-13.00	Horizontal	PASS
6	8985.161	-38.83	-13.00	Horizontal	PASS

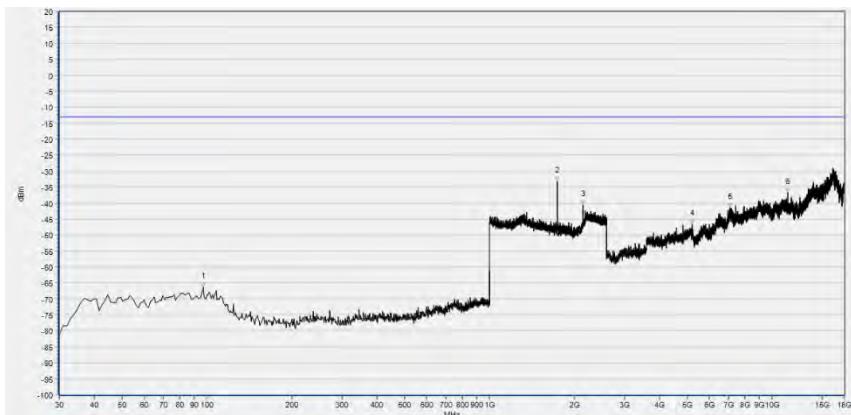


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	96.930	-66.31	-13.00	Vertical	PASS
2	1739.496	-33.20	-13.00	Vertical	N/A
3	2140.296	-40.48	-13.00	Vertical	N/A
4	5210.075	-46.52	-13.00	Vertical	PASS
5	7117.221	-41.47	-13.00	Vertical	PASS
6	11345.990	-36.86	-13.00	Vertical	PASS



WCDMA Band IV(WCDMA), High Channel

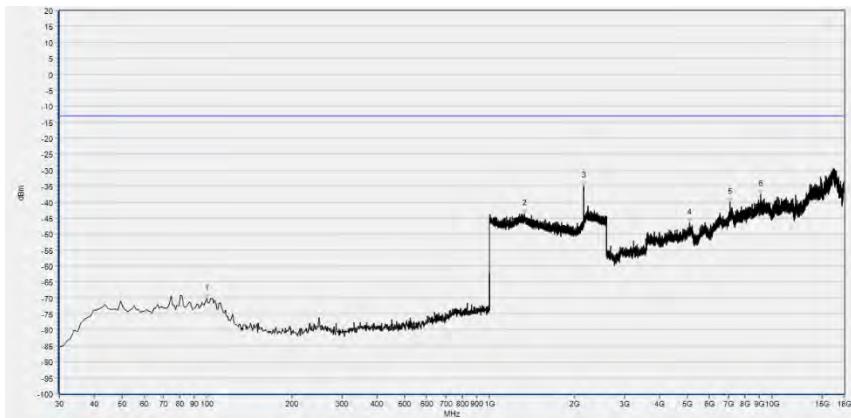


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	99.840	-70.36	-13.00	Horizontal	PASS
2	1329.092	-43.62	-13.00	Horizontal	PASS
3	2151.821	-35.06	-13.00	Horizontal	N/A
4	5109.256	-46.67	-13.00	Horizontal	PASS
5	7092.017	-40.19	-13.00	Horizontal	PASS
6	9094.381	-37.71	-13.00	Horizontal	PASS

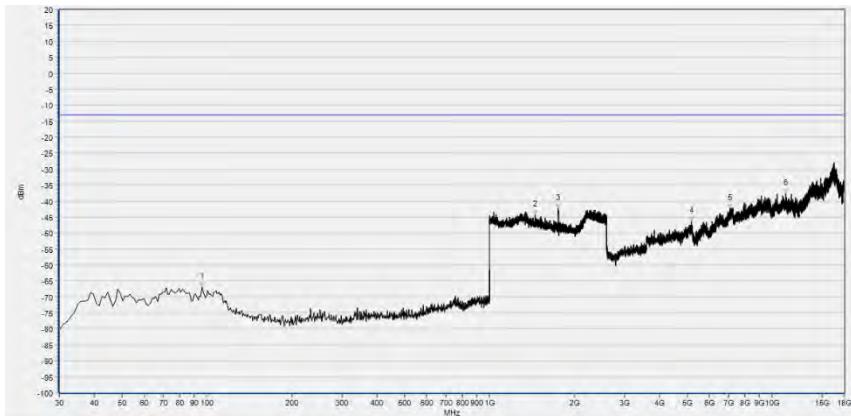


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	95.960	-67.02	-13.00	Vertical	PASS
2	1447.539	-44.37	-13.00	Vertical	PASS
3	1752.301	-42.28	-13.00	Vertical	N/A
4	5190.471	-46.40	-13.00	Vertical	PASS
5	7083.615	-42.29	-13.00	Vertical	PASS
6	11200.364	-37.65	-13.00	Vertical	PASS



WCDMA Band II(WCDMA), Low Channel

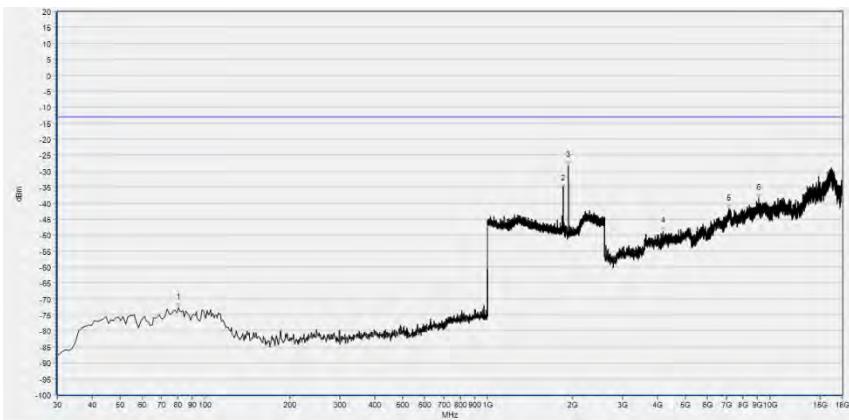


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	80.440	-72.68	-13.00	Horizontal	PASS
2	1853.461	-35.54	-13.00	Horizontal	N/A
3	1934.774	-28.21	-13.00	Horizontal	N/A
4	4176.687	-48.75	-13.00	Horizontal	PASS
5	7122.822	-41.99	-13.00	Horizontal	PASS
6	9102.782	-38.45	-13.00	Horizontal	PASS

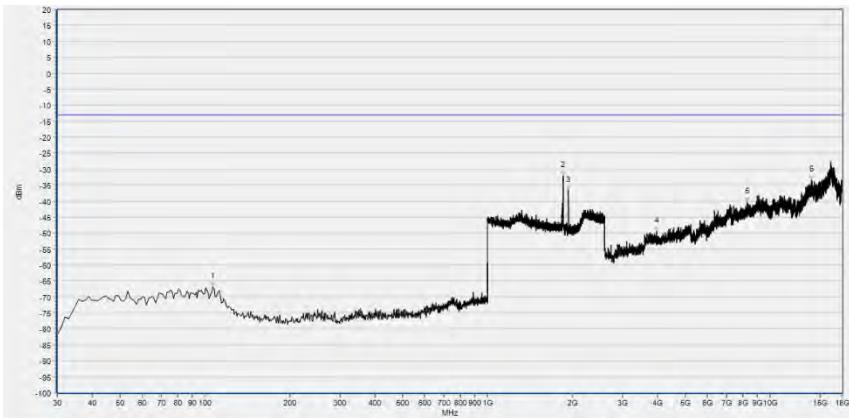


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	106.630	-66.88	-13.00	Vertical	PASS
2	1852.181	-32.09	-13.00	Vertical	N/A
3	1934.774	-36.69	-13.00	Vertical	N/A
4	3963.848	-49.57	-13.00	Vertical	PASS
5	8310.238	-40.28	-13.00	Vertical	PASS
6	14009.274	-33.42	-13.00	Vertical	PASS



WCDMA Band II(WCDMA), Mid Channel

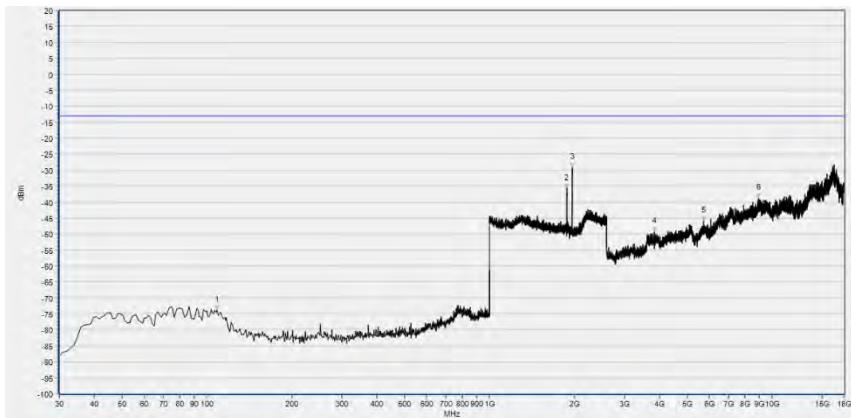


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	108.570	-73.96	-13.00	Horizontal	PASS
2	1879.072	-35.79	-13.00	Horizontal	N/A
3	1959.104	-29.17	-13.00	Horizontal	N/A
4	3829.424	-49.34	-13.00	Horizontal	PASS
5	5728.169	-45.90	-13.00	Horizontal	PASS
6	8962.757	-38.71	-13.00	Horizontal	PASS

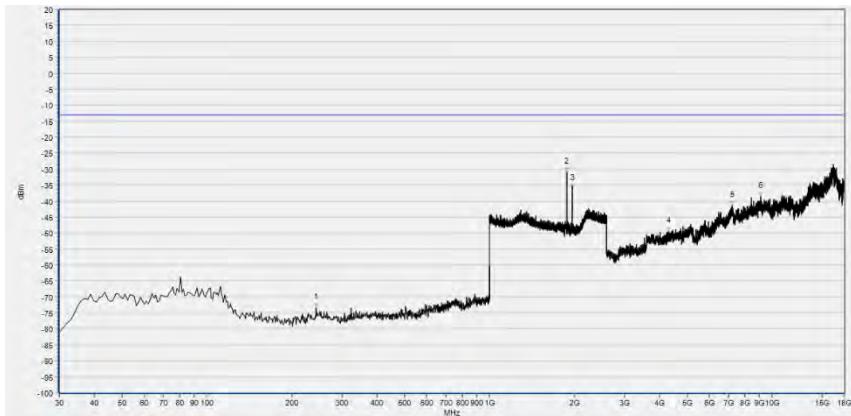


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	243.400	-73.40	-13.00	Vertical	PASS
2	1879.072	-31.04	-13.00	Vertical	N/A
3	1959.104	-36.03	-13.00	Vertical	N/A
4	4299.909	-49.50	-13.00	Vertical	PASS
5	7206.838	-41.44	-13.00	Vertical	PASS
6	9099.982	-38.47	-13.00	Vertical	PASS



WCDMA Band II(WCDMA), High Channel

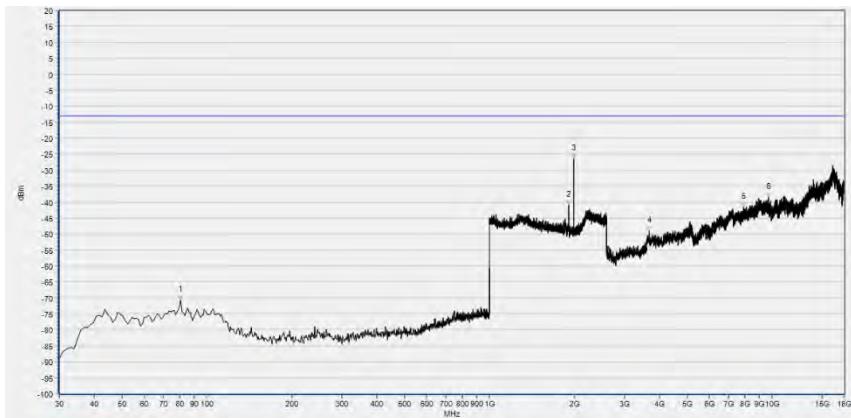

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	80.440	-70.73	-13.00	Horizontal	PASS
2	1908.523	-40.91	-13.00	Horizontal	N/A
3	1989.196	-26.57	-13.00	Horizontal	N/A
4	3680.997	-48.96	-13.00	Horizontal	PASS
5	7926.568	-41.73	-13.00	Horizontal	PASS
6	9730.096	-38.51	-13.00	Horizontal	PASS

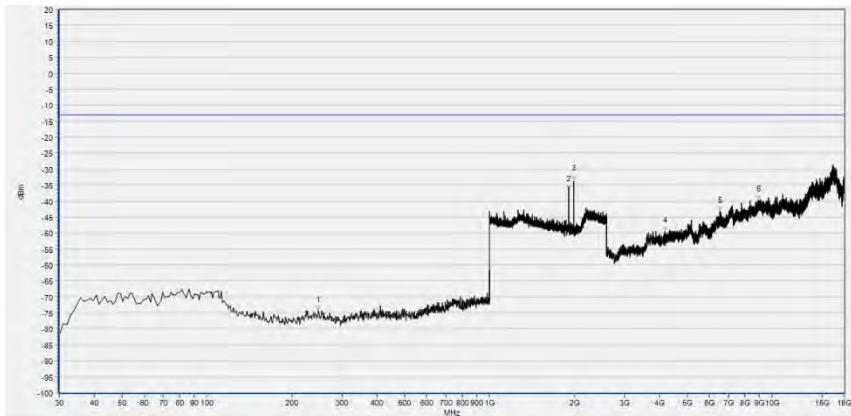

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	248.250	-74.24	-13.00	Vertical	PASS
2	1909.804	-36.56	-13.00	Vertical	N/A
3	1988.555	-33.85	-13.00	Vertical	N/A
4	4193.490	-49.45	-13.00	Vertical	PASS
5	6540.316	-43.24	-13.00	Vertical	PASS
6	8962.757	-39.74	-13.00	Vertical	PASS



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Output Power	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77dB
Radiated Emission	±2.95dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2





Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





REPORT No. : SZ22070206W03

4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY51511149	N9020A	Agilent	2020.07.27	2021.07.26
System Simulator	6200995016	MT8820C	Anritsu	2020.10.28	2021.10.27
Temperature Chamber	20171112102	HZ-2019	Dongguan Lixian Instrument Technology Co., Ltd	2020.10.26	2021.10.25

4.2 List of Software Used

Description	Manufacturer	Software Version
Morlab FCC Test System	MORLAB	V2.8
MORLAB EMCR V1.2	MORLAB	V1.0

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn





4.3 Radiated Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
System Simulator	152038	CMW500	R&S	2020.11.19	2021.11.18
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9kHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-GSM 850	Wainwright	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-GSM 1900	Wainwright	2020.07.21	2021.07.20
Notch Filter	N/A	WRCGV-W Band V	Wainwright	2020.07.21	2021.07.20
Notch Filter	N/A	WRCGV-W Band II	Wainwright	2020.07.21	2021.07.20





REPORT No. : SZ22070206W03

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Notch Filter	N/A	WRCGV-W Band IV	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2019.07.13	2022.07.12

———— END OF REPORT ————

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
[Http://www.morlab.cn](http://www.morlab.cn) E-mail: service@morlab.cn

