

# FCC REPORT

**Applicant:** Vitall Inc.

**Address of Applicant:** 4539 Metropolitan Court, Frederick MD 21704 United States

## Equipment Under Test (EUT)

**Product Name:** Wireless HUB

**Model No.:** KY-CS01B

**FCC ID:** 2ABMU-KY-CS01B

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247:2014

**Date of sample receipt:** July 07, 2015

**Date of Test:** July 07-08, 2015

**Date of report issued:** July 08, 2015

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Lo**  
**Laboratory Manager**

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	July 08, 2015	Original

Tested By:

Sam. Gao

Date:

July 08, 2015

Project Engineer

Check By:

hank. yan

Date:

July 08, 2015

Reviewer

## 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION .....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF EUT .....	5
5.3 TEST MODE .....	7
5.4 DESCRIPTION OF SUPPORT UNITS .....	7
5.5 TEST FACILITY .....	7
5.6 TEST LOCATION .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA .....	9
7.1 ANTENNA REQUIREMENT .....	9
7.2 CONDUCTED EMISSIONS .....	10
7.3 CONDUCTED OUTPUT POWER .....	13
7.4 CHANNEL BANDWIDTH .....	15
7.5 POWER SPECTRAL DENSITY .....	17
7.6 BAND EDGES .....	19
7.6.1 Conducted Emission Method .....	19
7.6.2 Radiated Emission Method .....	20
7.7 SPURIOUS EMISSION .....	23
7.7.1 Conducted Emission Method .....	23
7.7.2 Radiated Emission Method .....	25
8 TEST SETUP PHOTO .....	31
9 EUT CONSTRUCTIONAL DETAILS .....	33

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 Client Information

Applicant:	Vitall Inc.
Address of Applicant:	4539 Metropolitan Court, Frederick MD 21704 United States
Manufacturer:	Shenzhen Qianhai Kunyuan Smarter Co., Ltd.
Address of Manufacturer:	Room 607, Complex Building, Tsinghua High-Tech Park, Nanshan District, Shenzhen, P.R.C.
Factory:	Shenzhen Zhonglongtong Electronic Co.,Ltd
Address of Factory:	B4 Building, Pokeng 1st Industry Park,Nanpu Road,Shajing Town,Baoan,Shenzhen

### 5.2 General Description of EUT

Product Name:	Wireless HUB
Model No.:	KY-CS01B
Operation Frequency:	2405MHz~2475MHz
Channel Numbers:	5
Channel Separation:	≥5MHz
Modulation Type:	GFSK
Antenna Type:	PCB antenna
Antenna Gain:	2.0dBi (declare by Applicant)
Power Supply:	AC/DC Adaptor: Model No.:PGAE0500200U1CH Input:100-240V~50/60Hz 0.3A Output:5.0V---2.0A

<b>Operation Frequency each of channel</b>					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	2	2415MHz	3	2430MHz
4	2450MHz	5	2475MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2430MHz
The Highest channel	2475MHz

## 5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<p><i>Remark: During the test, the dutycycle &gt;98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i></p>	

## 5.4 Description of Support Units

None
------

## 5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

## 5.6 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building, No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, China Tel: 0755-27798480 Fax: 0755-27798960

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 28 2015	Mar. 27 2016
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Jun. 30 2015	Jun. 29 2016
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jun. 30 2015	Jun. 29 2016
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Jun. 30 2015	Jun. 29 2016
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	Jun. 25 2016	Jun. 24 2016
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 27 2015	Mar. 26 2016
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 28 2015	Mar. 27 2016
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 28 2015	Mar. 27 2016
11	Coaxial cable	GTS	N/A	GTS210	Mar. 28 2015	Mar. 27 2016
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 28 2015	Mar. 27 2016
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jun. 30 2015	Jun. 29 2016
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jun. 30 2015	Jun. 29 2016
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Jun. 25 2016	Jun. 24 2016
16	Band filter	Amindeon	82346	GTS219	Mar. 28 2015	Mar. 27 2016
17	Power Meter	Anritsu	ML2495A	GTS540	Jun. 30 2015	Jun. 29 2016
18	Power Sensor	Anritsu	MA2411B	GTS541	Jun. 30 2015	Jun. 29 2016


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Jun. 30 2015	Jun. 29 2016
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jun. 30 2015	Jun. 29 2016
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jun. 30 2015	Jun. 29 2016
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jun. 30 2015	Jun. 29 2016
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jun. 30 2015	Jun. 29 2016
6	Coaxial Cable	GTS	N/A	GTS227	Jun. 30 2015	Jun. 29 2016
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	Jun 07 2015	Jun 06 2016


## 7 Test results and Measurement Data

### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>15.247(c) (1)(i) requirement:</b> (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
<b>EUT Antenna:</b> <i>The antenna is PCB antenna, the best case gain of the antenna is 2.0dBi</i>	

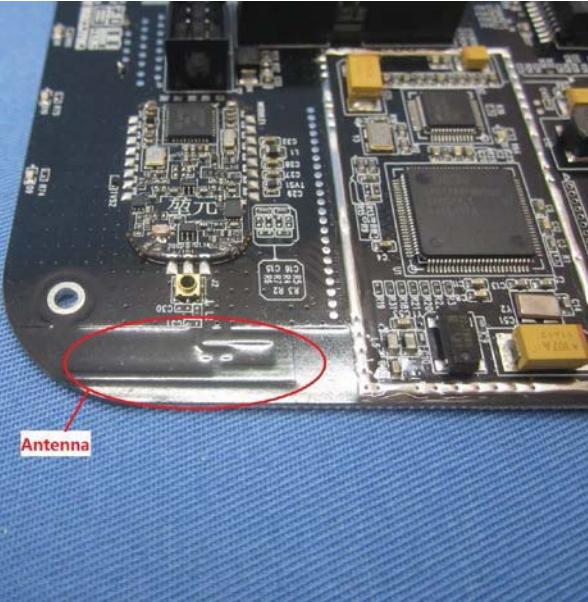


## 7.2 Conducted Emissions

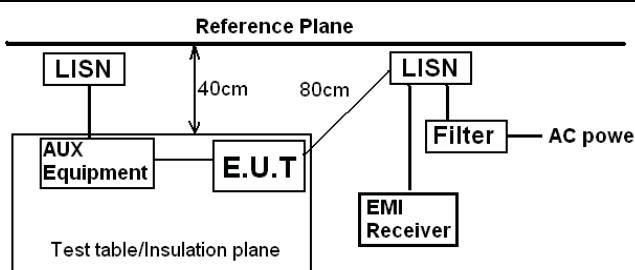Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.4:2014		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	 <p>Reference Plane</p> <p>LISN</p> <p>AUX Equipment</p> <p>E.U.T</p> <p>Test table/Insulation plane</p> <p>EMI Receiver</p> <p>Filter</p> <p>AC power</p> <p>40cm</p> <p>80cm</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test procedure:	<ol style="list-style-type: none"> <li>The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.</li> </ol>		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

## Measurement data


Line:

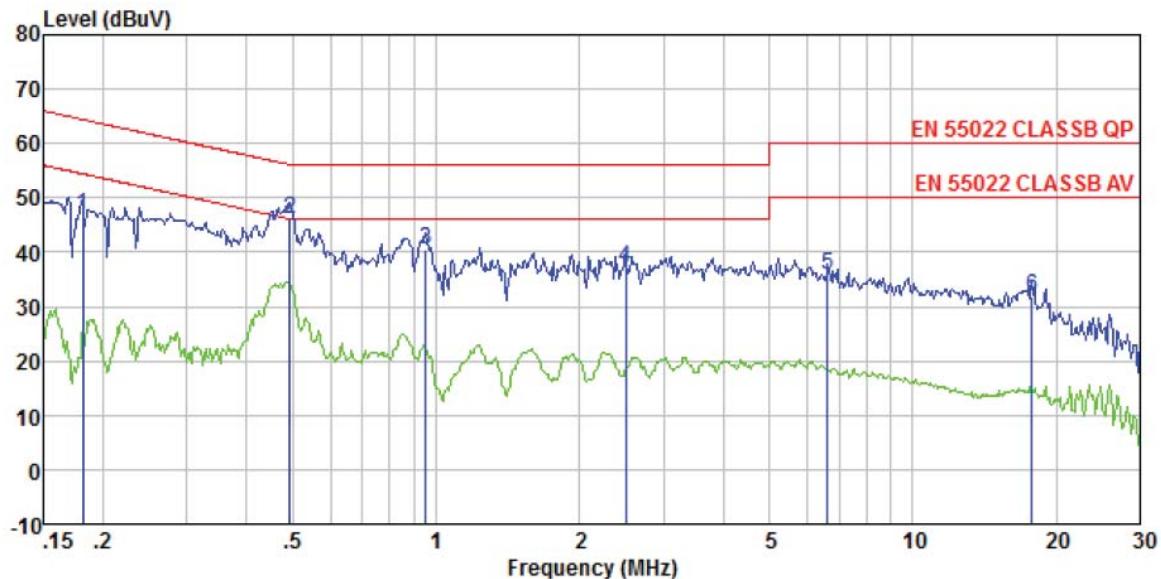

Site : Shielded room  
 Condition : EN 55022 CLASSB QP LISN-2013 LINE  
 Job No. : 0962RF  
 Test mode : Transmitter mode  
 Test Engineer: Song

	Read Freq	Cable Level	LISN Loss Factor	Limit Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dB	
1	0.182	46.42	0.13	0.14	46.69	64.42	-17.73 QP
2	0.494	45.86	0.11	0.12	46.09	56.10	-10.01 QP
3	0.953	40.31	0.13	0.14	40.58	56.00	-15.42 QP
4	2.500	36.94	0.15	0.13	37.22	56.00	-18.78 QP
5	6.627	35.40	0.16	0.24	35.80	60.00	-24.20 QP
6	17.755	31.21	0.22	0.49	31.92	60.00	-28.08 QP

Neutral:

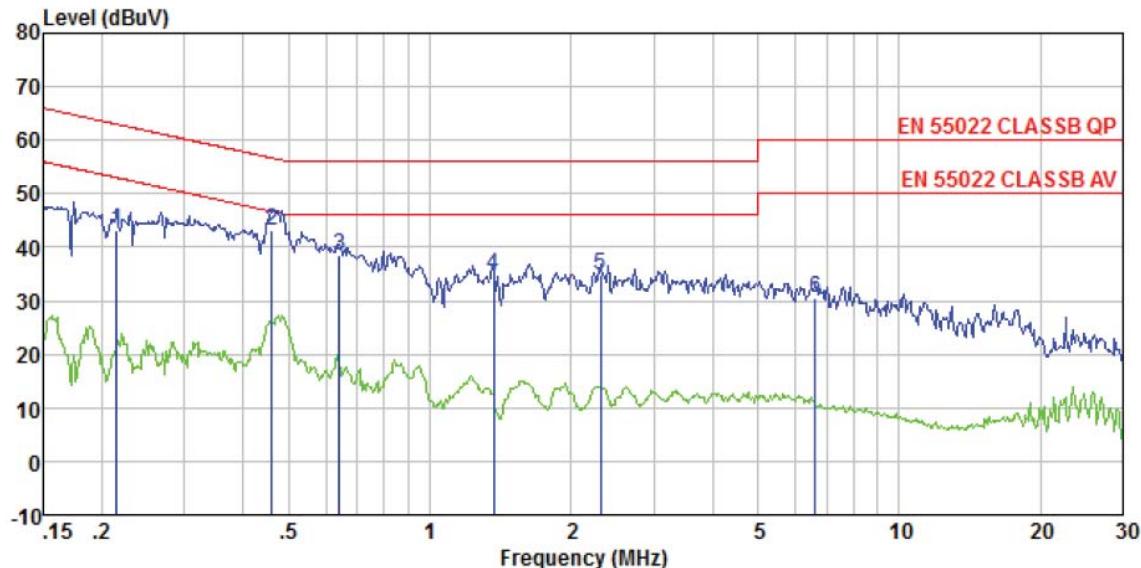

Site : Shielded room  
 Condition : EN 55022 CLASSB QP LISN-2013 NEUTRAL


Job No. : 0962RF  
 Test mode : Transmitter mode  
 Test Engineer: Song

Freq	Read	Cable	LISN	Limit	Over	Remark
	Level	Loss	Factor			
MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.215	42.89	0.13	0.06	43.08	63.01 -19.93 QP
2	0.461	42.89	0.11	0.06	43.06	56.67 -13.61 QP
3	0.641	38.43	0.13	0.07	38.63	56.00 -17.37 QP
4	1.367	34.61	0.13	0.09	34.83	56.00 -21.17 QP
5	2.309	34.53	0.15	0.10	34.78	56.00 -21.22 QP
6	6.627	30.21	0.16	0.18	30.55	60.00 -29.45 QP

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

## 7.3 Conducted Output Power

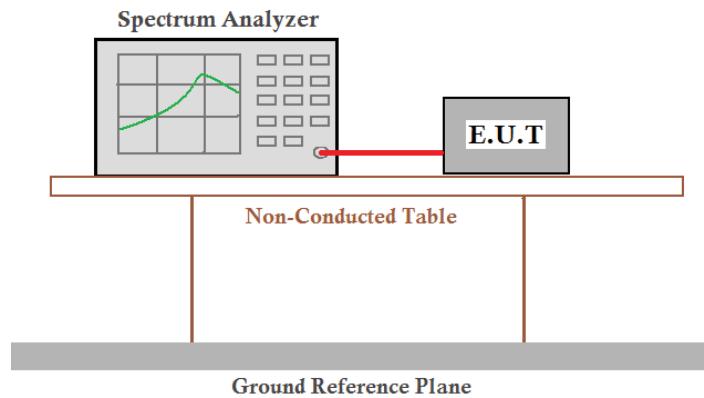
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2014 and KDB558074 D01 DTS Meas Guidance V03
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup for conducted output power. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

### Measurement Data


Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	13.08	30.00	Pass
Middle	12.24		
Highest	9.88		

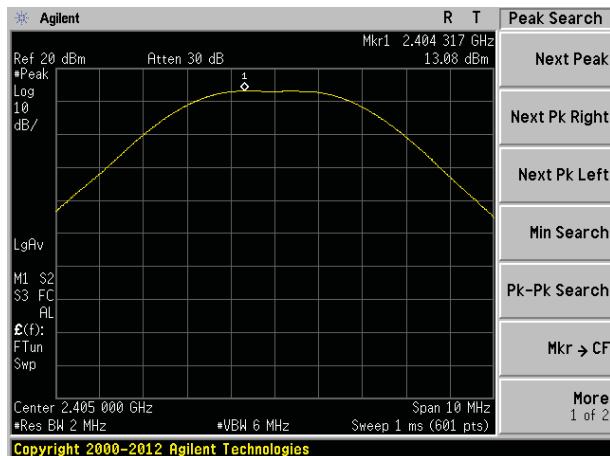**Test plot as follows:**


Lowest channel

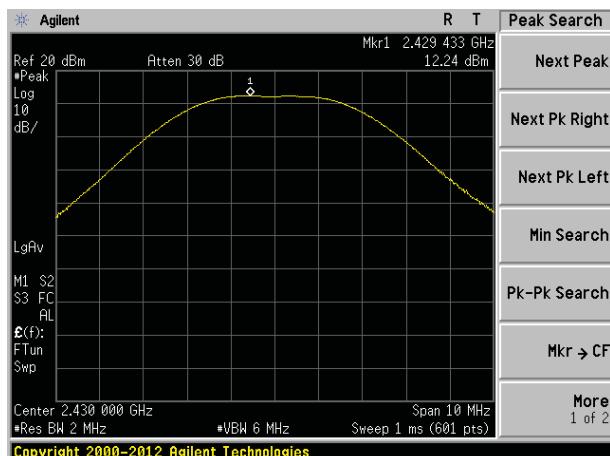


Middle channel

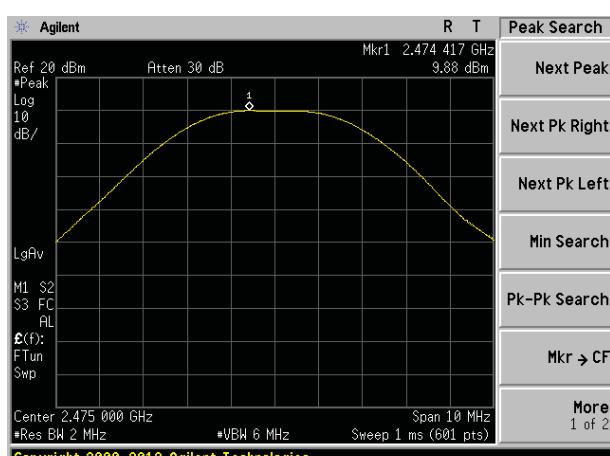

Highest channel

## 7.4 Channel Bandwidth

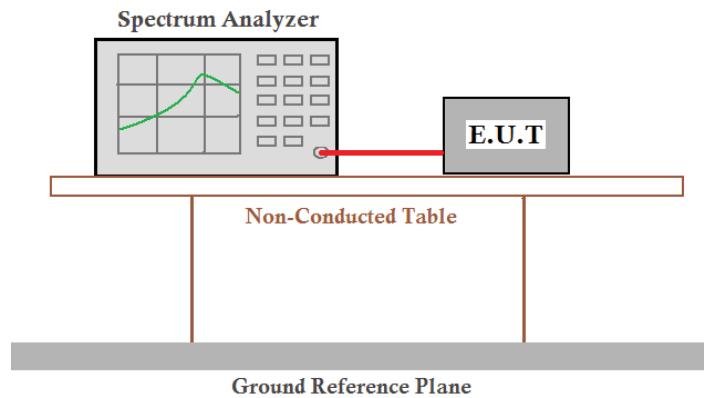Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2014 and KDB558074 D01 DTS Meas Guidance V03
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup for channel bandwidth measurement. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

### Measurement Data

Test channel	Channel Bandwidth (KHz)	Limit(KHz)	Result
Lowest	1613	>500	Pass
Middle	1612		
Highest	1603		


Test plot as follows:



Lowest channel




Middle channel

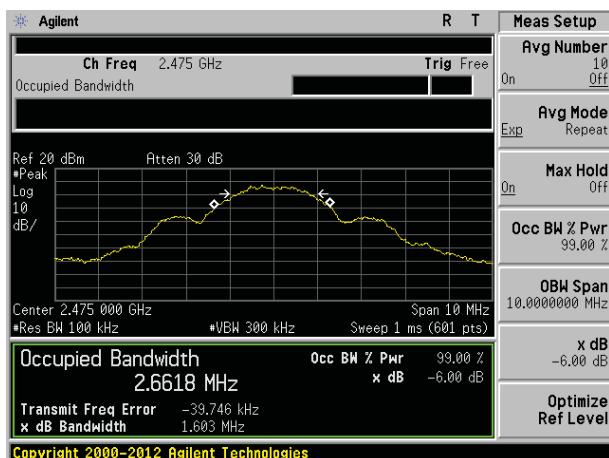


Highest channel

## 7.5 Power Spectral Density

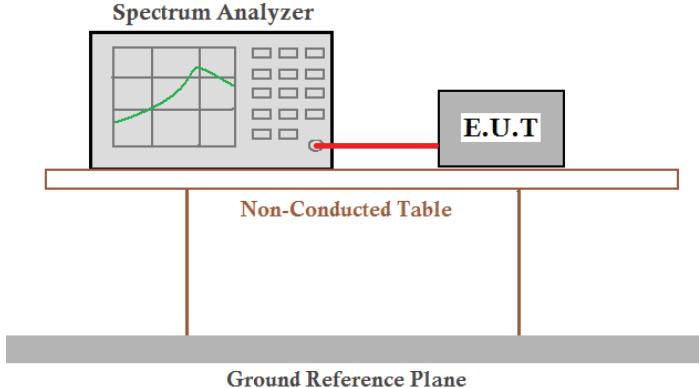
Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.4:2014 and KDB558074 D01 DTS Meas Guidance V03
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A 'Spectrum Analyzer' is connected to an 'E.U.T' (Equipment Under Test) via a cable. The entire setup is placed on a 'Non-Conducted Table', which sits above a 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

### Measurement Data


Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result
Lowest	5.97	8.00	Pass
Middle	5.37		
Highest	2.84		

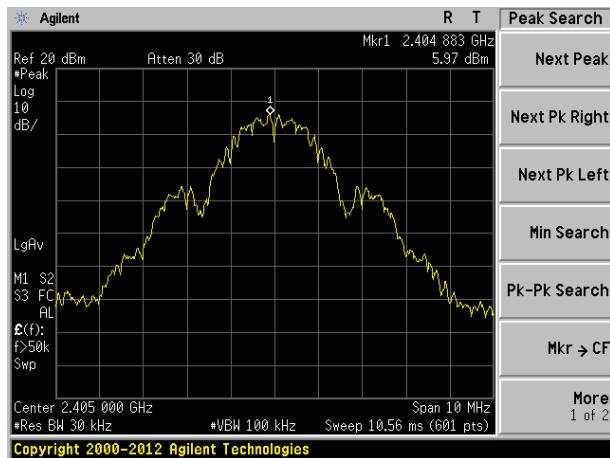**Test plot as follows:**


Lowest channel

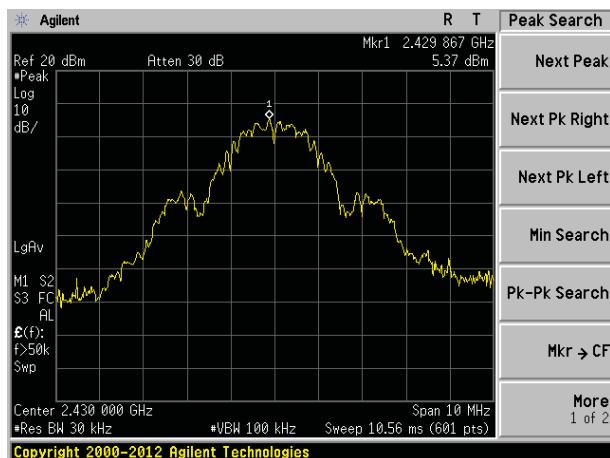


Middle channel

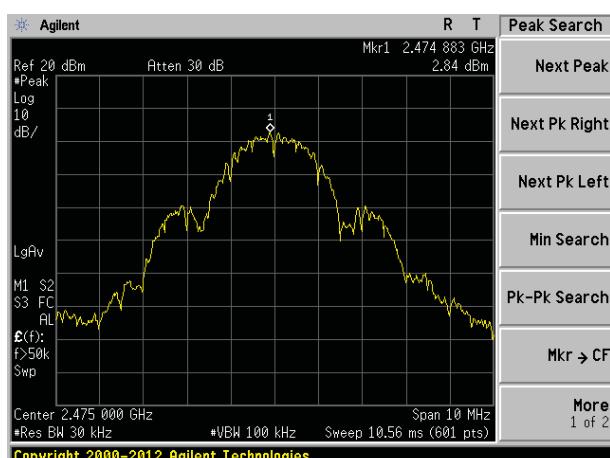


Highest channel

## 7.6 Band edges


### 7.6.1 Conducted Emission Method

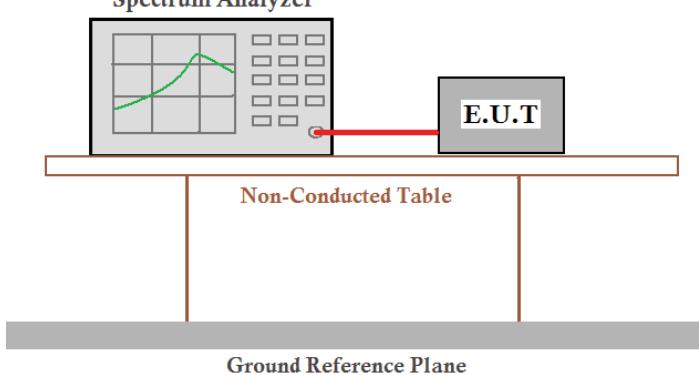Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2014 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	<p style="text-align: center;"><b>Spectrum Analyzer</b></p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

#### Test plot as follows:

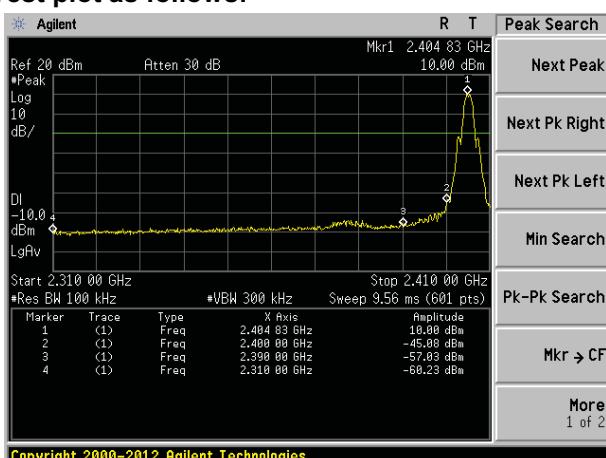


Lowest channel

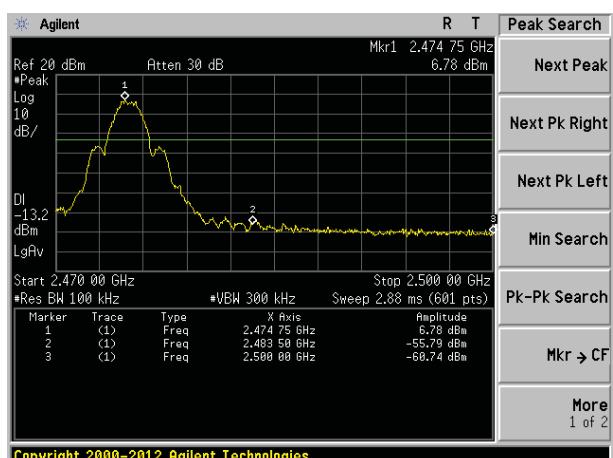

Highest channel

## 7.6.2 Radiated Emission Method

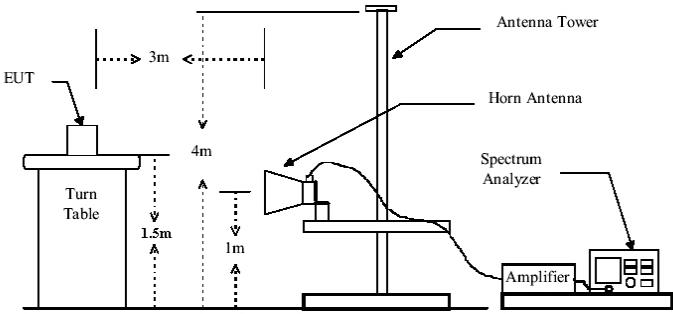Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.4: 2014								
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
		RMS	1MHz	3MHz	Average				
Limit:	Frequency	Limit (dBuV/m @3m)		Value					
	Above 1GHz	54.00		Average					
		74.00		Peak					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ol>								
Test Instruments:	Refer to section 6.0 for details								
Test mode:	Refer to section 5.3 for details								

Test results:	Pass
---------------	------

Measurement data:

*Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.*

Test channel:	Lowest
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	49.07	27.59	5.38	30.18	51.86	74.00	-22.14	Horizontal
2400.00	58.00	27.58	5.39	30.18	60.79	74.00	-13.21	Horizontal
2390.00	50.57	27.59	5.38	30.18	53.36	74.00	-20.64	Vertical
2400.00	58.32	27.58	5.39	30.18	61.11	74.00	-12.89	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	36.58	27.59	5.38	30.18	39.37	54.00	-14.63	Horizontal
2400.00	39.59	27.58	5.39	30.18	42.38	54.00	-11.62	Horizontal
2390.00	38.19	27.59	5.38	30.18	40.98	54.00	-13.02	Vertical
2400.00	39.52	27.58	5.39	30.18	42.31	54.00	-11.69	Vertical

Test channel:	Highest							
---------------	---------	--	--	--	--	--	--	--

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.62	27.53	5.47	29.93	51.69	74.00	-22.31	Horizontal
2500.00	45.27	27.55	5.49	29.93	48.38	74.00	-25.62	Horizontal
2483.50	50.35	27.53	5.47	29.93	53.42	74.00	-20.58	Vertical
2500.00	47.30	27.55	5.49	29.93	50.41	74.00	-23.59	Vertical

**Average value:**


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.55	27.53	5.47	29.93	39.62	54.00	-14.38	Horizontal
2500.00	33.14	27.55	5.49	29.93	36.25	54.00	-17.75	Horizontal
2483.50	38.27	27.53	5.47	29.93	41.34	54.00	-12.66	Vertical
2500.00	34.92	27.55	5.49	29.93	38.03	54.00	-15.97	Vertical

**Remark:**

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*



## 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method

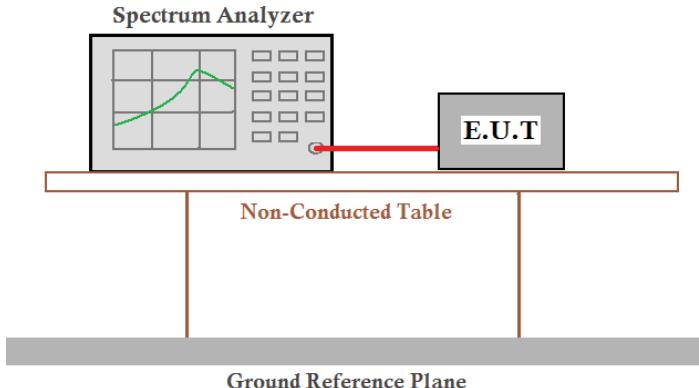Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2014 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

## Test plot as follows:



### Lowest channel

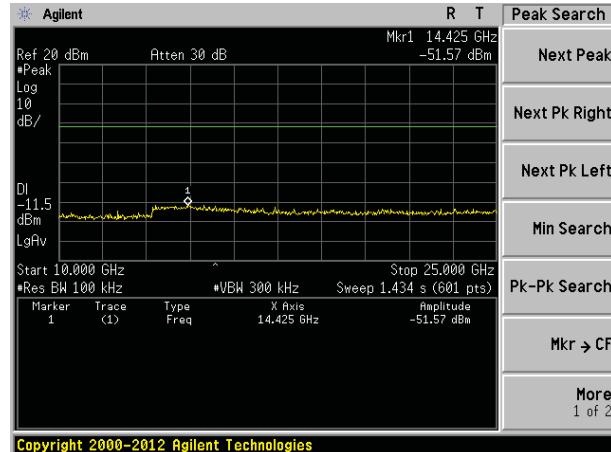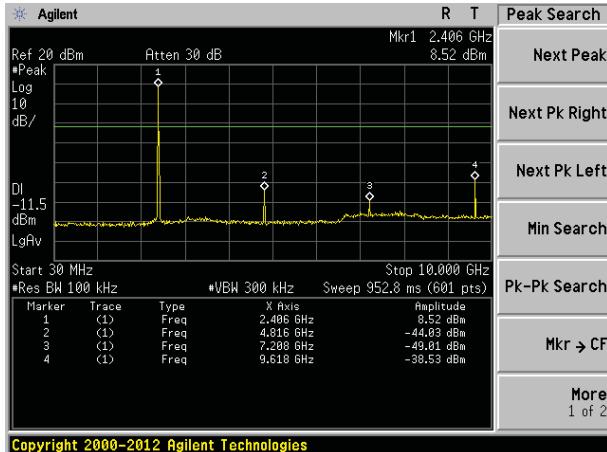

30MHz~10GHz

10GHz~25GHz



### Middle channel

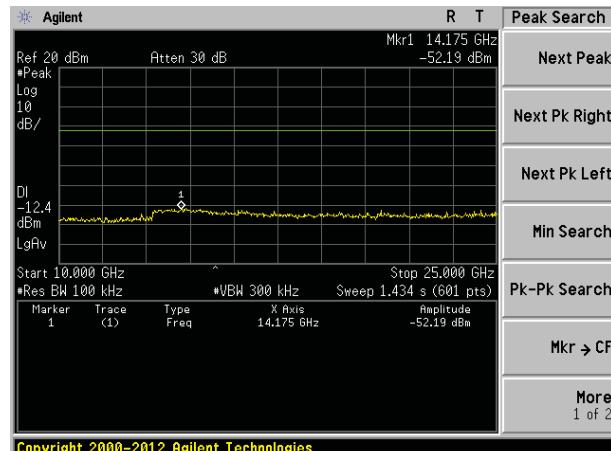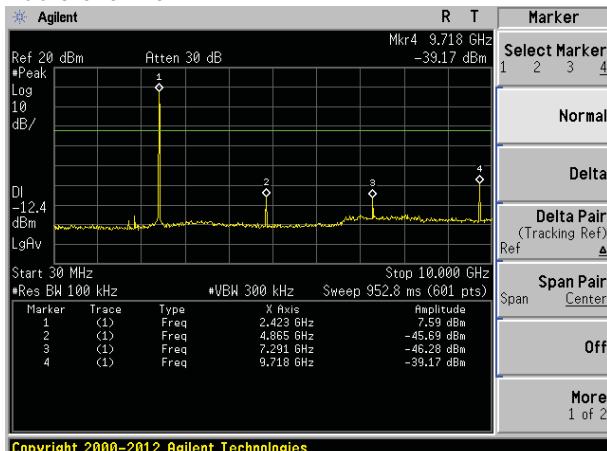

30MHz~10GHz

10GHz~25GHz



### Highest channel

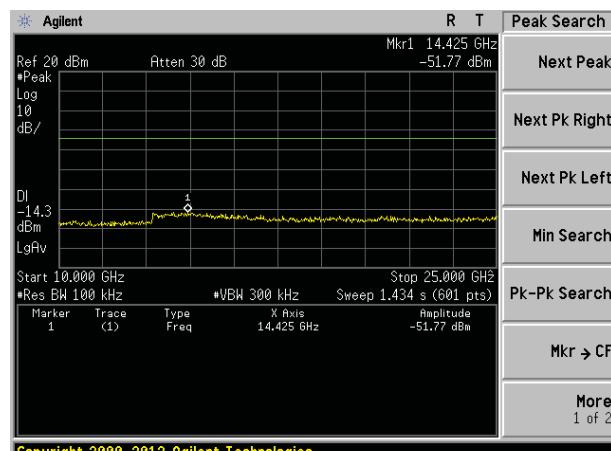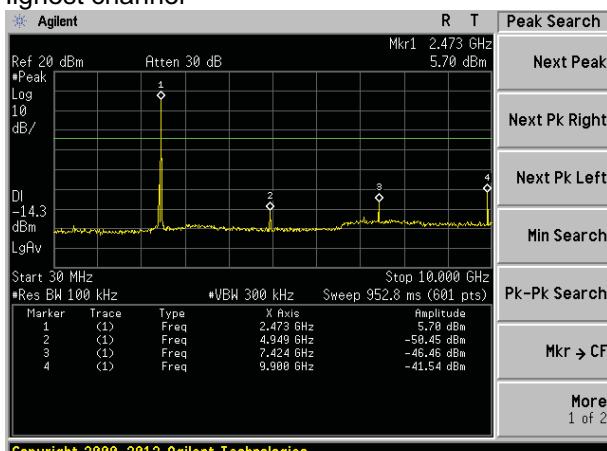

30MHz~10GHz

10GHz~25GHz

## 7.7.2 Radiated Emission Method

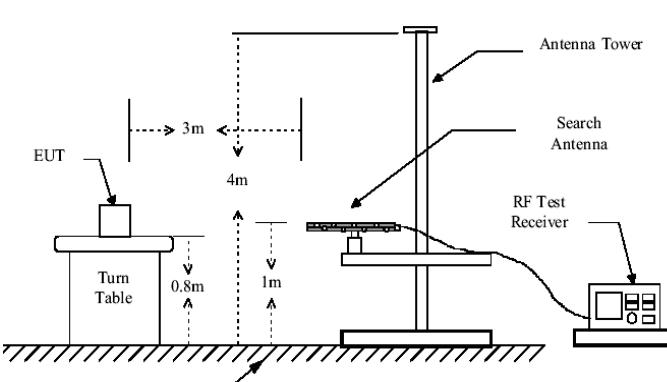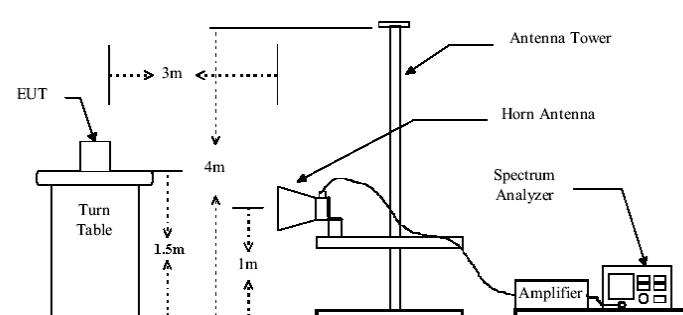Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4: 2014				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency	Limit (dBuV/m @3m)		Value	
	30MHz-88MHz	40.00		Quasi-peak	
	88MHz-216MHz	43.50		Quasi-peak	
	216MHz-960MHz	46.00		Quasi-peak	
	960MHz-1GHz	54.00		Quasi-peak	
	Above 1GHz	54.00		Average	
		74.00		Peak	
Test setup:	Below 1GHz  Above 1GHz 				

Test Procedure:	<ol style="list-style-type: none"><li>1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li><li>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li></ol>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

*Remark:*

*Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis which it is worse case.*

## Measurement Data

### ■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
39.99	44.00	15.58	0.66	30.04	30.20	40.00	-9.80	Vertical
77.05	46.12	10.14	1.00	29.81	27.45	40.00	-12.55	Vertical
143.33	45.83	10.22	1.53	29.44	28.14	43.50	-15.36	Vertical
250.30	46.16	14.07	2.12	29.65	32.70	46.00	-13.30	Vertical
451.14	45.21	17.58	3.09	29.39	36.49	46.00	-9.51	Vertical
726.81	37.19	21.15	4.19	29.20	33.33	46.00	-12.67	Vertical
54.45	30.25	15.05	0.81	29.96	16.15	40.00	-23.85	Horizontal
93.77	35.01	14.58	1.14	29.73	21.00	43.50	-22.50	Horizontal
162.61	37.59	10.74	1.65	29.35	20.63	43.50	-22.87	Horizontal
350.48	45.81	16.27	2.62	29.73	34.97	46.00	-11.03	Horizontal
550.95	37.42	19.57	3.53	29.30	31.22	46.00	-14.78	Horizontal
731.92	38.27	21.19	4.20	29.20	34.46	46.00	-11.54	Horizontal

## ■ Above 1GHz

Test channel:	Lowest							
---------------	--------	--	--	--	--	--	--	--

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	37.92	31.79	8.62	32.10	46.23	74.00	-27.77	Vertical
7215.00	32.72	36.19	11.68	31.97	48.62	74.00	-25.38	Vertical
9620.00	31.64	38.07	14.16	31.56	52.31	74.00	-21.69	Vertical
12025.00	*					74.00		Vertical
14430.00	*					74.00		Vertical
16835.00	*					74.00		Vertical
4810.00	36.96	31.79	8.62	32.10	45.27	74.00	-28.73	Horizontal
7215.00	32.65	36.19	11.68	31.97	48.55	74.00	-25.45	Horizontal
9620.00	31.30	38.07	14.16	31.56	51.97	74.00	-22.03	Horizontal
12025.00	*					74.00		Horizontal
14430.00	*					74.00		Horizontal
16835.00	*					74.00		Horizontal

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	27.19	31.79	8.62	32.10	35.50	54.00	-18.50	Vertical
7215.00	21.64	36.19	11.68	31.97	37.54	54.00	-16.46	Vertical
9620.00	22.03	38.07	14.16	31.56	42.70	54.00	-11.30	Vertical
12025.00	*					54.00		Vertical
14430.00	*					54.00		Vertical
16835.00	*					54.00		Vertical
4810.00	26.62	31.79	8.62	32.10	34.93	54.00	-19.07	Horizontal
7215.00	21.28	36.19	11.68	31.97	37.18	54.00	-16.82	Horizontal
9620.00	21.09	38.07	14.16	31.56	41.76	54.00	-12.24	Horizontal
12025.00	*					54.00		Horizontal
14430.00	*					54.00		Horizontal
16835.00	*					54.00		Horizontal

### Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- \*\*, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4860.00	37.38	31.85	8.66	32.12	45.77	74.00	-28.23	Vertical
7290.00	33.05	36.37	11.71	31.91	49.22	74.00	-24.78	Vertical
9720.00	32.84	38.27	14.25	31.56	53.80	74.00	-20.20	Vertical
12150.00	*				74.00			Vertical
14580.00	*				74.00			Vertical
17010.00	*				74.00			Vertical
4860.00	38.17	31.85	8.66	32.12	46.56	74.00	-27.44	Horizontal
7290.00	31.84	36.37	11.71	31.91	48.01	74.00	-25.99	Horizontal
9720.00	32.80	38.27	14.25	31.56	53.76	74.00	-20.24	Horizontal
12150.00	*				74.00			Horizontal
14580.00	*				74.00			Horizontal
17010.00	*				74.00			Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4860.00	28.39	31.85	8.66	32.12	36.78	54.00	-17.22	Vertical
7290.00	21.41	36.37	11.71	31.91	37.58	54.00	-16.42	Vertical
9720.00	22.13	38.27	14.25	31.56	43.09	54.00	-10.91	Vertical
12150.00	*				54.00			Vertical
14580.00	*				54.00			Vertical
17010.00	*				54.00			Vertical
4860.00	28.38	31.85	8.66	32.12	36.77	54.00	-17.23	Horizontal
7290.00	20.96	36.37	11.71	31.91	37.13	54.00	-16.87	Horizontal
9720.00	22.55	38.27	14.25	31.56	43.51	54.00	-10.49	Horizontal
12150.00	*				54.00			Horizontal
14580.00	*				54.00			Horizontal
17010.00	*				54.00			Horizontal

**Remark:**

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. \*\*, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest							
---------------	---------	--	--	--	--	--	--	--

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4950.00	40.78	31.90	8.70	32.15	49.23	74.00	-24.77	Vertical
7425.00	32.38	36.49	11.76	31.83	48.80	74.00	-25.20	Vertical
9900.00	35.18	38.62	14.31	31.77	56.34	74.00	-17.66	Vertical
12375.00	*					74.00		Vertical
14850.00	*					74.00		Vertical
17325.00	*					74.00		Vertical
4950.00	40.73	31.90	8.70	32.15	49.18	74.00	-24.82	Horizontal
7425.00	31.60	36.49	11.76	31.83	48.02	74.00	-25.98	Horizontal
9900.00	31.49	38.62	14.31	31.77	52.65	74.00	-21.35	Horizontal
12375.00	*					74.00		Horizontal
14850.00	*					74.00		Horizontal
17325.00	*					74.00		Horizontal

**Average value:**


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4950.00	32.02	31.90	8.70	32.15	40.47	54.00	-13.53	Vertical
7425.00	22.38	36.49	11.76	31.83	38.80	54.00	-15.20	Vertical
9900.00	23.75	38.62	14.31	31.77	44.91	54.00	-9.09	Vertical
12375.00	*					54.00		Vertical
14850.00	*					54.00		Vertical
17325.00	*					54.00		Vertical
4950.00	31.31	31.90	8.70	32.15	39.76	54.00	-14.24	Horizontal
7425.00	21.06	36.49	11.76	31.83	37.48	54.00	-16.52	Horizontal
9900.00	20.81	38.62	14.31	31.77	41.97	54.00	-12.03	Horizontal
12375.00	*					54.00		Horizontal
14850.00	*					54.00		Horizontal
17325.00	*					54.00		Horizontal

**Remark:**

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. \*\*, means this data is the too weak instrument of signal is unable to test.

## 8 Test Setup Photo

Radiated Emission

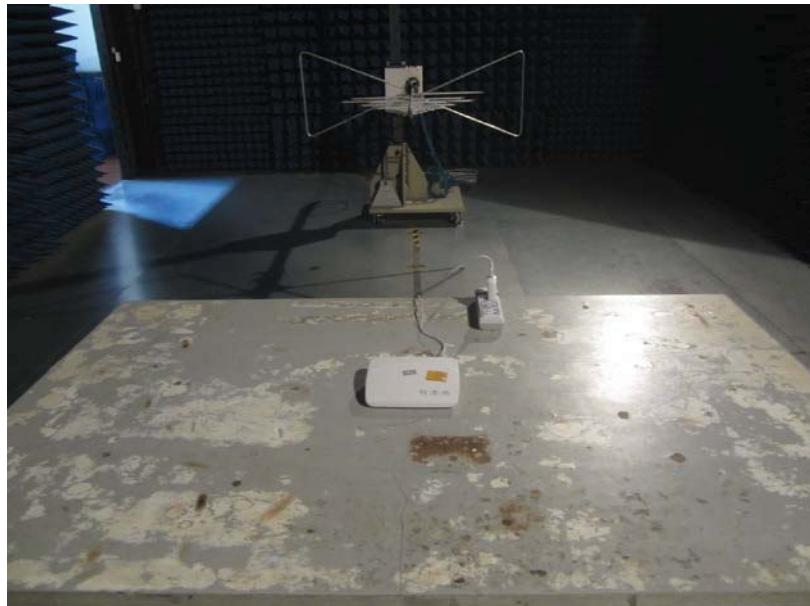


Conducted Emission






## 9 EUT Constructional Details






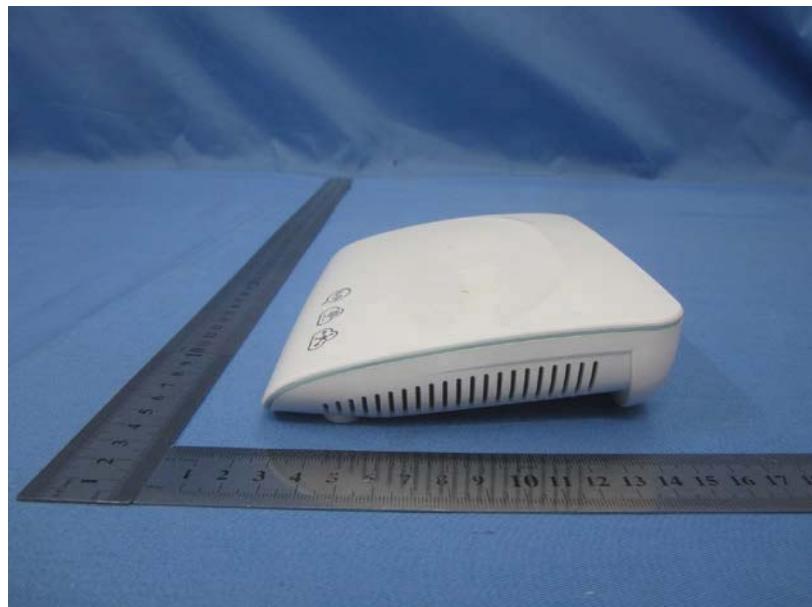




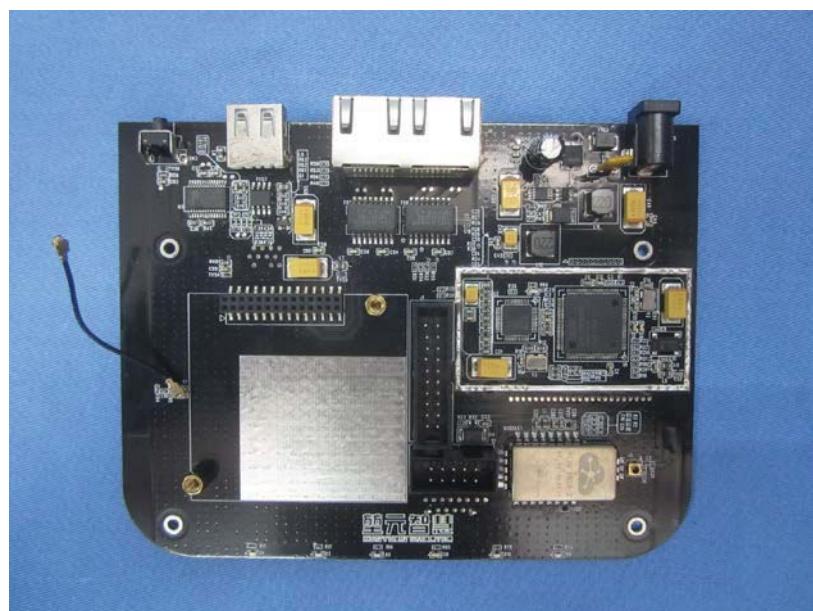

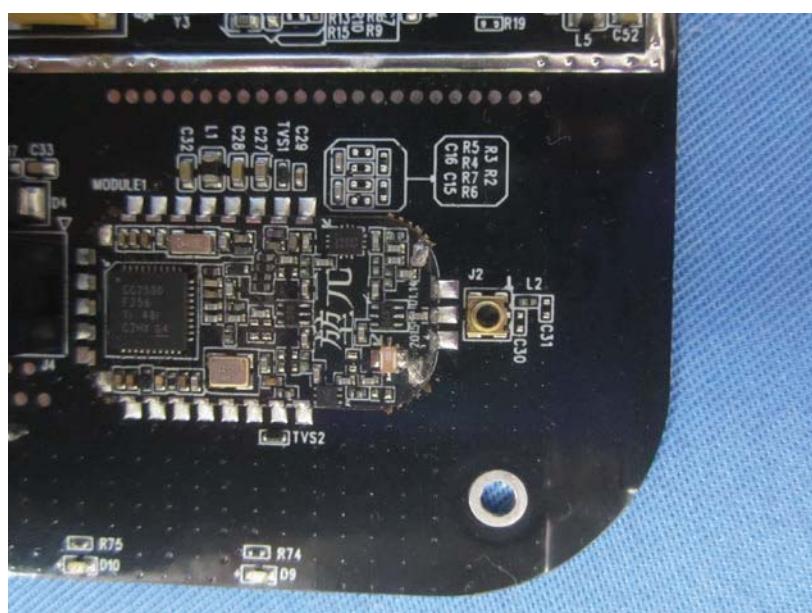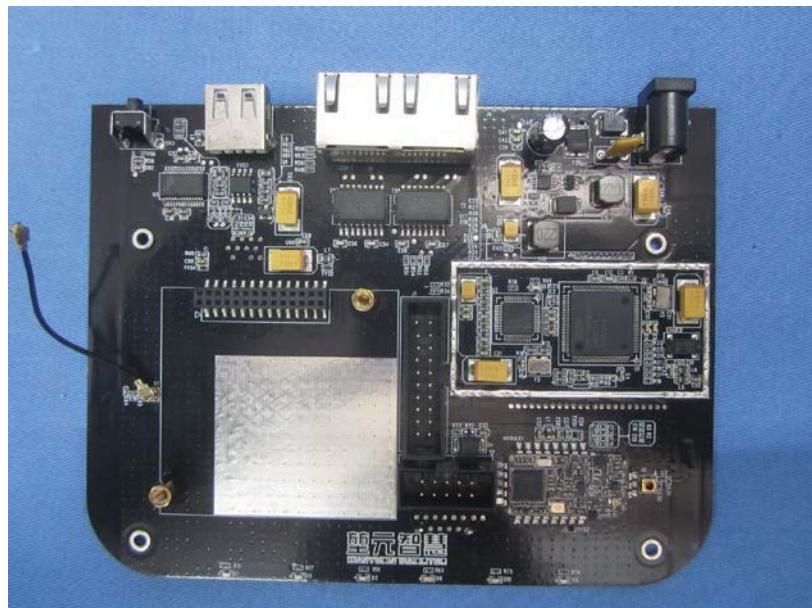

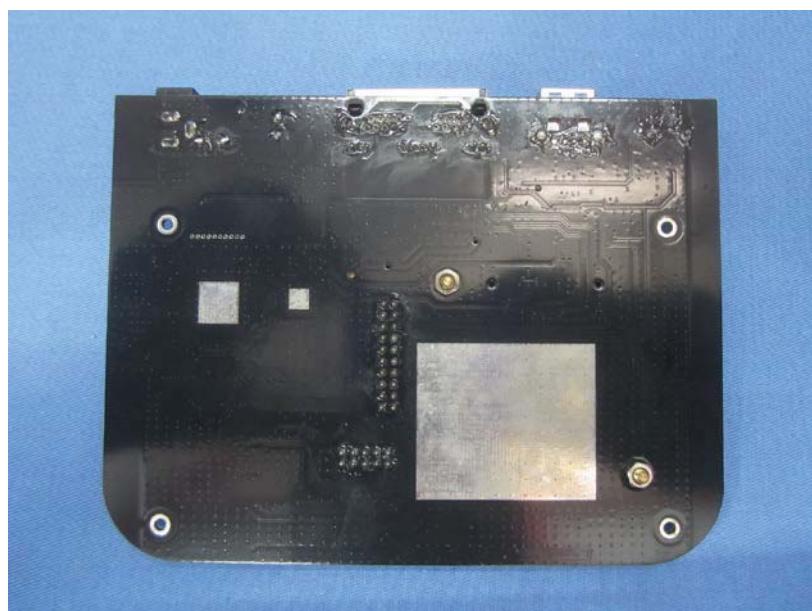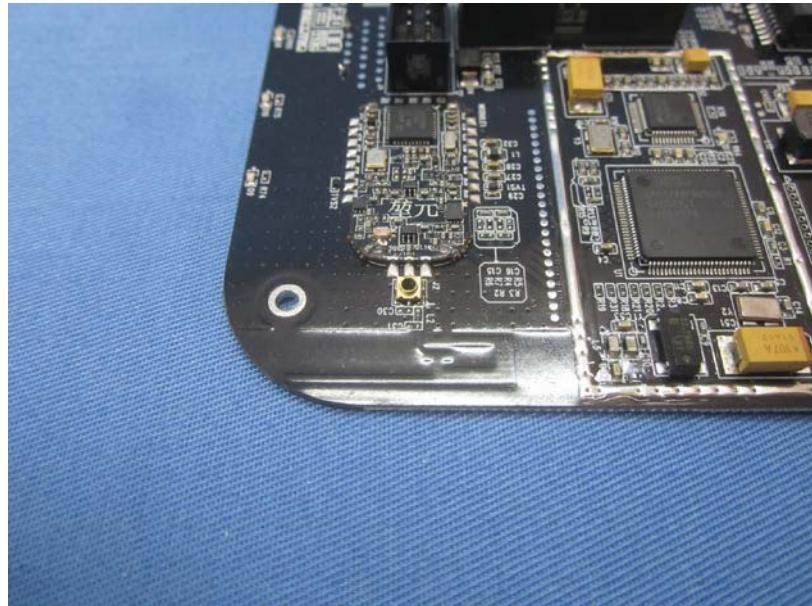

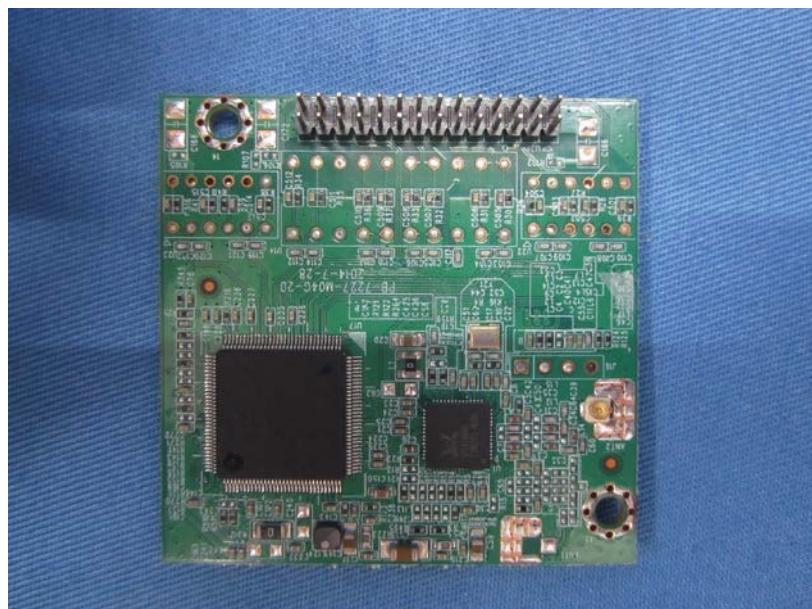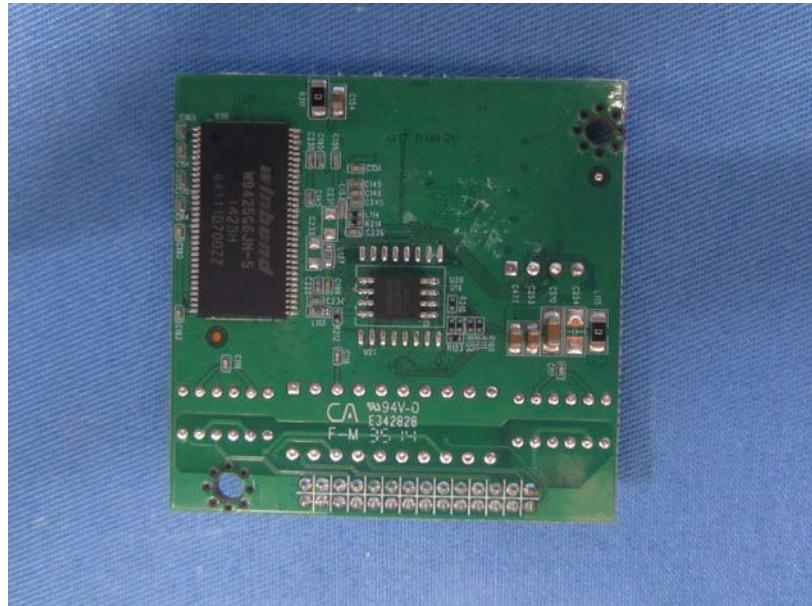



-----End-----