

**Test Plot 1#: GSM 850\_Head Flat\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used: 836.6 MHz;  $\sigma = 0.866$  S/m;  $\epsilon_r = 42.928$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.257 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.22 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.397 W/kg

**SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.146 W/kg**

Maximum value of SAR (measured) = 0.265 W/kg

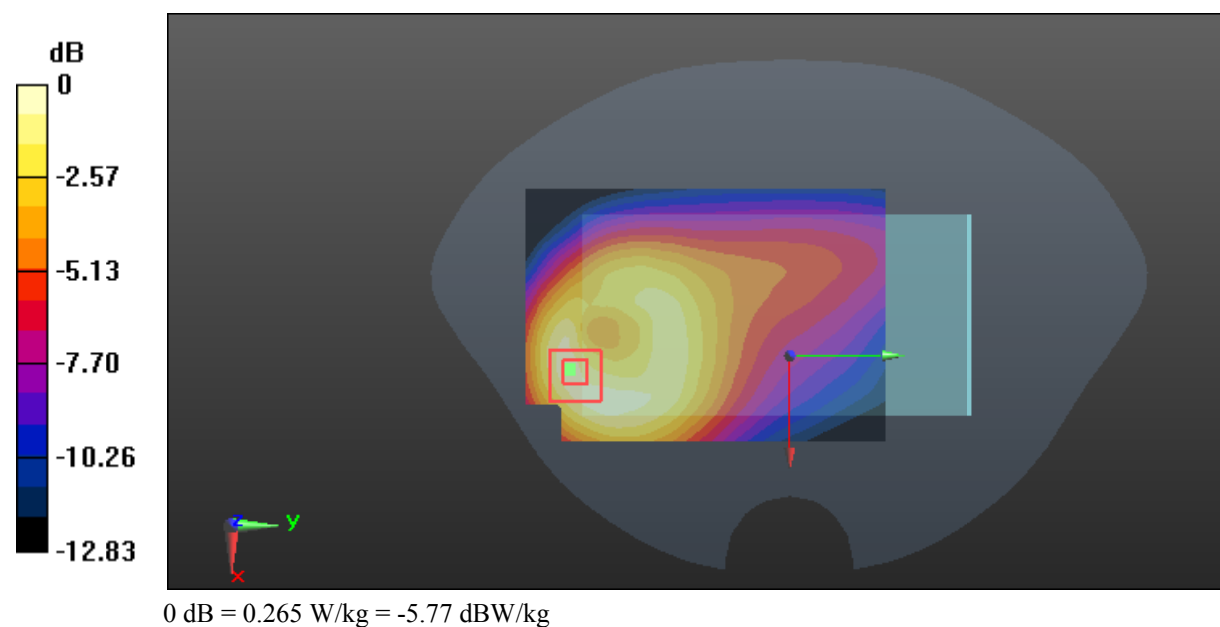

**Test Plot 2#: GSM 850\_Body Worn Back\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used: 836.6 MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 56.801$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.837 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.05 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.456 W/kg**

Maximum value of SAR (measured) = 0.827 W/kg

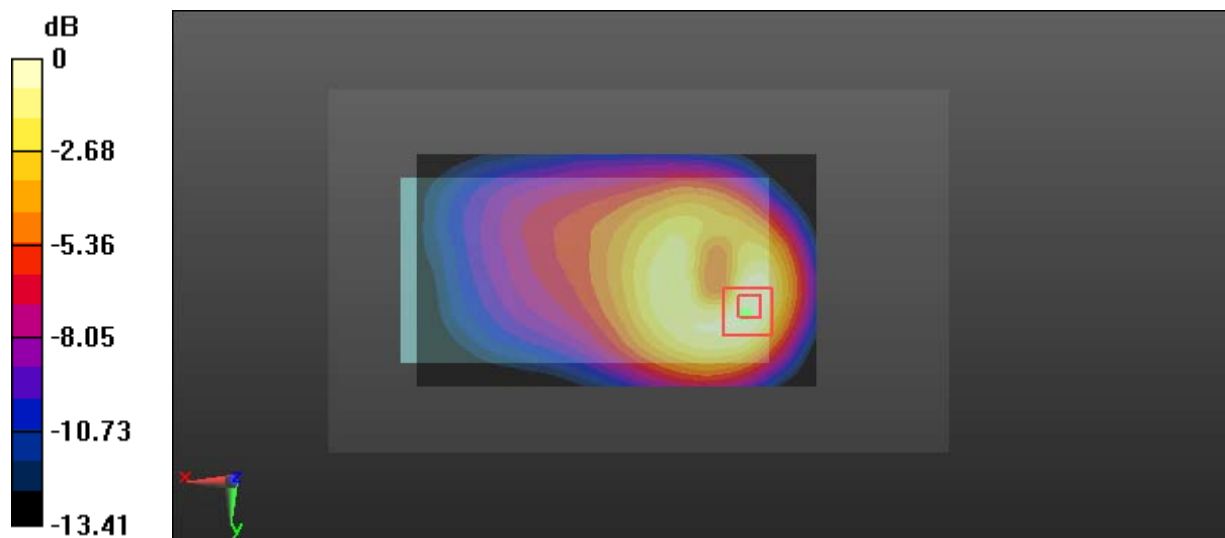

0 dB = 0.827 W/kg = -0.82 dBW/kg

**Test Plot 3#: GSM 850\_Body Back\_Low Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 824.2 MHz; Duty Cycle: 1:2  
Medium parameters used: 824.2 MHz;  $\sigma = 0.944$  S/m;  $\epsilon_r = 56.854$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.40 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.21 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.17 W/kg

**SAR(1 g) = 1.33 W/kg; SAR(10 g) = 0.797 W/kg**

Maximum value of SAR (measured) = 1.47 W/kg

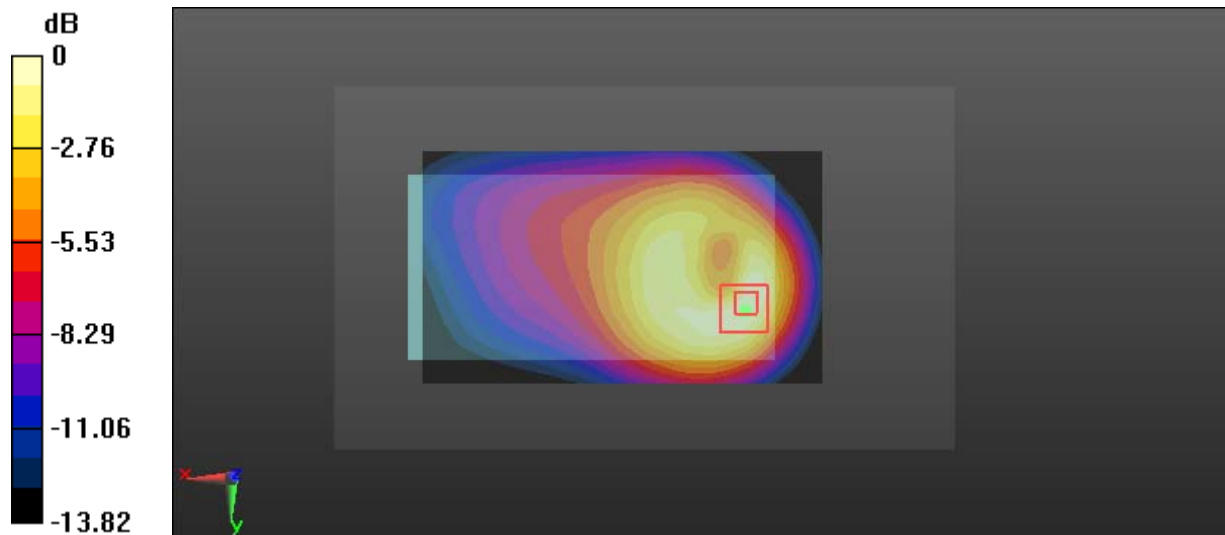

0 dB = 1.47 W/kg = 1.67 dBW/kg

**Test Plot 4#: GSM 850\_Body Back\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used: 836.6 MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 56.801$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.36 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.87 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.14 W/kg

**SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.769 W/kg**

Maximum value of SAR (measured) = 1.42 W/kg

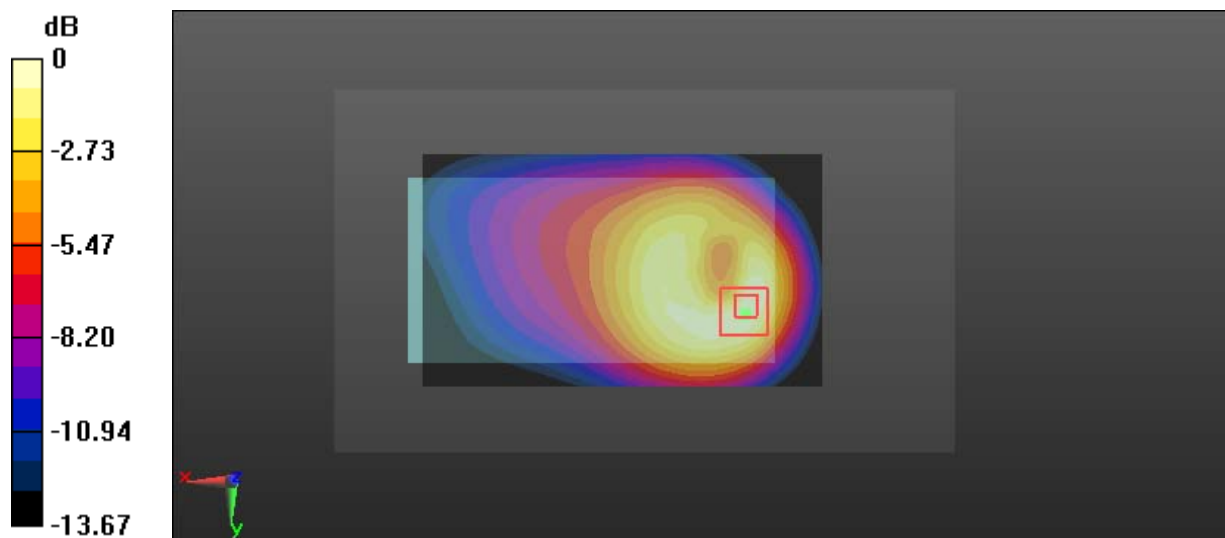

0 dB = 1.42 W/kg = 1.52 dBW/kg

**Test Plot 5#: GSM 850\_Body Back\_High Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 848.8 MHz; Duty Cycle: 1:2  
Medium parameters used: 848.8 MHz;  $\sigma = 0.962$  S/m;  $\epsilon_r = 56.62$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.19 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.95 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.86 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.672 W/kg**

Maximum value of SAR (measured) = 1.24 W/kg

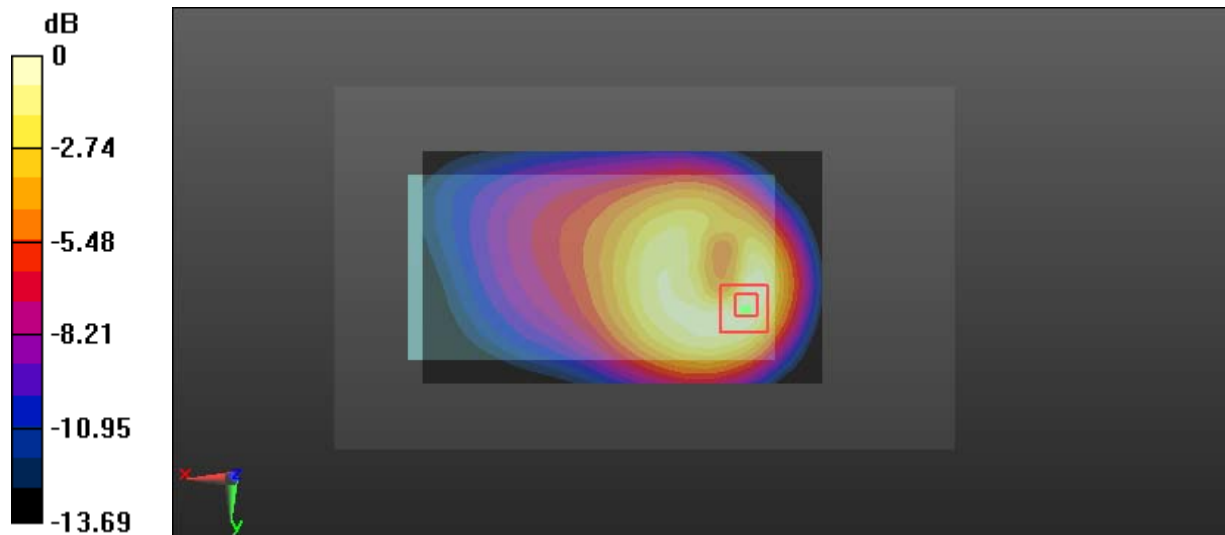

0 dB = 1.24 W/kg = 0.93 dBW/kg

**Test Plot 6#: GSM 850\_Body Left\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used: 836.6 MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 56.801$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.357 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.33 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.484 W/kg

**SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.236 W/kg**

Maximum value of SAR (measured) = 0.362 W/kg

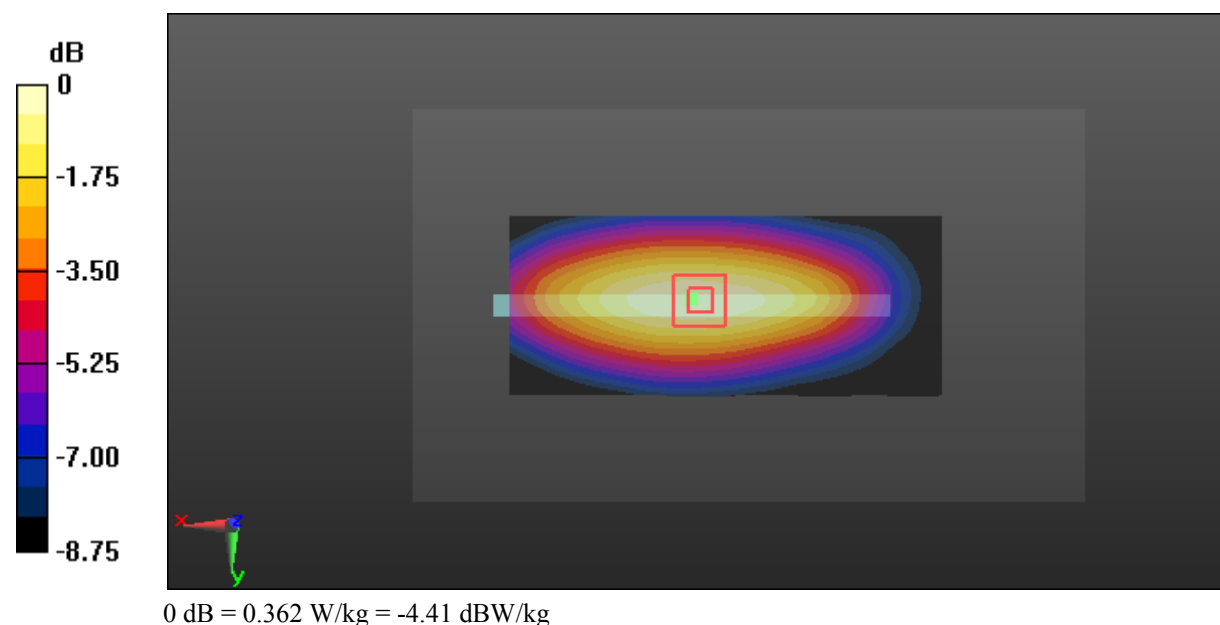

**Test Plot 7#: GSM 850\_Body Right\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used: 836.6 MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 56.801$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.274 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.21 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.385 W/kg

**SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.156 W/kg**

Maximum value of SAR (measured) = 0.268 W/kg

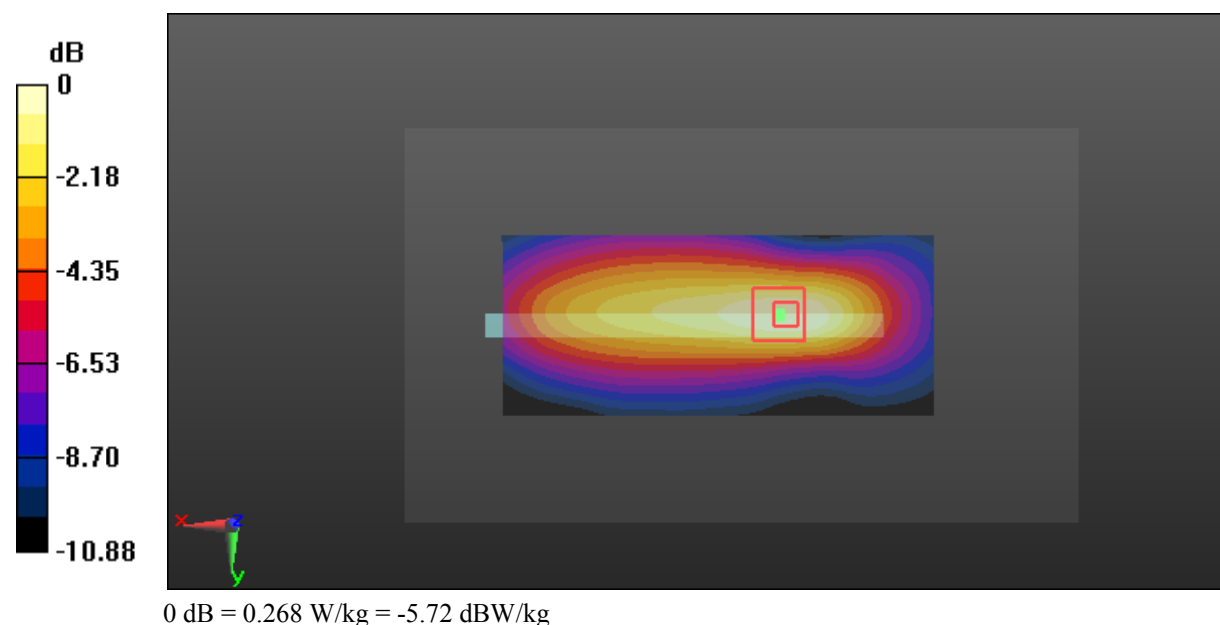

**Test Plot 8#: GSM 850\_Body Bottom\_Low Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 824.2 MHz; Duty Cycle: 1:2  
Medium parameters used: 824.2 MHz;  $\sigma = 0.944$  S/m;  $\epsilon_r = 56.854$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.917 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.20 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.805 W/kg; SAR(10 g) = 0.464 W/kg**

Maximum value of SAR (measured) = 0.904 W/kg

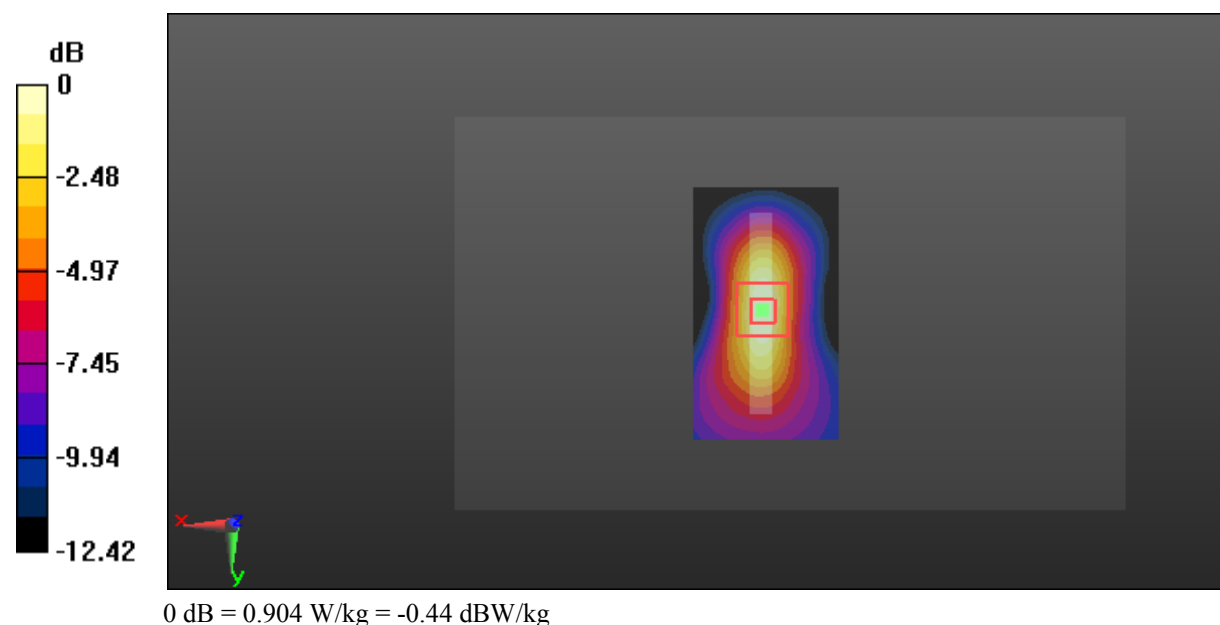

**Test Plot 9#: GSM 850\_Body Bottom\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used: 836.6 MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 56.801$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.970 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.26 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.484 W/kg**

Maximum value of SAR (measured) = 0.957 W/kg

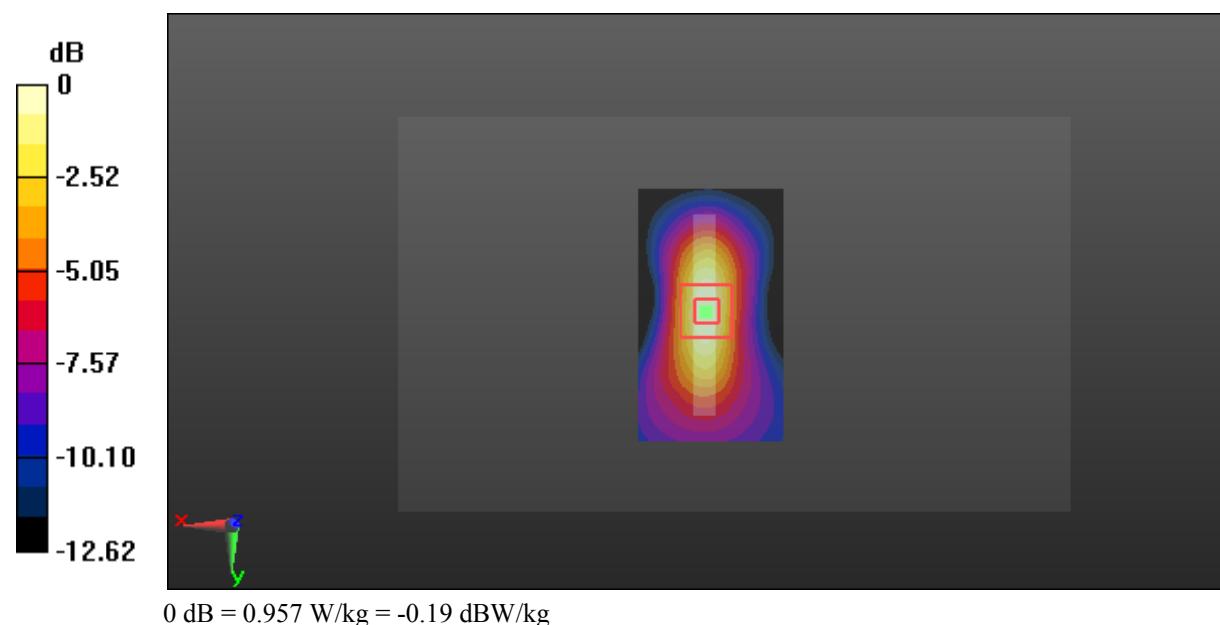

**Test Plot 10#: GSM 850\_Body Bottom\_High Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 848.8 MHz; Duty Cycle: 1:2  
Medium parameters used: 848.8 MHz;  $\sigma = 0.962$  S/m;  $\epsilon_r = 56.62$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.942 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.46 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.464 W/kg**

Maximum value of SAR (measured) = 0.925 W/kg

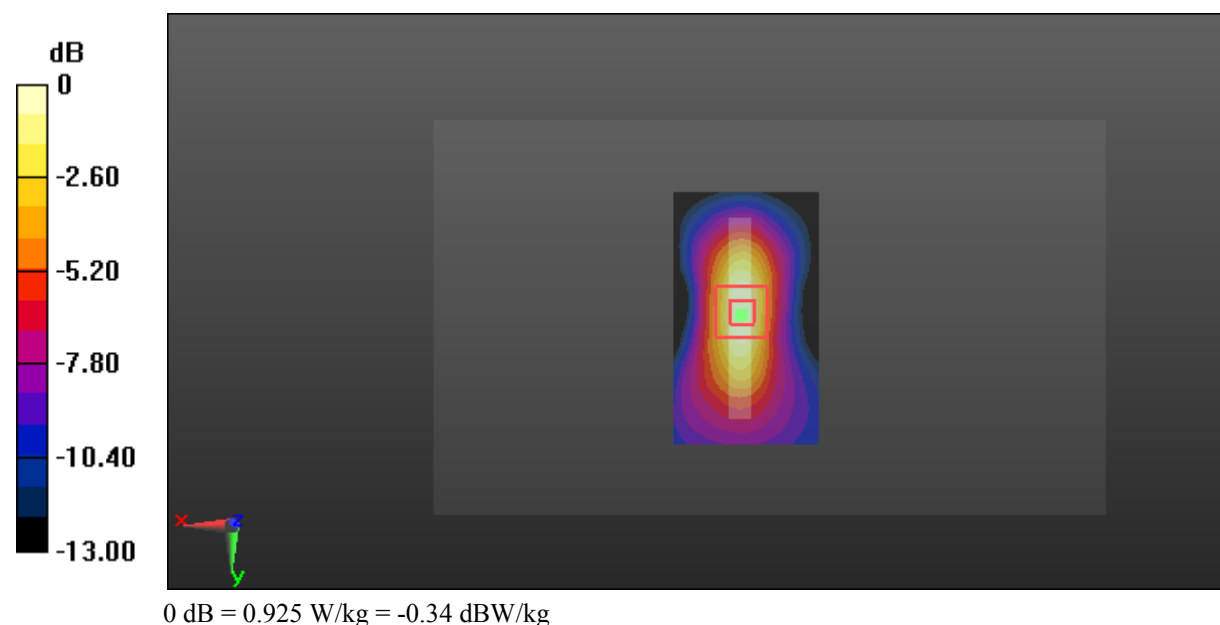

**Test Plot 11#: GSM 1900\_Head Flat\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used: 1880 MHz;  $\sigma = 1.359$  S/m;  $\epsilon_r = 40.907$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.302 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.456 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.463 W/kg

**SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.164 W/kg**

Maximum value of SAR (measured) = 0.302 W/kg

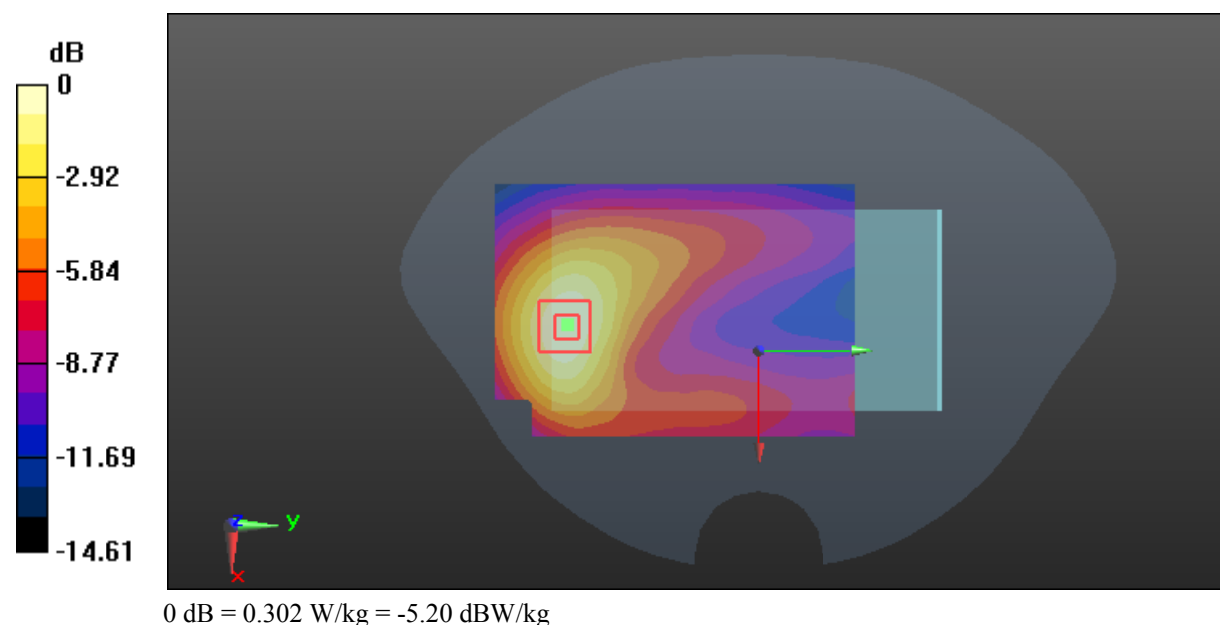

**Test Plot 12#: GSM 1900\_Body Worn Back\_Low Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8  
Medium parameters used: 1850.2 MHz;  $\sigma = 1.513$  S/m;  $\epsilon_r = 52.89$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.738 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.69 W/kg

**SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.488 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

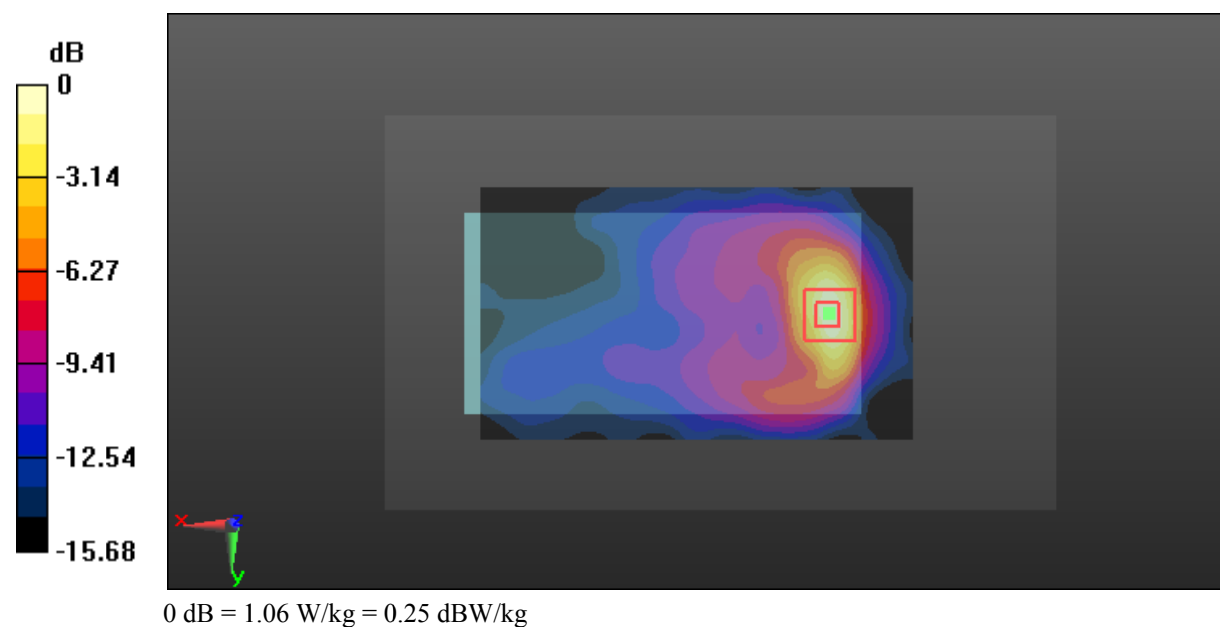

**Test Plot 13#: GSM 1900\_Body Worn Back\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.24 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.091 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.00 W/kg

**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.561 W/kg**

Maximum value of SAR (measured) = 1.25 W/kg

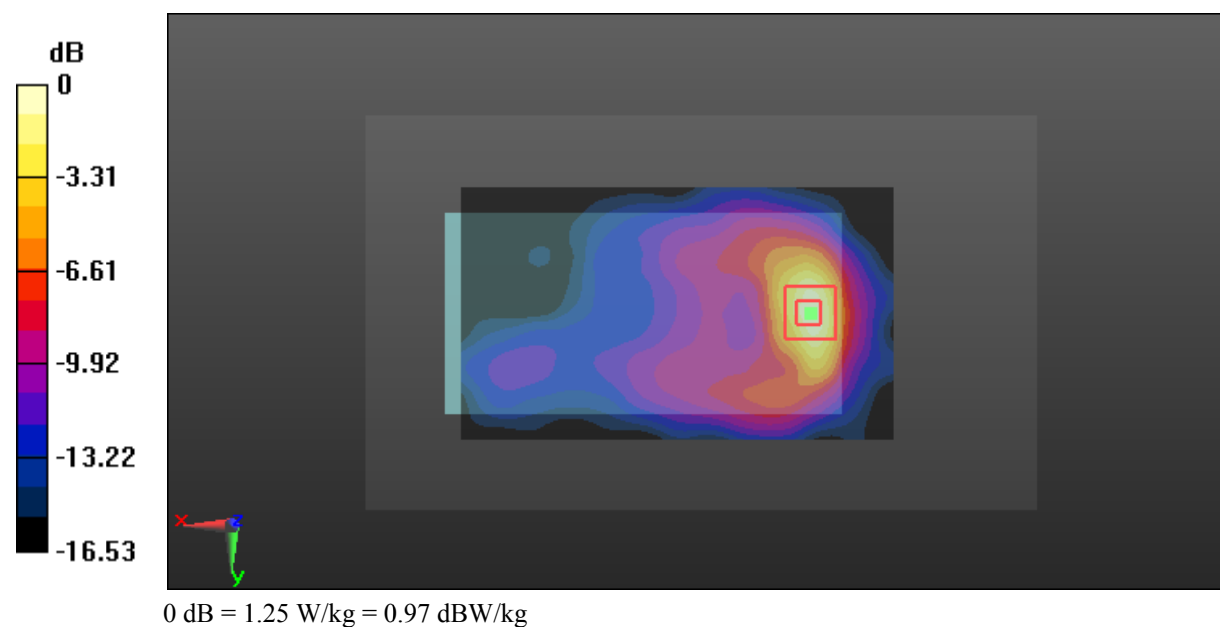

**Test Plot 14#: GSM 1900\_Body Worn Back\_High Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8  
Medium parameters used: 1909.8 MHz;  $\sigma = 1.582$  S/m;  $\epsilon_r = 52.669$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.29 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.755 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 2.09 W/kg

**SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.573 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

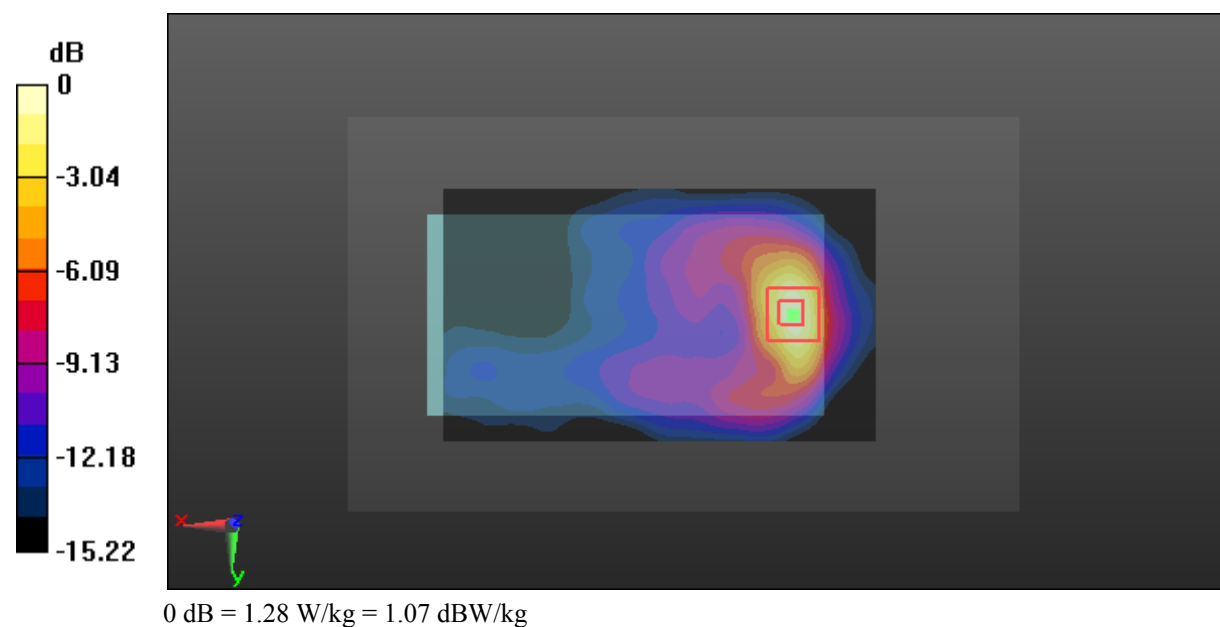

**Test Plot 15#: GSM 1900\_Body Back\_Low Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 1850.2 MHz; Duty Cycle: 1:2  
Medium parameters used: 1850.2 MHz;  $\sigma = 1.513$  S/m;  $\epsilon_r = 52.89$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.946 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.816 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.458 W/kg**

Maximum value of SAR (measured) = 0.950 W/kg

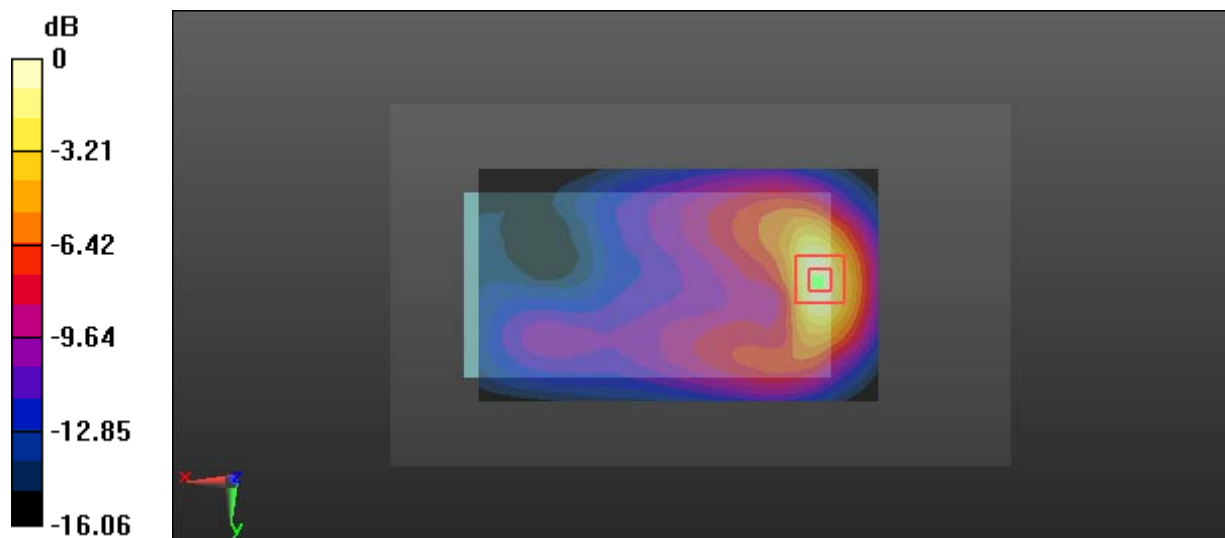

0 dB = 0.950 W/kg = -0.22 dBW/kg

**Test Plot 16#: GSM 1900\_Body Back\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.14 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.140 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.545 W/kg**

Maximum value of SAR (measured) = 1.14 W/kg

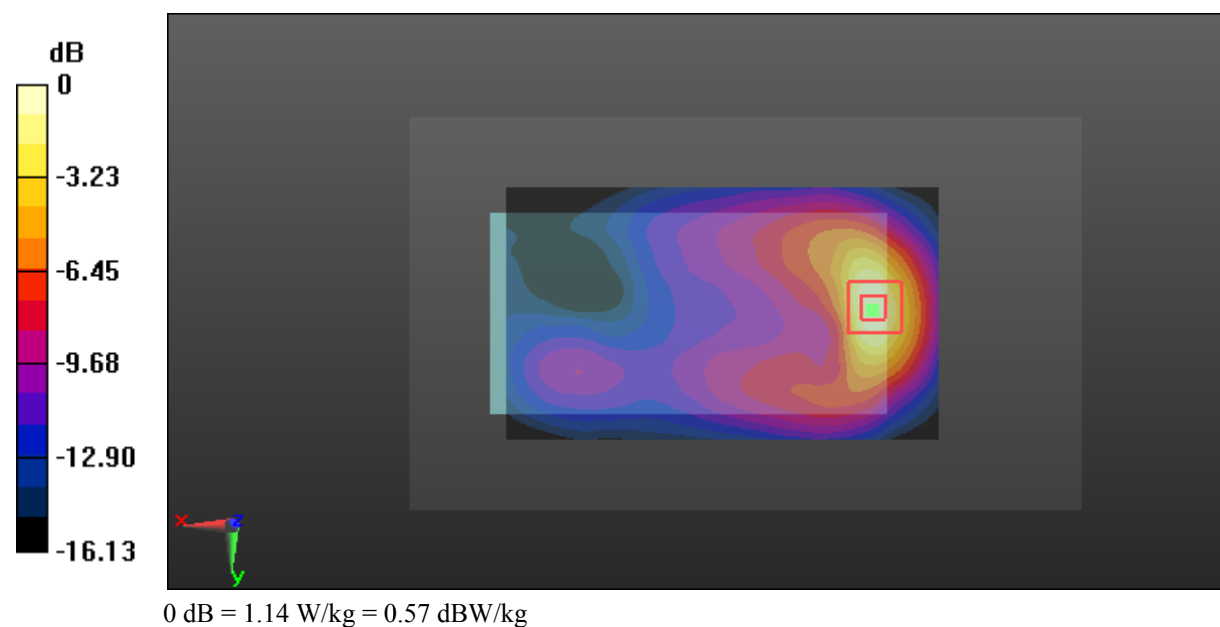

**Test Plot 17#: GSM 1900\_Body Back\_High Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2  
Medium parameters used: 1909.8 MHz;  $\sigma = 1.582$  S/m;  $\epsilon_r = 52.669$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.598 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.66 W/kg

**SAR(1 g) = 0.973 W/kg; SAR(10 g) = 0.530 W/kg**

Maximum value of SAR (measured) = 1.08 W/kg

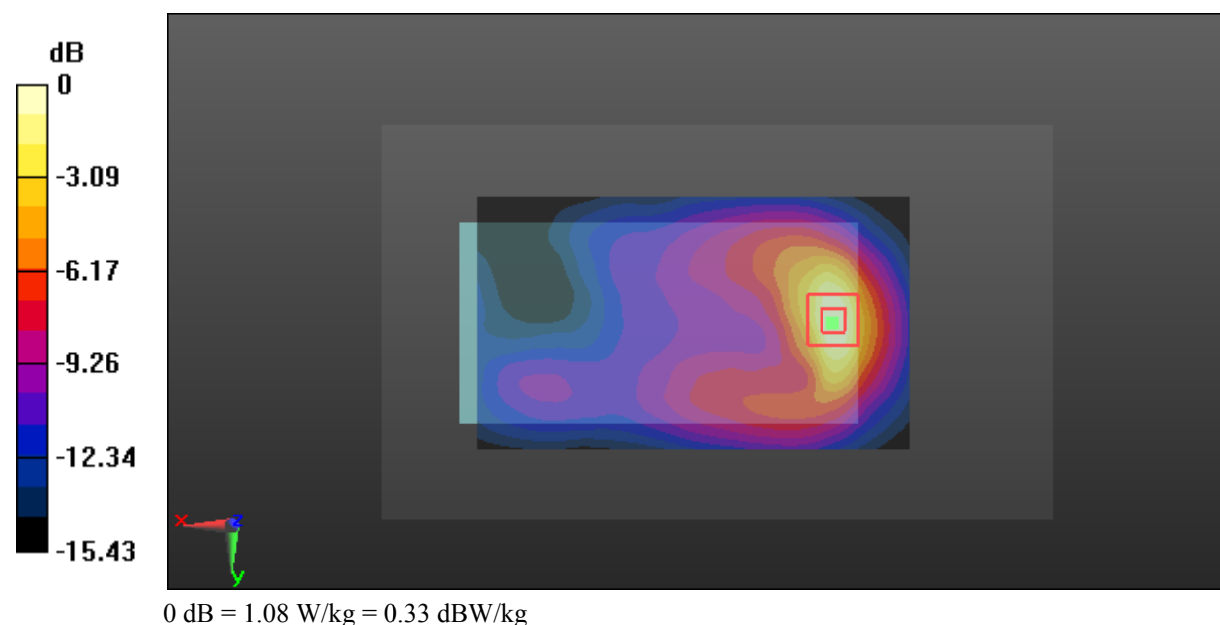

**Test Plot 18#: GSM 1900\_Body Left\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.157 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.074 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.236 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.084 W/kg**

Maximum value of SAR (measured) = 0.155 W/kg

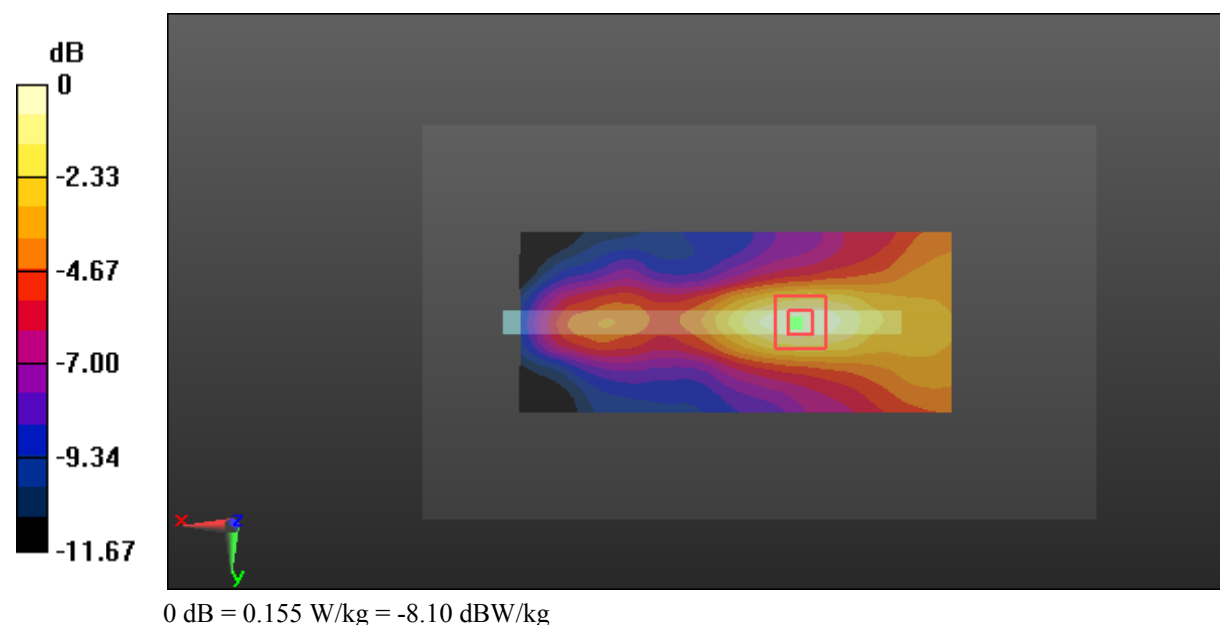

**Test Plot 19#: GSM 1900\_Body Right\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.186 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.58 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.250 W/kg

**SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.167 W/kg

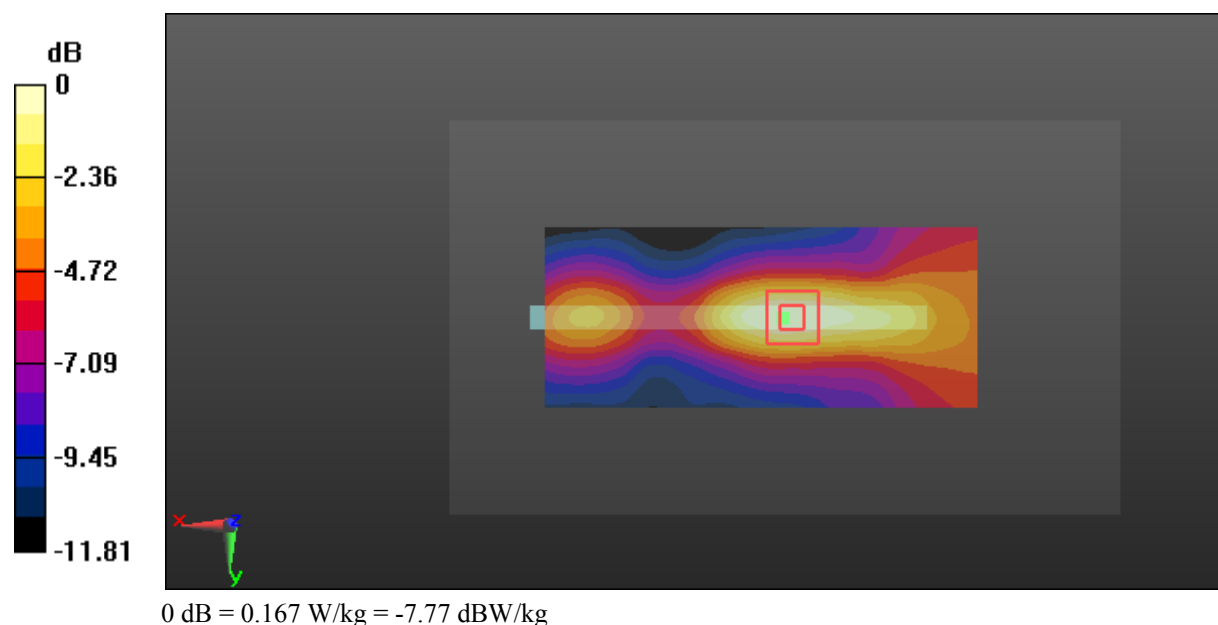

**Test Plot 20#: GSM 1900\_Body Bottom\_Low Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2  
Medium parameters used: 1850.2 MHz;  $\sigma = 1.513$  S/m;  $\epsilon_r = 52.89$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.24 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.59 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.95 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.557 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

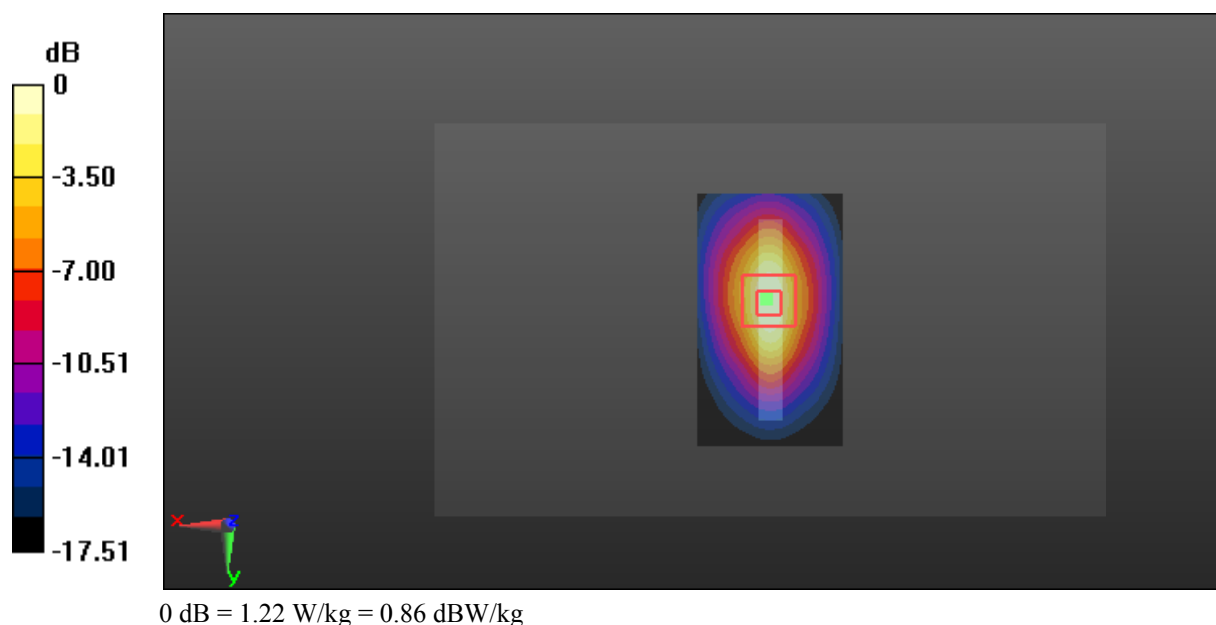

**Test Plot 21#: GSM 1900\_Body Bottom\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.49 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.76 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.27 W/kg

**SAR(1 g) = 1.27 W/kg; SAR(10 g) = 0.650 W/kg**

Maximum value of SAR (measured) = 1.43 W/kg

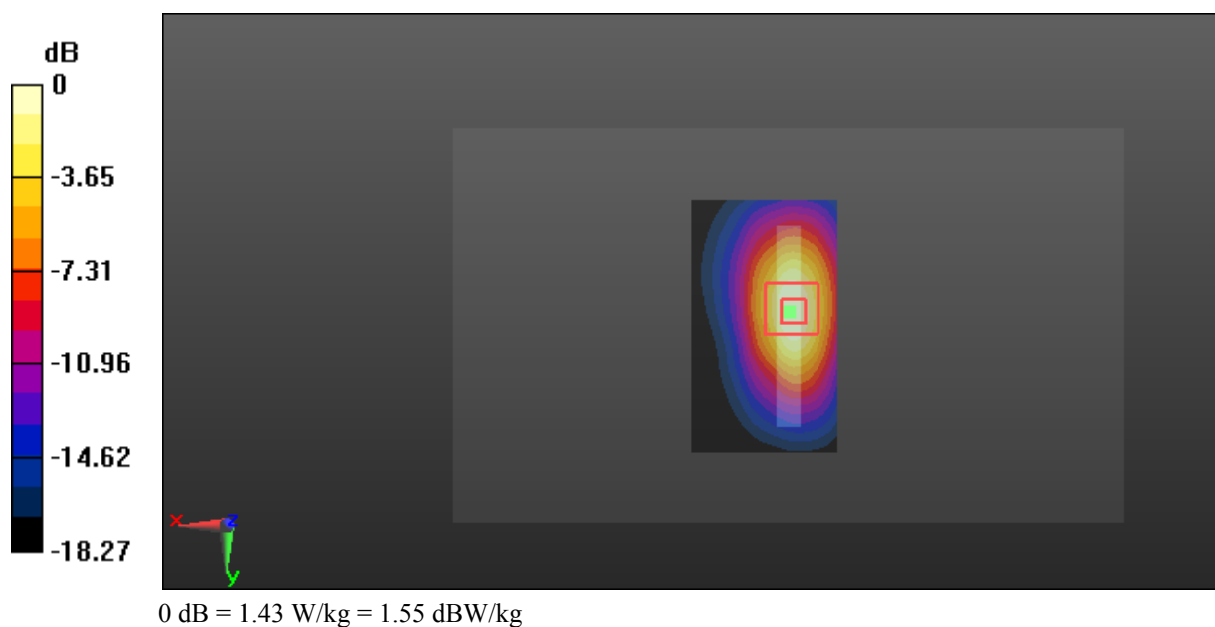

**Test Plot 22#: GSM 1900\_Body Bottom\_High Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic GPRS-4 slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2  
Medium parameters used: 1909.8 MHz;  $\sigma = 1.582$  S/m;  $\epsilon_r = 52.669$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.52 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.36 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.44 W/kg

**SAR(1 g) = 1.35 W/kg; SAR(10 g) = 0.685 W/kg**

Maximum value of SAR (measured) = 1.54 W/kg

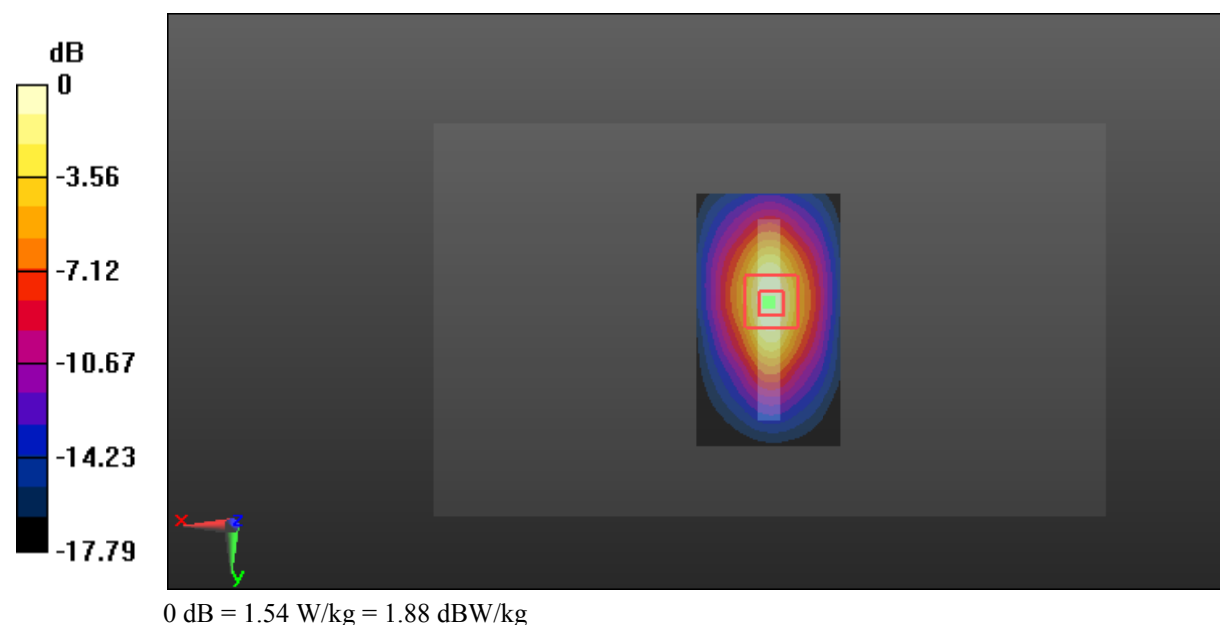

**Test Plot 23#: WCDMA Band 2\_Head Flat\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.359$  S/m;  $\epsilon_r = 40.907$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.298 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.775 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.445 W/kg

**SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.149 W/kg**

Maximum value of SAR (measured) = 0.281 W/kg

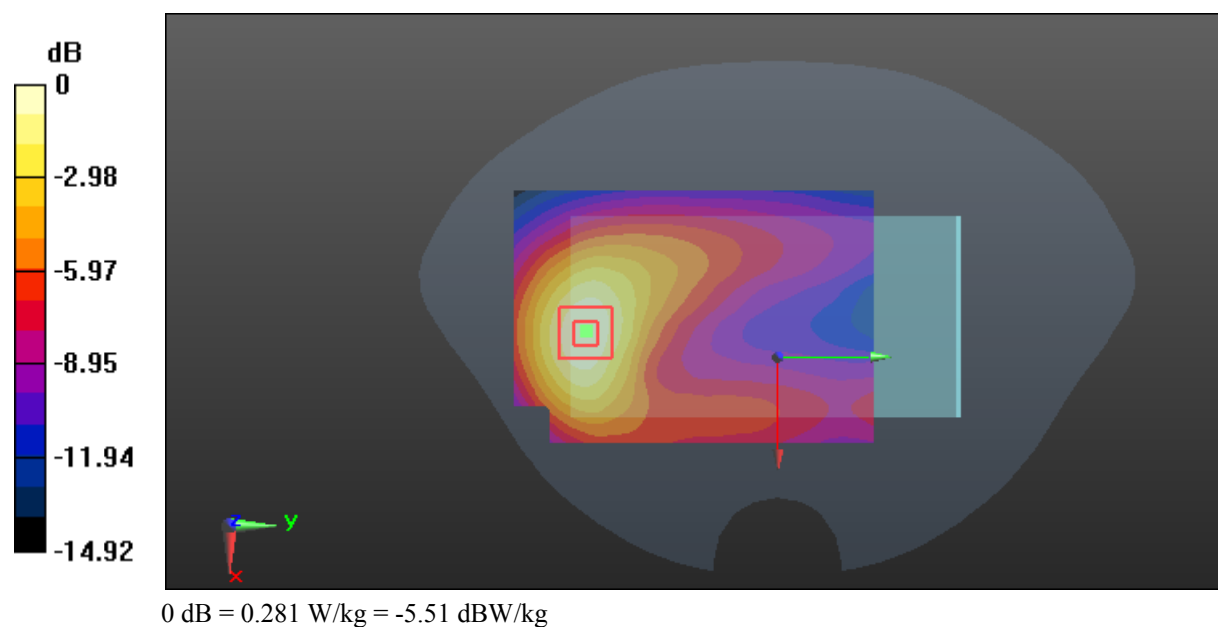

**Test Plot 24#: WCDMA Band 2\_Body Back\_Low Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used: 1852.4 MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 52.908$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.07 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.338 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.515 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

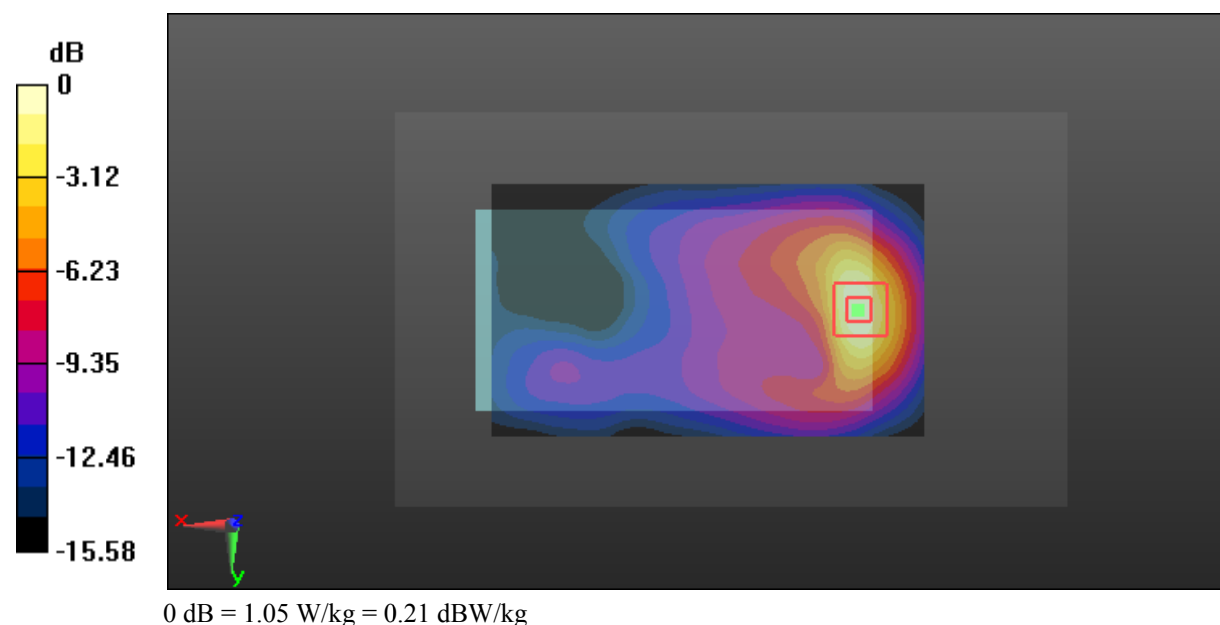

**Test Plot 25#: WCDMA Band 2\_Body Back\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.334 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.501 W/kg**

Maximum value of SAR (measured) = 1.02 W/kg

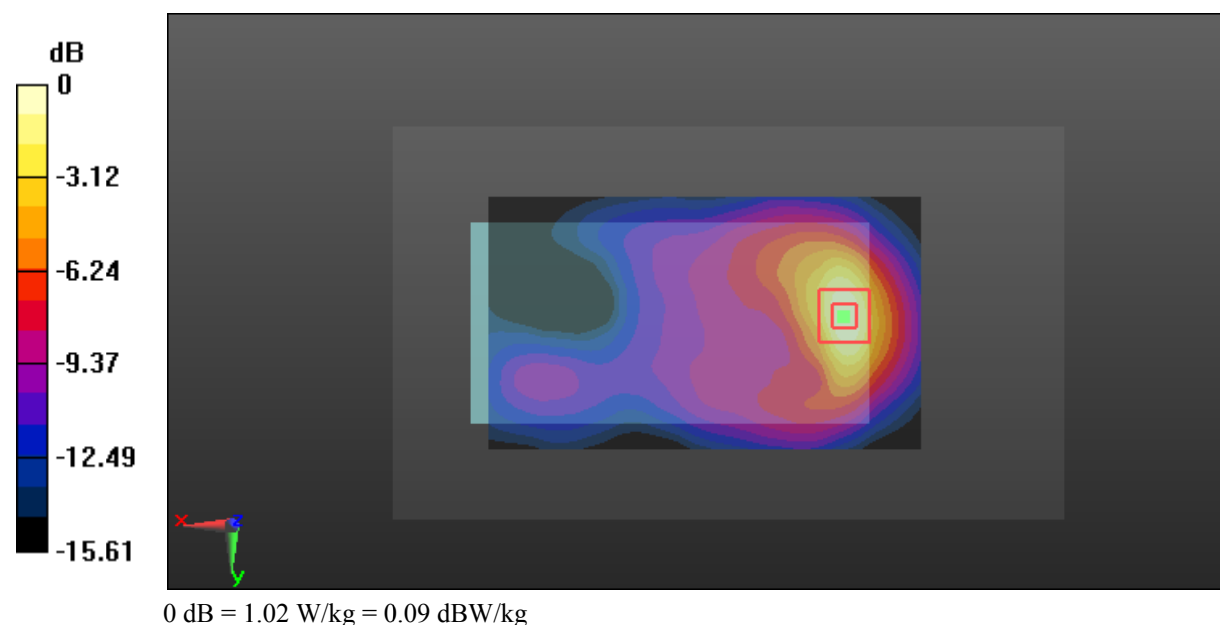

**Test Plot 26#: WCDMA Band 2\_Body Back\_High Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 1907.6 MHz;  $\sigma = 1.58$  S/m;  $\epsilon_r = 52.701$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.694 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.507 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

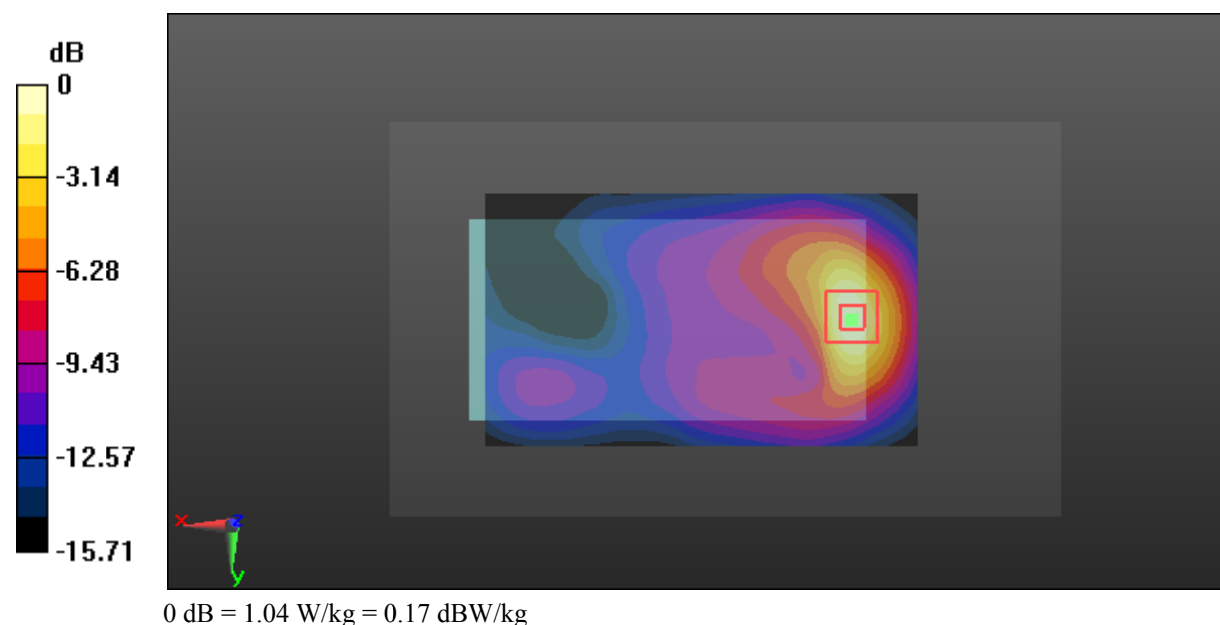

**Test Plot 27#: WCDMA Band 2\_Body Left\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.168 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.532 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.267 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.091 W/kg**

Maximum value of SAR (measured) = 0.174 W/kg

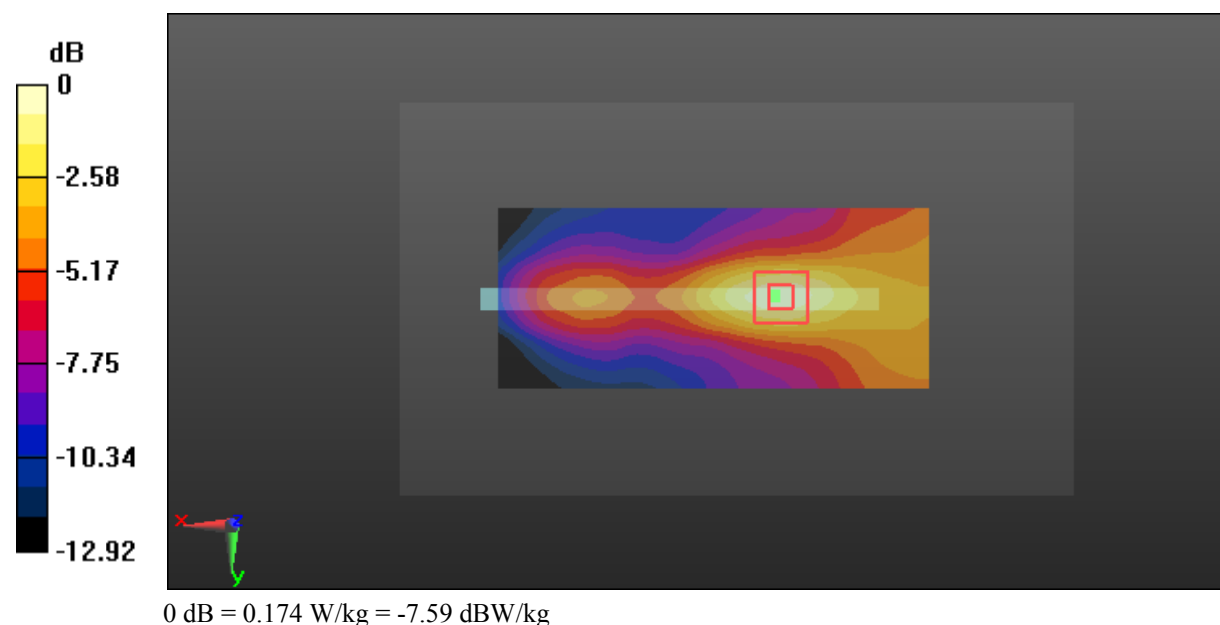

**Test Plot 28#: WCDMA Band 2\_Body Right\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.188 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.84 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.274 W/kg

**SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.096 W/kg**

Maximum value of SAR (measured) = 0.176 W/kg

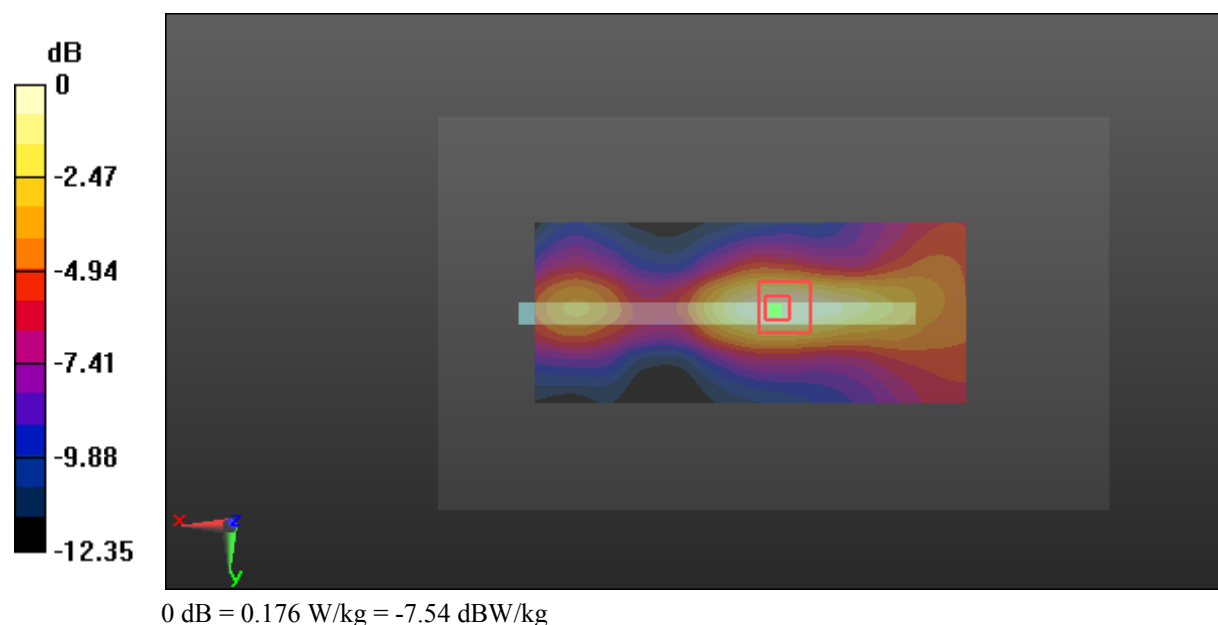

**Test Plot 29#: WCDMA Band 2\_Body Bottom\_Low Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used: 1852.4 MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 52.908$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.39 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.55 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.10 W/kg

**SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.577 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

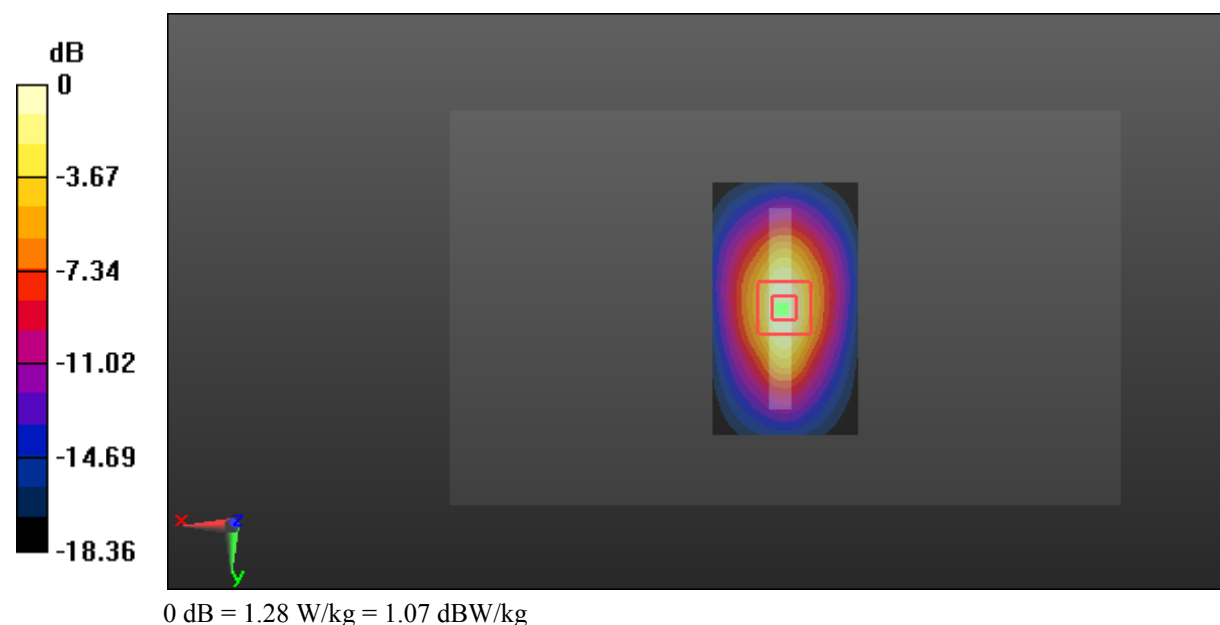

**Test Plot 30#: WCDMA Band 2\_Body Bottom\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.45 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.26 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.25 W/kg

**SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.604 W/kg**

Maximum value of SAR (measured) = 1.37 W/kg

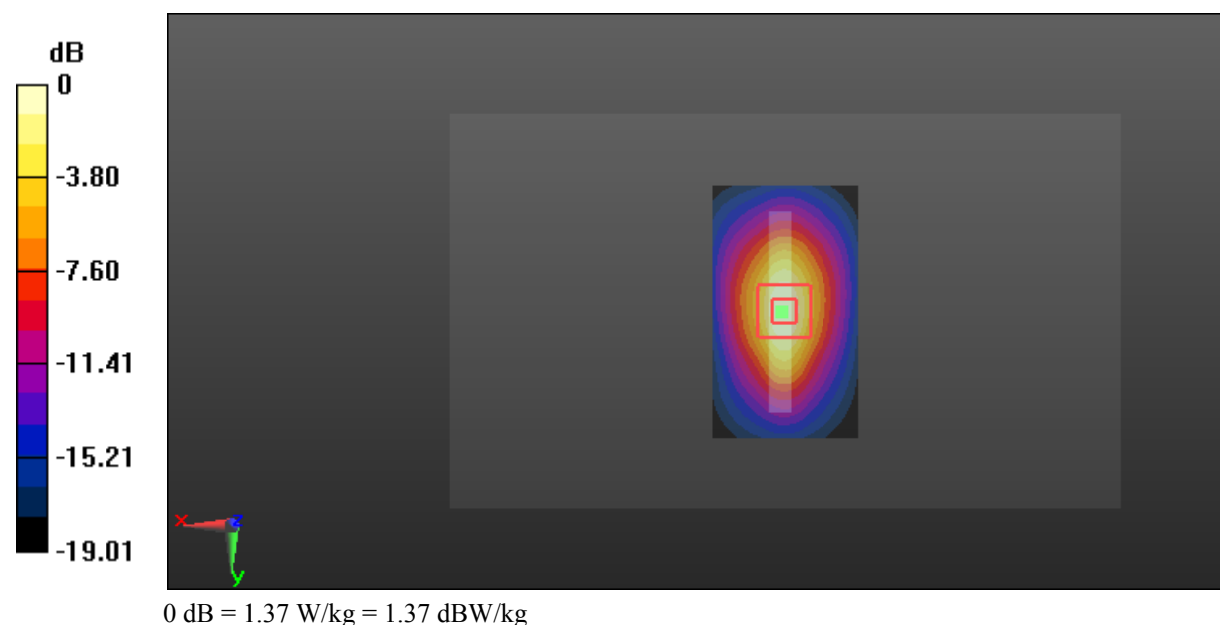

**Test Plot 31#: WCDMA Band 2\_Body Bottom\_High Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 1907.6 MHz;  $\sigma = 1.58$  S/m;  $\epsilon_r = 52.701$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.18 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.79 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.500 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

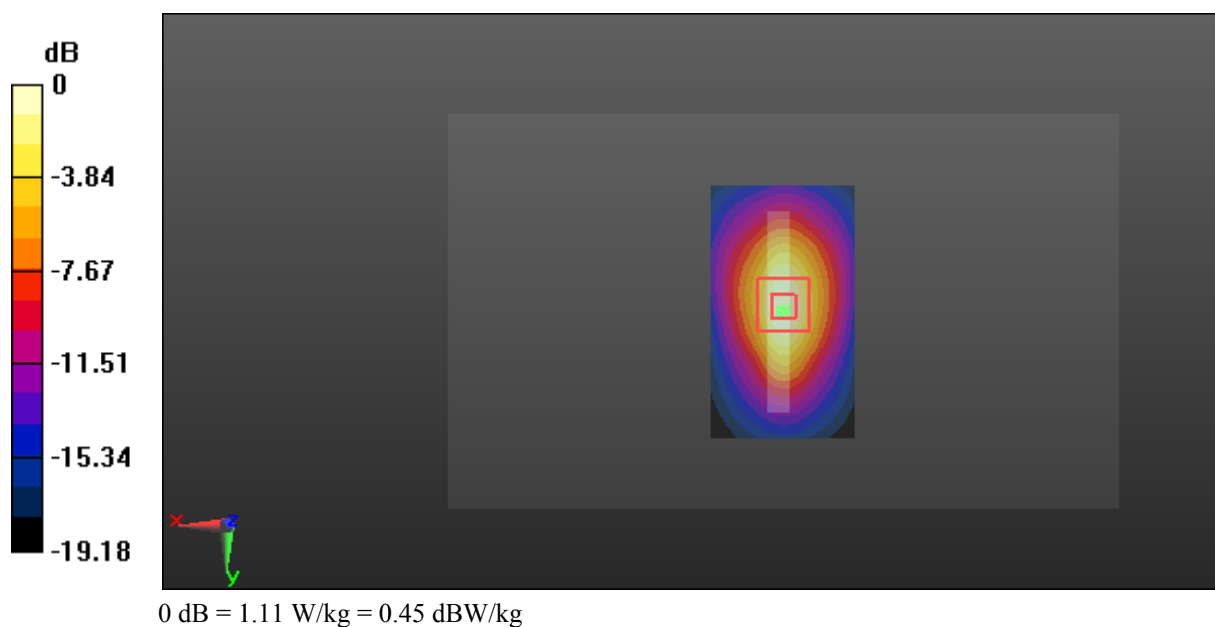

**Test Plot 32#: WCDMA Band 4\_Head Flat\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.6 MHz;  $\sigma = 1.363$  S/m;  $\epsilon_r = 41.664$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.219 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.015 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.352 W/kg

**SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.107 W/kg**

Maximum value of SAR (measured) = 0.213 W/kg

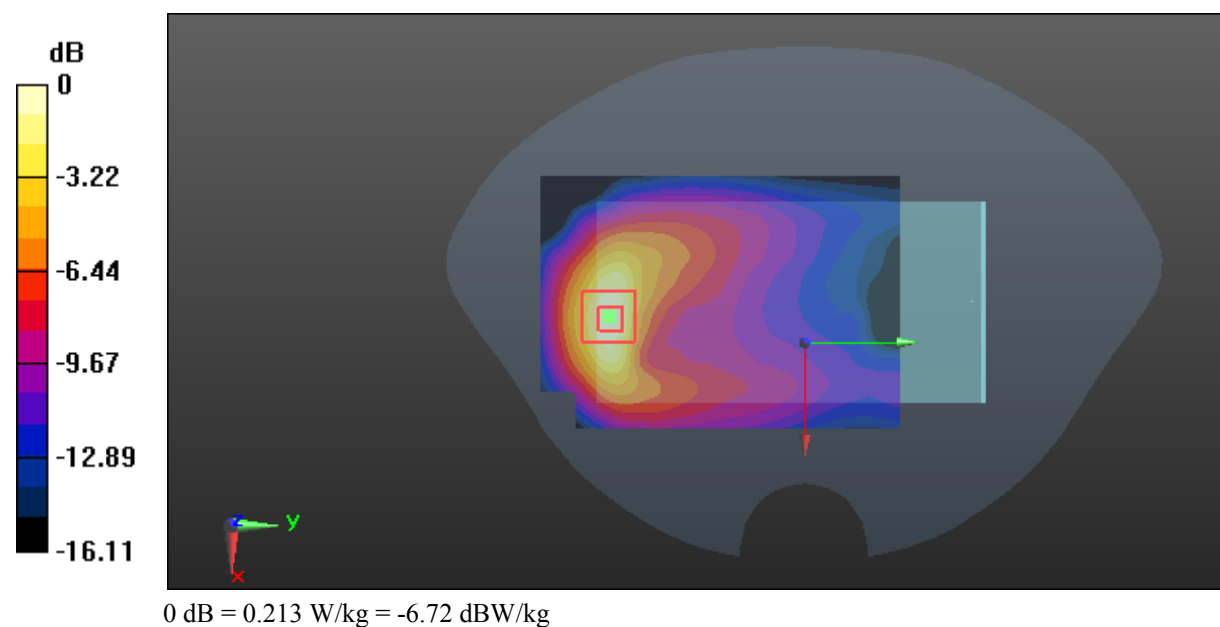

**Test Plot 33#: WCDMA Band 4\_Body Back\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.6 MHz;  $\sigma = 1.448$  S/m;  $\epsilon_r = 55.039$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.769 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.140 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.382 W/kg**

Maximum value of SAR (measured) = 0.763 W/kg

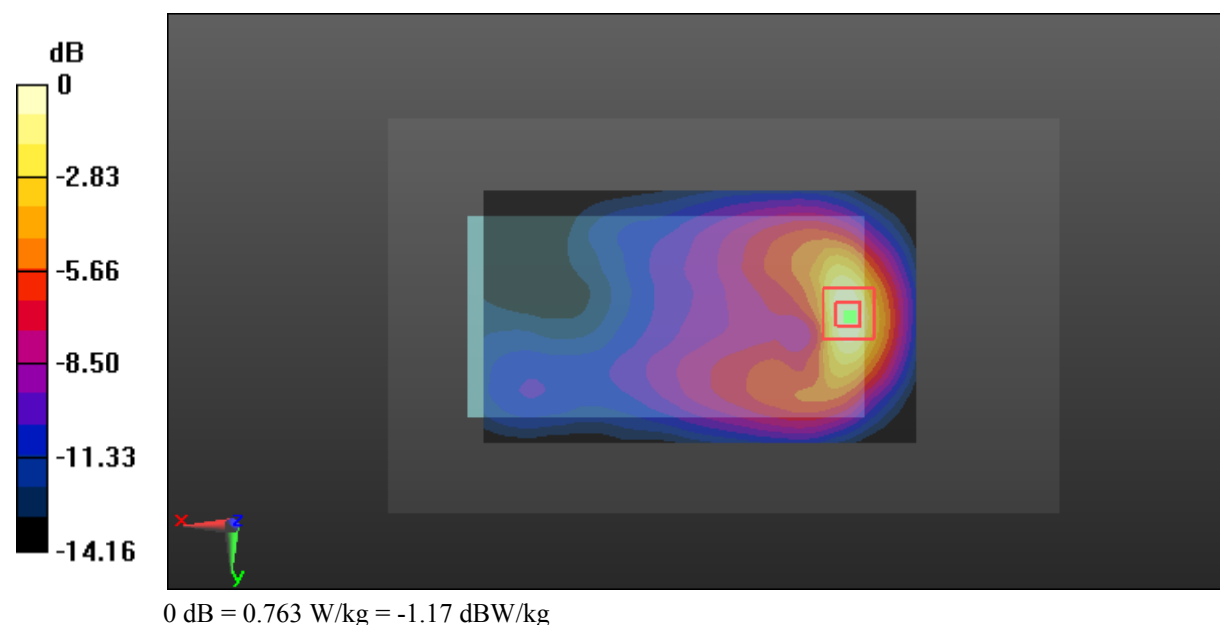

**Test Plot 34#: WCDMA Band 4\_Body Left\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.6 MHz;  $\sigma = 1.448$  S/m;  $\epsilon_r = 55.039$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.143 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.866 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.201 W/kg

**SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.136 W/kg

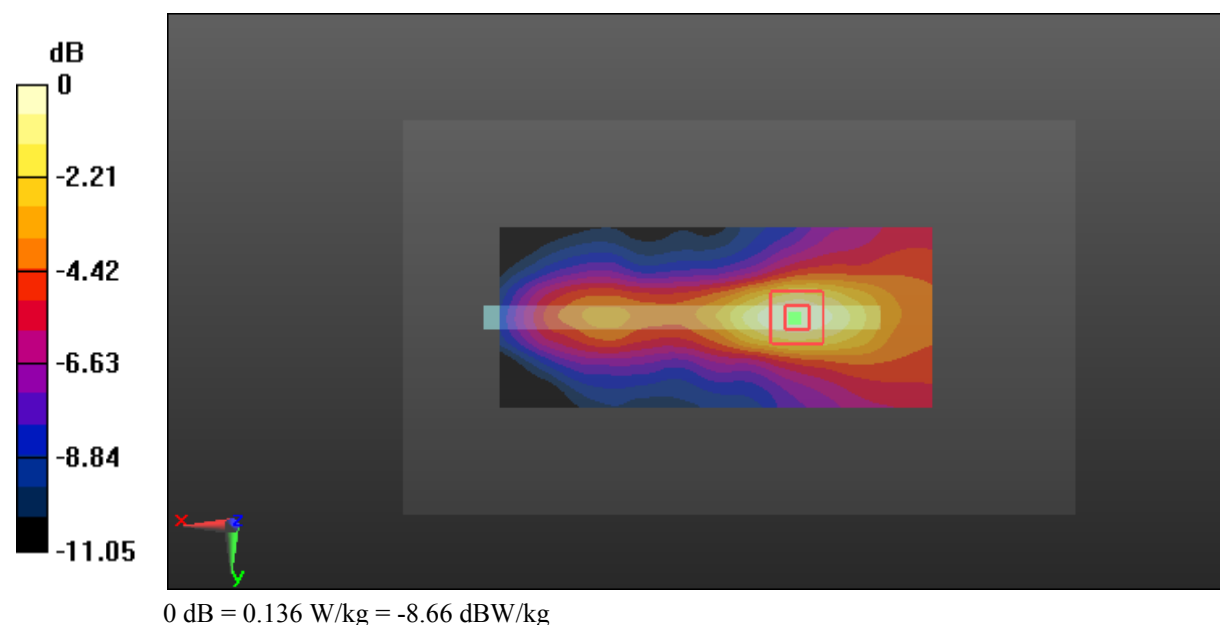

**Test Plot 35#: WCDMA Band 4\_Body Right\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.6 MHz;  $\sigma = 1.448$  S/m;  $\epsilon_r = 55.039$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.203 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.68 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.287 W/kg

**SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.106 W/kg**

Maximum value of SAR (measured) = 0.194 W/kg

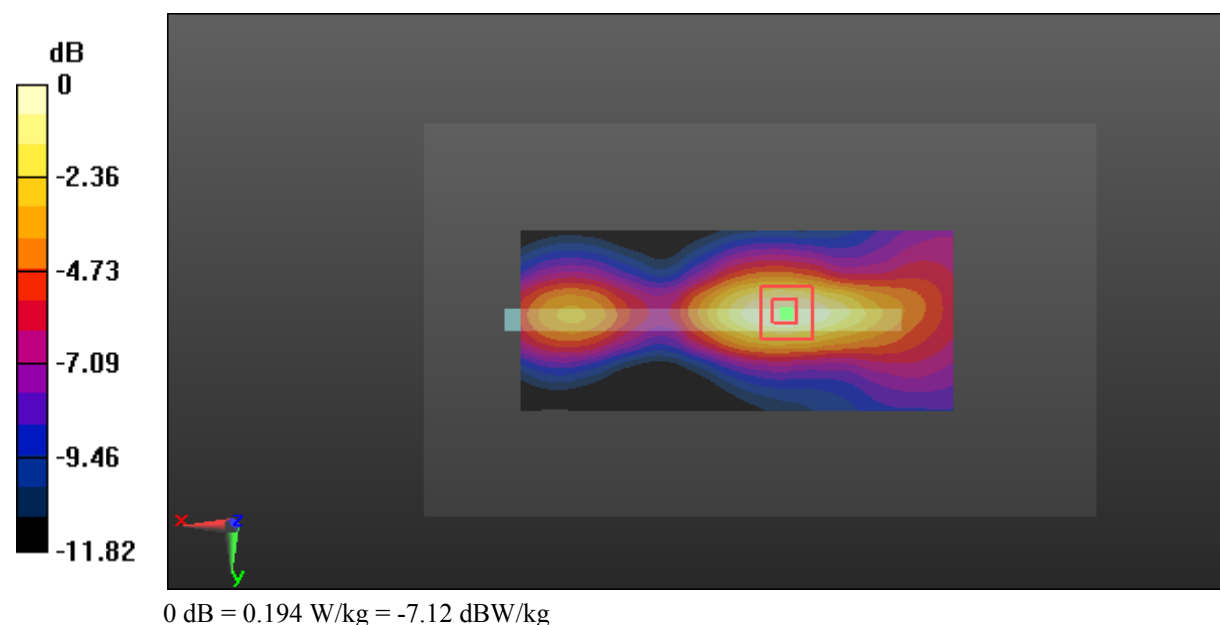

**Test Plot 36#: WCDMA Band 4\_Body Bottom\_Low Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium parameters used: 1712.4 MHz;  $\sigma = 1.452$  S/m;  $\epsilon_r = 55.053$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.21 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.70 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.559 W/kg**

Maximum value of SAR (measured) = 1.16 W/kg

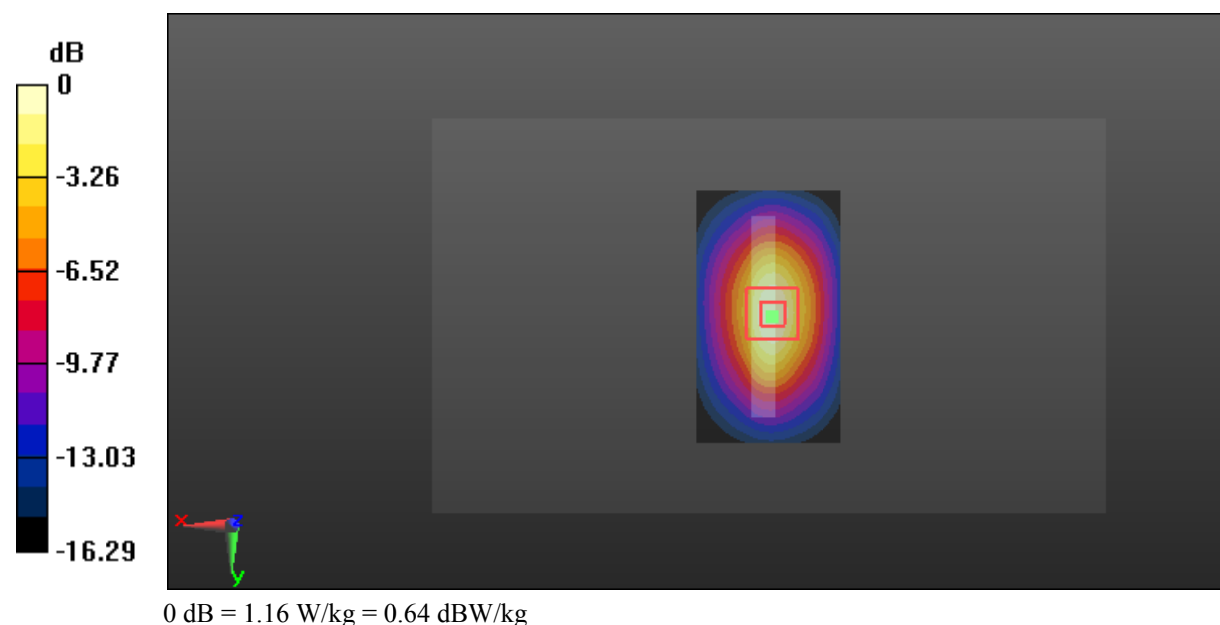

**Test Plot 37#: WCDMA Band 4\_Body Bottom\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.6 MHz;  $\sigma = 1.448$  S/m;  $\epsilon_r = 55.039$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.29 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.58 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.583 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

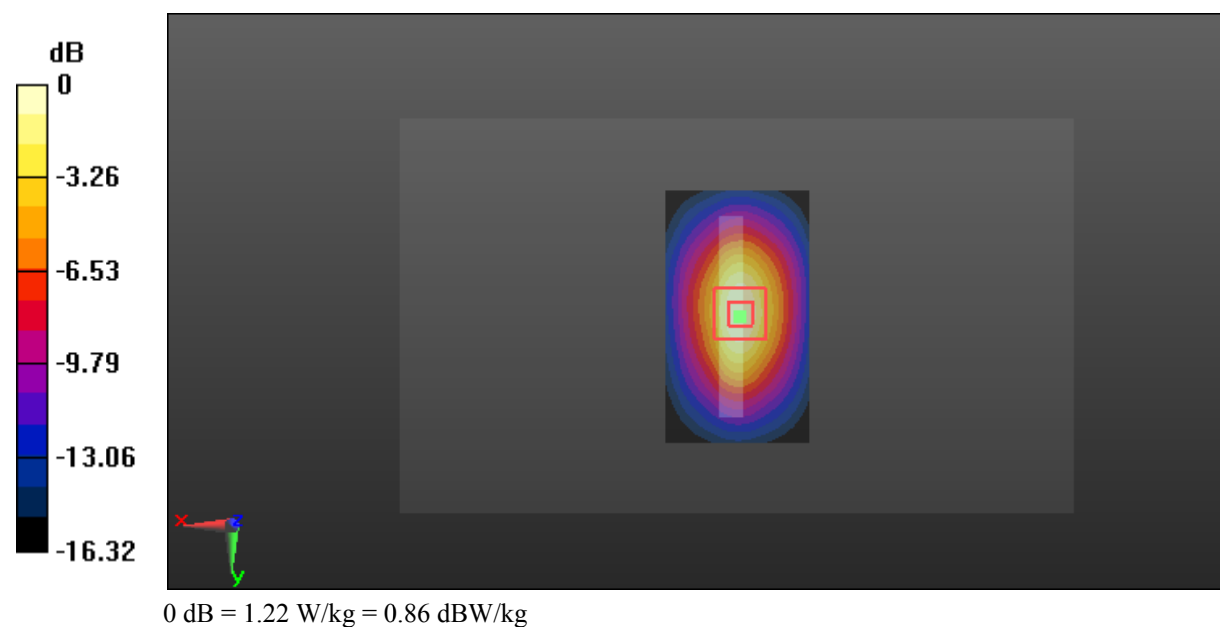

**Test Plot 38#: WCDMA Band 4\_Body Bottom\_High Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 1752.6 MHz;  $\sigma = 1.554$  S/m;  $\epsilon_r = 52.212$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.39 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.10 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.03 W/kg

**SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.624 W/kg**

Maximum value of SAR (measured) = 1.31 W/kg

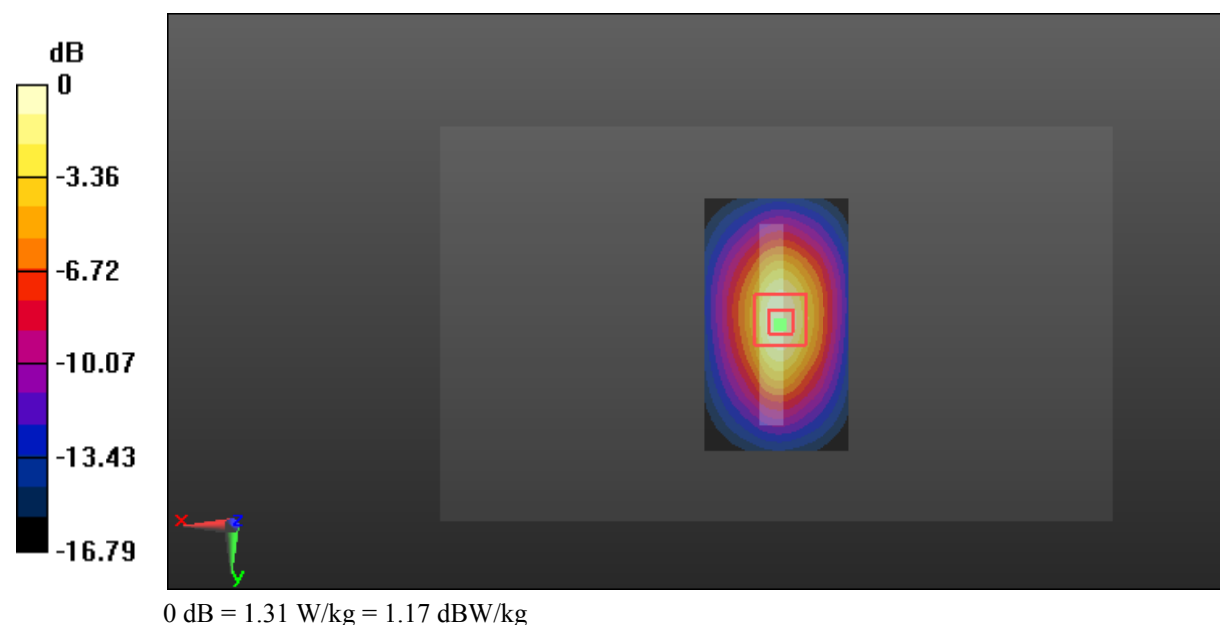

**Test Plot 39#: WCDMA Band 5\_Head Flat\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.6 MHz;  $\sigma = 0.866$  S/m;  $\epsilon_r = 42.928$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.187 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.887 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.243 W/kg

**SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.108 W/kg**

Maximum value of SAR (measured) = 0.191 W/kg

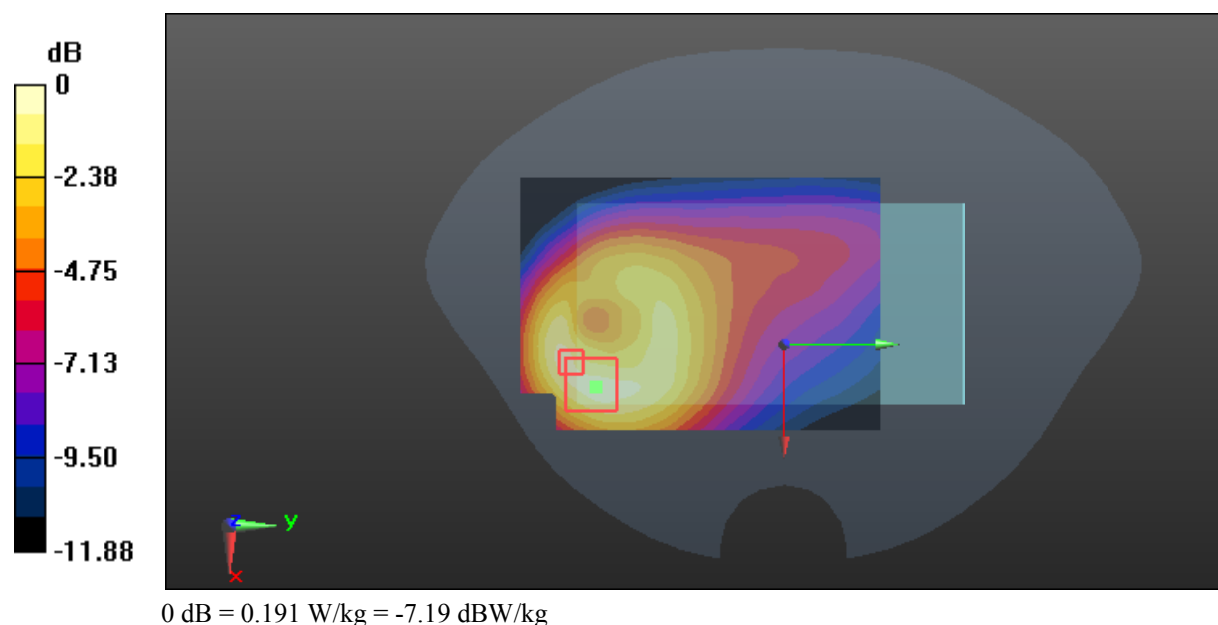

**Test Plot 40#: WCDMA Band 5\_Body Back\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.6 MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 56.801$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.618 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.66 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.949 W/kg

**SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.345 W/kg**

Maximum value of SAR (measured) = 0.626 W/kg

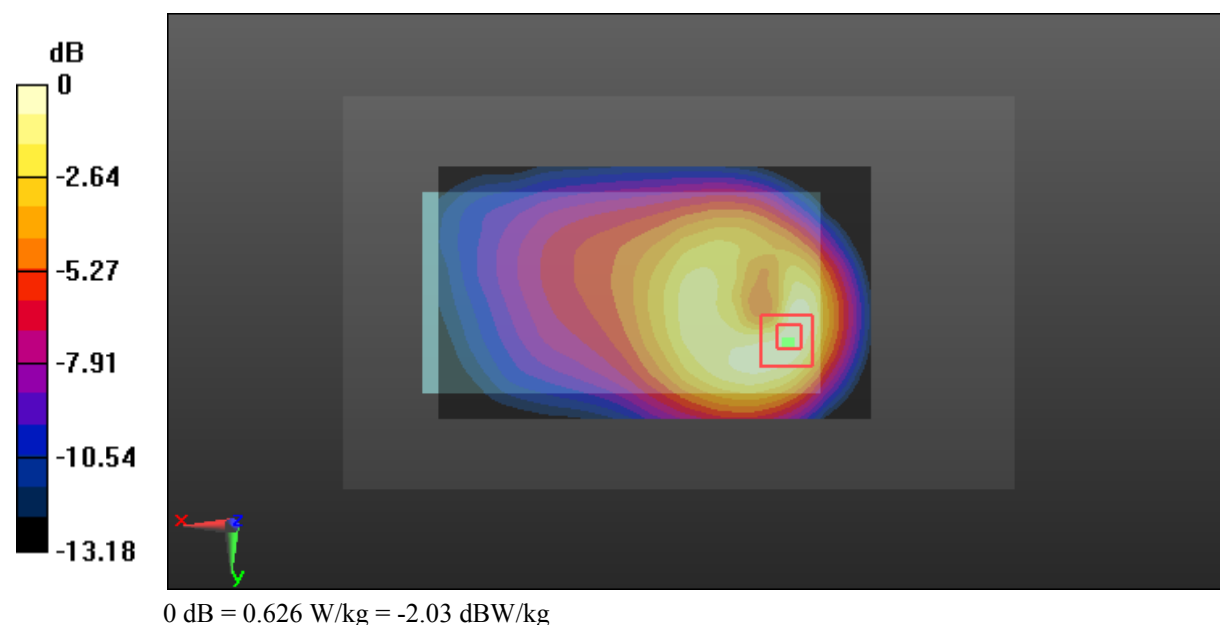

**Test Plot 41#: WCDMA Band 5\_Body Left\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.6 MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 56.801$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.125 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.18 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.162 W/kg

**SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.080 W/kg**

Maximum value of SAR (measured) = 0.123 W/kg

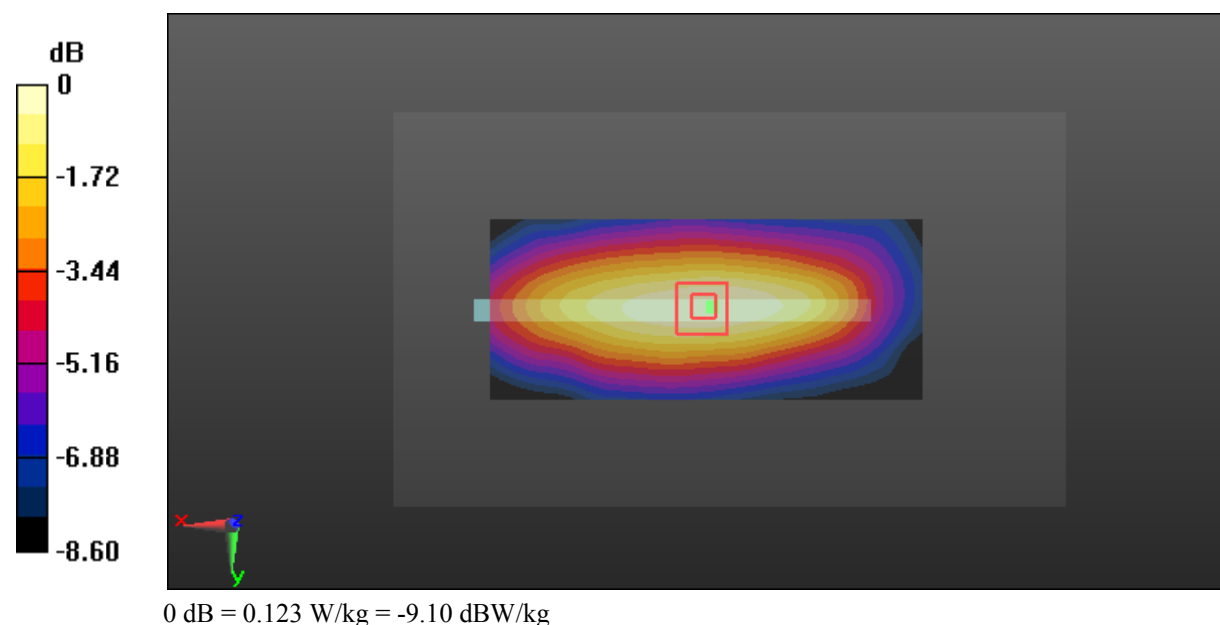

**Test Plot 42#: WCDMA Band 5\_Body Right\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.6 MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 56.801$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.101 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.396 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.142 W/kg

**SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.059 W/kg**

Maximum value of SAR (measured) = 0.101 W/kg

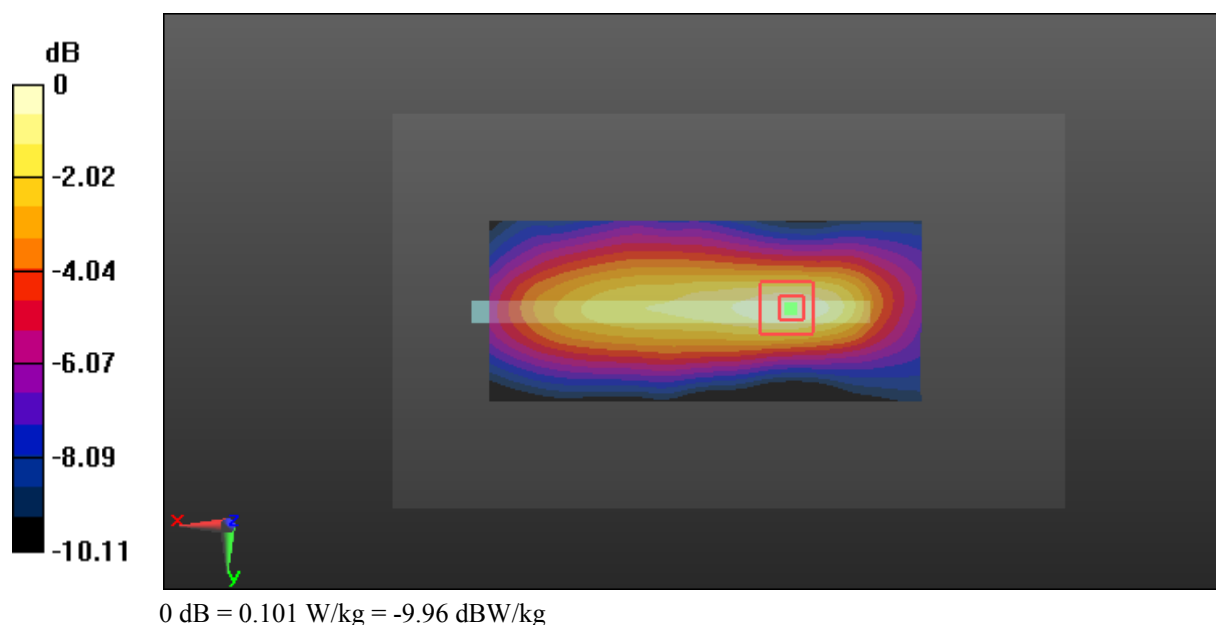

**Test Plot 43#: WCDMA Band 5\_Body Bottom\_Middle Channel****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.6 MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 56.801$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.416 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.19 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.579 W/kg

**SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 0.398 W/kg

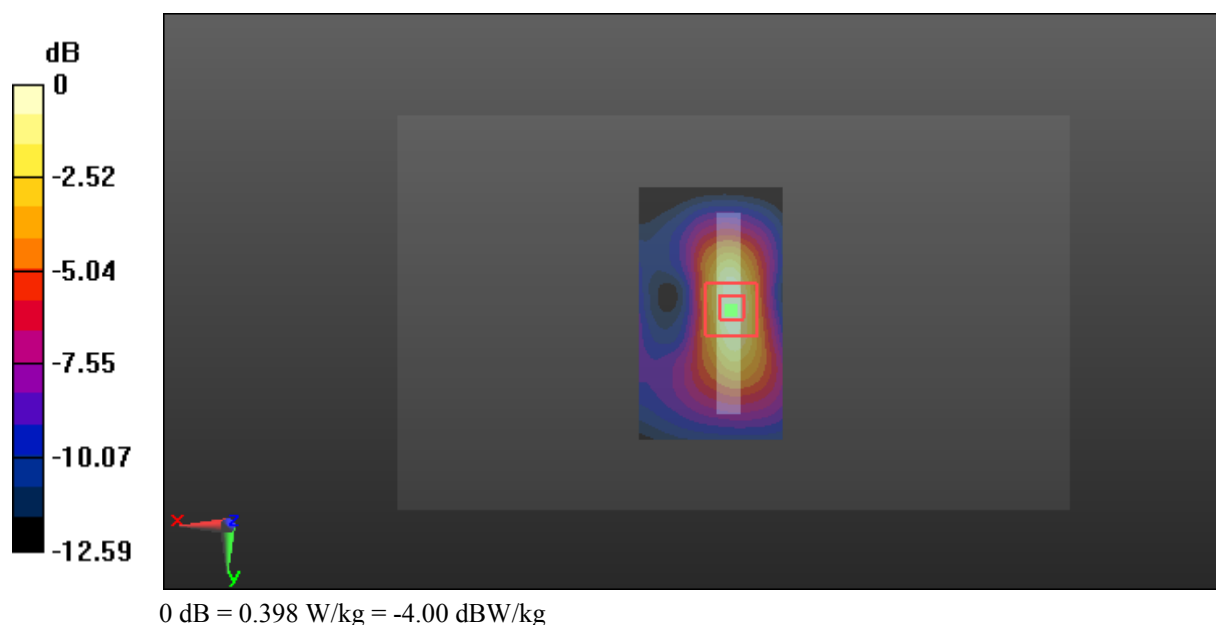

**Test Plot 44#: LTE Band 2\_Head Flat\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.359$  S/m;  $\epsilon_r = 40.907$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.284 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.427 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.476 W/kg

**SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.146 W/kg**

Maximum value of SAR (measured) = 0.289 W/kg

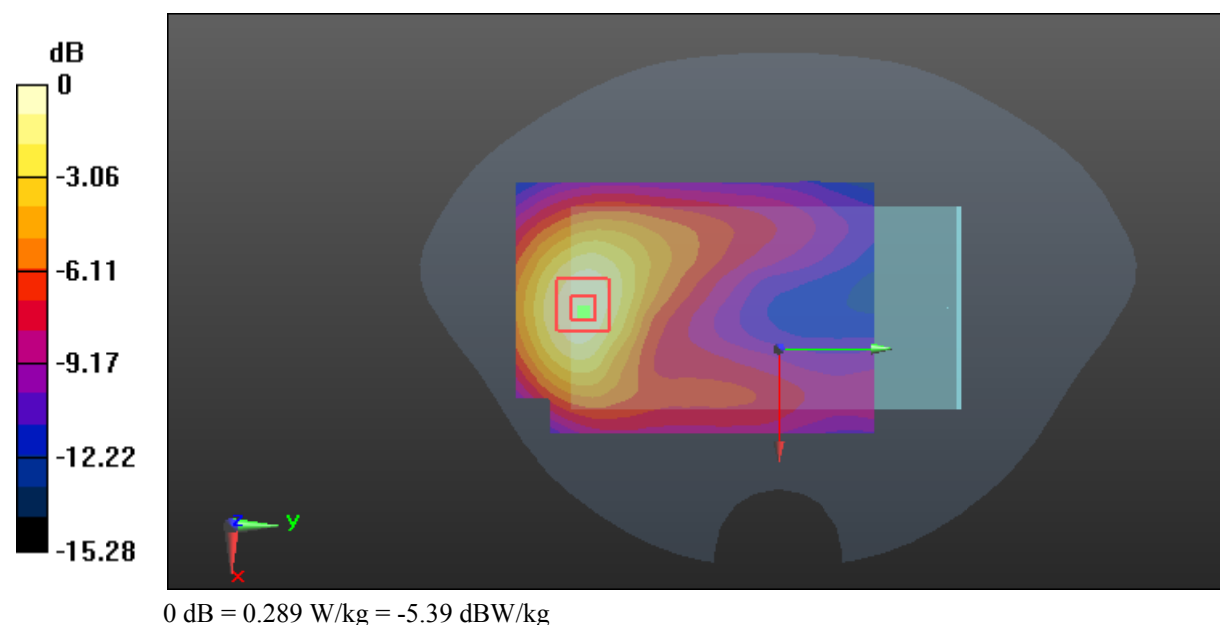

**Test Plot 45#: LTE Band 2\_Head Flat\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.359$  S/m;  $\epsilon_r = 40.907$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.268 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.912 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.408 W/kg

**SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 0.266 W/kg

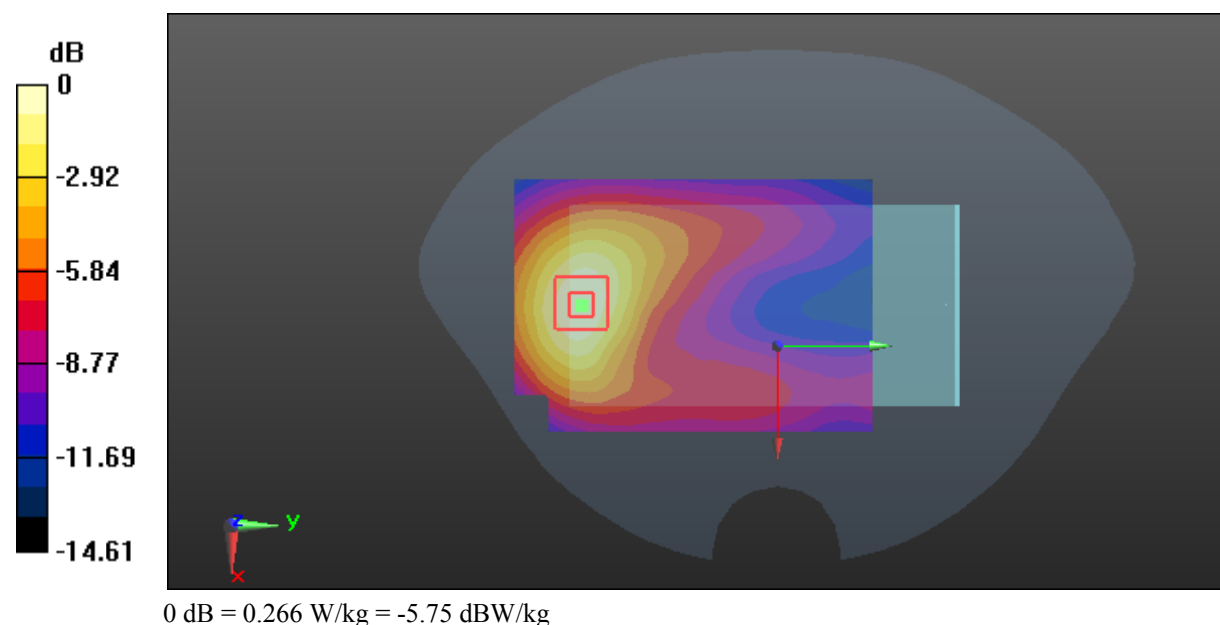

**Test Plot 46#: LTE Band 2\_Body Back\_Low Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium parameters used: 1860 MHz;  $\sigma = 1.529$  S/m;  $\epsilon_r = 52.833$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.965 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.801 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.477 W/kg**

Maximum value of SAR (measured) = 0.961 W/kg

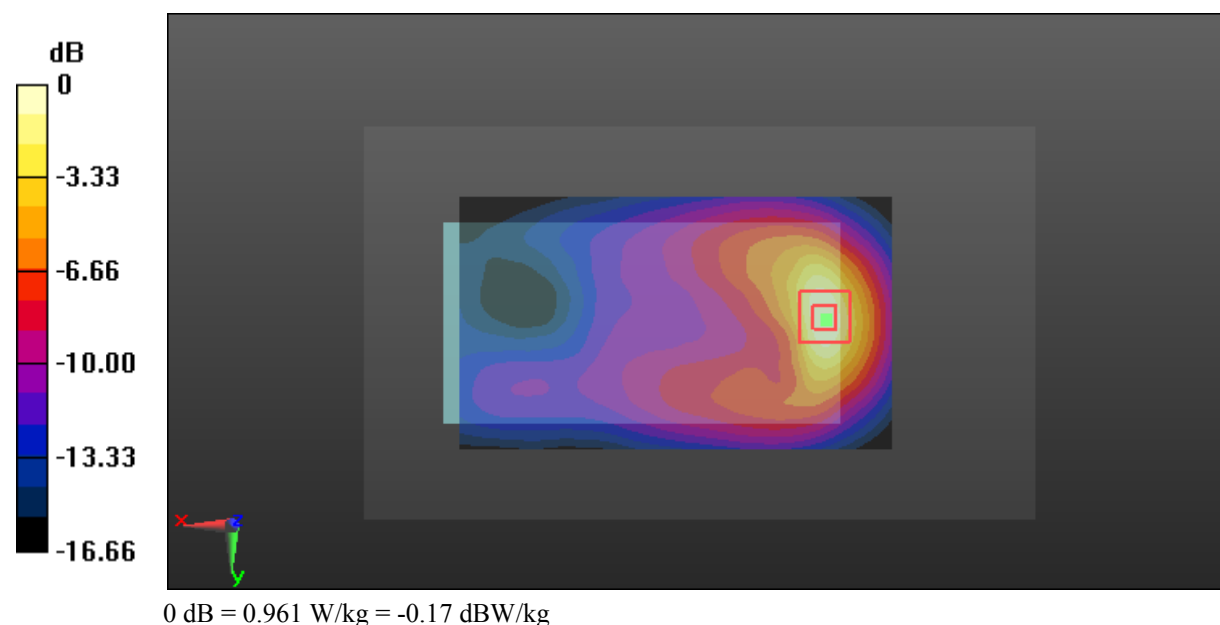

**Test Plot 47#: LTE Band 2\_Body Back\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.999 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.601 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.890 W/kg; SAR(10 g) = 0.489 W/kg**

Maximum value of SAR (measured) = 1.00 W/kg

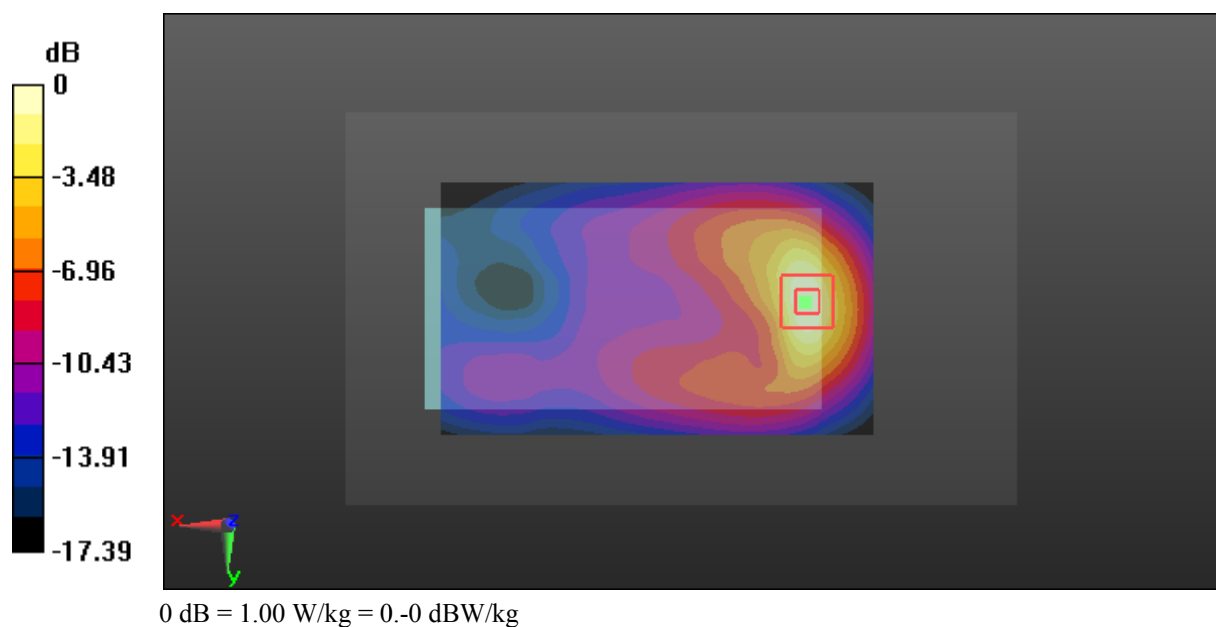

**Test Plot 48#: LTE Band 2\_Body Back\_High Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used: 1900 MHz;  $\sigma = 1.544$  S/m;  $\epsilon_r = 52.749$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.948 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.988 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.467 W/kg**

Maximum value of SAR (measured) = 0.951 W/kg

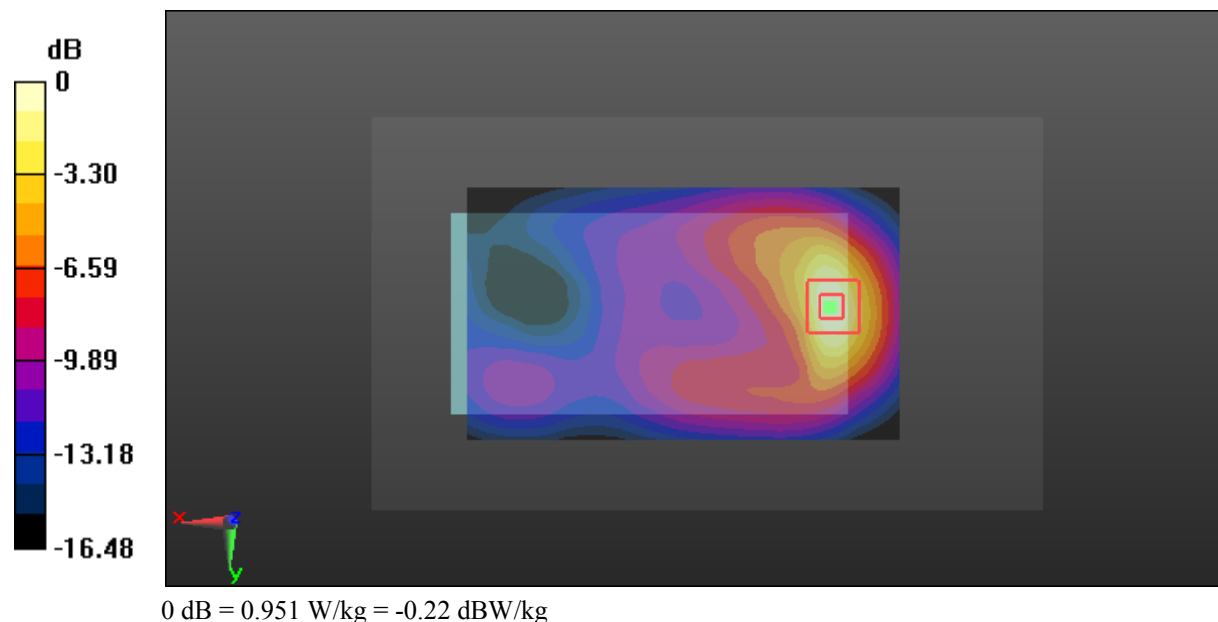

**Test Plot 49#: LTE Band 2\_Body Back\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.763 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.764 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.17 W/kg

**SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.377 W/kg**

Maximum value of SAR (measured) = 0.762 W/kg

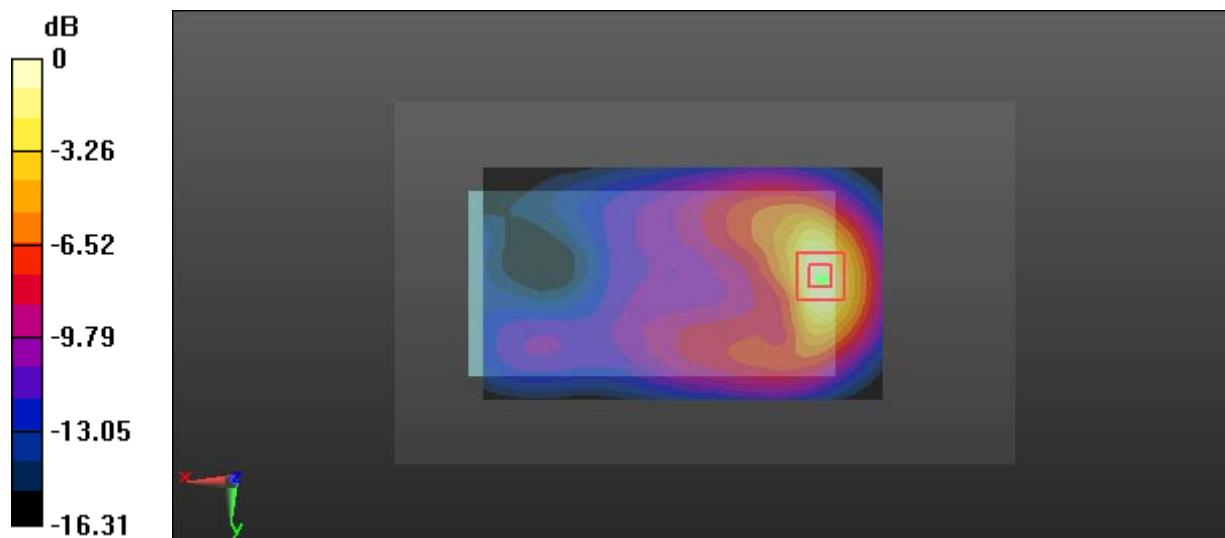

0 dB = 0.762 W/kg = -1.18 dBW/kg

**Test Plot 50#: LTE Band 2\_Body Back\_Middle Channel\_100%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.682 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.160 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.998 W/kg

**SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.318 W/kg**

Maximum value of SAR (measured) = 0.677 W/kg

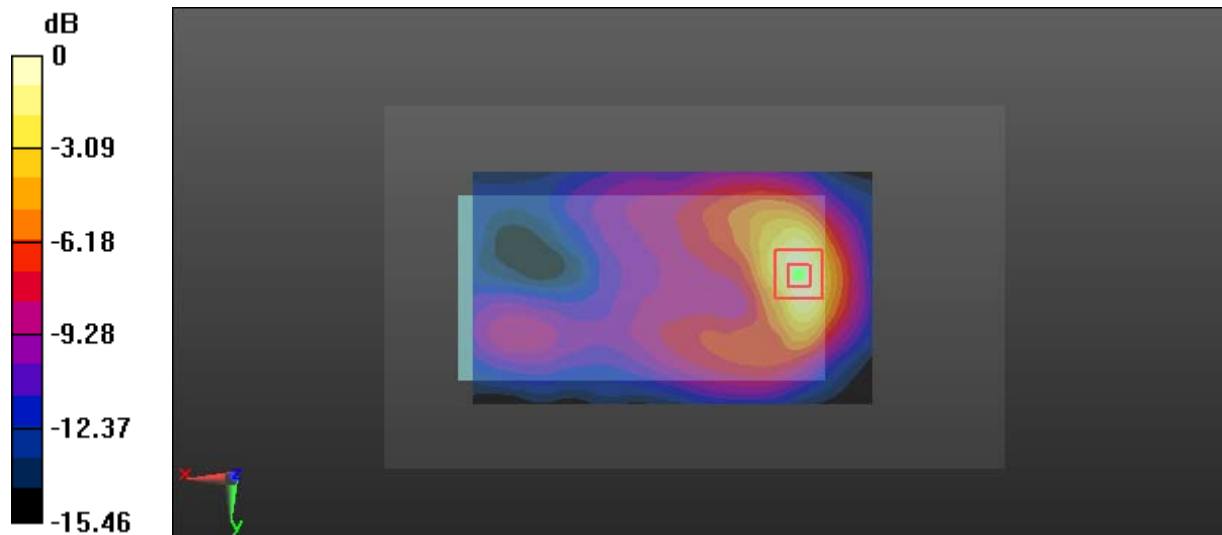

0 dB = 0.677 W/kg = -1.69 dBW/kg

**Test Plot 51#: LTE Band 2\_Body Left\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.151 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.299 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.233 W/kg

**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.079 W/kg**

Maximum value of SAR (measured) = 0.149 W/kg

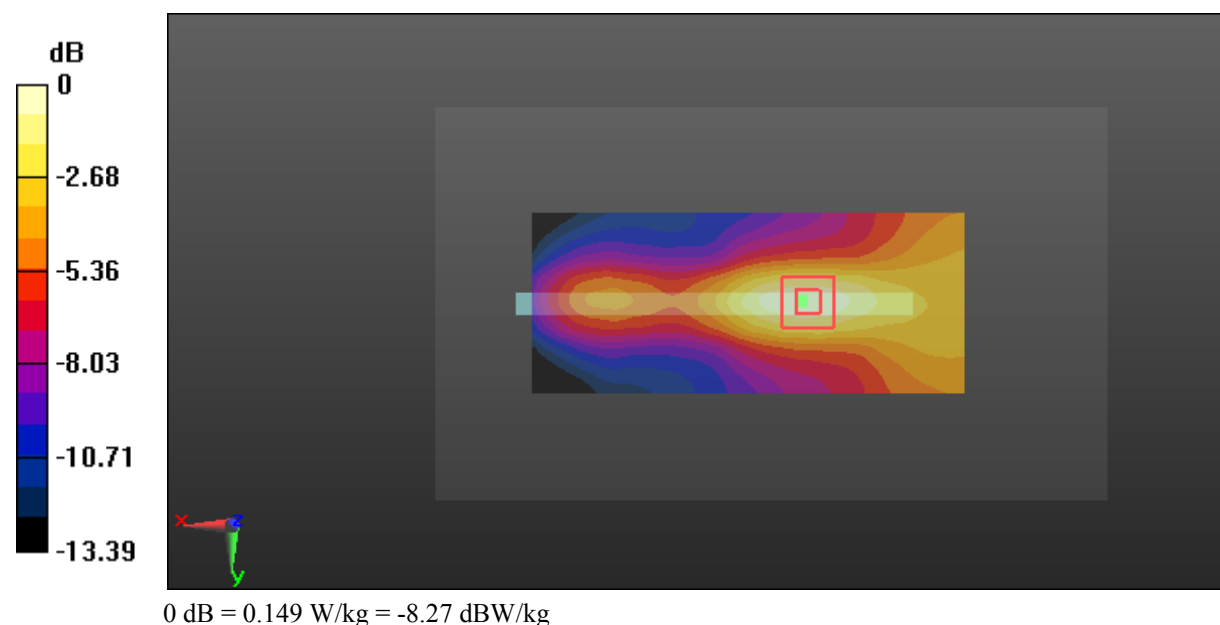

**Test Plot 52#: LTE Band 2\_Body Left\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.120 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.180 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.182 W/kg

**SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.061 W/kg**

Maximum value of SAR (measured) = 0.114 W/kg

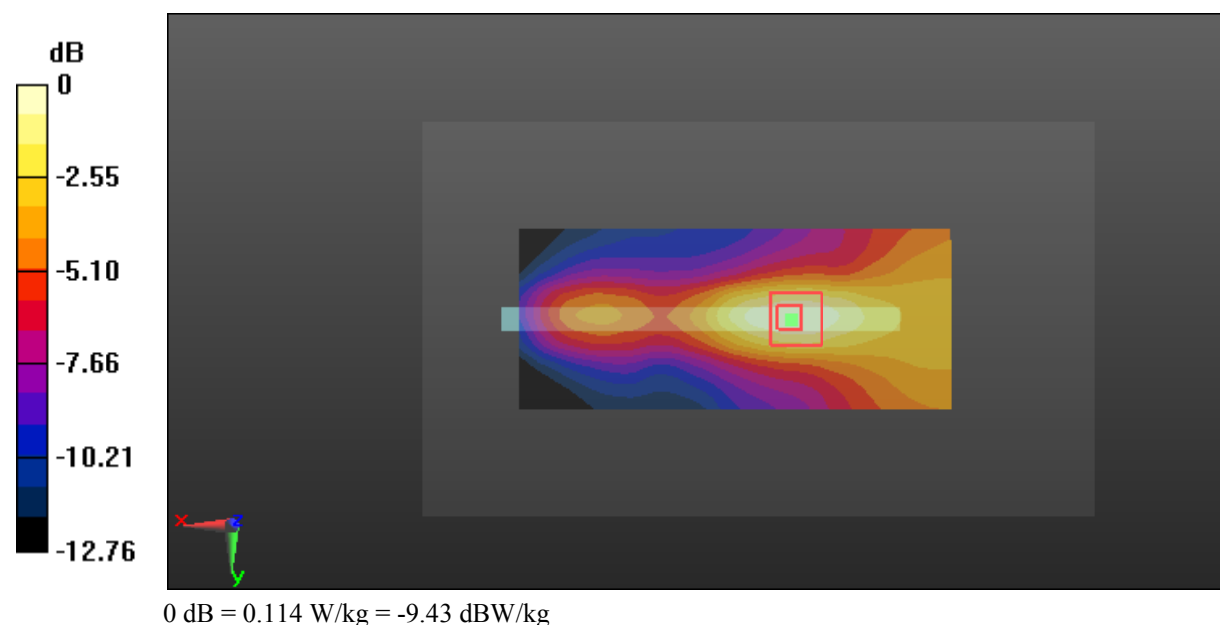

**Test Plot 53#: LTE Band 2\_Body Right\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.180 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.42 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.265 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.171 W/kg

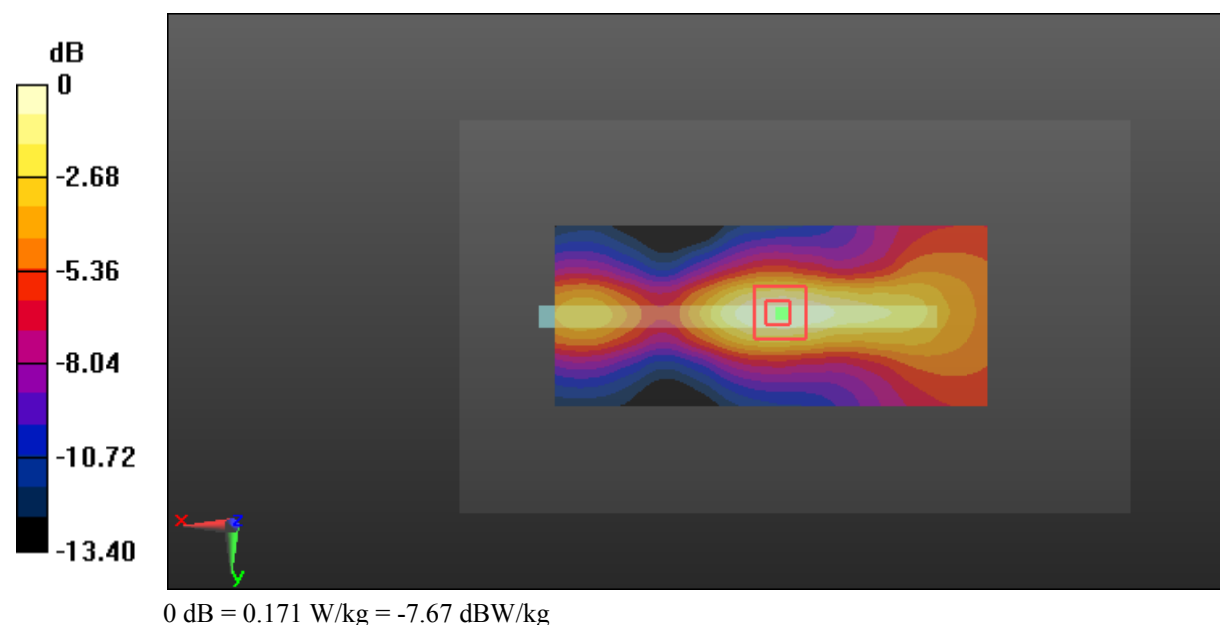

**Test Plot 54#: LTE Band 2\_Body Right\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.141 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.198 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.203 W/kg

**SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.132 W/kg

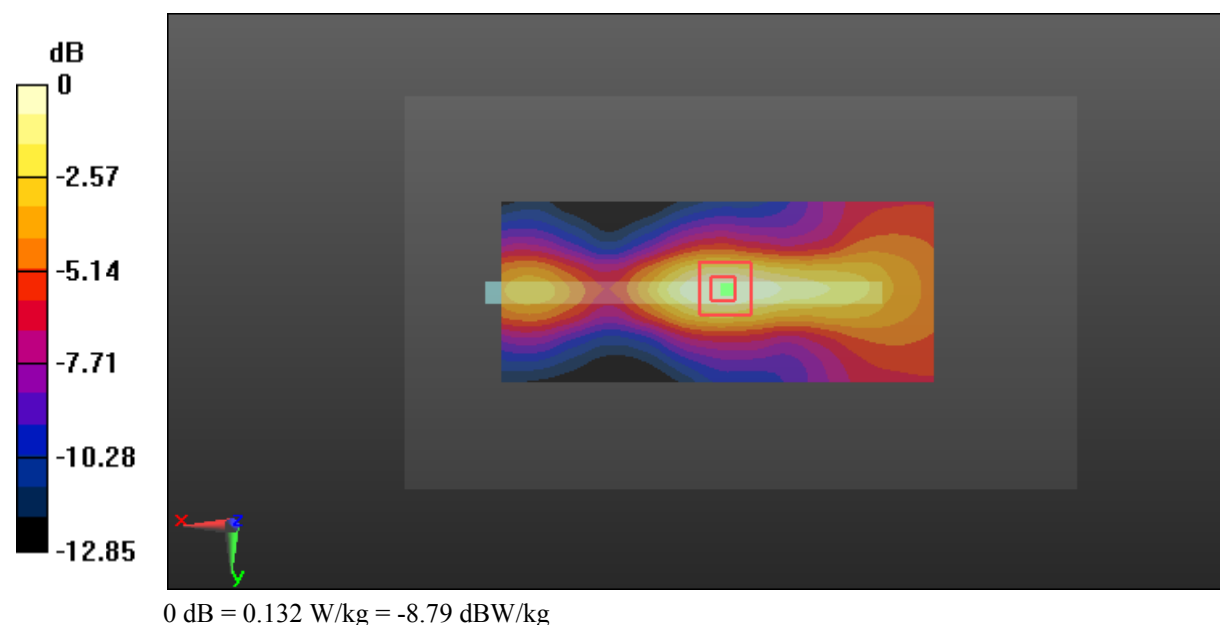

**Test Plot 55#: LTE Band 2\_Body Bottom\_Low Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium parameters used: 1860 MHz;  $\sigma = 1.529$  S/m;  $\epsilon_r = 52.833$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.49 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.55 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.41 W/kg

**SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.666 W/kg**

Maximum value of SAR (measured) = 1.48 W/kg

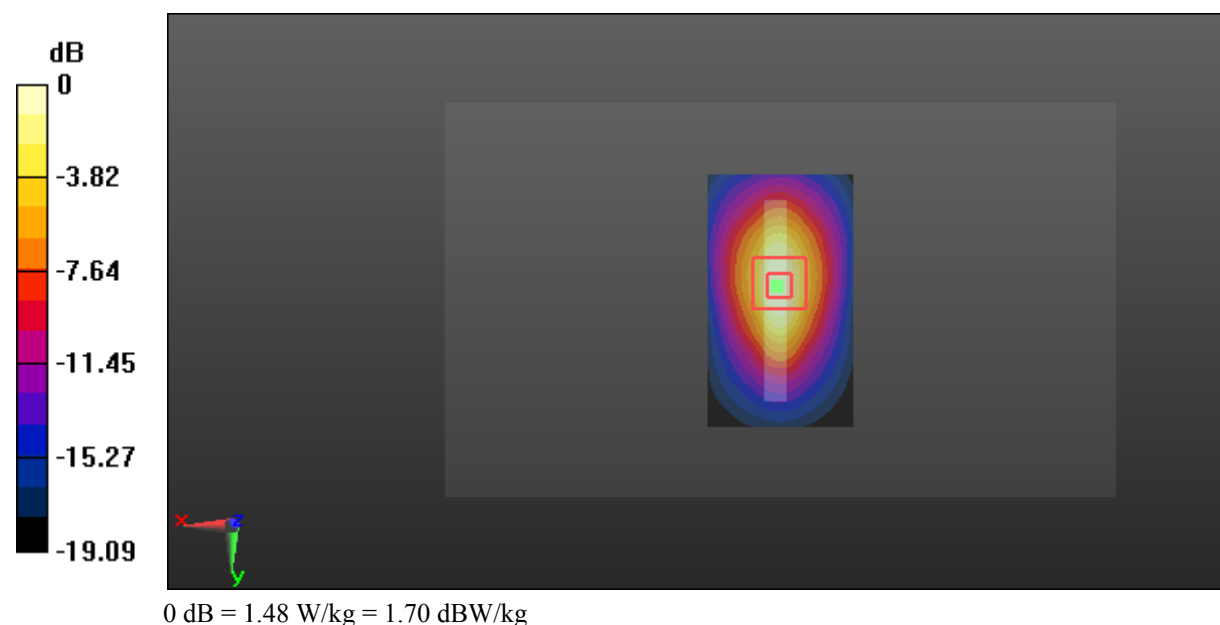

**Test Plot 56#: LTE Band 2\_Body Bottom\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.62 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.04 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.50 W/kg

**SAR(1 g) = 1.35 W/kg; SAR(10 g) = 0.683 W/kg**

Maximum value of SAR (measured) = 1.54 W/kg

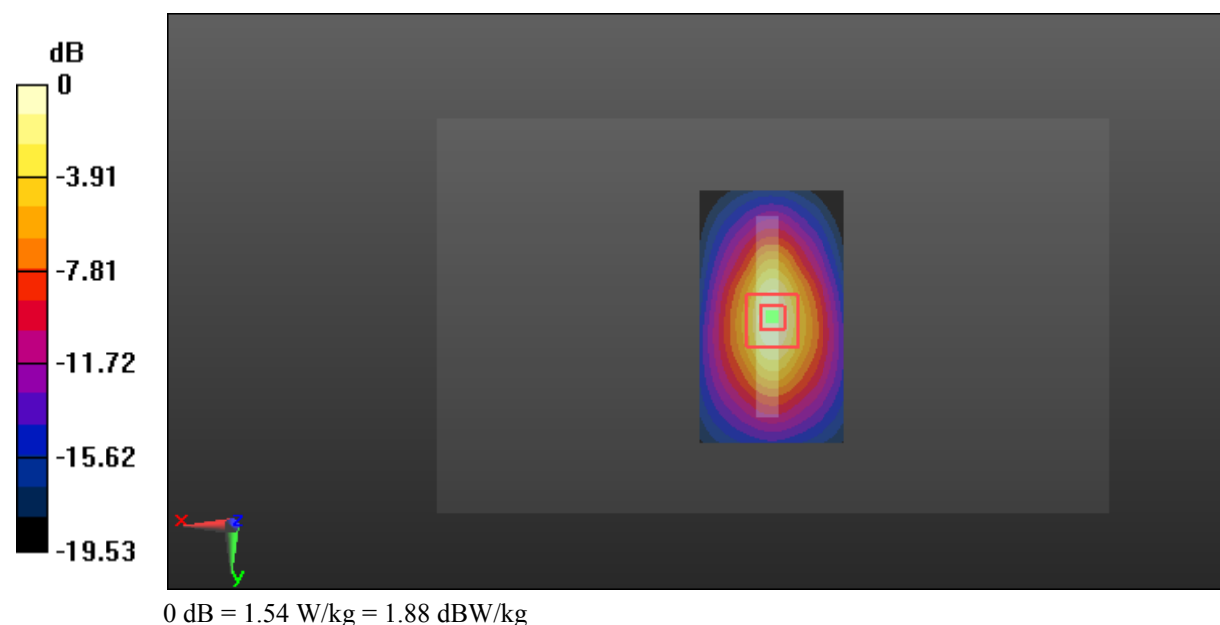

**Test Plot 57#: LTE Band 2\_Body Bottom\_High Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used: 1900 MHz;  $\sigma = 1.544$  S/m;  $\epsilon_r = 52.749$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.50 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.08 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.47 W/kg

**SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.662 W/kg**

Maximum value of SAR (measured) = 1.48 W/kg

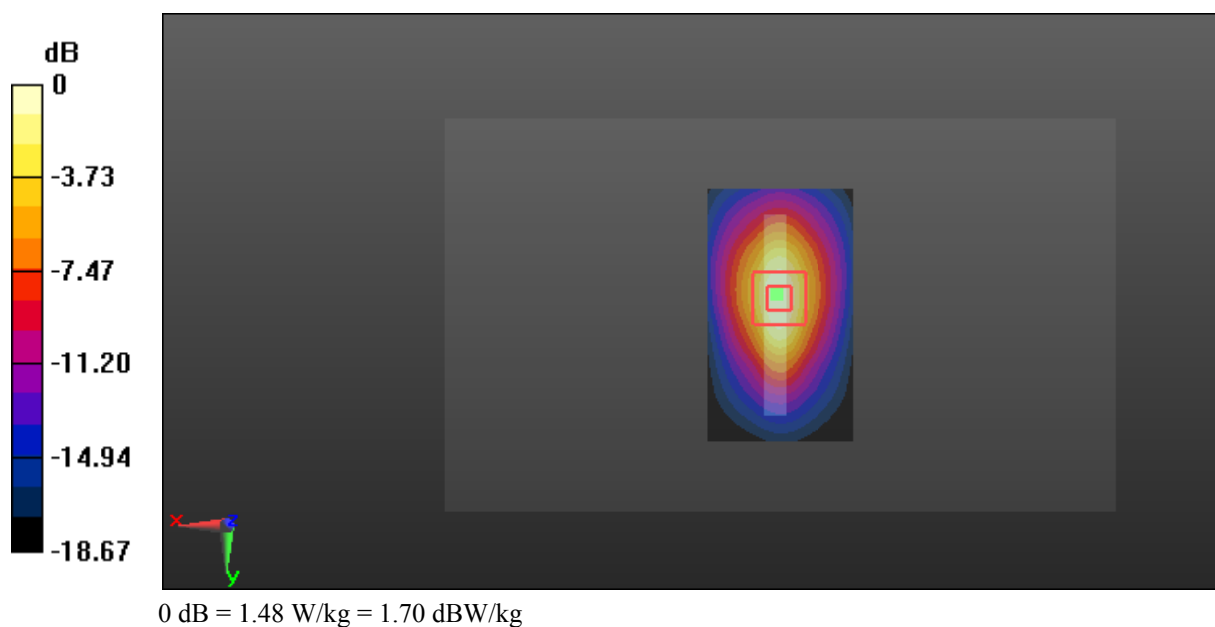

**Test Plot 58#: LTE Band 2\_Body Bottom\_Low Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium parameters used: 1860 MHz;  $\sigma = 1.529$  S/m;  $\epsilon_r = 52.833$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.18 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.34 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.91 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.526 W/kg**

Maximum value of SAR (measured) = 1.17 W/kg

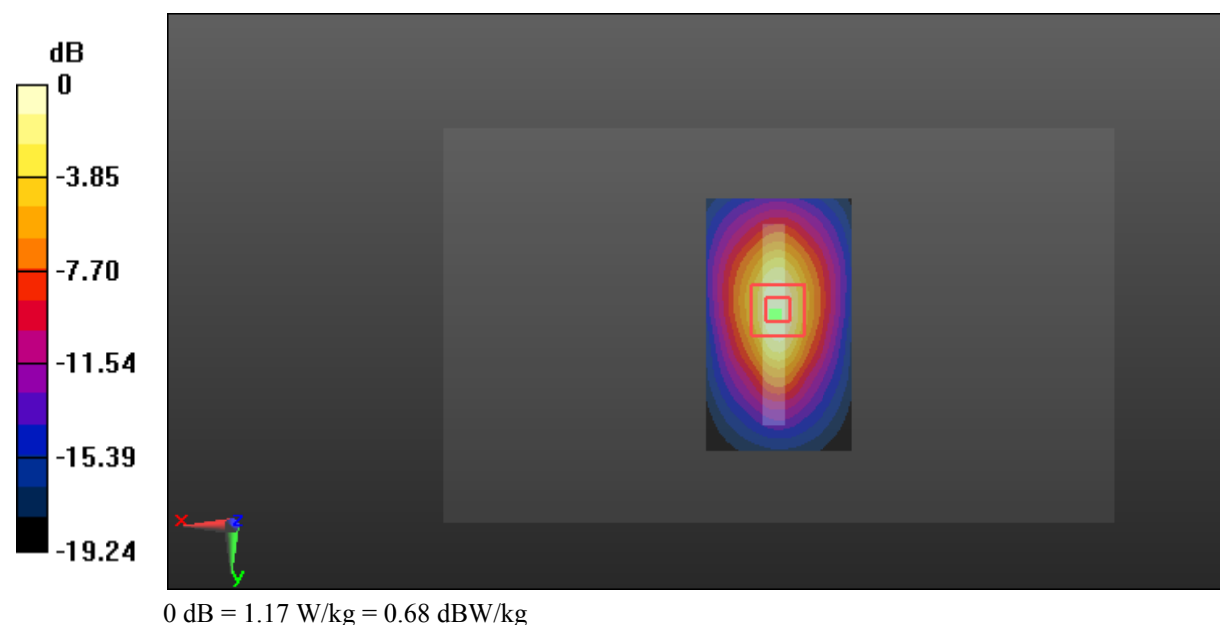

**Test Plot 59#: LTE Band 2\_Body Bottom\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.27 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.94 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.08 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.564 W/kg**

Maximum value of SAR (measured) = 1.27 W/kg

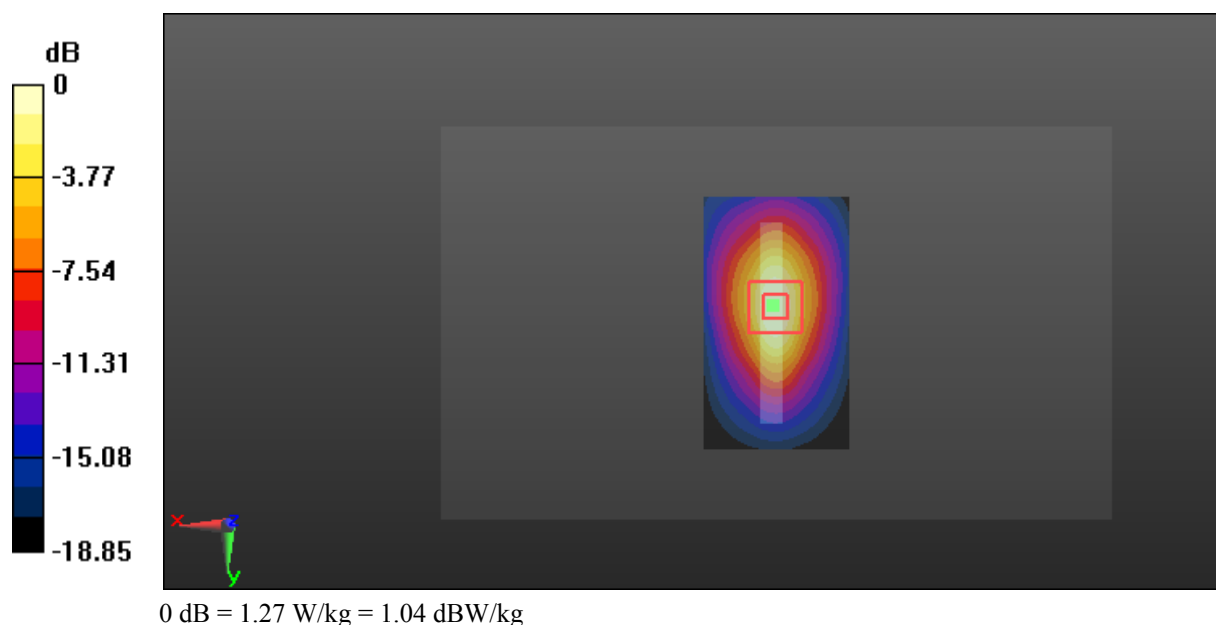

**Test Plot 60#: LTE Band 2\_Body Bottom\_High Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used: 1900 MHz;  $\sigma = 1.544$  S/m;  $\epsilon_r = 52.749$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.23 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.29 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.03 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.543 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

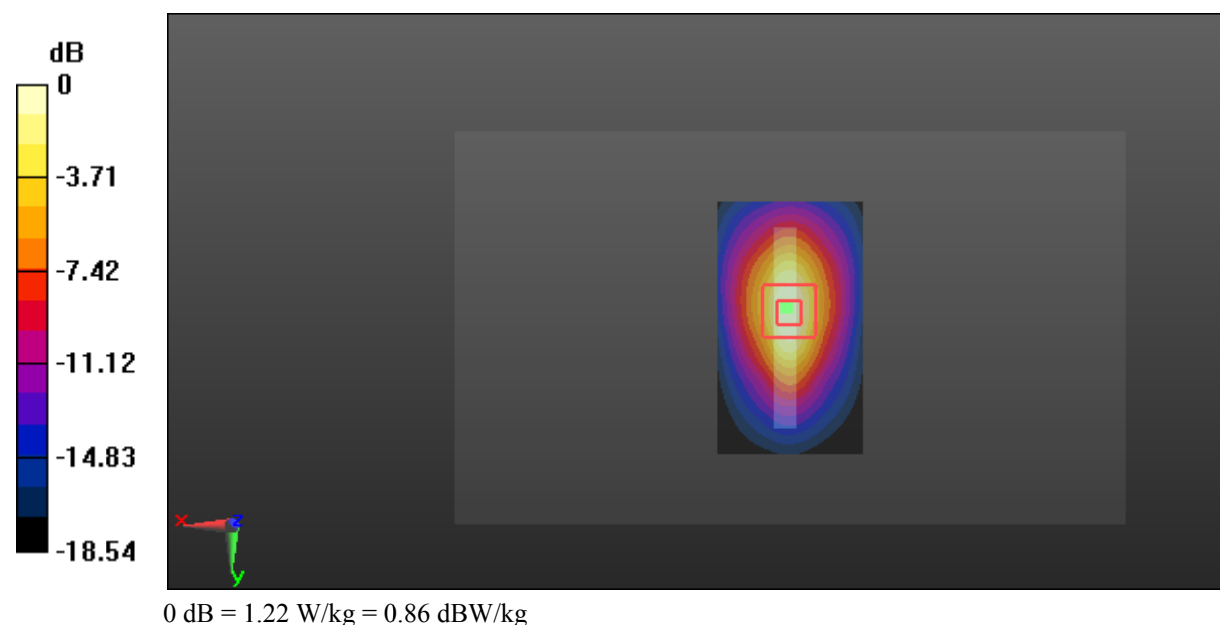

**Test Plot 61#: LTE Band 2\_Body Bottom\_Middle Channel\_100%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.766$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.27 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.23 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.08 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.563 W/kg**

Maximum value of SAR (measured) = 1.27 W/kg

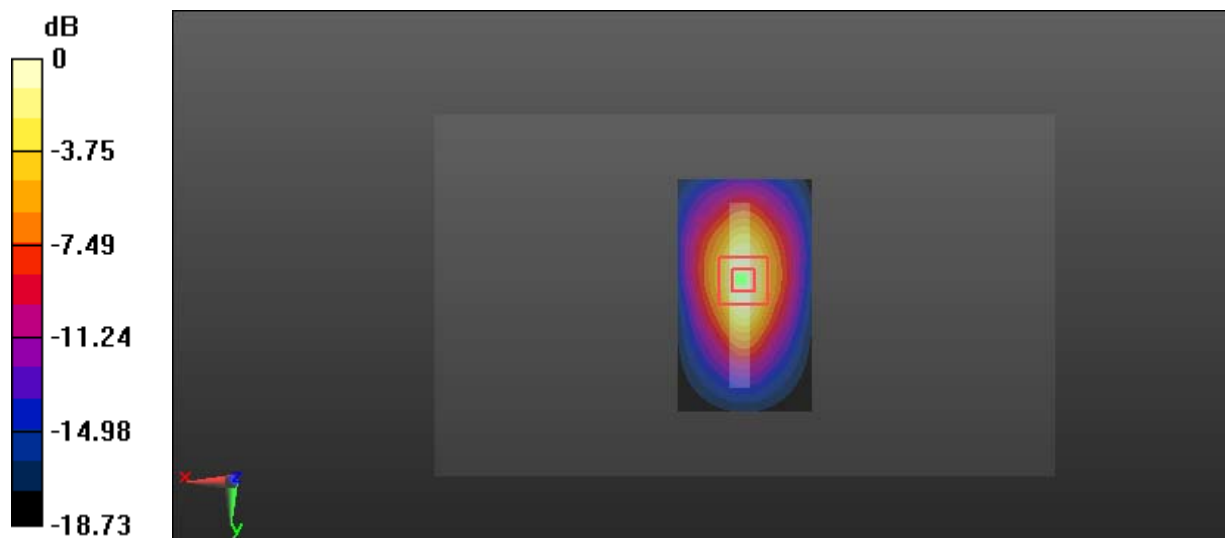

0 dB = 1.27 W/kg = 1.04 dBW/kg

**Test Plot 62#: LTE Band 4\_Head Flat\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.5 MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 41.665$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.262 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.604 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.402 W/kg

**SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.122 W/kg**

Maximum value of SAR (measured) = 0.256 W/kg

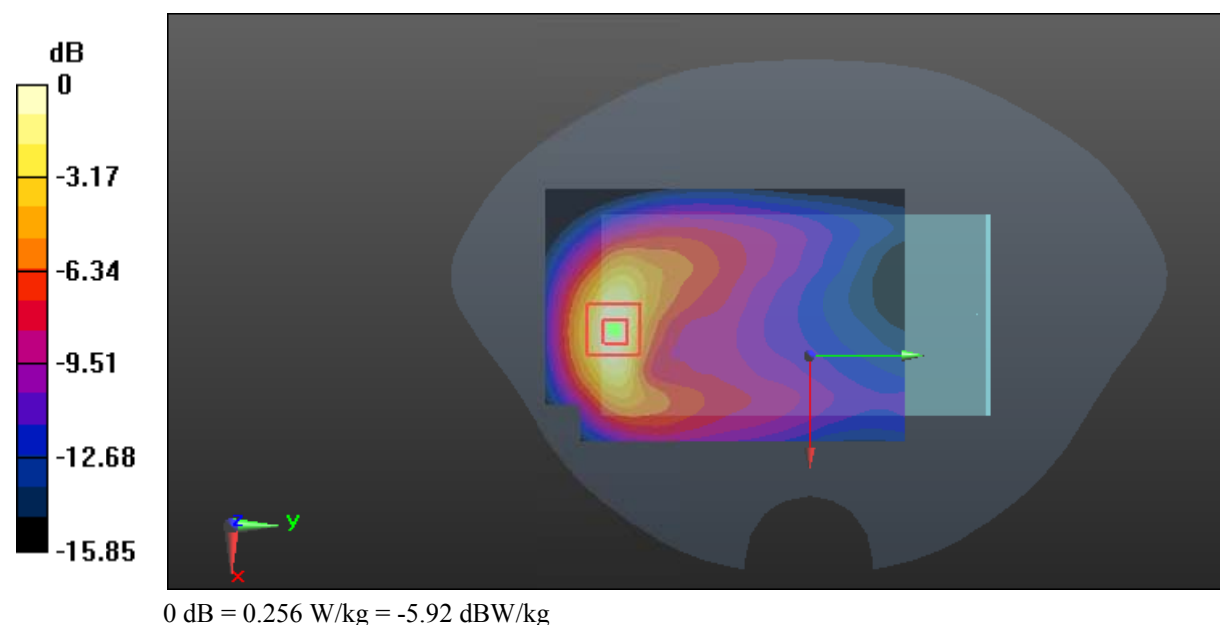

**Test Plot 63#: LTE Band 4\_Head Flat\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.5 MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 41.665$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.207 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.135 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.332 W/kg

**SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.094 W/kg**

Maximum value of SAR (measured) = 0.218 W/kg

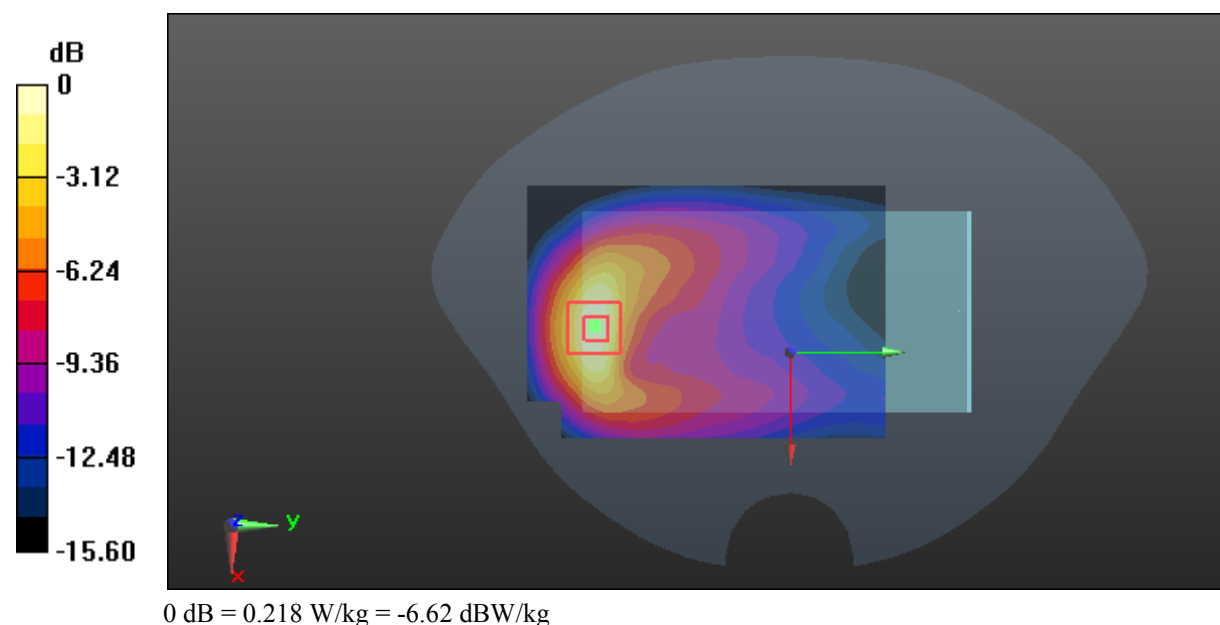

**Test Plot 64#: LTE Band 4\_Body Back\_Low Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used: 1720 MHz;  $\sigma = 1.452$  S/m;  $\epsilon_r = 55.053$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.967 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.03 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.481 W/kg**

Maximum value of SAR (measured) = 0.972 W/kg

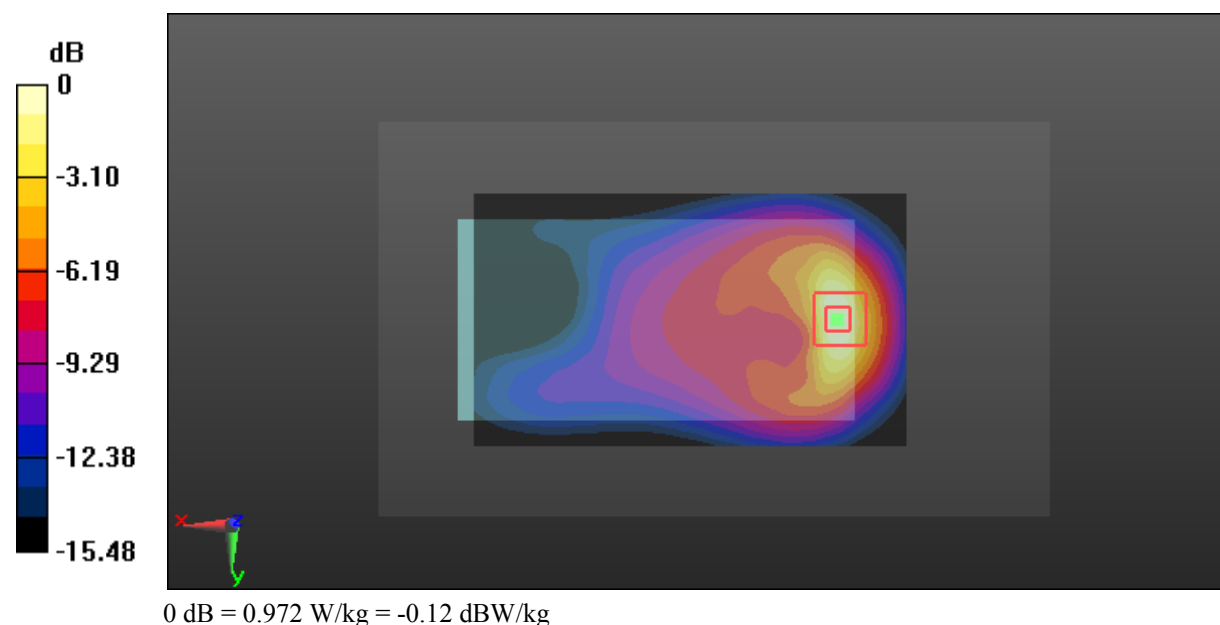

**Test Plot 65#: LTE Band 4\_Body Back\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.5 MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 55.029$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.00 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.67 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.48 W/kg

**SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.492 W/kg**

Maximum value of SAR (measured) = 1.00 W/kg

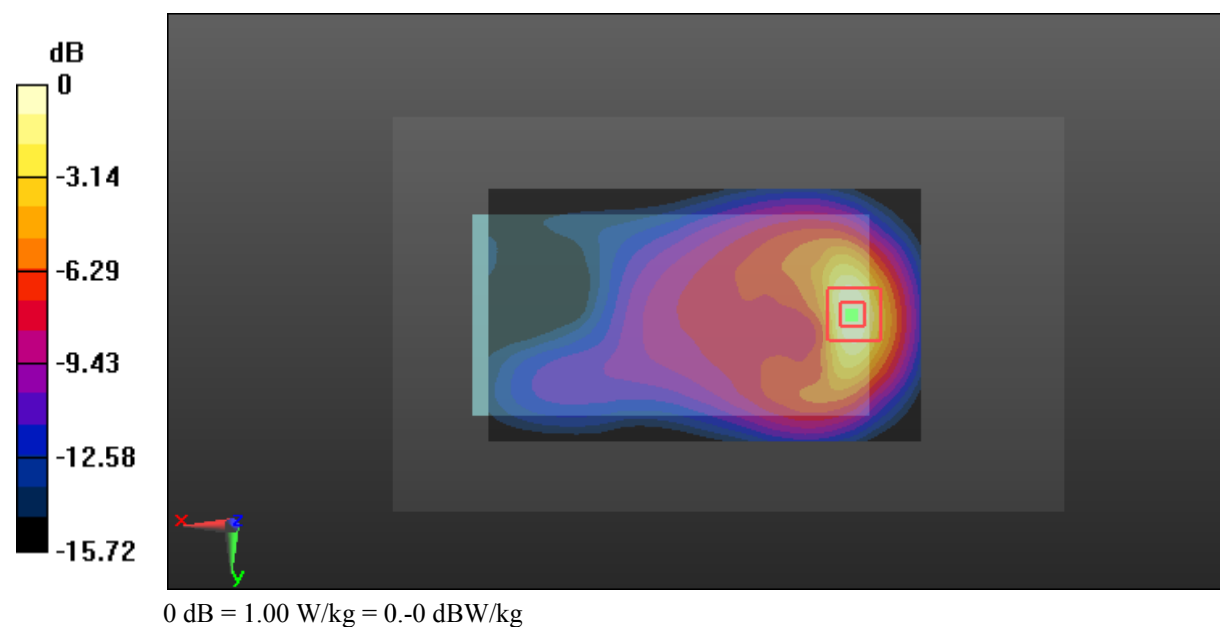

**Test Plot 66#: LTE Band 4\_Body Back\_High Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used: 1745 MHz;  $\sigma = 1.492$  S/m;  $\epsilon_r = 54.95$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.36 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.919 W/kg; SAR(10 g) = 0.505 W/kg**

Maximum value of SAR (measured) = 1.03 W/kg

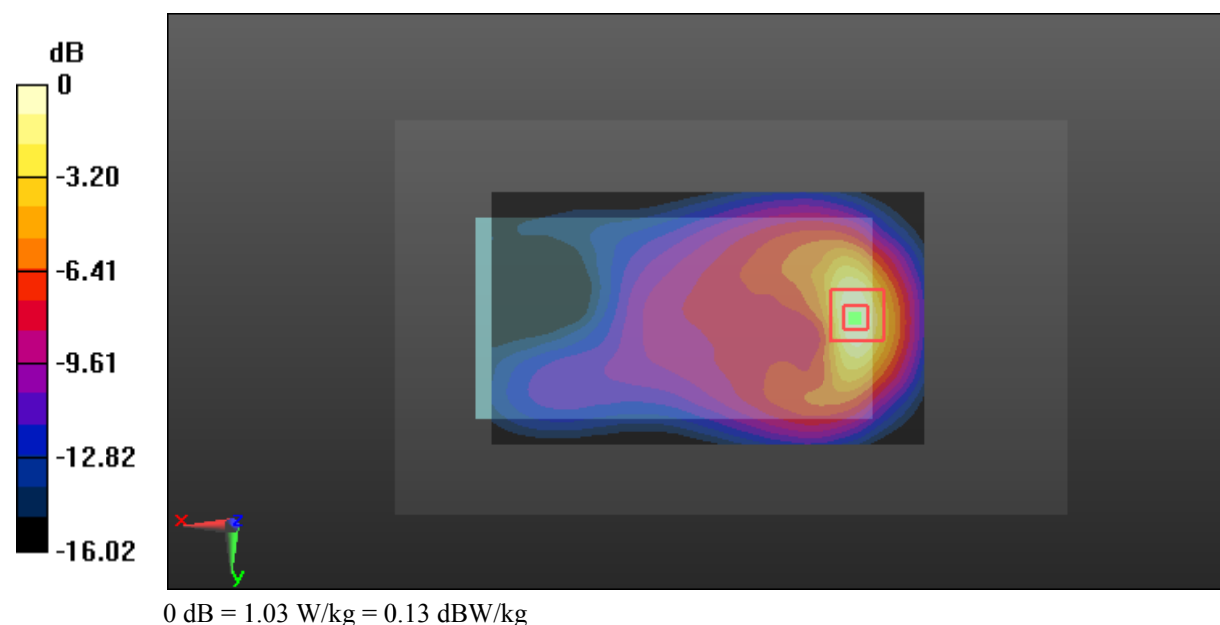

**Test Plot 67#: LTE Band 4\_Body Back\_High Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used: 1745 MHz;  $\sigma = 1.492$  S/m;  $\epsilon_r = 54.95$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.757 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.199 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.381 W/kg**

Maximum value of SAR (measured) = 0.745 W/kg

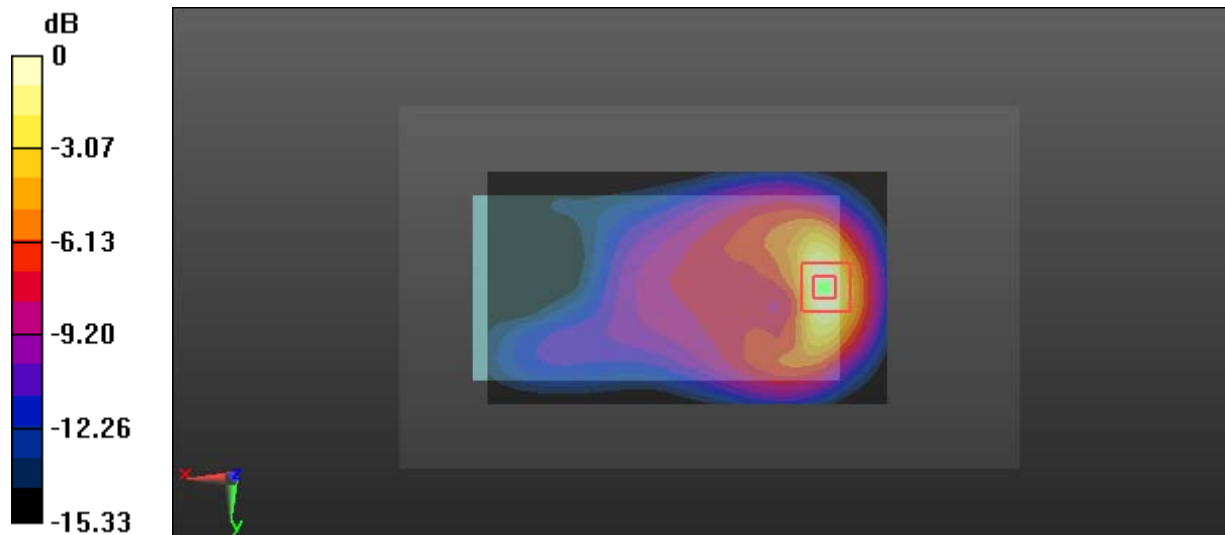

0 dB = 0.745 W/kg = -1.28 dBW/kg

**Test Plot 68#: LTE Band 4\_Body Back\_High Channel\_100%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used: 1745 MHz;  $\sigma = 1.492$  S/m;  $\epsilon_r = 54.95$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.337 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.357 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.489 W/kg

**SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.168 W/kg**

Maximum value of SAR (measured) = 0.336 W/kg

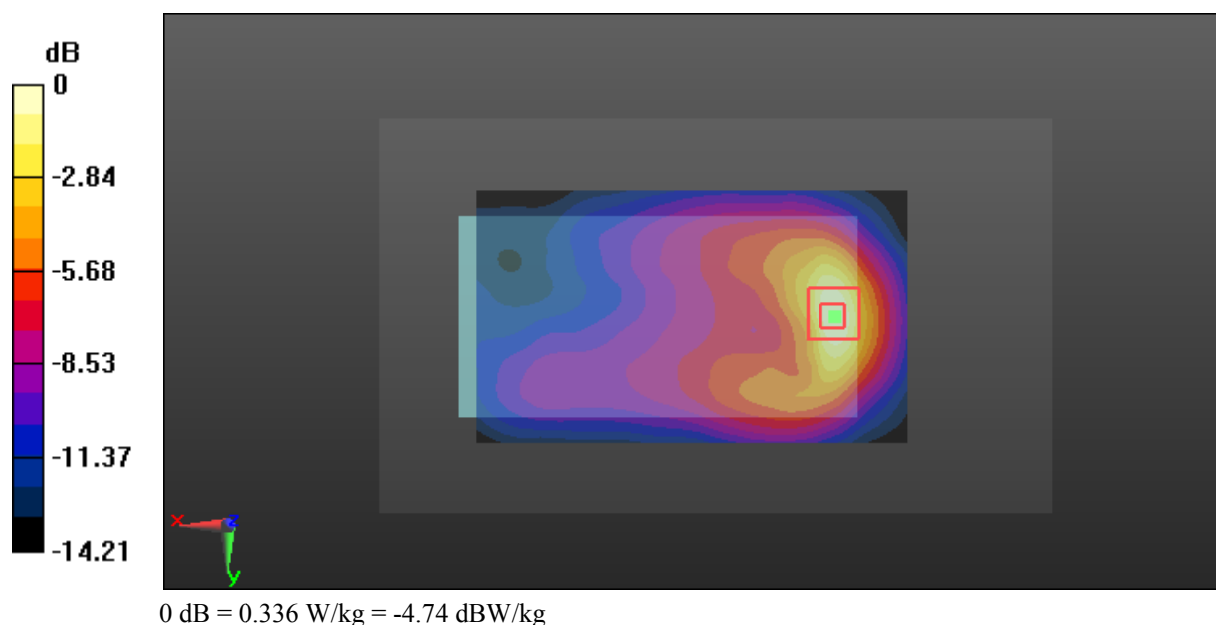

**Test Plot 69#: LTE Band 4\_Body Left\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.5 MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 55.029$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.233 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.67 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.336 W/kg

**SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.117 W/kg**

Maximum value of SAR (measured) = 0.221 W/kg

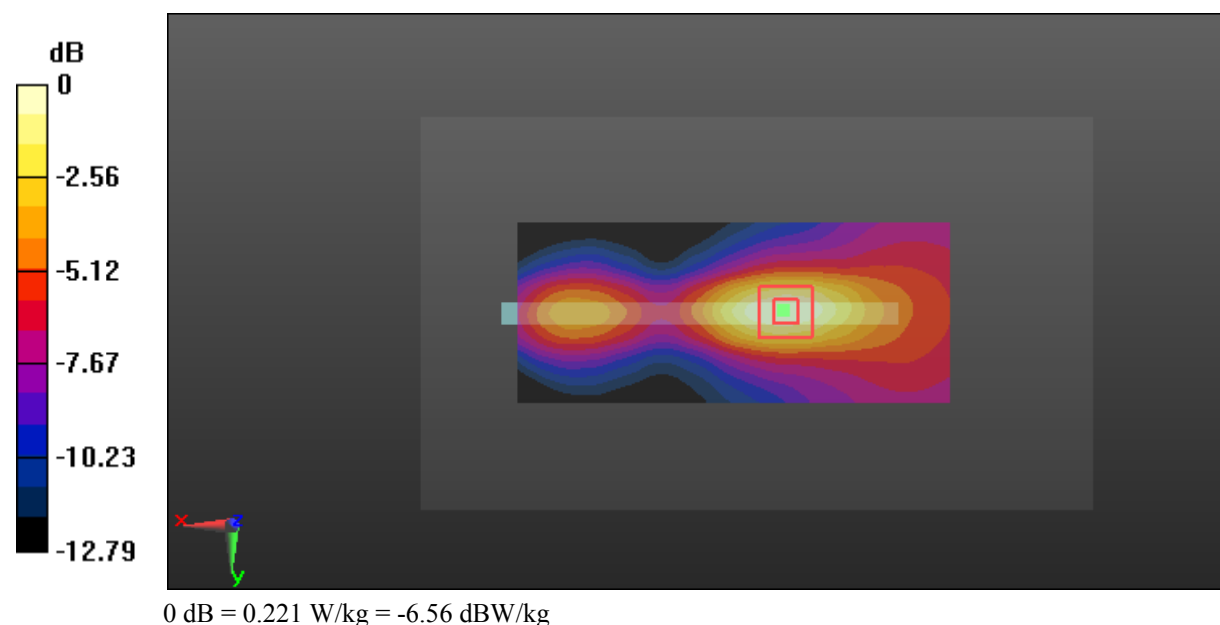

**Test Plot 70#: LTE Band 4\_Body Left\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.5 MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 55.029$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.191 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.22 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.262 W/kg

**SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.094 W/kg**

Maximum value of SAR (measured) = 0.174 W/kg

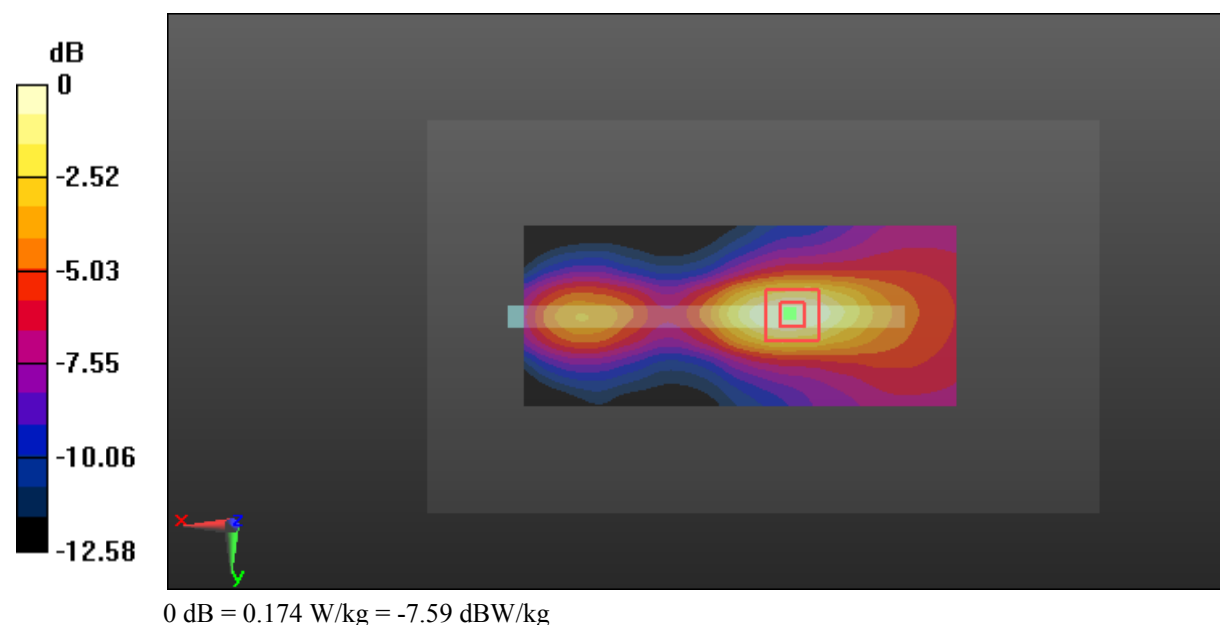

**Test Plot 71#: LTE Band 4\_Body Right\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.5 MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 55.029$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.270 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.90 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.386 W/kg

**SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.137 W/kg**

Maximum value of SAR (measured) = 0.255 W/kg

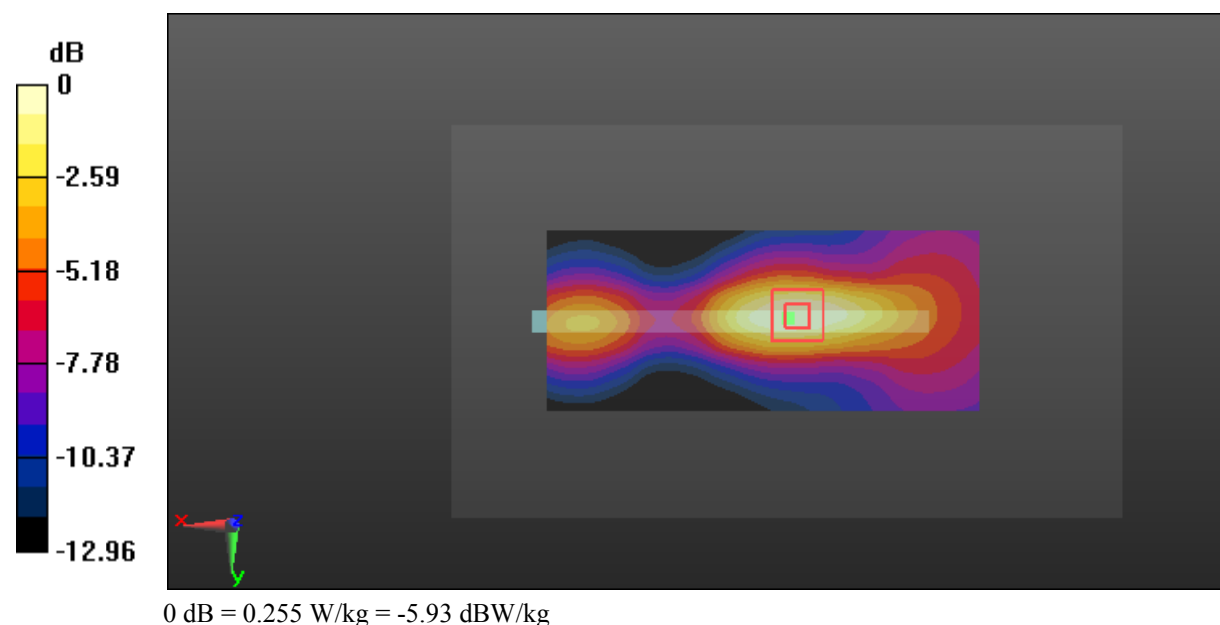

**Test Plot 72#: LTE Band 4\_Body Right\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.5 MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 55.029$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.220 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.61 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.310 W/kg

**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.208 W/kg

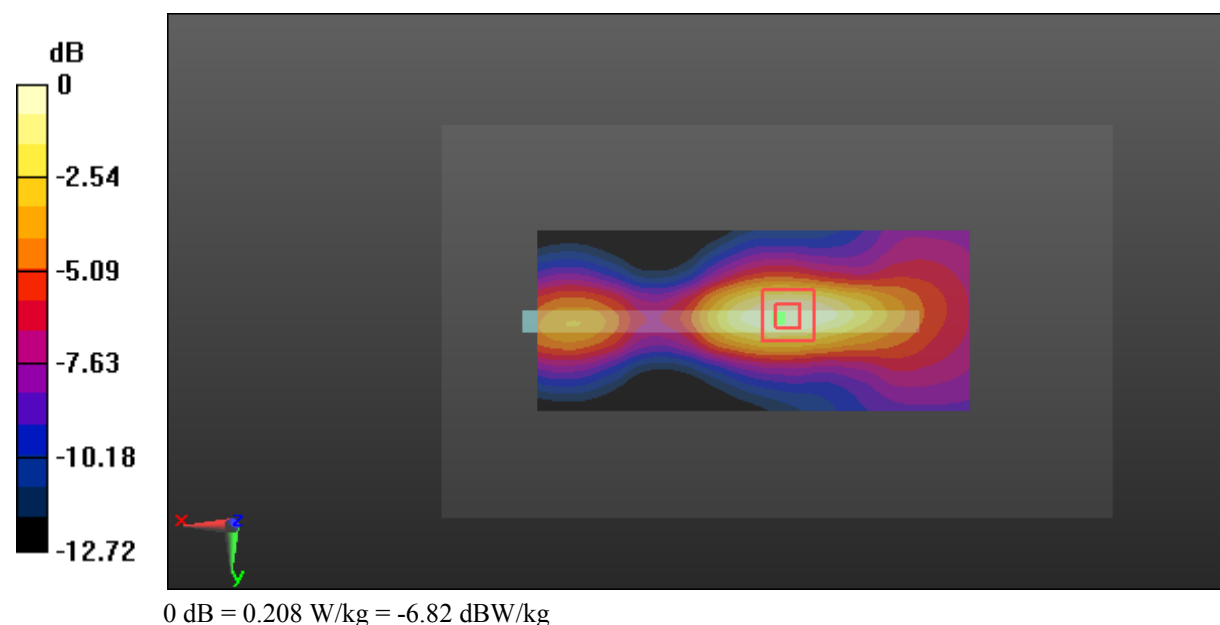

**Test Plot 73#: LTE Band 4\_Body Bottom\_Low Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used: 1720 MHz;  $\sigma = 1.452$  S/m;  $\epsilon_r = 55.053$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.15 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.99 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.588 W/kg**

Maximum value of SAR (measured) = 1.27 W/kg

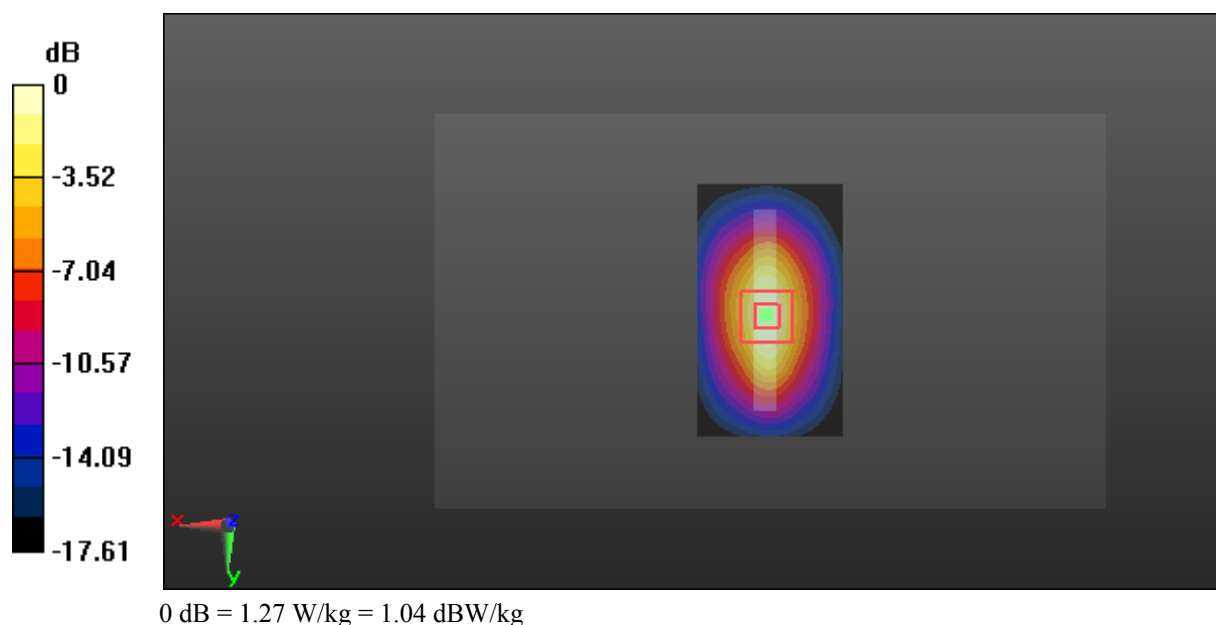

**Test Plot 74#: LTE Band 4\_Body Bottom\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.5 MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 55.029$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.33 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.01 W/kg

**SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.586 W/kg**

Maximum value of SAR (measured) = 1.27 W/kg

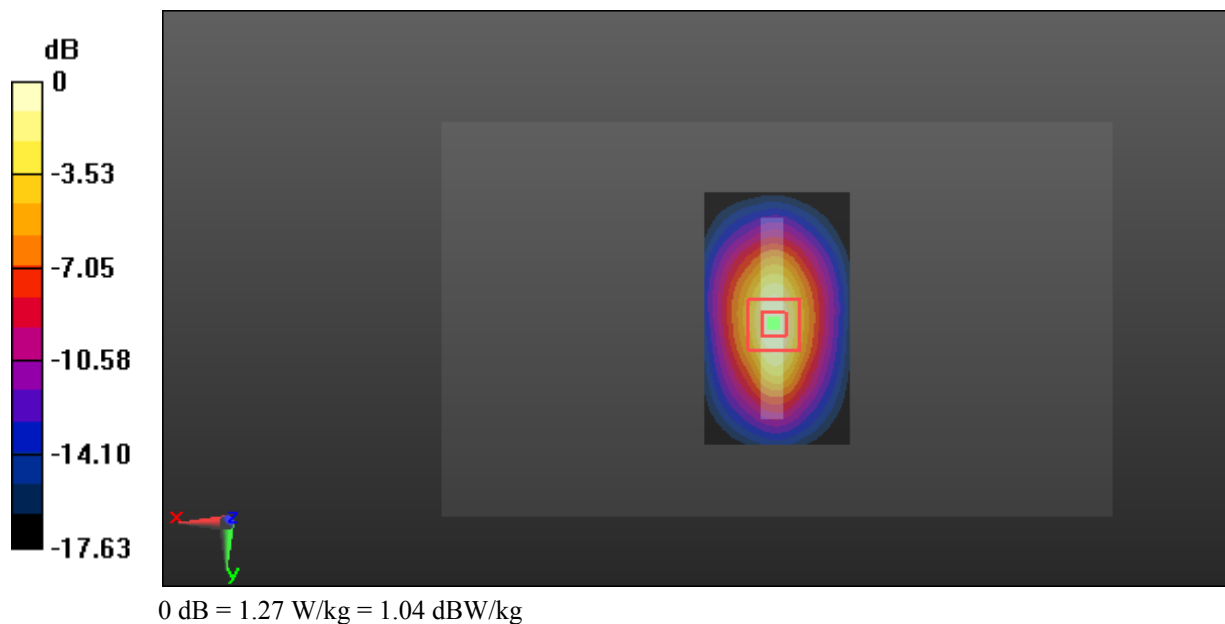

**Test Plot 75#: LTE Band 4\_Body Bottom\_High Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used: 1745 MHz;  $\sigma = 1.492$  S/m;  $\epsilon_r = 54.95$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.39 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.45 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.08 W/kg

**SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.598 W/kg**

Maximum value of SAR (measured) = 1.31 W/kg

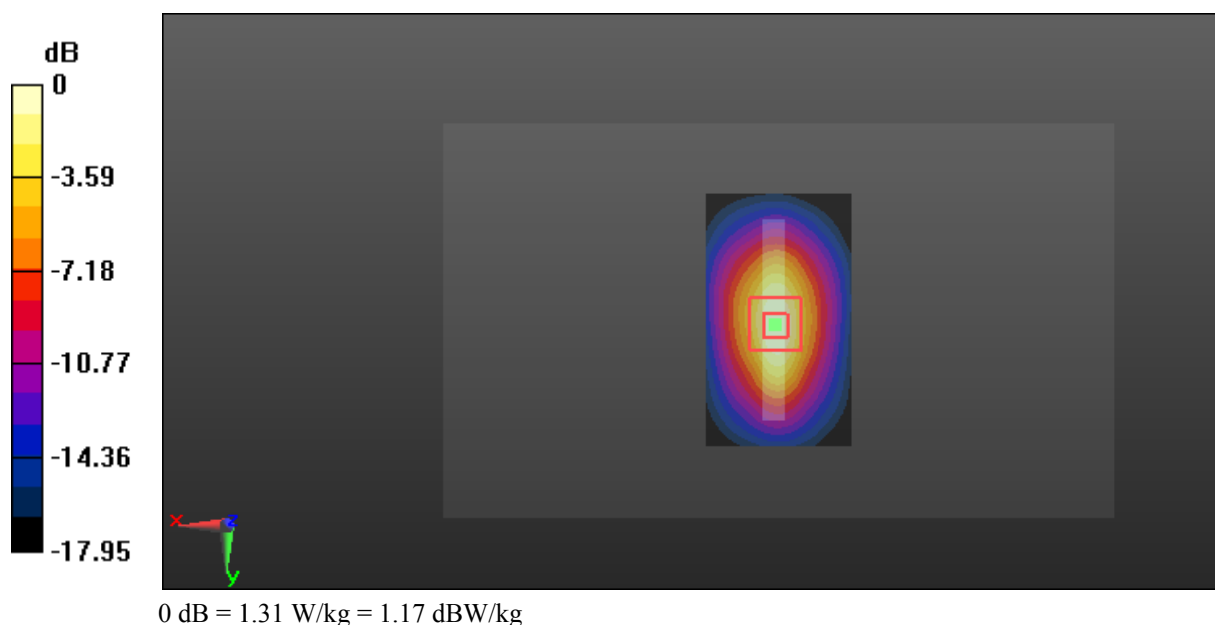

**Test Plot 76#: LTE Band 4\_Body Bottom\_Low Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used: 1720 MHz;  $\sigma = 1.452$  S/m;  $\epsilon_r = 55.053$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.06 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.31 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.465 W/kg**

Maximum value of SAR (measured) = 1.01 W/kg

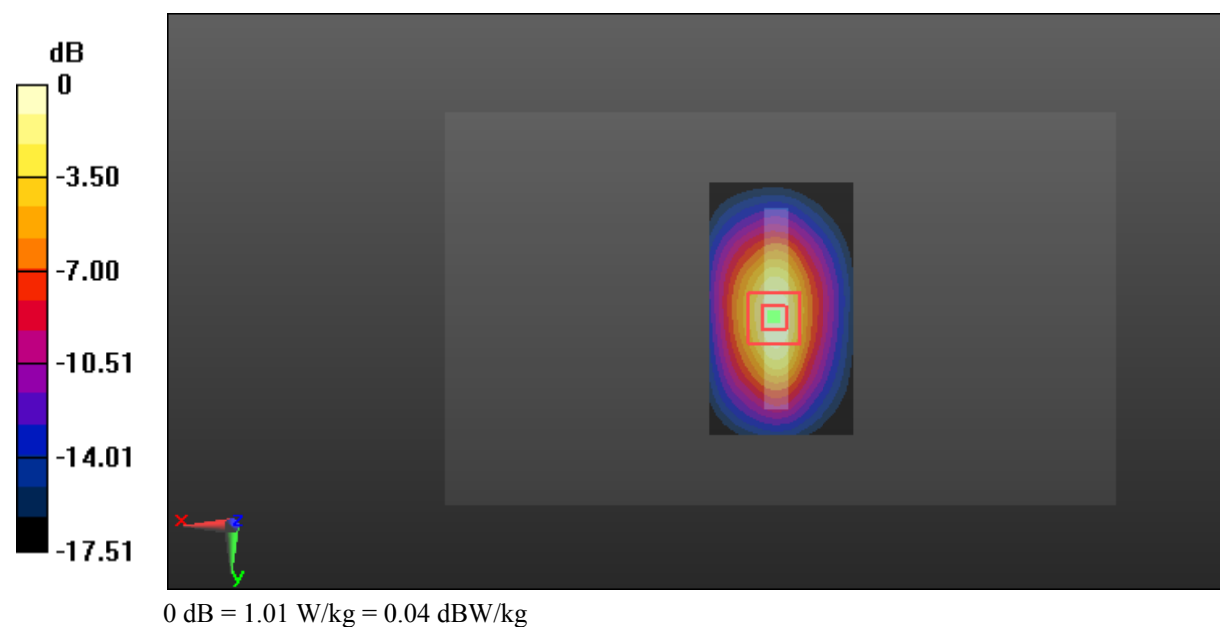

**Test Plot 77#: LTE Band 4\_Body Bottom\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.5 MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 55.029$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.11 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.72 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.66 W/kg

**SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.484 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

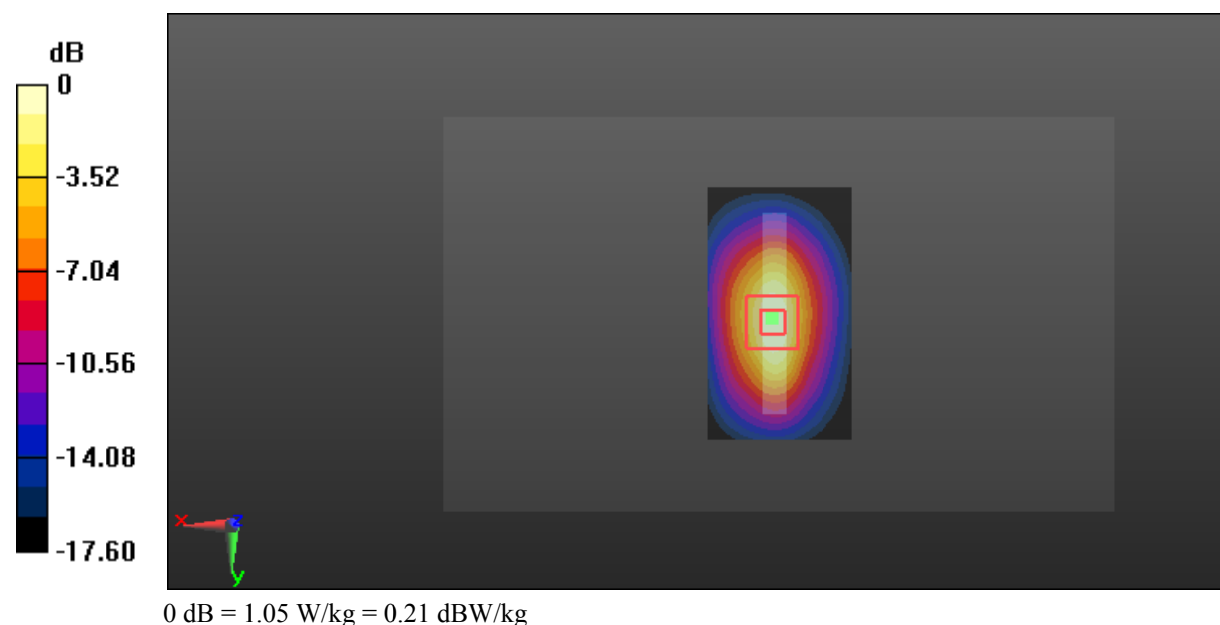

**Test Plot 78#: LTE Band 4\_Body Bottom\_High Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used: 1745 MHz;  $\sigma = 1.492 \text{ S/m}$ ;  $\epsilon_r = 54.95$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.66 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.67 W/kg

**SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.481 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

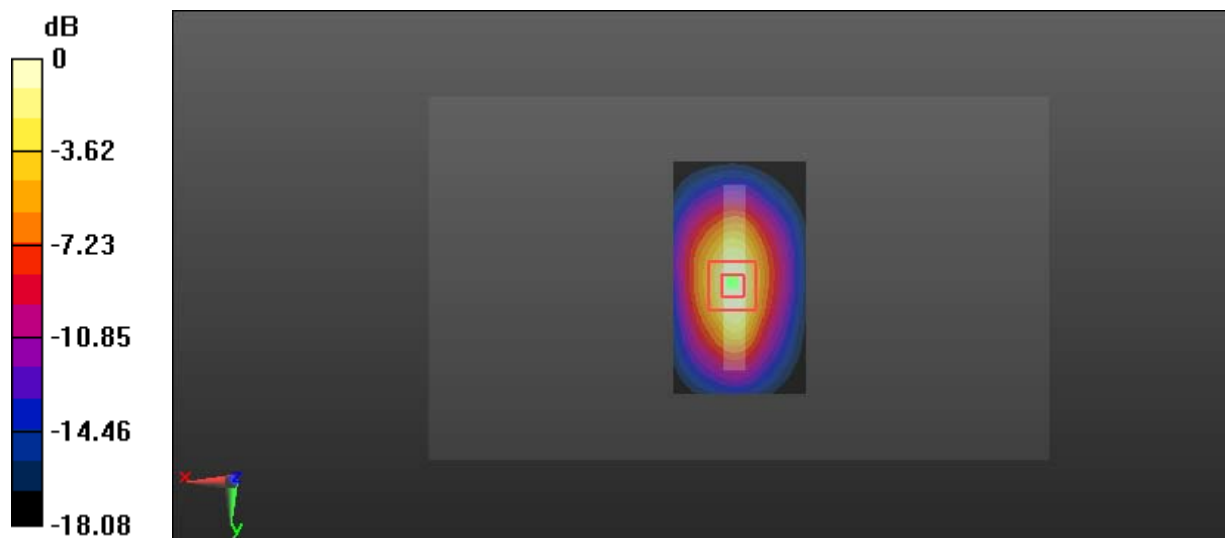

0 dB = 1.05 W/kg = 0.21 dBW/kg

**Test Plot 79#: LTE Band 4\_Body Bottom\_High Channel\_100%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used: 1745 MHz;  $\sigma = 1.492 \text{ S/m}$ ;  $\epsilon_r = 54.95$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.81 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.69 W/kg

**SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.483 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

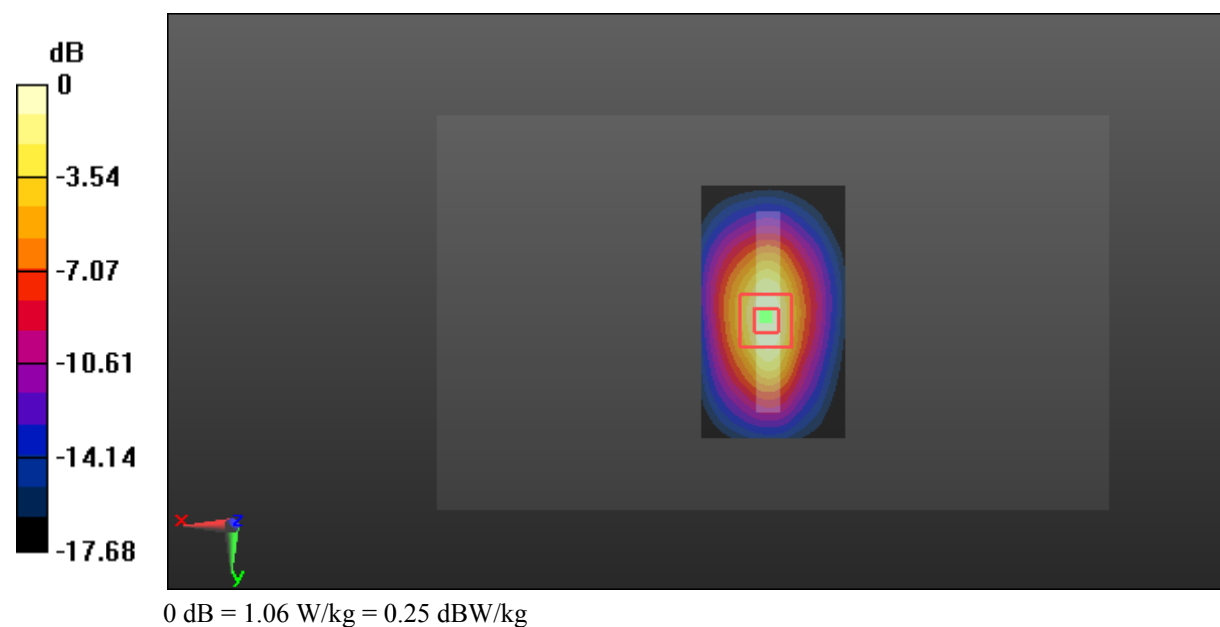

**Test Plot 80#: LTE Band 7\_Head Flat\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 1.873$  S/m;  $\epsilon_r = 39.624$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.169 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.702 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.288 W/kg

**SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.076 W/kg**

Maximum value of SAR (measured) = 0.182 W/kg

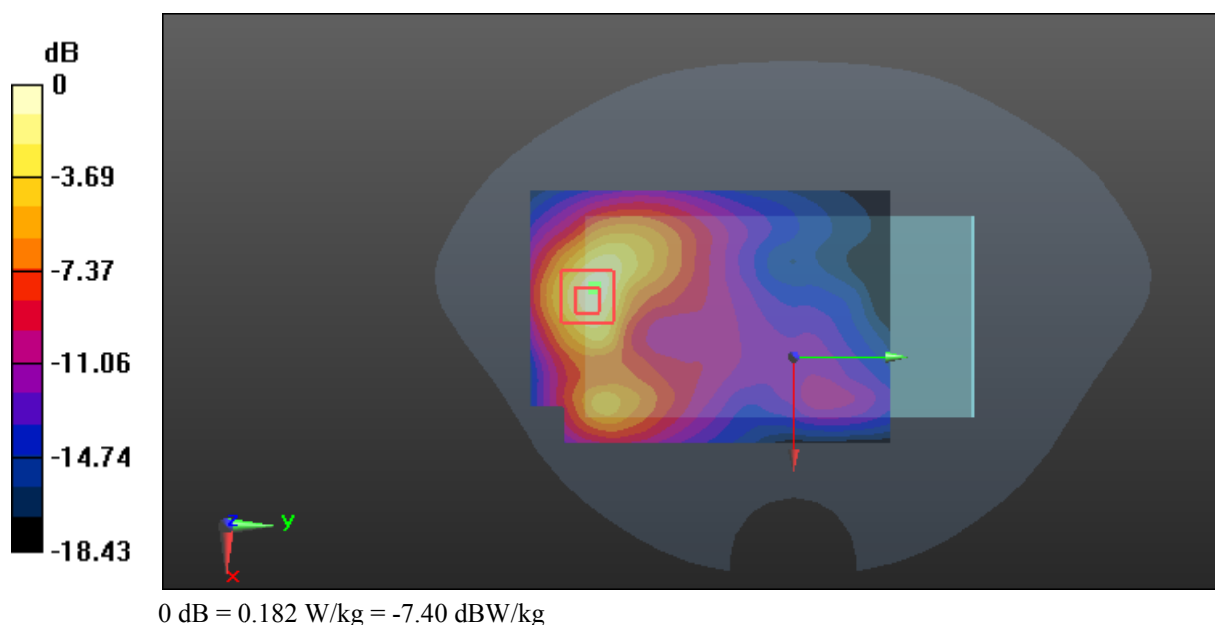

**Test Plot 81#: LTE Band 7\_Head Flat\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 1.873$  S/m;  $\epsilon_r = 39.624$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.138 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.377 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.205 W/kg

**SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.067 W/kg**

Maximum value of SAR (measured) = 0.145 W/kg

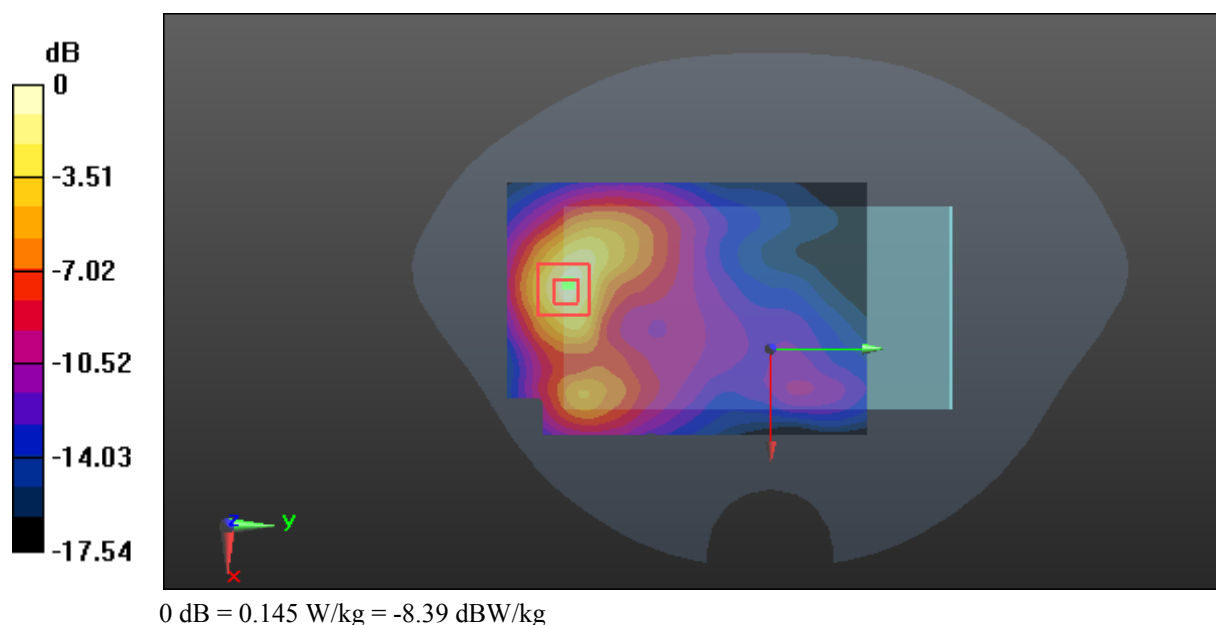

**Test Plot 82#: LTE Band 7\_Body Back\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 2.05$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.414 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.94 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.638 W/kg

**SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.196 W/kg**

Maximum value of SAR (measured) = 0.391 W/kg

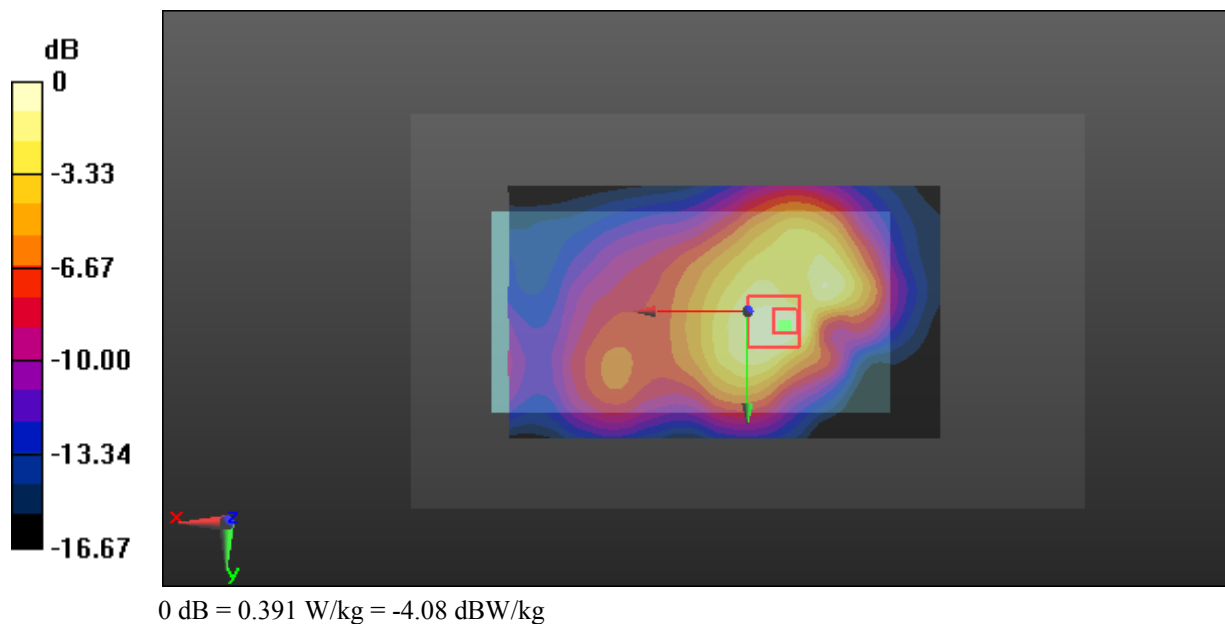

**Test Plot 83#: LTE Band 7\_Body Back\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 2.05$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.339 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.77 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.518 W/kg

**SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.161 W/kg**

Maximum value of SAR (measured) = 0.322 W/kg

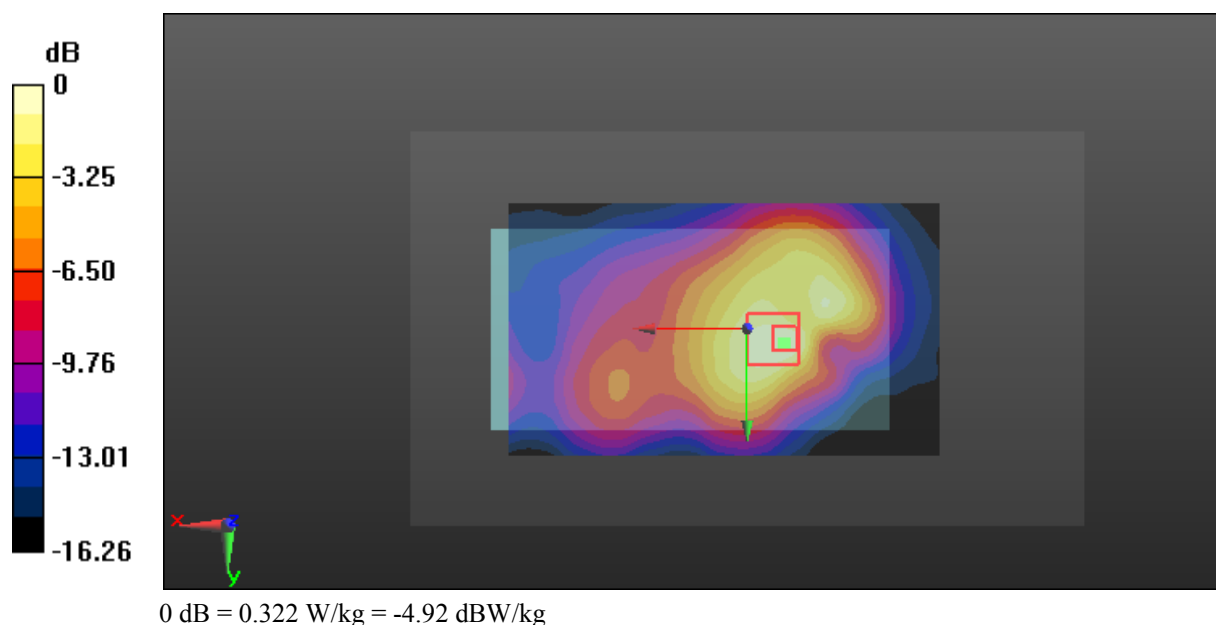

**Test Plot 84#: LTE Band 7\_Body Left\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 2.05$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0813 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.377 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.144 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.0872 W/kg

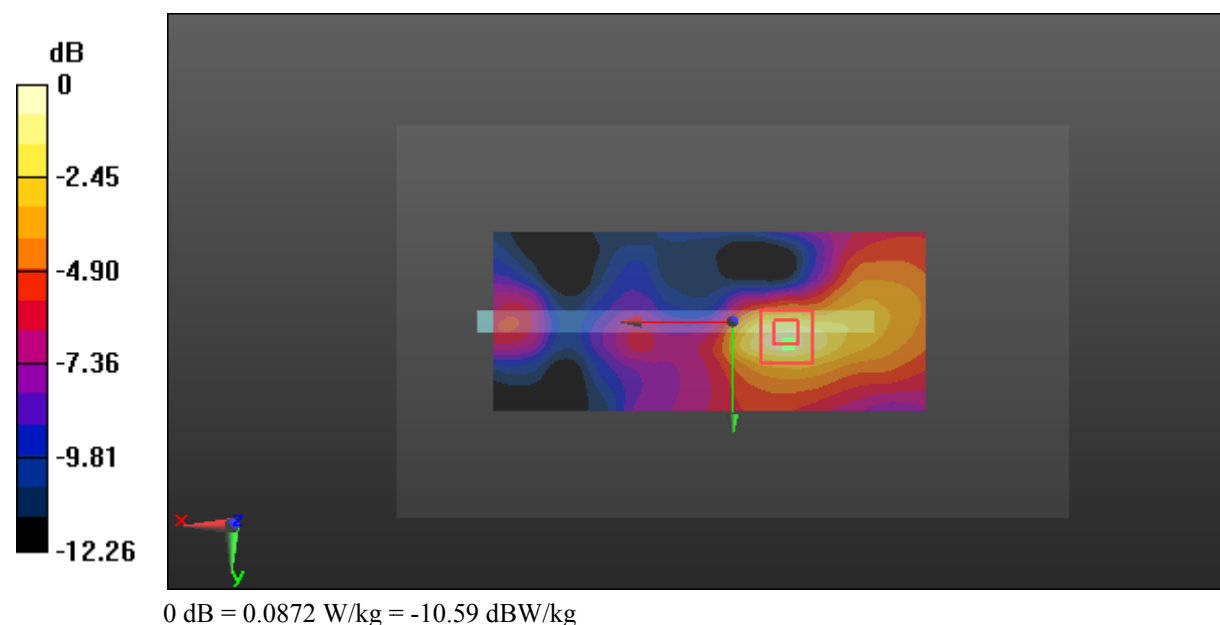

**Test Plot 85#: LTE Band 7\_Body Left\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 2.05$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0608 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.164 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.117 W/kg

**SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0636 W/kg

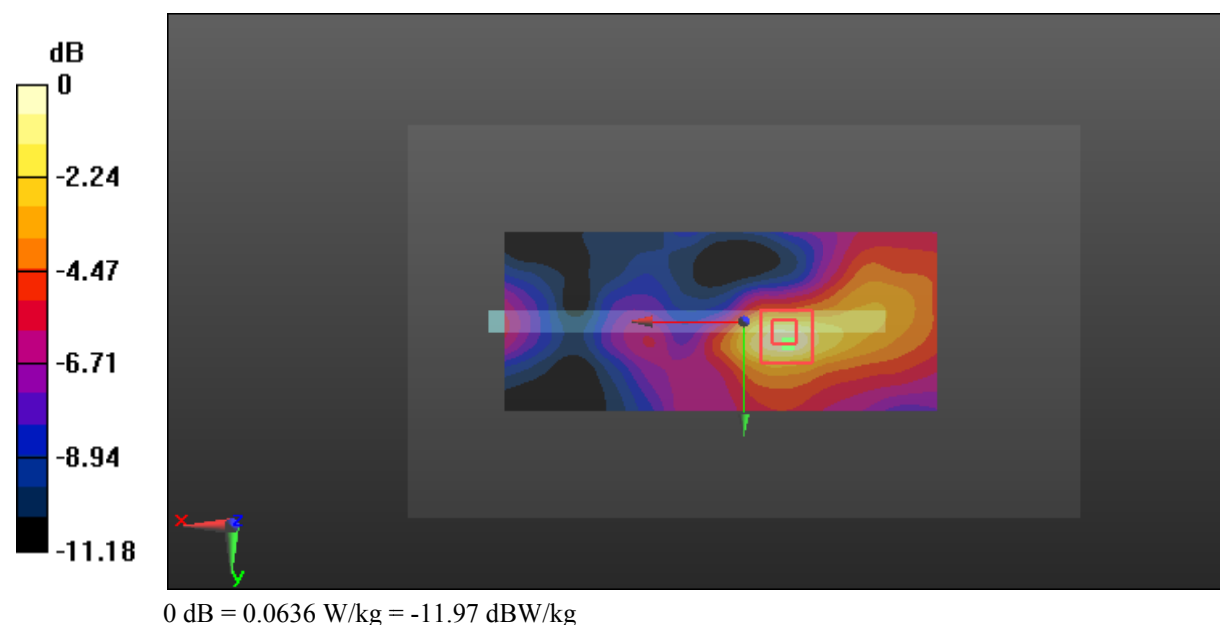

**Test Plot 86#: LTE Band 7\_Body Right\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 2.05$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0270 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.604 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0480 W/kg

**SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0280 W/kg

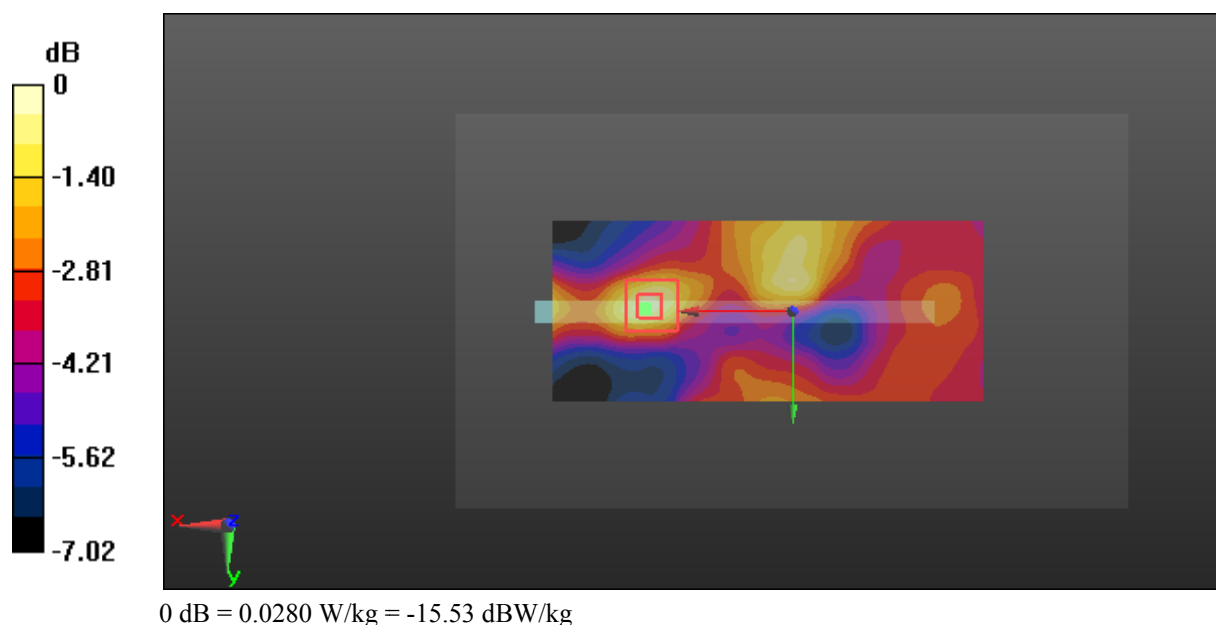

**Test Plot 87#: LTE Band 7\_Body Right\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 2.05$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0247 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.378 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0460 W/kg

**SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0241 W/kg

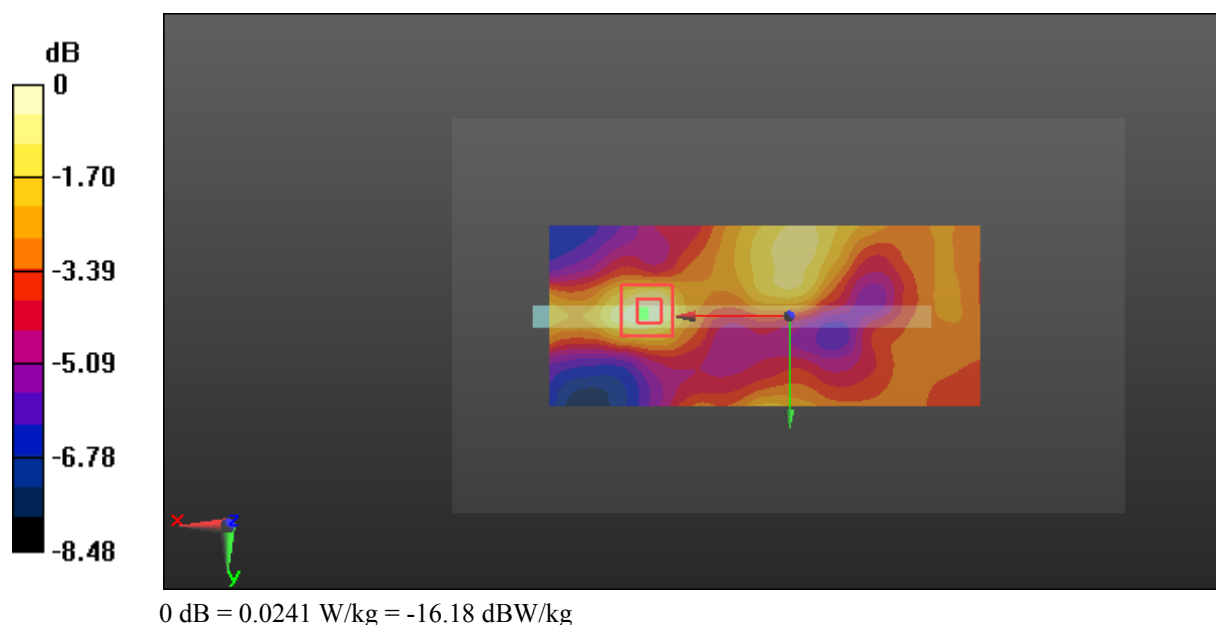

**Test Plot 88#: LTE Band 7\_Body Bottom\_Low Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2510 MHz; Duty Cycle: 1:1  
Medium parameters used: 2510 MHz;  $\sigma = 1.993 \text{ S/m}$ ;  $\epsilon_r = 53.409$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.15 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.94 W/kg

**SAR(1 g) = 0.939 W/kg; SAR(10 g) = 0.389 W/kg**

Maximum value of SAR (measured) = 1.13 W/kg

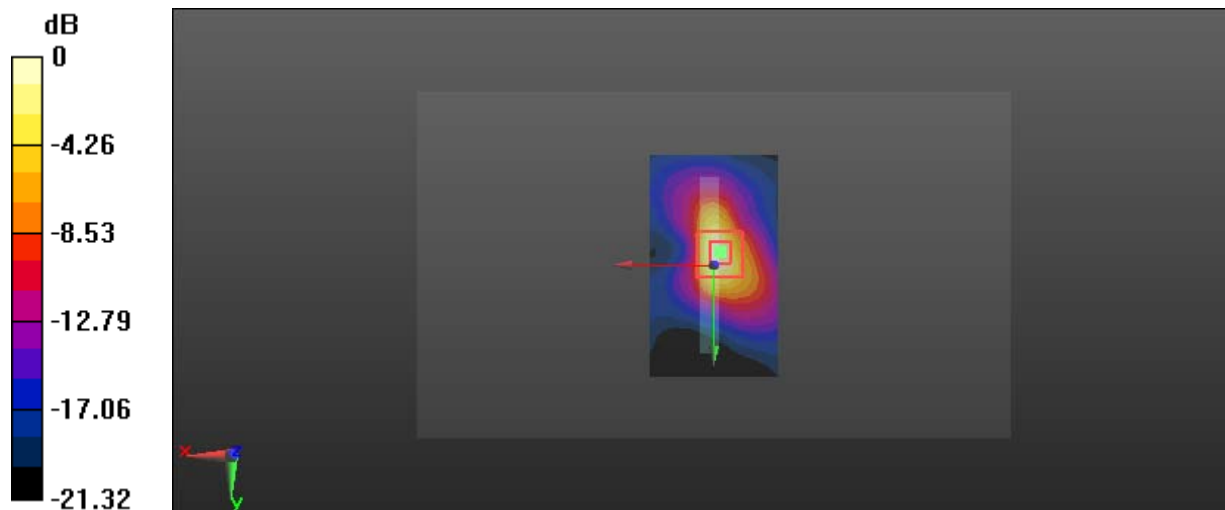

0 dB = 1.13 W/kg = 0.53 dBW/kg

**Test Plot 89#: LTE Band 7\_Body Bottom\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 2.05$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.81 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 0.816 W/kg; SAR(10 g) = 0.332 W/kg**

Maximum value of SAR (measured) = 0.982 W/kg

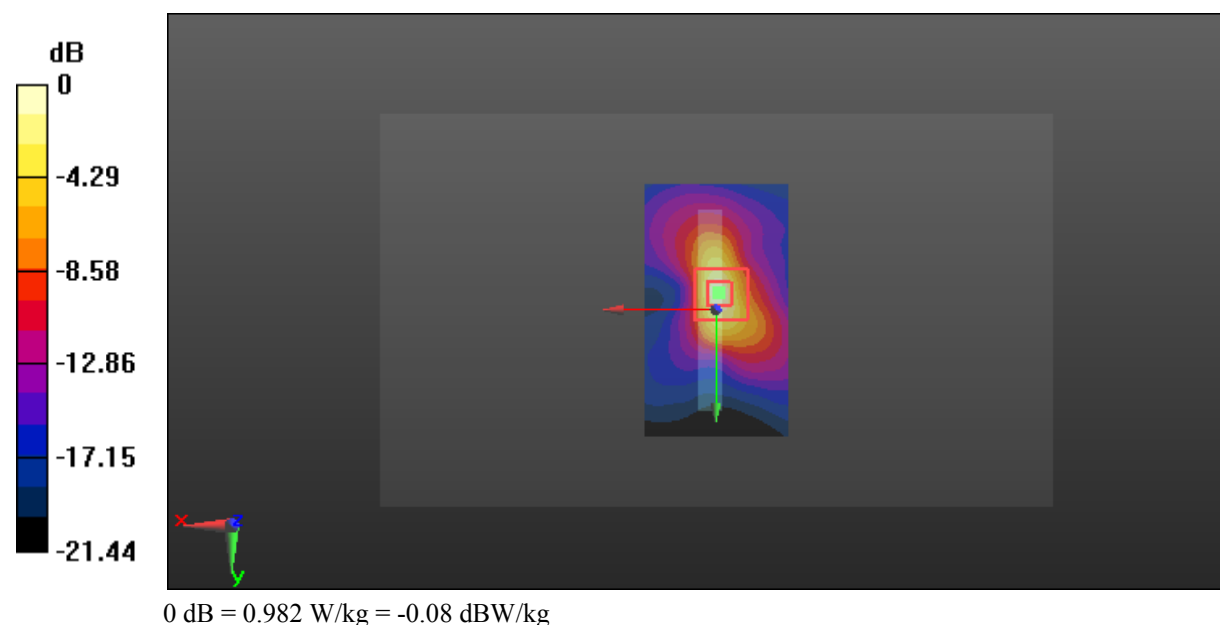

**Test Plot 90#: LTE Band 7\_Body Bottom\_High Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2560 MHz; Duty Cycle: 1:1  
Medium parameters used: 2560 MHz;  $\sigma = 2.076 \text{ S/m}$ ;  $\epsilon_r = 53.045$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.505 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.89 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.833 W/kg

**SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.198 W/kg**

Maximum value of SAR (measured) = 0.489 W/kg

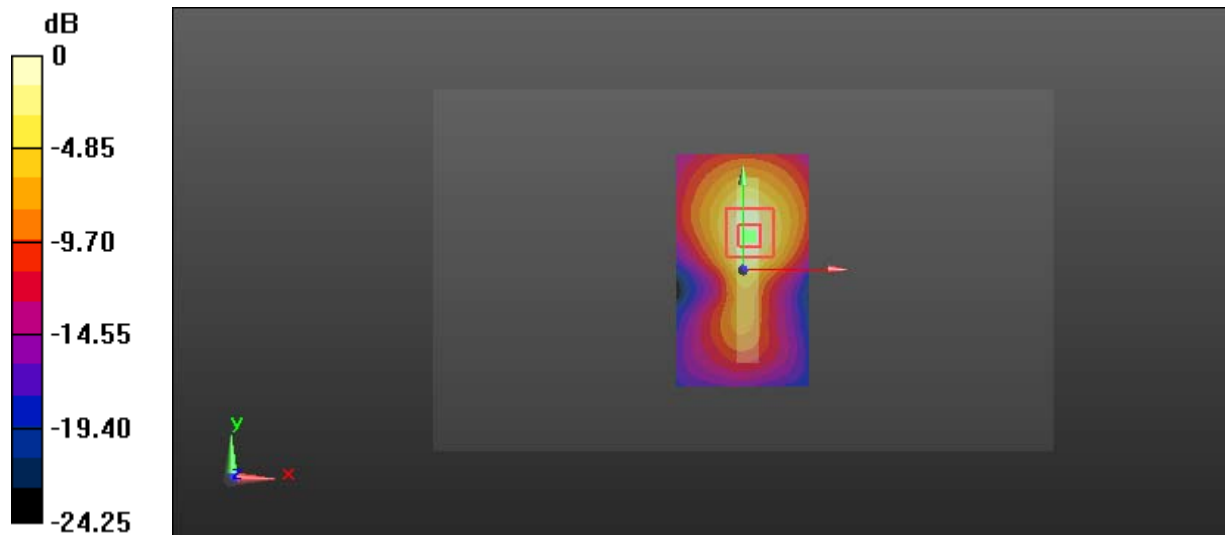

0 dB = 0.489 W/kg = -3.11 dBW/kg

**Test Plot 91#: LTE Band 7\_Body Bottom\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 2.05$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.870 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.52 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.49 W/kg

**SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.291 W/kg**

Maximum value of SAR (measured) = 0.853 W/kg

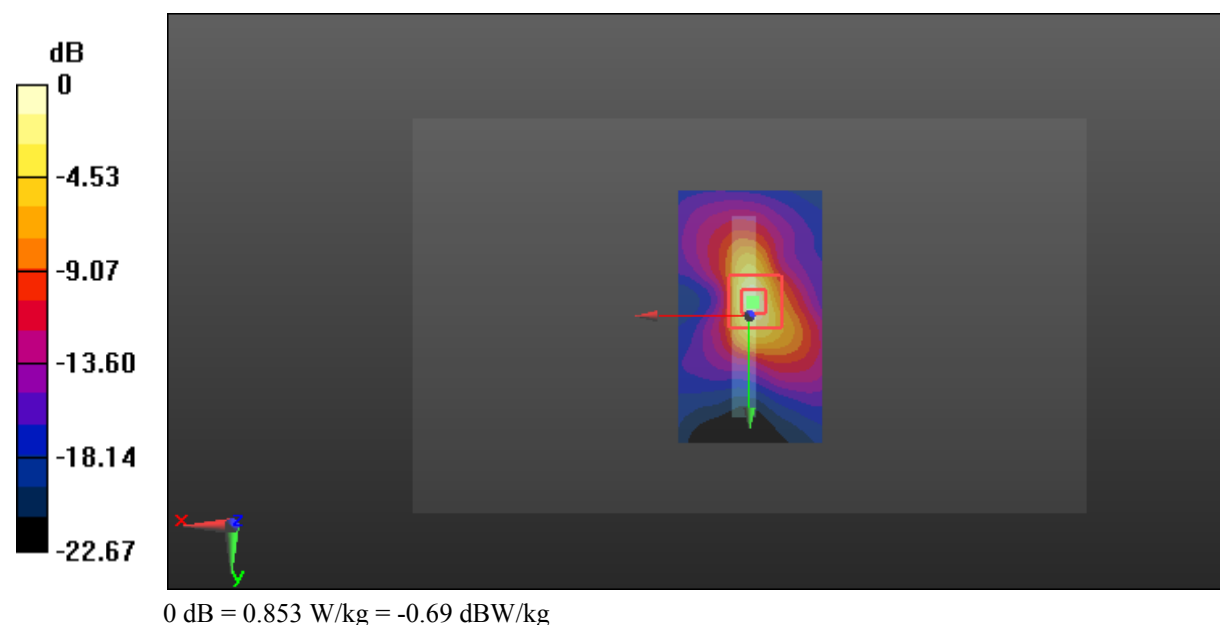

**Test Plot 92#: LTE Band 7\_Body Bottom\_Middle Channel\_100%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 2.05$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.690 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.70 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.629 W/kg; SAR(10 g) = 0.254 W/kg**

Maximum value of SAR (measured) = 0.748 W/kg

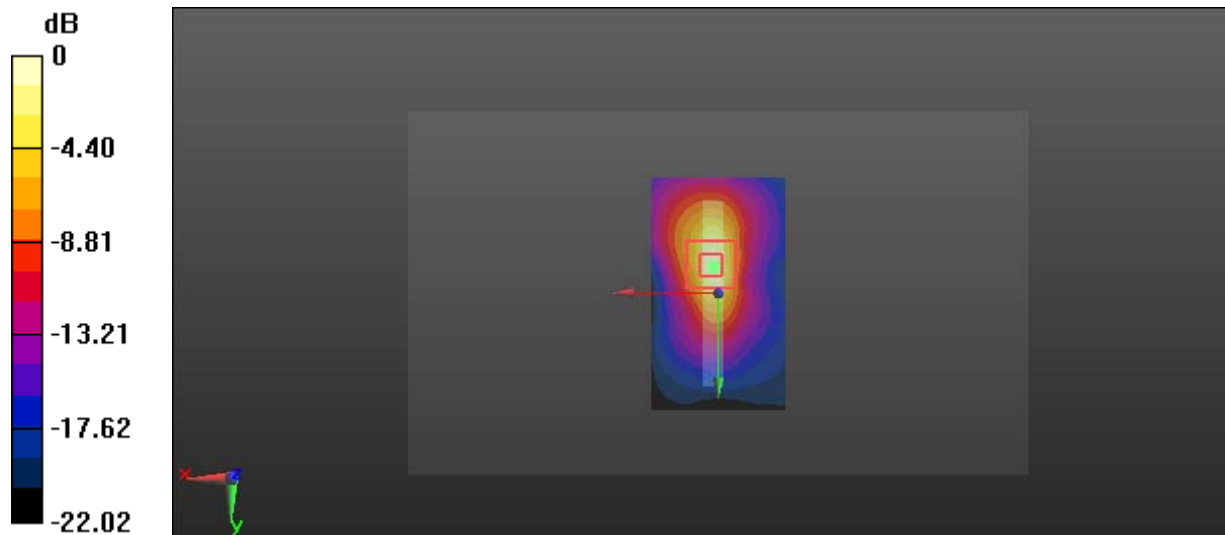

0 dB = 0.748 W/kg = -1.26 dBW/kg

**Test Plot 93#: LTE Band 17\_Head Flat\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 43.041$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.140 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.142 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.220 W/kg

**SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.073 W/kg**

Maximum value of SAR (measured) = 0.132 W/kg

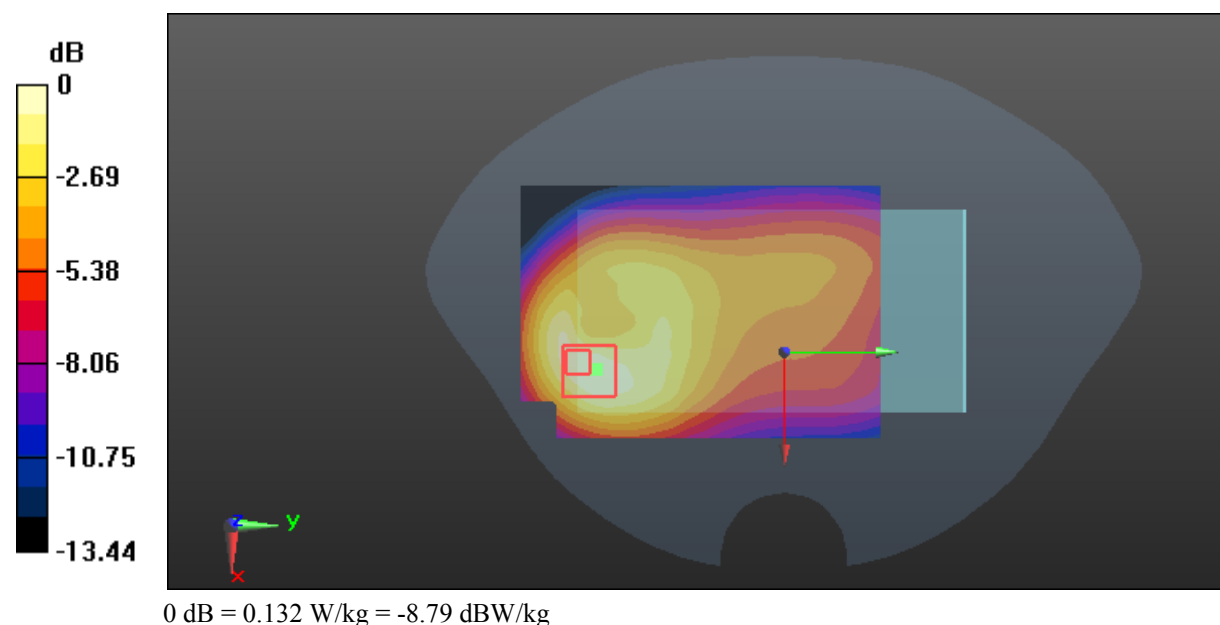

**Test Plot 94#: LTE Band 17\_Head Flat\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 43.041$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.092 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.405 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.151 W/kg

**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.094 W/kg

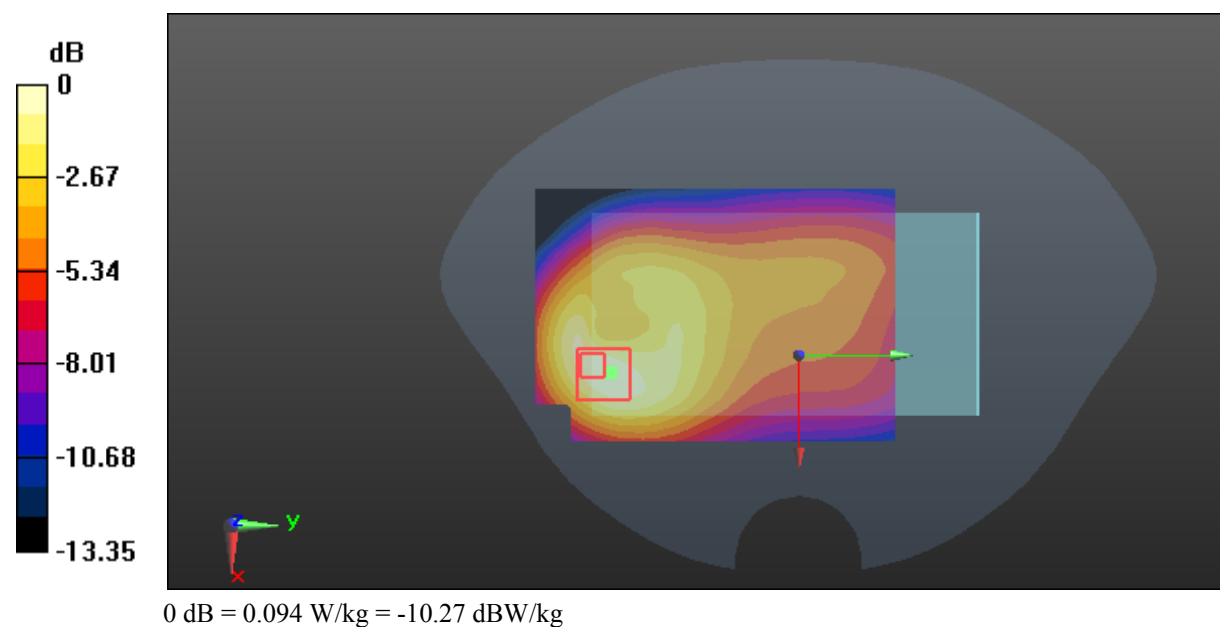

**Test Plot 95#: LTE Band 17\_Body Back\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 55.579$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.321 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.77 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.517 W/kg

**SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.183 W/kg**

Maximum value of SAR (measured) = 0.328 W/kg

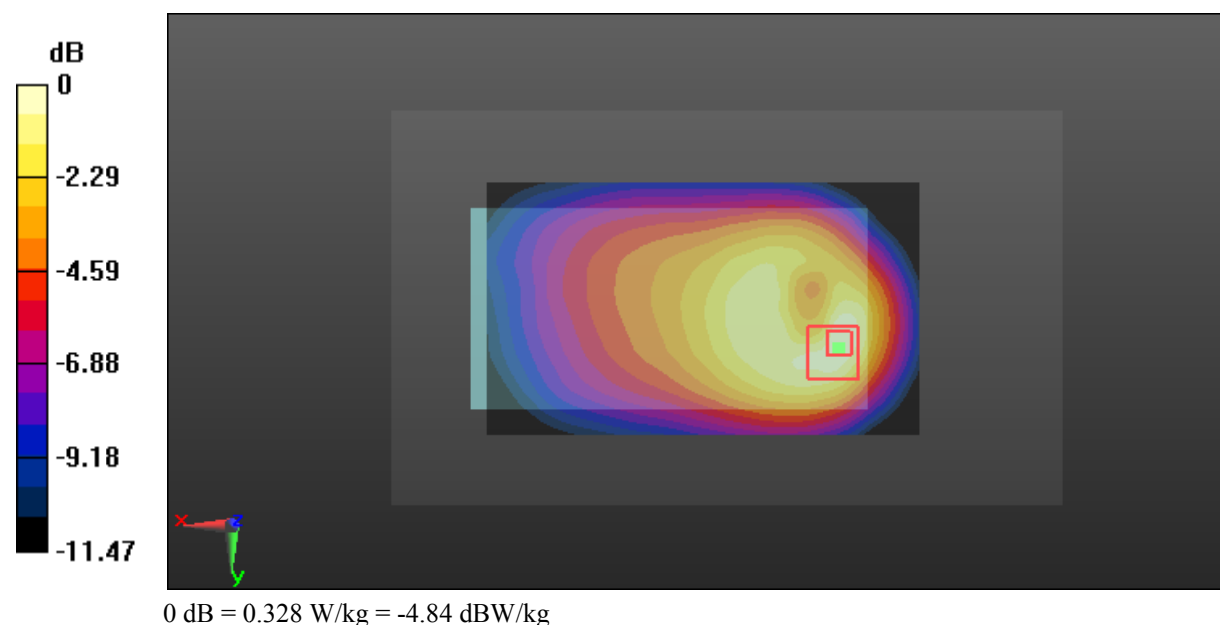

**Test Plot 96#: LTE Band 17\_Body Back\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 55.579$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.248 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.84 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.399 W/kg

**SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.142 W/kg**

Maximum value of SAR (measured) = 0.254 W/kg

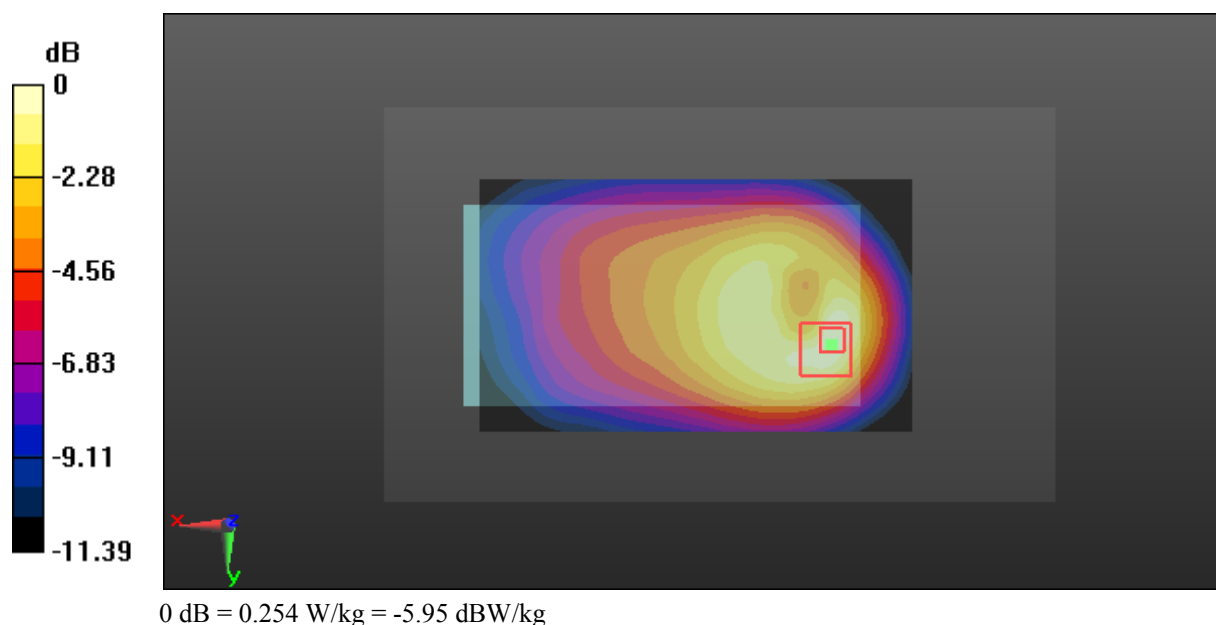

**Test Plot 97#: LTE Band 17\_Body Left\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 55.579$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.131 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.20 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.174 W/kg

**SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.132 W/kg

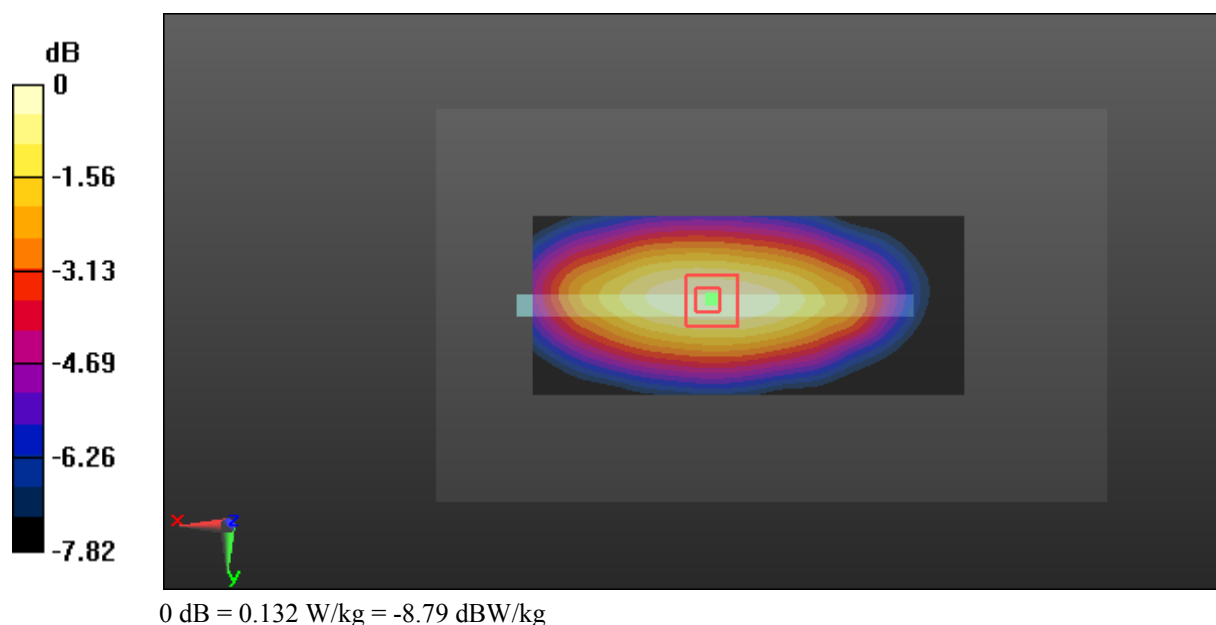

**Test Plot 98#: LTE Band 17\_Body Left\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 55.579$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.102 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.993 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.137 W/kg

**SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.105 W/kg

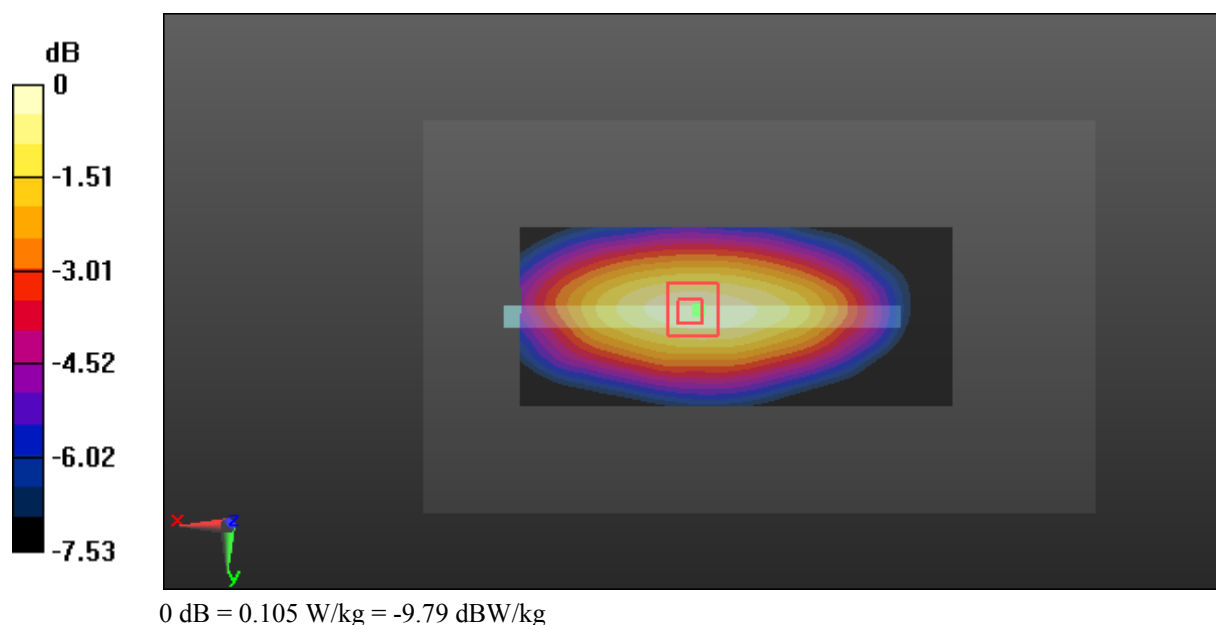

**Test Plot 99#: LTE Band 17\_Body Right\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 55.579$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0768 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.511 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.100 W/kg

**SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.0766 W/kg

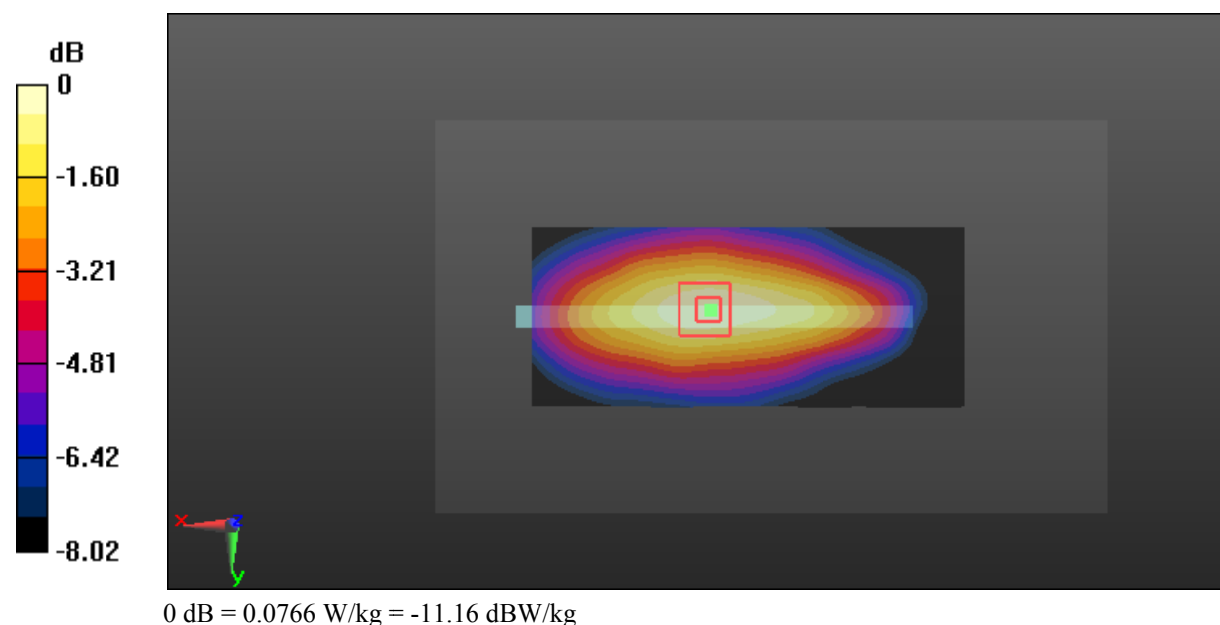

**Test Plot 100#: LTE Band 17\_Body Right\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 55.579$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0635 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.486 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0860 W/kg

**SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.043 W/kg**

Maximum value of SAR (measured) = 0.0656 W/kg

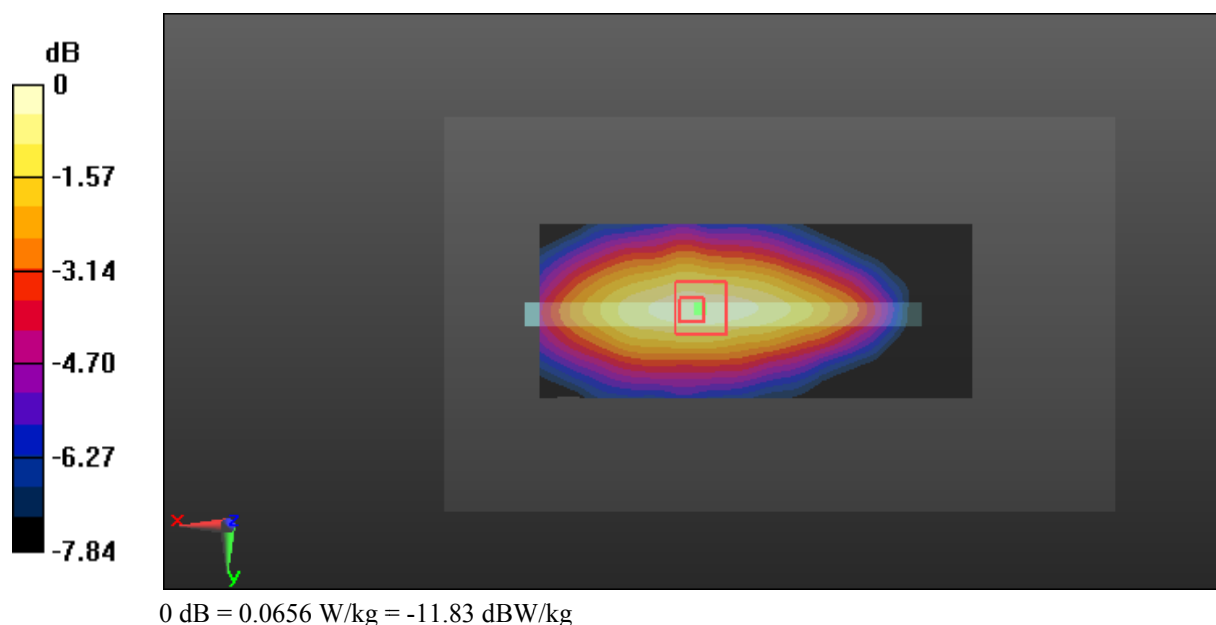

**Test Plot 101#: LTE Band 17\_Body Bottom\_Middle Channel\_1RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 55.579$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.131 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.07 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.197 W/kg

**SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.126 W/kg

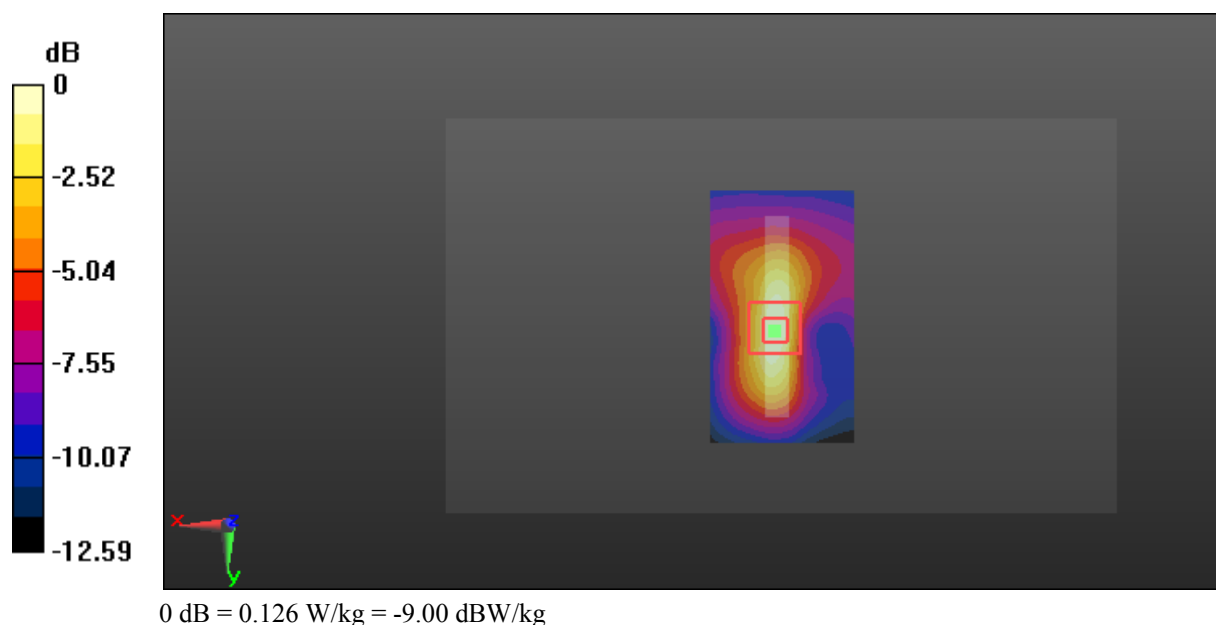

**Test Plot 102#: LTE Band 17\_Body Bottom\_Middle Channel\_50%RB****DUT: Mobile Phone; Type: Elite 6.0L+; Serial: 16112800221**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 55.579$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0986 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.731 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.150 W/kg

**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.0966 W/kg

