

# FCC REPORT

## (WIFI)

**Applicant:** Sky Phone LLC

**Address of Applicant:** 1348 Washington Av. Suite 350, Miami Beach, Florida, United States

### Equipment Under Test (EUT)

**Product Name:** 4G SMART PHONE

**Model No.:** Elite H55

**Trade mark:** SKY DEVICES

**FCC ID:** 2ABOSSKYELITEH55

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of sample receipt:** 14 Jul., 2020

**Date of Test:** 15 Jul., to 19 Aug., 2020

**Date of report issued:** 17 Sep., 2020

**Test Result:** PASS\*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

**2 Version**

Version No.	Date	Description
00	17 Sep., 2020	Original

**Tested by:**Mike.Ou**Date:**

17 Sep., 2020

**Test Engineer****Reviewed by:**Winner Zhang**Date:**

17 Sep., 2020

**Project Engineer**

### 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 TEST ENVIRONMENT AND MODE, AND TEST SAMPLES PLANS.....	5
4.4 DESCRIPTION OF SUPPORT UNITS.....	5
4.5 MEASUREMENT UNCERTAINTY.....	5
4.6 LABORATORY FACILITY.....	5
4.7 LABORATORY LOCATION.....	5
4.8 TEST INSTRUMENTS LIST.....	6
5 TEST RESULTS AND MEASUREMENT DATA.....	7
5.1 TEST CONFIGURATION OF EUT .....	7
5.2 TEST SETUP BLOCK .....	7
5.3 TEST RESULT SUMMARY.....	7
5.4 ANTENNA REQUIREMENT.....	8
5.5 CONDUCTED EMISSION .....	9
5.6 CONDUCTED OUTPUT POWER .....	12
5.7 OCCUPY BANDWIDTH .....	13
5.8 POWER SPECTRAL DENSITY .....	14
5.9 BAND EDGE .....	15
5.9.1 Conducted Emission Method.....	15
5.9.2 Radiated Emission Method.....	16
5.10 SPURIOUS EMISSION.....	33
5.10.1 Conducted Emission Method.....	33
5.10.2 Radiated Emission Method .....	34
6 TEST SETUP PHOTO .....	42
7 EUT CONSTRUCTIONAL DETAILS .....	43
APPENDIX A – WI-FI.....	44

## 4 General Information

### 4.1 Client Information

Applicant:	Sky Phone LLC
Address:	1348 Washington Av. Suite 350, Miami Beach, Florida, United States
Manufacturer:	Sky Phone LLC
Address:	1348 Washington Av. Suite 350, Miami Beach, Florida, United States

### 4.2 General Description of E.U.T.

Product Name:	4G SMART PHONE
Model No.:	Elite H55
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz (802.11n(HT40))
Channel numbers:	11 for 802.11b/802.11g/802.11(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	Internal Antenna
Antenna gain:	0.5dBi
Power supply:	Rechargeable Li-ion Battery DC3.8V-2000mAh
AC adapter:	Input: AC100-240V, 50/60Hz, 0.2A Output: DC 5.0V, 1000mA
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

### 4.3 Test environment and mode, and test samples plans

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
<b>Test mode:</b>	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
Radiated Emission: The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
<b>Per-scan all kind of data rate, the follow list were the worst case.</b>	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13.5Mbps

### 4.4 Description of Support Units

The EUT has been tested as an independent unit.

### 4.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

### 4.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

### 4.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
 Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,  
 Bao'an District, Shenzhen, Guangdong, China  
 Tel: +86-755-23118282, Fax: +86-755-23116366  
 Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

## 4.8 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-21-217	07-20-2020
				07-21-2020	07-20-2021
Loop Antenna	SCHWARZBECK	FMZB1519B	044	03-07-2020	03-06-2021
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-20-2020	06-19-2021
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2019	11-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021
RF Switch Unit	MWRFTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTEST	MTS8200	Version: 2.0.0.0		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-05-2020	03-04-2021
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-05-2020	03-04-2021
LISN	CHASE	MN2050D	1447	03-05-2020	03-04-2021
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	06-18-2020	07-17-2021
Cable	HP	10503A	N/A	03-05-2020	03-04-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		

## 5 Test results and Measurement Data


### 5.1 Test Configuration of EUT

Operation Frequency each of channel for 802.11b/g/n(HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

**Note:**

1. For 802.11n-HT40 mode, the channel number is from 3 to 9;
2. Channel 1, 6 & 11 selected for 802.11b/g/n-HT20 as Lowest, Middle and Highest channel. Channel 3, 6 & 9 selected for 802.11n-HT40 as Lowest, Middle and Highest Channel.

### 5.2 Test Setup Block

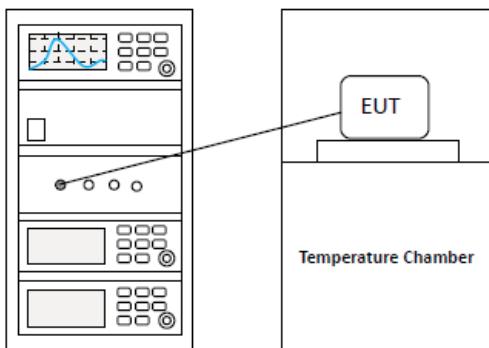

### 5.3 Test Result Summary

Test Items		Section in CFR 47	Test Data	Result		
Antenna requirement		15.203 & 15.247 (b)	See Section 5.4	Pass		
AC Power Line Conducted Emission		15.207	See Section 5.5	Pass		
Conducted Peak Output Power		15.247 (b)(3)	Appendix A – 2.4G Wi-Fi	Pass		
6dB Emission Bandwidth 99% Occupied Bandwidth		15.247 (a)(2)	Appendix A – 2.4G Wi-Fi	Pass		
Power Spectral Density		15.247 (e)	Appendix A – 2.4G Wi-Fi	Pass		
Band Edge	Conducted Emission Method	15.247 (d)	Appendix A – 2.4G Wi-Fi	Pass		
	Radiated Emission Method		See Section 5.9.1			
Spurious Emission	Conducted Emission Method	15.205 & 15.209	Appendix A – 2.4G Wi-Fi	Pass		
	Radiated Emission Method		See Section 5.10.1			
<b>Remark:</b>	1. Pass: The EUT complies with the essential requirements in the standard. 2. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).					
<b>Test Method:</b>	1. ANSI C63.10-2013 2. KDB 558074 D01 15.247 Meas Guidance v05r02					

## 5.4 Antenna requirement


<b>Standard requirement:</b>	FCC Part 15 C Section 15.203 /247(b)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<b>E.U.T Antenna:</b>	The Wi-Fi antenna is an Internal antenna which cannot replace by end-user, the best case gain of the antenna is 0.5 dBi.

## 5.5 Conducted Emission

Test Requirement:	FCC Part 15 C Section 15.207		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	<ol style="list-style-type: none"> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10(latest version) on conducted measurement.</li> </ol>		
Test setup:	<p><b>Reference Plane</b></p> <p><b>Remark</b>  <i>E.U.T: Equipment Under Test</i>  <i>LISN: Line Impedance Stabilization Network</i>  <i>Test table height=0.8m</i></p>		
Test Instruments:	Refer to section 4.8 for details		
Test mode:	Refer to section 4.3 for details		
Test results:	Passed		

## Measurement Data:

Product name:	4G SMART PHONE	Product model:	Elite H55
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

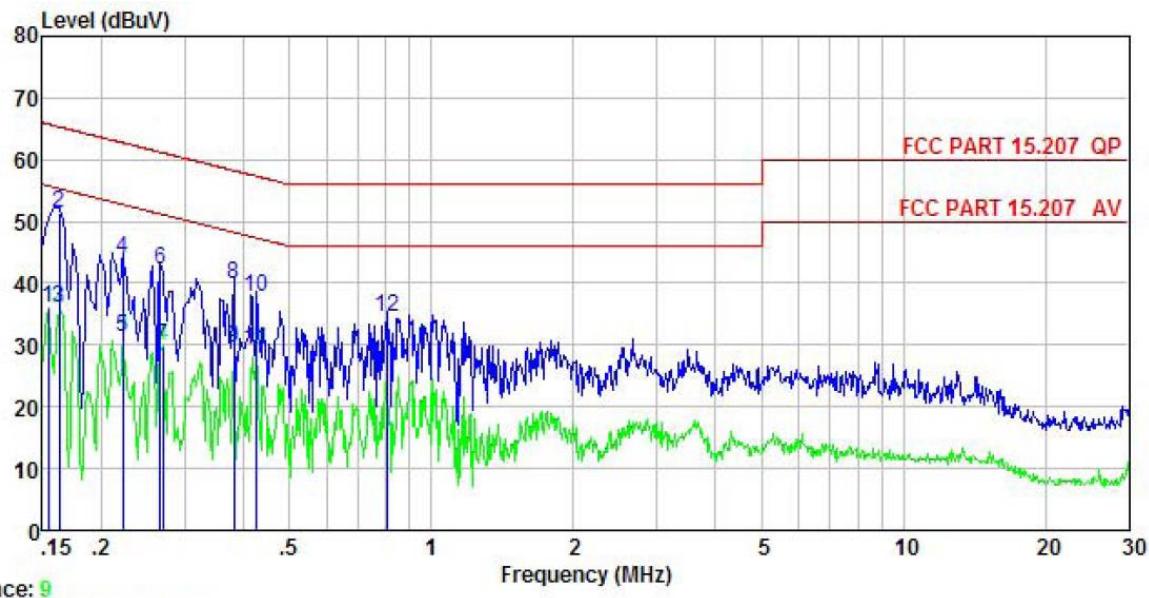


Freq MHz	Read Level dBuV	LISM Factor	Cable Loss dB	Aux Factor	Level dBuV	Limit Line dBuV	Over Limit dB	Over Limit Remark
1	0.154	25.87	-0.57	10.78	-0.06	36.02	55.78	-19.76 Average
2	0.162	41.16	-0.58	10.77	-0.08	51.27	65.34	-14.07 QP
3	0.162	25.80	-0.58	10.77	-0.08	35.91	55.34	-19.43 Average
4	0.222	34.00	-0.58	10.76	-0.19	43.99	62.74	-18.75 QP
5	0.222	21.37	-0.58	10.76	-0.19	31.36	52.74	-21.38 Average
6	0.266	32.29	-0.56	10.75	-0.23	42.25	61.25	-19.00 QP
7	0.270	19.87	-0.56	10.75	-0.23	29.83	51.12	-21.29 Average
8	0.381	29.39	-0.49	10.72	0.31	39.93	58.25	-18.32 QP
9	0.381	19.05	-0.49	10.72	0.31	29.59	48.25	-18.66 Average
10	0.426	27.26	-0.47	10.73	0.19	37.71	57.33	-19.62 QP
11	0.426	18.70	-0.47	10.73	0.19	29.15	47.33	-18.18 Average
12	0.804	24.31	-0.56	10.81	-0.07	34.49	56.00	-21.51 QP

## Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

<b>Product name:</b>	4G SMART PHONE	<b>Product model:</b>	Elite H55
<b>Test by:</b>	Mike	<b>Test mode:</b>	Wi-Fi Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C Huni: 55%

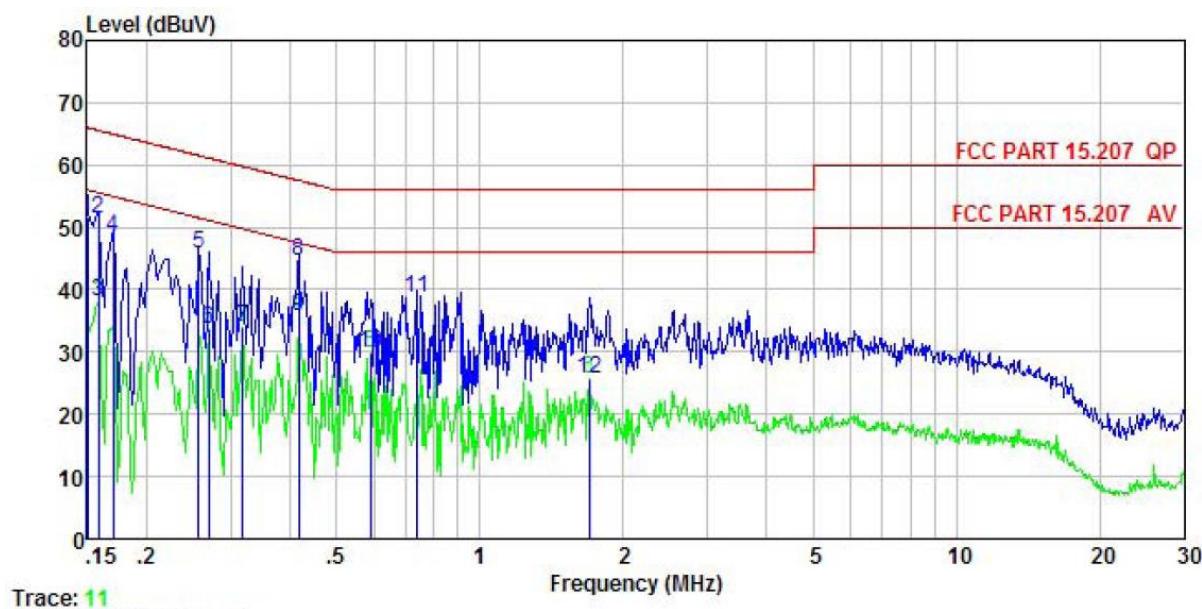


Freq	Read	LISN	Cable	Aux	Limit	Over	Remark
	Level	Factor	Loss	Factor			
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB
1	0.150	41.63	-0.69	10.78	0.01	51.73	66.00 -14.27 QP
2	0.158	41.31	-0.69	10.77	0.01	51.40	65.56 -14.16 QP
3	0.158	28.03	-0.69	10.77	0.01	38.12	55.56 -17.44 Average
4	0.170	38.38	-0.68	10.77	0.01	48.48	64.94 -16.46 QP
5	0.258	35.76	-0.67	10.75	0.01	45.85	61.51 -15.66 QP
6	0.270	23.65	-0.67	10.75	0.01	33.74	51.12 -17.38 Average
7	0.318	23.94	-0.66	10.74	-0.01	34.01	49.75 -15.74 Average
8	0.417	34.44	-0.63	10.73	-0.04	44.50	57.51 -13.01 QP
9	0.417	25.68	-0.63	10.73	-0.04	35.74	47.51 -11.77 Average
10	0.589	19.75	-0.65	10.76	0.03	29.89	46.00 -16.11 Average
11	0.735	28.58	-0.65	10.79	0.05	38.77	56.00 -17.23 QP
12	1.698	15.43	-0.70	10.94	0.15	25.82	46.00 -20.18 Average

## Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.


## 5.6 Conducted Output Power

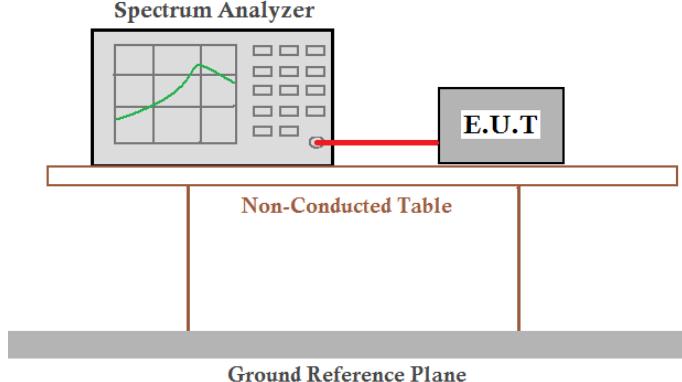Test Requirement:	FCC Part 15 C Section 15.247 (b)(3)
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test mode:	Refer to section 4.3 for details
Test results:	Passed

### Measurement Data:

See Appendix A – Wi-Fi


## 5.7 Occupy Bandwidth

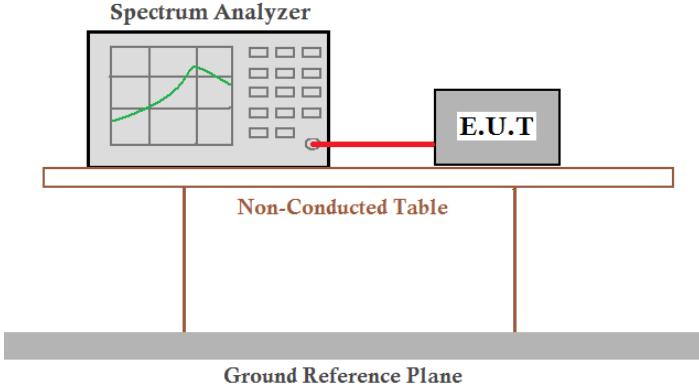Test Requirement:	FCC Part 15 C Section 15.247 (a)(2)
Limit:	>500kHz
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test mode:	Refer to section 4.3 for details
Test results:	Passed

### Measurement Data:

See Appendix A – Wi-Fi

## 5.8 Power Spectral Density

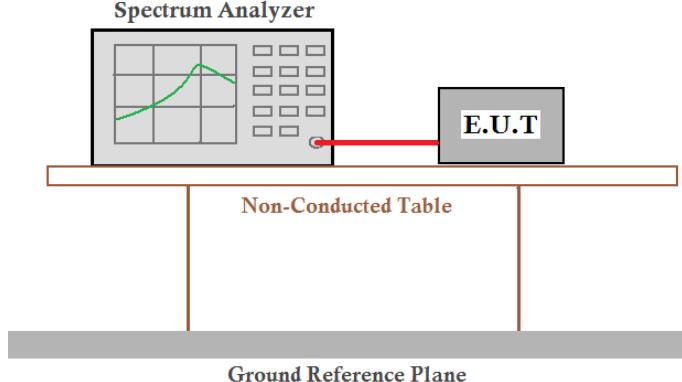
Test Requirement:	FCC Part 15 C Section 15.247 (e)
Limit:	8dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test mode:	Refer to section 4.3 for details
Test results:	Passed

### Measurement Data:

See Appendix A – Wi-Fi

## 5.9 Band Edge


### 5.9.1 Conducted Emission Method

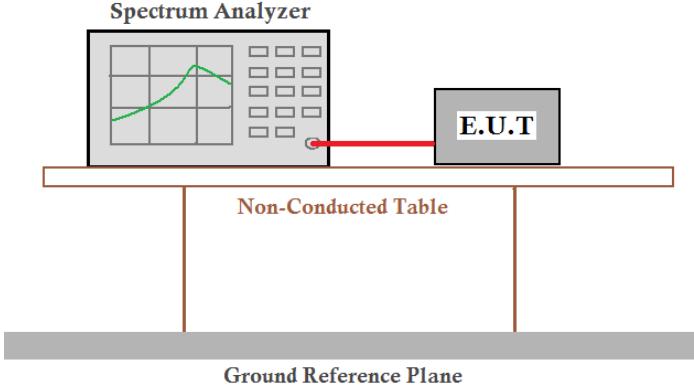Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test mode:	Refer to section 4.3 for details
Test results:	Passed

#### Measurement Data:


See Appendix A – Wi-Fi

### 5.9.2 Radiated Emission Method

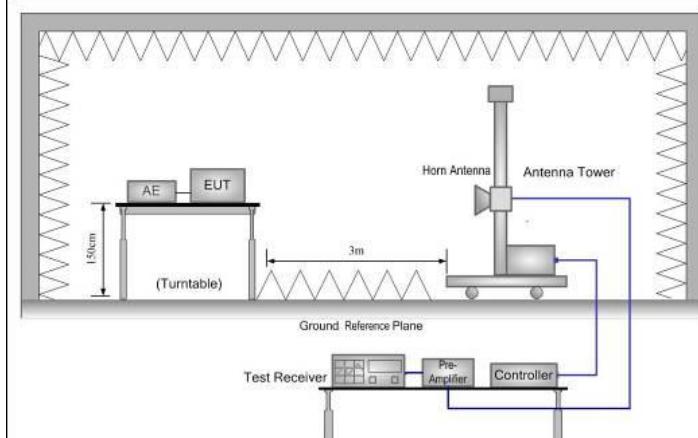Test Requirement:	FCC Part 15 C Section 15.209 and 15.205										
Test Frequency Range:	2310 MHz to 2390 MHz and 2483.5 MHz to 2500 MHz										
Test Distance:	3m										
Receiver setup:	Frequency	Detector	RBW	VBW	Remark						
	Above 1GHz	Peak	1MHz	3MHz	Peak Value						
Limit:	Frequency	Limit (dBuV/m @3m)		Remark							
	Above 1GHz	54.00		Average Value							
Test Procedure:		<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>									
Test setup:											
Test Instruments:	Refer to section 4.8 for details										
Test mode:	Refer to section 4.3 for details										
Test results:	Passed										

## 802.11b mode:

Product Name:	4G SMART PHONE	Product Model:	Elite H55
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

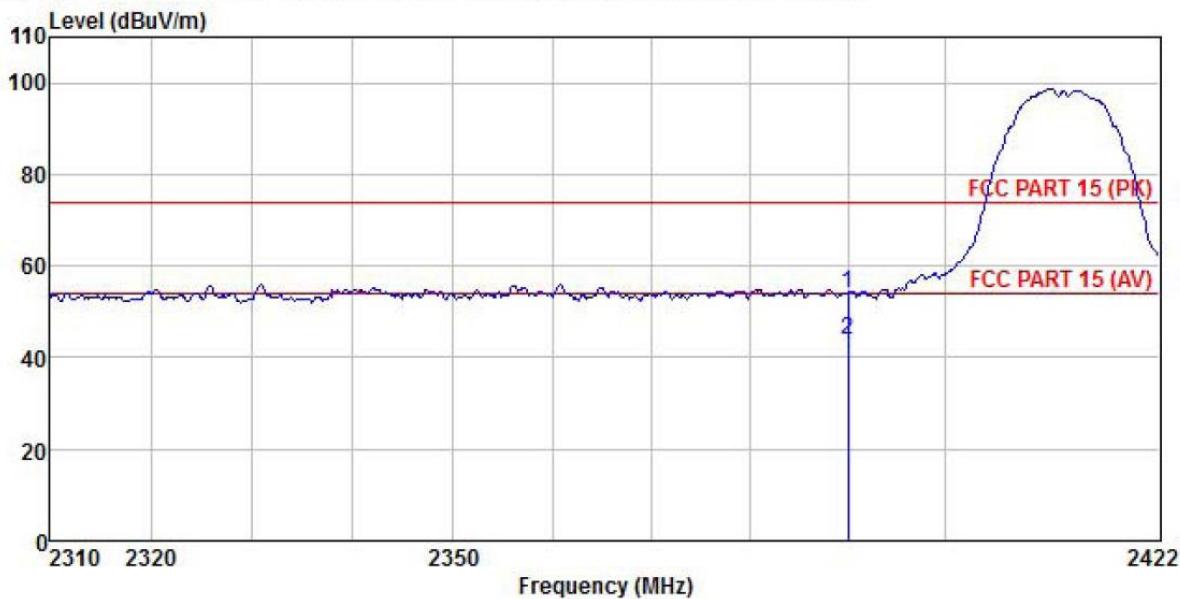


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Remark	
	Level	Factor	Loss	Factor	Factor	Level	Line	Limit	
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	20.91	27.03	4.28	1.68	0.00	53.90	74.00	-20.10 Peak
2	2390.000	10.90	27.03	4.28	1.68	0.00	43.89	54.00	-10.11 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	4G SMART PHONE	Product Model:	Elite H55
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

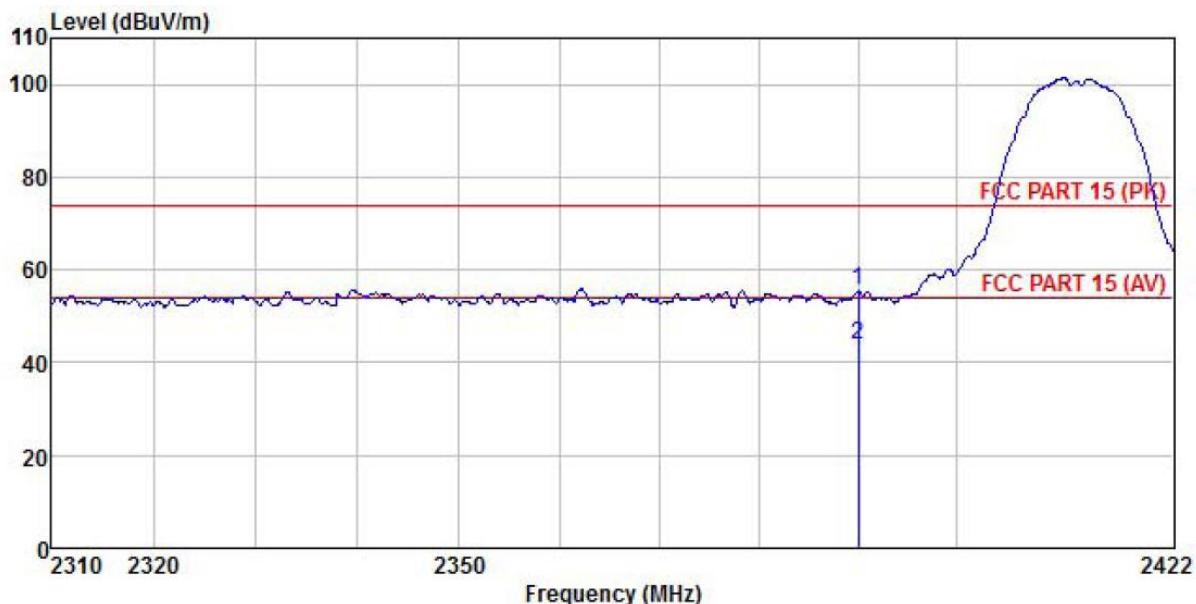


	Read	Antenna	Cable	Aux	Preampl	Limit	Over	
Freq	Level	Factor	Loss	Factor	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	22.43	27.03	4.28	1.68	0.00	55.42	74.00 -18.58 Peak
2	2390.000	10.99	27.03	4.28	1.68	0.00	43.98	54.00 -10.02 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

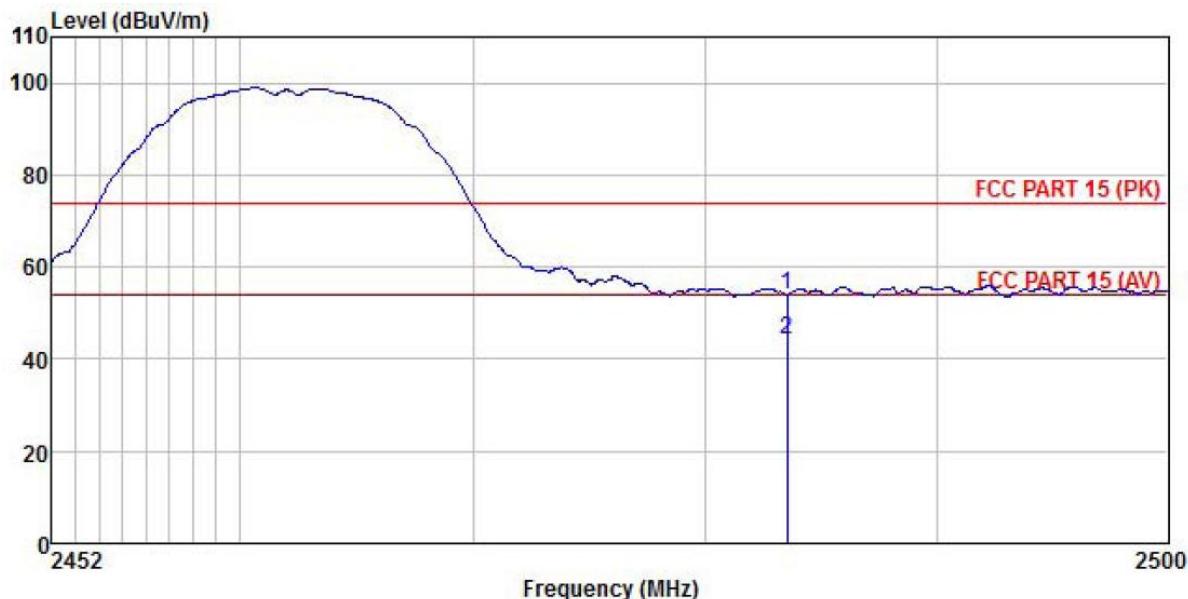


	Read	Antenna	Cable	Aux	Preampl	Limit	Over		
Freq	Level	Factor	Loss	Factor	Factor	Level	Line	Limit	
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	20.78	27.27	4.38	1.70	0.00	54.13	74.00	-19.87
2	2483.500	10.91	27.27	4.38	1.70	0.00	44.26	54.00	-9.74
									Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

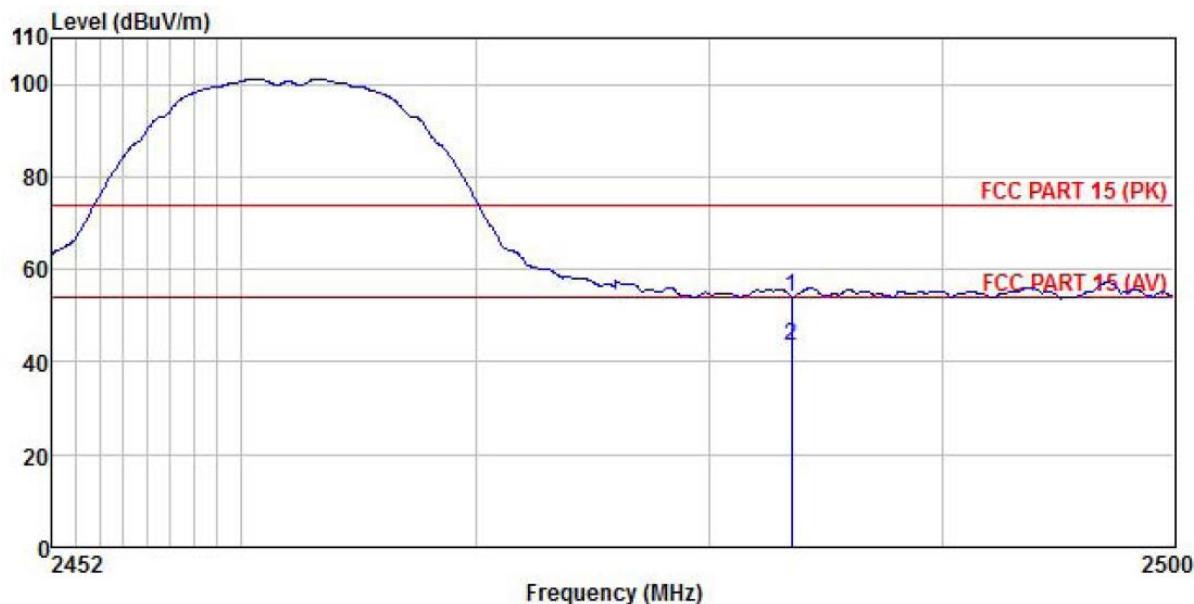


	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Remark
Freq	Level	Factor	Loss	Factor	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	20.50	27.27	4.38	1.70	0.00	53.85	74.00 -20.15 Peak
2	2483.500	10.13	27.27	4.38	1.70	0.00	43.48	54.00 -10.52 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 802.11g mode:

Product Name:	4G SMART PHONE	Product Model:	Elite H55
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

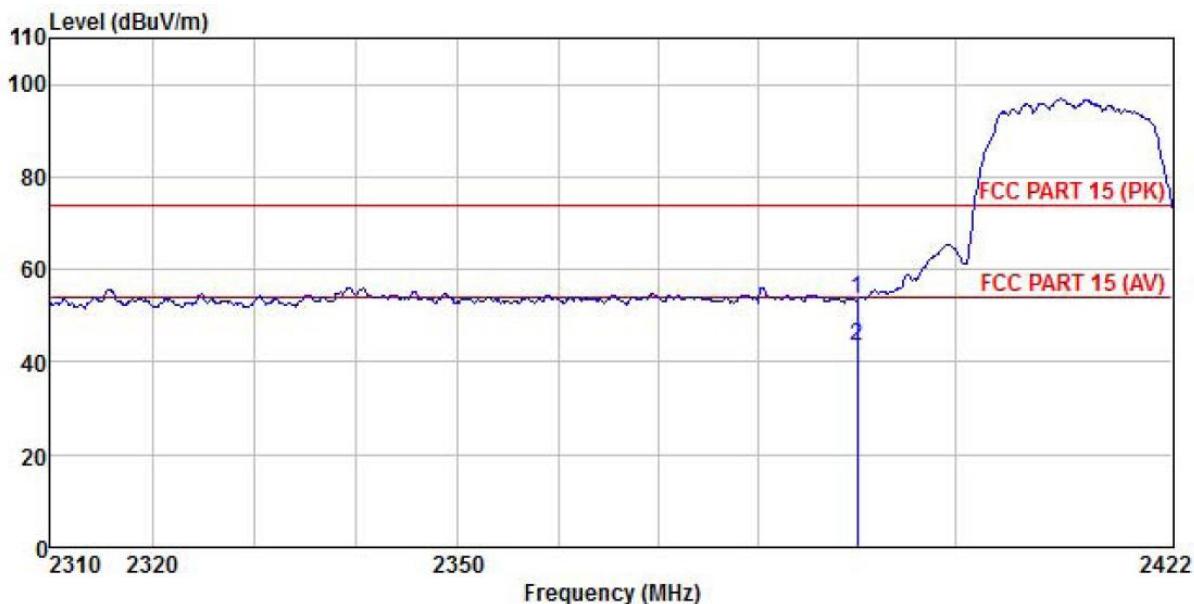


Freq	Read		Antenna	Cable	Aux	Preampl	Limit	Over	Remark
	Level	Factor	Level	Loss	Factor	Factor			
MHz	dBuV	dB/m		dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	20.39	27.03	4.28	1.68	0.00	53.38	74.00	-20.62 Peak
2	2390.000	10.25	27.03	4.28	1.68	0.00	43.24	54.00	-10.76 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	4G SMART PHONE	Product Model:	Elite H55
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

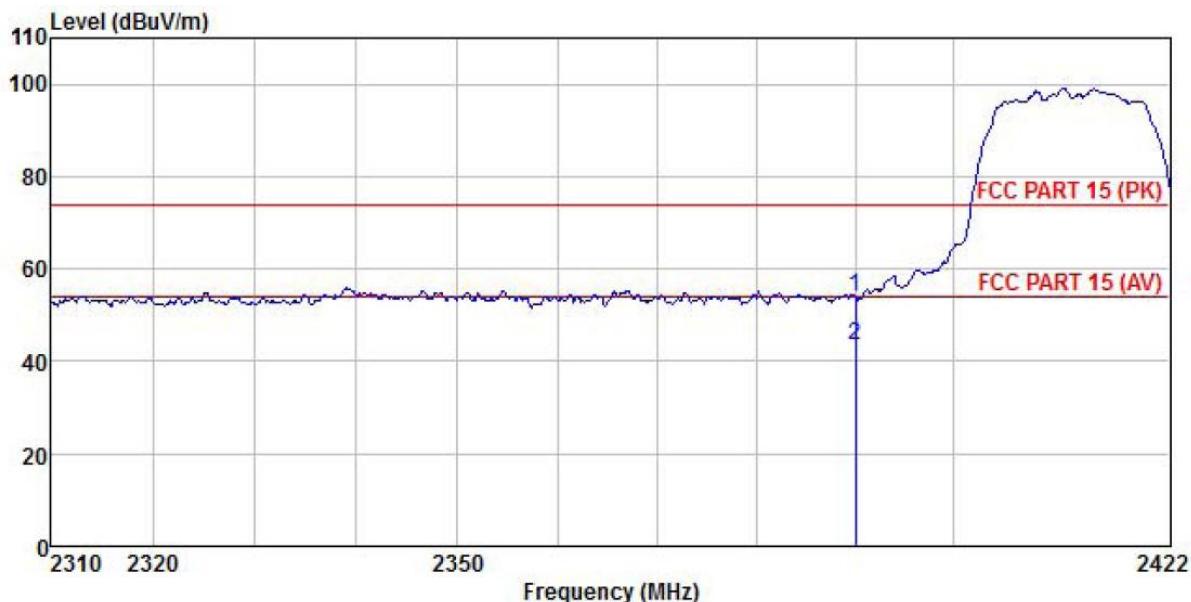


Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Aux Factor dB	Preamp Factor dB	Level dB dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
1 2390.000	20.92	27.03	4.28	1.68	0.00	53.91	74.00	-20.09	QP
2 2390.000	10.25	27.03	4.28	1.68	0.00	43.24	54.00	-10.76	Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

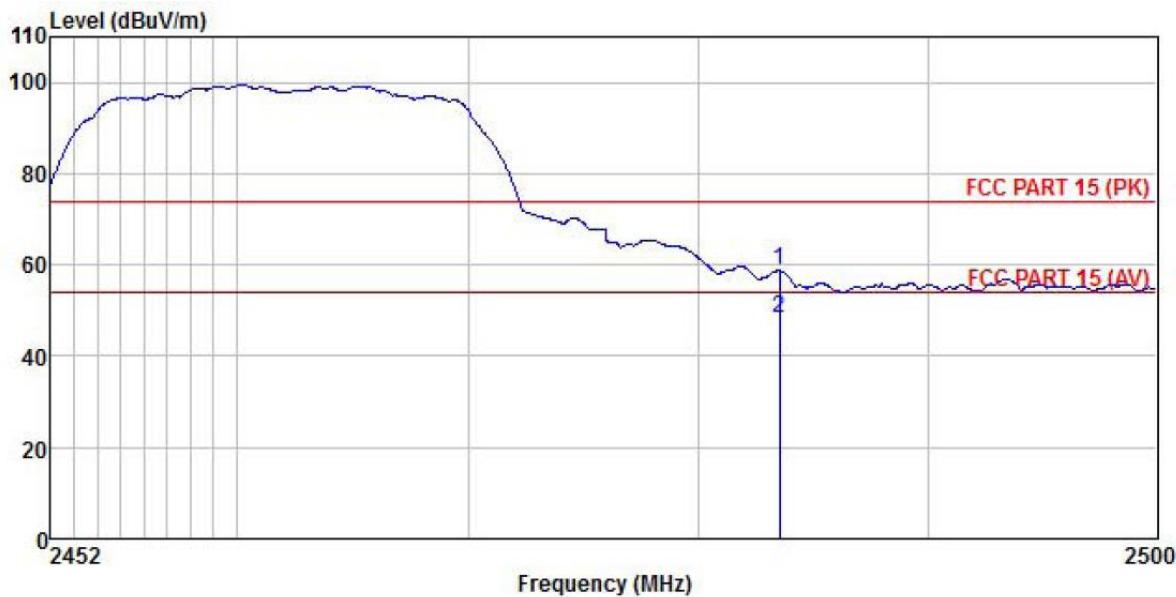


	Read	Antenna	Cable	Aux	Preampl	Limit	Over	
Freq	Level	Factor	Cable	Aux	Preampl	Limit	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	25.34	27.27	4.38	1.70	0.00	58.69	74.00
2	2483.500	15.14	27.27	4.38	1.70	0.00	48.49	54.00

-15.31 Peak  
-5.51 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

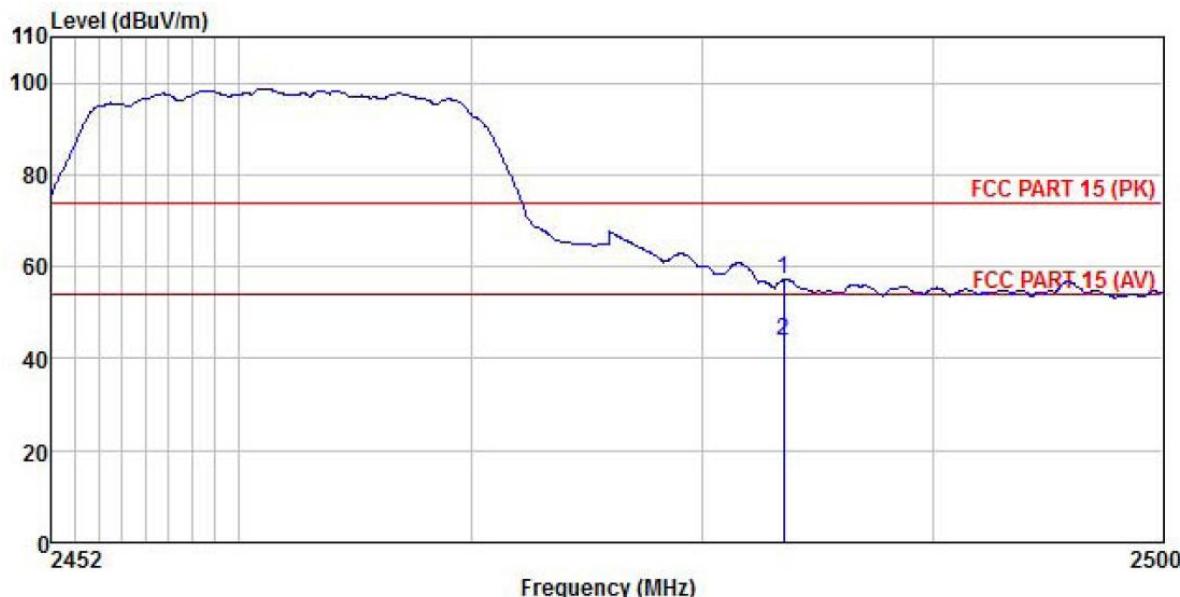


Freq MHz	Read Level dBuV	Antenna Factor	Cable Loss dB	Aux Factor	Preamp Factor	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
	MHz	dB	dB	dB	dBuV/m	dBuV/m	dB		
1 2483.500	23.85	27.27	4.38	1.70	0.00	57.20	74.00	-16.80	Peak
2 2483.500	10.58	27.27	4.38	1.70	0.00	43.93	54.00	-10.07	Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 802.11n(HT20):

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

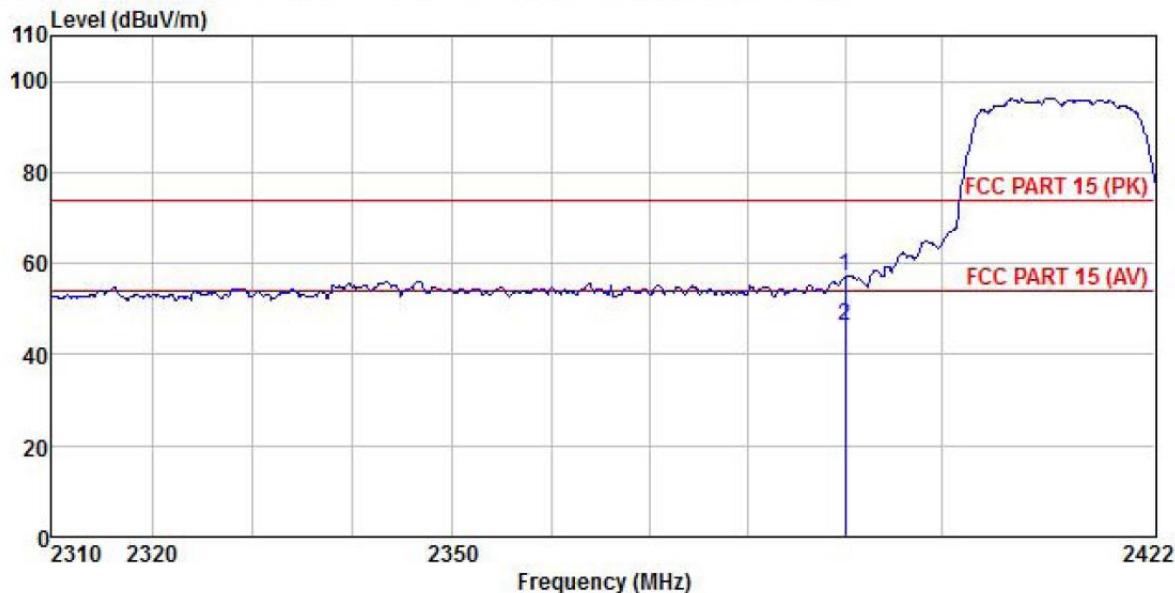


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Over	Remark
MHz	Level	Factor	Loss	Factor	Factor	Level	Line	Line	
	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	24.12	27.03	4.28	1.68	0.00	57.11	74.00	-16.89 Peak
2	2390.000	13.12	27.03	4.28	1.68	0.00	46.11	54.00	-7.89 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

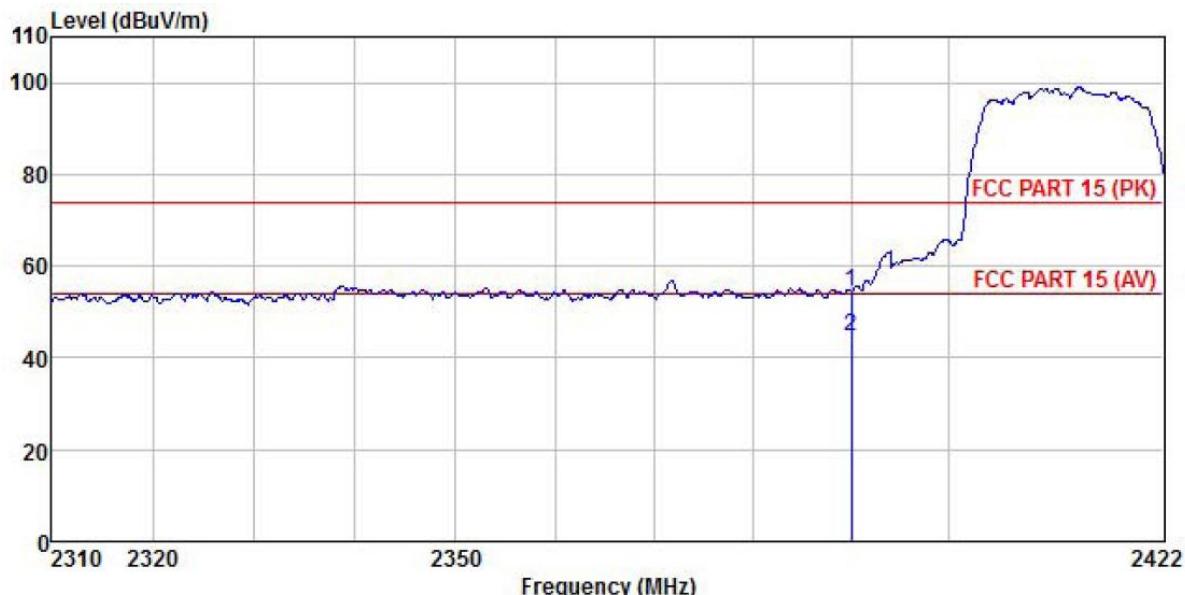


Freq	Read		Antenna	Cable	Aux	Preampl	Limit	Over	Over	
	Level	Factor	Loss	Factor	Preamp	Level				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB		
1	2390.000	21.40	27.03	4.28	1.68	0.00	54.39	74.00	-19.61	Peak
2	2390.000	11.50	27.03	4.28	1.68	0.00	44.49	54.00	-9.51	Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

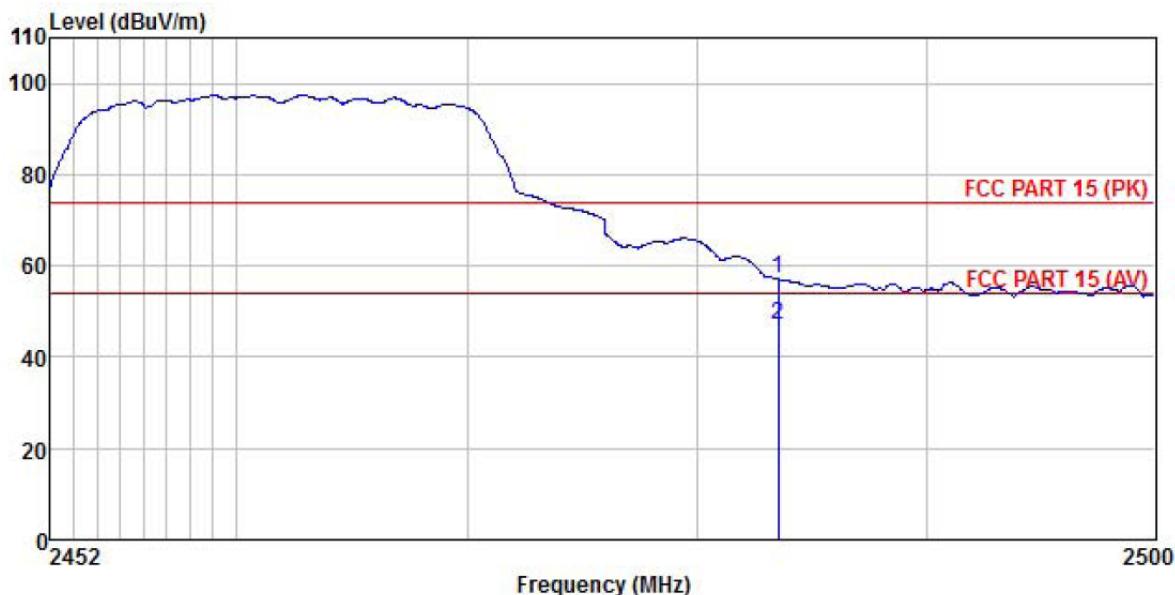


Freq	Read		Antenna		Cable		Aux		Preamp		Limit	Over	Line	Limit	Remark	
	Freq	Level	Antenna	Factor	Cable	Loss	Factor	Preamp	Level	dBuV/m	dBuV/m					
	MHz	dBuV		dB/m		dB		dB	dBuV/m	dBuV/m						
1	2483.500	23.75	27.27	4.38	1.70	0.00	57.10	74.00	-16.90	Peak						
2	2483.500	13.60	27.27	4.38	1.70	0.00	46.95	54.00	-7.05	Average						

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

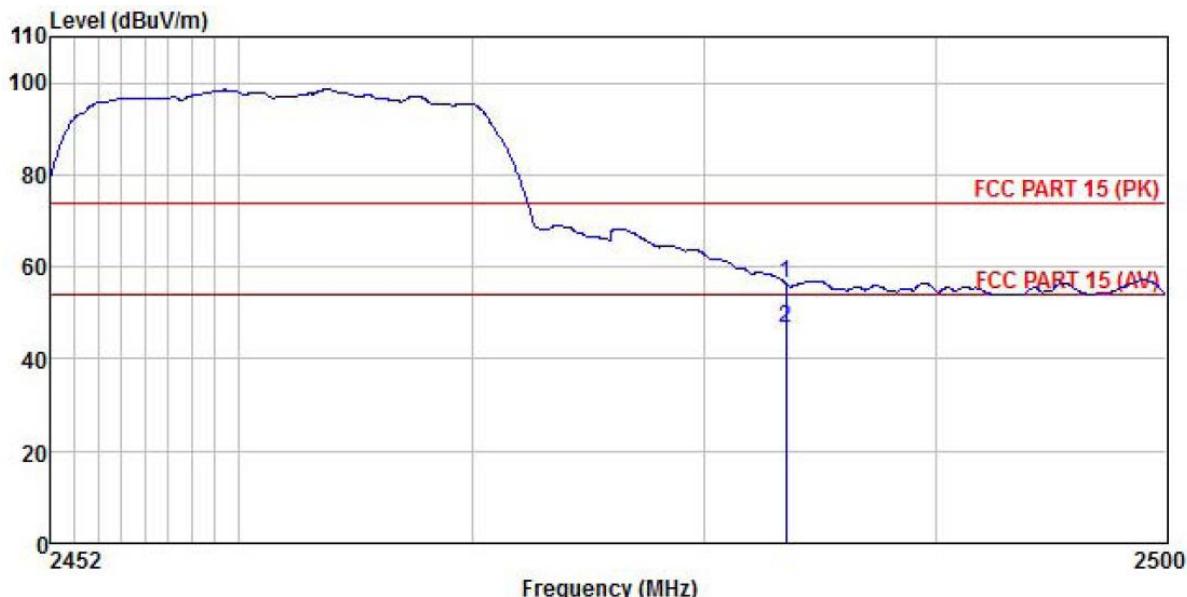


Freq	Read	Antenna	Cable	Aux	Preampl	Limit	Over	Remark
	Level	Factor	Loss	Factor	Factor			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	22.99	27.27	4.38	1.70	0.00	56.34	74.00 -17.66 Peak
2	2483.500	13.22	27.27	4.38	1.70	0.00	46.57	54.00 -7.43 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 802.11n(HT40):

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

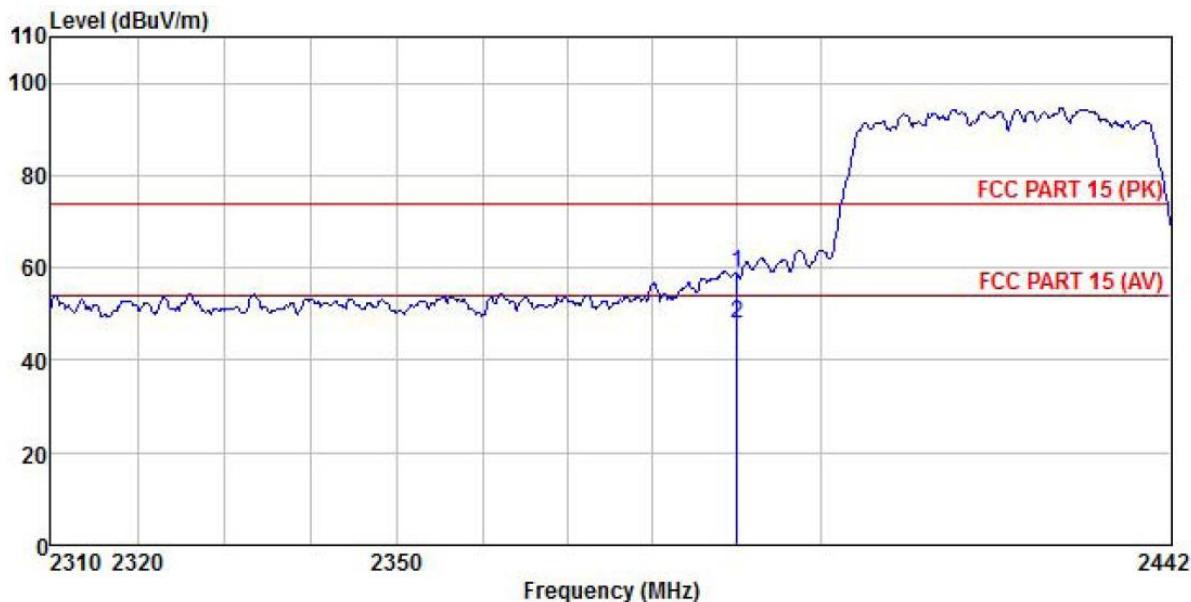


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Remark	
	Freq	Level	Factor	Loss	Factor				
MHz	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	25.82	27.03	4.28	1.68	0.00	58.81	74.00	-15.19 Peak
2	2390.000	15.01	27.03	4.28	1.68	0.00	48.00	54.00	-6.00 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

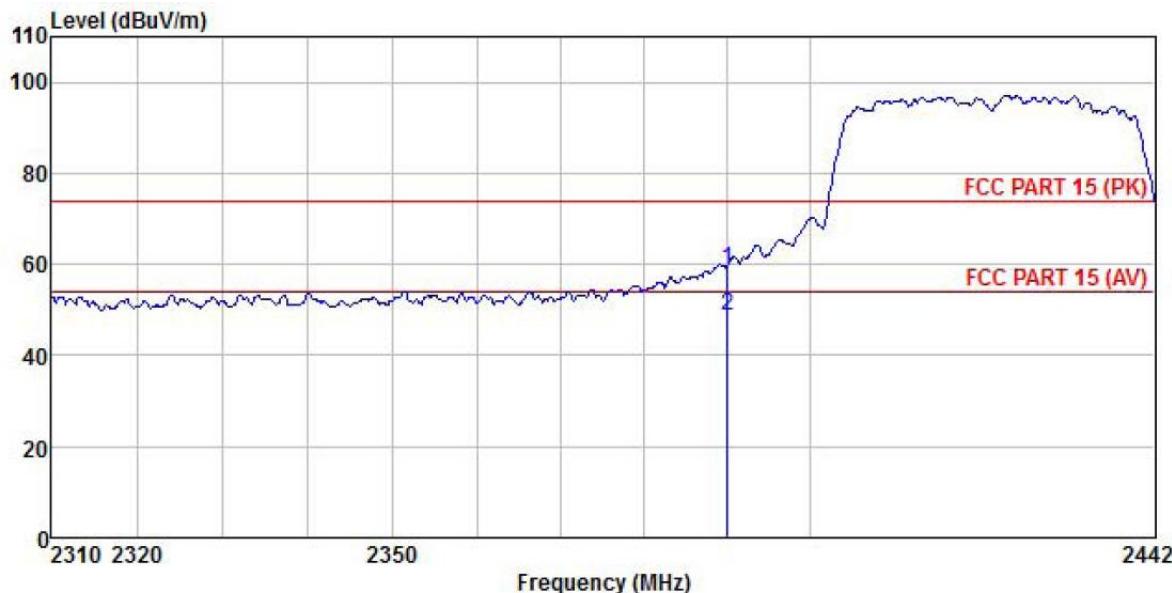


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Over	Remark
	Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	26.01	27.03	4.28	1.68	0.00	59.00	74.00	-15.00 Peak
2	2390.000	15.70	27.03	4.28	1.68	0.00	48.69	54.00	-5.31 Average

*Remark:*

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	4G SMART PHONE	Product Model:	Elite H55
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

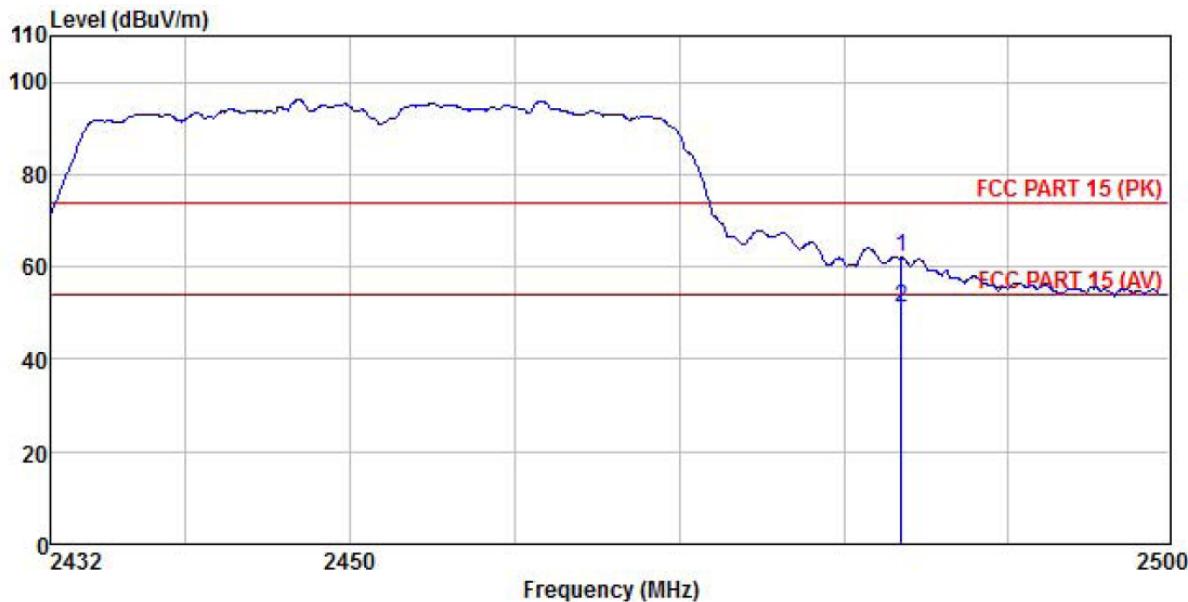


	Read	Antenna	Cable	Aux	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Factor	Level	Line	Limit	Remark	
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	28.61	27.27	4.38	1.70	0.00	61.96	74.00	-12.04	Peak
2	2483.500	17.77	27.27	4.38	1.70	0.00	51.12	54.00	-2.88	Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

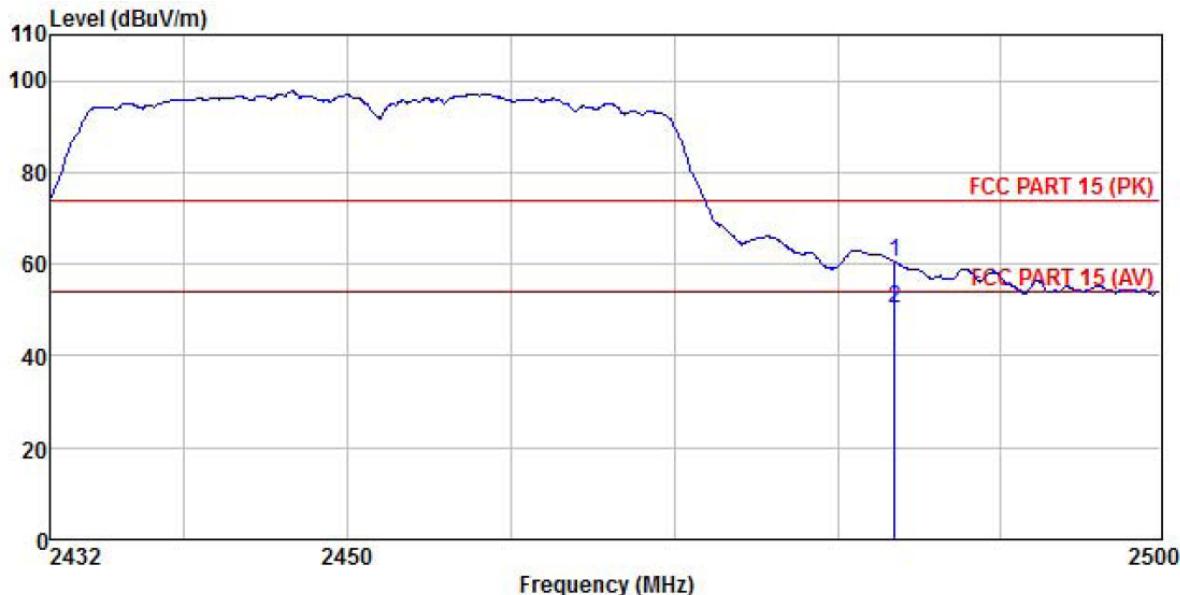


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Over	
	Freq	Level	Factor	Loss	Factor				Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	27.21	27.27	4.38	1.70	0.00	60.56	74.00	-13.44 Peak
2	2483.500	16.98	27.27	4.38	1.70	0.00	50.33	54.00	-3.67 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 5.10 Spurious Emission


### 5.10.1 Conducted Emission Method

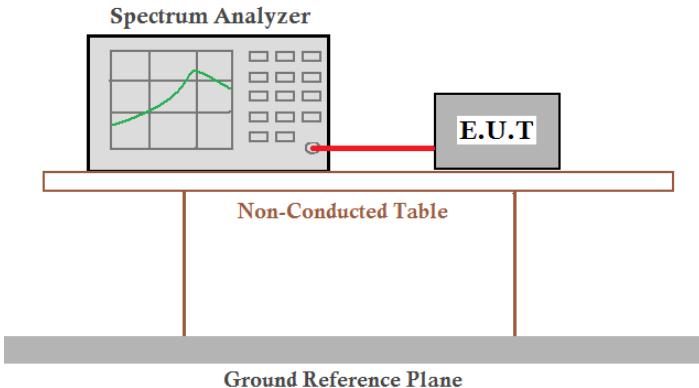
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test mode:	Refer to section 4.3 for details
Test results:	Passed

#### Measurement Data:

See Appendix A – Wi-Fi

## 5.10.2 Radiated Emission Method

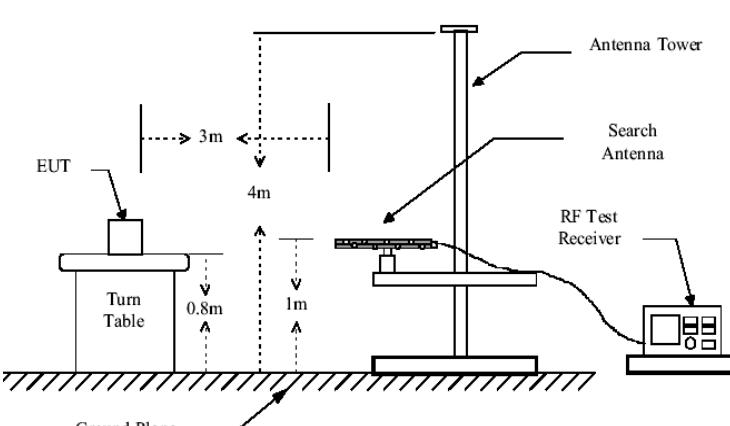Test Requirement:	FCC Part 15 C Section 15.209 and 15.205															
Test Frequency Range:	9kHz to 25GHz															
Test Distance:	3m															
Receiver setup:	Frequency	Detector	RBW	VBW	Remark											
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value											
	Above 1GHz	Peak	1MHz	3MHz	Peak Value											
Limit:	RMS	1MHz	3MHz	3MHz	Average Value											
	Frequency	Limit (dBuV/m @3m)		Remark												
	30MHz-88MHz	40.0		Quasi-peak Value												
	88MHz-216MHz	43.5		Quasi-peak Value												
	216MHz-960MHz	46.0		Quasi-peak Value												
	960MHz-1GHz	54.0		Quasi-peak Value												
	Above 1GHz	54.0		Average Value												
Test Procedure:		74.0		Peak Value												
	1.	The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.														
	2.	The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.														
	3.	The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.														
	4.	For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.														
	5.	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.														
Test setup:	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.															
	Below 1GHz															
																
Above 1GHz																

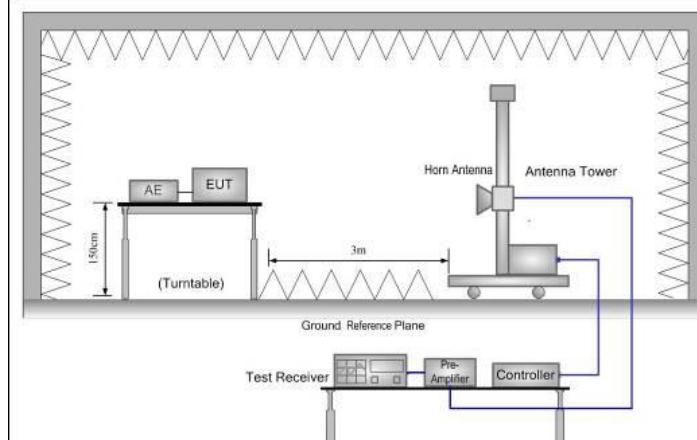

Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	<ol style="list-style-type: none"><li>1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.</li><li>2. 9 kHz to 30MHz is lower than the limit 20dB, so only shows the data of above 30MHz in this report.</li></ol>

## Measurement Data (worst case):


Below 1GHz:

Product Name:	4G SMART PHONE		Product Model:	Elite H55						
Test By:	Mike		Test mode:	Wi-Fi Tx mode						
Test Frequency:	30 MHz ~ 1 GHz		Polarization:	Vertical						
Test Voltage:	AC 120/60Hz		Environment:	Temp: 24°C	Huni: 57%					
Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Level	Line	Over Line Limit	Over QP Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	dB	
1	52.575	55.23	12.21	0.40	0.00	29.81	38.03	40.00	-1.97	QP
2	60.704	55.82	10.66	0.42	0.00	29.77	37.13	40.00	-2.87	QP
3	81.783	54.40	12.38	0.47	0.00	29.63	37.62	40.00	-2.38	QP
4	96.775	60.56	9.19	0.51	0.00	29.54	40.72	43.50	-2.78	QP
5	105.272	56.08	9.62	0.53	0.00	29.49	36.74	43.50	-6.76	QP
6	167.824	46.80	16.10	0.65	0.00	29.07	34.48	43.50	-9.02	QP

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

<b>Product Name:</b>	4G SMART PHONE	<b>Product Model:</b>	Elite H55
<b>Test By:</b>	Mike	<b>Test mode:</b>	Wi-Fi Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

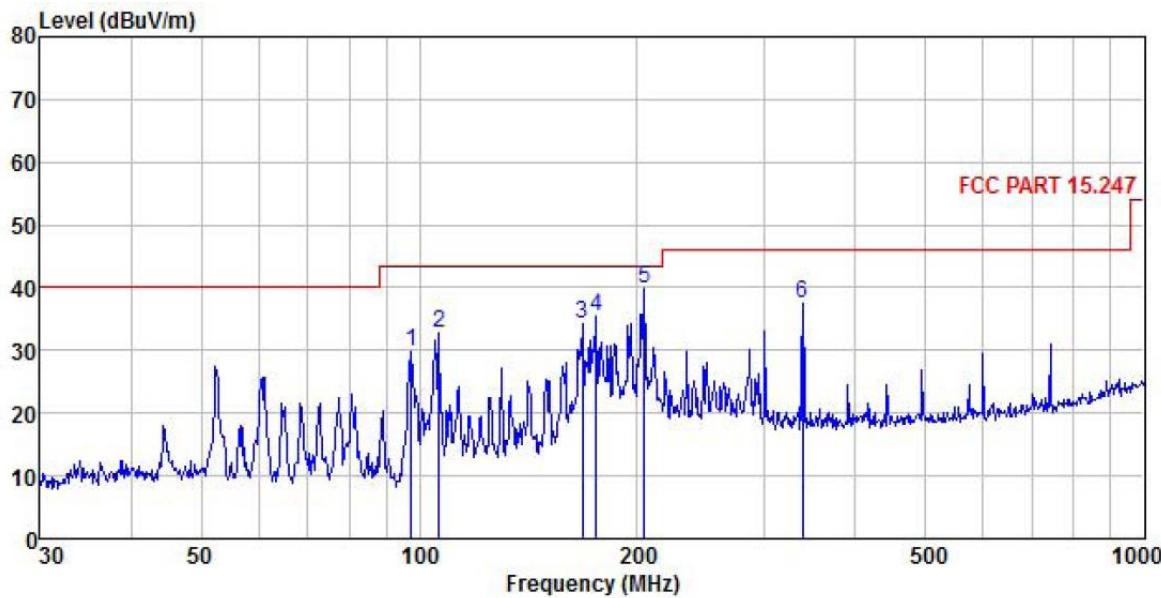

Freq MHz	Read	Antenna	Cable	Aux	Preampl	Limit	Over	Remark
	Level dBuV	Level Factor	Cable Loss dB	Preamp Factor	Factor dB	Level dBuV/m	Line dBuV/m	
1 97.456	49.71	9.10	0.51	0.00	29.54	29.78	43.50	-13.72 QP
2 106.385	51.91	9.69	0.54	0.00	29.48	32.66	43.50	-10.84 QP
3 167.824	46.54	16.10	0.65	0.00	29.07	34.22	43.50	-9.28 QP
4 175.652	46.90	16.81	0.67	0.00	29.01	35.37	43.50	-8.13 QP
5 204.238	49.50	18.32	0.72	0.00	28.80	39.74	43.50	-3.76 QP
6 338.400	46.25	18.78	0.91	0.00	28.53	37.41	46.00	-8.59 QP

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

## Above 1GHz

802.11b									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	50.09	30.81	6.81	2.46	41.82	48.35	74.00	-25.66	Vertical
4824.00	51.50	30.81	6.81	2.46	41.82	49.76	74.00	-24.24	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	42.50	30.81	6.81	2.46	41.82	40.76	54.00	-13.24	Vertical
4824.00	43.55	30.81	6.81	2.46	41.82	41.81	54.00	-12.19	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	51.26	30.93	6.85	2.47	41.84	49.67	74.00	-24.33	Vertical
4874.00	52.66	30.93	6.85	2.47	41.84	51.07	74.00	-22.93	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	41.78	30.93	6.85	2.47	41.84	40.19	54.00	-13.81	Vertical
4874.00	41.56	30.93	6.85	2.47	41.84	39.97	54.00	-14.03	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	51.33	31.05	6.89	2.48	41.86	49.89	74.00	-24.11	Vertical
4924.00	50.47	31.05	6.89	2.48	41.86	49.03	74.00	-24.97	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	42.65	31.05	6.89	2.48	41.86	41.21	54.00	-12.79	Vertical
4924.00	43.19	31.05	6.89	2.48	41.86	41.75	54.00	-12.25	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	51.33	30.81	6.81	2.46	41.82	49.59	74.00	-24.41	Vertical
4824.00	52.79	30.81	6.81	2.46	41.82	51.05	74.00	-22.95	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	43.32	30.81	6.81	2.46	41.82	41.58	54.00	-12.42	Vertical
4824.00	42.19	30.81	6.81	2.46	41.82	40.45	54.00	-13.55	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	51.44	30.93	6.85	2.47	41.84	49.85	74.00	-24.15	Vertical
4874.00	50.79	30.93	6.85	2.47	41.84	49.20	74.00	-24.80	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	42.50	30.93	6.85	2.47	41.84	40.91	54.00	-13.09	Vertical
4874.00	41.39	30.93	6.85	2.47	41.84	39.80	54.00	-14.20	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	52.46	31.05	6.89	2.48	41.86	51.02	74.00	-22.98	Vertical
4924.00	50.33	31.05	6.89	2.48	41.86	48.89	74.00	-25.11	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	42.17	31.05	6.89	2.48	41.86	40.73	54.00	-13.27	Vertical
4924.00	40.55	31.05	6.89	2.48	41.86	39.11	54.00	-14.89	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	51.79	30.81	6.81	2.46	41.82	50.05	74.00	-23.95	Vertical
4824.00	50.34	30.81	6.81	2.46	41.82	48.60	74.00	-25.40	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	40.52	30.81	6.81	2.46	41.82	38.78	54.00	-15.22	Vertical
4824.00	41.19	30.81	6.81	2.46	41.82	39.45	54.00	-14.55	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	52.44	30.93	6.85	2.47	41.84	50.85	74.00	-23.15	Vertical
4874.00	51.79	30.93	6.85	2.47	41.84	50.20	74.00	-23.80	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	41.52	30.93	6.85	2.47	41.84	39.93	54.00	-14.07	Vertical
4874.00	42.66	30.93	6.85	2.47	41.84	41.07	54.00	-12.93	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	53.62	31.05	6.89	2.48	41.86	52.18	74.00	-21.82	Vertical
4924.00	52.27	31.05	6.89	2.48	41.86	50.83	74.00	-23.17	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	40.15	31.05	6.89	2.48	41.86	38.71	54.00	-15.29	Vertical
4924.00	41.79	31.05	6.89	2.48	41.86	40.35	54.00	-13.65	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.