



MRT Technology (Suzhou) Co., Ltd
Phone: +86-512-66308358
Fax: +86-512-66308368
Web: www.mrt-cert.com

Report No.: 1509RSU02902
Report Version: V01
Issue Date: 10-15-2015

MEASUREMENT REPORT

FCC PART 15.407 & RSS-247

FCC ID: 2ABX8SH-0000000012

IC: 12219A-000000000012

APPLICANT: Zhejiang shenghui lighting Co., Ltd. Shanghai Branch

Application Type: Certification

Product: sengled pulse flex

Model No.: C02-BR30NAE26

Brand Name: Sengled

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part 15.407

IC Rule(s): RSS-247 Issue 1

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v01

Test Date: September 26 ~ October 09, 2015

Reviewed By : Robin Wu
(Robin Wu)

Approved By : Marlin Chen
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1509RSU02902	Rev. 01	Initial report	10-15-2015

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Operation Frequency / Channel list.....	7
2.4. Description of Available Antennas	8
2.5. Device Capabilities	8
2.6. Test Configuration	9
2.7. EMI Suppression Device(s)/Modifications.....	9
2.8. Labeling Requirements.....	9
3. DESCRIPTION OF TEST	10
3.1. Evaluation Procedure	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS	12
5. Test Equipment Calibration Date	13
6. MEASUREMENT UNCERTAINTY	14
7. TEST RESULT	15
7.1. Summary	15
7.2. 26dB Bandwidth Measurement.....	17
7.2.1. Test Limit	17
7.2.2. Test Procedure used.....	17
7.2.3. Test Setting.....	17
7.2.4. Test Setup	17
7.2.5. Test Result.....	18
7.3. 6dB Bandwidth Measurement.....	26
7.3.1. Test Limit	26
7.3.2. Test Procedure used.....	26
7.3.3. Test Setting.....	26
7.3.4. Test Setup	26
7.3.5. Test Result.....	27

7.4.	Operation Frequency Range of 26dBc Bandwidth Measurement.....	32
7.4.1.	Test Limit	32
7.4.2.	Test Procedure used.....	32
7.4.3.	Test Setting.....	32
7.4.4.	Test Setup	32
7.4.5.	Test Result.....	33
7.5.	Output Power Measurement	35
7.5.1.	Test Limit	35
7.5.2.	Test Procedure Used	35
7.5.3.	Test Setting.....	35
7.5.4.	Test Setup	35
7.5.5.	Test Result.....	36
7.6.	Power Spectral Density Measurement	39
7.6.1.	Test Limit	39
7.6.2.	Test Procedure Used	39
7.6.3.	Test Setting.....	39
7.6.4.	Test Setup	40
7.6.5.	Test Result.....	41
7.7.	Frequency Stability Measurement.....	49
7.7.1.	Test Limit	49
7.7.2.	Test Procedure Used	49
7.7.3.	Test Setup	49
7.7.4.	Test Result.....	50
7.8.	Radiated Spurious Emission Measurement	51
7.8.1.	Test Limit	51
7.8.2.	Test Procedure Used	51
7.8.3.	Test Setting.....	51
7.8.4.	Test Setup	52
7.8.5.	Test Result.....	54
7.9.	Radiated Restricted Band Edge Measurement	92
7.9.1.	Test Limit	92
7.9.2.	Test Result of Radiated Restricted Band Edge	95
7.10.	AC Conducted Emissions Measurement.....	167
7.10.1.	Test Limit	167
7.10.2.	Test Procedure	167
7.10.3.	Test Setup	168
7.10.4.	Test Result.....	169

8. CONCLUSION..... 171

§2.1033 General Information

Applicant:	Zhejiang shenghui lighting Co., Ltd. Shanghai Branch
Applicant Address:	Rm. 801, 1st Xinye Building, 388 Tianlin Rd., Caohejing Development Zone, Shanghai, 200233, China
Manufacturer:	ZHEJIANG SHENGHUI LIGHTING Co., Ltd
Manufacturer Address:	South Jiachuang Rd., Xiuzhou Industrial Park Jiaxing, Zhejiang 314015 P.R. China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT FCC Registration No.:	809388
MRT IC Registration No.:	11384A
FCC Rule Part(s):	Part 15.407
IC Rule(s):	RSS-247
Model No.:	C02-BR30NAE26
FCC ID:	2ABX8SH-000000012
IC:	12219A-00000000012
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	Unlicensed National Information Infrastructure (UNII)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	sengled pulse flex
Model No.	C02-BR30NAE26
Brand Name	sengled
Wi-Fi Specification	802.11a/b/g/n

2.2. Product Specification Subjective to this Report

Frequency Range	802.11a/n-HT20: 5180~5240MHz, 5745~5825MHz 802.11n-HT40: 5190~5230MHz, 5755~5795MHz
Maximum Average Output Power	802.11a: 17.53dBm 802.11n-HT20: 20.31dBm 802.11n-HT40: 19.88dBm
Type of Modulation	802.11a/n: OFDM

2.3. Operation Frequency / Channel list

802.11a/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	151	5755 MHz
159	5795 MHz	--	--	--	--

2.4. Description of Available Antennas

Antenna No.	Antenna Type	Frequency Band (GHz)	Manufacturer	Max Peak Gain (dBi)
Ant 1	PCB Antenna	2412~2462	Zhejiang shenghui lighting Co., Ltd. Shanghai Branch	4.04
		5180~5240		4.00
		5745~5825		4.53
Ant 2	PCB Antenna	2412~2462	Shanghai Branch	4.43
		5180~5240		3.34
		5745~5825		5.87


2.5. Device Capabilities


This device contains the following capabilities:

2.4GHz WLAN (DTS) and 5GHz WLAN (UNII).

Note: 5GHz (NII) operation is possible in 20MHz and 40MHz channel bandwidth. The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average per the guidance of Section B)2)b) of KDB 789033 D02v01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycle is as follow:

Test Mode	Duty Cycle
802.11a	96.5%
802.11n-HT20	96.3%
802.11n-HT40	96.3%

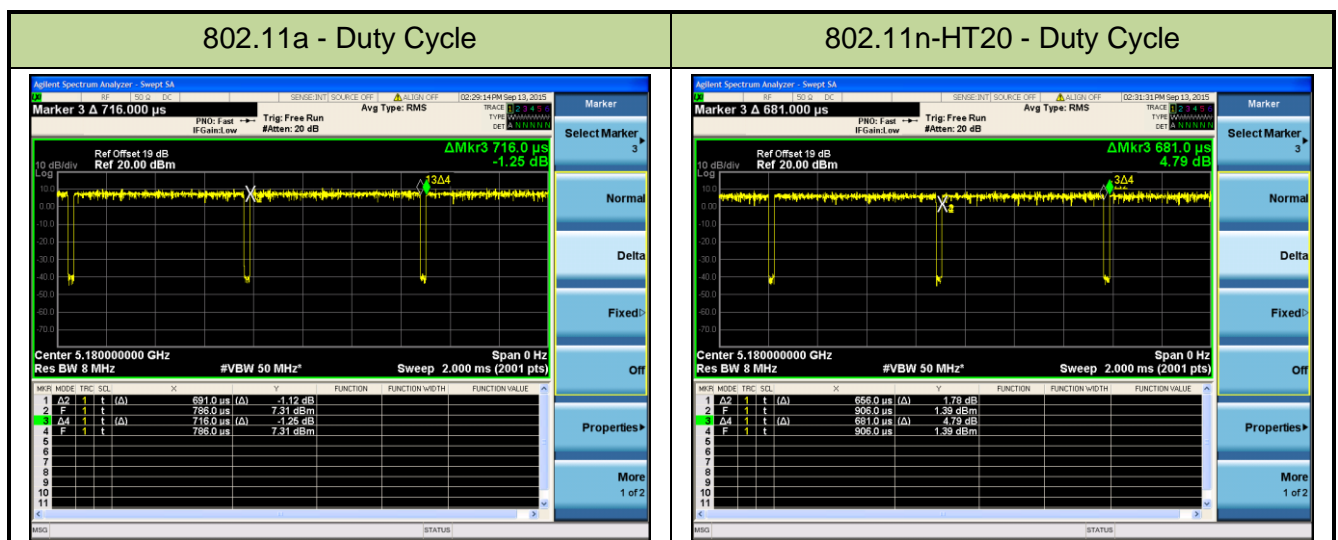

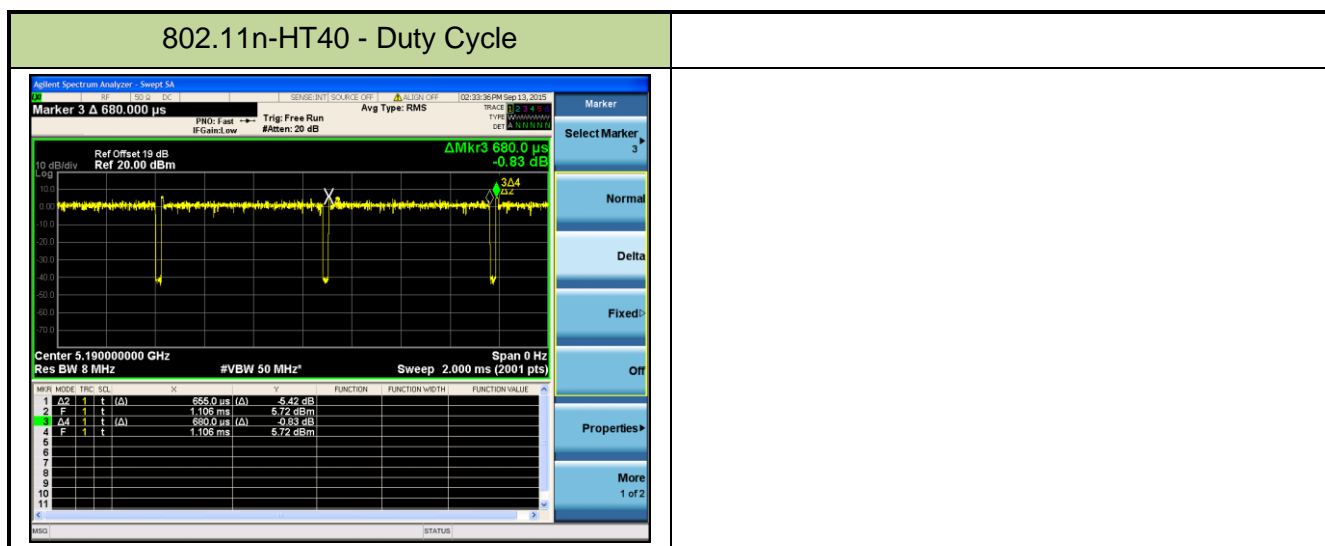

2.6. Test Configuration

The **sengled pulse flex FCC ID: 2ABX8SH-000000012** was tested per the guidance of KDB 789033 D02v01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.8. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v01 were used in the measurement of the **sengled pulse flex FCC ID: 2ABX8SH-000000012**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.10.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **sengled pulse flex** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **sengled pulse flex FCC ID: 2ABX8SH-000000012** unit complies with the requirement of §15.203.

5. Test Equipment Calibration Date

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2015/11/07
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2015/11/07
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2015/11/07
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06114	1 year	2015/11/20

Radiated Emission

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MRTSUE06028	1 year	2015/12/09
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2015/11/07
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2016/04/15
Preamplifier	Agilent	83017A	MRTSUE06019	1 year	2015/12/13
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2015/11/08
TRILOG Antenna	Schwarzbeck	VULB9162	MRTSUE06022	1 year	2015/11/08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2015/11/08
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2016/01/05
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06115	1 year	2015/11/20

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2016/05/08
USB Wideband Power Sensor	Boonton	55006	MRTSUE06109	1 year	2016/05/08
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06112	1 year	2015/11/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 40GHz: 4.76dB

7. TEST RESULT

7.1. Summary

Company Name: Zhejiang shenghui lighting Co., Ltd. Shanghai Branch

FCC ID: 2ABX8SH-000000012

IC 12219A-000000012

Data Rate(s) Tested: 6Mbps ~ 54Mbps (a);
6.5/7.2Mbps ~ 65.0/72.2Mbps (n-HT20);
13.5/15.0Mbps ~ 135.0/150.0Mbps (n-HT40)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(iv), (3)	Maximum Conducted Output Power	$\leq 24\text{ dBm U-NII-1}$ $\leq 30\text{ dBm U-NII-3}$		Pass	Section 7.5
15.407(a)(1)(iv), (3), (5)	Peak Power Spectral Density	$\leq 11\text{ dBm/MHz U-NII-1}$ $\leq 30\text{ dBm/500kHz U-NII-3}$		Pass	Section 7.6
15.407(g)	Frequency Stability	N/A		Pass	Section 7.7
15.407(b)(1), (4)	Undesirable Emissions	$\leq -27\text{dBm/MHz EIRP}$ $\leq -17\text{dBm/MHz EIRP}$	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
RSS-247 §6.2	99% Bandwidth	N/A	Conducted	Pass	Section 7.2
RSS-247 §6.2.4	6dB Bandwidth	>500kHz		Pass	Section 7.3
RSS-247 §6.2.1	Operation Frequency Range of 26dB BW	26dBc frequency range above 5250MHz		Pass	Section 7.4
RSS-247 §6.2.1, §6.2.4	Max Conducted Output Power	5725~5850MHz ≤ 30 dBm		Pass	Section 7.5
	Maximum E.I.R.P	5150~5250MHz ≤ 23 dBm or 10 + 10 log10(99% B)			
RSS-247 §6.2.1, §6.2.4	Peak Power Spectral Density	5150~5250MHz ≤ 10 dBm/MHz 5725~5850MHz ≤ 30 dBm/500kHz		Pass	Section 7.6
RSS-Gen [8.11]	Frequency Stability	N/A		Pass	Section 7.7
RSS-247 §6.2.1, §6.2.4	Out-of-Band Emissions	≤ -27dBm/MHz EIRP ≤ -17dBm/MHz EIRP	Radiated	Pass	Section 7.8 & 7.9
RSS-247 §6.2.1, §6.2.4	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in RSS-Gen [8.9]		Pass	
RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< RSS-Gen [8.8] limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v01 – Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

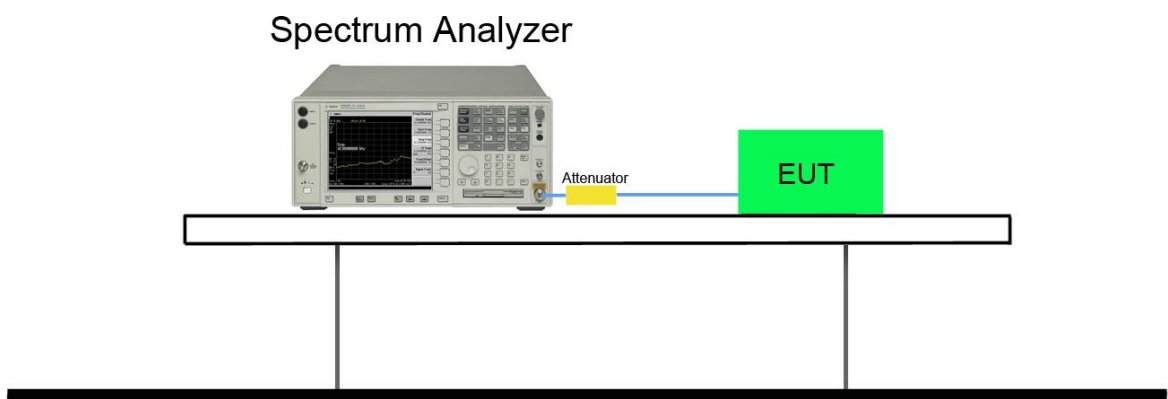


7.2.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 1						
802.11a	6	36	5180	19.39	16.48	Pass
802.11a	6	44	5220	19.52	16.56	Pass
802.11a	6	48	5240	19.69	16.56	Pass
802.11a	6	149	5745	19.66	16.64	Pass
802.11a	6	157	5785	19.55	16.58	Pass
802.11a	6	165	5825	19.53	16.59	Pass
802.11n-HT20	6.5	36	5180	19.84	17.58	Pass
802.11n-HT20	6.5	44	5220	19.88	17.59	Pass
802.11n-HT20	6.5	48	5240	19.82	17.57	Pass
802.11n-HT20	6.5	149	5745	19.86	17.54	Pass
802.11n-HT20	6.5	157	5785	19.49	17.55	Pass
802.11n-HT20	6.5	165	5825	19.91	17.54	Pass
802.11n-HT40	13.5	38	5190	43.27	37.46	Pass
802.11n-HT40	13.5	46	5230	43.22	37.42	Pass
802.11n-HT40	13.5	151	5755	43.34	37.50	Pass
802.11n-HT40	13.5	159	5795	43.39	37.46	Pass


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 2						
802.11a	6	36	5180	19.43	16.59	Pass
802.11a	6	44	5220	19.60	16.51	Pass
802.11a	6	48	5240	19.48	16.51	Pass
802.11a	6	149	5745	19.29	16.56	Pass
802.11a	6	157	5785	19.51	16.55	Pass
802.11a	6	165	5825	19.44	16.56	Pass
802.11n-HT20	6.5	36	5180	19.74	17.59	Pass
802.11n-HT20	6.5	44	5220	19.89	17.57	Pass
802.11n-HT20	6.5	48	5240	19.71	17.54	Pass
802.11n-HT20	6.5	149	5745	19.56	17.56	Pass
802.11n-HT20	6.5	157	5785	19.88	17.53	Pass
802.11n-HT20	6.5	165	5825	19.84	17.57	Pass
802.11n-HT40	13.5	38	5190	43.13	37.40	Pass
802.11n-HT40	13.5	46	5230	43.26	37.41	Pass
802.11n-HT40	13.5	151	5755	43.15	37.40	Pass
802.11n-HT40	13.5	159	5795	43.06	37.46	Pass

802.11a 26dB Bandwidth & 99% Bandwidth - Ant 1


Channel 36 (5180MHz)

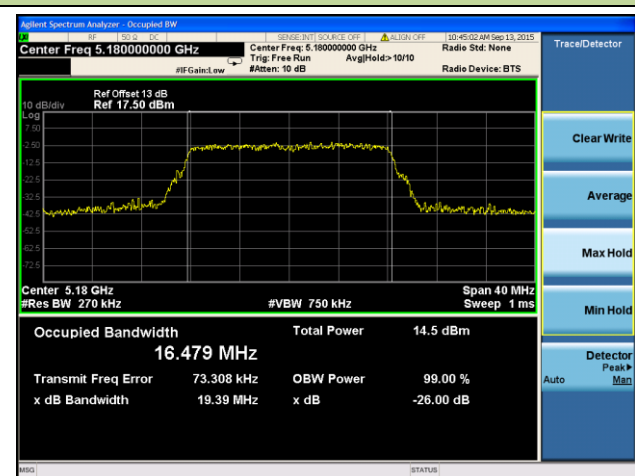


Channel 44 (5220MHz)

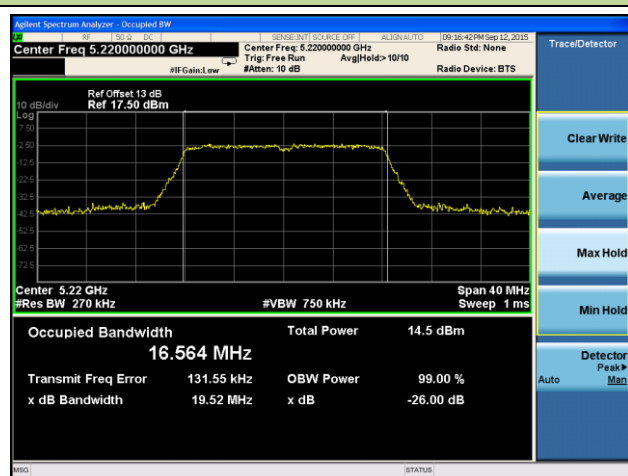


Channel 48 (5240MHz)

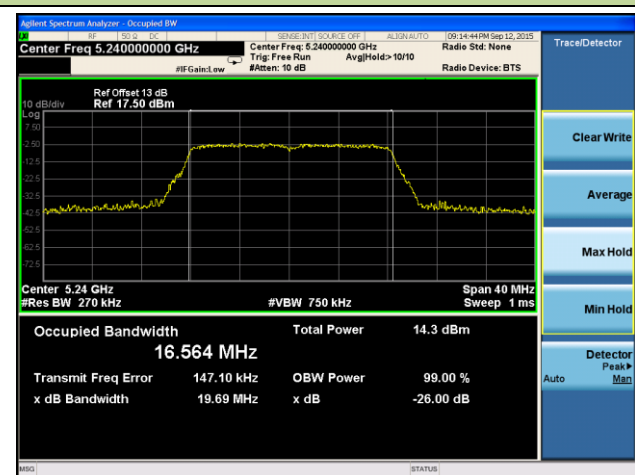


Channel 149 (5745MHz)

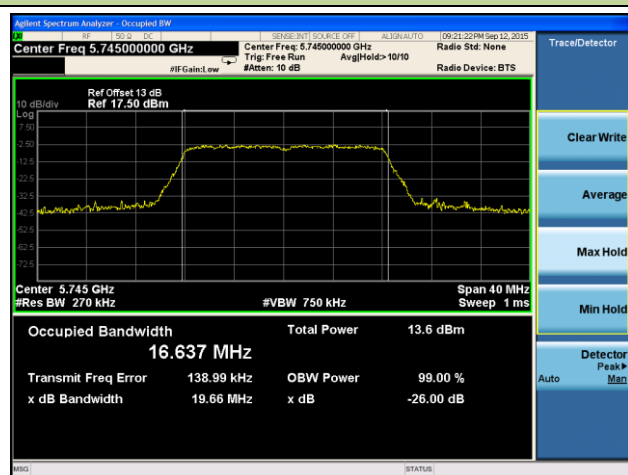

Channel 157 (5785MHz)

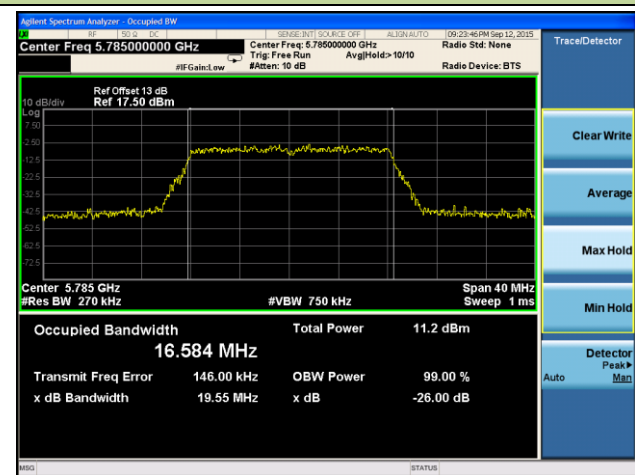


Channel 165 (5825MHz)

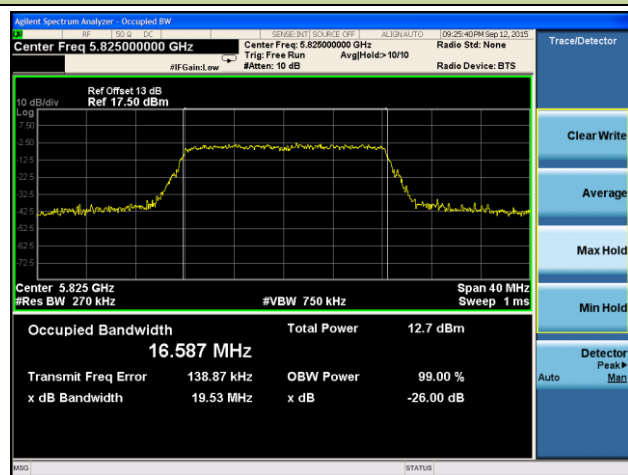


802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 1


Channel 36 (5180MHz)

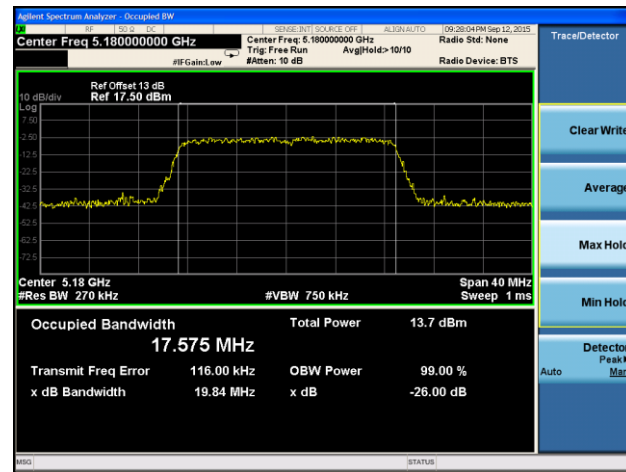


Channel 44 (5220MHz)

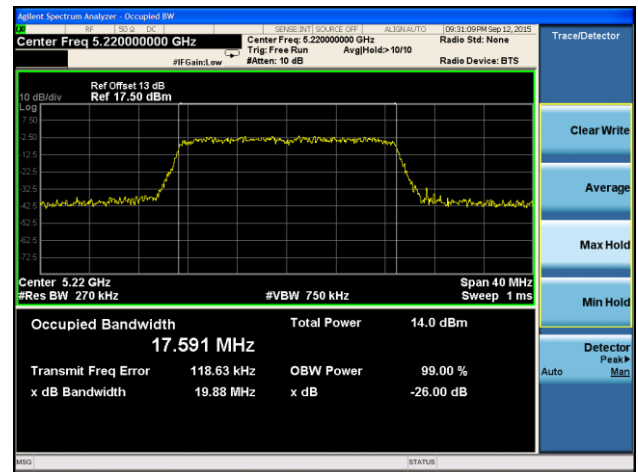


Channel 48 (5240MHz)

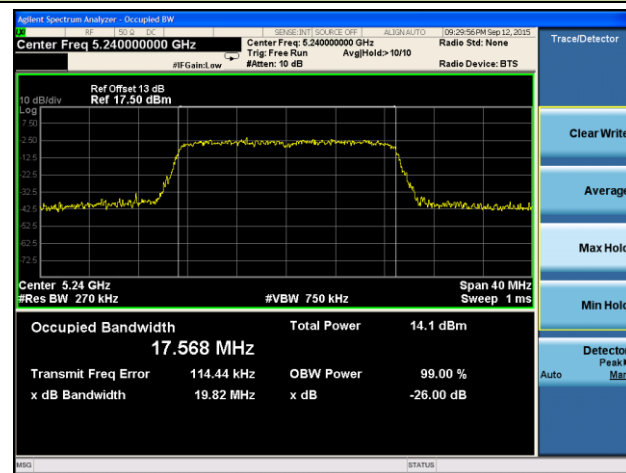


Channel 149 (5745MHz)

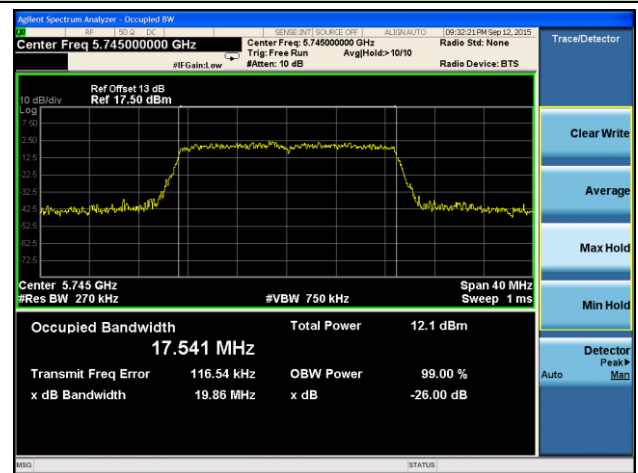

Channel 157 (5785MHz)

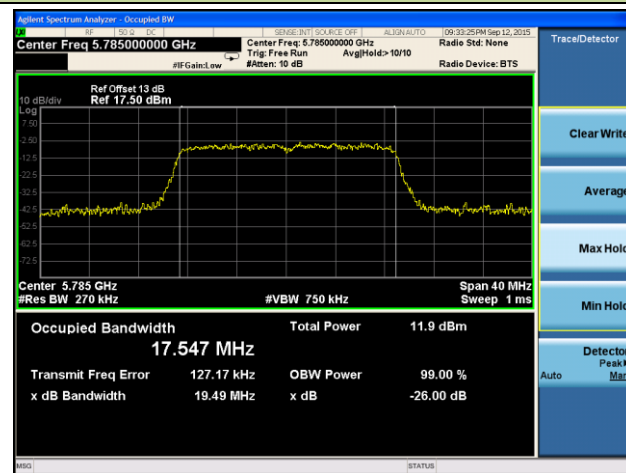


Channel 165 (5825MHz)

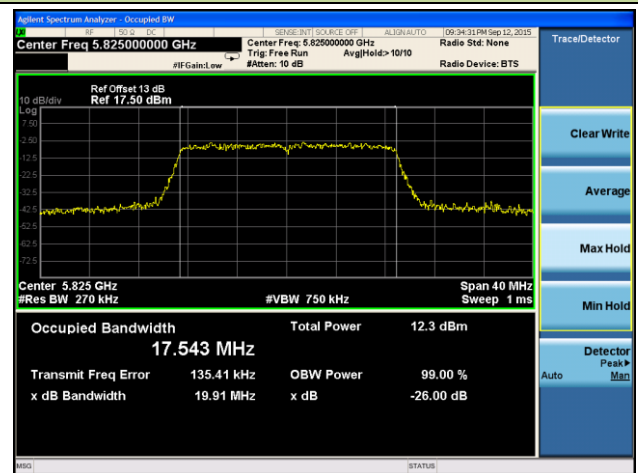


802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 1


Channel 38 (5190MHz)

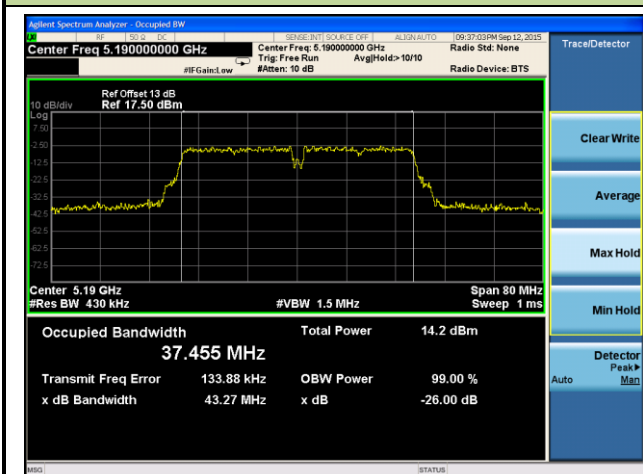


Channel 46 (5230MHz)

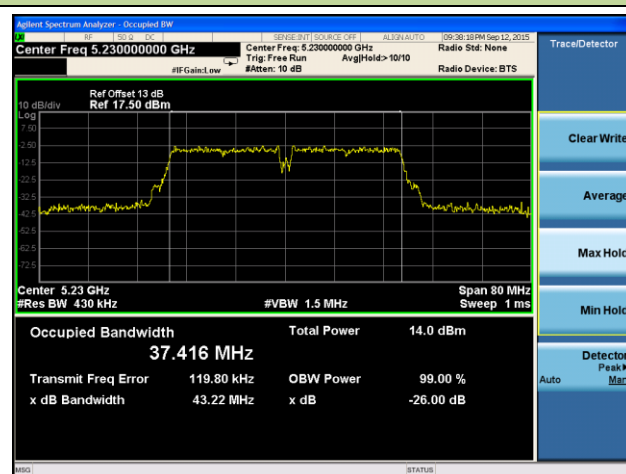

Channel 151 (5755MHz)

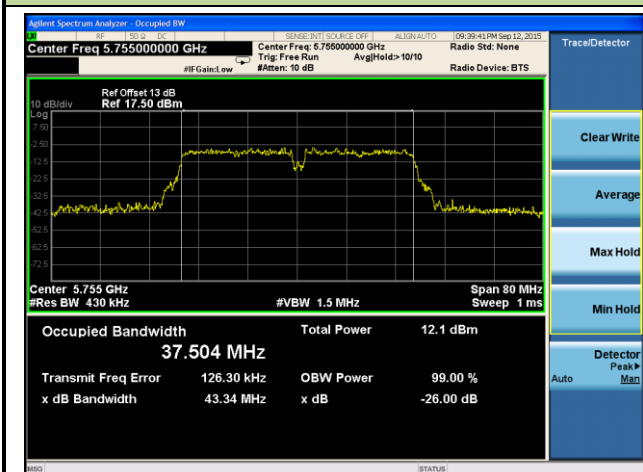


Channel 159 (5795MHz)

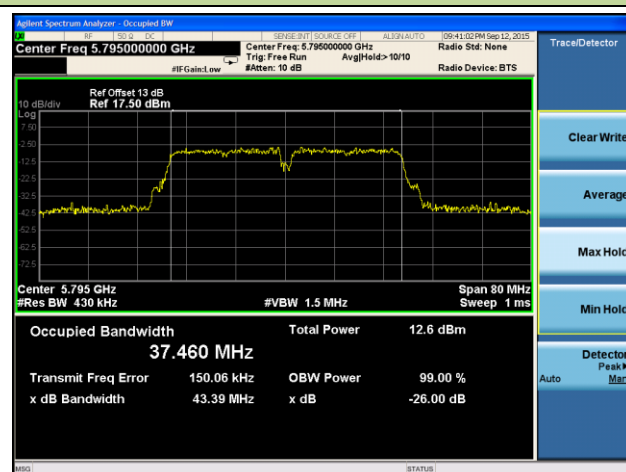


802.11a 26dB Bandwidth & 99% Bandwidth - Ant 2


Channel 36 (5180MHz)

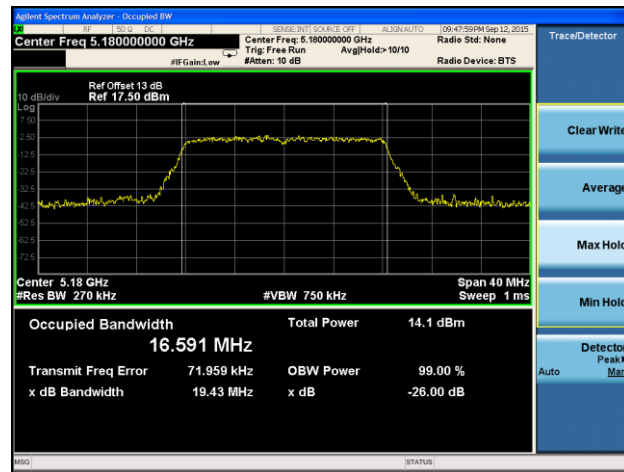


Channel 44 (5220MHz)

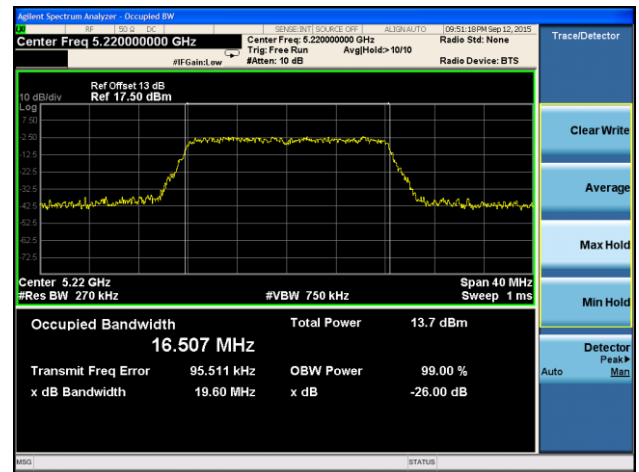


Channel 48 (5240MHz)

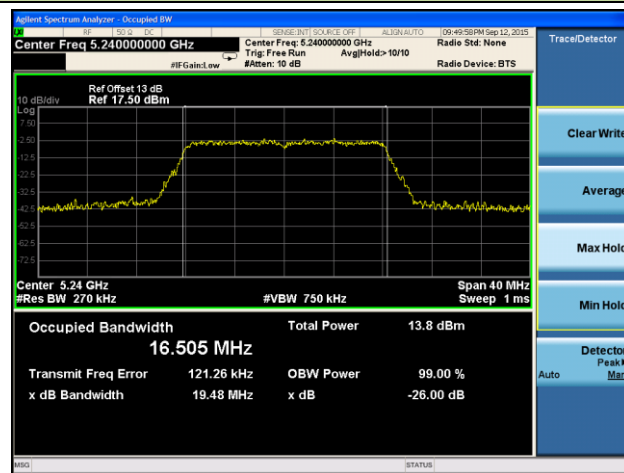


Channel 149 (5745MHz)

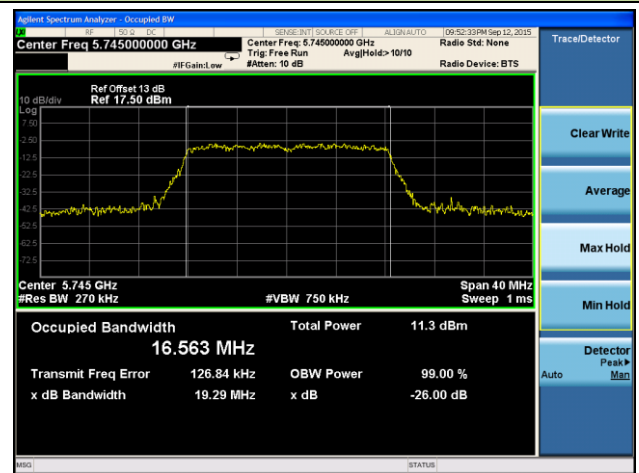

Channel 157 (5785MHz)

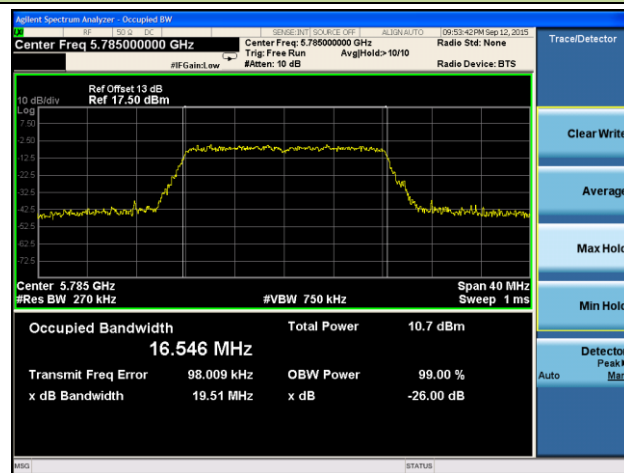


Channel 165 (5825MHz)

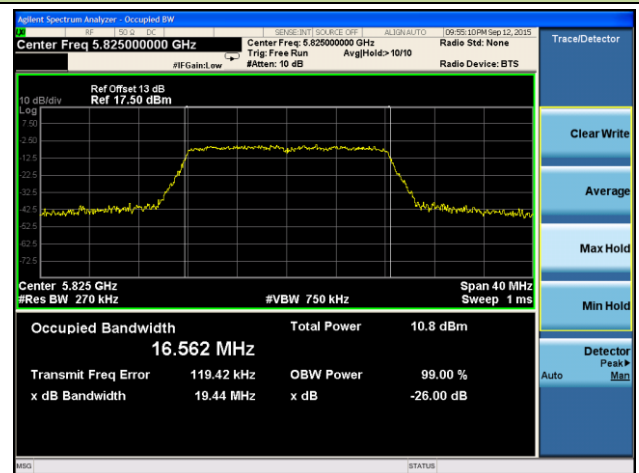


802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 2


Channel 36 (5180MHz)

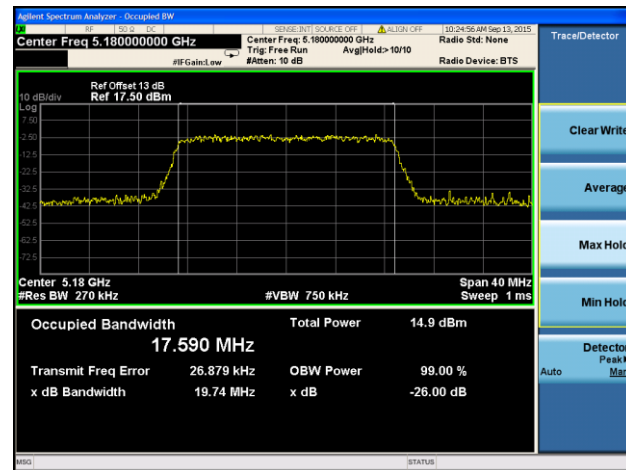


Channel 44 (5220MHz)

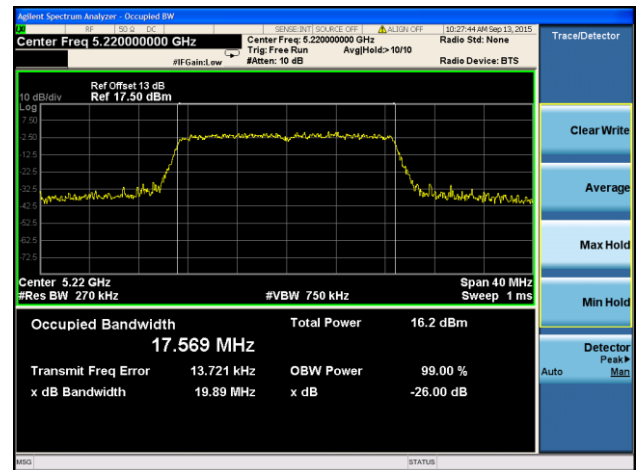


Channel 48 (5240MHz)

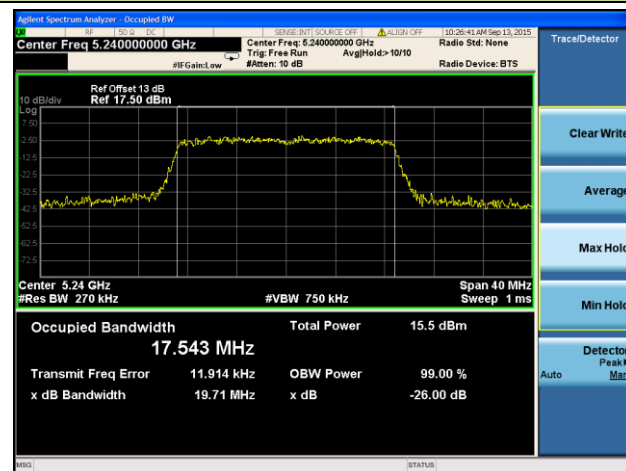


Channel 149 (5745MHz)

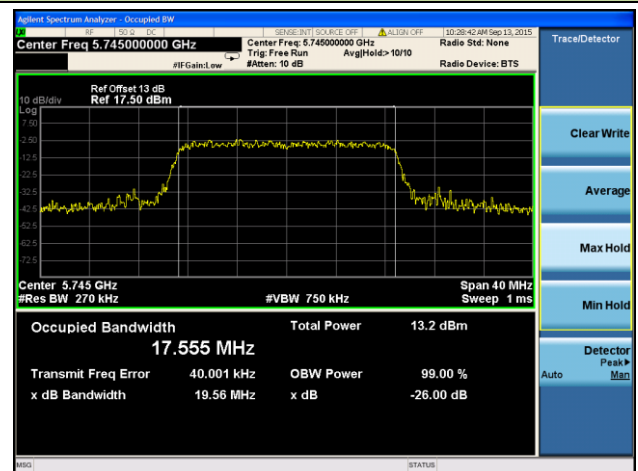

Channel 157 (5785MHz)

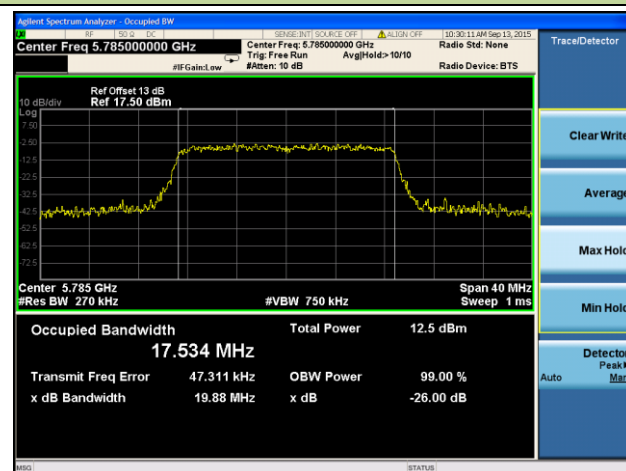


Channel 165 (5825MHz)

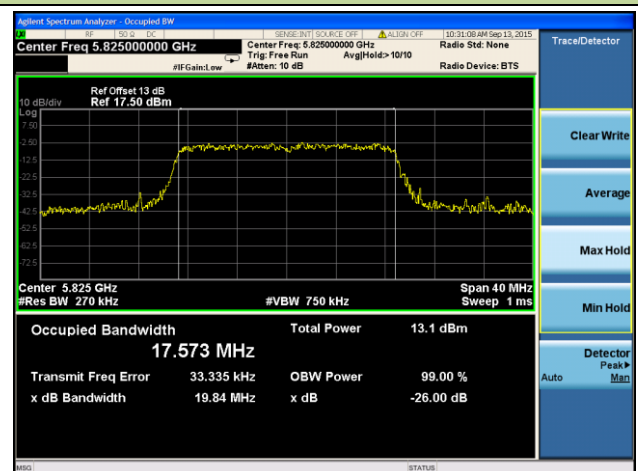


802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 2


Channel 38 (5190MHz)

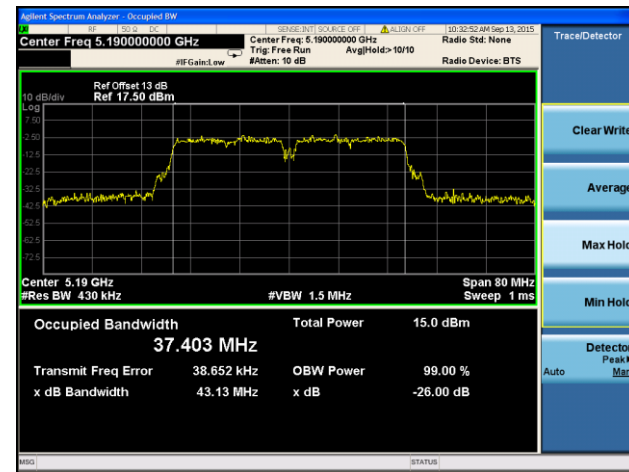


Channel 46 (5230MHz)

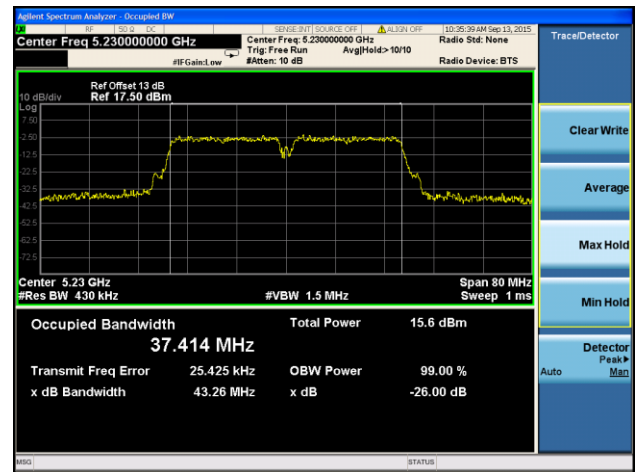

Channel 151 (5755MHz)

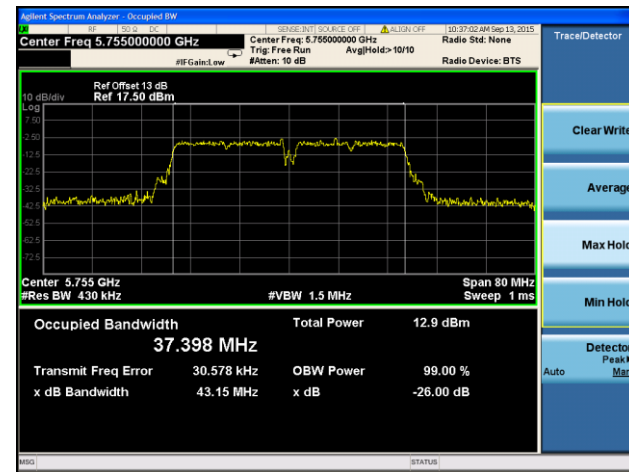

Channel 159 (5795MHz)

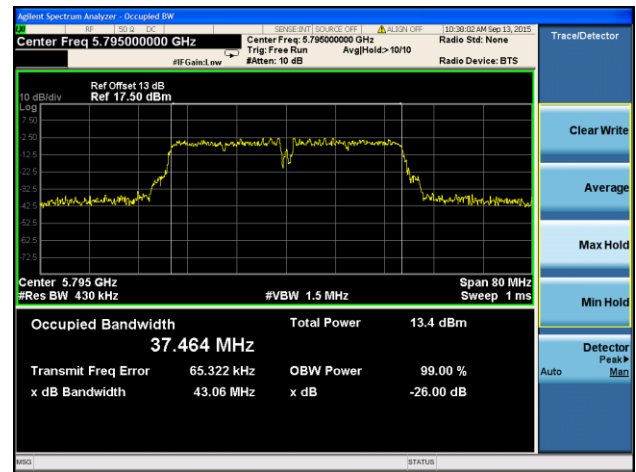

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v01 – Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

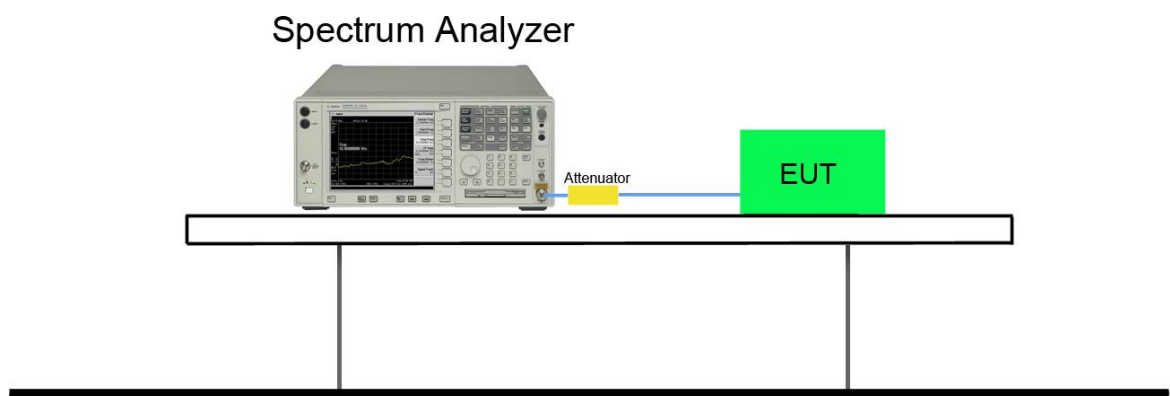


7.3.5. Test Result


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 1						
802.11a	6	149	5745	16.32	≥ 0.5	Pass
802.11a	6	157	5785	15.83	≥ 0.5	Pass
802.11a	6	165	5825	16.31	≥ 0.5	Pass
802.11n-HT20	6.5	149	5745	16.80	≥ 0.5	Pass
802.11n-HT20	6.5	157	5785	16.88	≥ 0.5	Pass
802.11n-HT20	6.5	165	5825	15.81	≥ 0.5	Pass
802.11n-HT40	13.5	151	5755	34.74	≥ 0.5	Pass
802.11n-HT40	13.5	159	5795	31.39	≥ 0.5	Pass
Ant 2						
802.11a	6	149	5745	16.32	≥ 0.5	Pass
802.11a	6	157	5785	16.29	≥ 0.5	Pass
802.11a	6	165	5825	16.30	≥ 0.5	Pass
802.11n-HT20	6.5	149	5745	16.95	≥ 0.5	Pass
802.11n-HT20	6.5	157	5785	16.86	≥ 0.5	Pass
802.11n-HT20	6.5	165	5825	16.99	≥ 0.5	Pass
802.11n-HT40	13.5	151	5755	29.73	≥ 0.5	Pass
802.11n-HT40	13.5	159	5795	34.05	≥ 0.5	Pass

802.11a 6dB Bandwidth - Ant 1


Channel 149 (5745MHz)

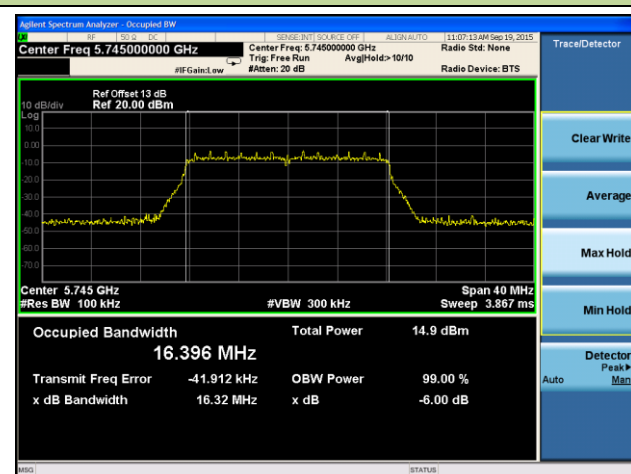

Channel 157 (5785MHz)

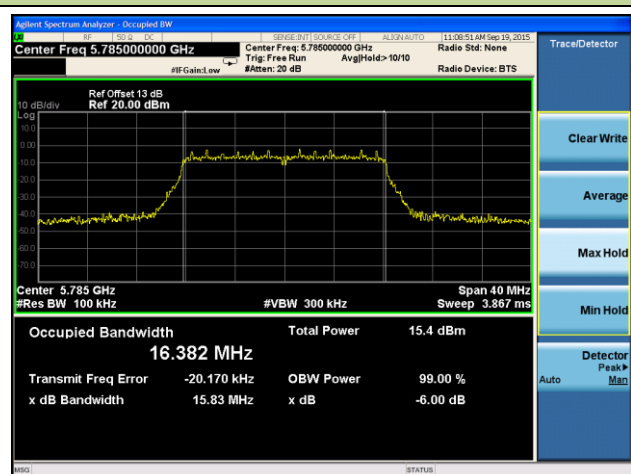


Channel 165 (5825MHz)

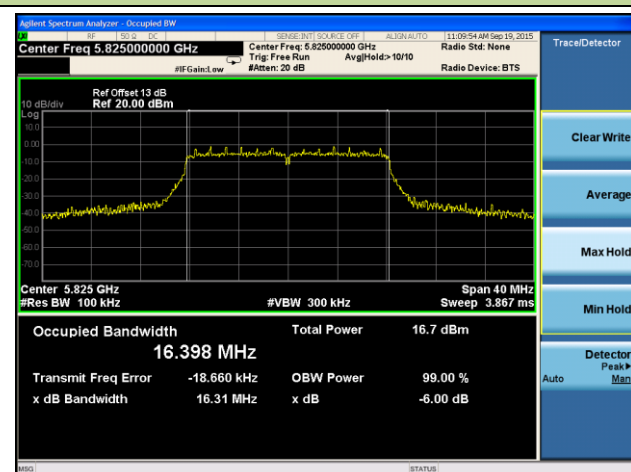


802.11n-HT20 6dB Bandwidth - Ant 1


Channel 149 (5745MHz)

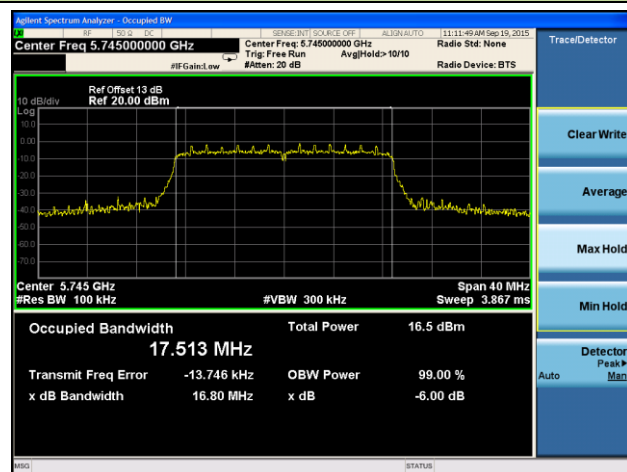

Channel 157 (5785MHz)

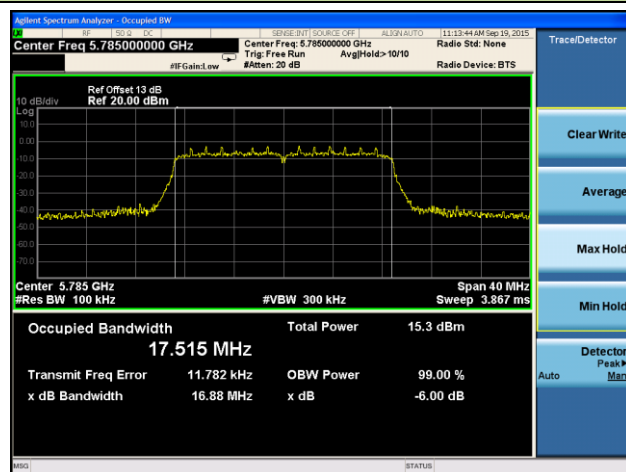


Channel 165 (5825MHz)

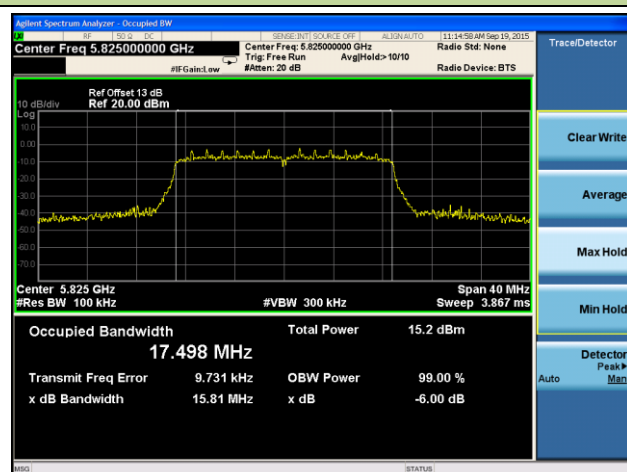


802.11n-HT40 6dB Bandwidth - Ant 1

Channel 151 (5755MHz)

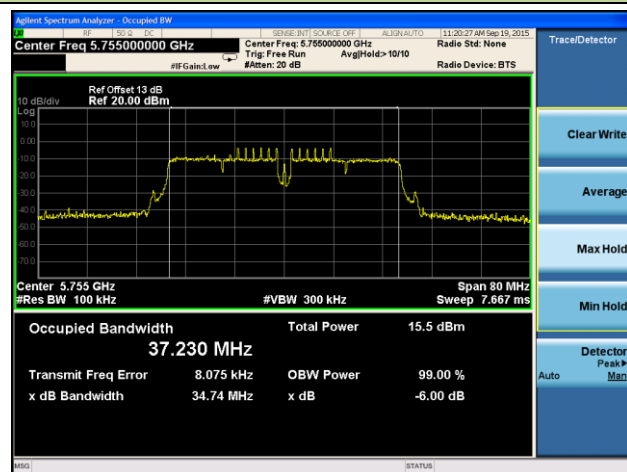


Channel 159 (5795MHz)

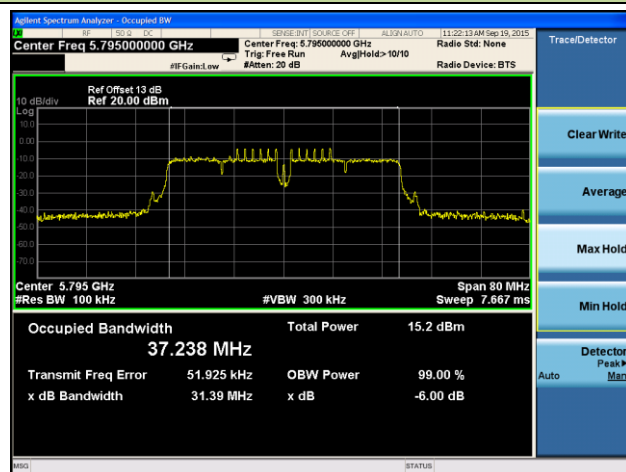


802.11a 6dB Bandwidth - Ant 2


Channel 149 (5745MHz)

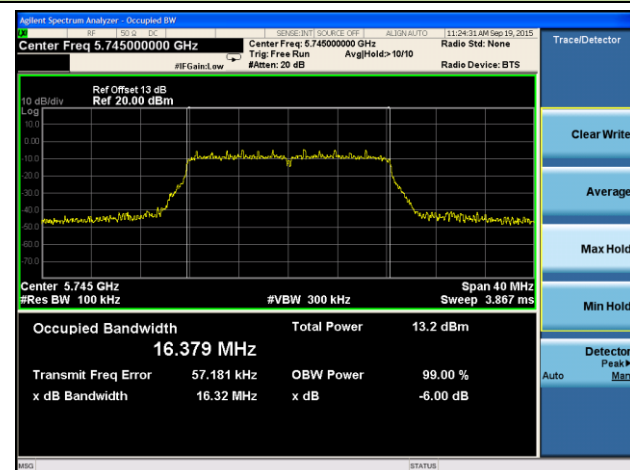

Channel 157 (5785MHz)

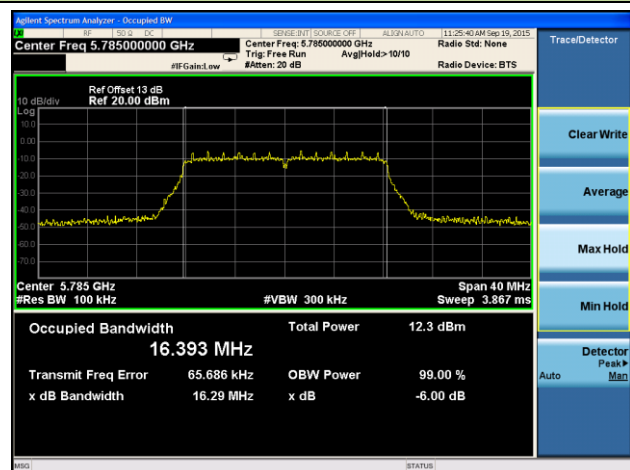


Channel 165 (5825MHz)

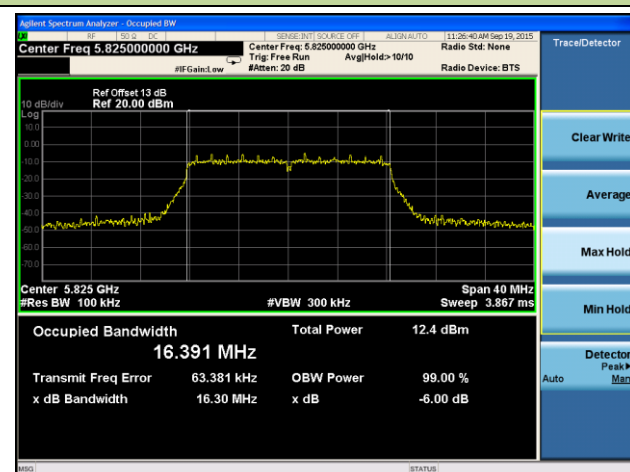


802.11n-HT20 6dB Bandwidth - Ant 2


Channel 149 (5745MHz)

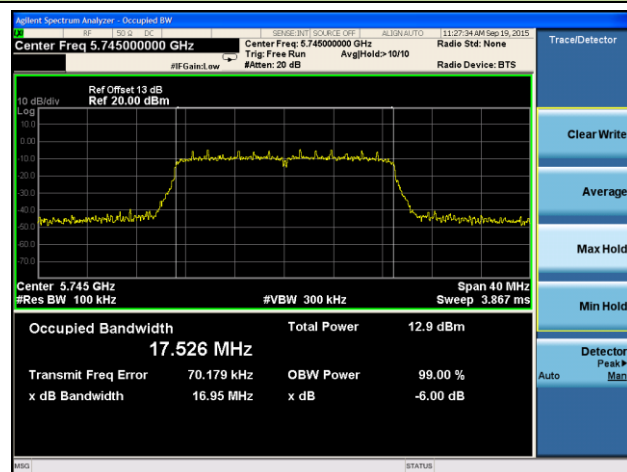

Channel 157 (5785MHz)

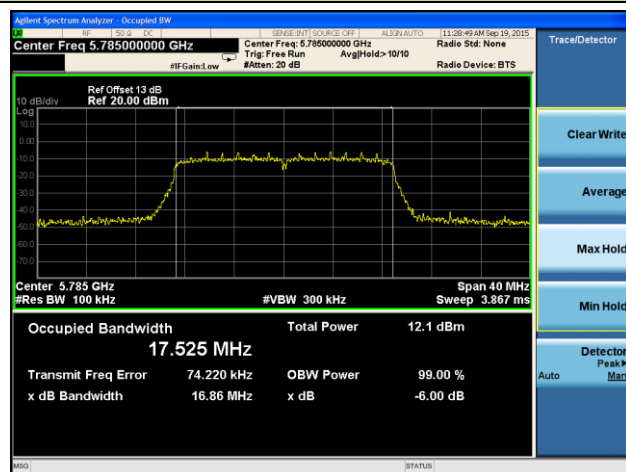


Channel 165 (5825MHz)

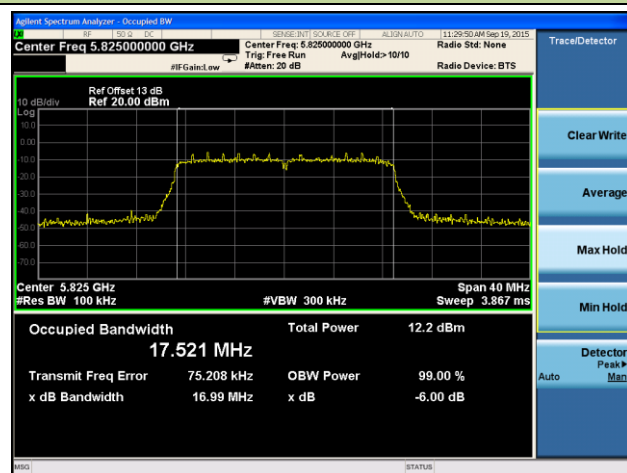


802.11n-HT40 6dB Bandwidth - Ant 2

Channel 151 (5755MHz)

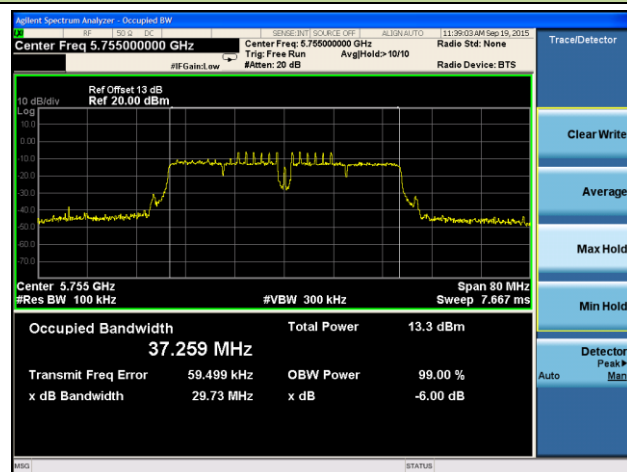

Channel 159 (5795MHz)

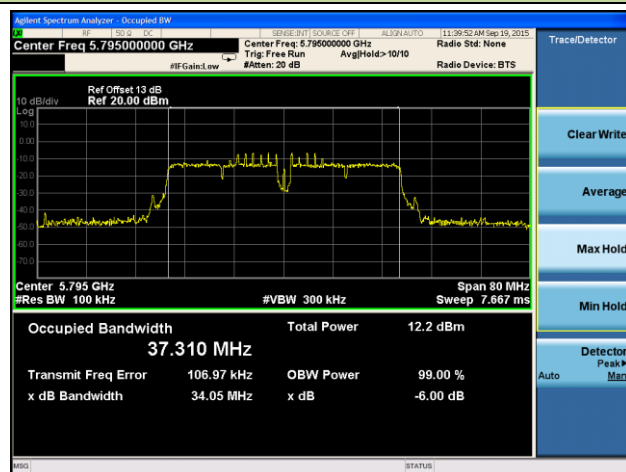

7.4. Operation Frequency Range of 26dBc Bandwidth Measurement

7.4.1. Test Limit

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz.


7.4.2. Test Procedure used

N/A

7.4.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. Span = 1.5 times to 5.0 times the OBW.
3. RBW = 1 % to 5 % of the OBW.
4. VBW $\geq 3 \times$ RBW.
5. Detector = Peak.
6. Trace mode = max hold.
7. Allow the trace to stabilize and set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
8. Determine the “-26 dB down amplitude” using [(reference value) - 26].
9. Using the marker function of the instrument to show 5250MHz frequency level.

7.4.4. Test Setup

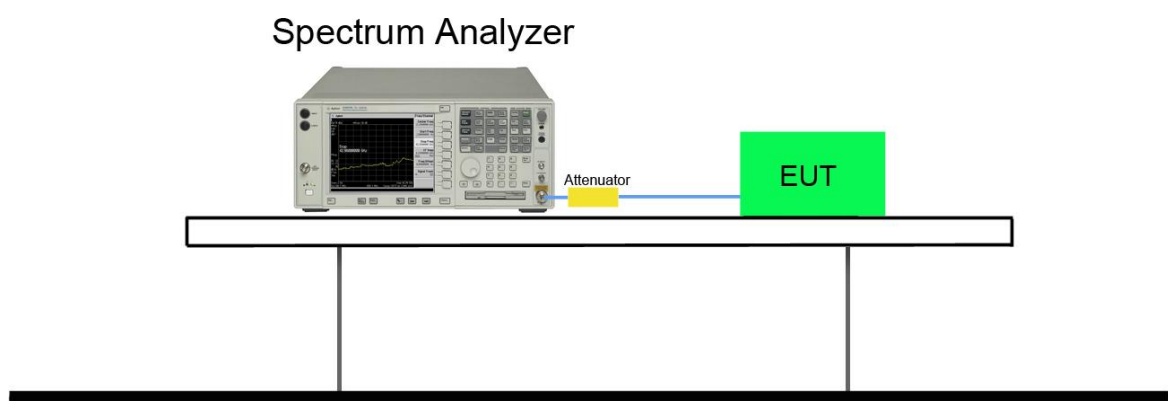


7.4.5. Test Result


Type of Modulation	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Result
Ant 1				
802.11a	6	48	5240	Pass
802.11n-HT20	6.5	48	5240	Pass
802.11n-HT40	13.5	46	5230	Pass
Ant 2				
802.11a	6	48	5240	Pass
802.11n-HT20	6.5	48	5240	Pass
802.11n-HT40	13.5	46	5230	Pass

Operation Frequency Range of 26dBc Bandwidth - Ant 1


802.11a - Channel 48 (5240MHz)

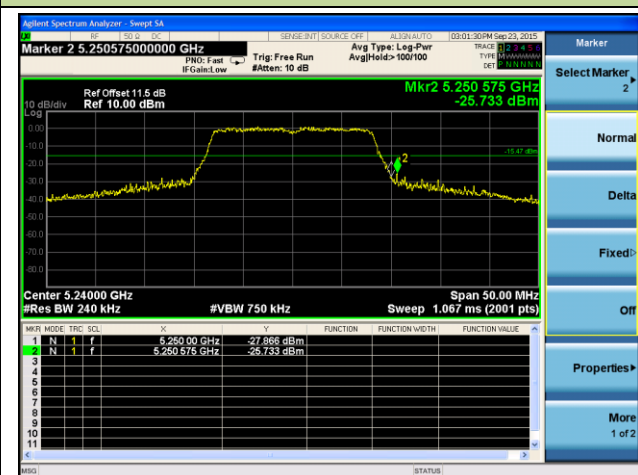

802.11n-HT20 - Channel 48 (5240MHz)

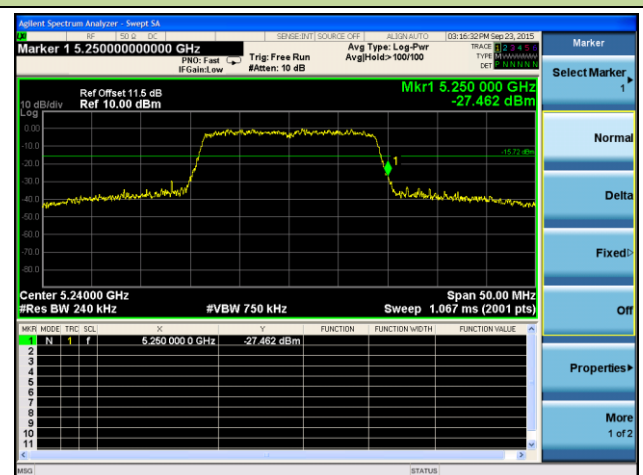


802.11n-HT40 - Channel 46 (5230MHz)

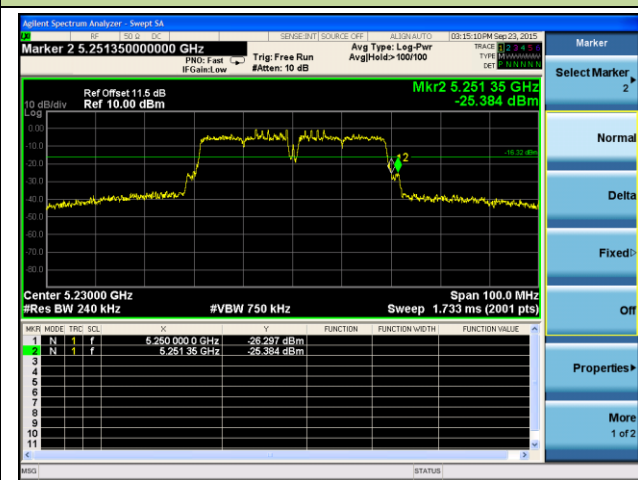


Operation Frequency Range of 26dBc Bandwidth - Ant 2


802.11a - Channel 48 (5240MHz)

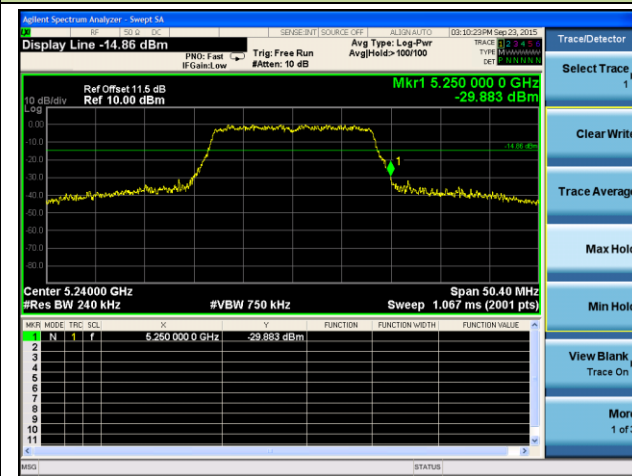

802.11n-HT20 - Channel 48 (5240MHz)

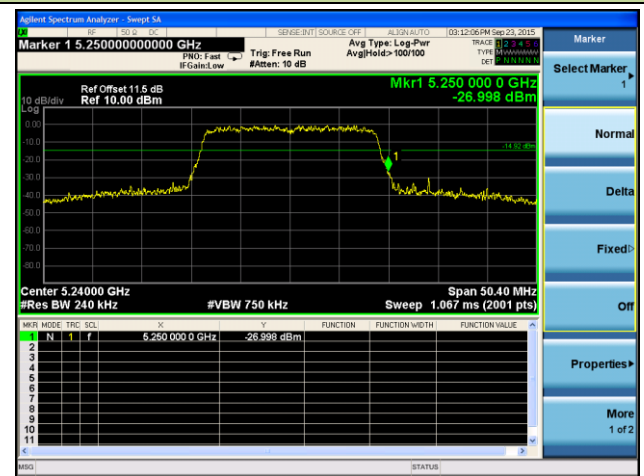

802.11n-HT40 - Channel 46 (5230MHz)

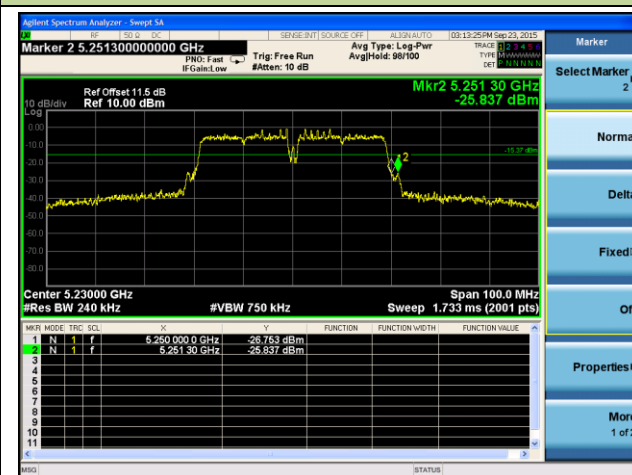

7.5. Output Power Measurement

7.5.1. Test Limit

For FCC

For mobile and portable client devices operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

For IC

For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW (23.01dBm) or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the 5.725-5.85 GHz band, the maximum conducted output power shall not exceed 1 W.


7.5.2. Test Procedure Used

KDB 789033 D02v01 - Section E) 3) b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

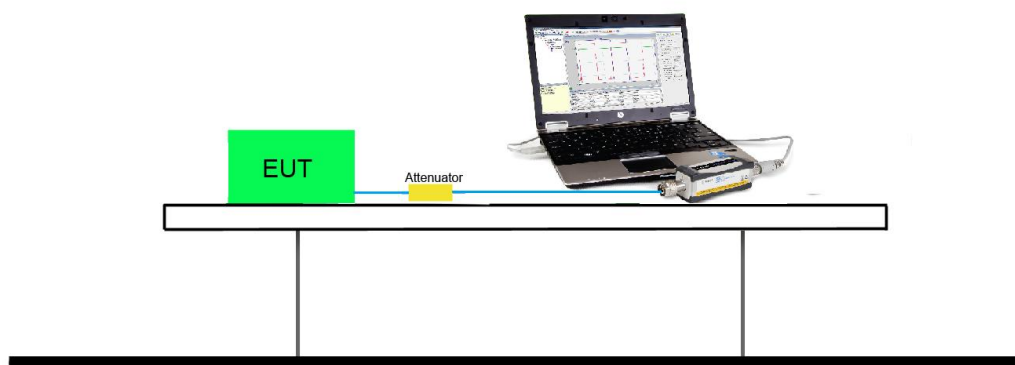

7.5.5. Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (yellow marker) for final test of each channel.

N _{Tx}	802.11a	MCS Index for 802.11n	Data Rate (Mbps)			
			20MHz Bandwidth		40MHz Bandwidth	
			800ns GI	400ns GI	800ns GI	400ns GI
1	6	0	6.5	7.2	13.5	15.0
1	9	1	13.0	14.4	27.0	30.0
1	12	2	19.5	21.7	40.5	45.0
1	18	3	26.0	28.9	54.0	60.0
1	24	4	39.0	43.3	81.0	90.0
1	36	5	52.0	57.8	108.0	120.0
1	48	6	58.5	65.0	121.5	135.0
1	54	7	65.0	72.2	135.0	150.0

Output power at various data rates for Ant 1

Test Mode	Bandwidth	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)
802.11a	20	60	5180	6	10.37
				24	10.13
				54	10.04
802.11n	20	60	5180	6.5	10.72
				7.2	10.50
				39.0	10.28
				43.3	10.24
				65.0	10.07
				72.2	10.02
802.11n	40	62	5190	13.5	9.72
				15.0	9.59
				81.0	9.34
				90.0	9.27
				135.0	9.22
				150.0	9.08

For 5180~5240MHz Band

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Average Power (dBm)	Average Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Result
Ant 1								
802.11a	6	36	5180	10.37	≤ 24.00	14.37	≤ 23.01	Pass
802.11a	6	44	5220	10.59	≤ 24.00	14.59	≤ 23.01	Pass
802.11a	6	48	5240	10.53	≤ 24.00	14.53	≤ 23.01	Pass
802.11n-HT20	6.5	36	5180	10.72	≤ 24.00	14.72	≤ 23.01	Pass
802.11n-HT20	6.5	44	5220	10.89	≤ 24.00	14.89	≤ 23.01	Pass
802.11n-HT20	6.5	48	5240	10.28	≤ 24.00	14.28	≤ 23.01	Pass
802.11n-HT40	13.5	38	5190	9.72	≤ 24.00	13.72	≤ 23.01	Pass
802.11n-HT40	13.5	46	5230	9.68	≤ 24.00	13.68	≤ 23.01	Pass
Ant 2								
802.11a	6	36	5180	11.32	≤ 30.00	14.66	≤ 23.01	Pass
802.11a	6	40	5200	11.39	≤ 30.00	14.73	≤ 23.01	Pass
802.11a	6	44	5220	11.14	≤ 30.00	14.48	≤ 23.01	Pass
802.11n-HT20	6.5	36	5180	10.08	≤ 30.00	13.42	≤ 23.01	Pass
802.11n-HT20	6.5	40	5200	10.54	≤ 30.00	13.88	≤ 23.01	Pass
802.11n-HT20	6.5	44	5220	11.08	≤ 30.00	14.42	≤ 23.01	Pass
802.11n-HT40	13.5	38	5190	10.58	≤ 30.00	13.92	≤ 23.01	Pass
802.11n-HT40	13.5	46	5230	10.63	≤ 30.00	13.97	≤ 23.01	Pass

For 5745~5825MHz Band

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 1						
802.11a	6	149	5745	9.26	≤ 30.00	Pass
802.11a	6	157	5785	8.44	≤ 30.00	Pass
802.11a	6	165	5825	8.23	≤ 30.00	Pass
802.11n-HT20	6.5	149	5745	8.36	≤ 30.00	Pass
802.11n-HT20	6.5	157	5785	6.64	≤ 30.00	Pass
802.11n-HT20	6.5	165	5825	6.67	≤ 30.00	Pass
802.11n-HT40	13.5	151	5755	6.72	≤ 30.00	Pass
802.11n-HT40	13.5	159	5795	6.49	≤ 30.00	Pass
Ant 2						
802.11a	6	149	5745	9.15	≤ 30.00	Pass
802.11a	6	157	5785	8.27	≤ 30.00	Pass
802.11a	6	165	5825	8.18	≤ 30.00	Pass
802.11n-HT20	6.5	149	5745	8.28	≤ 30.00	Pass
802.11n-HT20	6.5	157	5785	7.17	≤ 30.00	Pass
802.11n-HT20	6.5	165	5825	7.22	≤ 30.00	Pass
802.11n-HT40	13.5	151	5755	7.31	≤ 30.00	Pass
802.11n-HT40	13.5	159	5795	7.28	≤ 30.00	Pass

7.6. Power Spectral Density Measurement

7.6.1. Test Limit

For FCC

For mobile and portable client devices operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For IC

For the band 5.15-5.25 GHz, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the 5.725-5.85 GHz band, the power spectral density shall not exceed 30 dBm in any 500 kHz band.

7.6.2. Test Procedure Used

KDB 789033 D02v01 - Section F

7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
RBW = 100 kHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (RMS)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

11. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 7 \text{ dB}$ to the measured result

7.6.4. Test Setup

