



RF TEST REPORT

Product Name: Bluetooth module

Model Name: LK8728B

FCC ID: 2ABYNLK8728B

IC: 20034-LK8728B

Issued For : GODOX PHOTO EQUIPMENT CO.,LTD
1st to 4th Floor, Building 2/1st to 4th Floor, Building
4 ,Yaochuan Industrial Zone, Tangwei Community, Fuhai
Street, Baoan District, Shenzhen, 518103 China

Issued By : Shenzhen LGT Test Service Co., Ltd.
Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT25B046RF01

Sample Received Date: Feb. 17, 2025

Date of Test: Feb. 17, 2025 ~ Mar. 04, 2025

Date of Issue: Mar. 04, 2025

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: GODOX PHOTO EQUIPMENT CO.,LTD

Address: 1st to 4th Floor, Building 2/1st to 4th Floor, Building 4 ,Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Baoan District, Shenzhen, 518103 China

Manufacturer: GODOX Photo Equipment Co.,Ltd.

Address: 4th Floor of Building 1, 1st to 4 th Floor of Building 2, 4th Floor of Building 3,1st to 4th Floor of Building 4, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China

Product Name: Bluetooth module

Trademark: **Godox**

Model Name: LK8728B

Sample Status: Normal

Serial Number: LGT2502042-3

| APPLICABLE STANDARDS | |
|--|--------------|
| STANDARD | TEST RESULTS |
| FCC Part 15.247, Subpart C RSS-247 Issue 3, August 2023 RSS-Gen Issue 5, February 2021 ANSI C63.10-2013 | PASS |

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

| | Page |
|--|-----------|
| 1. SUMMARY OF TEST RESULTS | 6 |
| 1.1 TEST FACTORY | 7 |
| 1.2 MEASUREMENT UNCERTAINTY | 7 |
| 2. GENERAL INFORMATION | 8 |
| 2.1 GENERAL DESCRIPTION OF THE EUT | 8 |
| 2.2 DESCRIPTION OF THE TEST MODES | 9 |
| 2.3 TEST SOFTWARE AND POWER LEVEL | 9 |
| 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS | 10 |
| 2.5 EQUIPMENTS LIST | 11 |
| 3. EMC EMISSION TEST | 12 |
| 3.1 CONDUCTED EMISSION MEASUREMENT | 12 |
| 3.2 TEST PROCEDURE | 13 |
| 3.3 TEST SETUP | 13 |
| 3.4 EUT OPERATING CONDITIONS | 13 |
| 3.5 TEST RESULTS | 14 |
| 4. RADIATED EMISSION MEASUREMENT | 16 |
| 4.1 RADIATED EMISSION LIMITS | 16 |
| 4.2 TEST PROCEDURE | 18 |
| 4.3 TEST SETUP | 19 |
| 4.4 EUT OPERATING CONDITIONS | 19 |
| 4.5 FIELD STRENGTH CALCULATION | 20 |
| 4.6 TEST RESULTS | 21 |
| 4.7 TEST RESULTS (BAND EDGE REQUIREMENTS) | 25 |
| 5. CONDUCTED SPURIOUS & BAND EDGE EMISSION | 27 |
| 5.1 LIMIT | 27 |
| 5.2 TEST PROCEDURE | 27 |
| 5.3 TEST SETUP | 27 |
| 5.4 EUT OPERATION CONDITIONS | 27 |
| 5.5 TEST RESULTS | 27 |
| 6. POWER SPECTRAL DENSITY TEST | 28 |
| 6.1 LIMIT | 28 |
| 6.2 TEST PROCEDURE | 28 |
| 6.3 TEST SETUP | 28 |



| | |
|---|-----------|
| 6.4 EUT OPERATION CONDITIONS | 28 |
| 6.5 TEST RESULTS | 28 |
| 7. BANDWIDTH TEST | 29 |
| 7.1 LIMIT | 29 |
| 7.2 TEST PROCEDURE | 29 |
| 7.3 TEST SETUP | 29 |
| 7.4 EUT OPERATION CONDITIONS | 29 |
| 7.5 TEST RESULTS | 29 |
| 8. PEAK OUTPUT POWER TEST | 30 |
| 8.1 LIMIT | 30 |
| 8.2 TEST PROCEDURE | 30 |
| 8.3 TEST SETUP | 30 |
| 8.4 EUT OPERATION CONDITIONS | 30 |
| 8.5 TEST RESULTS | 30 |
| 9. ANTENNA REQUIREMENT | 31 |
| 9.1 STANDARD REQUIREMENT | 31 |
| 9.2 EUT ANTENNA | 31 |
| 10. FREQUENCY STABILITY | 32 |
| 10.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT | 32 |
| 10.2 TEST PROCEDURE | 32 |
| 10.3 TEST RESULT | 32 |
| APPENDIX I - TEST RESULTS | 33 |
| DUTY CYCLE | 33 |
| MAXIMUM PEAK CONDUCTED OUTPUT POWER | 35 |
| -6DB BANDWIDTH | 36 |
| OCCUPIED CHANNEL BANDWIDTH | 38 |
| MAXIMUM POWER SPECTRAL DENSITY LEVEL | 40 |
| BAND EDGE | 42 |
| CONDUCTED RF SPURIOUS EMISSION | 45 |
| FREQUENCY STABILITY | 48 |
| APPENDIX II - MEASUREMENT PHOTOS | 49 |
| APPENDIX III - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS | 50 |



Revision History

| Rev. | Issue Date | Contents |
|------|---------------|---------------|
| 00 | Mar. 04, 2025 | Initial Issue |
| | | |



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

| FCC Part 15.247, Subpart C RSS-247 Issue 3 | | | |
|--|---|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| 15.207 RSS-Gen 8.8 | Conducted Emission | PASS | -- |
| 15.247 (a)(2) RSS-Gen 6.7 RSS-247 5.2 (a) | 6dB&99% Bandwidth | PASS | -- |
| 15.247 (b)(3) RSS-247 5.4 (d) | Output Power | PASS | -- |
| 15.209 RSS-Gen 8.9/8.10 | Radiated Spurious Emission | PASS | -- |
| 15.247 (d) RSS-Gen 8.9/8.10 | Conducted Spurious & Band Edge Emission | PASS | -- |
| 15.247 (e) RSS-247 5.2 (b) | Power Spectral Density | PASS | -- |
| 15.205 RSS-Gen 8.9/8.10 | Restricted Band Edge Emission | PASS | -- |
| Part 15.247(d)/ Part 15.209(a) RSS-247 5.5 RSS-Gen 8.9/8.10 | Band Edge Emission | PASS | -- |
| 15.203 RSS-Gen 6.8 | Antenna Requirement | PASS | -- |
| RSS-Gen 6.11/8.11 | Frequency Stability | PASS | -- |

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

| | |
|----------------------------|--|
| Company Name: | Shenzhen LGT Test Service Co., Ltd. |
| Address: | Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China |
| Accreditation Certificate: | A2LA Certificate No.: 6727.01 |
| | FCC Registration No.: 746540 |
| | CAB ID: CN0136 |

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

| No. | Item | Uncertainty |
|-----|-----------------------------------|----------------------|
| 1 | RF output power, conducted | $\pm 0.68\text{dB}$ |
| 2 | Unwanted Emissions, conducted | $\pm 2.988\text{dB}$ |
| 3 | All emissions, radiated 9K-30MHz | $\pm 2.84\text{dB}$ |
| 4 | All emissions, radiated 30M-1GHz | $\pm 4.39\text{dB}$ |
| 5 | All emissions, radiated 1G-6GHz | $\pm 5.10\text{dB}$ |
| 6 | All emissions, radiated>6G | $\pm 5.48\text{dB}$ |
| 7 | Conducted Emission (9KHz-150KHz) | $\pm 2.79\text{dB}$ |
| 8 | Conducted Emission (150KHz-30MHz) | $\pm 2.80\text{dB}$ |

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

| | |
|-------------------------|---------------------------------------|
| Product Name: | Bluetooth module |
| Trademark: | Godox |
| Model Name: | LK8728B |
| Series Model: | N/A |
| Model Difference: | N/A |
| Product Description: | Operation Frequency: 2402~2480 MHz |
| | Modulation Type: GFSK |
| | Radio Technology: BLE |
| | Bluetooth Configuration: BLE (1M PHY) |
| | Number Of Channel: 40 |
| | Antenna Type: FPC Antenna |
| | Antenna Gain (dBi): 0.36 |
| Channel List: | Please refer to the Note 3. |
| Rating: | DC 3.3V |
| Hardware Version: | LK8728B |
| Software Version: | V1.0 |
| Connecting I/O Port(s): | Please refer to the Note 1. |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



3.

| Channel List | | | | | | | |
|--------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00 | 2402 | 10 | 2422 | 20 | 2442 | 30 | 2462 |
| 01 | 2404 | 11 | 2424 | 21 | 2444 | 31 | 2464 |
| 02 | 2406 | 12 | 2426 | 22 | 2446 | 32 | 2466 |
| 03 | 2408 | 13 | 2428 | 23 | 2448 | 33 | 2468 |
| 04 | 2410 | 14 | 2430 | 24 | 2450 | 34 | 2470 |
| 05 | 2412 | 15 | 2432 | 25 | 2452 | 35 | 2472 |
| 06 | 2414 | 16 | 2434 | 26 | 2454 | 36 | 2474 |
| 07 | 2416 | 17 | 2436 | 27 | 2456 | 37 | 2476 |
| 08 | 2418 | 18 | 2438 | 28 | 2458 | 38 | 2478 |
| 09 | 2420 | 19 | 2440 | 29 | 2460 | 39 | 2480 |

2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

| Worst Mode | Description | Data/Modulation |
|------------|------------------|-----------------|
| Mode 1 | TX CH00(2402MHz) | 1 MHz/GFSK |
| Mode 2 | TX CH19(2440MHz) | 1 MHz/GFSK |
| Mode 3 | TX CH39(2480MHz) | 1 MHz/GFSK |

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have been tested for all available U.S. voltage and frequency (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.
- (3) The battery is fully-charged during the radiated and RF conducted test.

For AC Conducted Emission

| Test Case | |
|-----------------------|------------------------|
| AC Conducted Emission | Mode 4: Keeping BLE TX |

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

| Test software Version | Test program: BLE | |
|-----------------------|-------------------------|---------------|
| EMI_TEST_V1.4 | Mode Or Modulation type | Power setting |
| | 1M | 7 |



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

| Description | Manufacturer | Model | S/N | Rating |
|-------------|--------------|-------|-----|--------|
| | | | | |
| | | | | |
| | | | | |

Auxiliary Equipment

| Description | Manufacturer | Model | S/N | Rating |
|-------------------------|--------------|---------------------|-----|--|
| Laptop | Lenovo | ThinkBook 14 G3 ITL | N/A | N/A |
| Adapter | Lenovo | ADLX65UCGC2A | N/A | Input: 100-240V ~ 50/60Hz 1.8A Output: 5-20V, 6.2-3.25A |
| Telink Burning Board | Telink | B80 | N/A | N/A |
| USB-A to mini USB Cable | N/A | N/A | N/A | 0.3m shielded, without ferrite core |

Note:

- (1) For detachable type I/O cable should be specified the length in cm in «Length» column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST

| Conducted Emission | | | | | |
|---------------------------|---------------------|------------------|---------------------|------------------|-------------------|
| Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Until |
| EMI Test Receiver | R&S | ESU8 | 100372 | 2024.03.09 | 2025.03.08 |
| LISN | COM-POWER | LI-115 | 02032 | 2024.03.09 | 2025.03.08 |
| LISN | SCHWARZBECK | NNLK 8122 | 00160 | 2024.03.09 | 2025.03.08 |
| Transient Limiter | CYBERTEK | EM5010A | E2250100049 | 2024.03.09 | 2025.03.08 |
| Temperature & Humidity | KTJ | TA218B | N.A | 2024.03.09 | 2025.03.08 |
| Testing Software | | | EMC-I_V1.4.0.3_SKET | | |

| Radiated Test equipment | | | | | |
|----------------------------------|---------------------|------------------|---------------------|------------------|-------------------|
| Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Until |
| EMI Test Receiver | R&S | ESU8 | 100372 | 2024.03.09 | 2025.03.08 |
| Active loop Antenna | ETS | 6502 | 00049544 | 2023.10.13 | 2025.10.12 |
| Spectrum Analyzer | Keysight | N9010B | MY60242508 | 2024.08.05 | 2025.08.04 |
| Bilog Antenna(30M-1G) | SCHWARZBECK | VULB 9168 | 2705 | 2022.12.12 | 2025.12.11 |
| Horn Antenna(1-18G) | SCHWARZBECK | 3115 | 10SL0060 | 2022.06.02 | 2025.06.01 |
| Horn Antenna(18-40G) | A-INFO | LB-180400-KF | J211060273 | 2022.06.08 | 2025.06.07 |
| Pre-amplifier(30M-1G) | EMtrace | RP01A | 02019 | 2024.03.09 | 2025.03.08 |
| Pre-amplifier(1-26.5G) | Agilent | 8449B | 3008A4722 | 2024.03.09 | 2025.03.08 |
| Pre-amplifier(18-40G) | com-mw | LNPA_18-40-01 | 18050003 | 2024.03.09 | 2025.03.08 |
| Wireless Communications Test Set | R&S | CMW 500 | 137737 | 2024.03.09 | 2025.03.08 |
| Temperature & Humidity | JINGCHUANG | BT-3 | N.A | 2024.03.11 | 2025.03.10 |
| Testing Software | | | EMC-I_V1.4.0.3_SKET | | |

| RF Conducted Test equipment | | | | | |
|------------------------------------|---------------------|------------------|---------------------|------------------|-------------------|
| Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Until |
| Signal Analyzer | Keysight | N9010B | MY60242508 | 2024.08.05 | 2025.08.04 |
| Signal Analyzer | Keysight | N9020A | MY50530994 | 2024.03.09 | 2025.03.08 |
| RF Automatic Test system | MW | MW100-RFCB | MW220322LG-033 | 2024.03.09 | 2025.03.08 |
| MXG Vector Signal Generator | Keysight | N5182B | MY59100717 | 2024.03.09 | 2025.03.08 |
| Temperature& Humidity test chamber | AISRY | LX-1000L | 171200018 | 2024.03.09 | 2025.03.08 |
| Attenuator | eastsheep | 90db | N.A | 2024.03.09 | 2025.03.08 |
| Temperature & Humidity | JINGCHUANG | BT-3 | N.A | 2024.03.11 | 2025.03.10 |
| Digital multimeter | MASTECH | MS8261 | MBGBC83053 | 2024.03.09 | 2025.03.08 |
| Testing Software | | | MTS8310_V2.0.0.0_MW | | |



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

| FREQUENCY (MHz) | Conducted Emission limit (dBuV) | |
|-----------------|---------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 56.00 | 46.00 |
| 5.0 -30.0 | 60.00 | 50.00 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |



3.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

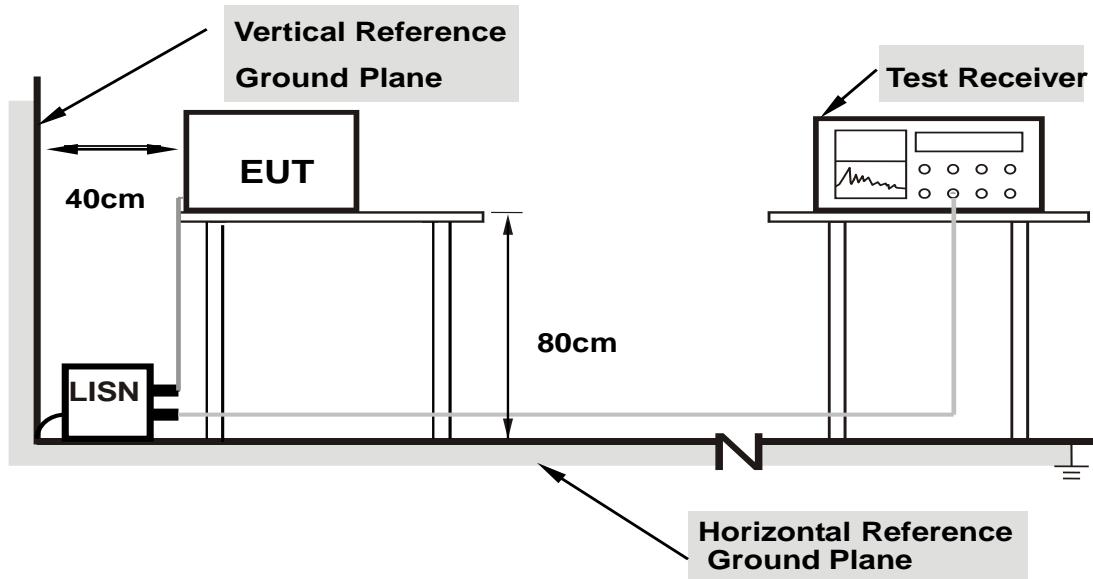

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.5 TEST RESULTS


| | |
|------------------------|-----------------------|
| Project: LGT25B046 | Test Engineer: LiuH |
| EUT: Bluetooth module | Temperature: 23.8°C |
| M/N: LK8728B | Humidity: 65%RH |
| Test Voltage: DC 3.3V | Test Data: 2025-02-28 |
| Test Mode: TX BLE 2402 | |
| Note: | |

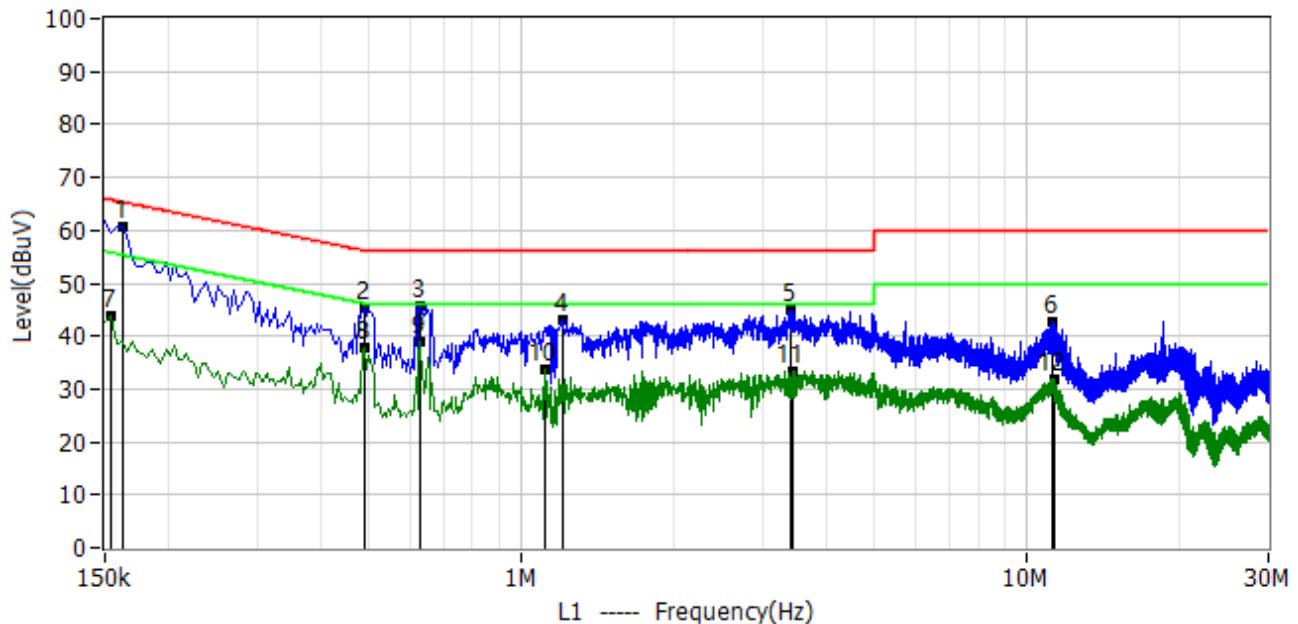

| No. | Frequency MHz | Reading dBuV | Factor dB | Level dBuV | Limit dBuV | Margin dB | Detector | Polar |
|-----|---------------|--------------|-----------|------------|------------|-----------|----------|-------|
| 1* | 0.162 | 50.10 | 10.59 | 60.69 | 65.36 | -4.67 | QP | L1 |
| 2* | 0.490 | 34.82 | 10.57 | 45.39 | 56.17 | -10.78 | QP | L1 |
| 3* | 0.630 | 35.24 | 10.57 | 45.81 | 56.00 | -10.19 | QP | L1 |
| 4* | 1.202 | 32.50 | 10.75 | 43.25 | 56.00 | -12.75 | QP | L1 |
| 5* | 3.422 | 33.68 | 11.17 | 44.85 | 56.00 | -11.15 | QP | L1 |
| 6* | 11.246 | 31.67 | 11.11 | 42.78 | 60.00 | -17.22 | QP | L1 |
| 7* | 0.154 | 33.15 | 10.58 | 43.73 | 55.78 | -12.06 | AV | L1 |
| 8* | 0.490 | 27.14 | 10.57 | 37.71 | 46.17 | -8.46 | AV | L1 |
| 9* | 0.630 | 28.25 | 10.57 | 38.82 | 46.00 | -7.18 | AV | L1 |
| 10* | 1.110 | 23.05 | 10.72 | 33.77 | 46.00 | -12.23 | AV | L1 |
| 11* | 3.446 | 22.32 | 11.17 | 33.49 | 46.00 | -12.51 | AV | L1 |
| 12* | 11.270 | 20.70 | 11.11 | 31.81 | 50.00 | -18.19 | AV | L1 |



| | |
|------------------------|-----------------------|
| Project: LGT25B046 | Test Engineer: LiuH |
| EUT: Bluetooth module | Temperature: 23.8°C |
| M/N: LK8728B | Humidity: 65%RH |
| Test Voltage: DC 3.3V | Test Data: 2025-02-28 |
| Test Mode: TX BLE 2402 | |
| Note: | |

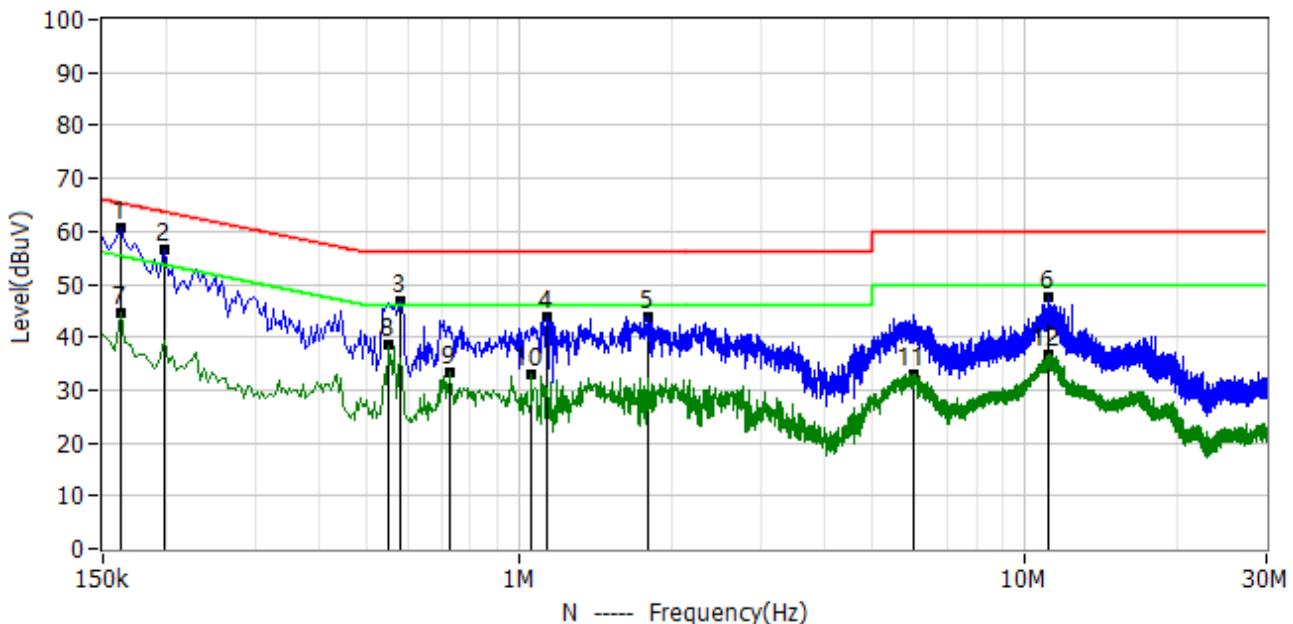

| No. | Frequency MHz | Reading dBuV | Factor dB | Level dBuV | Limit dBuV | Margin dB | Detector | Polar |
|-----|---------------|--------------|-----------|------------|------------|-----------|----------|-------|
| 1* | 0.162 | 49.95 | 10.57 | 60.52 | 65.36 | -4.84 | QP | N |
| 2* | 0.198 | 46.00 | 10.56 | 56.56 | 63.69 | -7.14 | QP | N |
| 3* | 0.582 | 36.10 | 10.55 | 46.65 | 56.00 | -9.35 | QP | N |
| 4* | 1.134 | 33.17 | 10.57 | 43.74 | 56.00 | -12.26 | QP | N |
| 5* | 1.798 | 33.27 | 10.72 | 43.99 | 56.00 | -12.01 | QP | N |
| 6* | 11.086 | 36.57 | 11.07 | 47.64 | 60.00 | -12.36 | QP | N |
| 7* | 0.162 | 33.82 | 10.57 | 44.39 | 55.36 | -10.97 | AV | N |
| 8* | 0.550 | 27.84 | 10.55 | 38.39 | 46.00 | -7.61 | AV | N |
| 9* | 0.730 | 22.59 | 10.56 | 33.15 | 46.00 | -12.85 | AV | N |
| 10* | 1.054 | 22.56 | 10.55 | 33.11 | 46.00 | -12.89 | AV | N |
| 11* | 6.018 | 22.09 | 10.83 | 32.92 | 50.00 | -17.08 | AV | N |
| 12* | 11.126 | 25.78 | 11.07 | 36.85 | 50.00 | -13.15 | AV | N |



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In case the emission fall within the Restricted band specified on Part15.205 (a)&209(a), RSS-Gen and RSS-247 (5.5) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

| Frequencies (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|----------------------|-------------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

| FREQUENCY (MHz) | (dBuV/m) (at 3M) | |
|-----------------|------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

| FREQUENCY (MHz) | FREQUENCY (MHz) | FREQUENCY (MHz) | FREQUENCY (GHz) |
|-------------------|---------------------|-----------------|-----------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | Above 38.6 |
| 13.36-13.41 | | | |



For Radiated Emission

| Spectrum Parameter | Setting |
|---------------------------------------|---|
| Attenuation | Auto |
| Detector | Peak/QP/AV |
| Start Frequency | 9 KHz/150KHz (Peak/QP/AV) |
| Stop Frequency | 150KHz/30MHz (Peak/QP/AV) |
| RB / VB (emission in restricted band) | 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz) |

| Spectrum Parameter | Setting |
|---------------------------------------|--------------------|
| Attenuation | Auto |
| Detector | Peak/QP |
| Start Frequency | 30 MHz (Peak/QP) |
| Stop Frequency | 1000 MHz (Peak/QP) |
| RB / VB (emission in restricted band) | 120 KHz / 300 KHz |

| Spectrum Parameter | Setting |
|---------------------------------------|---|
| Attenuation | Auto |
| Detector | Peak |
| Start Frequency | 1000 MHz (Peak/AV) |
| Stop Frequency | 10th carrier harmonic (Peak/AV) |
| RB / VB (emission in restricted band) | 1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AGV) |

For Restricted band

| Spectrum Parameter | Setting |
|----------------------|--|
| Detector | Peak |
| Start/Stop Frequency | Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz |
| RB / VB | 1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AGV) |

| Receiver Parameter | Setting |
|------------------------|--------------------------------------|
| Start ~ Stop Frequency | 9kHz~90kHz / RB 200Hz for PK & AV |
| Start ~ Stop Frequency | 90kHz~110kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 110kHz~490kHz / RB 200Hz for PK & AV |
| Start ~ Stop Frequency | 490kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |



4.2 TEST PROCEDURE


- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

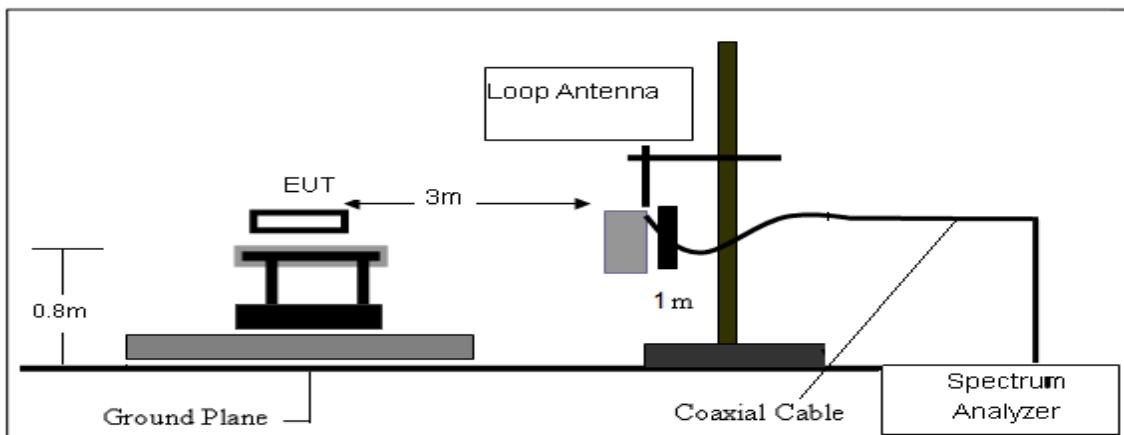

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

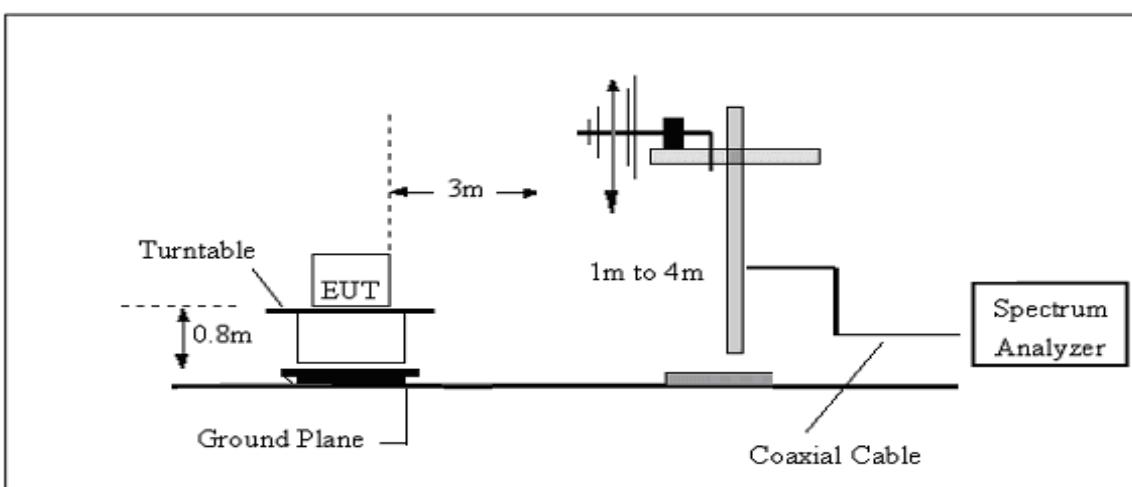

(C) Radiated Emission Test-Up Frequency Above 1GHz

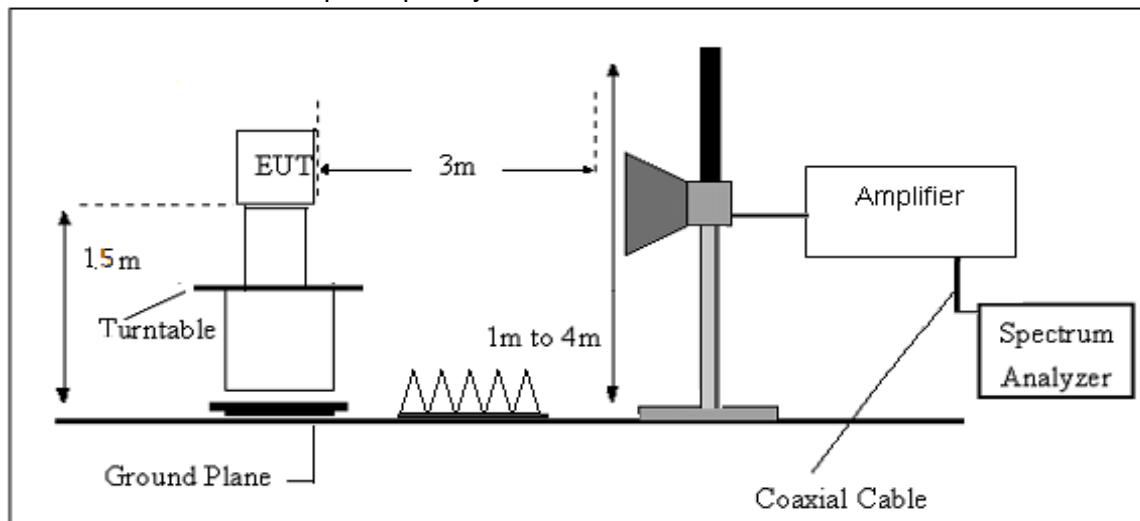

4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

| Frequency (MHz) | FS (dB μ V/m) | RA (dB μ V/m) | AF (dB) | CL (dB) | AG (dB) | Factor (dB) |
|--------------------|----------------------|----------------------|------------|------------|------------|----------------|
| 300 | 40 | 58.1 | 12.2 | 1.6 | 31.9 | -18.1 |

Factor=AF+CL-AG



4.6 TEST RESULTS

Results of Radiated Emissions (9 KHz~30MHz)

| No. | Frequency | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Remark |
|-----|-----------|--------------|-------------|--------------|--------------|-----------|----------|----------|
| 1* | - | - | - | - | - | - | - | See Note |

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.




Results of Radiated Emissions (30MHz~1000MHz)

Note:1. All mode has been tested, only shown the worst case data,
2. The peak value is less than the AV limit, so no AV data is displayed.

| | |
|------------------------|-----------------------|
| Project: LGT25B046 | Test Engineer: LiuH |
| EUT: Bluetooth module | Temperature: 21°C |
| M/N: LK8728B | Humidity: 60%RH |
| Test Voltage: DC 3.3V | Test Data: 2025-02-28 |
| Test Mode: TX BLE 2402 | |
| Note: | |

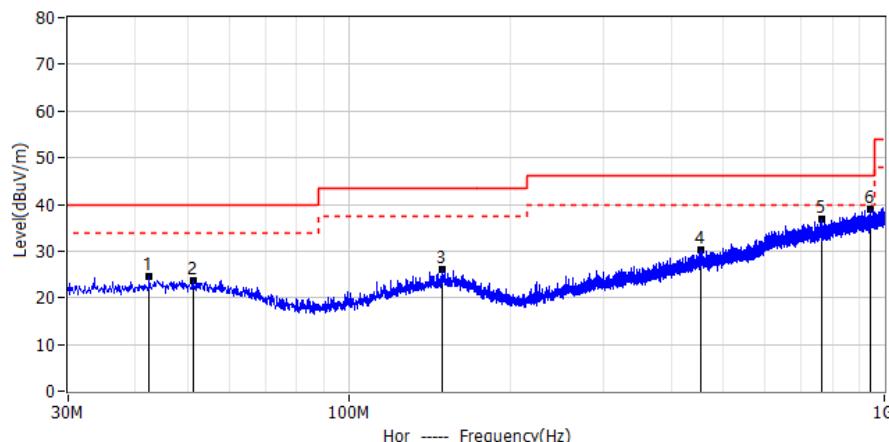

| No. | Frequency MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|---------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1* | 42.489 | 3.80 | 20.65 | 24.45 | 40.00 | -15.55 | QP | Hor |
| 2* | 51.219 | 3.08 | 20.60 | 23.68 | 40.00 | -16.32 | QP | Hor |
| 3* | 149.310 | 4.50 | 21.53 | 26.03 | 43.50 | -17.47 | QP | Hor |
| 4* | 453.890 | 4.46 | 25.80 | 30.26 | 46.00 | -15.74 | QP | Hor |
| 5* | 763.684 | 5.77 | 31.18 | 36.95 | 46.00 | -9.05 | QP | Hor |
| 6* | 944.104 | 5.46 | 33.58 | 39.04 | 46.00 | -6.96 | QP | Hor |

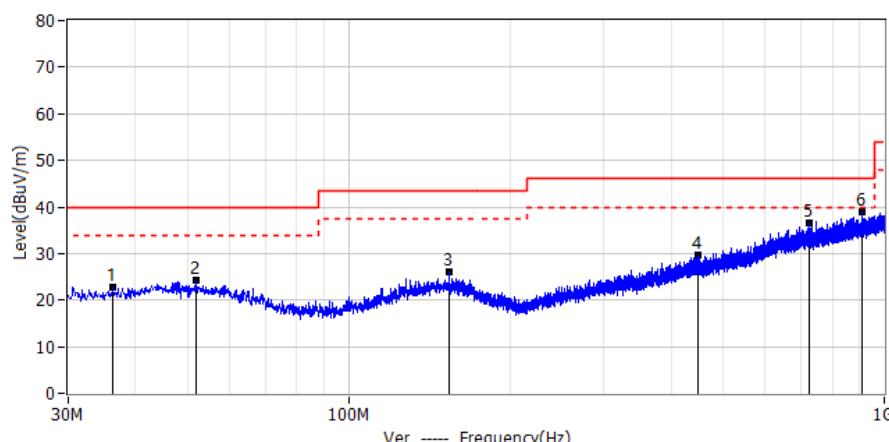


| No. | Frequency MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|---------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1* | 36.426 | 2.89 | 19.91 | 22.80 | 40.00 | -17.20 | QP | Ver |
| 2* | 51.825 | 3.77 | 20.43 | 24.20 | 40.00 | -15.80 | QP | Ver |
| 3* | 154.039 | 4.58 | 21.60 | 26.18 | 43.50 | -17.32 | QP | Ver |
| 4* | 450.131 | 3.71 | 26.08 | 29.79 | 46.00 | -16.21 | QP | Ver |
| 5* | 723.914 | 5.67 | 30.99 | 36.66 | 46.00 | -9.34 | QP | Ver |
| 6* | 910.154 | 5.74 | 33.15 | 38.89 | 46.00 | -7.11 | QP | Ver |




Results of Radiated Emissions (Above 1000MHz)

| | |
|-----------------------|-----------------------|
| Project: LGT25B046 | Test Engineer: LiuH |
| EUT: Bluetooth module | Temperature: 16°C |
| M/N: LK8728B | Humidity: 50%RH |
| Test Voltage: DC 3.3V | Test Data: 2025-02-24 |
| Test Mode: BLE 2402 | |
| Note: | |

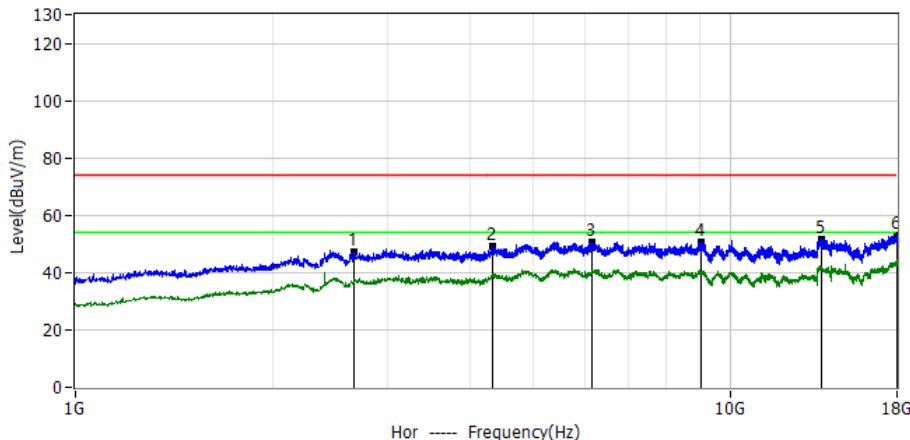


| No. | Frequency MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|---------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1* | 2670.2000 | 57.32 | -10.02 | 47.30 | 74.00 | -26.70 | PK | Hor |
| 2* | 4342.6000 | 55.43 | -6.45 | 48.98 | 74.00 | -25.02 | PK | Hor |
| 3* | 6168.0000 | 58.14 | -7.48 | 50.66 | 74.00 | -23.34 | PK | Hor |
| 4* | 9055.9000 | 58.50 | -8.01 | 50.49 | 74.00 | -23.51 | PK | Hor |
| 5* | 13790.4000 | 55.18 | -3.43 | 51.75 | 74.00 | -22.25 | PK | Hor |
| 6* | 18000.0000 | 55.62 | -2.57 | 53.05 | 74.00 | -20.95 | PK | Hor |

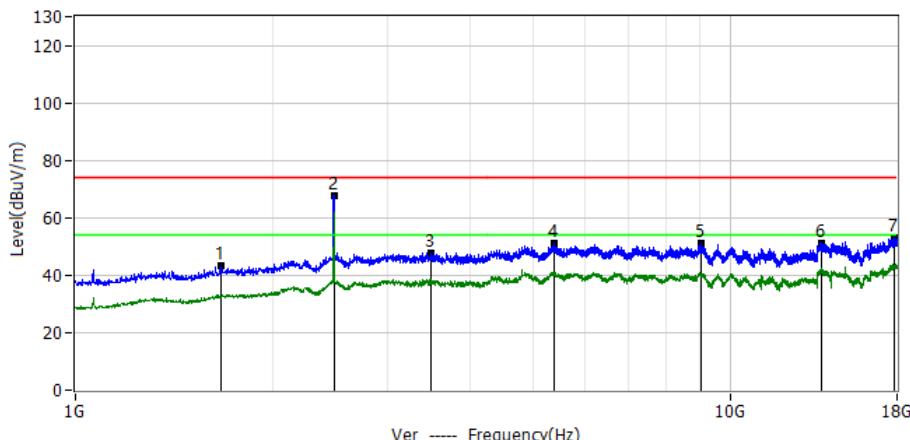


| No. | Frequency MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|---------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1* | 1665.1000 | 62.82 | -19.39 | 43.43 | 74.00 | -30.57 | PK | Ver |
| 2* | 2481.1000 | 78.73 | -10.87 | 67.86 | 74.00 | -6.14 | PK | Ver |
| 3* | 3492.6000 | 56.00 | -8.07 | 47.93 | 74.00 | -26.07 | PK | Ver |
| 4* | 5383.9000 | 57.88 | -6.68 | 51.20 | 74.00 | -22.80 | PK | Ver |
| 5* | 9030.4000 | 59.05 | -8.05 | 51.00 | 74.00 | -23.00 | PK | Ver |
| 6* | 13794.6000 | 54.70 | -3.42 | 51.28 | 74.00 | -22.72 | PK | Ver |
| 7* | 17861.9000 | 55.86 | -2.67 | 53.19 | 74.00 | -20.81 | PK | Ver |



| | |
|-----------------------|-----------------------|
| Project: LGT25B046 | Test Engineer: LiuH |
| EUT: Bluetooth module | Temperature: 16°C |
| M/N: LK8728B | Humidity: 50%RH |
| Test Voltage: DC 3.3V | Test Data: 2025-02-24 |
| Test Mode: BLE 2480 | |
| Note: | |

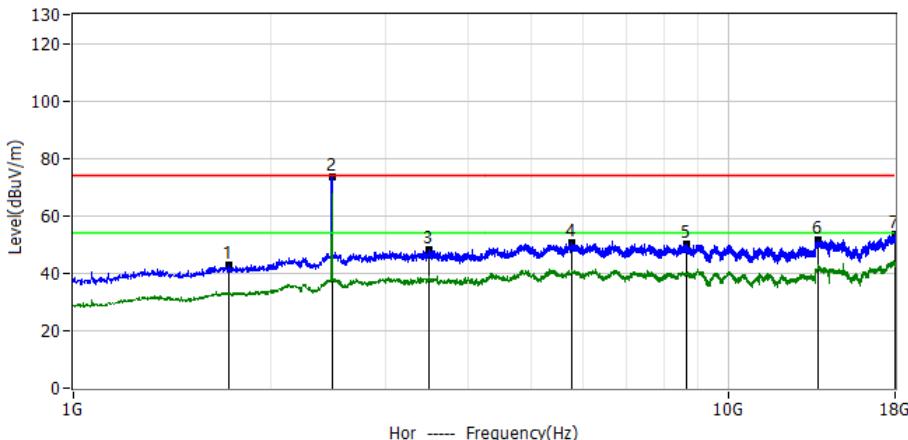

| No. | Frequency MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|---------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1* | 1731.0000 | 61.37 | -18.70 | 42.67 | 74.00 | -31.33 | PK | Hor |
| 2* | 2481.1000 | 84.23 | -10.87 | 73.36 | 74.00 | -0.64 | PK | Hor |
| 3* | 3494.7000 | 56.26 | -8.06 | 48.20 | 74.00 | -25.80 | PK | Hor |
| 4* | 5764.2000 | 57.55 | -7.15 | 50.40 | 74.00 | -23.60 | PK | Hor |
| 5* | 8633.0000 | 59.00 | -8.68 | 50.32 | 74.00 | -23.68 | PK | Hor |
| 6* | 13735.1000 | 55.27 | -3.57 | 51.70 | 74.00 | -22.30 | PK | Hor |
| 7* | 17997.9000 | 55.98 | -2.57 | 53.41 | 74.00 | -20.59 | PK | Hor |

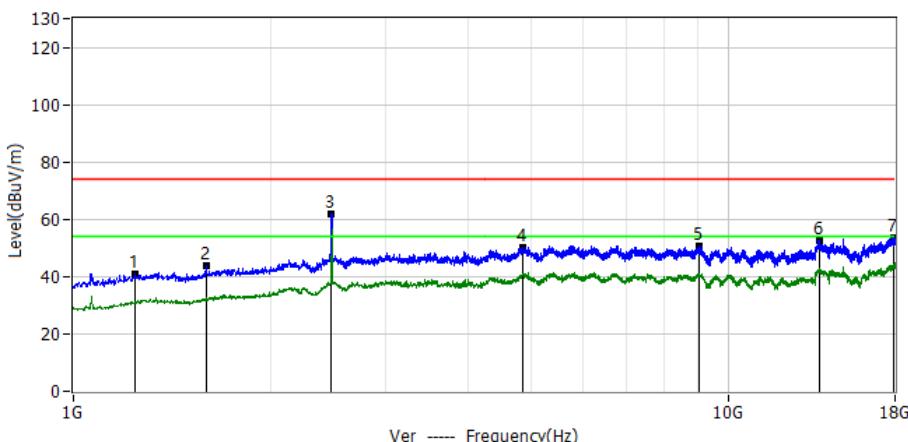

| No. | Frequency MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|---------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1* | 1242.2000 | 63.82 | -22.76 | 41.06 | 74.00 | -32.94 | PK | Ver |
| 2* | 1595.0000 | 64.07 | -20.10 | 43.97 | 74.00 | -30.03 | PK | Ver |
| 3* | 2479.0000 | 72.68 | -10.89 | 61.79 | 74.00 | -12.21 | PK | Ver |
| 4* | 4856.9000 | 56.27 | -6.07 | 50.20 | 74.00 | -23.80 | PK | Ver |
| 5* | 9041.0000 | 58.80 | -8.04 | 50.76 | 74.00 | -23.24 | PK | Ver |
| 6* | 13805.2000 | 55.85 | -3.39 | 52.46 | 74.00 | -21.54 | PK | Ver |
| 7* | 17889.5000 | 56.09 | -2.65 | 53.44 | 74.00 | -20.56 | PK | Ver |

Remark:


In frequency ranges above 18GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.




4.7 TEST RESULTS (BAND EDGE REQUIREMENTS)

Note:1. All mode has been tested, only shown the worst case data,
2. The peak value is less than the AV limit, so no AV data is displayed.

| | |
|-----------------------|-----------------------|
| Project: LGT25B046 | Test Engineer: LiuH |
| EUT: Bluetooth module | Temperature: 16°C |
| M/N: LK8728B | Humidity: 50%RH |
| Test Voltage: DC 3.3V | Test Data: 2025-02-24 |
| Test Mode: BLE 2402 | |
| Note: | |

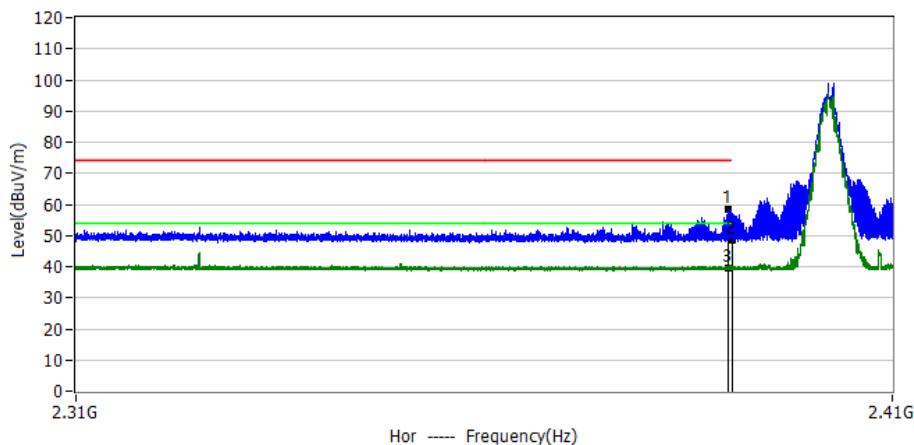


| No. | Frequency MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|---------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1* | 2389.6000 | 24.19 | 34.10 | 58.29 | 74.00 | -15.71 | PK | Hor |
| 2* | 2390.0000 | 14.60 | 34.10 | 48.70 | 74.00 | -25.30 | PK | Hor |
| 3* | 2389.6000 | 5.50 | 34.10 | 39.60 | 54.00 | -14.40 | AV | Hor |

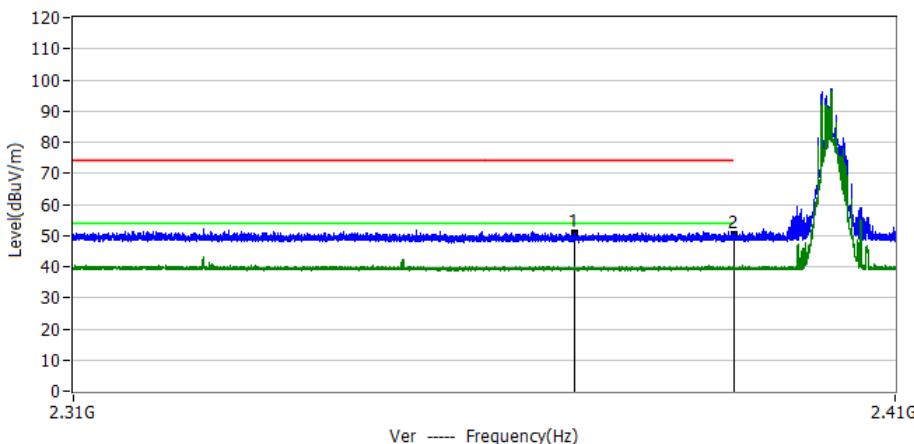


| No. | Frequency MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|---------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1* | 2370.5000 | 16.70 | 34.12 | 50.82 | 74.00 | -23.18 | PK | Ver |
| 2* | 2390.0000 | 16.20 | 34.10 | 50.30 | 74.00 | -23.70 | PK | Ver |



| | |
|-----------------------|-----------------------|
| Project: LGT25B046 | Test Engineer: LiuH |
| EUT: Bluetooth module | Temperature: 16°C |
| M/N: LK8728B | Humidity: 50%RH |
| Test Voltage: DC 3.3V | Test Data: 2025-02-24 |
| Test Mode: BLE 2480 | |
| Note: | |

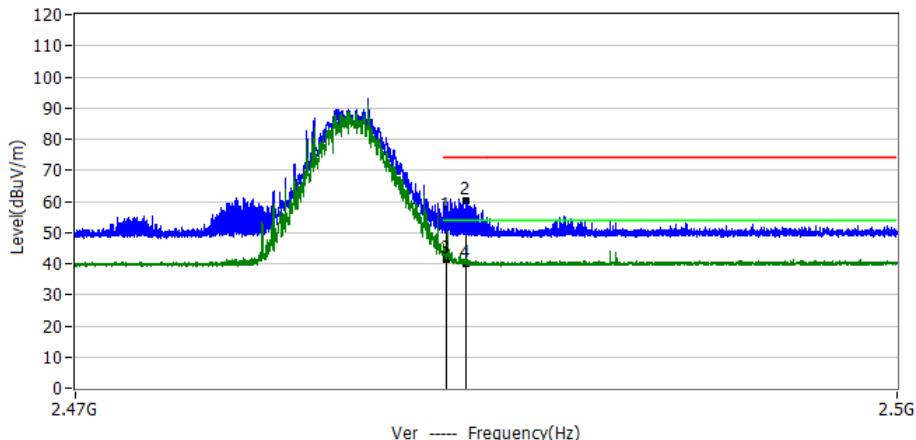

| No. | Frequency MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|---------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1* | 2483.5000 | 20.76 | 34.44 | 55.20 | 74.00 | -18.80 | PK | Ver |
| 2* | 2484.2000 | 26.00 | 34.44 | 60.44 | 74.00 | -13.56 | PK | Ver |
| 3* | 2483.5000 | 6.86 | 34.44 | 41.30 | 54.00 | -12.70 | AV | Ver |
| 4* | 2484.2000 | 5.56 | 34.44 | 40.00 | 54.00 | -14.00 | AV | Ver |

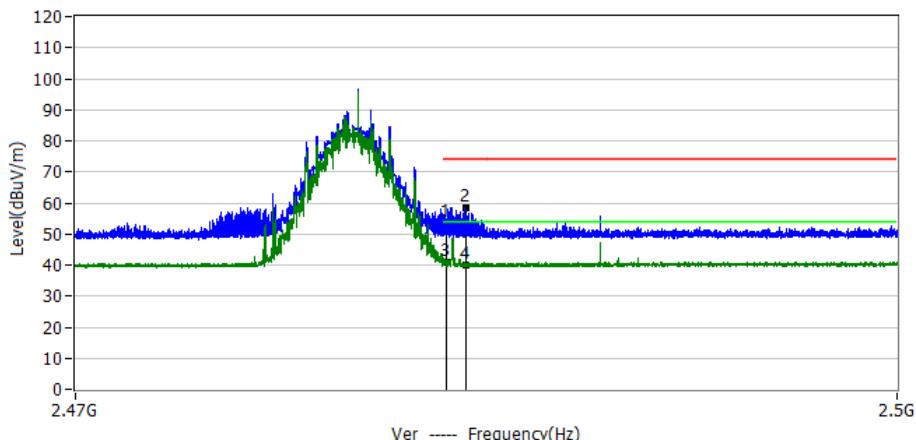

| No. | Frequency MHz | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|---------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1* | 2483.5000 | 19.06 | 34.44 | 53.50 | 74.00 | -20.50 | PK | Ver |
| 2* | 2484.2000 | 24.07 | 34.44 | 58.51 | 74.00 | -15.49 | PK | Ver |
| 3* | 2483.5000 | 6.26 | 34.44 | 40.70 | 54.00 | -13.30 | AV | Ver |
| 4* | 2484.2000 | 5.56 | 34.44 | 40.00 | 54.00 | -14.00 | AV | Ver |



5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

5.1 LIMIT

According to FCC section 15.247(d)&RSS-247, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2 TEST PROCEDURE

| Spectrum Parameter | Setting |
|---------------------------------------|---------------------------------|
| Detector | Peak |
| Start/Stop Frequency | 30 MHz to 10th carrier harmonic |
| RB / VB (emission in restricted band) | 100 KHz/300 KHz |
| Trace-Mode: | Max hold |

For Band edge

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Detector | Peak |
| Start/Stop Frequency | Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz |
| RB / VB (emission in restricted band) | 100 KHz/300 KHz |
| Trace-Mode: | Max hold |

5.3 TEST SETUP



The EUT which is powered by the battery, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

5.5 TEST RESULTS

For the measurement records, refer to the appendix I.



6. POWER SPECTRAL DENSITY TEST

6.1 LIMIT

| Section | Test Item | Limit | Frequency Range (MHz) | Result |
|----------------------|------------------------|---|-----------------------|--------|
| 15.247(e) RSS-247 | Power Spectral Density | $\leq 8 \text{ dBm}$ (RBW $\geq 3 \text{ kHz}$) | 2400-2483.5 | PASS |

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

6.5 TEST RESULTS

For the measurement records, refer to the appendix I.



7. BANDWIDTH TEST

7.1 LIMIT

| Section | Test Item | Limit | Frequency Range (MHz) | Result |
|---------------------------------|---------------|---|-----------------------|--------|
| 15.247(a)(2) RSS-247 5.2 (a) | Bandwidth | $\geq 500\text{KHz}$ (6dB bandwidth) | 2400-2483.5 | PASS |
| RSS-Gen Clause 6.7 | 99% Bandwidth | For reporting purposes only. | 2400-2483.5 | PASS |

7.2 TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

| | |
|------------------|---|
| Center Frequency | The centre frequency of the channel under test |
| Detector | Peak |
| RBW | For 6 dB Bandwidth :100KHz For 99% Bandwidth :1% to 5% of the occupied bandwidth |
| VBW | For 6dB Bandwidth : $\geq 3 \times \text{RBW}$ For 99% Bandwidth : approximately $3 \times \text{RBW}$ |
| Trace | Max hold |
| Sweep | Auto |

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

7.5 TEST RESULTS

For the measurement records, refer to the appendix I.



8. PEAK OUTPUT POWER TEST

8.1 LIMIT

| Section | Test Item | Limit | Frequency Range (MHz) | Result |
|-------------------------|--------------|-----------------|-----------------------|--------|
| 15.247(b)(3) RSS-247 | Output Power | 1 watt or 30dBm | 2400-2483.5 | PASS |
| RSS-247 | EIRP | 4W | 2400-2483.5 | PASS |

8.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

$RBW \geq DTS \text{ bandwidth}$

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the $RBW \geq DTS \text{ bandwidth}$.
- b) Set $VBW \geq [3 \times RBW]$.
- c) Set span $\geq [3 \times RBW]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

$DTS \text{ bandwidth}$:

- a) Set the $RBW = 1 \text{ MHz}$.
- b) Set the $VBW \geq [3 \times RBW]$.
- c) Set the span $\geq [1.5 \times DTS \text{ bandwidth}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

8.5 TEST RESULTS

For the measurement records, refer to the appendix I.



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203&RSS Gen requirement: For intentional device, according to 15.203&RSS Gen: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is FPC Antenna. It comply with the standard requirement.



10. FREQUENCY STABILITY

10.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/-0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage and for a variation in primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees.

10.2 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2,5 and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

10.3 TEST RESULT

For the measurement records, refer to the appendix I.



APPENDIX I - TEST RESULTS


Duty Cycle

| Condition | Mode | Frequency (MHz) | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|--------|-----------------|----------------|------------------------|-----------|
| NVNT | BLE 1M | 2402 | 100 | 0 | 0.01 |
| NVNT | BLE 1M | 2440 | 100 | 0 | 0.01 |
| NVNT | BLE 1M | 2480 | 100 | 0 | 0.01 |




Test Graphs


Duty Cycle NVNT BLE 1M 2402MHz

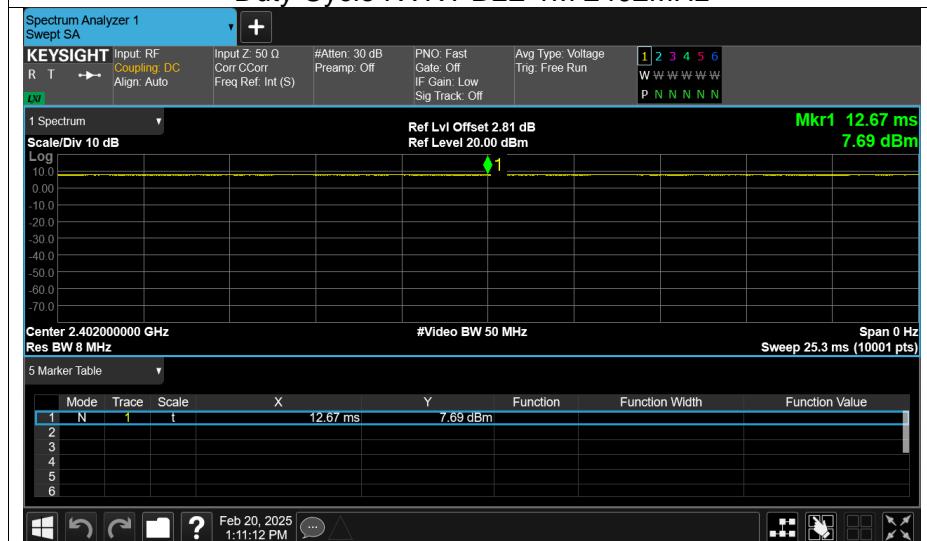

Duty Cycle NVNT BLE 1M 2440MHz

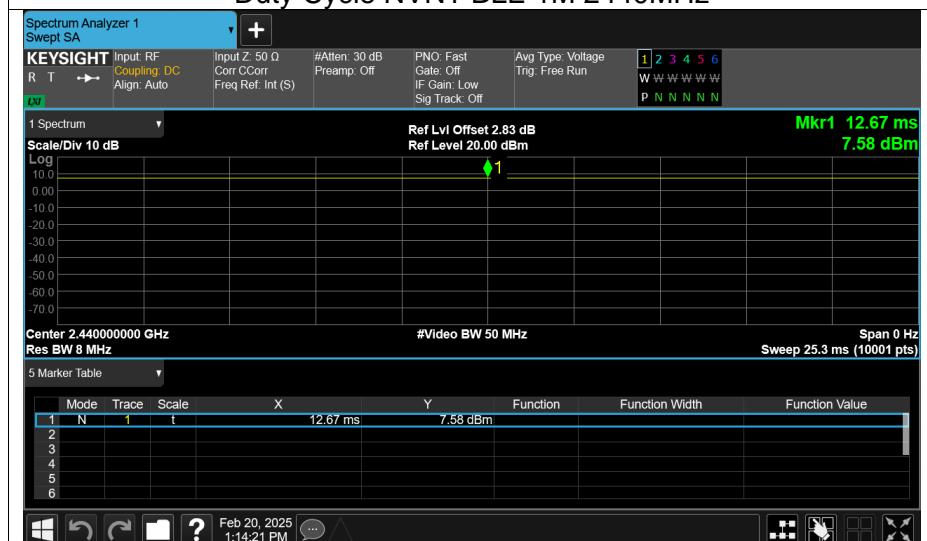

Duty Cycle NVNT BLE 1M 2480MHz

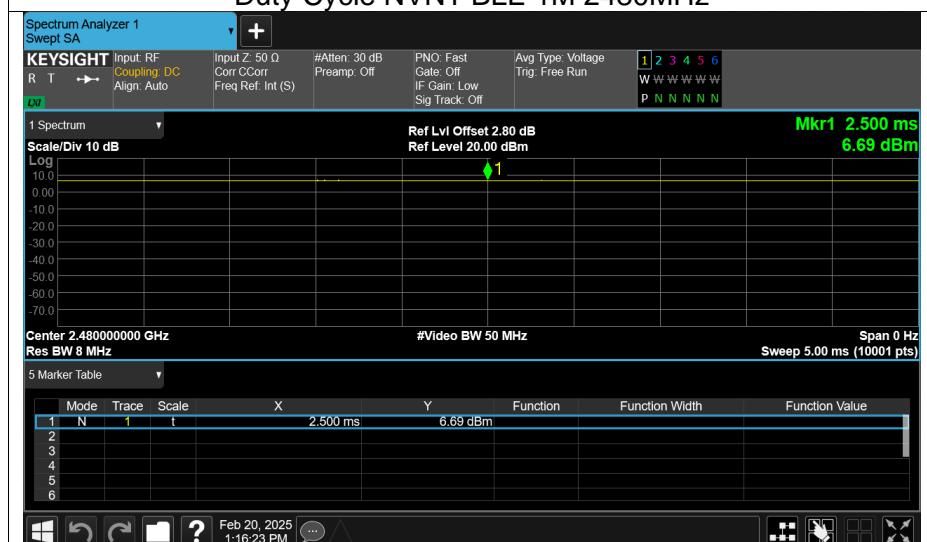



Maximum Peak Conducted Output Power

| Condition | Mode | Frequency (MHz) | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|--------|-----------------|-----------------------|-------------|---------|
| NVNT | BLE 1M | 2402 | 7.69 | 30 | Pass |
| NVNT | BLE 1M | 2440 | 7.55 | 30 | Pass |
| NVNT | BLE 1M | 2480 | 6.77 | 30 | Pass |

| Condition | Mode | Frequency (MHz) | Conducted Power (dBm) | ANT GAIN (dBi) | EIRP (dBm) | EIRP LIMIT(dBm) | Verdict |
|-----------|--------|-----------------|-----------------------|----------------|------------|-----------------|---------|
| NVNT | BLE 1M | 2402 | 7.69 | 0.36 | 8.05 | 36.02 | Pass |
| NVNT | BLE 1M | 2440 | 7.55 | 0.36 | 7.91 | 36.02 | Pass |
| NVNT | BLE 1M | 2480 | 6.77 | 0.36 | 7.13 | 36.02 | Pass |



-6dB Bandwidth

| Condition | Mode | Frequency (MHz) | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|--------|-----------------|-----------------------|-----------------------------|---------|
| NVNT | BLE 1M | 2402 | 0.706 | 0.5 | Pass |
| NVNT | BLE 1M | 2440 | 0.689 | 0.5 | Pass |
| NVNT | BLE 1M | 2480 | 0.653 | 0.5 | Pass |




Test Graphs


-6dB Bandwidth NVNT BLE 1M 2402MHz



-6dB Bandwidth NVNT BLE 1M 2440MHz

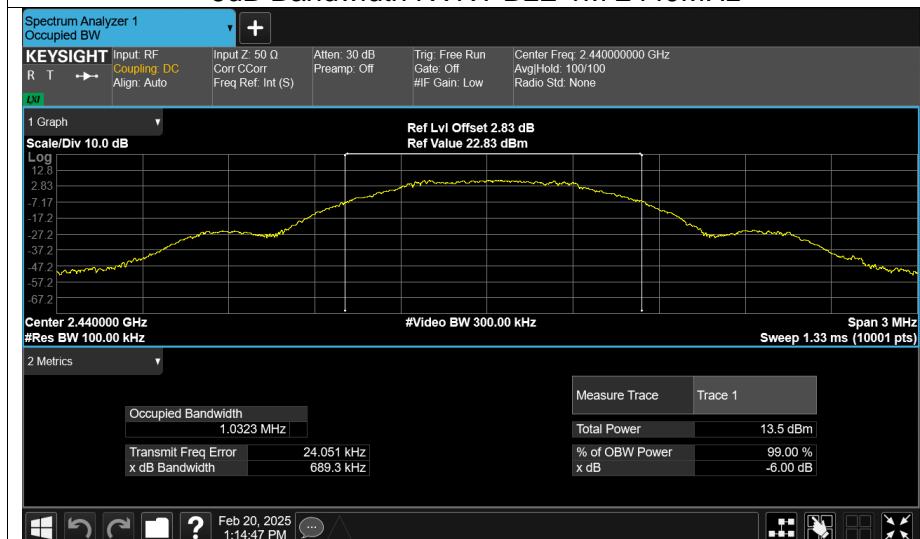

-6dB Bandwidth NVNT BLE 1M 2480MHz

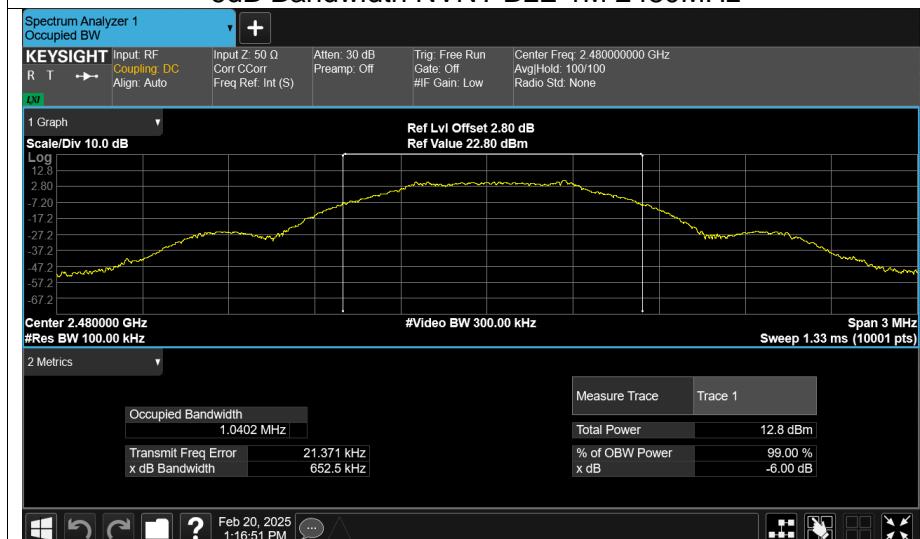




Occupied Channel Bandwidth

| Condition | Mode | Frequency (MHz) | 99% OBW (MHz) |
|-----------|--------|-----------------|---------------|
| NVNT | BLE 1M | 2402 | 1.037 |
| NVNT | BLE 1M | 2440 | 1.018 |
| NVNT | BLE 1M | 2480 | 1.034 |




Test Graphs

OBW NVNT BLE 1M 2402MHz

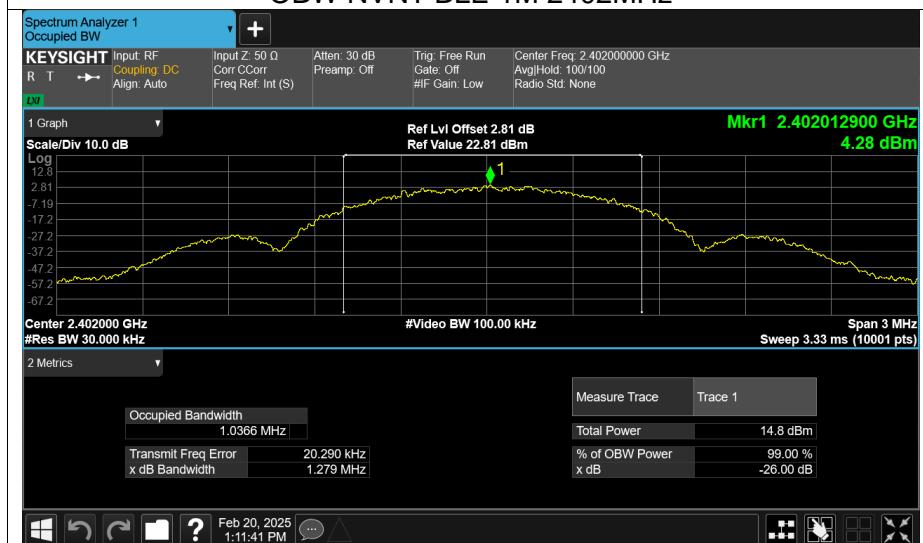

OBW NVNT BLE 1M 2440MHz

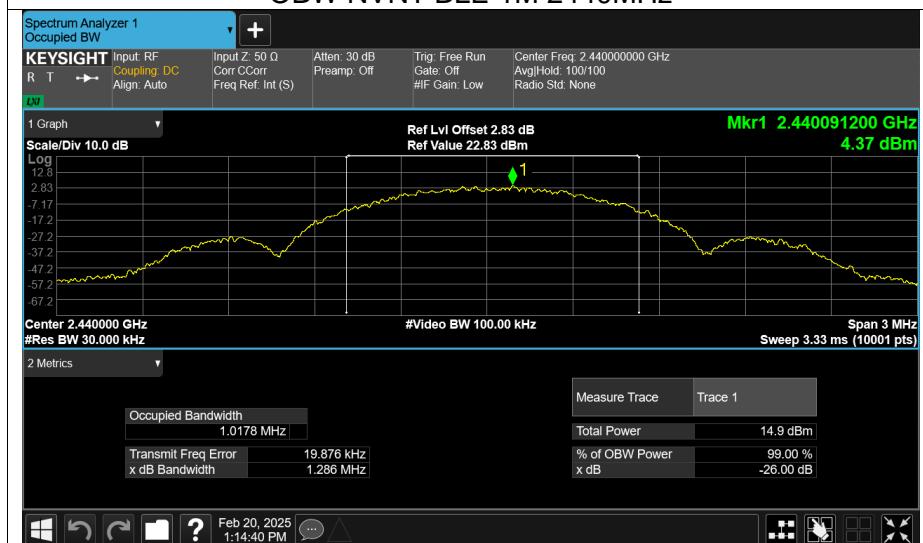


OBW NVNT BLE 1M 2480MHz





Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Conducted PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|--------|-----------------|--------------------------|------------------|---------|
| NVNT | BLE 1M | 2402 | -3.51 | 8 | Pass |
| NVNT | BLE 1M | 2440 | -2.6 | 8 | Pass |
| NVNT | BLE 1M | 2480 | -4.21 | 8 | Pass |

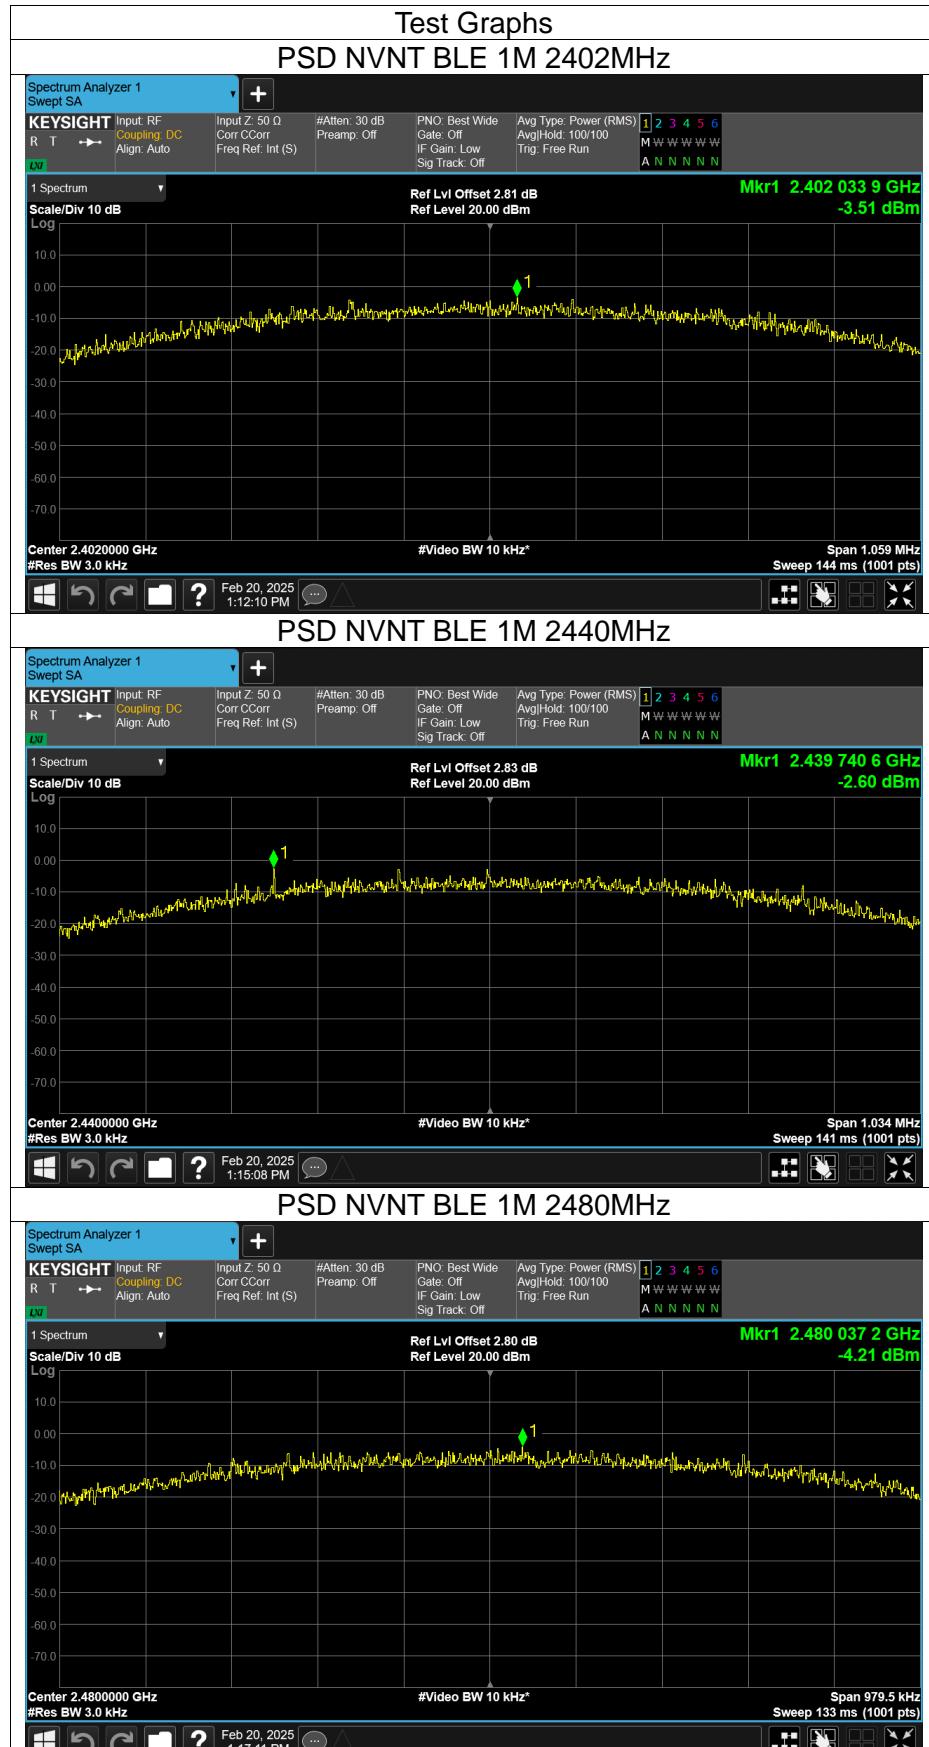




Band Edge

| Condition | Mode | Frequency (MHz) | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|--------|-----------------|-----------------|-------------|---------|
| NVNT | BLE 1M | 2402 | -60.79 | -20 | Pass |
| NVNT | BLE 1M | 2480 | -63.6 | -20 | Pass |




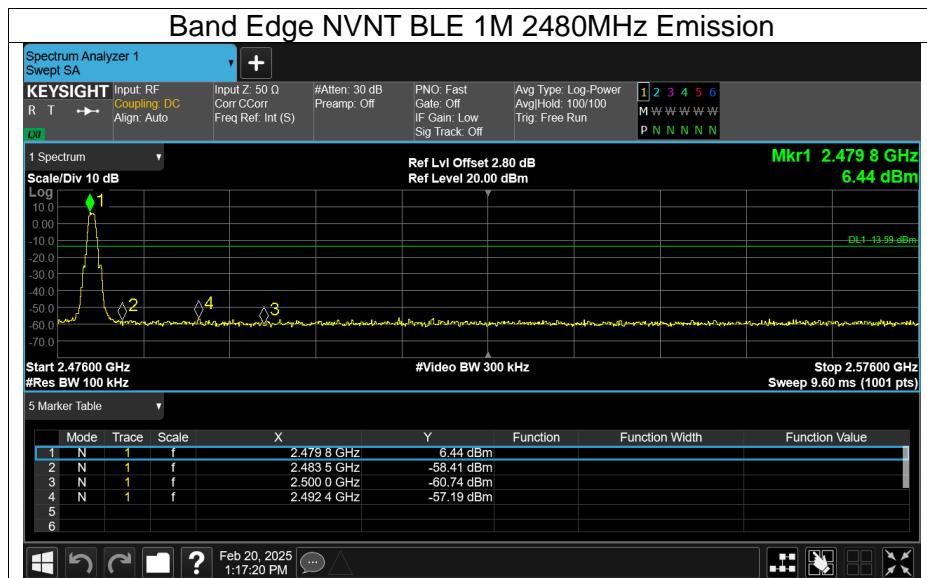




Conducted RF Spurious Emission

| Condition | Mode | Frequency (MHz) | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|--------|-----------------|-----------------|-------------|---------|
| NVNT | BLE 1M | 2402 | -49.55 | -20 | Pass |
| NVNT | BLE 1M | 2440 | -44.87 | -20 | Pass |
| NVNT | BLE 1M | 2480 | -48.86 | -20 | Pass |

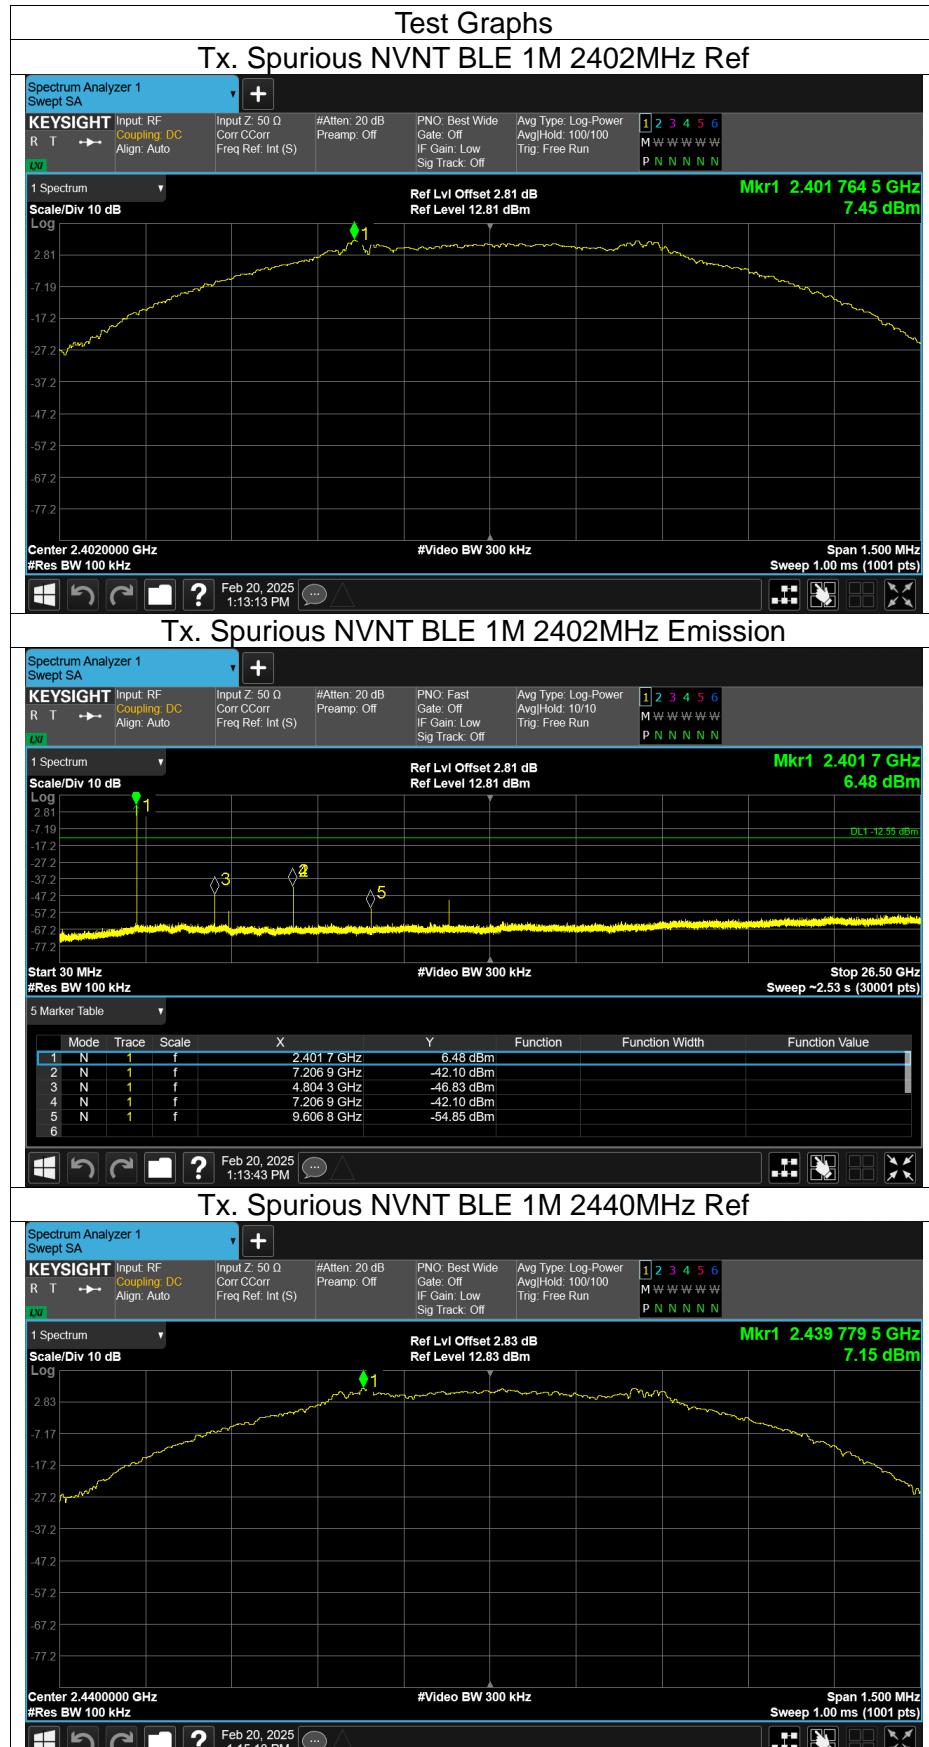

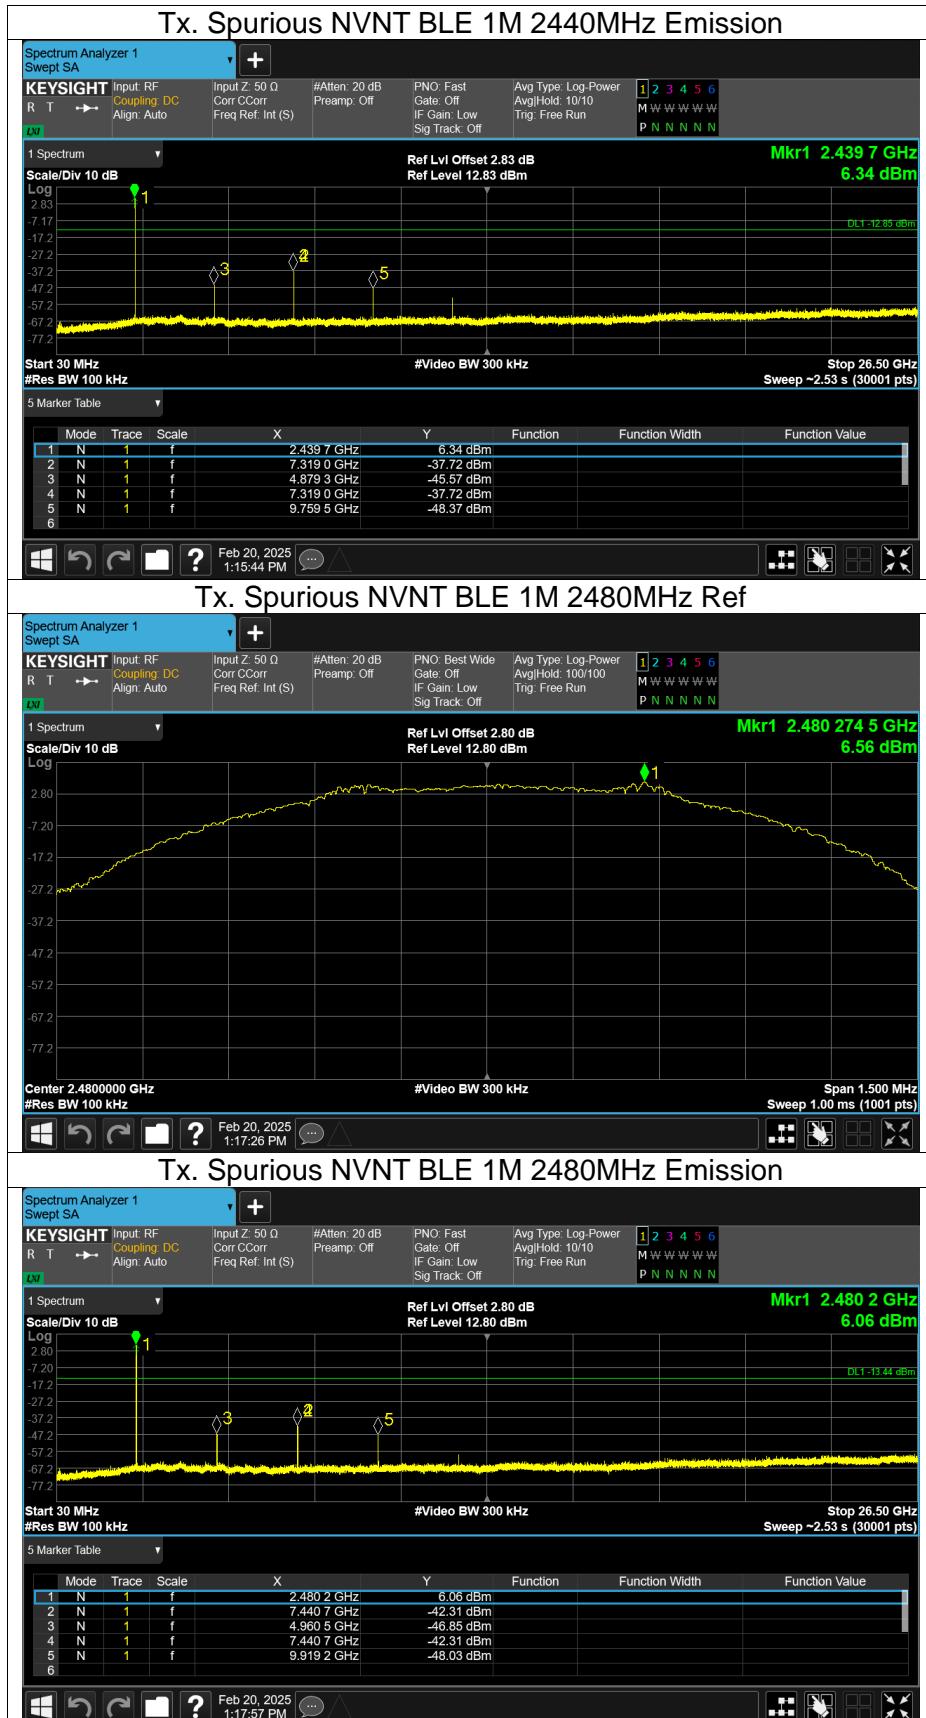



FREQUENCY STABILITY

| | |
|--------------------|----------------------------|
| Channel 19 | 2440.0000 |
| Voltage(V) | Measurement Frequency(MHz) |
| 3.795 | 2440.0023 |
| 3.3 | 2440.0022 |
| 2.805 | 2440.0015 |
| Max.Deviation(MHz) | 0.0023 |
| Max.Deviation(ppm) | 0.94 |

| Temperature(°C) | Measurement Frequency(MHz) |
|--------------------|----------------------------|
| -30 | 2440.0033 |
| -20 | 2440.0032 |
| -10 | 2440.0032 |
| 0 | 2440.0024 |
| 10 | 2440.0029 |
| 20 | 2440.0030 |
| 30 | 2440.0031 |
| 40 | 2440.0030 |
| 50 | 2440.0033 |
| Max.Deviation(MHz) | 0.0033 |
| Max.Deviation(ppm) | 1.35 |



APPENDIX II - MEASUREMENT PHOTOS

Note: Please see the attached Setup photos for FCC ID & IC.



APPENDIX III - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

Note: Please see the attached LK8728B_EUT Photos.

※※※※END OF THE REPORT※※※※