



FCC RF Test Report

APPLICANT : OnePlus Technology (Shenzhen) Co., Ltd.
EQUIPMENT : Smart Phone
BRAND NAME : ONEPLUS
MODEL NAME : LE2115
FCC ID : 2ABZ2-EF136
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Oct. 28, 2020 and testing was completed on Dec. 24, 2020. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Test Software	7
1.8 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode	10
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	13
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement	20
3.5 AC Conducted Emission Measurement.....	24
3.6 Automatically Discontinue Transmission	26
3.7 Antenna Requirements.....	27
4 LIST OF MEASURING EQUIPMENT	28
5 UNCERTAINTY OF EVALUATION.....	29
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR002801-07H	Rev. 01	Initial issue of report	Feb. 05, 2021

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 9.54 dB at 96.930 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.66 dB at 0.150 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

OnePlus Technology (Shenzhen) Co., Ltd.

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.2 Manufacturer

OnePlus Technology (Shenzhen) Co., Ltd.

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	ONEPLUS
Model Name	LE2115
FCC ID	2ABZ2-EF136
EUT supports Radios application	CDMA/GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n/ac HT20/HT40/VHT20/VHT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 Bluetooth BR / EDR / LE / ANT+ GNSS/NFC/WPT
IMEI Code	Conducted: 990016720023652 Conduction: 990017410025130 Radiation: 990017410024174
HW Version	22
SW Version	Oxygen OS 11.2.LE25AA
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report for LE2115. For change note, please refer the product equality declaration exhibit separately. Since the test result is not affected by the changes, all the test results are leveraged from original report which can be referred to Sporton Report Number FR002801-02H.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification				
Tx/Rx Channel Frequency Range		5745 MHz ~ 5825 MHz		
Maximum Output Power		<MIMO Ant.1+2> <5745 MHz ~ 5825 MHz> 802.11a : 20.14 dBm / 0.1033 W 802.11n HT20 : 20.17 dBm / 0.1040 W 802.11n HT40 : 20.17 dBm / 0.1040 W 802.11ac VHT20 : 20.08 dBm / 0.1019 W 802.11ac VHT40 : 20.08 dBm / 0.1019 W 802.11ac VHT80 : 20.18 dBm / 0.1042 W 802.11ax HE20 : 20.08 dBm / 0.1019 W 802.11ax HE40 : 20.09 dBm / 0.1021 W 802.11ax HE80 : 20.21 dBm / 0.1050 W		
99% Occupied Bandwidth		<MIMO Ant.1+2> 802.11a : 16.48 MHz 802.11n HT20 : 17.63 MHz 802.11n HT40 : 36.36 MHz 802.11ac VHT80 : 76.36 MHz 802.11ax HE20 : 18.98 MHz 802.11ax HE40 : 37.96 MHz 802.11ax HE80 : 78.28 MHz		
Type of Modulation		802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM /4096QAM)		
Antenna Type / Gain		<Ant. 1> : PIFA Antenna with gain -3.00 dBi <Ant. 2> : PIFA Antenna with gain -3.00 dBi		
Antenna Function Description			Ant. 1	Ant. 2
		802.11 a/n/ac/ax MIMO	V	V

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ HT40 by referring to the higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80 and 802.11ax HE80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(5G) + USB Cable (Charging from Adapter) + Battery
Remark: For Radiated Test Cases, The tests were performance with Adapter, Battery and USB Cable.	

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

Ch. #		Band IV : 5725-5850 MHz		
		802.11ax HE20	802.11ax HE40	802.11ax HE80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

2.3 Connection Diagram of Test System

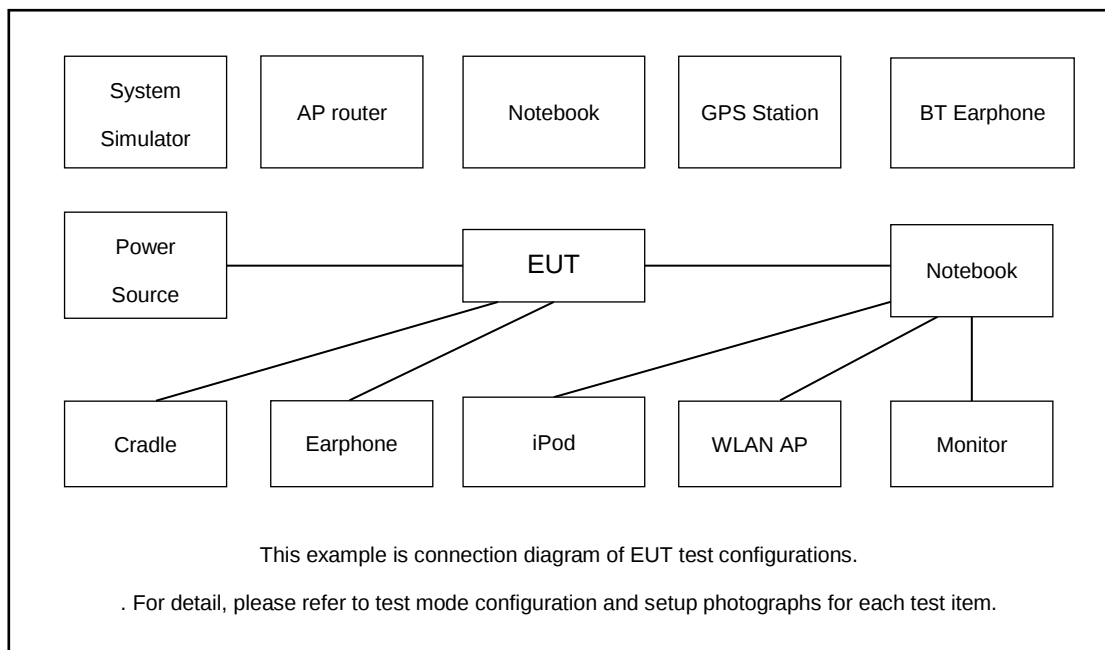

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(GSM)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	D-link	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.5 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.5 + 20 = 22.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

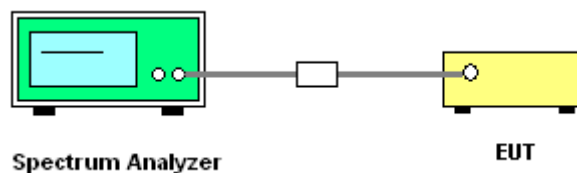

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

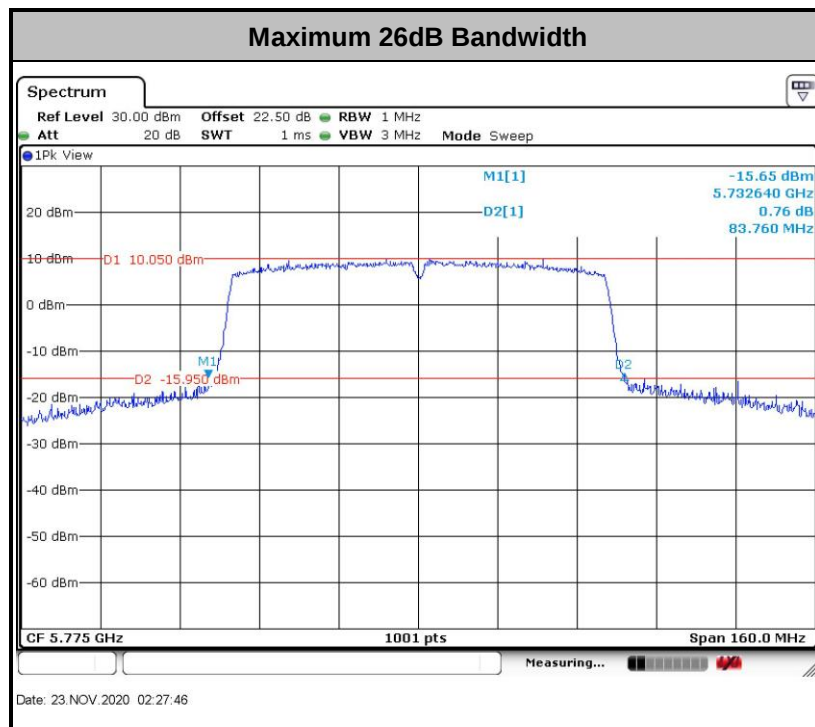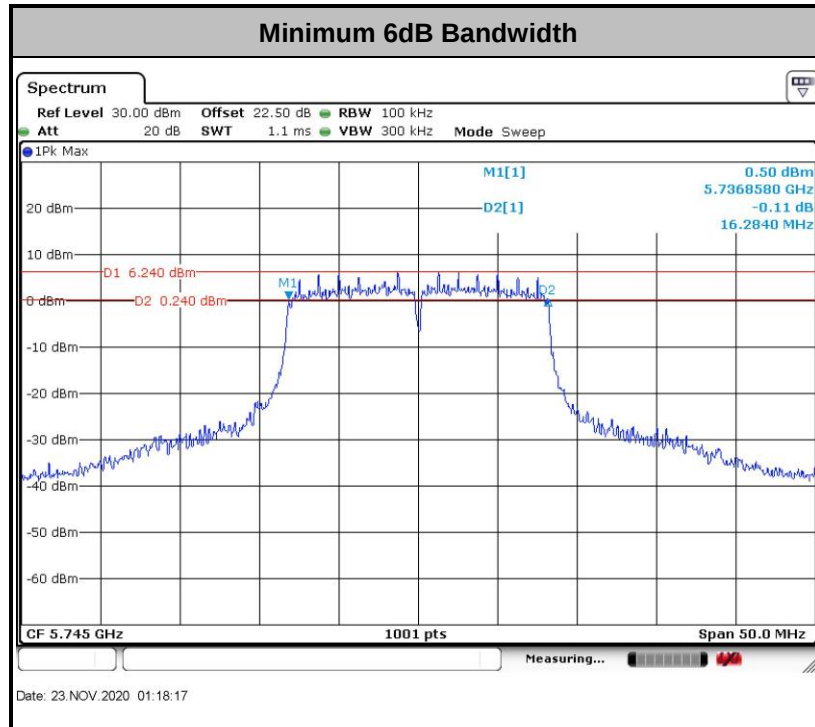

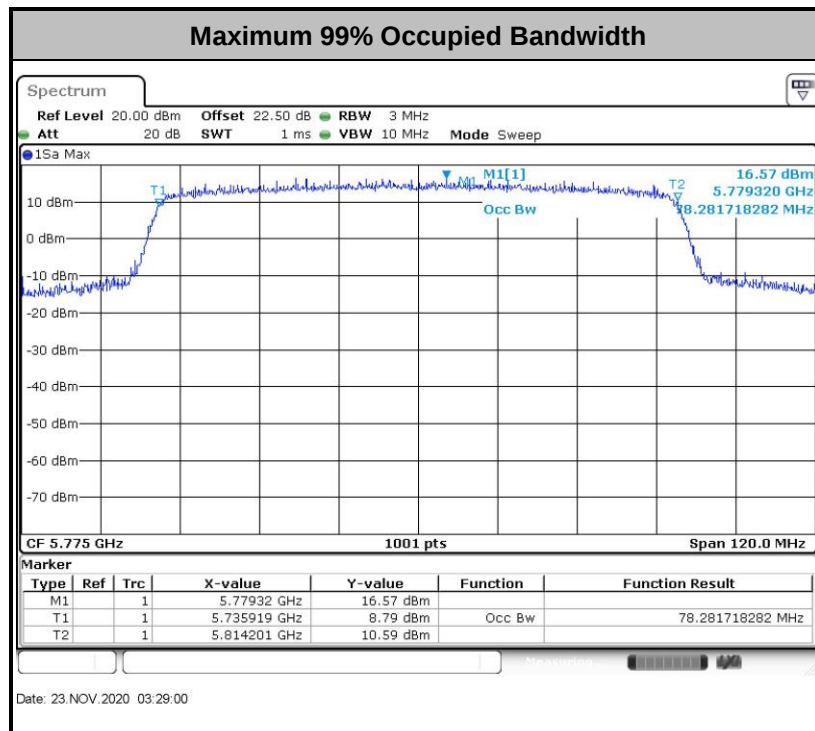

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

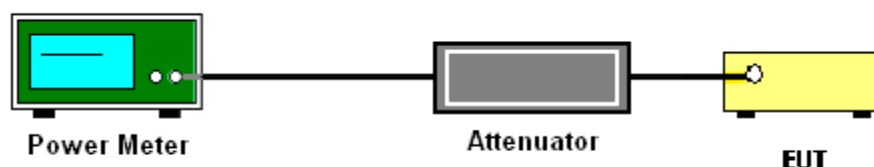

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit.



3.3.4 Test Setup

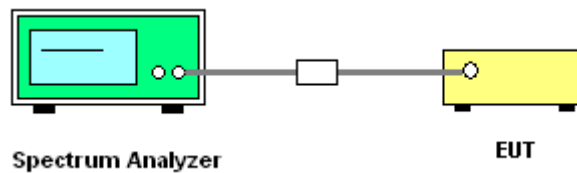



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

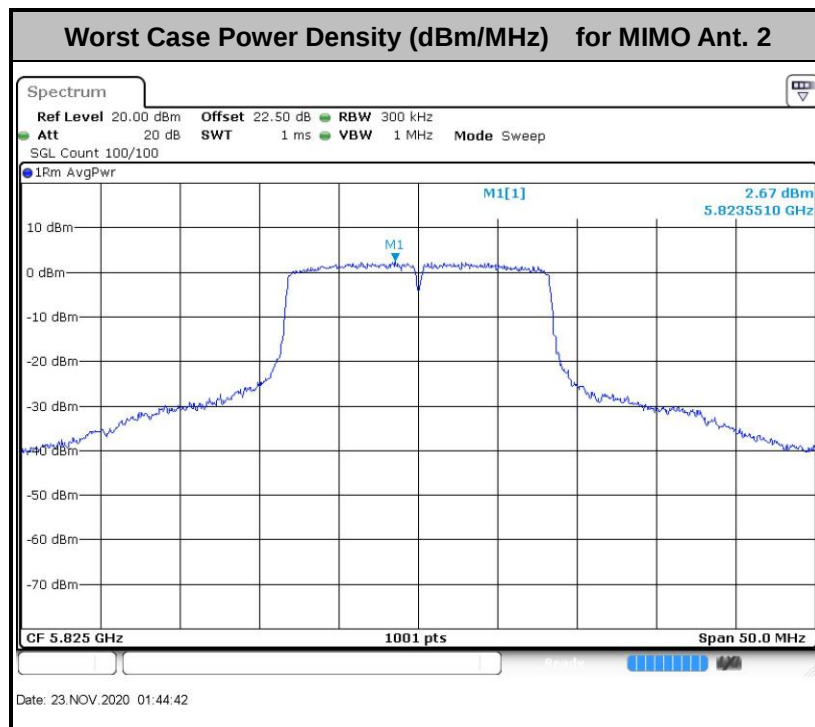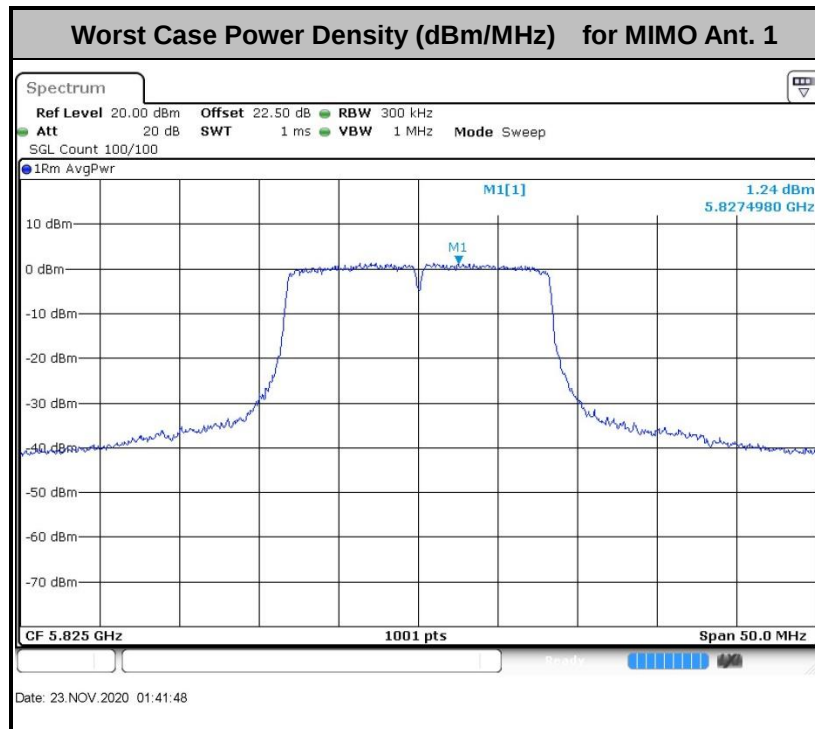

Note: Average Power Density (dB) = MIMO Ant. (1+2) + Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

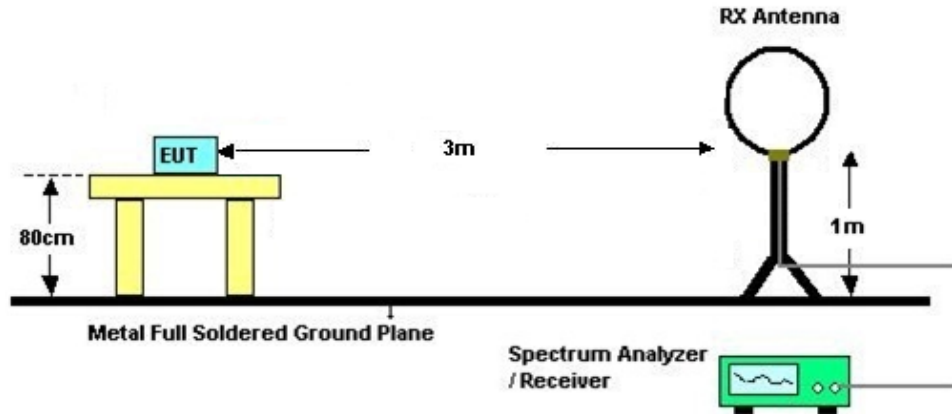

For radiated emissions from 30MHz to 1GHz

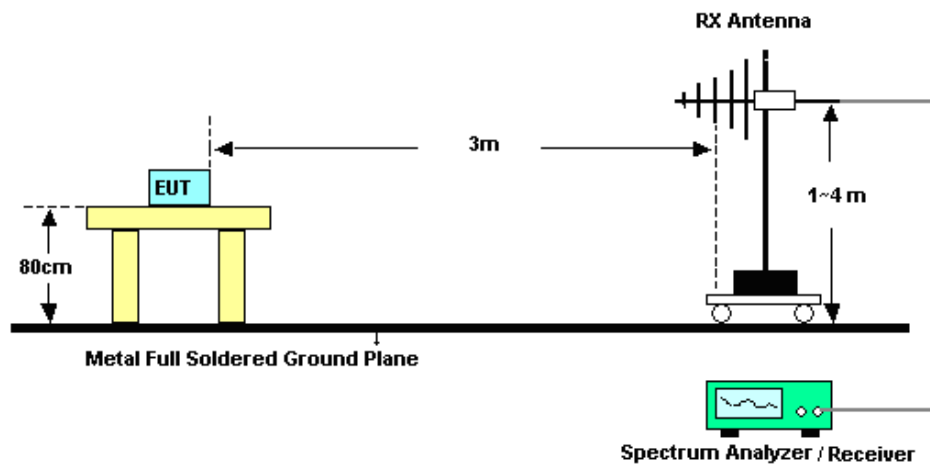

For radiated emissions above 1GHz

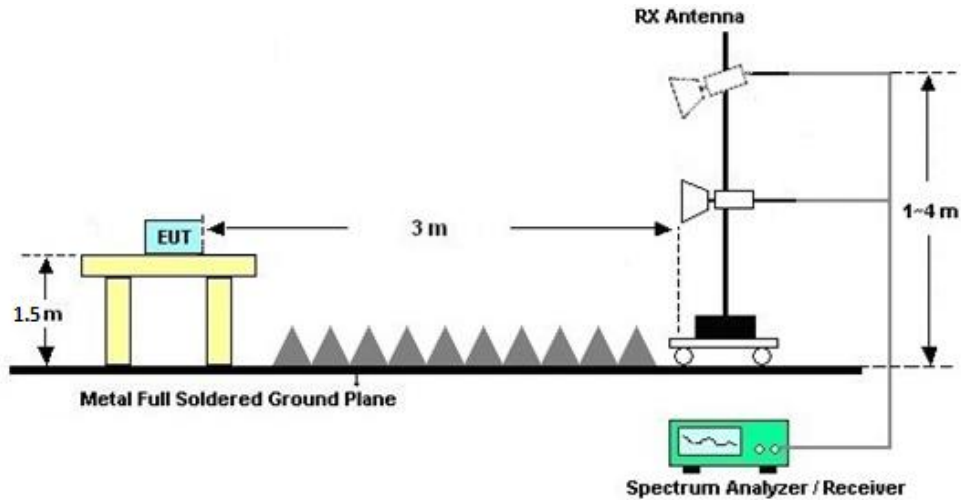

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

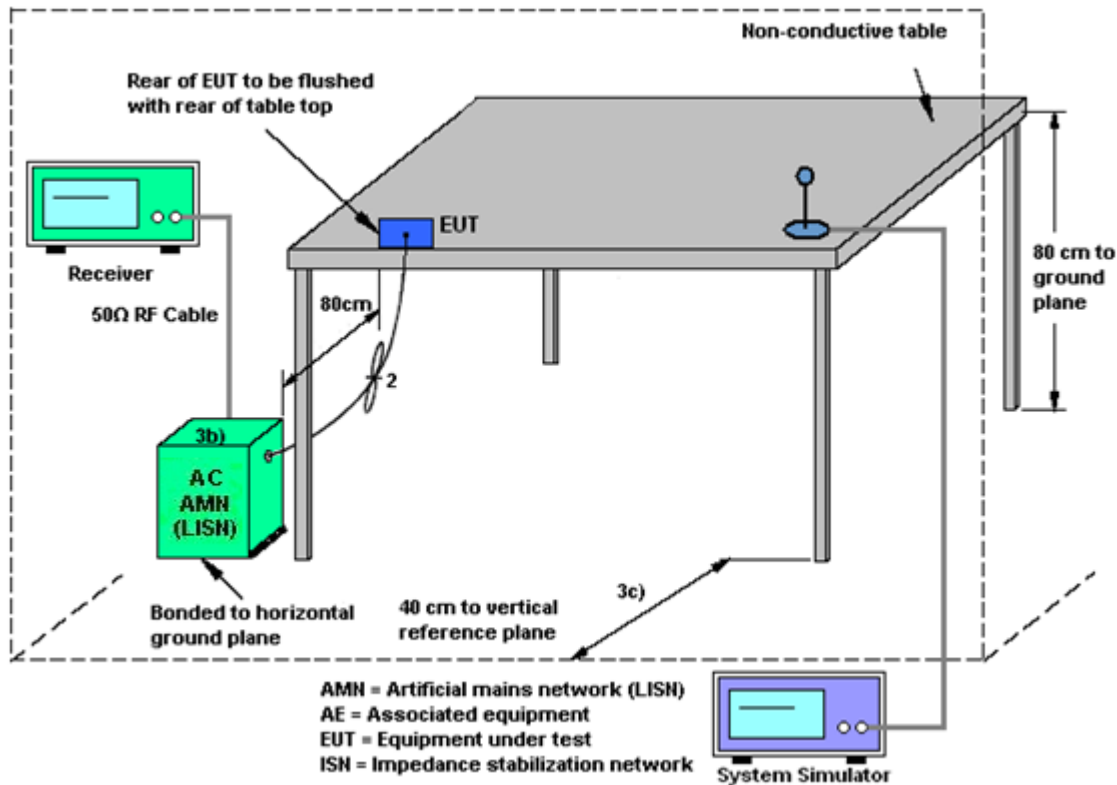

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Ant. 1 (dBi)	Ant. 2 (dBi)	(dBi)	(dBi)	(dB)	(dB)
Band IV	-3.00	-3.00	-3.00	0.01	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 17, 2020	Nov. 23, 2020	Apr. 16, 2021	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 24, 2019	Nov. 23, 2020	Dec. 23, 2020	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 24, 2019	Nov. 23, 2020	Dec. 23, 2020	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 16, 2020	Dec. 24, 2020	Oct. 15, 2021	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 21, 2020	Dec. 24, 2020	Jul. 20, 2021	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Dec. 24, 2020	Jun. 21, 2022	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Nov. 07, 2020	Dec. 24, 2020	Nov. 06, 2021	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	May 23, 2020	Dec. 24, 2020	Mar. 22, 2021	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 26, 2020	Dec. 24, 2020	Jul. 25, 2021	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 16, 2020	Dec. 24, 2020	Oct. 15, 2021	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 17, 2020	Dec. 24, 2020	Oct. 16, 2021	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21, 2020	Dec. 24, 2020	Jul. 20, 2021	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY53270156	500MHz~26.5GHz	Oct. 17, 2020	Dec. 24, 2020	Oct. 16, 2021	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Dec. 24, 2020	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 24, 2020	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 24, 2020	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 25, 2020	Dec. 02, 2020	Dec. 24, 2021	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2 LISN	00103912	9kHz~30MHz	Dec. 25, 2020	Dec. 02, 2020	Dec. 24, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 15, 2020	Dec. 02, 2020	Oct. 14, 2021	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 21, 2020	Dec. 02, 2020	Jul. 20, 2021	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Zhang Xue Yi	Temperature:	21~25	°C
Test Date:	2020/11/23	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	16.43	16.48	21.28	23.63	16.28	16.28	0.5		Pass
11a	6Mbps	2	157	5785	16.43	16.48	21.68	23.48	16.28	16.28	0.5		Pass
11a	6Mbps	2	165	5825	16.43	16.48	21.28	26.97	16.28	16.28	0.5		Pass
HT20	MCS0	2	149	5745	17.58	17.58	22.08	24.43	17.03	16.88	0.5		Pass
HT20	MCS0	2	157	5785	17.58	17.63	21.73	24.68	17.08	17.48	0.5		Pass
HT20	MCS0	2	165	5825	17.58	17.63	21.88	25.52	17.03	17.48	0.5		Pass
HT40	MCS0	2	151	5755	36.16	36.36	41.09	41.54	35.69	35.25	0.5		Pass
HT40	MCS0	2	159	5795	36.16	36.36	41.36	42.53	35.43	35.25	0.5		Pass
VHT80	MCS0	2	155	5775	76.12	76.36	82.64	83.76	75.12	75.12	0.5		Pass
HE20	MCS0	2	149	5745	18.88	18.98	22.58	23.68	18.73	18.18	0.5		Pass
HE20	MCS0	2	157	5785	18.93	18.98	23.08	24.78	18.78	18.58	0.5		Pass
HE20	MCS0	2	165	5825	18.93	18.98	22.48	24.13	18.83	18.08	0.5		Pass
HE40	MCS0	2	151	5755	37.96	37.96	41.81	41.63	37.76	37.67	0.5		Pass
HE40	MCS0	2	159	5795	37.86	37.96	41.54	41.63	37.76	37.67	0.5		Pass
HE80	MCS0	2	155	5775	78.04	78.28	82.80	83.12	77.36	76.72	0.5		Pass

TEST RESULTS DATA
Average Power Table


Band IV																
Mod.	Data Rate	NTx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	149	Full	5745	0.06	0.06	17.01	17.14	20.09	30.00		-3.00		Pass	
11a	6Mbps	2	157	Full	5785	0.06	0.06	16.85	17.28	20.08	30.00		-3.00		Pass	
11a	6Mbps	2	165	Full	5825	0.06	0.06	16.80	17.44	20.14	30.00		-3.00		Pass	
HT20	MCS0	2	149	Full	5745	0.00	0.00	17.05	17.26	20.17	30.00		-3.00		Pass	
HT20	MCS0	2	157	Full	5785	0.00	0.00	16.91	17.33	20.14	30.00		-3.00		Pass	
HT20	MCS0	2	165	Full	5825	0.00	0.00	16.66	17.32	20.01	30.00		-3.00		Pass	
HT40	MCS0	2	151	Full	5755	0.00	0.00	17.04	17.28	20.17	30.00		-3.00		Pass	
HT40	MCS0	2	159	Full	5795	0.00	0.00	16.83	17.32	20.09	30.00		-3.00		Pass	
VHT20	MCS0	2	149	Full	5745	0.00	0.00	16.98	17.14	20.07	30.00		-3.00		Pass	
VHT20	MCS0	2	157	Full	5785	0.00	0.00	16.85	17.28	20.08	30.00		-3.00		Pass	
VHT20	MCS0	2	165	Full	5825	0.00	0.00	16.64	17.32	20.00	30.00		-3.00		Pass	
VHT40	MCS0	2	151	Full	5755	0.00	0.00	16.93	17.20	20.08	30.00		-3.00		Pass	
VHT40	MCS0	2	159	Full	5795	0.00	0.00	16.80	17.26	20.05	30.00		-3.00		Pass	
VHT80	MCS0	2	155	Full	5775	0.00	0.00	16.91	17.42	20.18	30.00		-3.00		Pass	
HE20	MCS0	2	149	Full	5745	0.00	0.00	16.94	17.05	20.01	30.00		-3.00		Pass	
HE20	MCS0	2	149	26/0	5745	0.00	0.00	9.12	8.23	11.71	30.00		-3.00		Pass	
HE20	MCS0	2	149	52/37	5745	0.00	0.00	12.15	11.44	14.82	30.00		-3.00		Pass	
HE20	MCS0	2	149	106/53	5745	0.00	0.00	14.81	14.35	17.60	30.00		-3.00		Pass	
HE20	MCS0	2	157	Full	5785	0.00	0.00	16.88	17.25	20.08	30.00		-3.00		Pass	
HE20	MCS0	2	165	Full	5825	0.00	0.00	16.71	17.32	20.04	30.00		-3.00		Pass	
HE20	MCS0	2	165	26/8	5825	0.00	0.00	9.41	9.36	12.40	30.00		-3.00		Pass	
HE20	MCS0	2	165	52/40	5825	0.00	0.00	12.27	12.32	15.31	30.00		-3.00		Pass	
HE20	MCS0	2	165	106/54	5825	0.00	0.00	15.36	15.22	18.30	30.00		-3.00		Pass	
HE40	MCS0	2	151	Full	5755	0.00	0.00	16.93	17.23	20.09	30.00		-3.00		Pass	
HE40	MCS0	2	151	242/61	5755	0.00	0.00	14.85	14.41	17.65	30.00		-3.00		Pass	
HE40	MCS0	2	159	Full	5795	0.00	0.00	16.78	17.32	20.07	30.00		-3.00		Pass	
HE40	MCS0	2	159	242/62	5795	0.00	0.00	15.12	15.20	18.17	30.00		-3.00		Pass	
HE80	MCS0	2	155	Full	5775	0.00	0.00	16.92	17.47	20.21	30.00		-3.00		Pass	
HE80	MCS0	2	155	484/65	5775	0.00	0.00	15.06	14.53	17.81	30.00		-3.00		Pass	
HE80	MCS0	2	155	484/66	5775	0.00	0.00	15.32	14.65	18.01	30.00		-3.00		Pass	

TEST RESULTS DATA
Power Spectral Density


Band IV																	
Mod.	Data Rate	Ntx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	Full	5745	0.06	0.06	2.22				6.98	30.00		0.01		Pass
11a	6Mbps	2	157	Full	5785	0.06	0.06	2.22				7.14	30.00		0.01		Pass
11a	6Mbps	2	165	Full	5825	0.06	0.06	2.22				7.96	30.00		0.01		Pass
HT20	MCS0	2	149	Full	5745	0.00	0.00	2.22				6.69	30.00		0.01		Pass
HT20	MCS0	2	157	Full	5785	0.00	0.00	2.22				6.73	30.00		0.01		Pass
HT20	MCS0	2	165	Full	5825	0.00	0.00	2.22				7.08	30.00		0.01		Pass
HT40	MCS0	2	151	Full	5755	0.00	0.00	2.22				3.91	30.00		0.01		Pass
HT40	MCS0	2	159	Full	5795	0.00	0.00	2.22				3.97	30.00		0.01		Pass
VHT80	MCS0	2	155	Full	5775	0.00	0.00	2.22				0.85	30.00		0.01		Pass
HE20	MCS0	2	149	Full	5745	0.00	0.00	2.22				6.71	30.00		0.01		Pass
HE20	MCS0	2	149	26/0	5745	0.00	0.00	2.22				5.75	30.00		0.01		Pass
HE20	MCS0	2	149	52/37	5745	0.00	0.00	2.22				6.06	30.00		0.01		Pass
HE20	MCS0	2	149	106/53	5745	0.00	0.00	2.22				6.01	30.00		0.01		Pass
HE20	MCS0	2	157	Full	5785	0.00	0.00	2.22				6.65	30.00		0.01		Pass
HE20	MCS0	2	165	Full	5825	0.00	0.00	2.22				7.11	30.00		0.01		Pass
HE20	MCS0	2	165	26/8	5825	0.00	0.00	2.22				5.90	30.00		0.01		Pass
HE20	MCS0	2	165	52/40	5825	0.00	0.00	2.22				5.86	30.00		0.01		Pass
HE20	MCS0	2	165	106/54	5825	0.00	0.00	2.22				6.22	30.00		0.01		Pass
HE40	MCS0	2	151	Full	5755	0.00	0.00	2.22				3.59	30.00		0.01		Pass
HE40	MCS0	2	151	242/61	5755	0.00	0.00	2.22				2.51	30.00		0.01		Pass
HE40	MCS0	2	159	Full	5795	0.00	0.00	2.22				3.96	30.00		0.01		Pass
HE40	MCS0	2	159	242/62	5795	0.00	0.00	2.22				2.69	30.00		0.01		Pass
HE80	MCS0	2	155	Full	5775	0.00	0.00	2.22				1.26	30.00		0.01		Pass
HE80	MCS0	2	155	484/65	5775	0.00	0.00	2.22				-0.04	30.00		0.01		Pass
HE80	MCS0	2	155	484/66	5775	0.00	0.00	2.22				-0.33	30.00		0.01		Pass



Appendix B. AC Conducted Emission Test Results

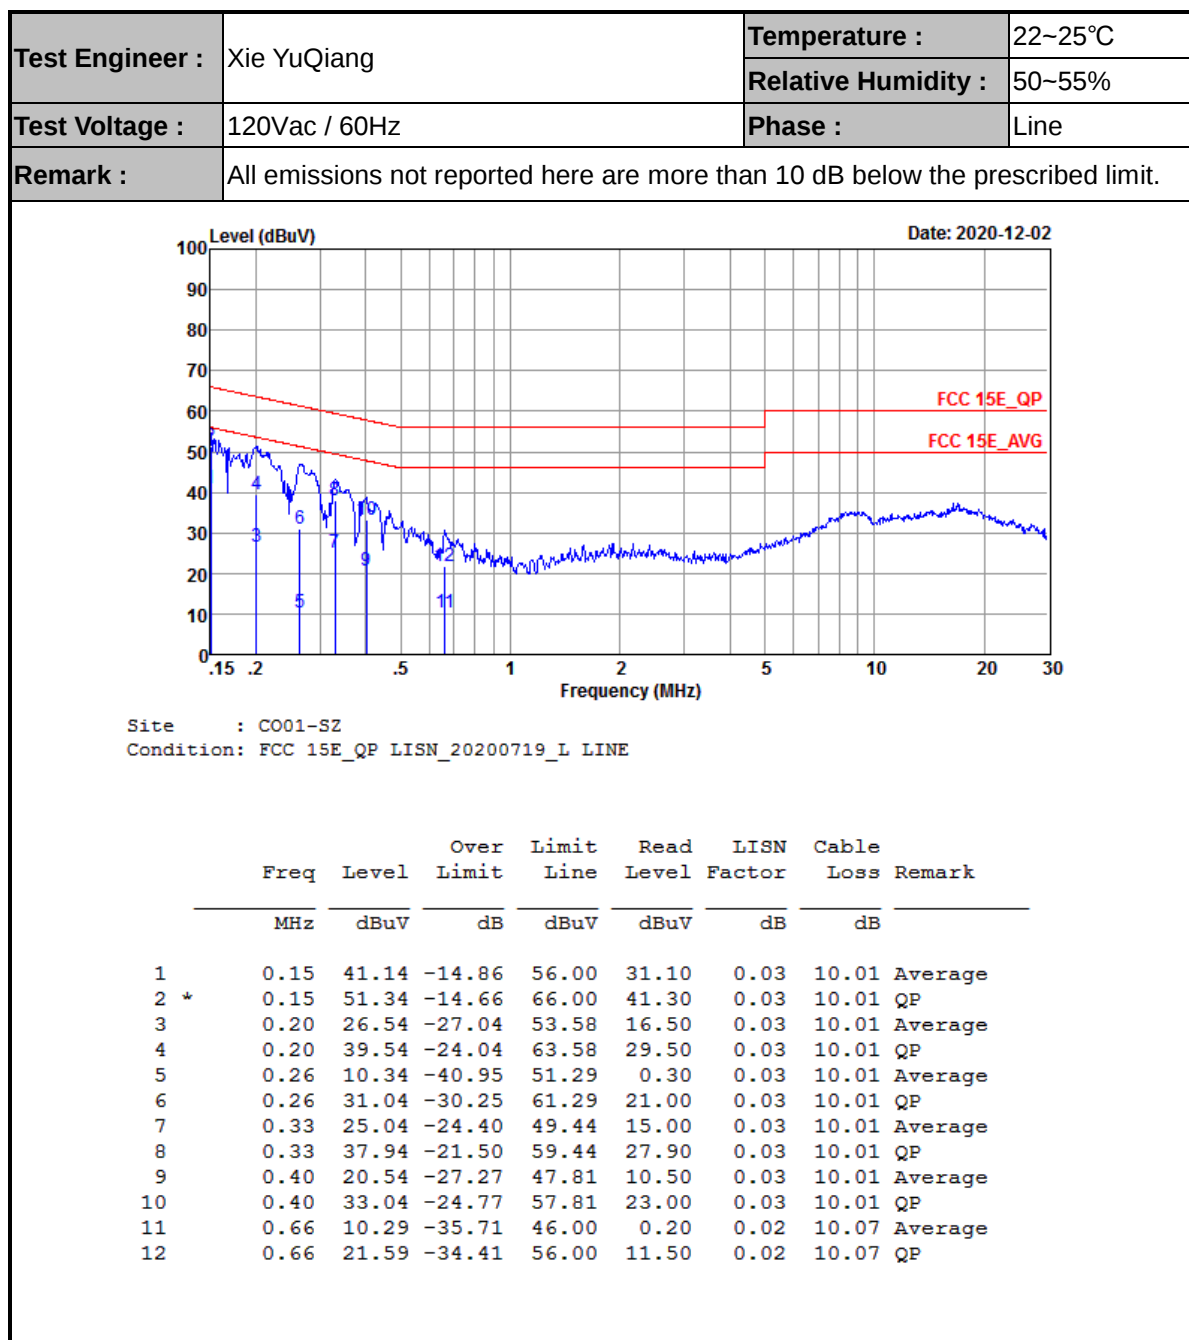

Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

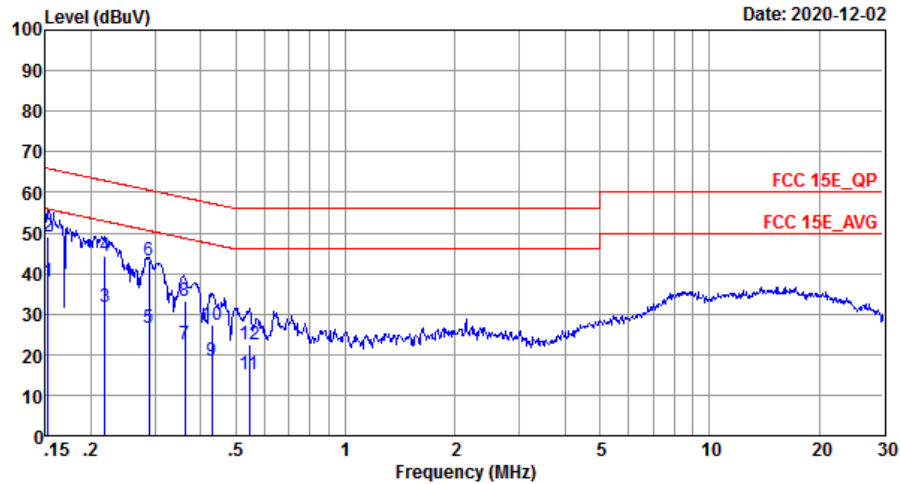

Site : CO01-SZ
Condition: FCC 15E_QP LISN_20200719_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	38.04	-17.83	55.87	28.00	0.03	10.01	Average
2 *	0.15	49.24	-16.63	65.87	39.20	0.03	10.01	QP
3	0.22	31.74	-21.14	52.88	21.70	0.03	10.01	Average
4	0.22	44.44	-18.44	62.88	34.40	0.03	10.01	QP
5	0.29	26.54	-24.00	50.54	16.50	0.03	10.01	Average
6	0.29	43.34	-17.20	60.54	33.30	0.03	10.01	QP
7	0.36	22.53	-26.16	48.69	12.50	0.02	10.01	Average
8	0.36	33.23	-25.46	58.69	23.20	0.02	10.01	QP
9	0.43	18.45	-28.79	47.24	8.40	0.02	10.03	Average
10	0.43	27.45	-29.79	57.24	17.40	0.02	10.03	QP
11	0.54	15.28	-30.72	46.00	5.20	0.02	10.06	Average
12	0.54	22.38	-33.62	56.00	12.30	0.02	10.06	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5620	48.58	-19.72	68.3	40.75	32.25	8.08	32.5	100	299	P	H
		5667.8	48.69	-32.78	81.47	40.51	32.27	8.41	32.5	100	299	P	H
		5718	58.18	-52.06	110.24	49.94	32.29	8.45	32.5	100	299	P	H
		5723.6	67.19	-51.82	119.01	58.95	32.29	8.45	32.5	100	299	P	H
	*	5745	110.06	-	-	101.84	32.3	8.42	32.5	100	299	P	H
		5745	103.47	-	-	95.25	32.3	8.42	32.5	100	299	A	H
		5601.2	47.64	-20.66	68.3	39.93	32.24	7.97	32.5	100	270	P	V
		5685.4	48.66	-45.8	94.46	40.36	32.28	8.52	32.5	100	270	P	V
		5720	56.04	-54.76	110.8	47.8	32.29	8.45	32.5	100	270	P	V
		5724.8	60.28	-61.46	121.74	52.04	32.29	8.45	32.5	100	270	P	V
	*	5745	106.62	-	-	98.4	32.3	8.42	32.5	100	270	P	V
		5745	100.1	-	-	91.88	32.3	8.42	32.5	100	270	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5630.6	48.64	-19.66	68.3	40.81	32.25	8.08	32.5	104	300	P	H
		5665.4	49.87	-29.83	79.7	41.81	32.26	8.3	32.5	104	300	P	H
		5706.6	48.45	-58.6	107.05	40.18	32.28	8.49	32.5	104	300	P	H
		5724.6	47.39	-73.9	121.29	39.15	32.29	8.45	32.5	104	300	P	H
	*	5785	110.15	-	-	101.99	32.31	8.35	32.5	104	300	P	H
		5785	103.5	-	-	95.34	32.31	8.35	32.5	104	300	A	H
		5853.4	47.69	-66.76	114.45	39.44	32.34	8.41	32.5	104	300	P	H
		5869.8	48.64	-58.01	106.65	40.36	32.34	8.44	32.5	104	300	P	H
		5894.6	48.66	-42.04	90.7	40.3	32.36	8.5	32.5	104	300	P	H
		5948.6	47.36	-20.94	68.3	38.94	32.38	8.54	32.5	104	300	P	H
		5610.6	47.93	-20.37	68.3	40.22	32.24	7.97	32.5	100	269	P	V
		5651.2	48.26	-20.93	69.19	40.2	32.26	8.3	32.5	100	269	P	V
		5703.6	47.83	-58.38	106.21	39.56	32.28	8.49	32.5	100	269	P	V
		5722.8	47.07	-70.11	117.18	38.83	32.29	8.45	32.5	100	269	P	V
	*	5785	106.64	-	-	98.48	32.31	8.35	32.5	100	269	P	V
		5785	99.38	-	-	91.22	32.31	8.35	32.5	100	269	A	V
		5850.2	46.68	-75.06	121.74	38.43	32.34	8.41	32.5	100	269	P	V
		5856.4	46.46	-63.95	110.41	38.18	32.34	8.44	32.5	100	269	P	V
		5899.6	47.34	-39.67	87.01	38.98	32.36	8.5	32.5	100	269	P	V
		5928.4	47.58	-20.72	68.3	39.18	32.37	8.53	32.5	100	269	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	109.17	-	-	100.96	32.33	8.38	32.5	230	293	P	H
		5825	101.9	-	-	93.69	32.33	8.38	32.5	230	293	A	H
		5851.4	57.04	-61.97	119.01	48.79	32.34	8.41	32.5	230	293	P	H
		5856.4	50.96	-59.45	110.41	42.68	32.34	8.44	32.5	230	293	P	H
		5887.6	48.36	-47.51	95.87	40	32.36	8.5	32.5	230	293	P	H
		5945.4	47.76	-20.54	68.3	39.34	32.38	8.54	32.5	230	293	P	H
	*	5825	105.77	-	-	97.56	32.33	8.38	32.5	100	269	P	V
		5825	99.32	-	-	91.11	32.33	8.38	32.5	100	269	A	V
		5850	58.13	-64.07	122.2	49.88	32.34	8.41	32.5	100	269	P	V
		5855.6	51.33	-59.3	110.63	43.05	32.34	8.44	32.5	100	269	P	V
		5876.8	47.71	-56.16	103.87	39.39	32.35	8.47	32.5	100	269	P	V
		5941	46.99	-21.31	68.3	38.57	32.38	8.54	32.5	100	269	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	47.92	-26.08	74	54.83	39.31	11.54	57.76	165	110	P	H
		17235	50.41	-17.89	68.3	51.97	41.5	14.91	57.97	170	155	P	H
		11490	47.93	-26.07	74	54.84	39.31	11.54	57.76	165	110	P	V
		17235	50.05	-18.25	68.3	51.61	41.5	14.91	57.97	170	155	P	V
802.11a CH 157 5785MHz		11570	47.9	-26.1	74	54.71	39.25	11.61	57.67	175	198	P	H
		17355	48.49	-19.81	68.3	48.99	42.2	15.1	57.8	189	185	P	H
		11570	47.13	-26.87	74	53.94	39.25	11.61	57.67	175	198	P	V
		17355	47.95	-20.35	68.3	48.45	42.2	15.1	57.8	189	185	P	V
802.11a CH 165 5825MHz		11650	47.59	-26.41	74	54.3	39.21	11.67	57.59	156	347	P	H
		17475	50.72	-17.58	68.3	50.17	42.9	15.29	57.64	150	360	P	H
		11650	47.74	-26.26	74	54.45	39.21	11.67	57.59	156	347	P	V
		17475	50.58	-17.72	68.3	50.03	42.9	15.29	57.64	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5600.4	48.4	-19.9	68.3	40.69	32.24	7.97	32.5	100	299	P	H
		5675.4	49.32	-37.77	87.09	41.14	32.27	8.41	32.5	100	299	P	H
		5719.6	56.74	-53.95	110.69	48.5	32.29	8.45	32.5	100	299	P	H
		5723.4	61.56	-56.99	118.55	53.32	32.29	8.45	32.5	100	299	P	H
	*	5745	110.76	-	-	102.54	32.3	8.42	32.5	100	299	P	H
		5745	103.11	-	-	94.89	32.3	8.42	32.5	100	299	A	H
		5603	47.53	-20.77	68.3	39.82	32.24	7.97	32.5	100	270	P	V
		5680.8	47.75	-43.32	91.07	39.57	32.27	8.41	32.5	100	270	P	V
		5715.8	51.76	-57.87	109.63	43.49	32.28	8.49	32.5	100	270	P	V
		5724.6	61.32	-59.97	121.29	53.08	32.29	8.45	32.5	100	270	P	V
	*	5745	107.47	-	-	99.25	32.3	8.42	32.5	100	270	P	V
		5745	99.99	-	-	91.77	32.3	8.42	32.5	100	270	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5632.6	48.12	-20.18	68.3	40.17	32.26	8.19	32.5	100	299	P	H
		5677.8	49.13	-39.73	88.86	40.95	32.27	8.41	32.5	100	299	P	H
		5720	48.11	-62.69	110.8	39.87	32.29	8.45	32.5	100	299	P	H
		5722.6	48.64	-68.09	116.73	40.4	32.29	8.45	32.5	100	299	P	H
	*	5785	109.72	-	-	101.56	32.31	8.35	32.5	100	299	P	H
		5785	102.77	-	-	94.61	32.31	8.35	32.5	100	299	A	H
		5850	49.06	-73.14	122.2	40.81	32.34	8.41	32.5	100	299	P	H
		5857.2	47.13	-63.05	110.18	38.85	32.34	8.44	32.5	100	299	P	H
		5893.4	47.85	-43.73	91.58	39.49	32.36	8.5	32.5	100	299	P	H
		5935.2	47.13	-21.17	68.3	38.73	32.37	8.53	32.5	100	299	P	H
		5600.8	47.17	-21.13	68.3	39.46	32.24	7.97	32.5	100	275	P	V
		5674.8	48.49	-38.15	86.64	40.31	32.27	8.41	32.5	100	275	P	V
		5715.2	46.85	-62.61	109.46	38.58	32.28	8.49	32.5	100	275	P	V
		5720.4	46.27	-65.44	111.71	38.03	32.29	8.45	32.5	100	275	P	V
	*	5785	105.31	-	-	97.15	32.31	8.35	32.5	100	275	P	V
		5785	99.52	-	-	91.36	32.31	8.35	32.5	100	275	A	V
		5851.4	46.31	-72.7	119.01	38.06	32.34	8.41	32.5	100	275	P	V
		5861.4	46.33	-62.68	109.01	38.05	32.34	8.44	32.5	100	275	P	V
		5902.2	47.22	-37.87	85.09	38.86	32.36	8.5	32.5	100	275	P	V
		5938.4	47	-21.3	68.3	38.6	32.37	8.53	32.5	100	275	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	109.45	-	-	101.24	32.33	8.38	32.5	100	291	P	H
		5825	101.37	-	-	93.16	32.33	8.38	32.5	100	291	A	H
		5851.6	55.48	-63.07	118.55	47.23	32.34	8.41	32.5	100	291	P	H
		5855	52.73	-58.07	110.8	44.45	32.34	8.44	32.5	100	291	P	H
		5876.2	48.67	-55.64	104.31	40.35	32.35	8.47	32.5	100	291	P	H
		5943.6	48.12	-20.18	68.3	39.7	32.38	8.54	32.5	100	291	P	H
	*	5825	105.17	-	-	96.96	32.33	8.38	32.5	377	270	P	V
		5825	96.55	-	-	88.34	32.33	8.38	32.5	377	270	A	V
		5850	55.12	-67.08	122.2	46.87	32.34	8.41	32.5	377	270	P	V
		5856.6	50.62	-59.73	110.35	42.34	32.34	8.44	32.5	377	270	P	V
		5912.4	47.75	-29.82	77.57	39.37	32.37	8.51	32.5	377	270	P	V
		5933.8	47.04	-21.26	68.3	38.64	32.37	8.53	32.5	377	270	P	V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	47.32	-26.68	74	54.23	39.31	11.54	57.76	165	110	P	H
		17235	50.46	-17.84	68.3	52.02	41.5	14.91	57.97	170	155	P	H
		11490	47.85	-26.15	74	54.76	39.31	11.54	57.76	165	110	P	V
		17235	50.9	-17.4	68.3	52.46	41.5	14.91	57.97	170	155	P	V
802.11n HT20 CH 157 5785MHz		11570	47.07	-26.93	74	53.88	39.25	11.61	57.67	175	198	P	H
		17355	50.03	-18.27	68.3	50.53	42.2	15.1	57.8	189	185	P	H
		11570	47.55	-26.45	74	54.36	39.25	11.61	57.67	175	198	P	V
		17355	50.21	-18.09	68.3	50.71	42.2	15.1	57.8	189	185	P	V
802.11n HT20 CH 165 5825MHz		11650	47.43	-26.57	74	54.14	39.21	11.67	57.59	156	347	P	H
		17475	48.35	-19.95	68.3	21.96	42.9	15.29	31.8	150	360	P	H
		11650	47.53	-26.47	74	54.24	39.21	11.67	57.59	156	347	P	V
		17475	48.02	-20.28	68.3	21.63	42.9	15.29	31.8	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5600	49.41	-18.89	68.3	41.7	32.24	7.97	32.5	120	302	P	H
		5699.4	53.85	-50.91	104.76	45.55	32.28	8.52	32.5	120	302	P	H
		5719.2	60.46	-50.12	110.58	52.22	32.29	8.45	32.5	120	302	P	H
		5724.4	63.38	-57.45	120.83	55.14	32.29	8.45	32.5	120	302	P	H
	*	5755	105.06	-	-	96.87	32.3	8.39	32.5	120	302	P	H
		5755	98.62	-	-	90.43	32.3	8.39	32.5	120	302	A	H
		5855	49.2	-61.6	110.8	40.92	32.34	8.44	32.5	120	302	P	H
		5855	49.2	-61.6	110.8	40.92	32.34	8.44	32.5	120	302	P	H
		5887.8	48.85	-46.87	95.72	40.49	32.36	8.5	32.5	120	302	P	H
		5937.2	47.39	-20.91	68.3	38.99	32.37	8.53	32.5	120	302	P	H
		5626	49.85	-18.45	68.3	42.02	32.25	8.08	32.5	330	267	P	V
		5695.6	51.89	-50.08	101.97	43.59	32.28	8.52	32.5	330	267	P	V
		5719.6	62.4	-48.29	110.69	54.16	32.29	8.45	32.5	330	267	P	V
		5721.8	60.22	-54.68	114.9	51.98	32.29	8.45	32.5	330	267	P	V
	*	5755	105.73	-	-	97.54	32.3	8.39	32.5	330	267	P	V
		5755	97.51	-	-	89.32	32.3	8.39	32.5	330	267	A	V
		5852.2	47.07	-70.11	117.18	38.82	32.34	8.41	32.5	330	267	P	V
		5857.6	50.51	-59.56	110.07	42.23	32.34	8.44	32.5	330	267	P	V
		5885.2	48.4	-49.25	97.65	40.08	32.35	8.47	32.5	330	267	P	V
		5936.6	48.97	-19.33	68.3	40.57	32.37	8.53	32.5	330	267	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5605.8	48.7	-19.6	68.3	40.99	32.24	7.97	32.5	100	292	P	H
		5668.8	49.91	-32.3	82.21	41.73	32.27	8.41	32.5	100	292	P	H
		5702.2	48.32	-57.5	105.82	40.05	32.28	8.49	32.5	100	292	P	H
		5723.6	48.68	-70.33	119.01	40.44	32.29	8.45	32.5	100	292	P	H
	*	5795	105.18	-	-	97.04	32.32	8.32	32.5	100	292	P	H
		5795	97.88	-	-	89.74	32.32	8.32	32.5	100	292	A	H
		5850.6	51.42	-69.41	120.83	43.17	32.34	8.41	32.5	100	292	P	H
		5857.6	49.1	-60.97	110.07	40.82	32.34	8.44	32.5	100	292	P	H
		5884.2	48.82	-49.57	98.39	40.5	32.35	8.47	32.5	100	292	P	H
		5938.2	47.5	-20.8	68.3	39.1	32.37	8.53	32.5	100	292	P	H
		5640.2	49.67	-18.63	68.3	41.72	32.26	8.19	32.5	330	268	P	V
		5692.4	49.07	-50.54	99.61	40.77	32.28	8.52	32.5	330	268	P	V
		5703.8	48.75	-57.52	106.27	40.48	32.28	8.49	32.5	330	268	P	V
		5721.2	48.52	-65.02	113.54	40.28	32.29	8.45	32.5	330	268	P	V
	*	5795	103.75	-	-	95.61	32.32	8.32	32.5	330	268	P	V
		5795	96.28	-	-	88.14	32.32	8.32	32.5	330	268	A	V
		5853.6	47.79	-66.2	113.99	39.51	32.34	8.44	32.5	330	268	P	V
		5866.2	48.99	-58.67	107.66	40.71	32.34	8.44	32.5	330	268	P	V
		5923.8	49.16	-20.02	69.18	40.76	32.37	8.53	32.5	330	268	P	V
		5945.8	47.63	-20.67	68.3	39.21	32.38	8.54	32.5	330	268	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	47.75	-26.25	74	54.64	39.29	11.56	57.74	160	360	P	H
		17265	50.01	-18.29	68.3	51.27	41.7	14.96	57.92	170	360	P	H
		11510	47.75	-26.25	74	54.64	39.29	11.56	57.74	160	360	P	V
		17265	50.85	-17.45	68.3	52.11	41.7	14.96	57.92	170	360	P	V
802.11n HT40 CH 159 5795MHz		11590	47.41	-26.59	74	54.19	39.24	11.63	57.65	170	300	P	H
		17385	50.58	-17.72	68.3	50.78	42.4	15.15	57.75	150	200	P	H
		11590	47.23	-26.77	74	54.01	39.24	11.63	57.65	170	300	P	V
		17385	50.01	-18.29	68.3	50.21	42.4	15.15	57.75	150	200	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5609	48.33	-19.97	68.3	40.62	32.24	7.97	32.5	116	303	P	H
		5683.8	48.89	-44.39	93.28	40.59	32.28	8.52	32.5	116	303	P	H
		5712.2	50.6	-58.02	108.62	42.33	32.28	8.49	32.5	116	303	P	H
		5722.2	49.13	-66.69	115.82	40.89	32.29	8.45	32.5	116	303	P	H
	*	5775	101.74	-	-	93.58	32.31	8.35	32.5	116	303	P	H
		5775	93.87	-	-	85.71	32.31	8.35	32.5	116	303	A	H
		5851.4	52.76	-66.25	119.01	44.51	32.34	8.41	32.5	116	303	P	H
		5861.2	54.02	-55.04	109.06	45.74	32.34	8.44	32.5	116	303	P	H
		5876.8	48.56	-55.31	103.87	40.24	32.35	8.47	32.5	116	303	P	H
		5935	47.72	-20.58	68.3	39.32	32.37	8.53	32.5	116	303	P	H
		5614.6	49.4	-18.9	68.3	41.69	32.24	7.97	32.5	314	267	P	V
		5696.8	50.5	-52.35	102.85	42.2	32.28	8.52	32.5	314	267	P	V
		5713.6	52.05	-56.96	109.01	43.78	32.28	8.49	32.5	314	267	P	V
		5723.2	52.44	-65.66	118.1	44.2	32.29	8.45	32.5	314	267	P	V
	*	5775	99.86	-	-	91.7	32.31	8.35	32.5	314	267	P	V
		5775	92.1	-	-	83.94	32.31	8.35	32.5	314	267	A	V
		5854.6	52.06	-59.65	111.71	43.78	32.34	8.44	32.5	314	267	P	V
		5856.6	53.91	-56.44	110.35	45.63	32.34	8.44	32.5	314	267	P	V
		5914.2	48.07	-28.17	76.24	39.69	32.37	8.51	32.5	314	267	P	V
		5937.2	47.37	-20.93	68.3	38.97	32.37	8.53	32.5	314	267	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	47.44	-26.56	74	54.26	39.26	11.6	57.68	160	360	P	H
VHT80		17325	49.23	-19.07	68.3	23.98	42	15.05	31.8	170	360	P	H
CH 155		11550	47.14	-26.86	74	53.96	39.26	11.6	57.68	160	360	P	V
5775MHz		17325	48.74	-19.56	68.3	23.49	42	15.05	31.8	170	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11n HT40 LF		30	22.06	-17.94	40	28.73	25.2	0.53	32.4	-	-	P	H
		96.93	33.96	-9.54	43.5	49.41	15.7	1	32.15	139	58	P	H
		192.96	23.65	-19.85	43.5	39.55	14.8	1.41	32.11	-	-	P	H
		295.78	29.67	-16.33	46	40.37	19.22	1.79	31.71	-	-	P	H
		557.68	26.83	-19.17	46	28.83	26.38	2.48	30.86	-	-	P	H
		941.8	30.16	-15.84	46	28.02	30.42	3.22	31.5	-	-	P	H
		48.43	23.75	-16.25	40	39.96	15.5	0.69	32.4	-	-	P	V
		96.93	32.52	-10.98	43.5	47.97	15.7	1	32.15	109	43	P	V
		159.98	25.54	-17.96	43.5	39.93	16.5	1.29	32.18	-	-	P	V
		292.87	24.4	-21.6	46	35.17	19.16	1.78	31.71	-	-	P	V
		409.27	25.73	-20.27	46	32.63	22.36	2.12	31.38	-	-	P	V
		951.5	30.47	-15.53	46	27.84	30.9	3.23	31.5	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE20_Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 149 5745MHz		5625.8	49.56	-18.74	68.3	40.19	32.2	9.84	32.67	146	357	P	H
		5695.6	49.29	-52.68	101.97	39.83	32.2	9.92	32.66	146	357	P	H
		5714.6	52.5	-56.79	109.29	42.94	32.2	10.01	32.65	146	357	P	H
		5724.8	57.06	-64.68	121.74	47.5	32.2	10.01	32.65	146	357	P	H
	*	5745	105.73	-	-	96.09	32.2	10.09	32.65	146	357	P	H
		5745	99.1	-	-	89.46	32.2	10.09	32.65	146	357	A	H
		5649.2	50.29	-18.01	68.3	40.92	32.2	9.84	32.67	174	290	P	V
		5667	50.51	-30.37	80.88	41.06	32.2	9.92	32.67	174	290	P	V
		5718	56.45	-53.79	110.24	46.89	32.2	10.01	32.65	174	290	P	V
		5724.6	62.99	-58.3	121.29	53.43	32.2	10.01	32.65	174	290	P	V
	*	5745	109.7	-	-	100.06	32.2	10.09	32.65	174	290	P	V
		5745	103.1	-	-	93.46	32.2	10.09	32.65	174	290	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 157 5785MHz		5627.4	49.79	-18.51	68.3	40.42	32.2	9.84	32.67	143	357	P	H
		5657.4	49.45	-24.33	73.78	40.08	32.2	9.84	32.67	143	357	P	H
		5707	50.67	-56.49	107.16	41.11	32.2	10.01	32.65	143	357	P	H
		5723.6	48.1	-70.91	119.01	38.54	32.2	10.01	32.65	143	357	P	H
	*	5785	105.39	-	-	95.66	32.2	10.17	32.64	143	357	P	H
		5785	98.19	-	-	88.46	32.2	10.17	32.64	143	357	A	H
		5854.2	46.74	-65.88	112.62	36.84	32.28	10.25	32.63	143	357	P	H
		5868.4	48.78	-58.27	107.05	38.77	32.3	10.33	32.62	143	357	P	H
		5903	49.33	-35.17	84.5	39.18	32.35	10.42	32.62	143	357	P	H
		5930.6	50.26	-18.04	68.3	40.05	32.4	10.42	32.61	143	357	P	H
		5640.2	52.13	-16.17	68.3	42.76	32.2	9.84	32.67	158	290	P	V
		5660	50.71	-25	75.71	41.34	32.2	9.84	32.67	158	290	P	V
		5710.2	50.99	-57.07	108.06	41.43	32.2	10.01	32.65	158	290	P	V
		5721.2	48.8	-64.74	113.54	39.24	32.2	10.01	32.65	158	290	P	V
	*	5785	109.71	-	-	99.98	32.2	10.17	32.64	158	290	P	V
		5785	102.39	-	-	92.66	32.2	10.17	32.64	158	290	A	V
		5851.2	49.88	-69.58	119.46	39.98	32.28	10.25	32.63	158	290	P	V
		5866.2	49.38	-58.28	107.66	39.37	32.3	10.33	32.62	158	290	P	V
		5916.4	49.36	-25.26	74.62	39.18	32.37	10.42	32.61	158	290	P	V
		5930.8	50.66	-17.64	68.3	40.45	32.4	10.42	32.61	158	290	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 165 5825MHz	*	5825	105.8	-	-	95.94	32.24	10.25	32.63	169	350	P	H
		5825	97.81	-	-	87.95	32.24	10.25	32.63	169	350	A	H
		5850	55.31	-66.89	122.2	45.41	32.28	10.25	32.63	169	350	P	H
		5864.4	49.61	-58.56	108.17	39.6	32.3	10.33	32.62	169	350	P	H
		5879	49.99	-52.25	102.24	39.96	32.32	10.33	32.62	169	350	P	H
		5930.8	50.07	-18.23	68.3	39.86	32.4	10.42	32.61	169	350	P	H
	*	5825	108.55	-	-	98.69	32.24	10.25	32.63	165	290	P	V
		5825	101.25	-	-	91.39	32.24	10.25	32.63	165	290	A	V
		5850.8	55.77	-64.61	120.38	45.87	32.28	10.25	32.63	165	290	P	V
		5855.6	51.05	-59.58	110.63	41.07	32.28	10.33	32.63	165	290	P	V
		5882.6	50.39	-49.18	99.57	40.36	32.32	10.33	32.62	165	290	P	V
		5937	50.25	-18.05	68.3	39.95	32.41	10.5	32.61	165	290	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE20_Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		11490	47.08	-26.92	74	46.58	40.5	12.88	52.88	165	110	P	H
HE20 Full		17235	48.04	-20.26	68.3	41.46	43.2	15.71	52.33	170	155	P	H
CH 149		11490	47.38	-26.62	74	46.88	40.5	12.88	52.88	146	123	P	V
5745MHz		17235	48.57	-19.73	68.3	41.99	43.2	15.71	52.33	129	185	P	V
802.11ax		11570	47.42	-26.58	74	46.97	40.32	12.93	52.8	163	225	P	H
HE20 Full		17355	49.5	-18.8	68.3	42.58	43.61	15.8	52.49	144	105	P	H
CH 157		11570	47.95	-26.05	74	47.5	40.32	12.93	52.8	175	198	P	V
5785MHz		17355	48.88	-19.42	68.3	41.96	43.61	15.8	52.49	189	185	P	V
802.11ax		11650	47.59	-26.41	74	47.2	40.11	12.99	52.71	156	347	P	H
HE20 Full		17475	47.64	-20.66	68.3	40.39	44.01	15.89	52.65	136	192	P	H
CH 165		11650	47.14	-26.86	74	46.75	40.11	12.99	52.71	142	326	P	V
5825MHz		17475	48.79	-19.51	68.3	41.54	44.01	15.89	52.65	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE40_Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 151 5755MHz		5612.2	52.33	-15.97	68.3	43.04	32.2	9.76	32.67	158	355	P	H
		5696.4	49.27	-53.28	102.55	39.81	32.2	9.92	32.66	158	355	P	H
		5719.8	56.25	-54.49	110.74	46.69	32.2	10.01	32.65	158	355	P	H
		5722.4	57.32	-58.95	116.27	47.76	32.2	10.01	32.65	158	355	P	H
		5755	104.5	-	-	94.86	32.2	10.09	32.65	158	355	P	H
		5755	97.3	-	-	87.66	32.2	10.09	32.65	158	355	A	H
		5850.4	48.26	-73.03	121.29	38.36	32.28	10.25	32.63	158	355	P	H
		5859.8	48.95	-60.5	109.45	38.95	32.29	10.33	32.62	158	355	P	H
		5907.2	51.47	-29.93	81.4	41.31	32.36	10.42	32.62	158	355	P	H
		5940.6	50.23	-18.07	68.3	39.93	32.41	10.5	32.61	158	355	P	H
		5600.2	54.45	-13.85	68.3	45.17	32.2	9.76	32.68	155	310	P	V
		5690.6	50.69	-47.6	98.29	41.23	32.2	9.92	32.66	155	310	P	V
		5719.4	59.68	-50.95	110.63	50.12	32.2	10.01	32.65	155	310	P	V
		5725	60.42	-61.78	122.2	50.86	32.2	10.01	32.65	155	310	P	V
		5755	108.28	-	-	98.64	32.2	10.09	32.65	155	310	P	V
		5755	101.14	-	-	91.5	32.2	10.09	32.65	155	310	A	V
		5854.4	48.32	-63.85	112.17	38.42	32.28	10.25	32.63	155	310	P	V
		5859.6	49.51	-60	109.51	39.51	32.29	10.33	32.62	155	310	P	V
		5889.4	49.94	-44.6	94.54	39.9	32.33	10.33	32.62	155	310	P	V
		5930	50.64	-17.66	68.3	40.43	32.4	10.42	32.61	155	310	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 159 5795MHz		5647	51.09	-17.21	68.3	41.72	32.2	9.84	32.67	110	355	P	H
		5652.8	50.85	-19.52	70.37	41.48	32.2	9.84	32.67	110	355	P	H
		5709.6	49.11	-58.78	107.89	39.55	32.2	10.01	32.65	110	355	P	H
		5720.2	47.85	-63.41	111.26	38.29	32.2	10.01	32.65	110	355	P	H
		5795	103.86	-	-	94.13	32.2	10.17	32.64	110	355	P	H
		5795	96.32	-	-	86.59	32.2	10.17	32.64	110	355	A	H
		5852.8	50.85	-64.97	115.82	40.95	32.28	10.25	32.63	110	355	P	H
		5874	49.1	-56.38	105.48	39.08	32.31	10.33	32.62	110	355	P	H
		5875.6	51.27	-53.49	104.76	41.25	32.31	10.33	32.62	110	355	P	H
		5942.6	50	-18.3	68.3	39.7	32.41	10.5	32.61	110	355	P	H
		5633.2	52.66	-15.64	68.3	43.29	32.2	9.84	32.67	162	297	P	V
		5654.4	52.21	-19.35	71.56	42.84	32.2	9.84	32.67	162	297	P	V
		5716.8	49.39	-60.52	109.91	39.83	32.2	10.01	32.65	162	297	P	V
		5721.4	49.61	-64.38	113.99	40.05	32.2	10.01	32.65	162	297	P	V
		5795	107.94	-	-	98.21	32.2	10.17	32.64	162	297	P	V
		5795	100.59	-	-	90.86	32.2	10.17	32.64	162	297	A	V
		5850	52.08	-70.12	122.2	42.18	32.28	10.25	32.63	162	297	P	V
		5858	50.16	-59.8	109.96	40.16	32.29	10.33	32.62	162	297	P	V
		5899.4	49.57	-37.58	87.15	39.42	32.35	10.42	32.62	162	297	P	V
		5943	50.26	-18.04	68.3	39.96	32.41	10.5	32.61	162	297	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE40_Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		11510	47.52	-26.48	74	47.07	40.47	12.88	52.9	126	336	P	H
HE40 Full		17265	48.95	-19.35	68.3	42.28	43.3	15.74	52.37	156	291	P	H
CH 151		11510	47.09	-26.91	74	46.64	40.47	12.88	52.9	160	360	P	V
5755MHz		17265	49.51	-18.79	68.3	42.84	43.3	15.74	52.37	170	360	P	V
802.11ax		11590	47.72	-26.28	74	47.27	40.27	12.96	52.78	126	297	P	H
HE40 Full		17385	50.34	-17.96	68.3	43.34	43.71	15.83	52.54	136	248	P	H
CH 159		11590	47.06	-26.94	74	46.61	40.27	12.96	52.78	170	300	P	V
5795MHz		17385	49.88	-18.42	68.3	42.88	43.71	15.83	52.54	150	200	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 155 5775MHz		5607.2	49.91	-18.39	68.3	40.62	32.2	9.76	32.67	100	356	P	H
		5680.8	53.06	-38.01	91.07	43.6	32.2	9.92	32.66	100	356	P	H
		5719.2	55.9	-54.68	110.58	46.34	32.2	10.01	32.65	100	356	P	H
		5722.4	57.91	-58.36	116.27	48.35	32.2	10.01	32.65	100	356	P	H
		5775	100.63	-	-	90.99	32.2	10.09	32.65	100	356	P	H
		5775	92.56	-	-	82.92	32.2	10.09	32.65	100	356	A	H
		5850.4	53.22	-68.07	121.29	43.32	32.28	10.25	32.63	100	356	P	H
		5865.4	54.3	-53.59	107.89	44.29	32.3	10.33	32.62	100	356	P	H
		5883.4	50.62	-48.36	98.98	40.58	32.33	10.33	32.62	100	356	P	H
		5934.8	49.05	-19.25	68.3	38.76	32.4	10.5	32.61	100	356	P	H
		5642	51.59	-16.71	68.3	42.22	32.2	9.84	32.67	144	297	P	V
		5693.8	56.75	-43.89	100.64	47.29	32.2	9.92	32.66	144	297	P	V
		5715	58.7	-50.7	109.4	49.14	32.2	10.01	32.65	144	297	P	V
		5724	60.42	-59.5	119.92	50.86	32.2	10.01	32.65	144	297	P	V
		5775	103.39	-	-	93.75	32.2	10.09	32.65	144	297	P	V
		5775	96.04	-	-	86.4	32.2	10.09	32.65	144	297	A	V
		5854	56.59	-56.49	113.08	46.69	32.28	10.25	32.63	144	297	P	V
		5860.6	57.01	-52.22	109.23	47.01	32.29	10.33	32.62	144	297	P	V
		5879.2	52.46	-49.63	102.09	42.43	32.32	10.33	32.62	144	297	P	V
		5936.4	49.98	-18.32	68.3	39.69	32.4	10.5	32.61	144	297	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		11510	47.92	-26.08	74	47.47	40.47	12.88	52.9	126	336	P	H
HE80 Full		17265	48.68	-19.62	68.3	42.01	43.3	15.74	52.37	156	291	P	H
CH 155		11510	47.79	-26.21	74	47.34	40.47	12.88	52.9	160	360	P	V
5775MHz		17265	50.42	-17.88	68.3	43.75	43.3	15.74	52.37	170	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 - 5725~5850MHz

WIFI 802.11ax HE20_Partial 106 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Partial 106/53 CH 149 5745MHz		5641.6	48.75	-19.55	68.3	39.38	32.2	9.84	32.67	100	358	P	H
		5652.4	49.61	-20.47	70.08	40.24	32.2	9.84	32.67	100	358	P	H
		5718.2	49.32	-60.98	110.3	39.76	32.2	10.01	32.65	100	358	P	H
		5723.8	47.66	-71.8	119.46	38.1	32.2	10.01	32.65	100	358	P	H
		5745	105.47	-	-	95.83	32.2	10.09	32.65	100	358	P	H
		5745	99.13	-	-	89.49	32.2	10.09	32.65	100	358	A	H
		5608.2	49.97	-18.33	68.3	40.68	32.2	9.76	32.67	163	297	P	V
		5659.2	49.11	-26	75.11	39.74	32.2	9.84	32.67	163	297	P	V
		5701.8	48.31	-57.39	105.7	38.76	32.2	10.01	32.66	163	297	P	V
		5724.6	49.24	-72.05	121.29	39.68	32.2	10.01	32.65	163	297	P	V
		5745	110.21	-	-	100.57	32.2	10.09	32.65	163	297	P	V
		5745	103.83	-	-	94.19	32.2	10.09	32.65	163	297	A	V
802.11ax HE20 Partial 106/54 CH 165 5825MHz		5825	106.04	-	-	96.18	32.24	10.25	32.63	110	321	P	H
		5825	99.31	-	-	89.45	32.24	10.25	32.63	110	321	A	H
		5851.2	48.95	-70.51	119.46	39.05	32.28	10.25	32.63	110	321	P	H
		5872.4	49.81	-56.12	105.93	39.79	32.31	10.33	32.62	110	321	P	H
		5875.2	49.71	-55.34	105.05	39.69	32.31	10.33	32.62	110	321	P	H
		5944.2	50.08	-18.22	68.3	39.77	32.42	10.5	32.61	110	321	P	H
		5825	108.62	-	-	98.76	32.24	10.25	32.63	171	319	P	V
		5825	101.45	-	-	91.59	32.24	10.25	32.63	171	319	A	V
		5853.2	49.95	-64.95	114.9	40.05	32.28	10.25	32.63	171	319	P	V
		5860.4	49.66	-59.63	109.29	39.66	32.29	10.33	32.62	171	319	P	V
		5916.2	50.48	-24.29	74.77	40.3	32.37	10.42	32.61	171	319	P	V
		5948.6	49.94	-18.36	68.3	39.63	32.42	10.5	32.61	171	319	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE20_Partial 106 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 106/53 CH 149 5745MHz		11490	46.23	-27.77	74	45.73	40.5	12.88	52.88	201	0	P	H
		17235	46.86	-21.44	68.3	40.28	43.2	15.71	52.33	170	155	P	H
		11488.5	45.88	-28.12	74	45.38	40.5	12.88	52.88	201	0	P	V
		17235	47.73	-20.57	68.3	41.15	43.2	15.71	52.33	129	185	P	V
802.11ax HE20 Partial 106/54 CH 165 5825MHz		11650	45.49	-28.51	74	45.1	40.11	12.99	52.71	201	0	P	H
		17475	49.94	-18.36	68.3	42.69	44.01	15.89	52.65	136	192	P	H
		11650	45.56	-28.44	74	45.17	40.11	12.99	52.71	201	0	P	V
		17475	47.97	-20.33	68.3	40.72	44.01	15.89	52.65	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE40_Partial 242 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/61 CH 151 5755MHz		5600	51.08	-17.22	68.3	41.8	32.2	9.76	32.68	176	350	P	H
		5696.2	49.51	-52.9	102.41	40.05	32.2	9.92	32.66	176	350	A	H
		5710.2	50.12	-57.94	108.06	40.56	32.2	10.01	32.65	176	350	P	H
		5724.2	49.29	-71.09	120.38	39.73	32.2	10.01	32.65	176	350	P	H
		5755	104.45	-	-	94.81	32.2	10.09	32.65	176	350	P	H
		5755	97.67	-	-	88.03	32.2	10.09	32.65	176	350	P	H
		5851	49.36	-70.56	119.92	39.46	32.28	10.25	32.63	176	350	P	H
		5872.6	49.38	-56.49	105.87	39.36	32.31	10.33	32.62	176	350	P	H
		5882.8	49.48	-49.94	99.42	39.45	32.32	10.33	32.62	176	350	P	H
		5925.4	50.07	-18.23	68.3	39.87	32.39	10.42	32.61	176	350	P	H
		5600	51.08	-17.22	68.3	41.8	32.2	9.76	32.68	176	350	P	H
		5696.2	49.51	-52.9	102.41	40.05	32.2	9.92	32.66	176	350	P	H
		5601.2	52.91	-15.39	68.3	43.63	32.2	9.76	32.68	170	307	P	V
		5697.6	51.16	-52.28	103.44	41.7	32.2	9.92	32.66	170	307	P	V
		5714.4	54.92	-54.31	109.23	45.36	32.2	10.01	32.65	170	307	P	V
		5722.2	54.15	-61.67	115.82	44.59	32.2	10.01	32.65	170	307	P	V
		5755	107.43	-	-	97.79	32.2	10.09	32.65	170	307	P	V
		5755	100.1	-	-	90.46	32.2	10.09	32.65	170	307	P	V
		5855	49.97	-60.83	110.8	40.07	32.28	10.25	32.63	170	307	P	V
		5873.2	50.53	-55.17	105.7	40.51	32.31	10.33	32.62	170	307	P	V
		5903.2	51.13	-33.22	84.35	40.98	32.35	10.42	32.62	170	307	P	V
		5934.4	51.13	-17.17	68.3	40.84	32.4	10.5	32.61	170	307	P	V
		5601.2	52.91	-15.39	68.3	43.63	32.2	9.76	32.68	170	307	P	V
		5697.6	51.16	-52.28	103.44	41.7	32.2	9.92	32.66	170	307	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/62 CH 159 5795MHz		5646	51.81	-16.49	68.3	42.44	32.2	9.84	32.67	176	335	P	H
		5658.6	51.68	-22.99	74.67	42.31	32.2	9.84	32.67	176	335	A	H
		5707.6	49.86	-57.47	107.33	40.3	32.2	10.01	32.65	176	335	P	H
		5724	49.45	-70.47	119.92	39.89	32.2	10.01	32.65	176	335	P	H
		5795	103.52	-	-	93.79	32.2	10.17	32.64	176	335	P	H
		5795	96.22	-	-	86.49	32.2	10.17	32.64	176	335	P	H
		5852.2	49.68	-67.5	117.18	39.78	32.28	10.25	32.63	176	335	P	H
		5856	49.9	-60.62	110.52	39.92	32.28	10.33	32.63	176	335	P	H
		5886.6	50.77	-45.84	96.61	40.73	32.33	10.33	32.62	176	335	P	H
		5934.8	51.47	-16.83	68.3	41.18	32.4	10.5	32.61	176	335	P	H
		5646	51.81	-16.49	68.3	42.44	32.2	9.84	32.67	176	335	P	H
		5647	51.66	-16.64	68.3	42.29	32.2	9.84	32.67	165	308	P	H
		5654.4	51.7	-19.86	71.56	42.33	32.2	9.84	32.67	165	308	P	V
		5717.6	50.09	-60.04	110.13	40.53	32.2	10.01	32.65	165	308	P	V
		5720.2	50.55	-60.71	111.26	40.99	32.2	10.01	32.65	165	308	P	V
		5795	107.3	-	-	97.57	32.2	10.17	32.64	165	308	P	V
		5795	99.89	-	-	90.16	32.2	10.17	32.64	165	308	P	V
		5851.8	50.08	-68.02	118.1	40.18	32.28	10.25	32.63	165	308	P	V
		5861.8	50.19	-58.7	108.89	40.19	32.29	10.33	32.62	165	308	P	V
		5882	51.32	-48.7	100.02	41.29	32.32	10.33	32.62	165	308	P	V
		5949.4	51.34	-16.96	68.3	41.03	32.42	10.5	32.61	165	308	P	V
		5647	51.66	-16.64	68.3	42.29	32.2	9.84	32.67	165	308	P	V
		5654.4	51.7	-19.86	71.56	42.33	32.2	9.84	32.67	165	308	P	V
		5717.6	50.09	-60.04	110.13	40.53	32.2	10.01	32.65	165	308	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE40_Partial 242 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/61 CH 151 5755MHz		11510	45.1	-28.9	74	44.65	40.47	12.88	52.9	201	0	P	H
		17265	49.77	-18.53	68.3	43.1	43.3	15.74	52.37	156	291	P	H
		11510	45.31	-28.69	74	44.86	40.47	12.88	52.9	201	0	P	V
		17265	49.72	-18.58	68.3	43.05	43.3	15.74	52.37	170	360	P	V
802.11ax HE40 Partial 242/62 CH 159 5795MHz		11587.5	47.89	-26.11	74	47.47	40.27	12.93	52.78	201	0	P	H
		17385	47.94	-20.36	68.3	40.94	43.71	15.83	52.54	136	248	P	H
		11587.5	47.85	-26.15	74	47.43	40.27	12.93	52.78	201	0	P	V
		17385	47.42	-20.88	68.3	40.42	43.71	15.83	52.54	150	200	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Partial 484 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Partial 484/65 CH 155 5775MHz		5649.8	53.79	-14.51	68.3	44.42	32.2	9.84	32.67	191	348	P	H
		5655.6	54.54	-17.91	72.45	45.17	32.2	9.84	32.67	191	348	A	H
		5713.8	59.03	-50.04	109.07	49.47	32.2	10.01	32.65	191	348	P	H
		5723.8	66.03	-53.43	119.46	56.47	32.2	10.01	32.65	191	348	P	H
		5775	100.87	-	-	91.23	32.2	10.09	32.65	191	348	P	H
		5775	92.63	-	-	82.99	32.2	10.09	32.65	191	348	P	H
		5851.6	59.37	-59.18	118.55	49.47	32.28	10.25	32.63	191	348	P	H
		5857.2	58.6	-51.58	110.18	48.61	32.29	10.33	32.63	191	348	P	H
		5878.8	56.84	-45.54	102.38	46.81	32.32	10.33	32.62	191	348	P	H
		5930.2	51.77	-16.53	68.3	41.56	32.4	10.42	32.61	191	348	P	H
		5649.8	53.79	-14.51	68.3	44.42	32.2	9.84	32.67	191	348	P	H
		5655.6	54.54	-17.91	72.45	45.17	32.2	9.84	32.67	191	348	P	H
		5648.8	56.09	-12.21	68.3	46.72	32.2	9.84	32.67	169	308	P	V
		5654	56.99	-14.27	71.26	47.62	32.2	9.84	32.67	169	308	P	V
		5717.2	62.2	-47.82	110.02	52.64	32.2	10.01	32.65	169	308	P	V
		5724.6	66.36	-54.93	121.29	56.8	32.2	10.01	32.65	169	308	P	V
		5775	96.13	-	-	86.49	32.2	10.09	32.65	169	308	P	V
		5775	89.1	-	-	79.46	32.2	10.09	32.65	169	308	P	V
		5854.2	60.89	-51.73	112.62	50.99	32.28	10.25	32.63	169	308	P	V
		5859.6	59.67	-49.84	109.51	49.67	32.29	10.33	32.62	169	308	P	V
		5875.8	57.42	-47.19	104.61	47.4	32.31	10.33	32.62	169	308	P	V
		5928	51.84	-16.46	68.3	41.64	32.39	10.42	32.61	169	308	P	V
		5648.8	56.09	-12.21	68.3	46.72	32.2	9.84	32.67	169	308	P	V
		5654	56.99	-14.27	71.26	47.62	32.2	9.84	32.67	169	308	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Partial 484/66 CH 155 5775MHz		5602.2	52.29	-16.01	68.3	43.01	32.2	9.76	32.68	102	356	P	H
		5663.4	52.21	-26.01	78.22	42.76	32.2	9.92	32.67	102	356	A	H
		5716.8	55.21	-54.7	109.91	45.65	32.2	10.01	32.65	102	356	P	H
		5722.8	56.08	-61.1	117.18	46.52	32.2	10.01	32.65	102	356	P	H
		5775	101.47	-	-	91.83	32.2	10.09	32.65	102	356	P	H
		5775	93.33	-	-	83.69	32.2	10.09	32.65	102	356	P	H
		5853.2	54.84	-60.06	114.9	44.94	32.28	10.25	32.63	102	356	P	H
		5859.4	55.06	-54.51	109.57	45.06	32.29	10.33	32.62	102	356	P	H
		5875.4	54.45	-50.45	104.9	44.43	32.31	10.33	32.62	102	356	P	H
		5941.6	51.05	-17.25	68.3	40.75	32.41	10.5	32.61	102	356	P	H
		5602.2	52.29	-16.01	68.3	43.01	32.2	9.76	32.68	102	356	P	H
		5663.4	52.21	-26.01	78.22	42.76	32.2	9.92	32.67	102	356	P	H
		5626.6	49.33	-18.97	68.3	39.96	32.2	9.84	32.67	100	357	P	V
		5673	50.01	-35.3	85.31	40.56	32.2	9.92	32.67	100	357	P	V
		5710.2	49.39	-58.67	108.06	39.83	32.2	10.01	32.65	100	357	P	V
		5721.6	47.51	-66.94	114.45	37.95	32.2	10.01	32.65	100	357	P	V
		5775	97.18	-	-	87.54	32.2	10.09	32.65	100	357	P	V
		5775	90	-	-	80.36	32.2	10.09	32.65	100	357	P	V
		5853.4	50.07	-64.38	114.45	40.17	32.28	10.25	32.63	100	357	P	V
		5858.4	53.09	-56.76	109.85	43.09	32.29	10.33	32.62	100	357	P	V
		5875.2	51.26	-53.79	105.05	41.24	32.31	10.33	32.62	100	357	P	V
		5944.4	49.98	-18.32	68.3	39.67	32.42	10.5	32.61	100	357	P	V
		5626.6	49.33	-18.97	68.3	39.96	32.2	9.84	32.67	100	357	P	V
		5673	50.01	-35.3	85.31	40.56	32.2	9.92	32.67	100	357	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Partial 484 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Partial 484/65 CH 155 5775MHz		11510	47.69	-26.31	74	47.24	40.47	12.88	52.9	126	336	P	H
		17265	49.27	-19.03	68.3	42.6	43.3	15.74	52.37	156	291	P	H
		11510	47.07	-26.93	74	46.62	40.47	12.88	52.9	160	360	P	V
		17265	48.13	-20.17	68.3	41.46	43.3	15.74	52.37	170	360	P	V
802.11ax HE80 Partial 484/66 CH 155 5775MHz		11550	47.05	-26.95	74	46.58	40.37	12.93	52.83	125	332	P	H
		17325	49.79	-18.51	68.3	42.92	43.51	15.8	52.44	144	196	P	H
		11550	46.48	-27.52	74	46.01	40.37	12.93	52.83	160	360	P	V
		17325	51.4	-16.9	68.3	44.53	43.51	15.8	52.44	170	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11a	98.63	-	-	10Hz
1+2	802.11n HT20	100	-	-	10Hz
1+2	802.11n HT40	100	-	-	10Hz
1+2	802.11ac VHT80	100	-	-	10Hz
1+2	802.11ax HE20	100	-	-	10Hz
1+2	802.11ax HE40	100	-	-	10Hz
1+2	802.11ax HE80	100	-	-	10Hz

<MIMO Ant.1+2>


802.11a

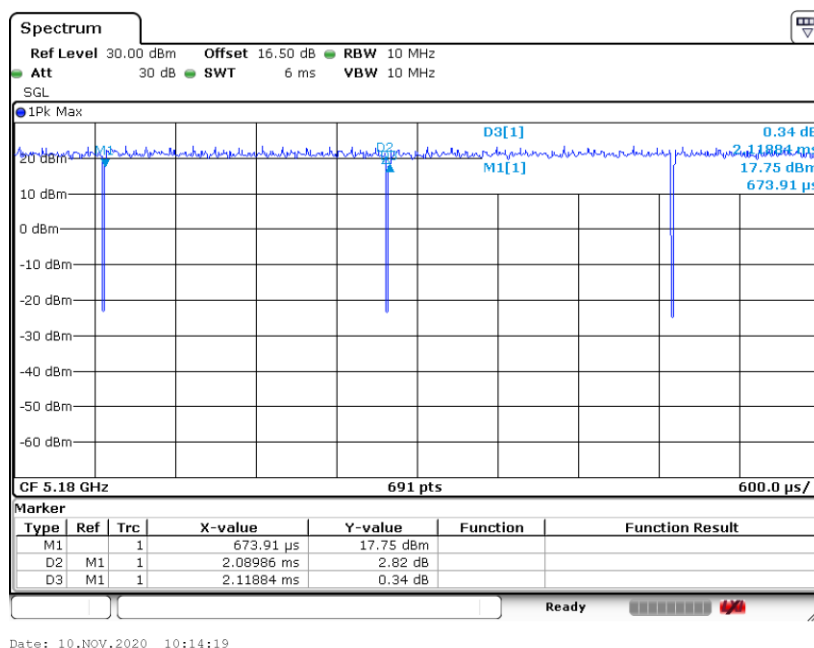

Date: 10.NOV.2020 10:14:19




802.11n HT20

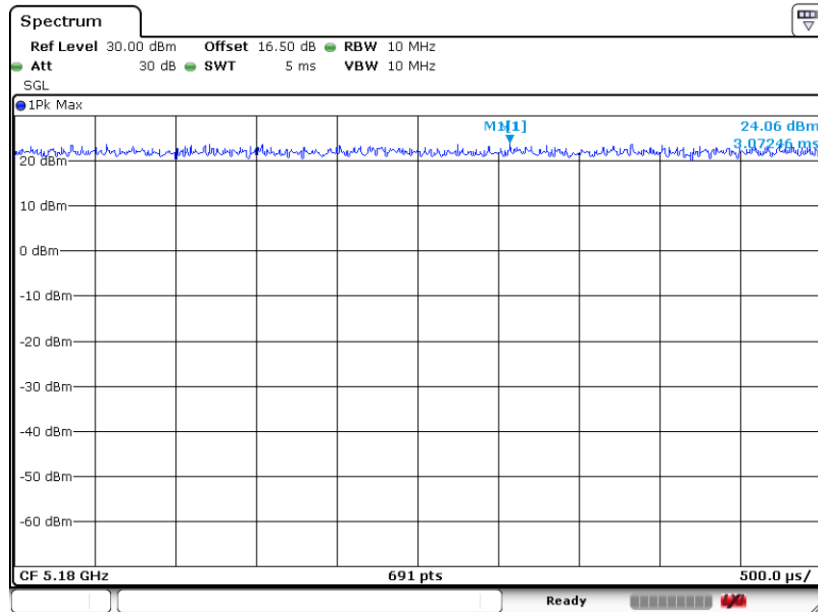

Date: 10.NOV.2020 10:18:33


802.11n HT40

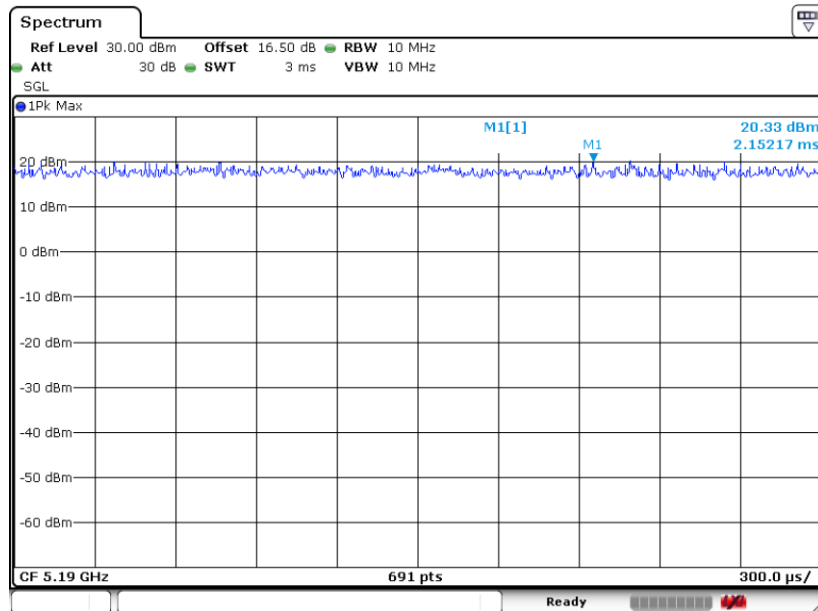

Date: 10.NOV.2020 10:24:57




802.11ac VHT80

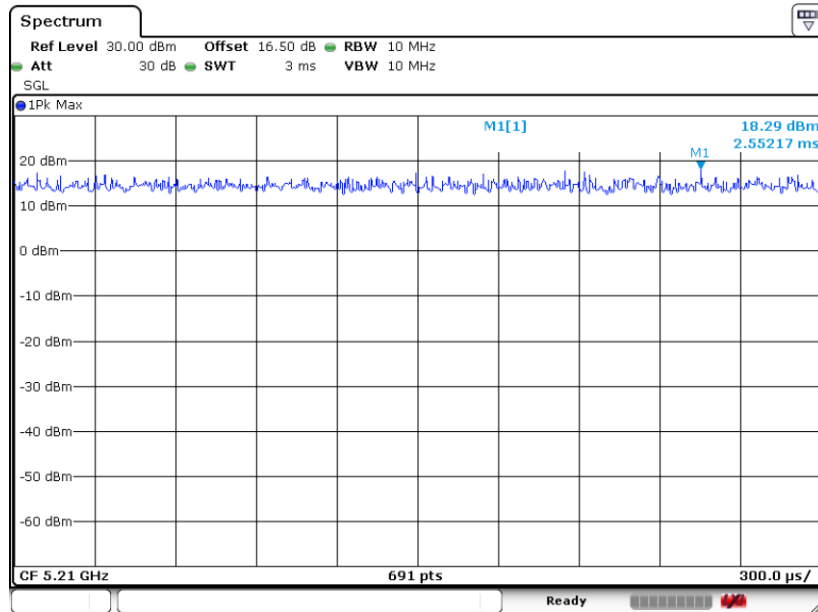

Date: 10.NOV.2020 10:48:19


802.11ax HE20

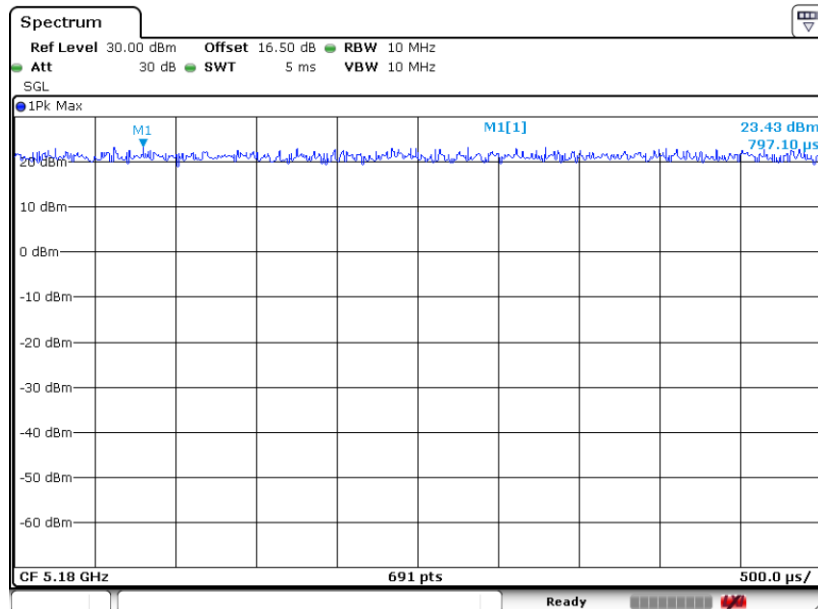

Date: 10.NOV.2020 10:22:08




802.11ax HE40

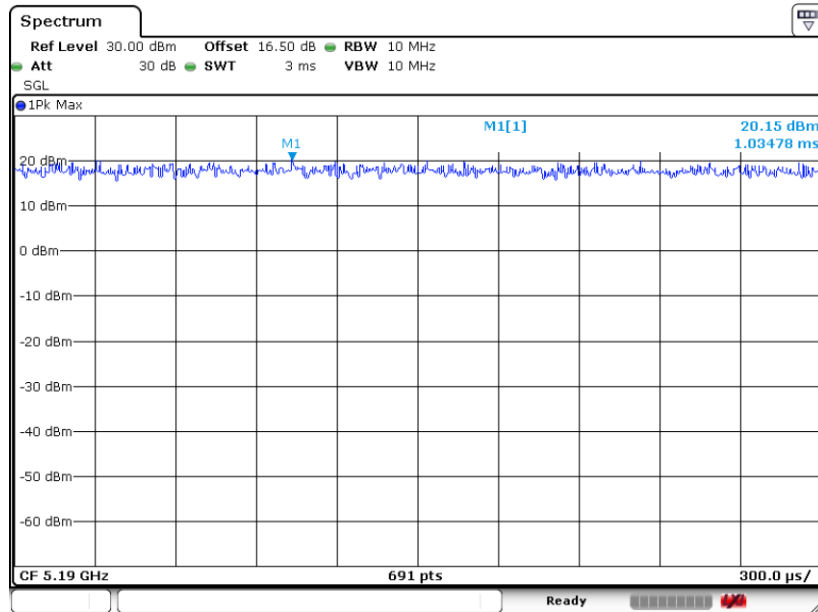

Date: 10.NOV.2020 10:37:57

802.11ax HE80

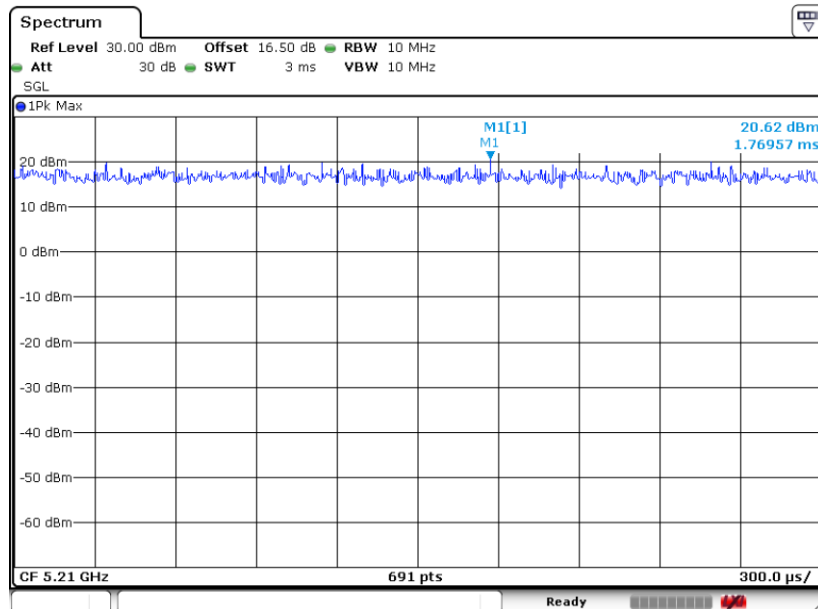

Date: 10.NOV.2020 10:48:59