





PSD NVNT be160 966@134 5250MHz Ant12 SISO

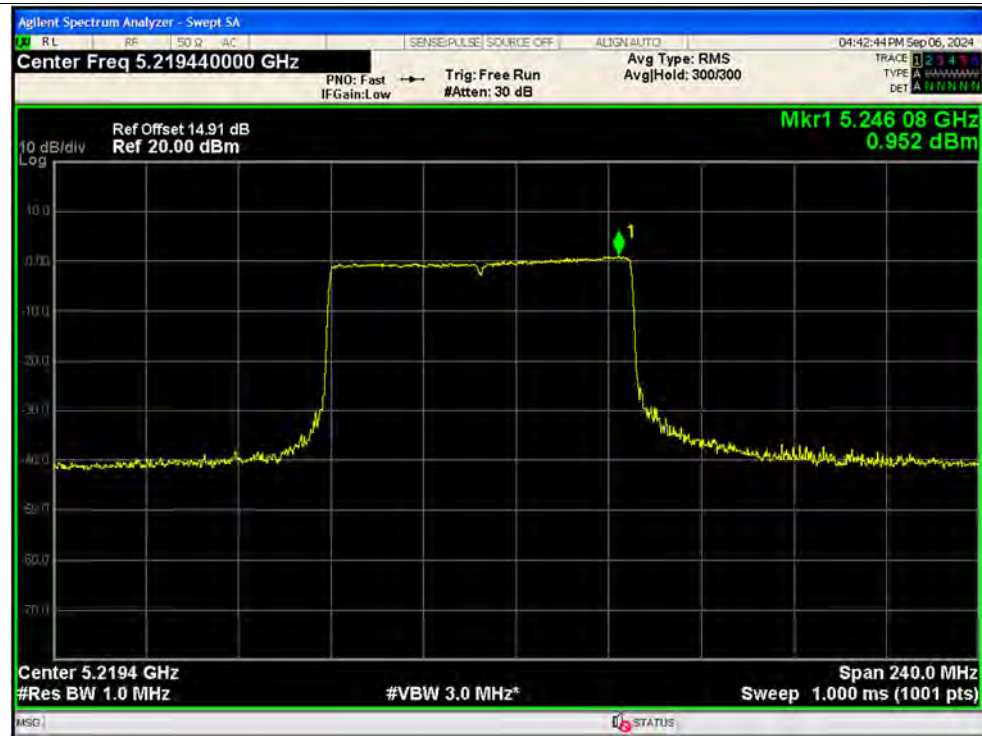


PSD NVNT be160 966@134 5250MHz Ant13 SISO

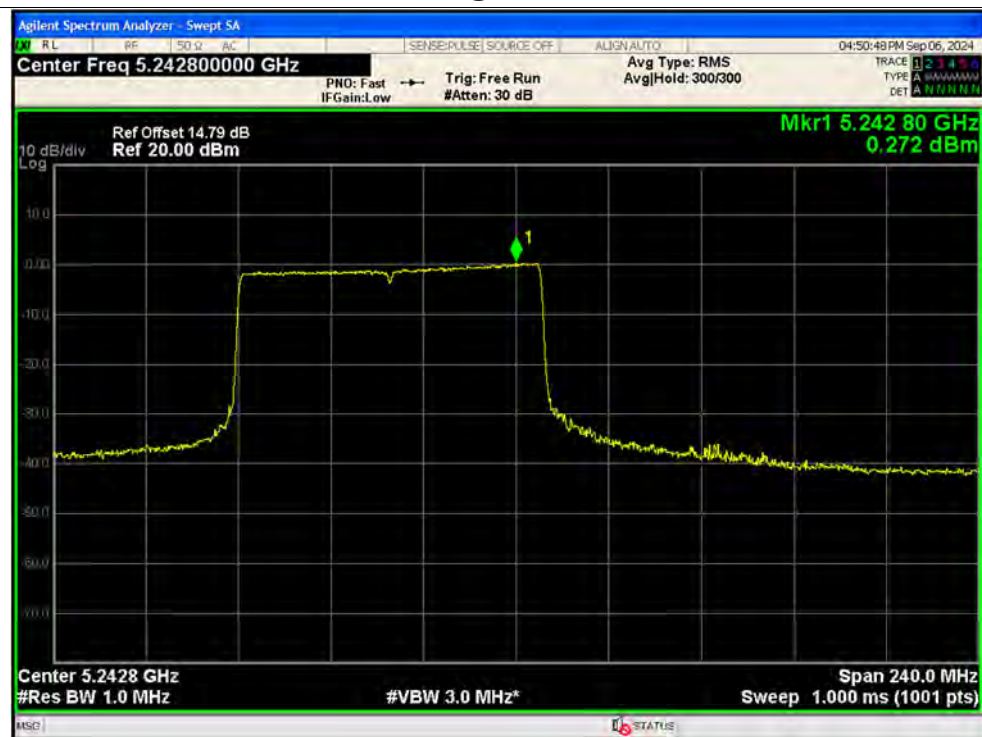




PSD NVNT be160 966@134 5250MHz Ant12 MIMO

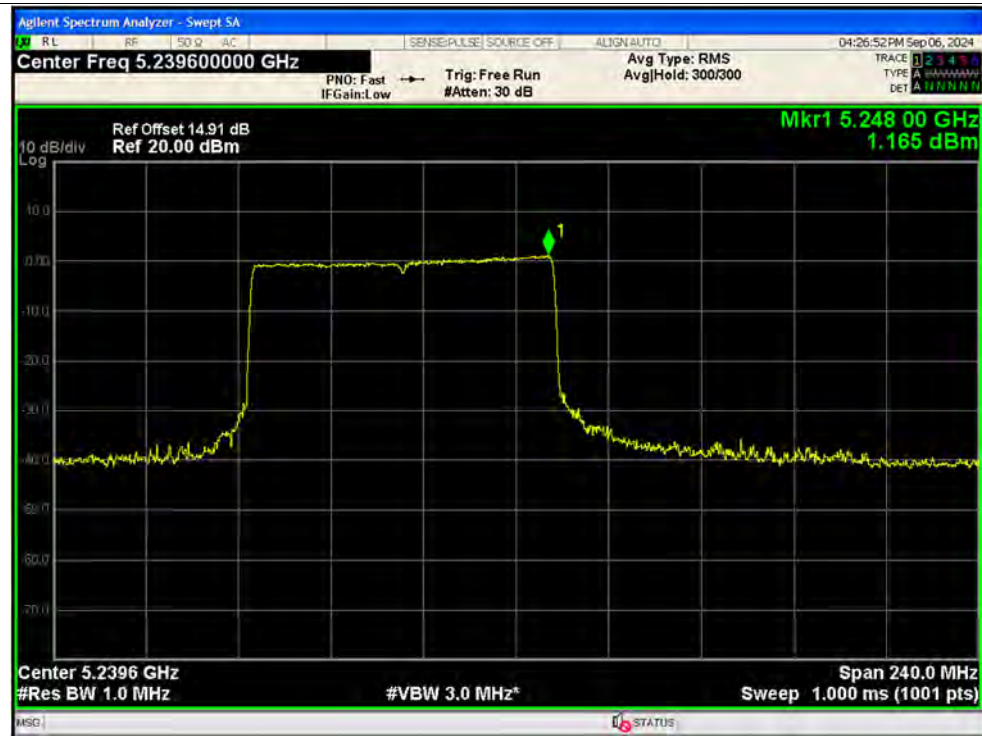

PSD NVNT be160 966@134 5250MHz Ant13 MIMO

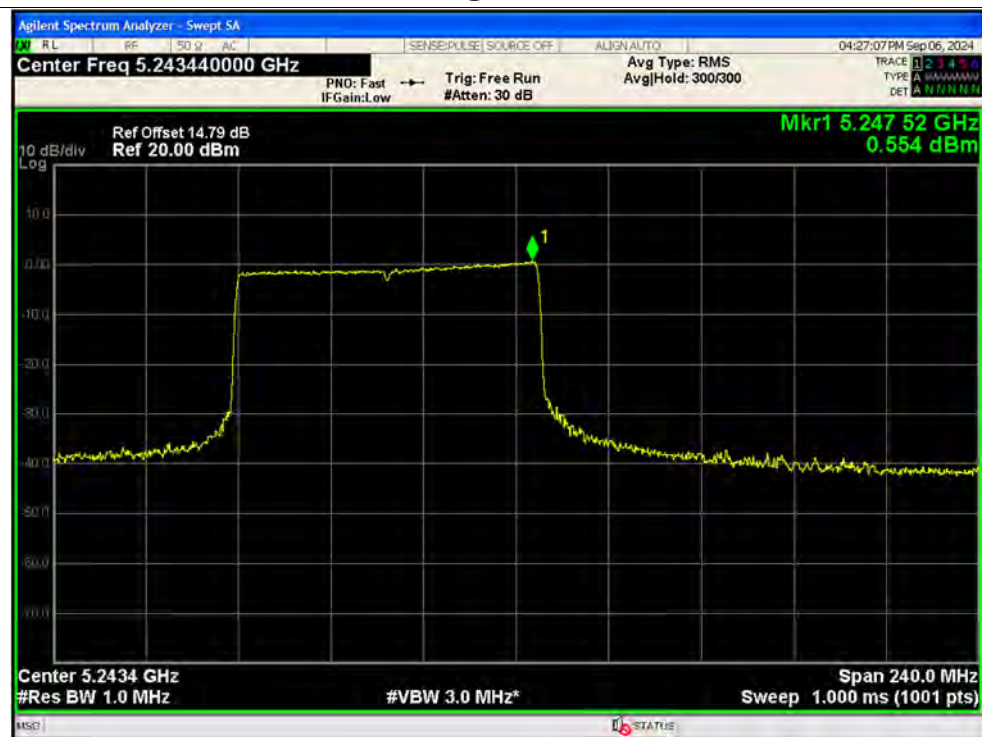

**A.5. Frequency Stability**

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20C 3.3V	Carrier	5180	Ant12	5179.98	-20000	-3.86	25	Pass
20C 3.93V	Carrier	5180	Ant12	5179.979	-21000	-4.05	25	Pass
20C 4.53V	Carrier	5180	Ant12	5179.979	-21000	-4.05	25	Pass
0C 3.93V	Carrier	5180	Ant12	5179.979	-21000	-4.05	25	Pass
10C 3.93V	Carrier	5180	Ant12	5179.979	-21000	-4.05	25	Pass
30C 3.93V	Carrier	5180	Ant12	5179.98	-20000	-3.86	25	Pass
35C 3.93V	Carrier	5180	Ant12	5179.98	-20000	-3.86	25	Pass
20C 3.3V	Carrier	5260	Ant12	5259.979	-21000	-3.99	25	Pass
20C 3.93V	Carrier	5260	Ant12	5259.979	-21000	-3.99	25	Pass
20C 4.53V	Carrier	5260	Ant12	5259.979	-21000	-3.99	25	Pass
0C 3.93V	Carrier	5260	Ant12	5259.979	-21000	-3.99	25	Pass
10C 3.93V	Carrier	5260	Ant12	5259.979	-21000	-3.99	25	Pass
30C 3.93V	Carrier	5260	Ant12	5259.979	-21000	-3.99	25	Pass
35C 3.93V	Carrier	5260	Ant12	5259.979	-21000	-3.99	25	Pass
20C 3.3V	Carrier	5500	Ant12	5499.978	-22000	-4	25	Pass
20C 3.93V	Carrier	5500	Ant12	5499.978	-22000	-4	25	Pass
20C 4.53V	Carrier	5500	Ant12	5499.978	-22000	-4	25	Pass
0C 3.93V	Carrier	5500	Ant12	5499.978	-22000	-4	25	Pass
10C 3.93V	Carrier	5500	Ant12	5499.978	-22000	-4	25	Pass
30C 3.93V	Carrier	5500	Ant12	5499.978	-22000	-4	25	Pass
35C 3.93V	Carrier	5500	Ant12	5499.978	-22000	-4	25	Pass
20C 3.3V	Carrier	5745	Ant12	5744.977	-23000	-4	25	Pass
20C 3.93V	Carrier	5745	Ant12	5744.977	-23000	-4	25	Pass
20C 4.53V	Carrier	5745	Ant12	5744.977	-23000	-4	25	Pass
0C 3.93V	Carrier	5745	Ant12	5744.977	-23000	-4	25	Pass
10C 3.93V	Carrier	5745	Ant12	5744.977	-23000	-4	25	Pass
30C 3.93V	Carrier	5745	Ant12	5744.977	-23000	-4	25	Pass
35C 3.93V	Carrier	5745	Ant12	5744.977	-23000	-4	25	Pass



REPORT No.: SZ24070315W04


A.6. Dynamic Frequency Selection

Payload


Mode	Frequency (MHz)	Result	Verdict
ac20	5260	41.18	Pass
ac20	5500	38.86	Pass
ac80	5290	12.92	Pass
ac160	5570	7.49	Pass

Test Graphs


ac20 5260MHz Payload

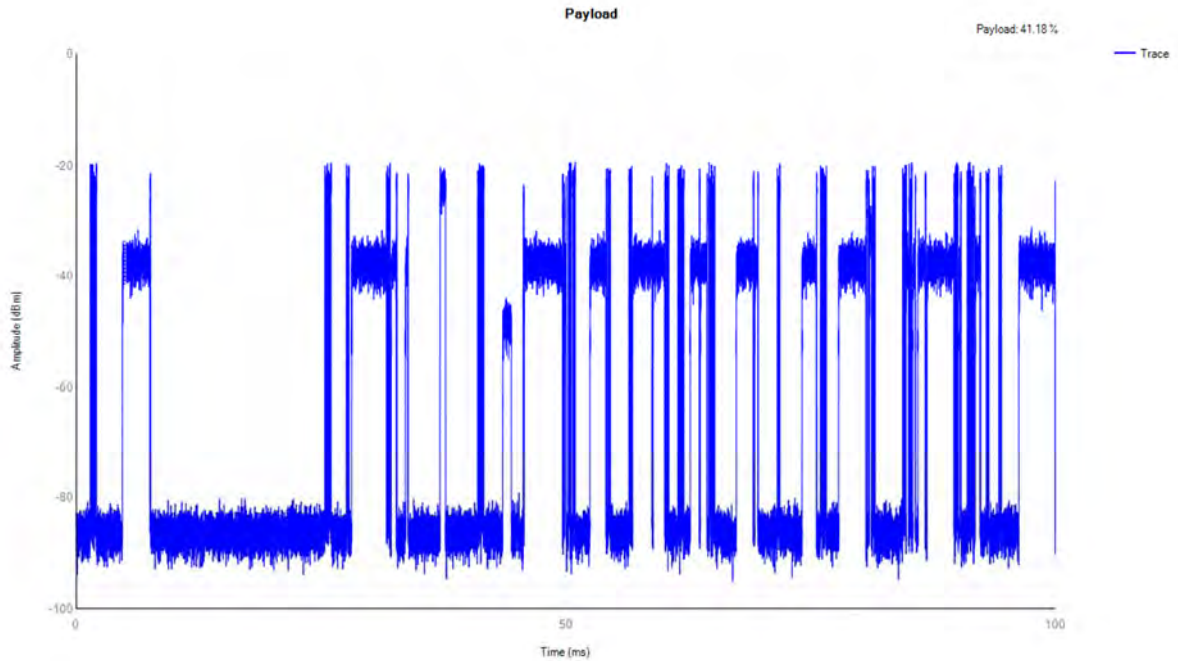


ac20 5500MHz Payload

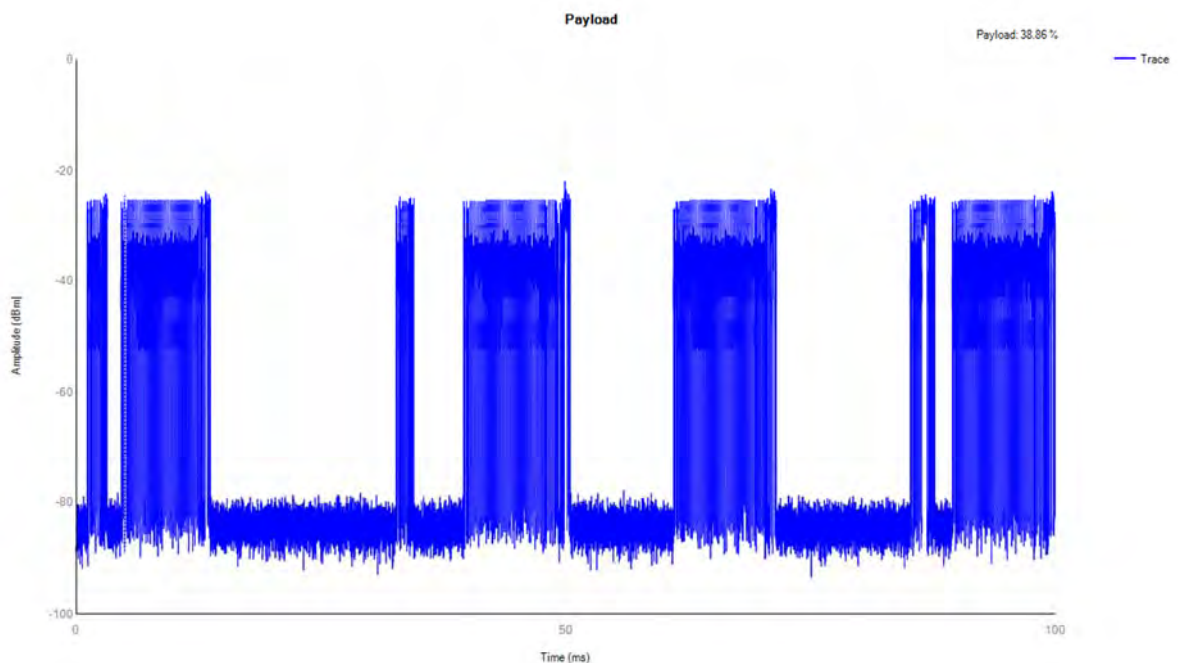

ac80 5290MHz Payload

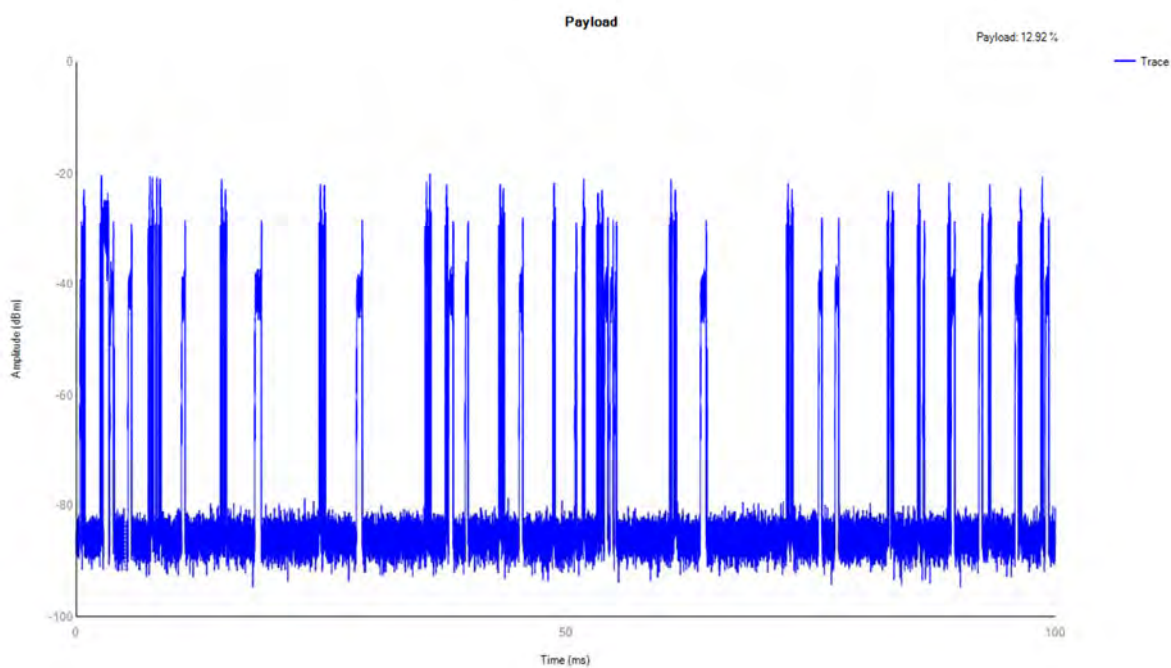

ac160 5570MHz Payload

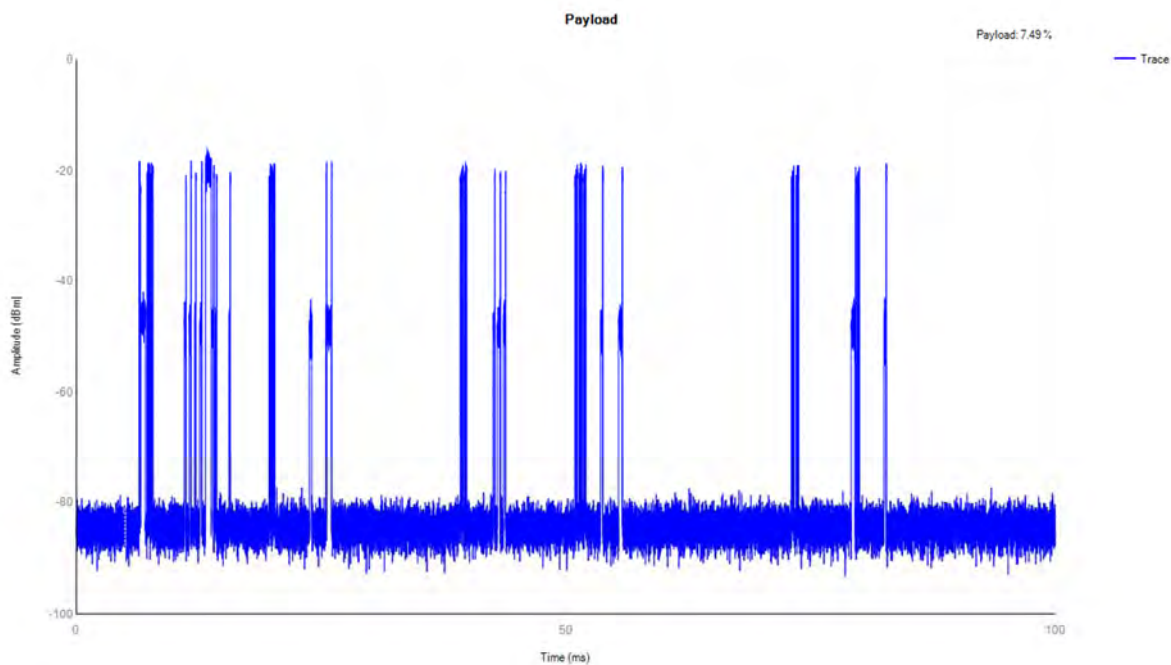



REPORT No.: SZ24070315W04

Detection Thresholds

Mode	Frequency (MHz)	Type	Result	Verdict
ac20	5260	DFS_FCC_T0	See test Graph	Pass
ac20	5500	DFS_FCC_T0	See test Graph	Pass
ac80	5290	DFS_FCC_T0	See test Graph	Pass
ac160	5570	DFS_FCC_T0	See test Graph	Pass

Spectrum analyzer settings:

Span: Zero


Detector Type: Peak

RBW: 3MHz


VBW: 3MHz

Test Graphs


5260MHz DFS_FCC_T0

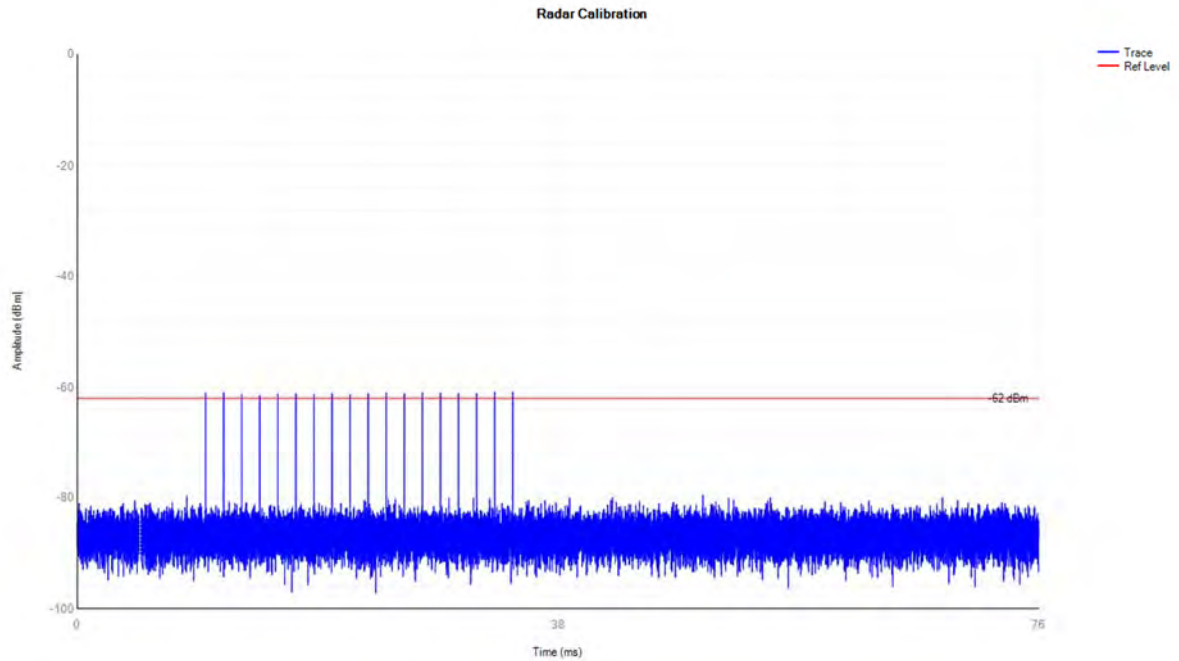


5500MHz DFS_FCC_T0

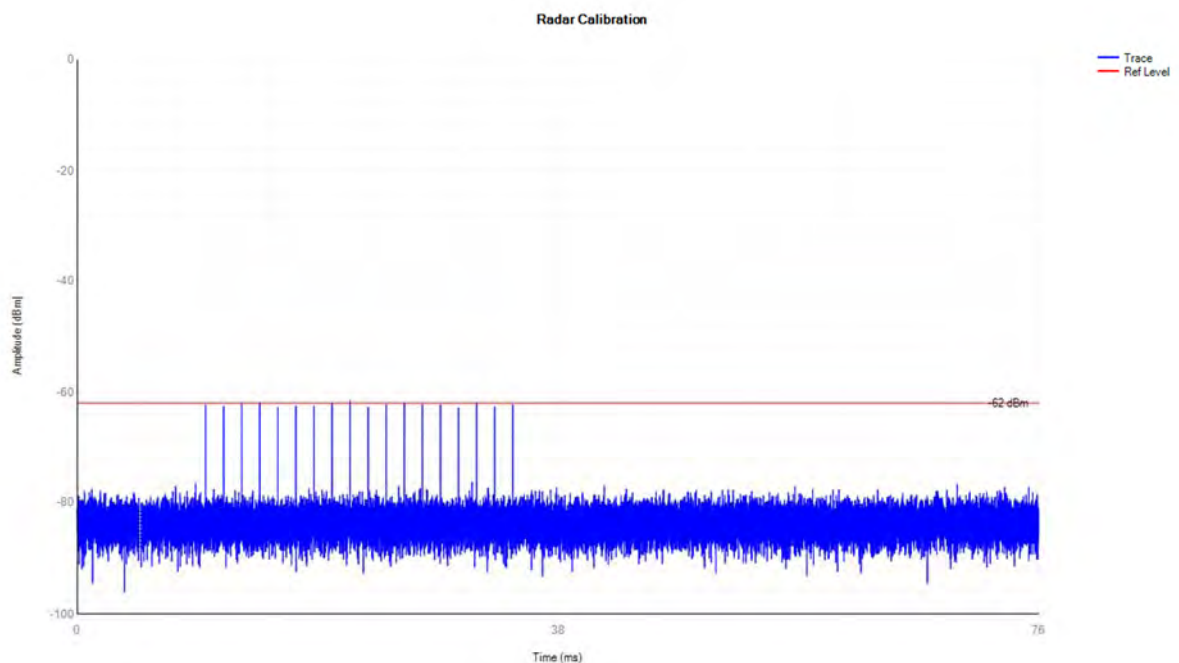

5290MHz DFS_FCC_T0

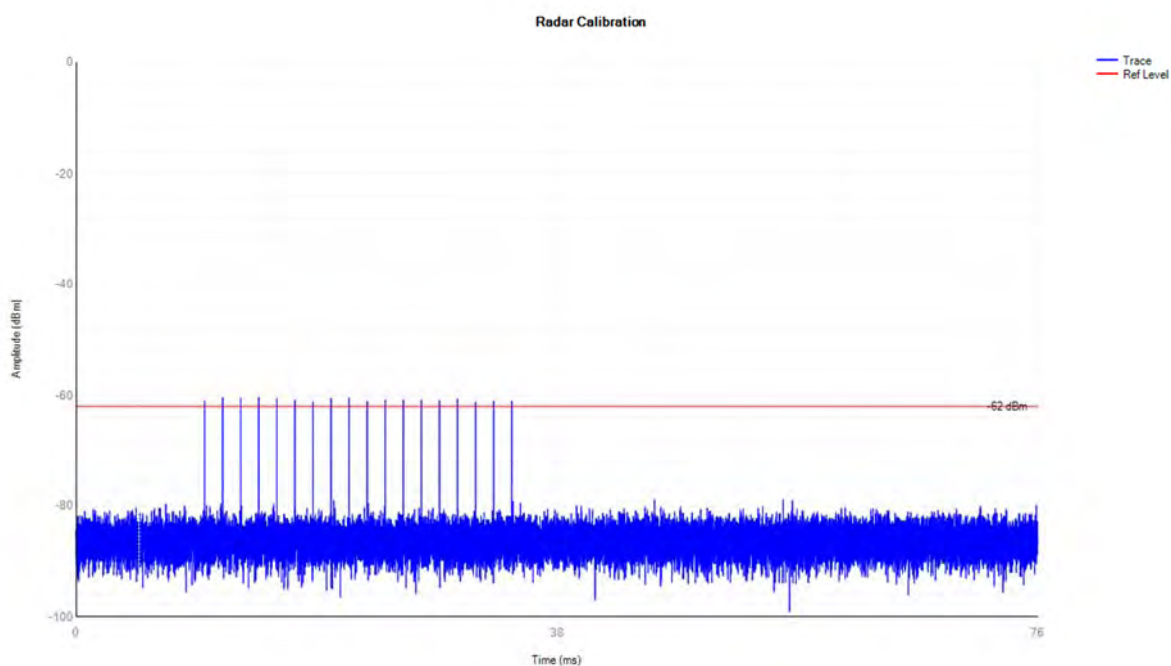

5570MHz DFS_FCC_T0

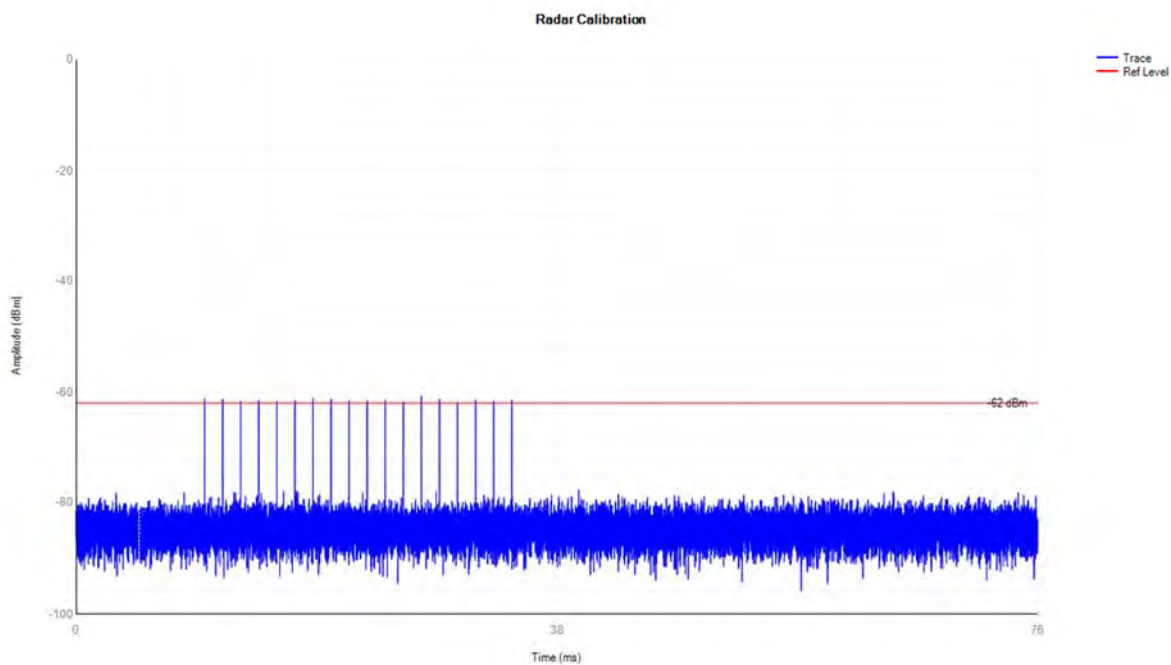



Channel Move Time and Channel Closing Transmission Time

Mode	Frequency (MHz)	Channel Move Time (s)	Limit Channel Move Time (s)	Close Transmission Time (s)	Limit Close Transmission Time (s)	Close Transmission Time after 200ms(s)	Limit Close Transmission Time after 200ms (s)	Verdict
ac20	5260	0.831	10	0.013	0.26	0.008	0.06	Pass
ac20	5500	0.895	10	0.043	0.26	0.009	0.06	Pass
ac80	5290	0.906	10	0.039	0.26	0.009	0.06	Pass
ac160	5570	0.825	10	0.018	0.26	0.009	0.06	Pass

Spectrum analyzer settings:

Span: Zero

Detector type: Peak


RBW: 3MHz

VBW: 3MHz


Sweep time: 20s

Test Graphs


ac20 5260MHz Shutdown

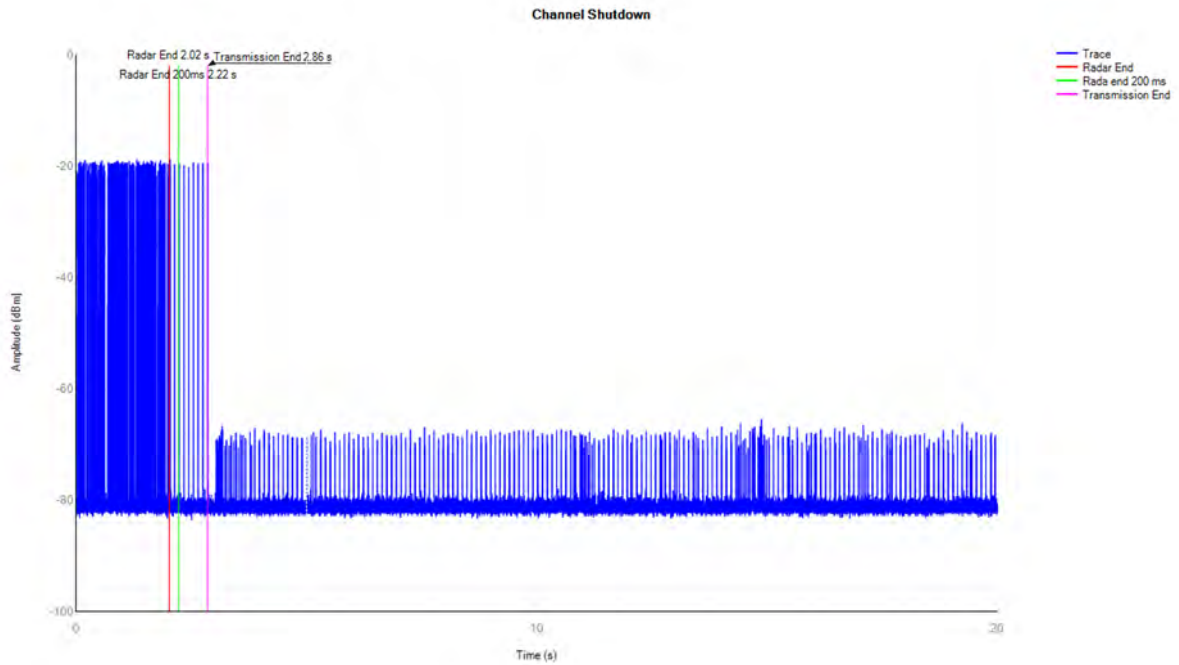


ac20 5500MHz Shutdown

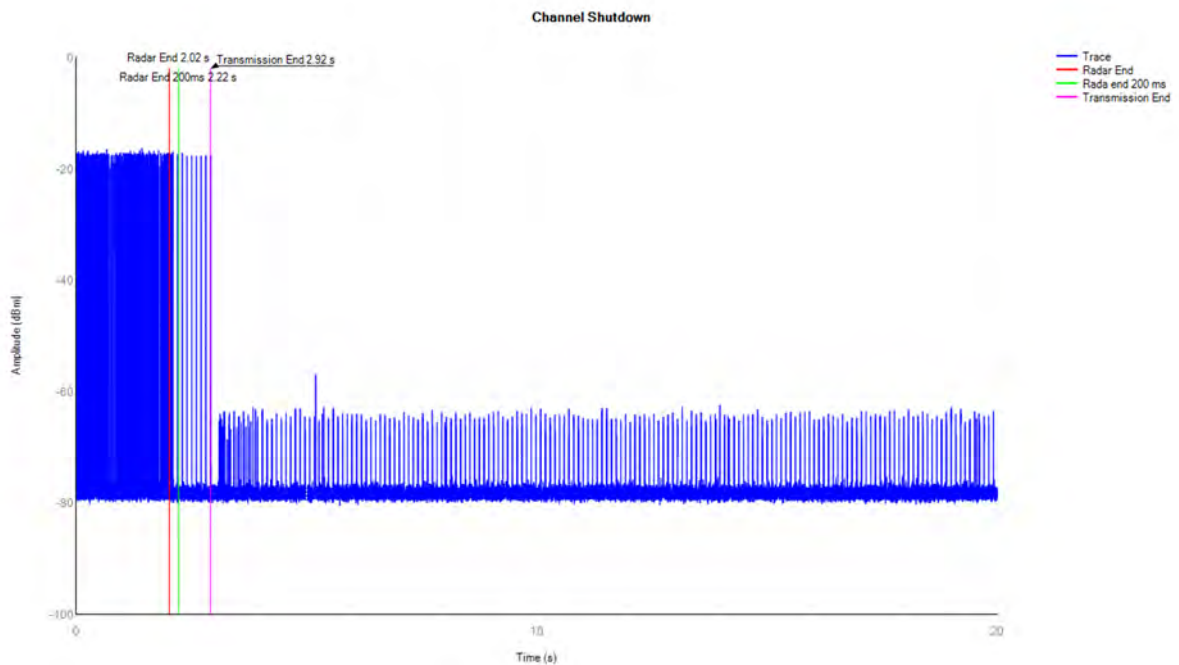

ac80 5290MHz Shutdown

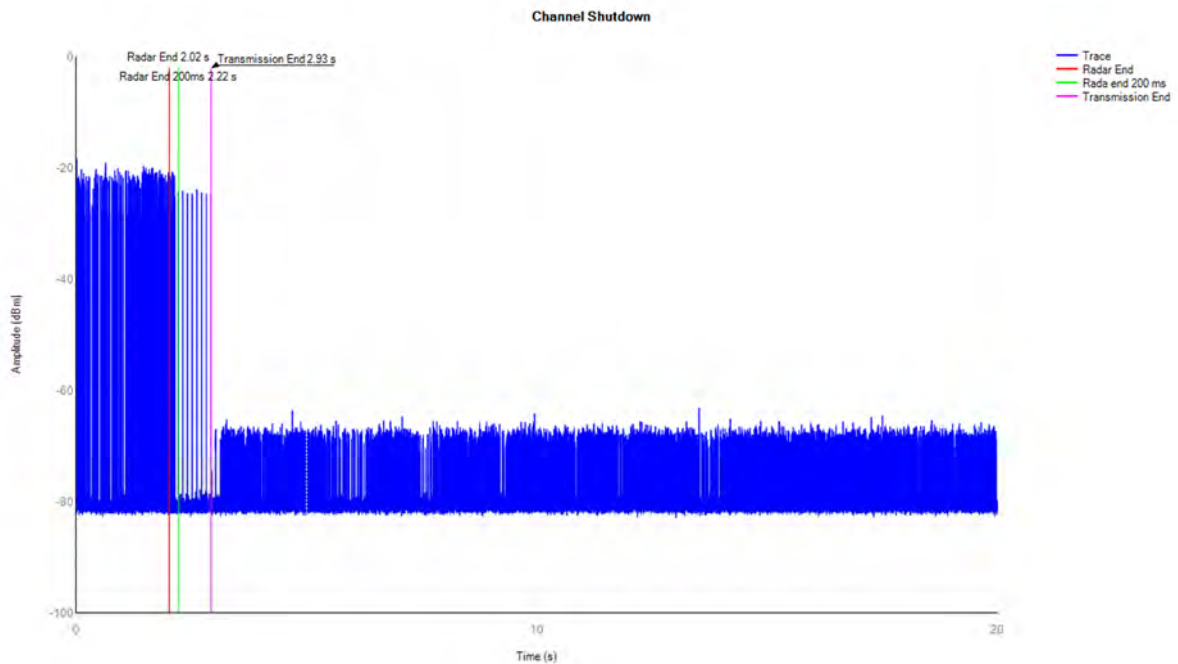

ac160 5570MHz Shutdown

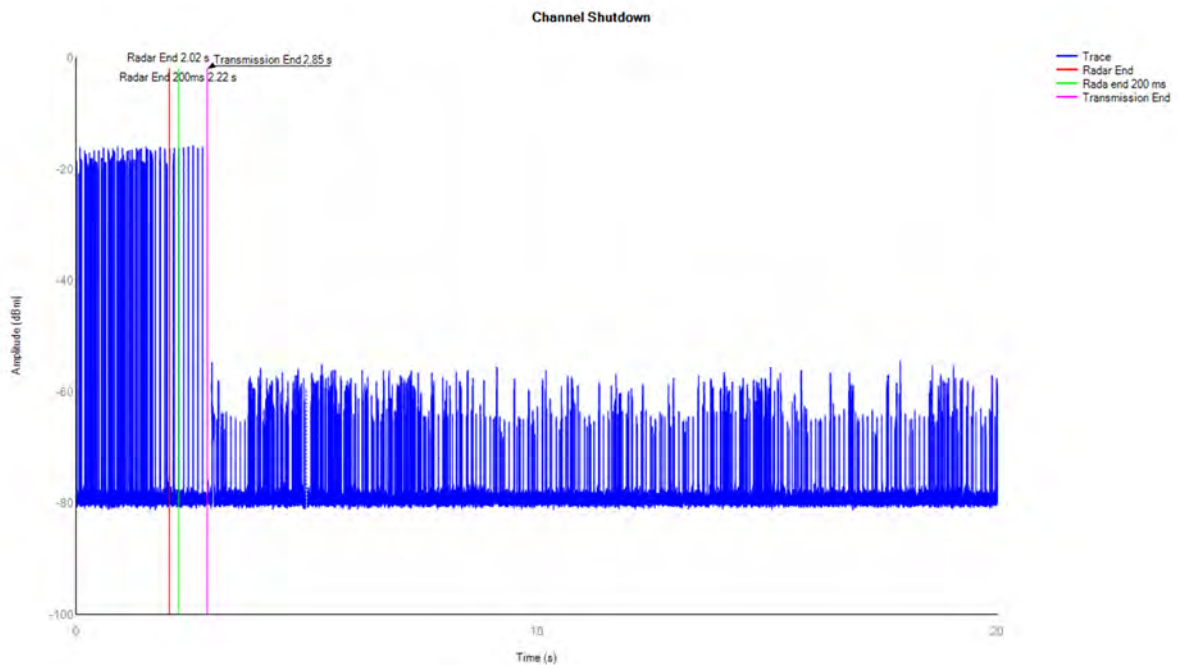

Note: The signal above the noise floor after the radar signal ends is the signal which leaked from other channels that have been moved following the Master device.



REPORT No.: SZ24070315W04

Non-Occupancy Period

Mode	Frequency (MHz)	Result	Verdict
ac20	5260	See test Graph	Pass
ac20	5500	See test Graph	Pass

Spectrum analyzer settings:

Span: Zero

Detector type: Peak


RBW: 3MHz

VBW: 3MHz


Sweep time: 1850s

Test Graphs

ac20 5260MHz Non-Occupancy

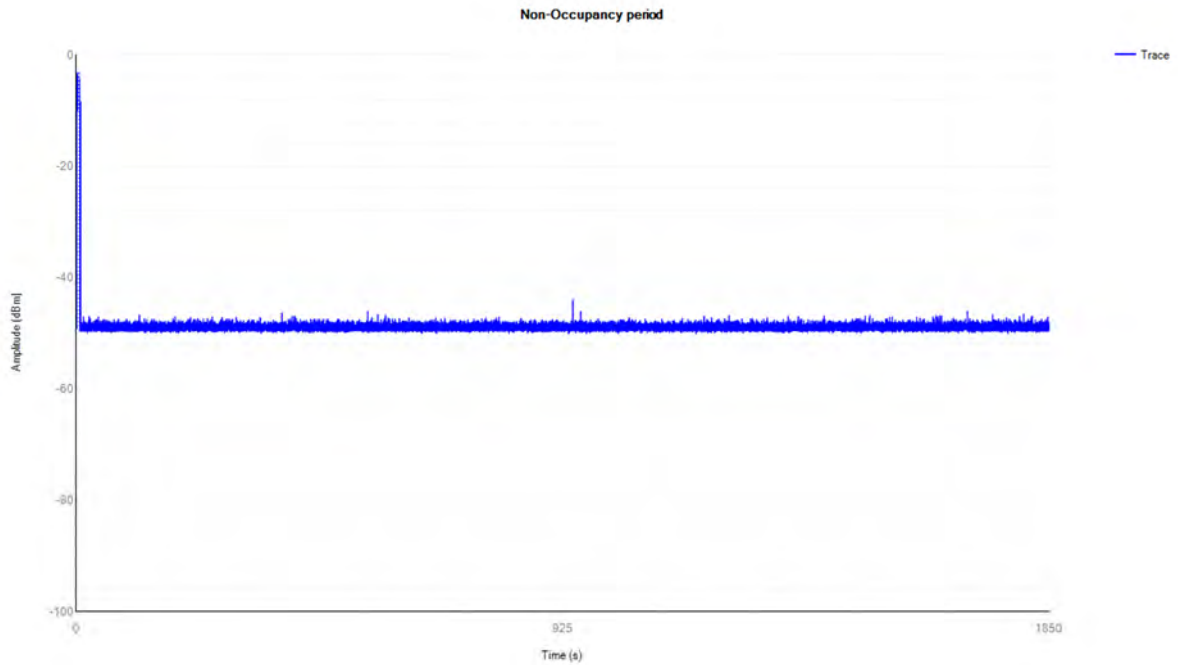

ac20 5500MHz Non-Occupancy

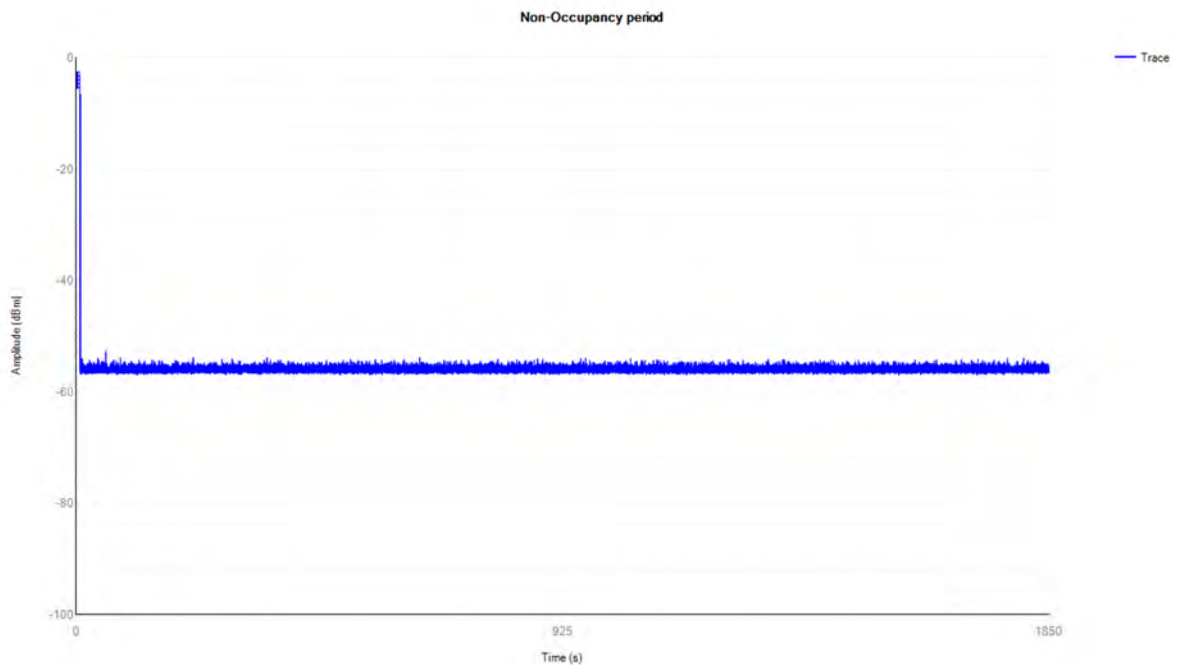



A.7. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + Adapter + Data line + WIFI TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

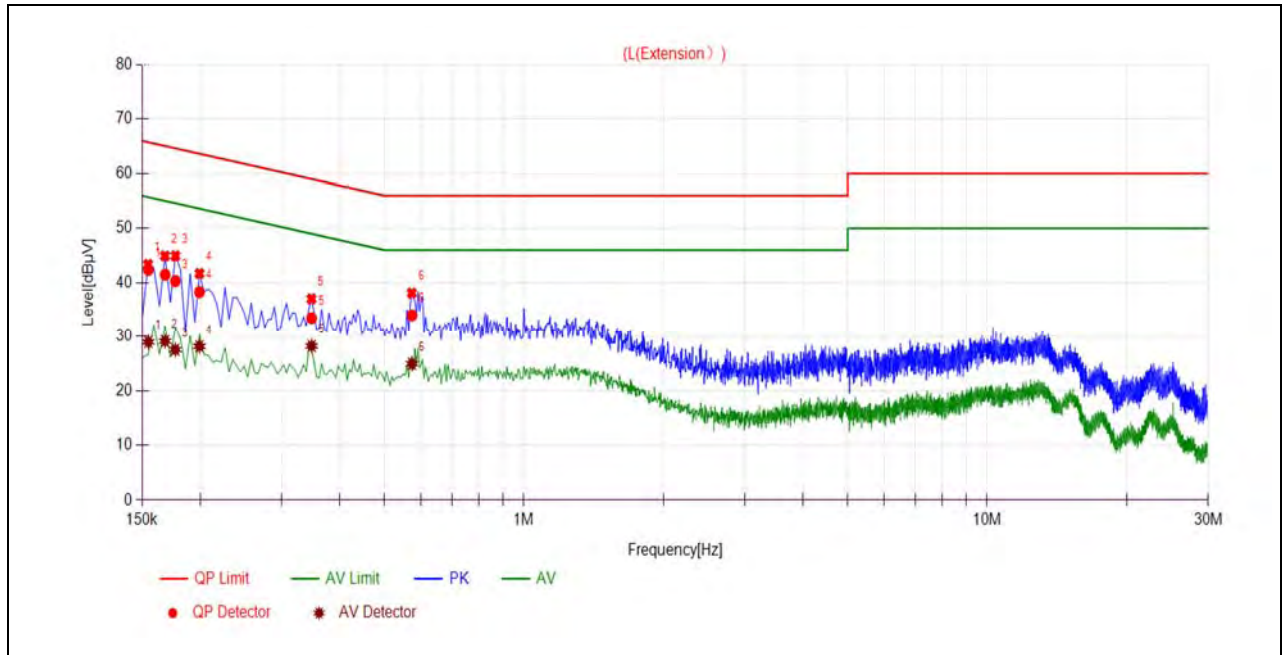

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1547	42.37	28.94	65.75	55.75	Line	PASS
2	0.1681	41.49	29.10	65.05	55.05		PASS
3	0.1769	40.31	27.53	64.63	54.63		PASS
4	0.1994	38.27	28.15	63.64	53.64		PASS
5	0.3483	33.45	28.21	59.00	49.00		PASS
6	0.5736	33.96	24.93	56.00	46.00		PASS

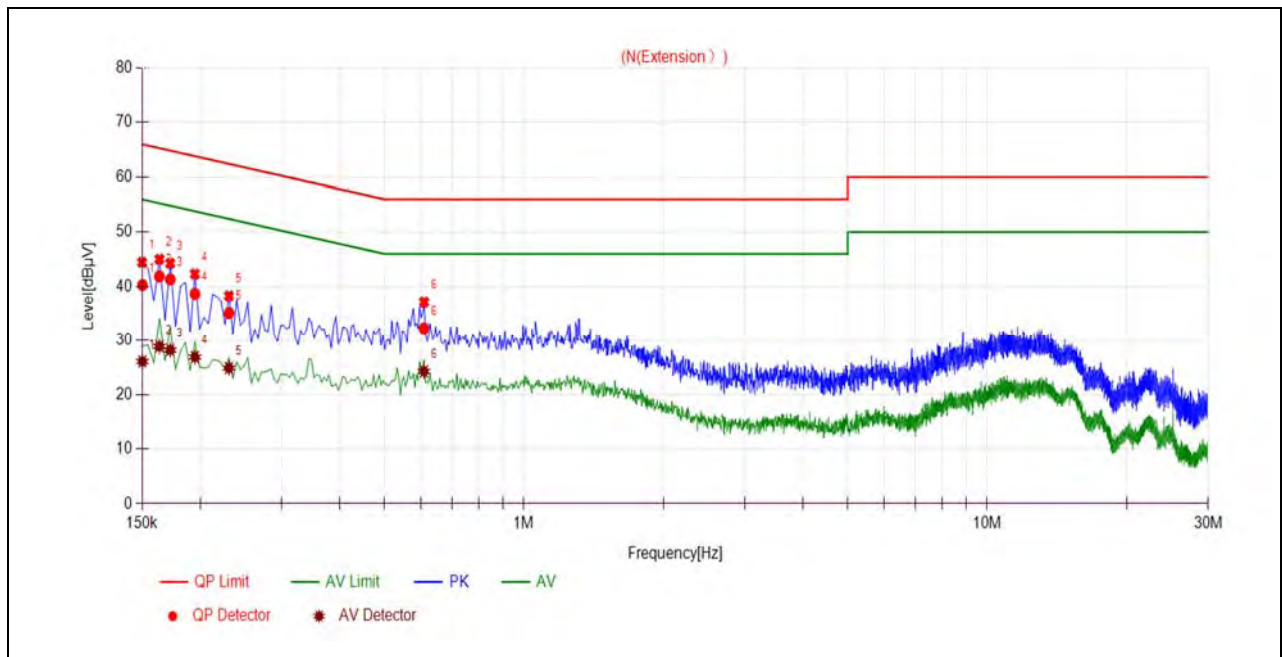

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1502	40.27	26.09	65.99	55.99	Neutral	PASS
2	0.1634	41.89	28.86	65.29	55.29		PASS
3	0.1725	41.31	28.20	64.84	54.84		PASS
4	0.1950	38.66	26.88	63.82	53.82		PASS
5	0.2309	35.15	24.86	62.42	52.42		PASS
6	0.6087	32.32	24.24	56.00	46.00		PASS



A.8. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (horizontal) was recorded in this test report.

Note 2: Restricted Frequency Bands were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.


Note 3: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.

802.11a Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
36	5095.00	PK	41.05	-21.29	32.20	51.96	74	PASS
36	5106.56	AV	29.35	-21.29	32.20	40.26	54	PASS
64	5450.20	PK	38.65	-20.66	32.20	50.19	74	PASS
64	5459.72	AV	28.02	-20.66	32.20	39.56	54	PASS
100	5117.50	PK	40.52	-20.24	32.20	52.48	74	PASS
100	5096.50	AV	29.53	-20.24	32.20	41.49	54	PASS
140	5811.90	PK	41.36	-20.24	32.20	53.32	68.23	PASS
149	5725.00	PK	39.36	-21.11	32.20	50.45	122.23	PASS
165	5855.00	PK	38.45	-21.11	32.20	49.54	122.23	PASS

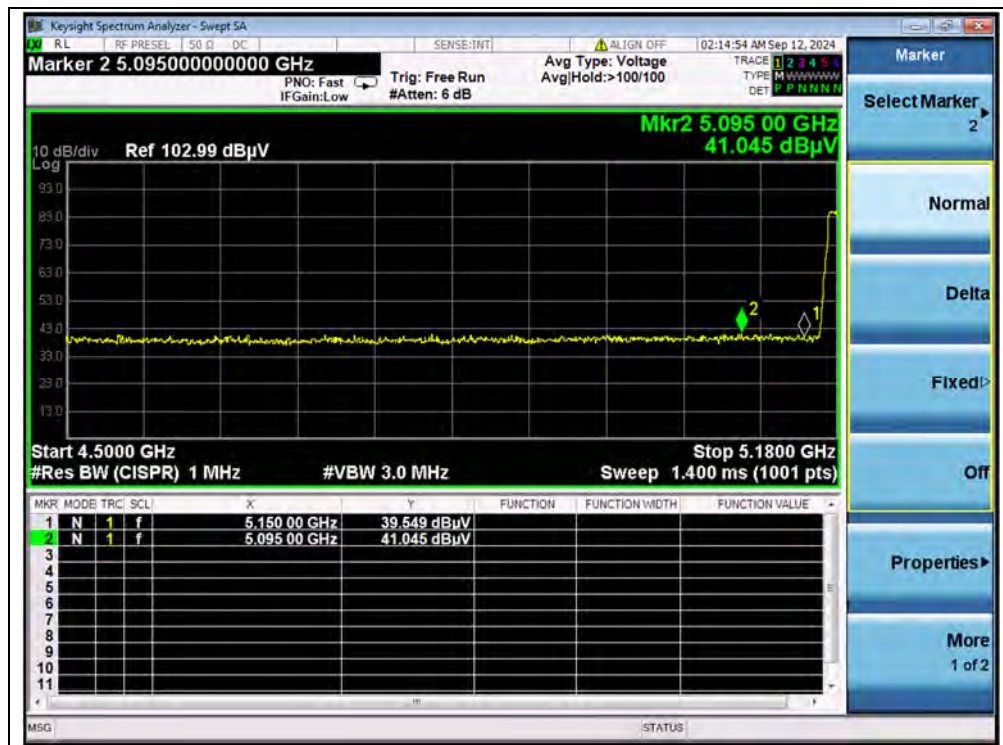


(PEAK, Channel 36, 802.11a)

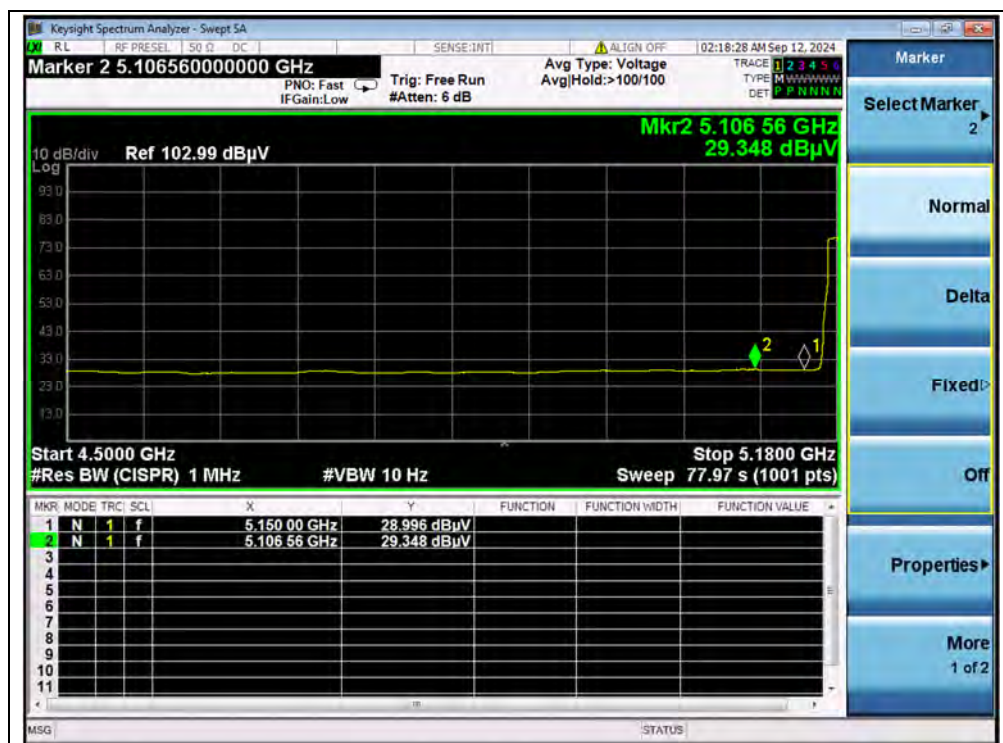


(AVERAGE, Channel 36, 802.11a)

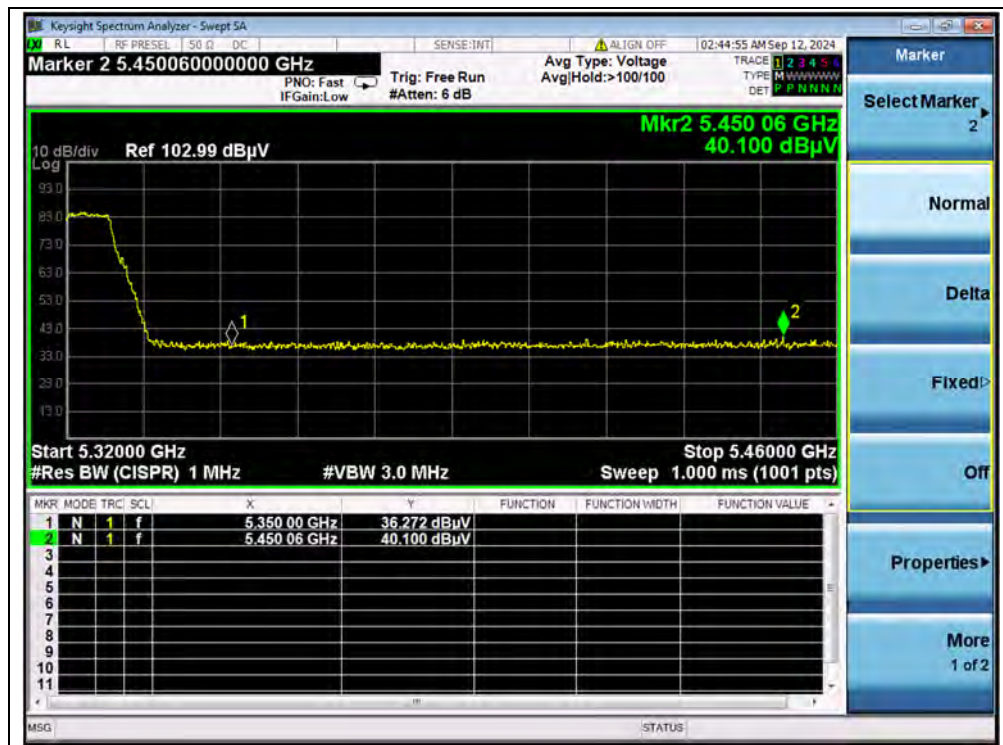


(PEAK, Channel 64, 802.11a)

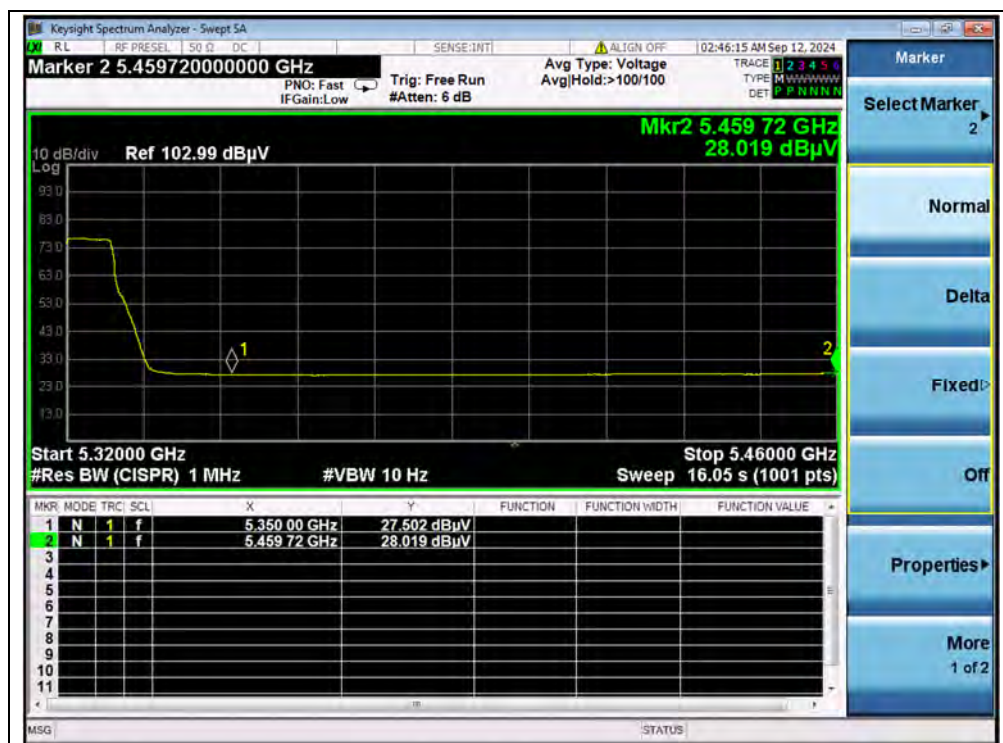


(AVERAGE, Channel 64, 802.11a)

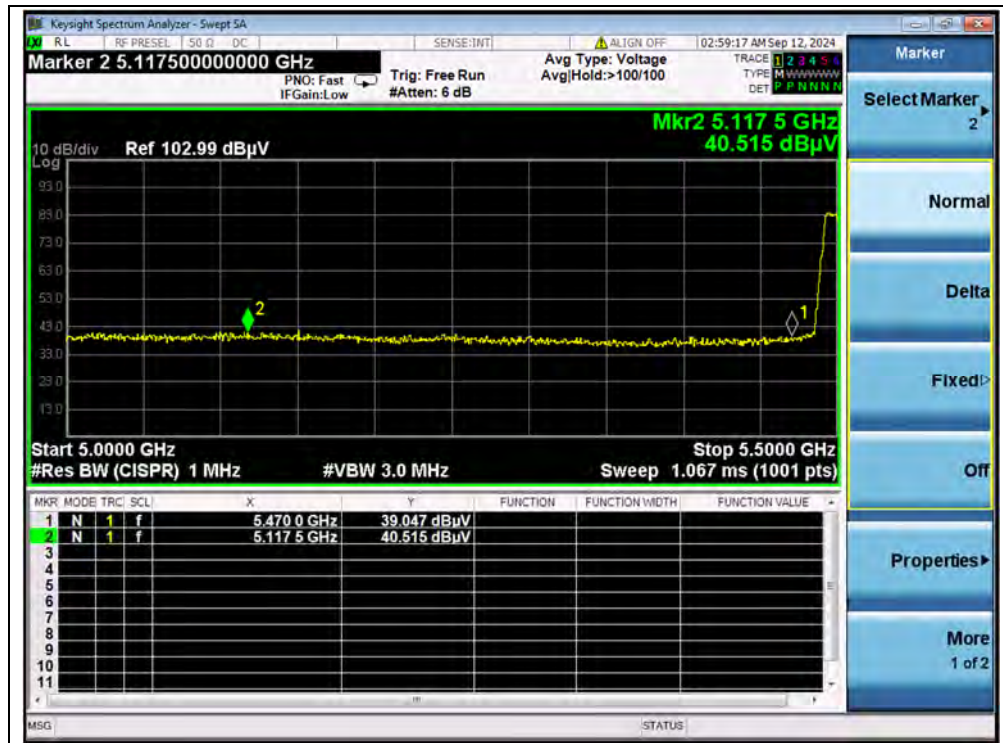


(PEAK, Channel 100, 802.11a)

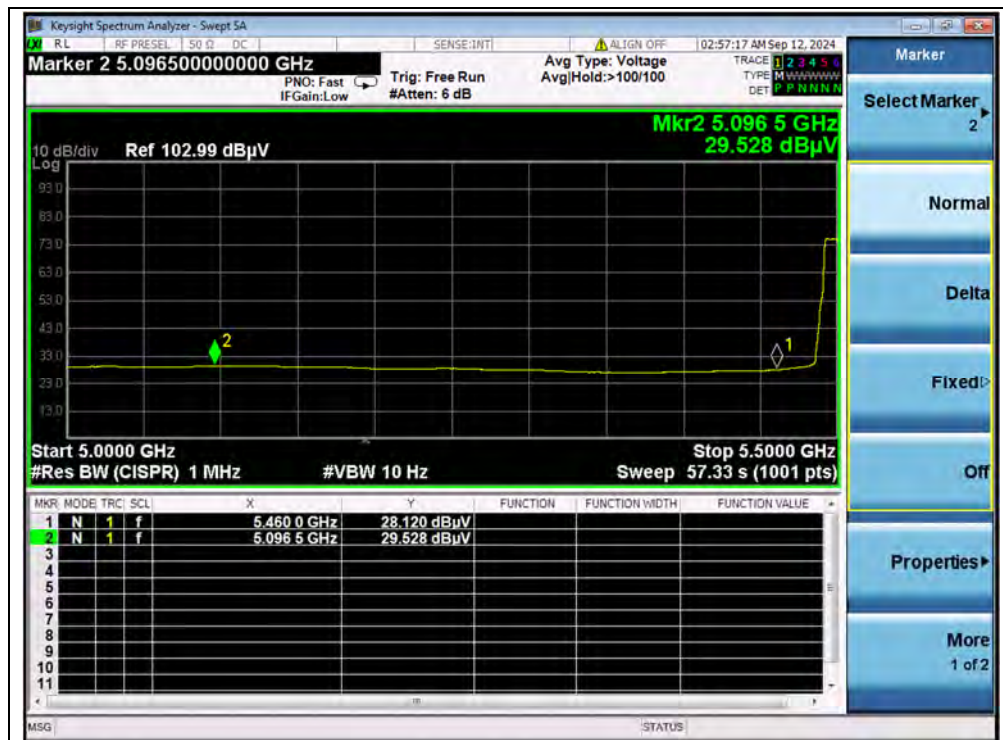


(AVERAGE, Channel 100, 802.11a)

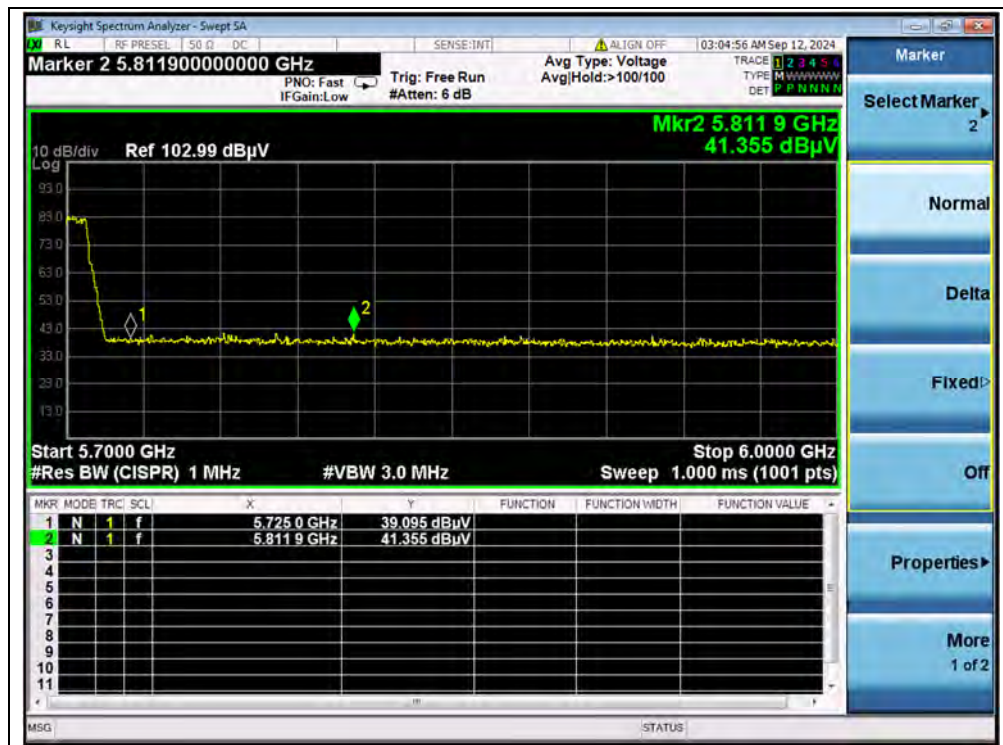

(PEAK, Channel 140, 802.11a)

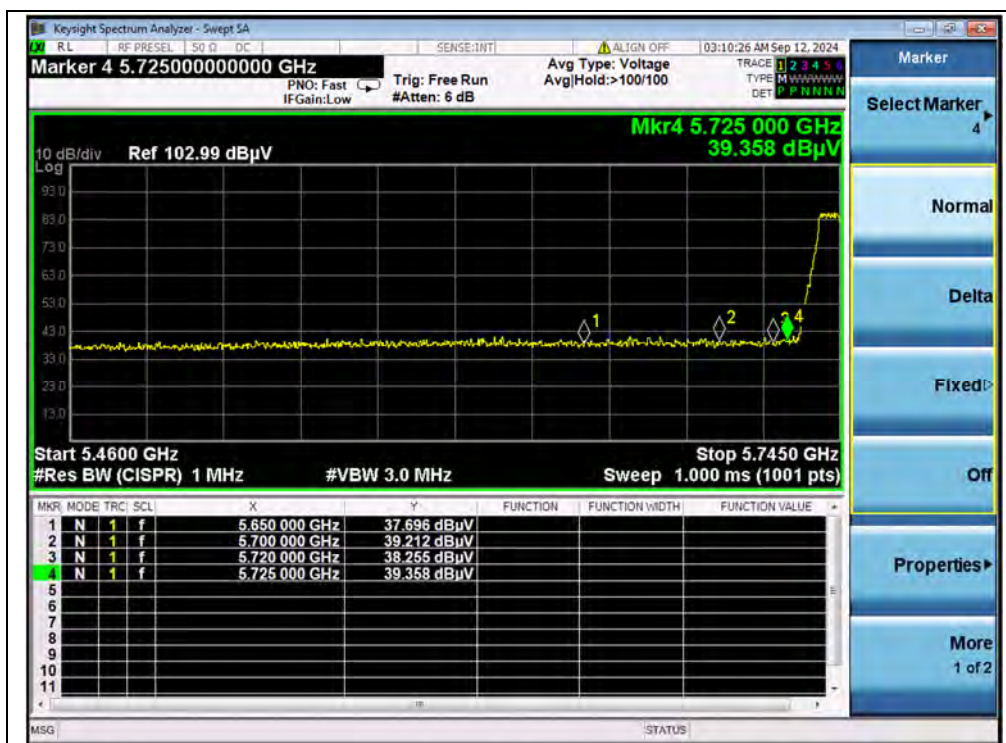

(PEAK, Channel 149, 802.11a)

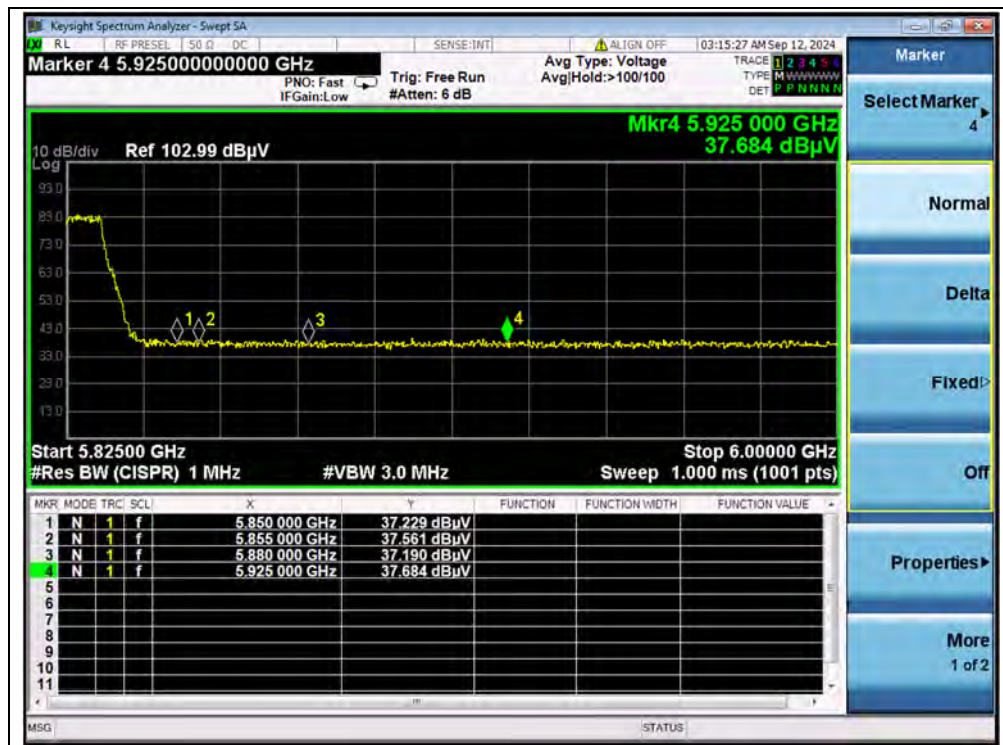


(PEAK, Channel 165, 802.11a)




802.11n (HT40) Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
38	5112.03	PK	42.14	-21.29	32.20	53.05	74	PASS
38	5149.29	AV	29.91	-21.29	32.20	40.82	54	PASS
62	5388.15	PK	39.72	-20.66	32.20	51.26	74	PASS
62	5430.75	AV	27.96	-20.66	32.20	39.50	54	PASS
102	5129.54	PK	41.11	-20.24	32.20	53.07	74	PASS
102	5106.59	AV	29.54	-20.24	32.20	41.50	54	PASS
134	5748.21	PK	41.18	-20.24	32.20	53.14	68.23	PASS
151	5700.00	PK	39.64	-21.11	32.20	50.73	105.23	PASS
159	5850.00	PK	39.93	-21.11	32.20	51.02	122.23	PASS

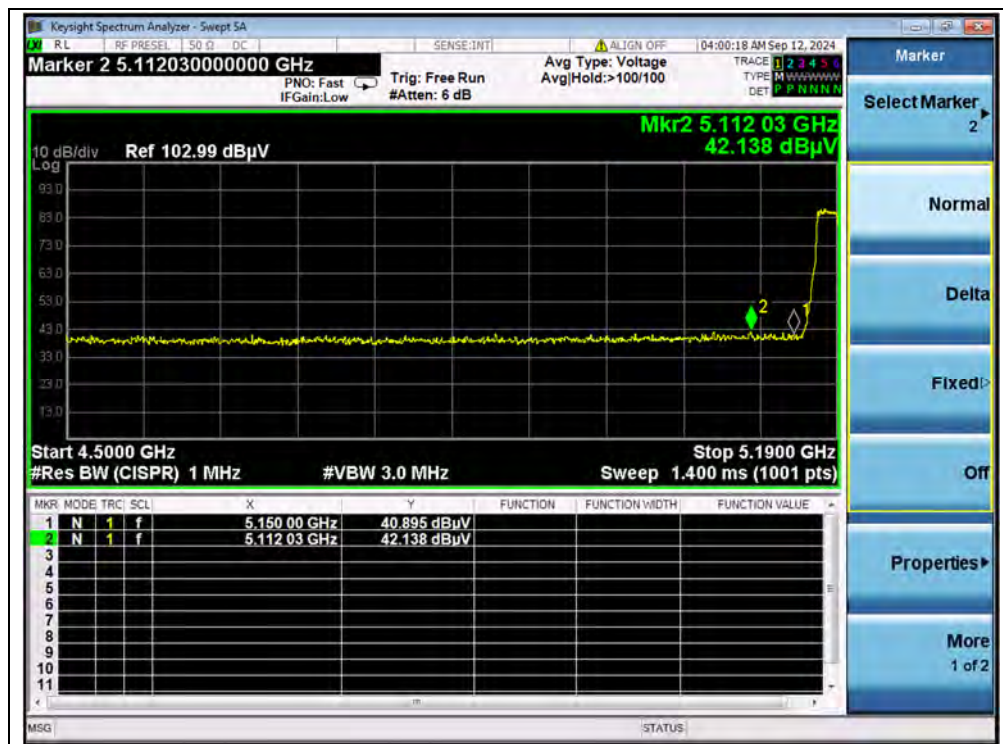


(PEAK, Channel 38, 802.11n (HT40))

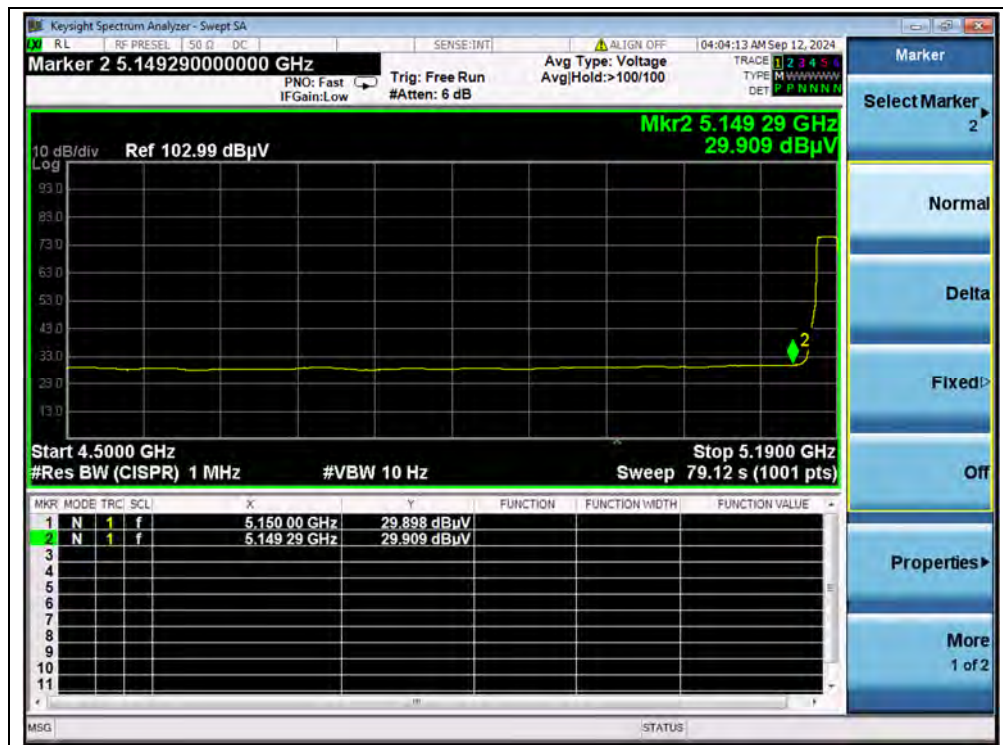


(AVERAGE, Channel 38, 802.11n (HT40))

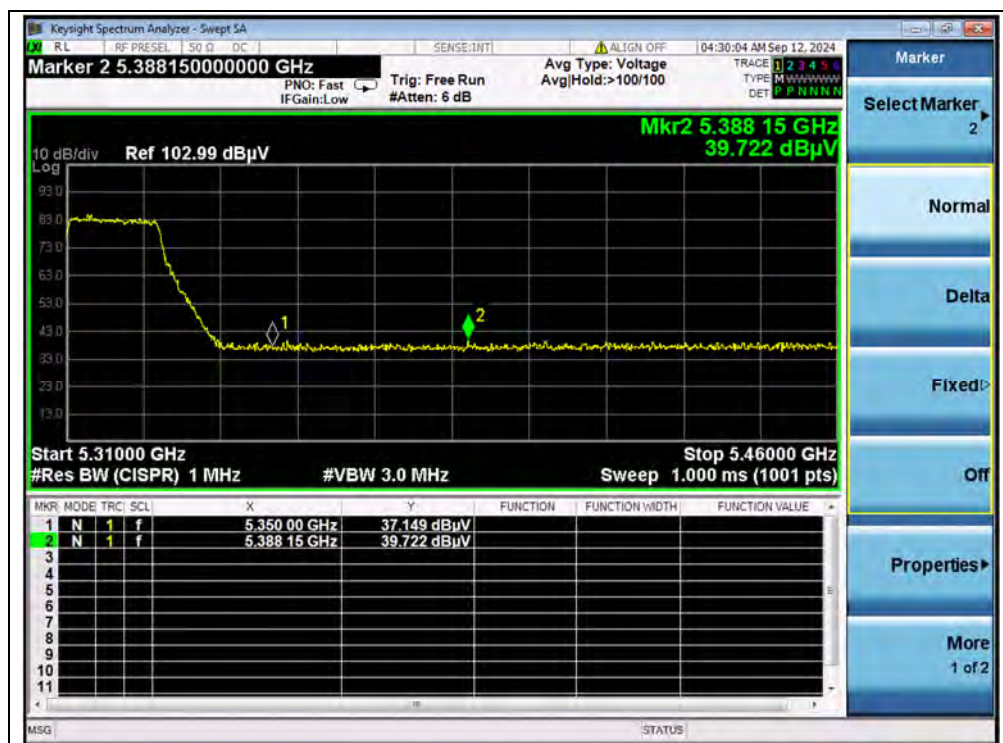


(PEAK, Channel 62, 802.11n (HT40))

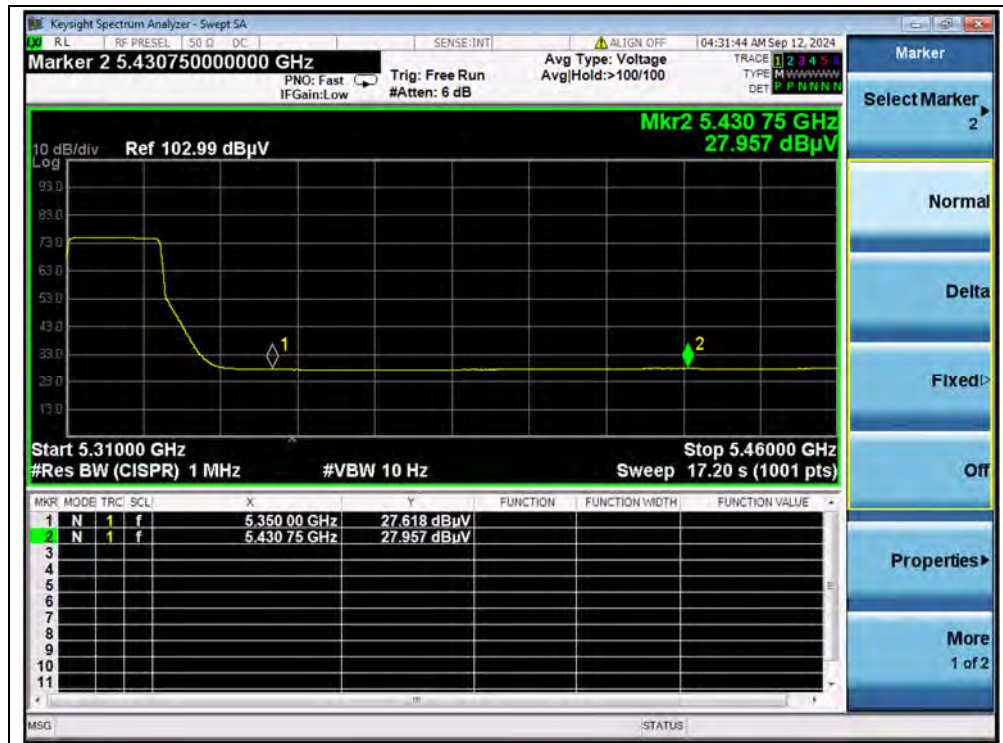


(AVERAGE, Channel 62, 802.11n (HT40))

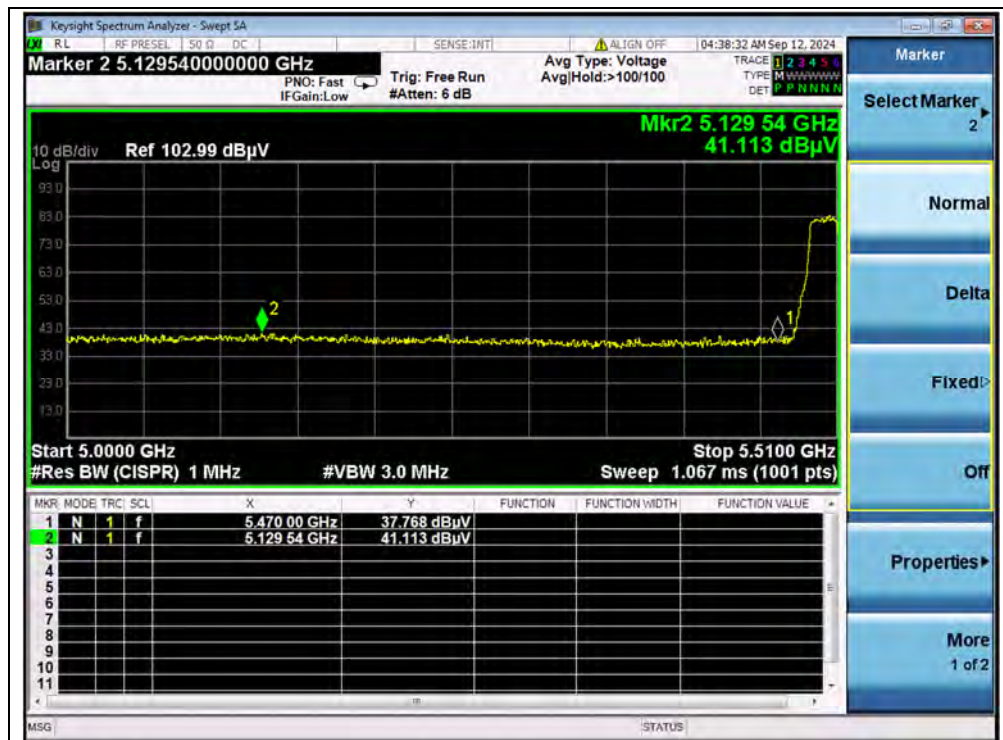


(PEAK, Channel 102, 802.11n (HT40))

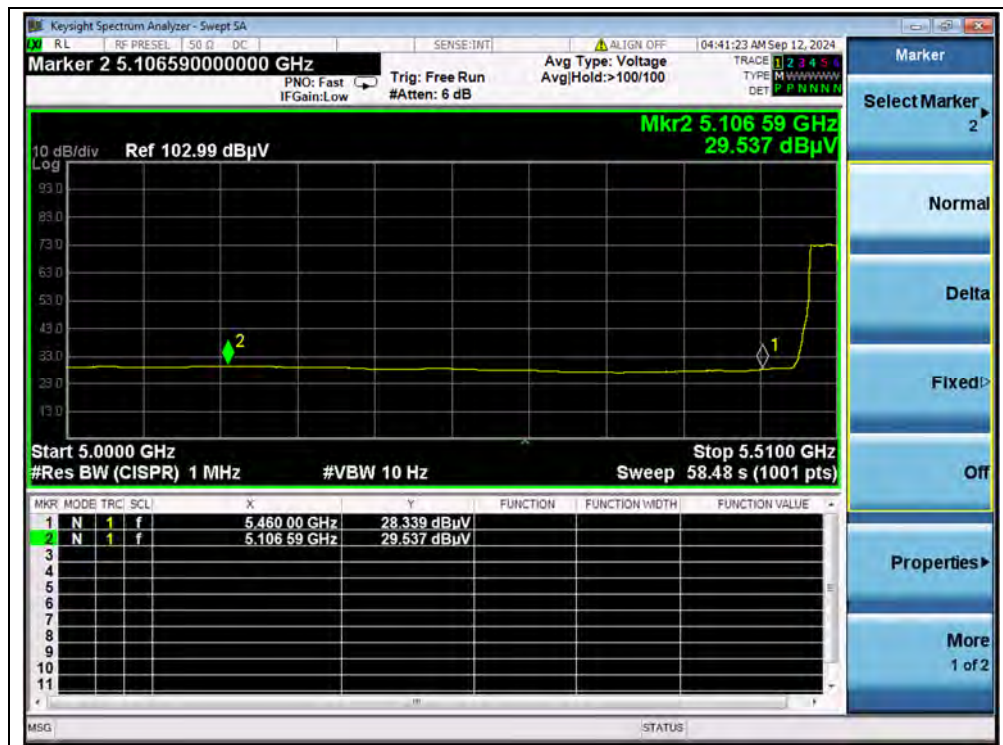


(AVERAGE, Channel 102, 802.11n (HT40))

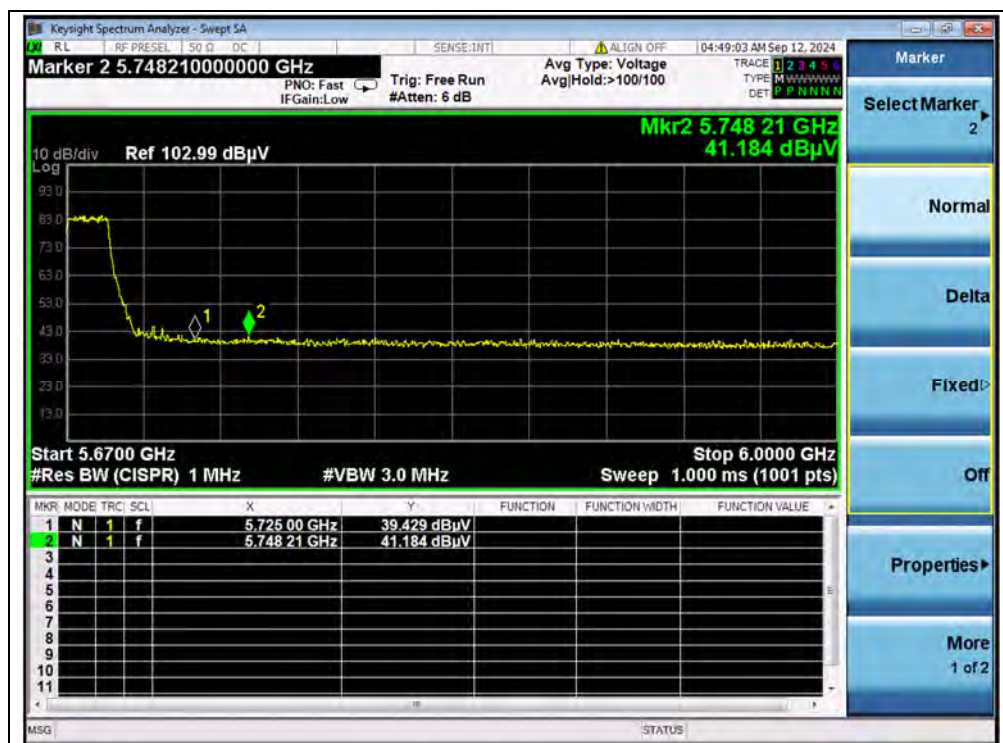

(PEAK, Channel 134, 802.11n (HT40))

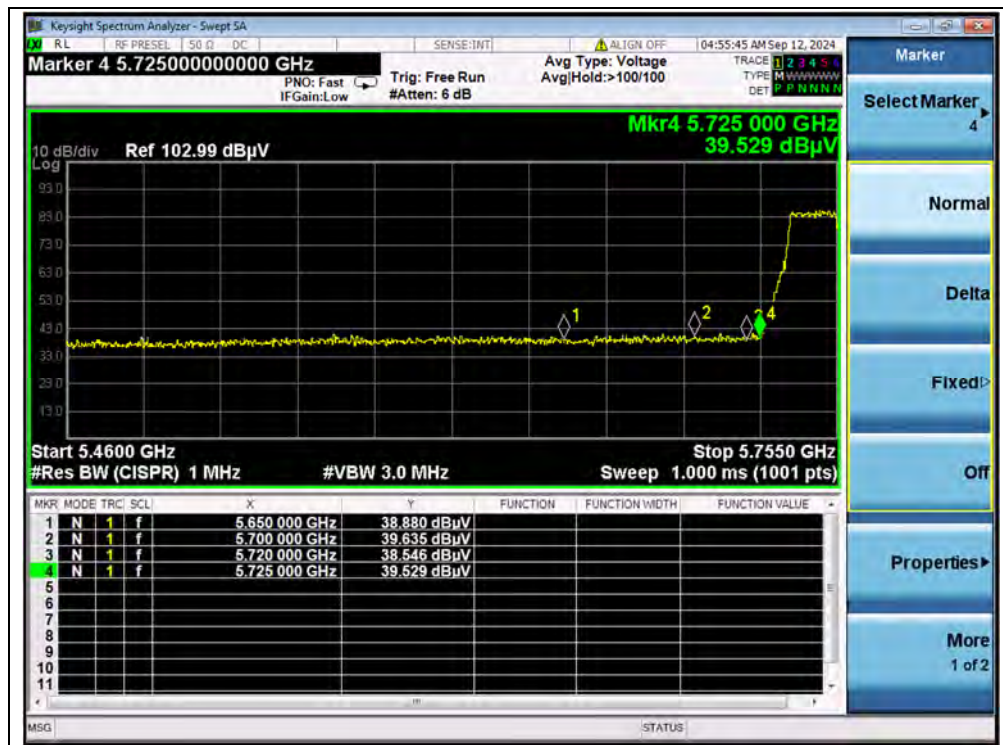

(PEAK, Channel 151, 802.11n (HT40))

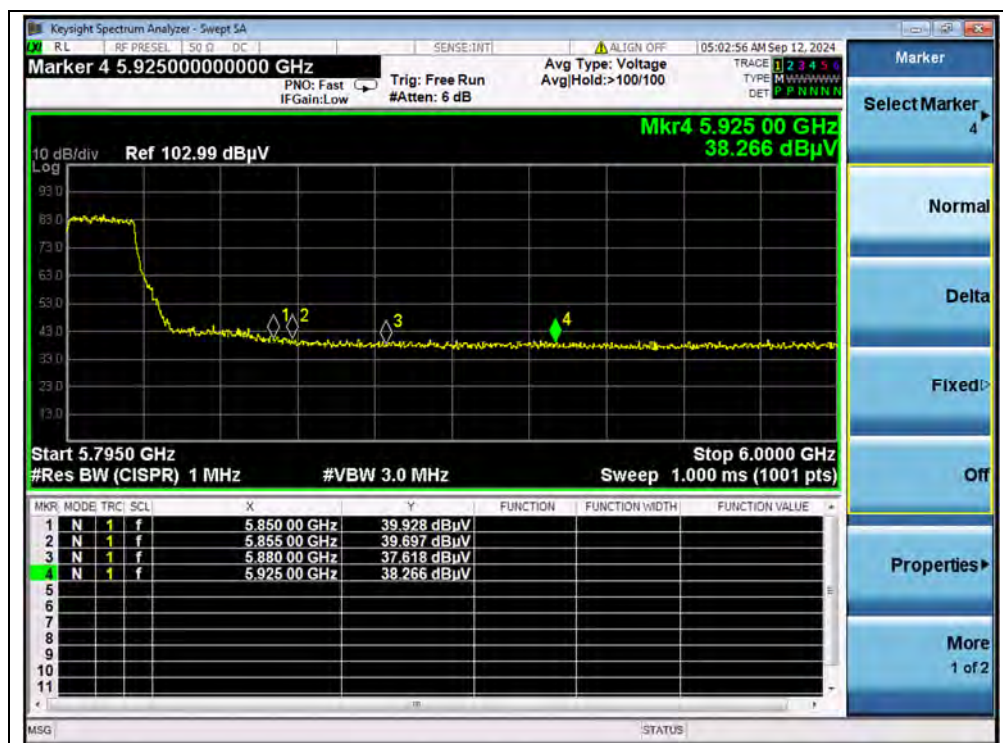


(PEAK, Channel 159, 802.11n (HT40))




802.11ac (VHT80) Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
42	5022.80	PK	40.91	-21.29	32.20	51.82	74	PASS
42	5112.20	AV	30.08	-21.29	32.20	40.99	54	PASS
58	5568.40	PK	41.73	-20.66	32.20	53.27	74	PASS
58	5590.00	AV	28.70	-20.66	32.20	40.24	54	PASS
106	5033.39	PK	41.59	-20.24	32.20	53.55	74	PASS
106	5096.99	AV	29.41	-20.24	32.20	41.37	54	PASS
122	5807.34	PK	40.56	-20.24	32.20	52.52	68.23	PASS
155	5725.00	PK	48.17	-21.11	32.20	59.26	122.23	PASS
155	5855.00	PK	41.06	-21.11	32.20	52.15	110.83	PASS

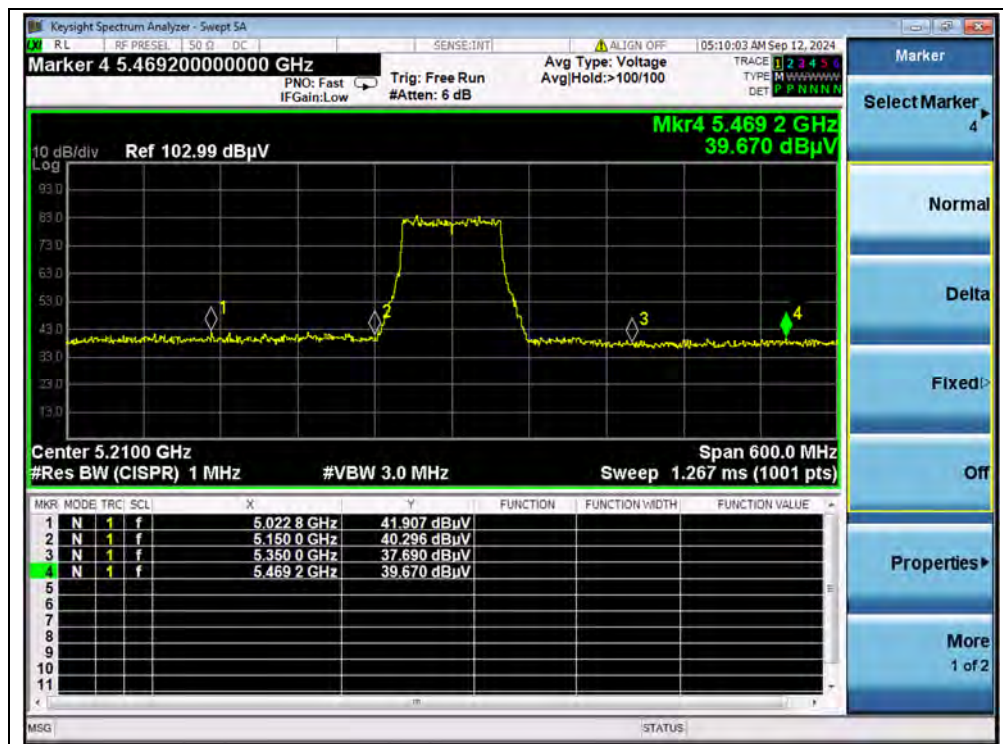


(PEAK, Channel 42, 802.11ac (VHT80))

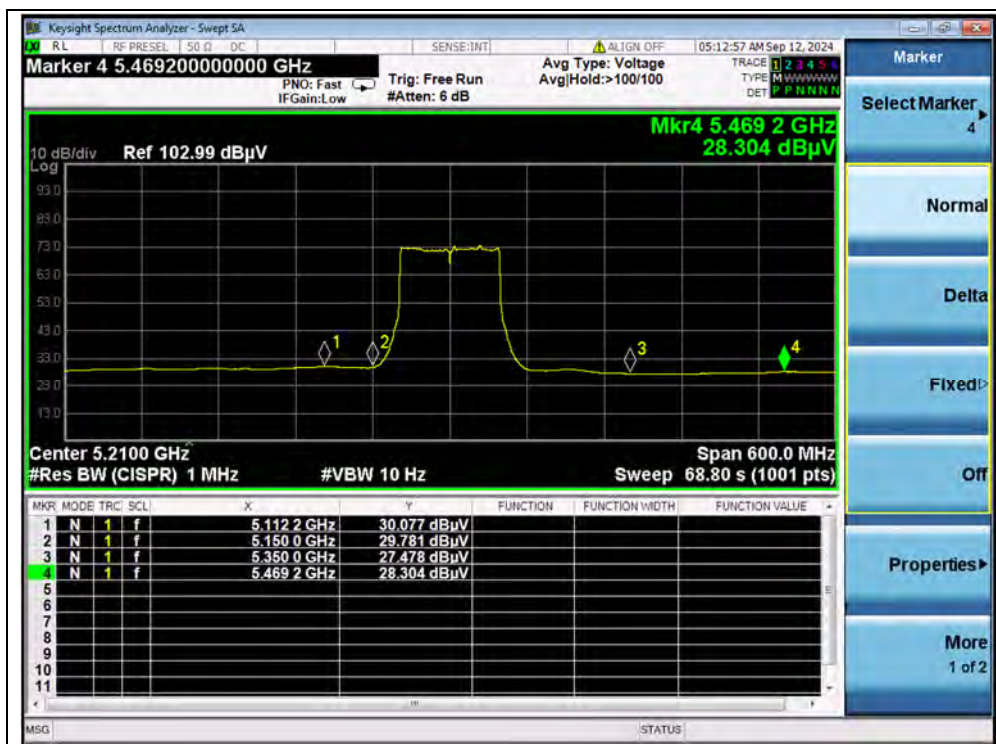


(AVERAGE, Channel 42, 802.11ac (VHT80))

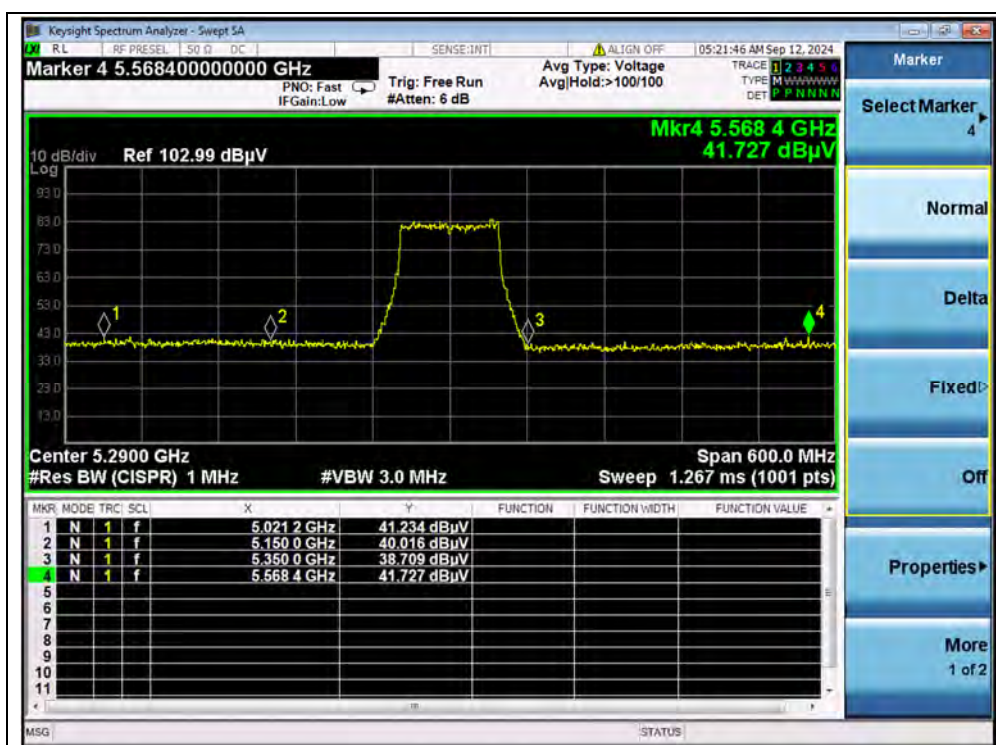


(PEAK, Channel 58, 802.11ac (VHT80))

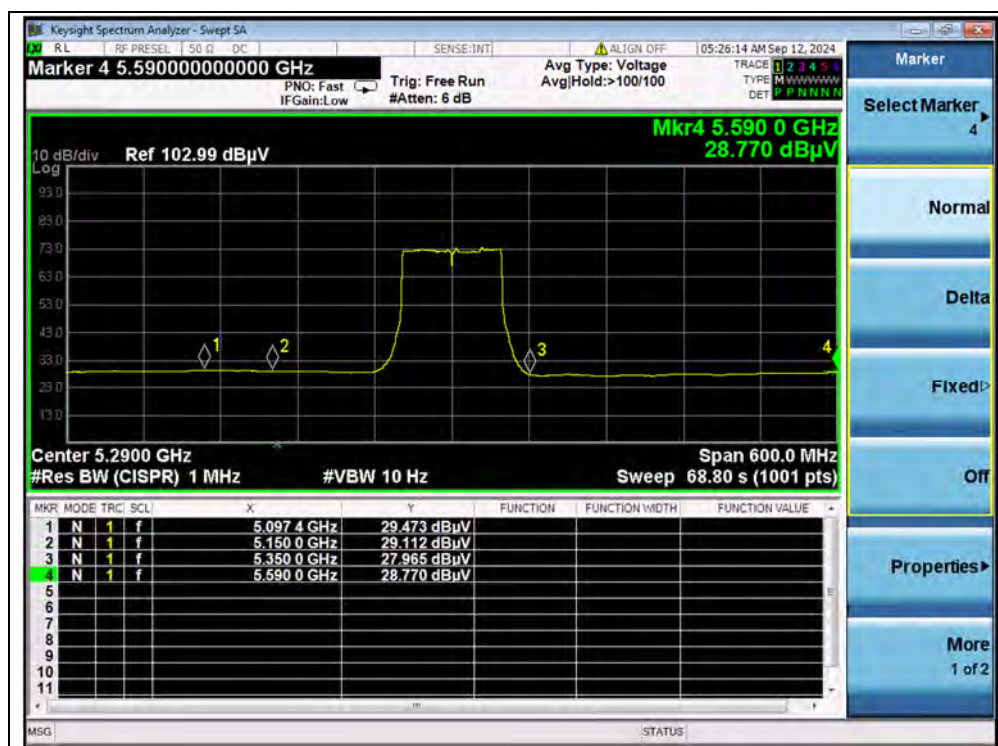


(AVERAGE, Channel 58, 802.11ac (VHT80))

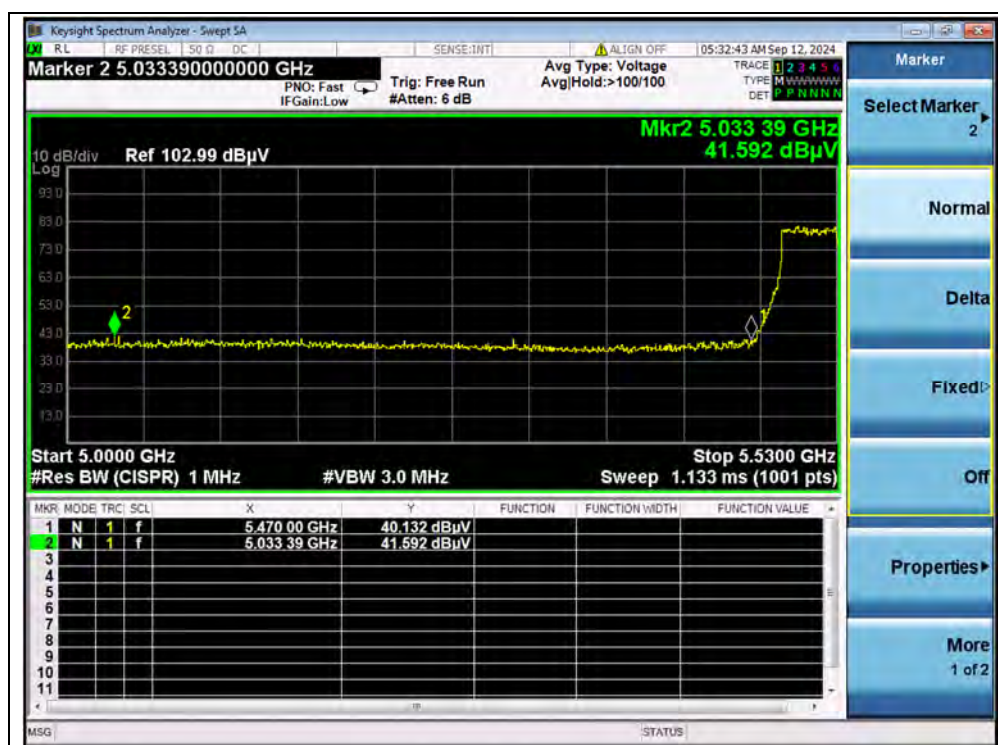


(PEAK, Channel 106, 802.11ac (VHT80))

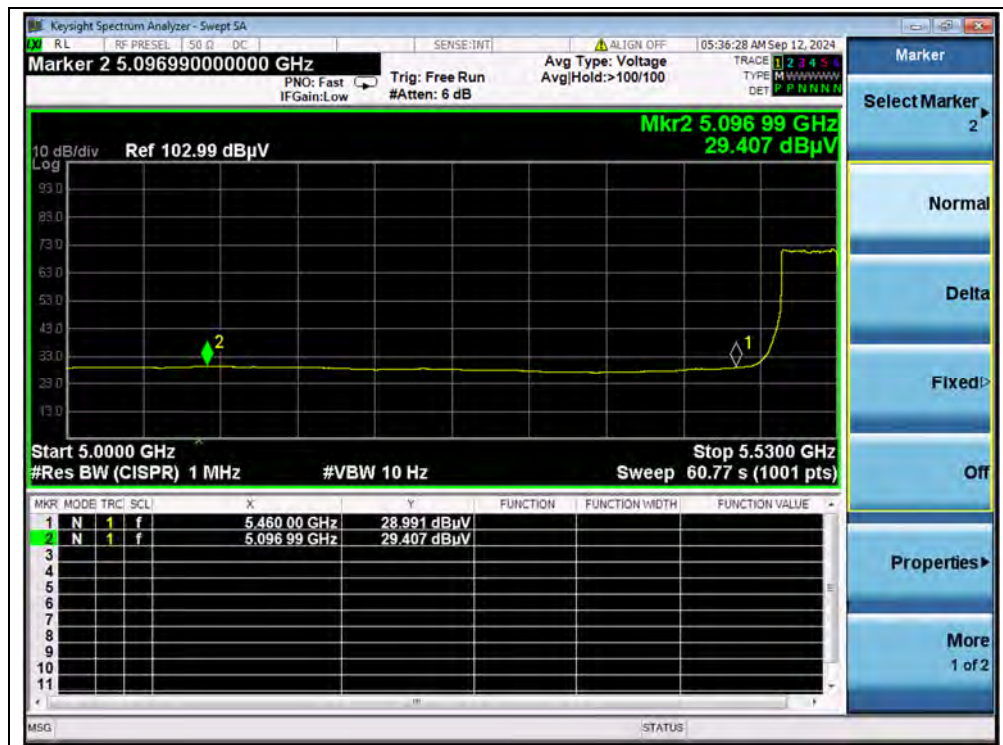

(AVERAGE, Channel 106, 802.11ac (VHT80))

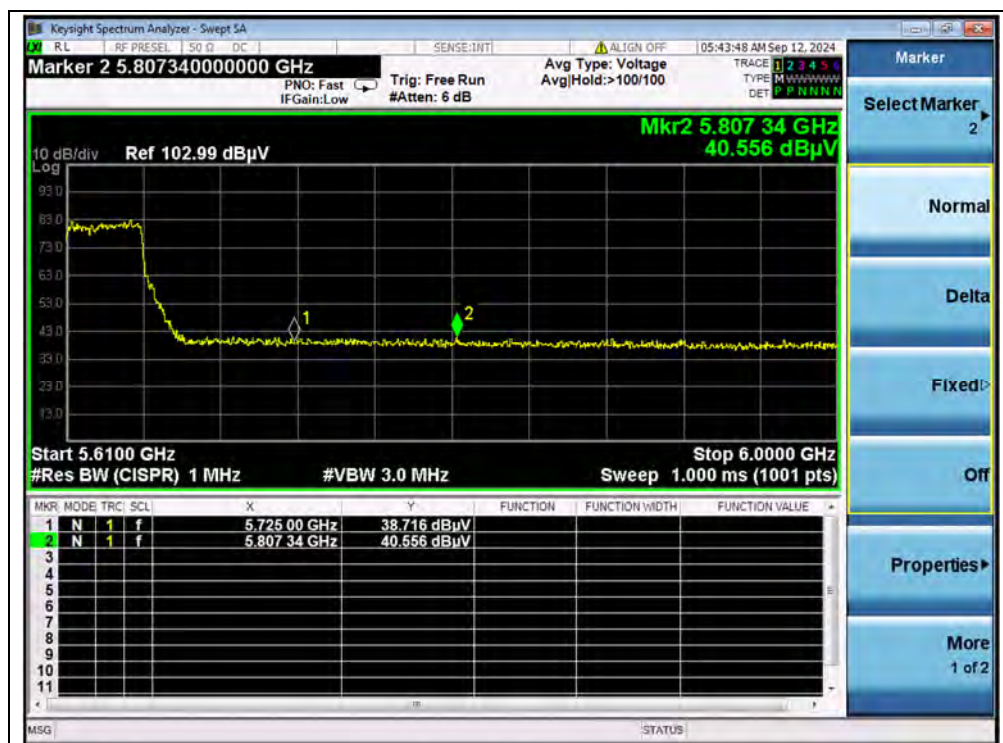


(PEAK, Channel 122, 802.11ac (VHT80))

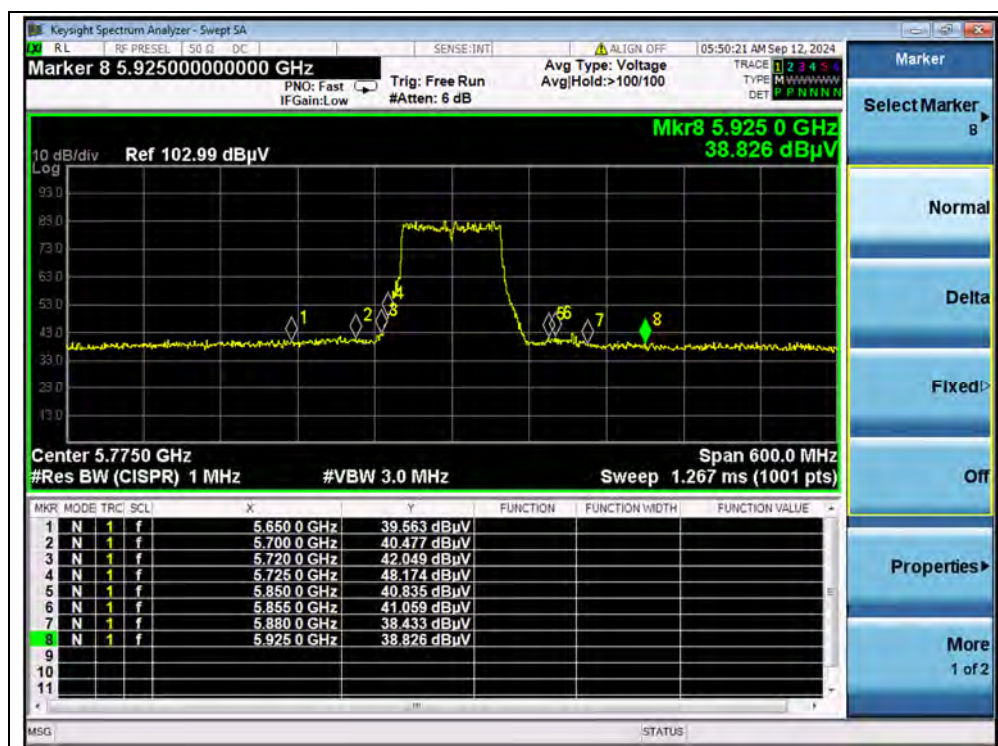


(PEAK, Channel 155, 802.11ac (VHT80))

**802.11be (EHT160) Mode****A.Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
50	5150.00	PK	44.91	-20.66	32.20	56.45	74	PASS
50	5096.40	AV	29.66	-20.66	32.20	41.20	54	PASS
50	5355.00	PK	44.20	-20.66	32.20	55.74	74	PASS
50	5549.40	AV	28.55	-20.66	32.20	40.09	54	PASS
114	5081.00	PK	42.67	-20.24	32.20	54.63	74	PASS
114	5096.00	AV	29.39	-20.24	32.20	41.35	54	PASS
114	5762.00	PK	41.23	-20.24	32.20	53.19	68.23	PASS
114	5749.00	AV	29.03	-20.24	32.20	40.99	54	PASS

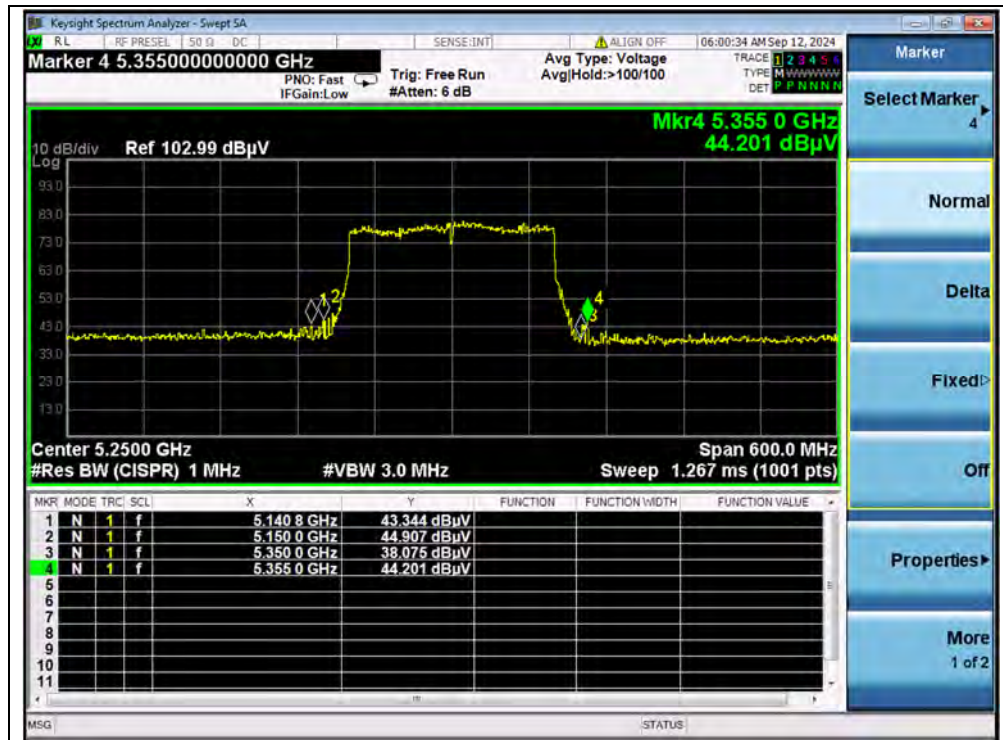B.Test Plot:


(PEAK, Channel 50, 802.11be (EHT160))

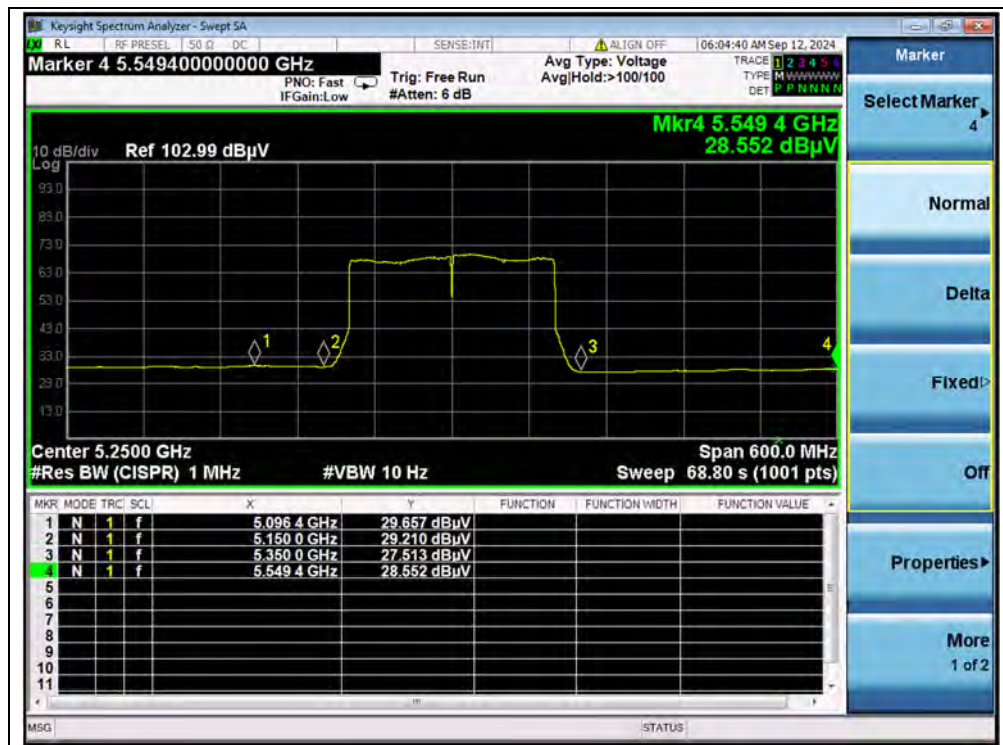

(AVERAGE, Channel 50, 802.11be (EHT160))

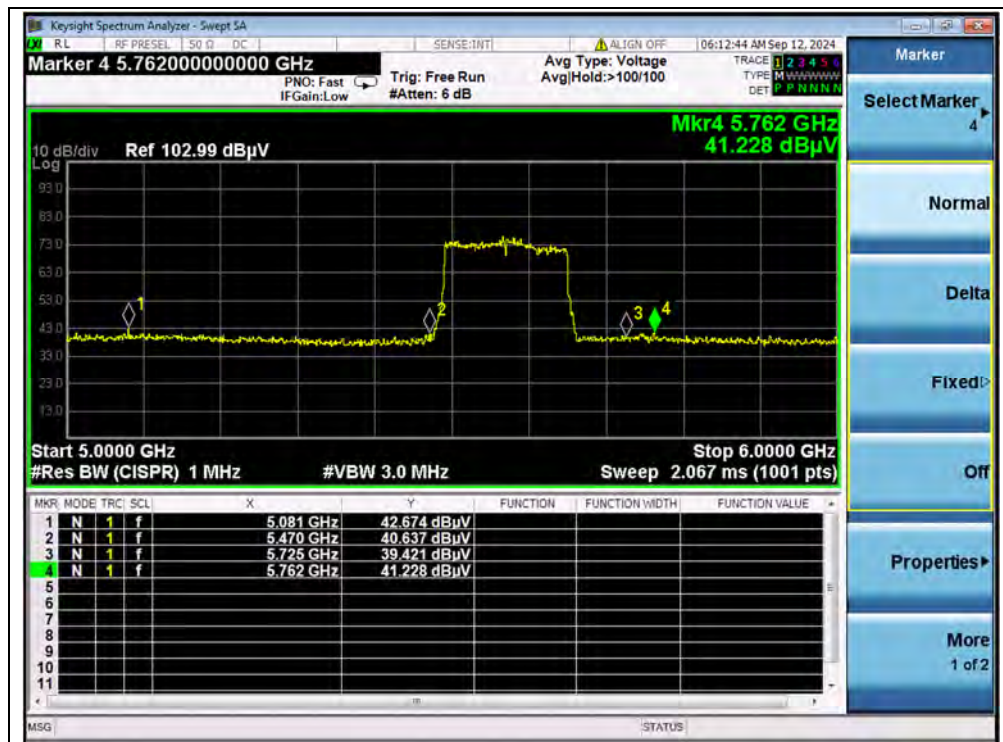

(PEAK, Channel 114, 802.11be (EHT160))

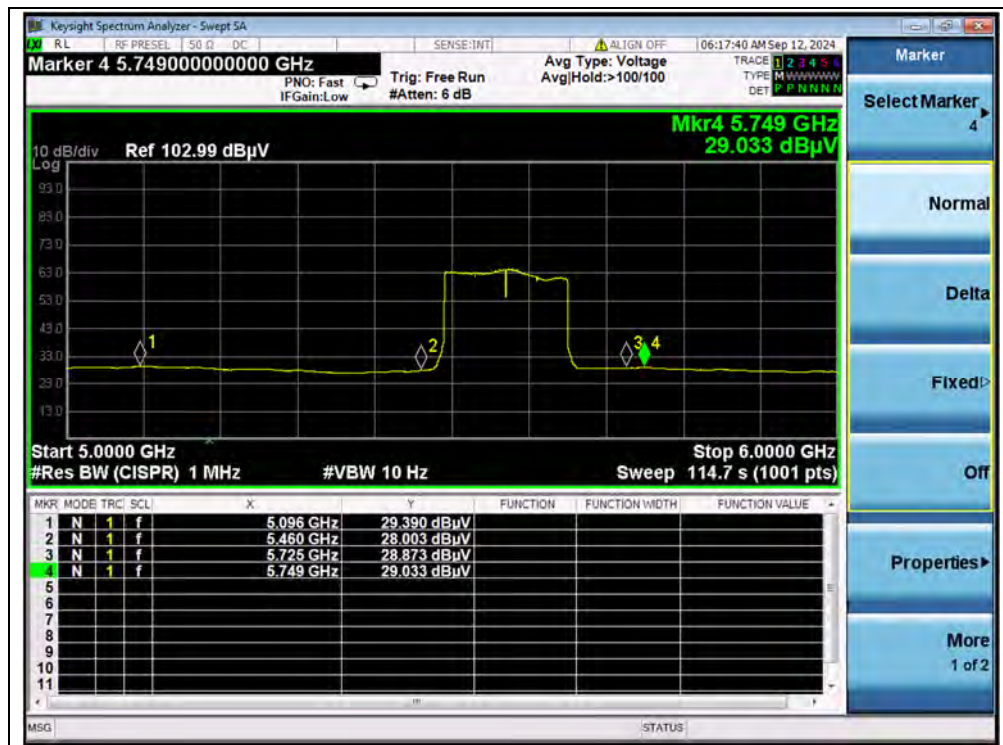

(AVERAGE, Channel 114, 802.11be (EHT160))



A.9. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis (X axis) test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note4: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.


**802.11a Mode**

Plot for Channel 44

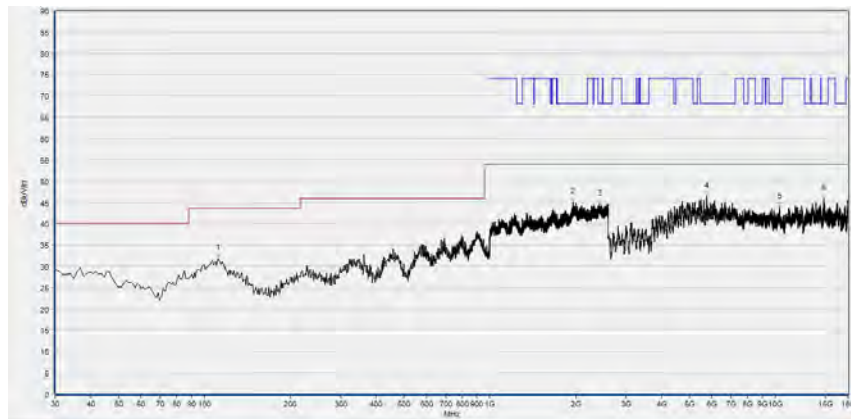

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	31.86	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1961.067	45.10	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2428.267	44.51	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
5738.520	46.40	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
10352.360	43.87	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
14806.040	45.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

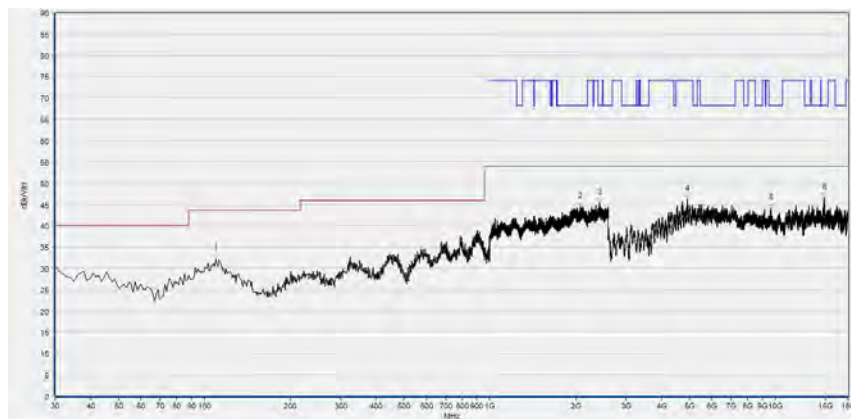


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.17	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2078.400	44.49	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
2427.733	45.35	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
4916.160	46.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9650.120	44.01	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
14839.920	46.66	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 60

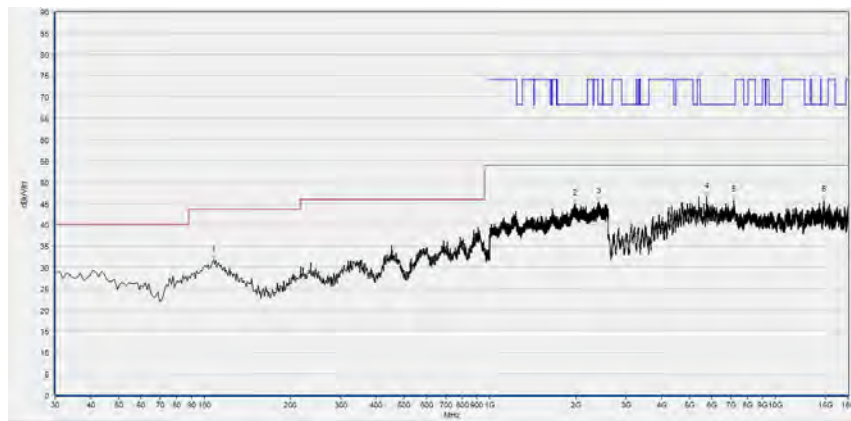

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	31.60	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1996.800	44.93	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
2406.933	45.41	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5744.680	46.65	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
7146.080	45.67	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
14812.200	45.74	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

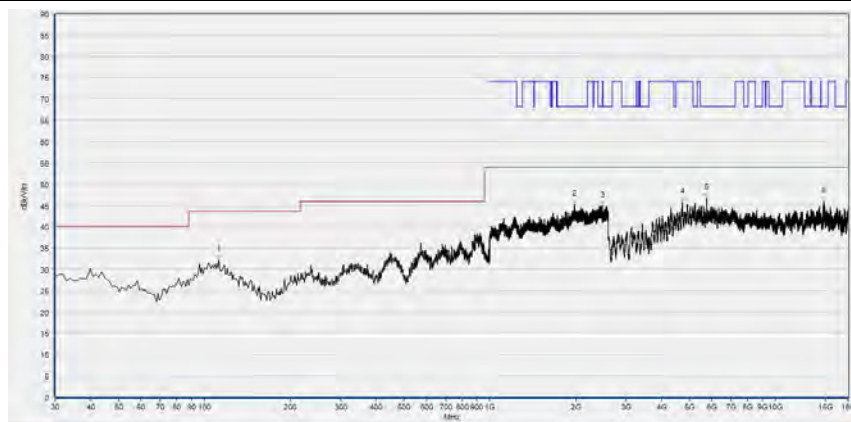


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	32.21	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1977.067	45.24	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
2477.867	44.98	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
4737.520	45.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5741.600	46.68	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
14802.960	45.87	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 116

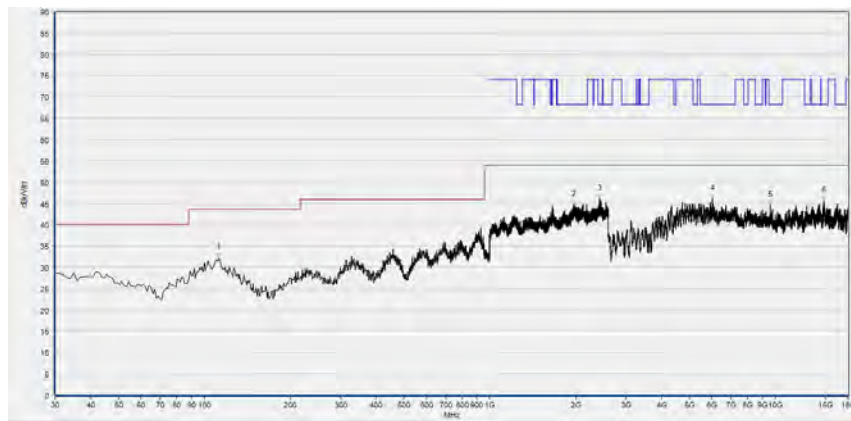

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	32.10	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1964.267	44.69	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
2428.800	46.04	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
6006.480	46.17	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
9628.560	44.55	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
14806.040	45.54	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

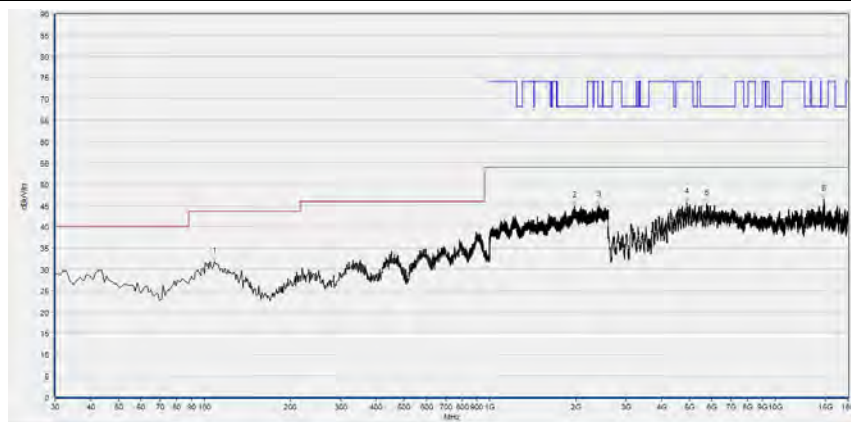


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	31.80	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1983.467	44.86	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
2403.733	45.07	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
4906.920	45.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5747.760	45.37	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
14793.720	46.37	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 157

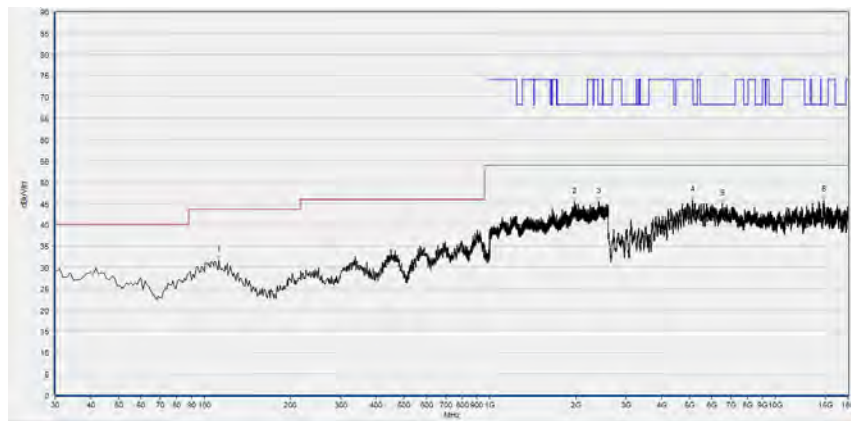

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	31.75	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1979.200	45.36	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
2407.467	45.37	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5137.920	45.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6511.600	44.99	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
14799.880	45.67	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

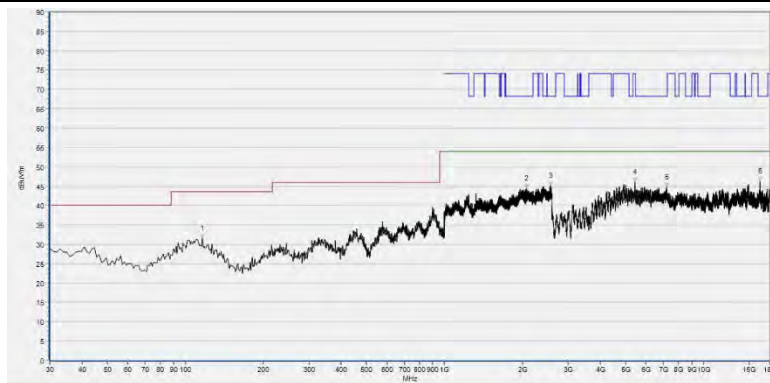

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
116.330	31.46	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2071.467	44.37	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
2560.000	45.00	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5433.600	46.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7216.920	44.68	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
16466.160	46.22	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT