



FCC Test Report

APPLICANT : OnePlus Technology (Shenzhen) Co., Ltd.
EQUIPMENT : tablet
BRAND NAME : ONEPLUS
MODEL NAME : OPD2415
FCC ID : 2ABZ2-OPD2415
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Feb. 09, 2025 ~ Mar. 14, 2025

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	6
1.6. Test Location	7
1.7. Test Software	7
1.8. Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1. Test Mode	8
2.2. Connection Diagram of Test System	9
2.3. Support Unit used in test configuration and system.....	9
2.4. EUT Operation Test Setup	10
3. TEST RESULT	11
3.1. Test of AC Conducted Emission Measurement	11
3.2. Test of Radiated Emission Measurement	15
4. LIST OF MEASURING EQUIPMENT	20
5. MEASUREMENT UNCERTAINTY	21
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC511612	Rev. 01	Initial issue of report	Mar. 31, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 7.00 dB at 0.160 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 7.53 dB at 54.25 MHz for Quasi-Peak

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1. Applicant

OnePlus Technology (Shenzhen) Co., Ltd.

18C02, 18C03, 18C04, and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, P.R. China

1.2. Manufacturer

OnePlus Technology (Shenzhen) Co., Ltd.

18C02, 18C03, 18C04, and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, P.R. China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	tablet
Brand Name	ONEPLUS
Model Name	OPD2415
FCC ID	2ABZ2-OPD2415
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 2.4GHz 802.11be EHT20/ EHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 5GHz 802.11be EHT20/EHT40/EHT80/EHT160 WLAN 6GHz 802.11a/ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11be EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE WPT
SN Code	Conduction: H621521000015ECA000L Radiation: H621521000015ECA0013
HW Version	OPD2415_11
SW Version	OPD2415_15.0.1
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	802.11b/g/n/ac/ax/be: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax/be: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz; 5725 MHz ~ 5850 MHz 802.11a/ax/be: 5945 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz WPT: 111kHz~ 145 kHz
Rx Frequency	802.11b/g/n/ac/ax/be: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax/be: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz; 5725 MHz ~ 5850 MHz 802.11a/ax/be: 5945 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz WPT: 111kHz~ 145 kHz
Antenna Type	WLAN : Cavity Antenna Bluetooth : Cavity Antenna WPT: Loop Antenna
Type of Modulation	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM) 802.11be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK WPT: ASK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ; 03CH05-SZ	CN1256	421272

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	CO02-SZ	AUDIX	E3	6.120613b
2.	03CH05-SZ	AUDIX	E3	6.2009-8-24al

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: Touch pen Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Battery 1 + USB Cable 1 (Charging from Adapter 1) for Sample 1
	Mode 2: Touch pen Link + Bluetooth Link + WLAN (5G) Link + Camera(Front) + Battery 1 + USB Cable 1 (Charging from Adapter 2) for Sample 1
	Mode 3: Touch pen Link + Bluetooth Link + WLAN (6G) Link + MPEG4(Run Color Bar) + Battery 1 + USB Cable 1 (Charging from Adapter2) for Sample 1
	Mode 4: Touch pen Link + Bluetooth idle + WLAN Idle + Camera(Front) + Battery 1 + USB Cable 1 (Charging from Adapter 2) for Sample 1
	Mode 5: Touch pen Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Battery 1 + USB Cable 1 (Charging from Adapter 1) for Sample 1
	Mode 6: Touch pen Link + Bluetooth Link + WLAN (5G) Link + Camera(Front) + Battery 1 + USB Cable 1 (Charging from Adapter 2) for Sample 1
Radiated Emissions	Mode 1: Touch pen Link + Bluetooth Link + WLAN (2.4G) Link + Camera(Rear) + Battery 1 + USB Cable 1 (Charging from Adapter 1) for Sample 1
	Mode 2: Touch pen Link + Bluetooth Link + WLAN (5G) Link + Camera(Front) + Battery 1 + USB Cable 1 (Charging from Adapter 2) for Sample 1
	Mode 3: Touch pen Link + Bluetooth Link + WLAN (6G) Link + MPEG4(Run Color Bar) + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to NB for Sample 1
	Mode 4: Touch pen Link + Bluetooth idle + WLAN Idle + MPEG4(Run Color Bar) + Battery 1 + USB Cable 1 (Charging from Adapter 2) for Sample 1
	Mode 5: Touch pen Link + Bluetooth Link + WLAN (6G) Link + MPEG4(Run Color Bar + Type-C Earphone + Battery 1 for Sample 1
	Mode 6: Touch pen Link + Bluetooth Link + WLAN (6G) Link + MPEG4(Run Color Bar + OTG Reverse charge + USB Cable 1 (Data from mobile phone to EUT) + Battery1 for Sample 1
Remark: - For AC conduction item, Mode 1~4 are tested as soon as the EUT powered on (cold status), - Mode 5~6 are tested after EUT charged for five minutes (warm-up status). - The worst case of AC is mode 2; only the test data of this mode is reported. - The worst case of RE is mode 3; only the test data of this mode is reported. - Data Link with NB means data application transferred mode between EUT and Notebook.	

2.2.Connection Diagram of Test System

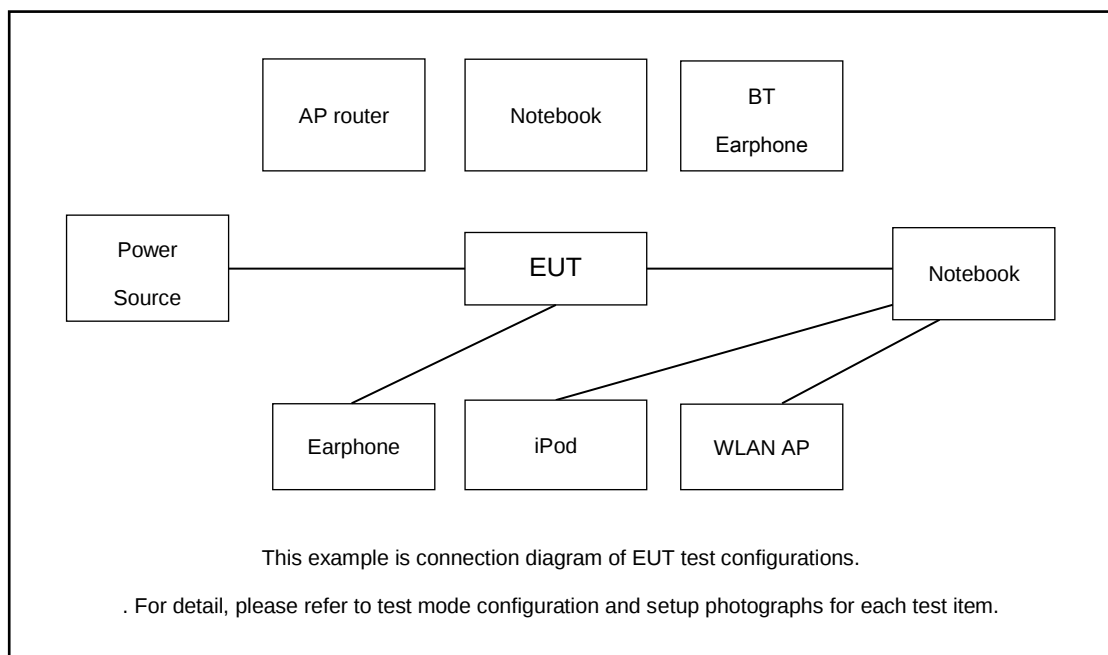

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Dlink	DIR-820L	KA21R820LA1	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	Bluetooth Earphone	Samsung	HS3000	A3LHS3000	N/A	N/A
4.	Earphone	Apple	MC690ZP/A	N/A	Shielded, 1.0m	N/A
5.	Mobile phone	Realme	Dongfeng	N/A	N/A	N/A
6.	Notebook	DELL	Inspiron 15-7570	Fcc DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
7.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	iPod	Apple	MC525 ZP/A	Fcc DoC	Shielded, 1.0m	N/A



2.4. EUT Operation Test Setup

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

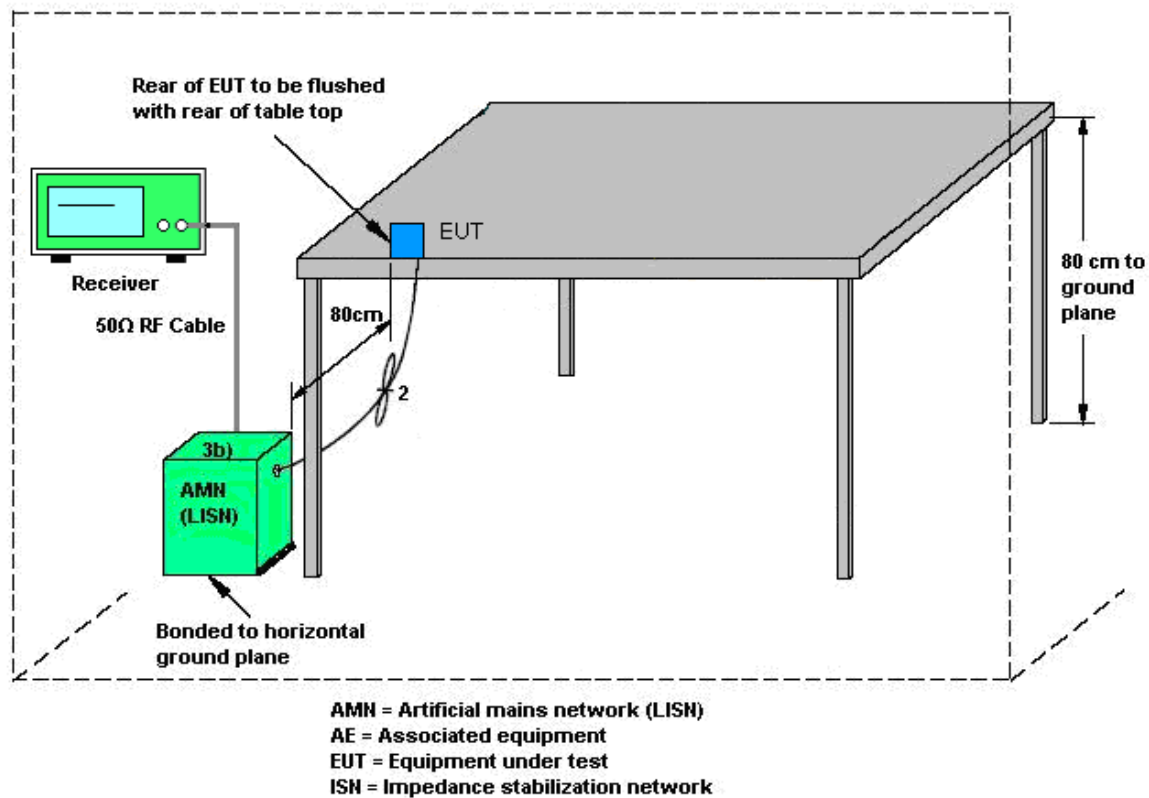



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

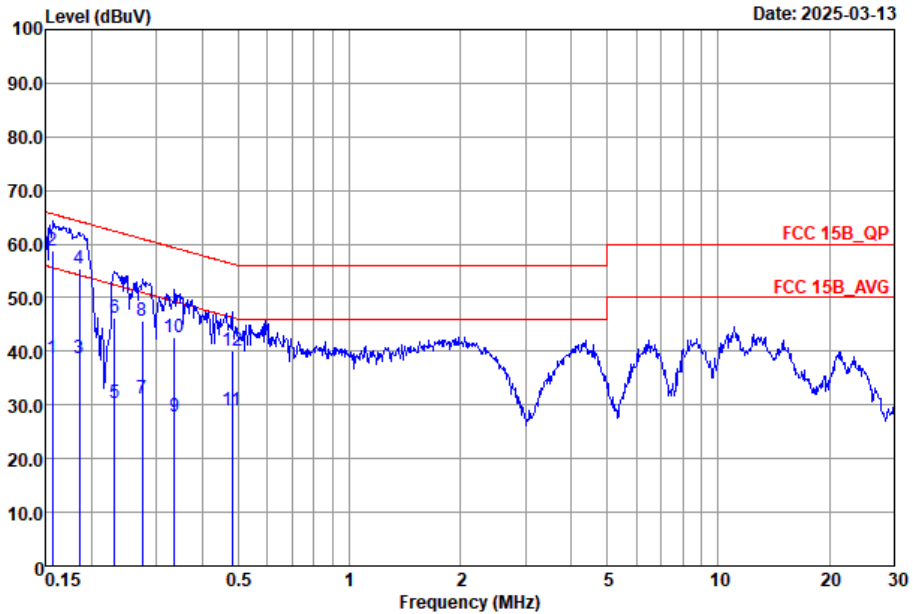


Site : C002-SZ
Condition : FCC 15B_QP LISN_2025-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	38.75	-16.90	55.65	18.89	9.67	10.19	Average
2 *	0.16	58.65	-7.00	65.65	38.79	9.67	10.19	QP
3	0.19	38.68	-15.56	54.24	18.80	9.70	10.18	Average
4	0.19	55.48	-8.76	64.24	35.60	9.70	10.18	QP
5	0.23	30.41	-21.98	52.39	10.50	9.72	10.19	Average
6	0.23	46.31	-16.08	62.39	26.40	9.72	10.19	QP
7	0.27	31.14	-19.84	50.98	11.20	9.74	10.20	Average
8	0.27	45.64	-15.34	60.98	25.70	9.74	10.20	QP
9	0.34	27.95	-21.36	49.31	8.00	9.74	10.21	Average
10	0.34	42.65	-16.66	59.31	22.70	9.74	10.21	QP
11	0.48	29.02	-17.30	46.32	9.10	9.68	10.24	Average
12	0.48	40.02	-16.30	56.32	20.10	9.68	10.24	QP



Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

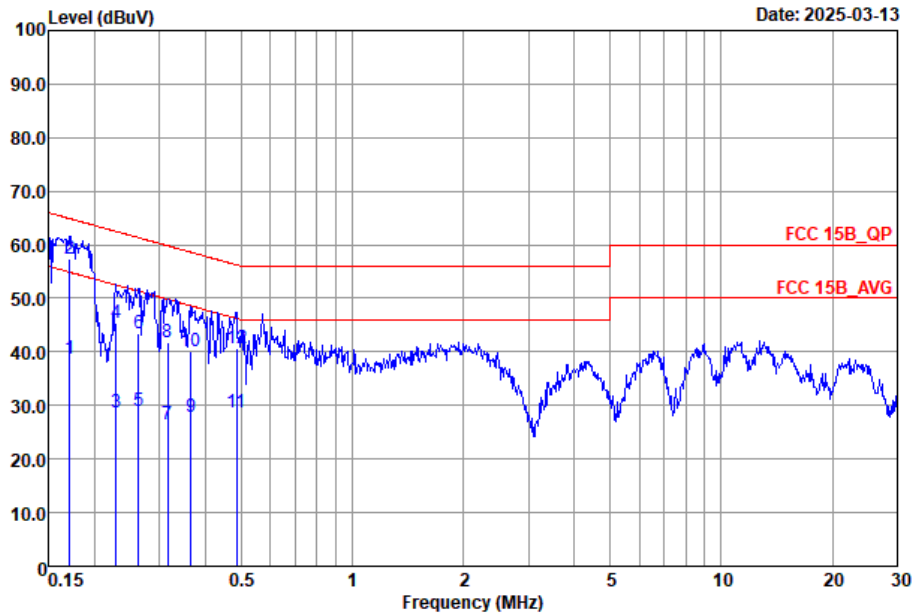

Site : CO02-SZ
Condition : FCC 15B_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.17	38.84	-16.06	54.90	18.90	9.76	10.18	Average
2 *	0.17	57.44	-7.46	64.90	37.50	9.76	10.18	QP
3	0.23	28.74	-23.74	52.48	8.90	9.65	10.19	Average
4	0.23	45.34	-17.14	62.48	25.50	9.65	10.19	QP
5	0.26	28.92	-22.42	51.34	9.10	9.62	10.20	Average
6	0.26	43.32	-18.02	61.34	23.50	9.62	10.20	QP
7	0.32	26.49	-23.31	49.80	6.50	9.78	10.21	Average
8	0.32	41.89	-17.91	59.80	21.90	9.78	10.21	QP
9	0.37	27.79	-20.82	48.61	7.90	9.67	10.22	Average
10	0.37	39.99	-18.62	58.61	20.10	9.67	10.22	QP
11	0.49	28.59	-17.64	46.23	8.30	10.05	10.24	Average
12	0.49	40.69	-15.54	56.23	20.40	10.05	10.24	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

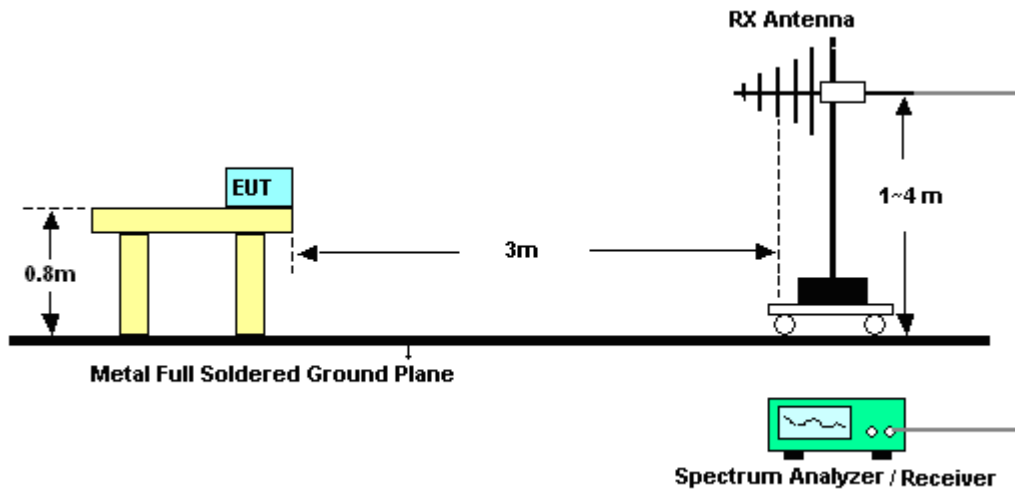


For radiated emissions above 1GHz

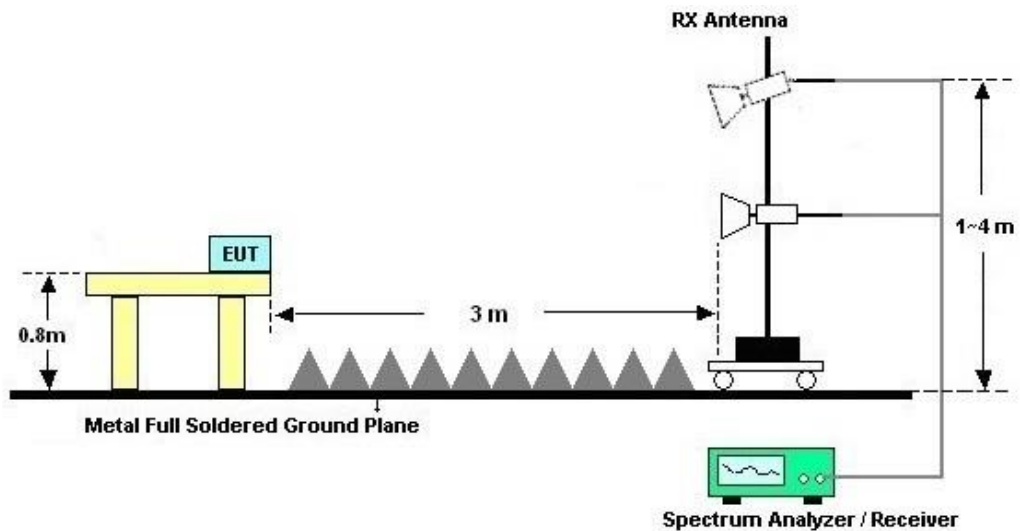



3.2.5. Test Result of Radiated Emission

Test Engineer :	ZhanSheng Liu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#8 is RF signal which comes from BT used to connect the EUT, and which can be ignored.		

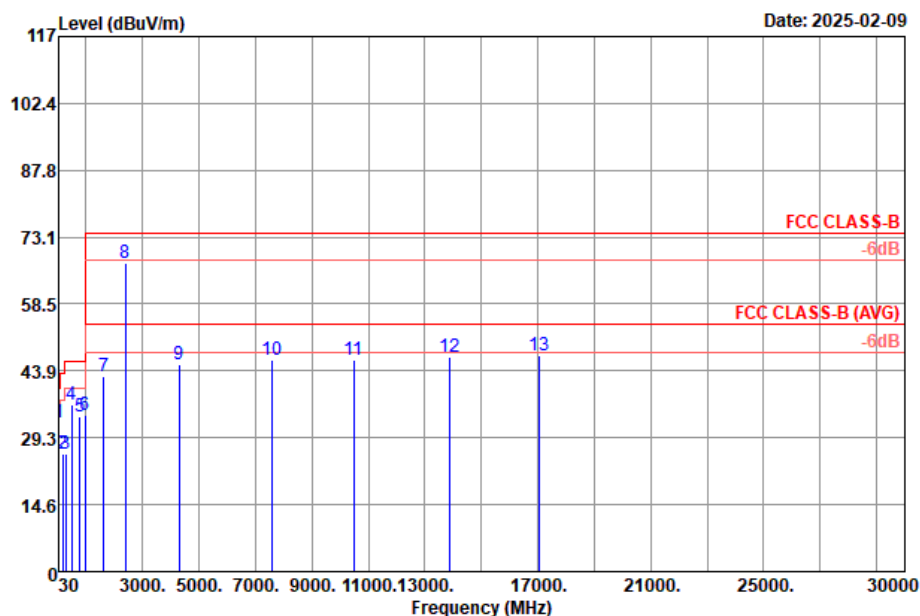


Site : 03CH05-SZ
Condition : FCC CLASS-B 3m VULB9168--01003 HORIZONTAL

Plane : Y

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	54.25	32.47	-7.53	40.00	46.30	19.36	1.68	34.87	166	185 QP
2	166.77	25.84	-17.66	43.50	39.92	18.53	2.42	35.03	---	---
3	283.17	25.74	-20.26	46.00	38.64	18.89	3.14	34.93	---	---
4	480.08	36.52	-9.48	46.00	44.28	23.40	3.42	34.58	---	---
5	796.30	33.85	-12.15	46.00	34.39	29.04	4.34	33.92	---	---
6	960.23	34.16	-19.84	54.00	33.63	29.92	4.53	33.92	---	---
7	1632.00	42.66	-31.34	74.00	56.65	30.03	6.03	50.05	---	---
8 *	2402.00	67.47			77.41	33.33	7.17	50.44	---	---
9	4304.00	45.21	-28.79	74.00	49.77	35.42	9.62	49.60	---	---
10	7600.00	46.18	-27.82	74.00	49.80	36.16	10.62	50.40	---	---
11	10485.00	46.18	-27.82	74.00	41.68	39.48	13.44	48.42	---	---
12	13869.00	46.86	-27.14	74.00	39.05	40.82	14.51	47.52	---	---
13	17064.00	47.26	-26.74	74.00	39.58	43.98	15.23	51.53	---	---



Test Engineer :	ZhanSheng Liu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#8 is RF signal which comes from BT used to connect the EUT, and which can be ignored.		

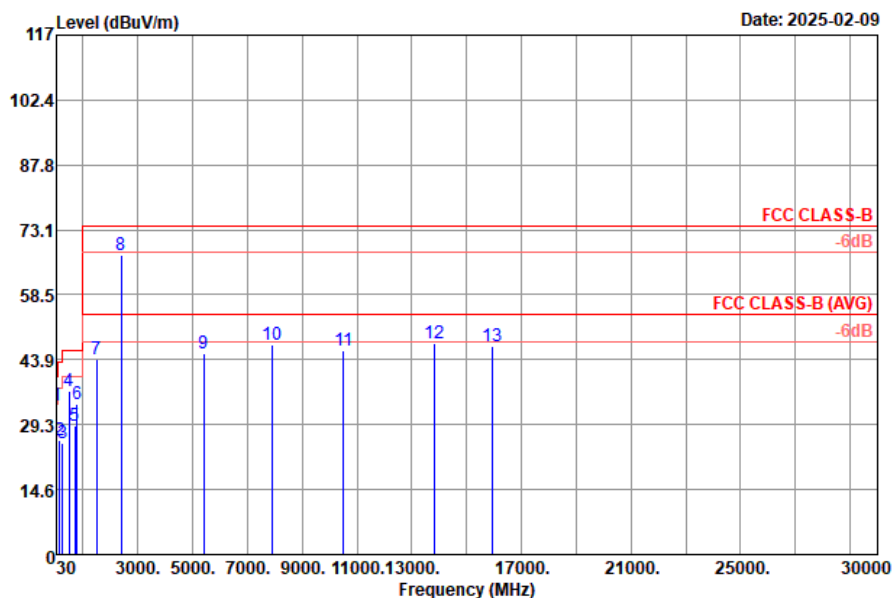

Site : 03CH05-SZ
Condition : FCC CLASS-B 3m VULB9168--01003 VERTICAL

Plane : Y

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 *	54.25	33.58	-6.42	40.00	47.41	19.36	1.68	34.87	---	Peak
2	161.92	25.66	-17.84	43.50	39.54	18.78	2.39	35.05	---	Peak
3	263.77	25.13	-20.87	46.00	38.74	18.06	3.07	34.74	---	Peak
4	480.08	36.69	-9.31	46.00	44.45	23.40	3.42	34.58	---	Peak
5	694.45	28.86	-17.14	46.00	32.04	27.30	3.73	34.21	---	Peak
6	796.30	33.97	-12.03	46.00	34.51	29.04	4.34	33.92	---	Peak
7	1504.00	44.07	-29.93	74.00	58.86	29.30	5.91	50.00	---	Peak
8	2400.00	67.47			77.41	33.33	7.17	50.44	---	Peak
9	5400.00	45.34	-28.66	74.00	49.01	36.04	9.55	49.26	---	Peak
10	7896.00	47.24	-26.76	74.00	48.75	37.24	11.35	50.10	---	Peak
11	10512.00	46.08	-27.92	74.00	41.54	39.50	13.43	48.39	---	Peak
12	13842.00	47.67	-26.33	74.00	39.86	40.80	14.49	47.48	---	Peak
13	15921.00	46.85	-27.15	74.00	40.10	42.52	15.57	51.34	---	Peak

Note:

- Level(dBuV/m) = Read Level(dBuV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBuV/m) - Limit Line(dBuV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	Apr. 09, 2024	Feb. 09, 2025 ~Feb. 10, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 09, 2024	Feb. 09, 2025 ~Feb. 10, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Jul. 08, 2024	Feb. 09, 2025 ~Feb. 10, 2025	Jul. 07, 2025	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz ~3000MHz	Apr. 09, 2024	Feb. 09, 2025 ~Feb. 10, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-2206	1GHz~18GHz	Apr. 09, 2024	Feb. 09, 2025 ~Feb. 10, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM01G18GA	060781	1GHz~18GHz	Apr. 09, 2024	Feb. 09, 2025 ~Feb. 10, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM18G40G	060778	18GHz~40GHz	Apr. 09, 2024	Feb. 09, 2025 ~Feb. 10, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	00983	15GHz~40GHz	Apr. 09, 2024	Feb. 09, 2025 ~Feb. 10, 2025	Apr. 08, 2025	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	Oct. 14, 2024	Feb. 09, 2025 ~Feb. 10, 2025	Oct. 13, 2025	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Feb. 09, 2025 ~Feb. 10, 2025	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Feb. 09, 2025 ~Feb. 10, 2025	NCR	Radiation (03CH05-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Feb. 24, 2025 ~Mar. 14 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Feb. 24, 2025 ~Mar. 14 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	61601000247 0	100Vac~250Vac	Dec.25, 2024	Feb. 24, 2025 ~Mar. 14 2025	Dec. 24, 2025	Conduction (CO02-SZ)
Thermo meter	Anymetre	JR593	#14	- 10°C ~ 50°C 10%RH~99%RH	Jul. 05, 2024	Feb. 24, 2025 ~Mar. 14 2025	Jul. 04, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required

5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.50dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.20dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.10dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.10dB
---	--------

----- THE END -----