


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 4
Power supply	DC3.87V	Tested By	LingYuMei
Test Date	2020-09-16	Sample No.	E20200904990101-0001

Polar.: Vertical

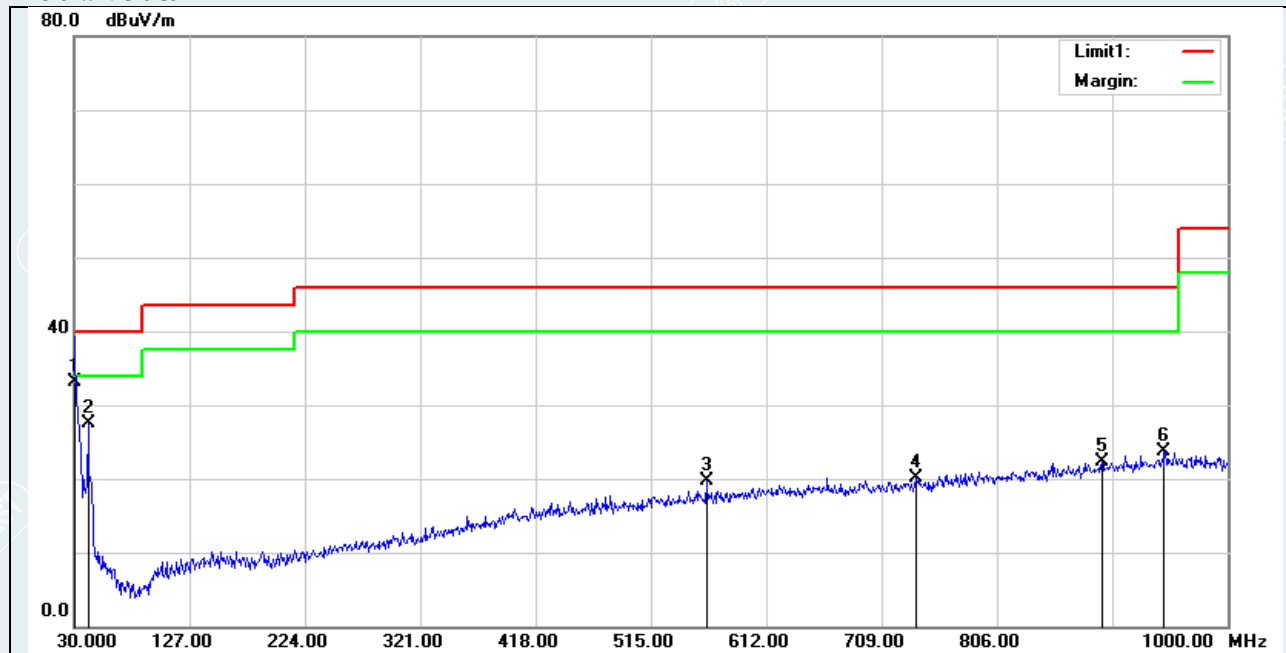


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	50.43	-17.31	33.12	40.00	-6.88	100	287	QP
2	41.6400	50.26	-22.76	27.50	40.00	-12.50	200	88	peak
3	561.5600	37.84	-18.19	19.65	46.00	-26.35	200	321	peak
4	738.1000	36.41	-16.36	20.05	46.00	-25.95	200	229	peak
5	894.2700	37.09	-14.76	22.33	46.00	-23.67	100	1	peak
6	946.6500	38.12	-14.40	23.72	46.00	-22.28	200	154	peak

Note: Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.

EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 4
Power supply	DC3.87V	Tested By	LingYuMei
Test Date	2020-09-16	Sample No.	E20200904990101-0001

Polar.: Horizontal

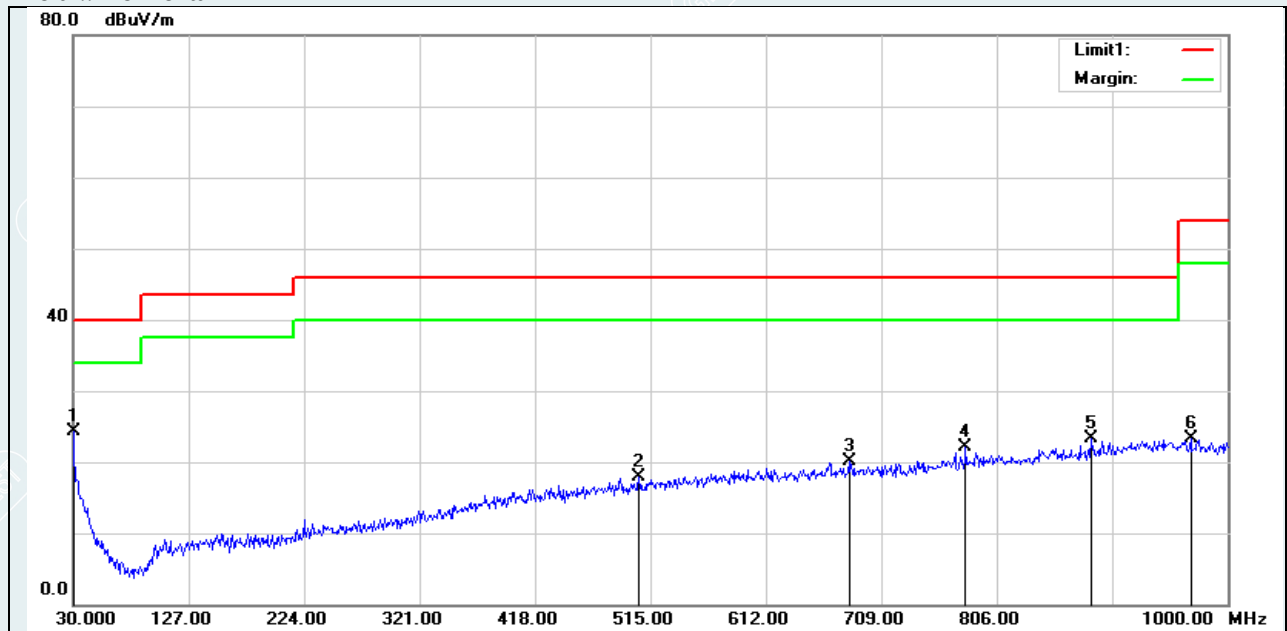


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	41.54	-17.31	24.23	40.00	-15.77	199	29	peak
2	505.3000	37.19	-19.21	17.98	46.00	-28.02	100	56	peak
3	681.8400	37.08	-16.95	20.13	46.00	-25.87	199	319	peak
4	779.8100	37.90	-15.77	22.13	46.00	-23.87	199	150	peak
5	885.5400	38.20	-14.83	23.37	46.00	-22.63	199	233	peak
6	968.9600	37.46	-14.25	23.21	54.00	-30.79	100	305	peak

Note: Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.

EUT Name	Watch	Model	W501GB
Environmental Conditions	23.7°C/45%RH/101.0kPa	Test Mode	Mode 4
Power supply	DC3.87V	Tested By	Tang Shenghui
Test Date	2021-03-14	Sample No.	E20200904990101-0015


Polar.: Vertical

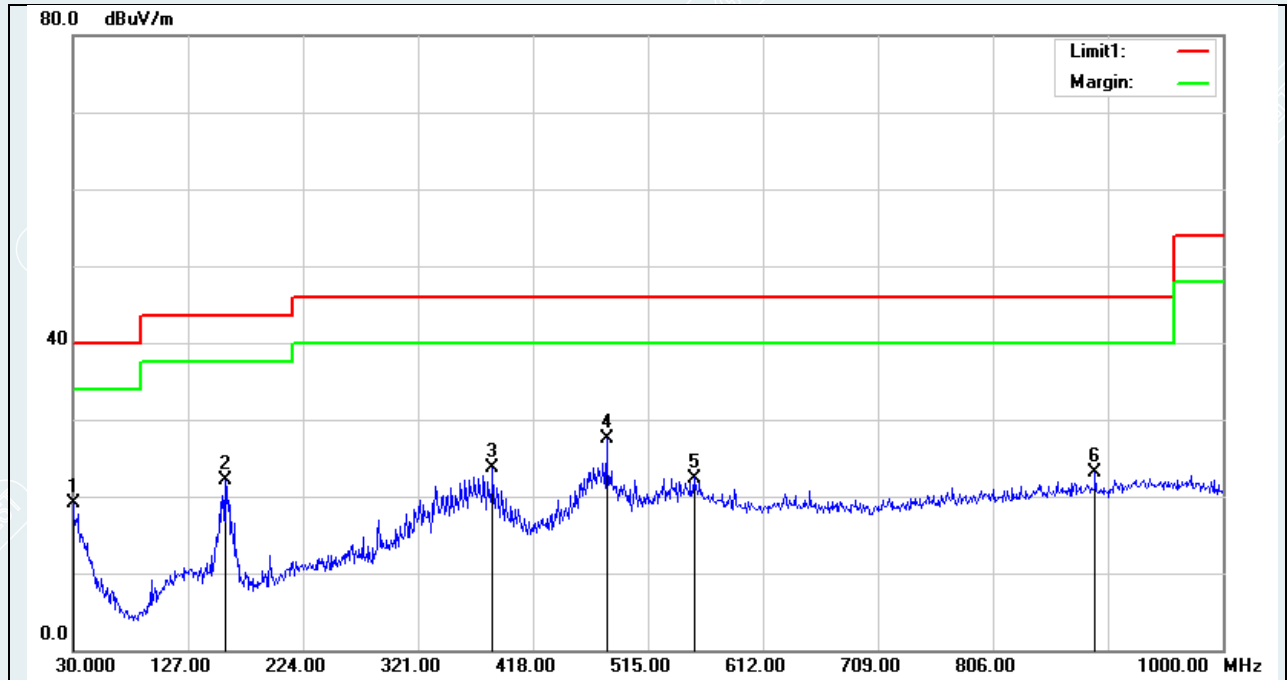

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1	30.0000	36.14	-16.96	19.18	40.00	-20.82	262	360	QP
2	158.0400	49.60	-27.55	22.05	43.50	-21.45	300	81	QP
3	384.0500	45.56	-21.87	23.69	46.00	-22.31	300	3	QP
4*	480.0800	47.22	-19.81	27.41	46.00	-18.59	200	235	QP
5	553.8000	40.08	-17.68	22.40	46.00	-23.60	100	175	QP
6	892.3300	38.08	-14.97	23.11	46.00	-22.89	397	0	QP

EUT Name	Watch	Model	W501GB
Environmental Conditions	23.7°C/45%RH/101.0kPa	Test Mode	Mode 4
Power supply	DC3.87V	Tested By	Tang Shenghui
Test Date	2021-03-14	Sample No.	E20200904990101-0015


Polar.: Horizontal

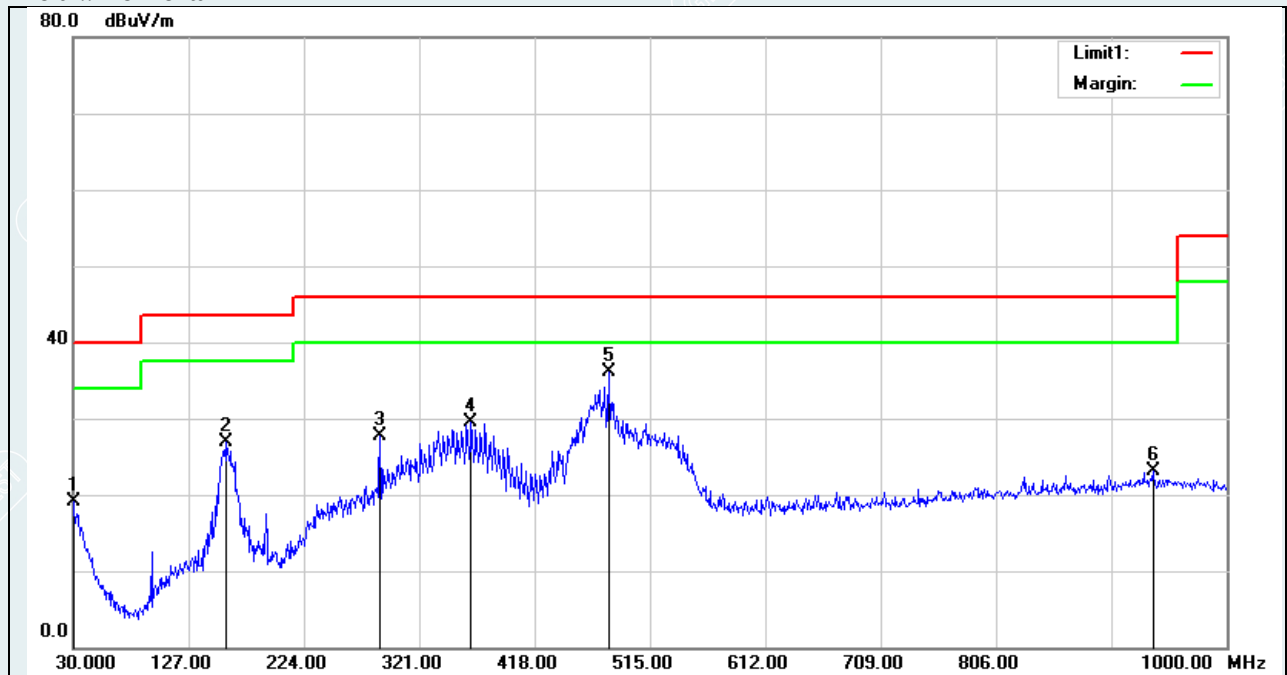

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1	30.0000	36.01	-16.96	19.05	40.00	-20.95	299	0	QP
2	158.0400	54.42	-27.55	26.87	43.50	-16.63	198	0	QP
3	288.0200	52.34	-24.62	27.72	46.00	-18.28	100	84	QP
4	364.6500	52.12	-22.55	29.57	46.00	-16.43	100	270	QP
5*	480.0800	56.00	-19.81	36.19	46.00	-9.81	199	112	QP
6	937.9200	37.65	-14.46	23.19	46.00	-22.81	100	77	QP

EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 5
Power supply	DC3.87V	Tested By	LingYuMei
Test Date	2020-09-16	Sample No.	E20200904990101-0001

Polar.: Vertical

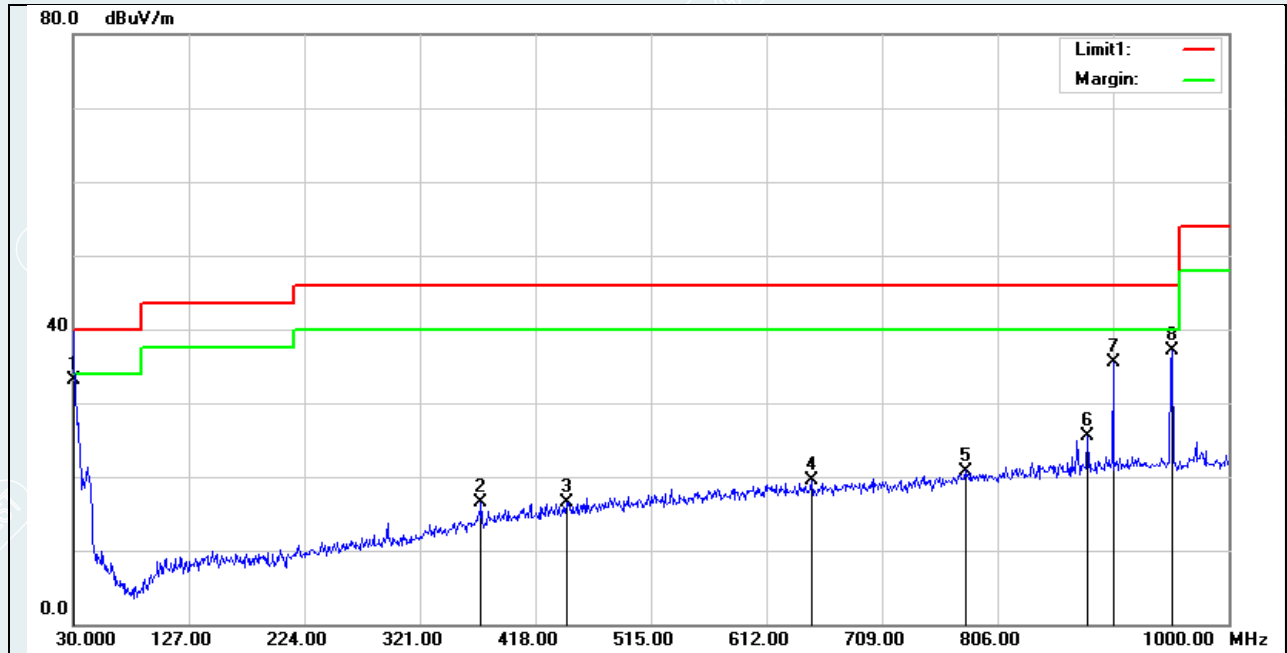


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	50.49	-17.31	33.18	40.00	-6.82	100	322	QP
2	372.4100	38.22	-21.78	16.44	46.00	-29.56	199	319	peak
3	444.1900	36.65	-20.15	16.50	46.00	-29.50	199	27	peak
4	649.8300	36.77	-17.19	19.58	46.00	-26.42	199	309	peak
5	778.8400	36.59	-15.79	20.80	46.00	-25.20	199	96	peak
6	881.6600	40.26	-14.85	25.41	46.00	-20.59	100	177	peak
7	903.0000	50.11	-14.70	35.41	46.00	-10.59	100	218	peak
8	952.4700	51.46	-14.36	37.10	46.00	-8.90	124	0	peak

Note: Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.

EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 5
Power supply	DC3.87V	Tested By	LingYuMei
Test Date	2020-09-16	Sample No.	E20200904990101-0001

Polar.: Horizontal

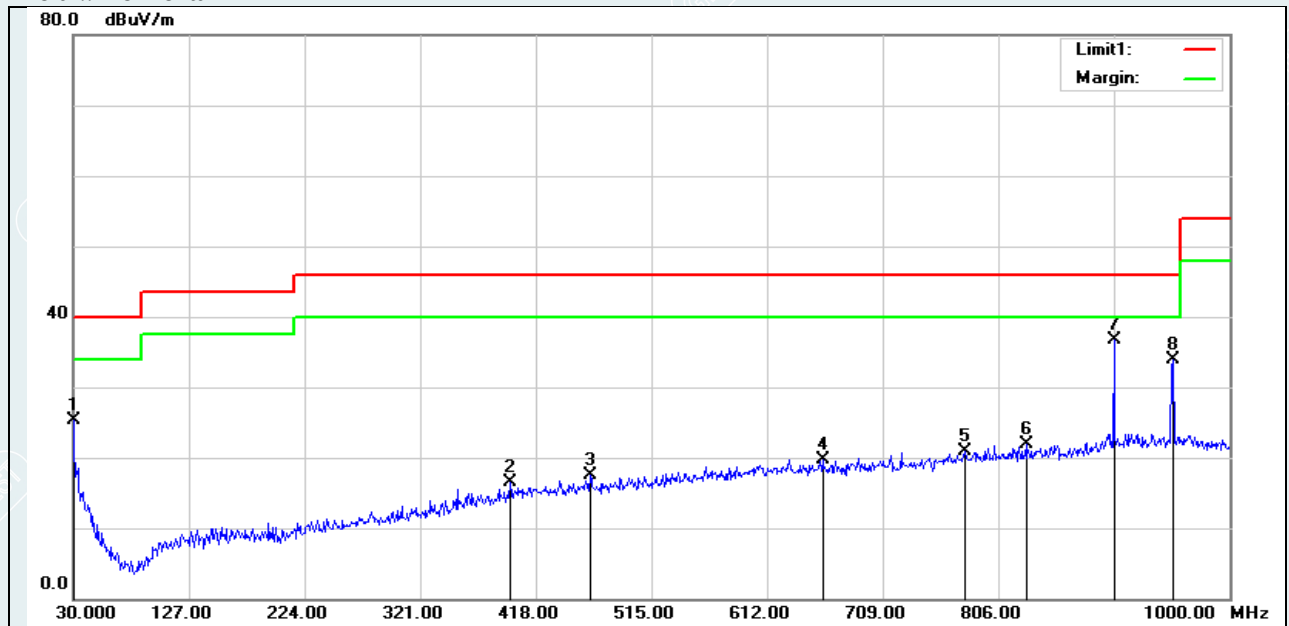


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1	30.0000	42.53	-17.31	25.22	40.00	-14.78	199	0	peak
2	396.6600	37.43	-20.92	16.51	46.00	-29.49	199	164	peak
3	463.5900	37.30	-19.85	17.45	46.00	-28.55	199	230	peak
4	658.5600	36.92	-17.12	19.80	46.00	-26.20	199	49	peak
5	777.8700	36.73	-15.81	20.92	46.00	-25.08	100	360	peak
6	829.2800	37.08	-15.24	21.84	46.00	-24.16	100	140	peak
7*	903.0000	51.39	-14.70	36.69	46.00	-9.31	199	312	peak
8	952.4700	48.23	-14.36	33.87	46.00	-12.13	199	254	peak

Note: Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.

EUT Name	Watch	Model	W501GB
Environmental Conditions	23.7°C/45%RH/101.0kPa	Test Mode	Mode 5
Power supply	DC3.87V	Tested By	Tang Shenghui
Test Date	2021-03-14	Sample No.	E20200904990101-0015


Polar.: Vertical

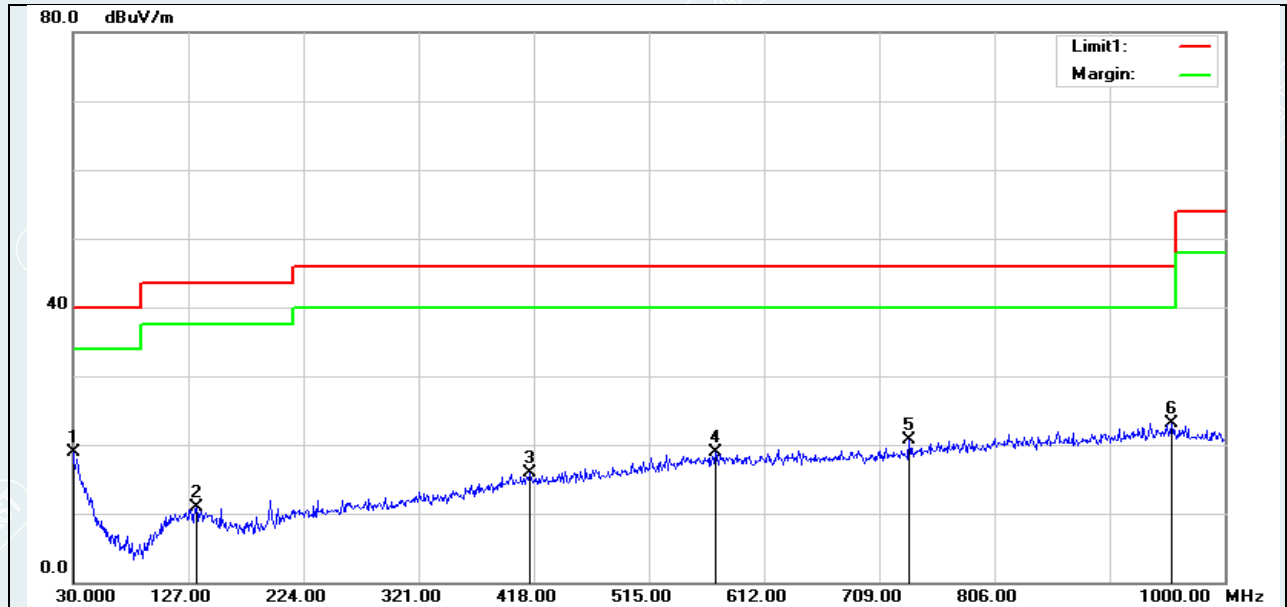

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	35.92	-16.96	18.96	40.00	-21.04	397	173	QP
2	133.7900	37.03	-26.12	10.91	43.50	-32.59	300	234	QP
3	414.1200	36.70	-20.73	15.97	46.00	-30.03	300	0	QP
4	571.2600	36.47	-17.64	18.83	46.00	-27.17	200	228	QP
5	734.2200	36.98	-16.34	20.64	46.00	-25.36	200	0	QP
6	955.3800	37.46	-14.28	23.18	46.00	-22.82	100	224	QP

EUT Name	Watch	Model	W501GB
Environmental Conditions	23.7°C/45%RH/101.0kPa	Test Mode	Mode 5
Power supply	DC3.87V	Tested By	Tang Shenghui
Test Date	2021-03-14	Sample No.	E20200904990101-0015


Polar.: Horizontal

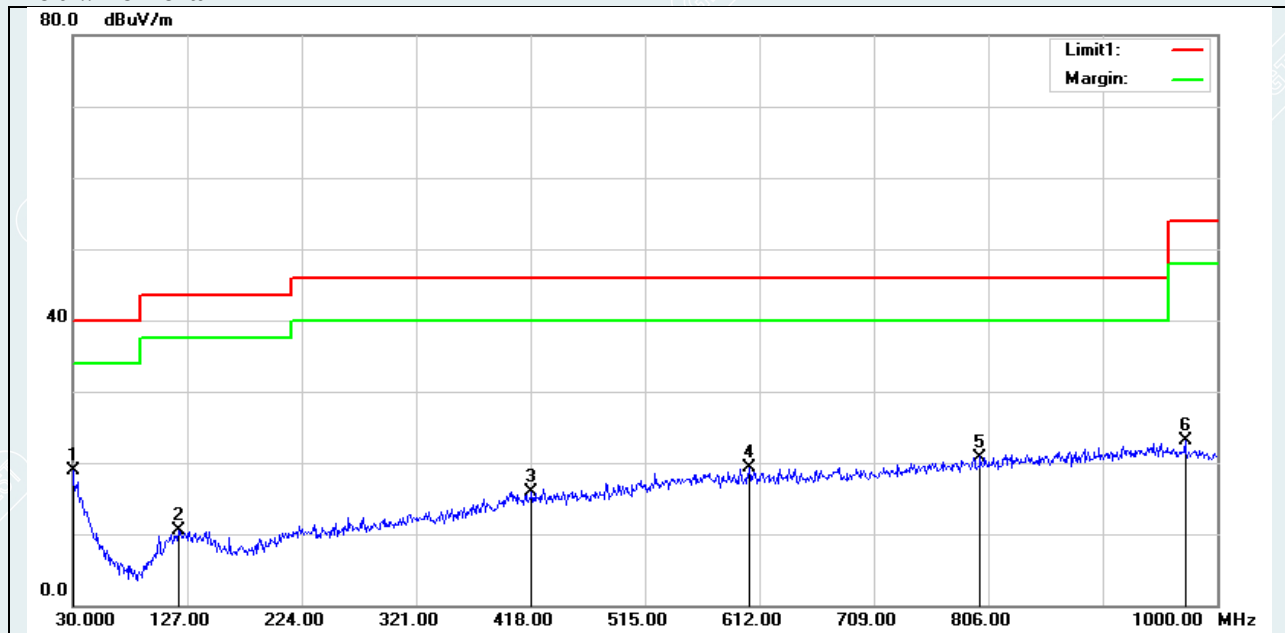

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	35.82	-16.96	18.86	40.00	-21.14	117	0	QP
2	119.2400	36.48	-26.07	10.41	43.50	-33.09	200	52	QP
3	418.9700	36.67	-20.70	15.97	46.00	-30.03	347	0	QP
4	603.2700	36.84	-17.57	19.27	46.00	-26.73	200	13	QP
5	799.2100	36.37	-15.57	20.80	46.00	-25.20	397	91	QP
6	972.8400	37.40	-14.23	23.17	54.00	-30.83	397	252	QP

EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 6
Power supply	DC3.87V	Tested By	LingYuMei
Test Date	2020-09-16	Sample No.	E20200904990101-0001

Polar.: Vertical

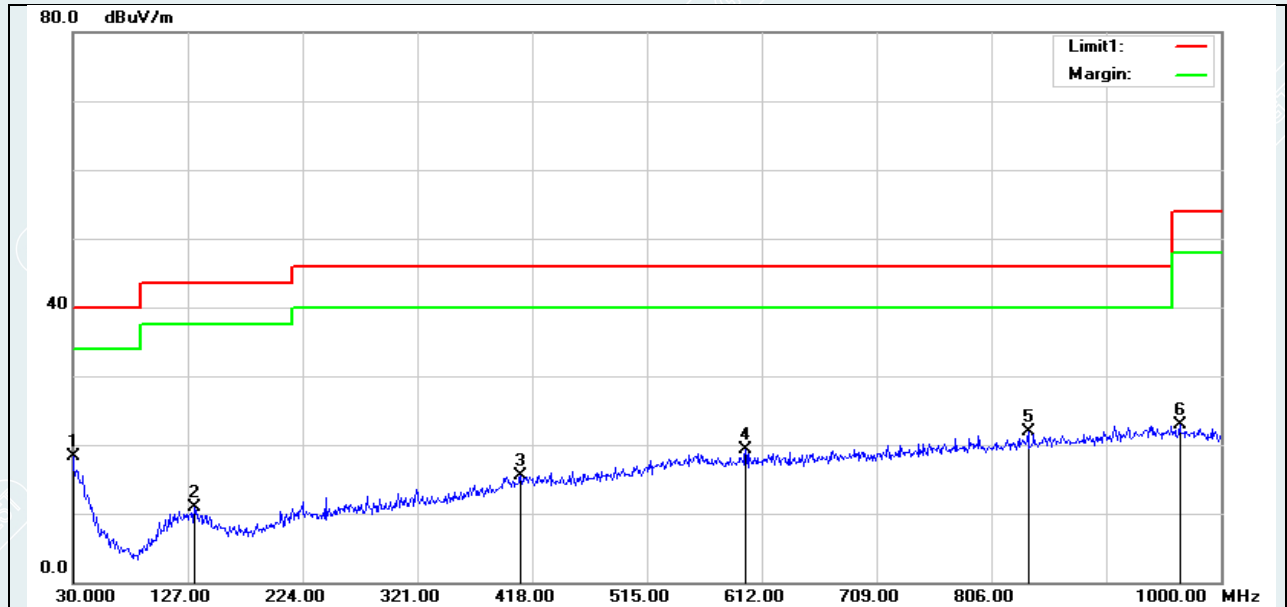


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	35.24	-16.96	18.28	40.00	-21.72	100	319	peak
2	132.8200	37.07	-26.09	10.98	43.50	-32.52	100	74	peak
3	408.3000	36.33	-20.77	15.56	46.00	-30.44	398	102	peak
4	598.4200	36.99	-17.60	19.39	46.00	-26.61	398	0	peak
5	837.0400	36.92	-15.10	21.82	46.00	-24.18	199	93	peak
6	965.0800	37.09	-14.26	22.83	54.00	-31.17	398	156	peak

Note: Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.

EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 6
Power supply	DC3.87V	Tested By	LingYuMei
Test Date	2020-09-16	Sample No.	E20200904990101-0001

Polar.: Horizontal

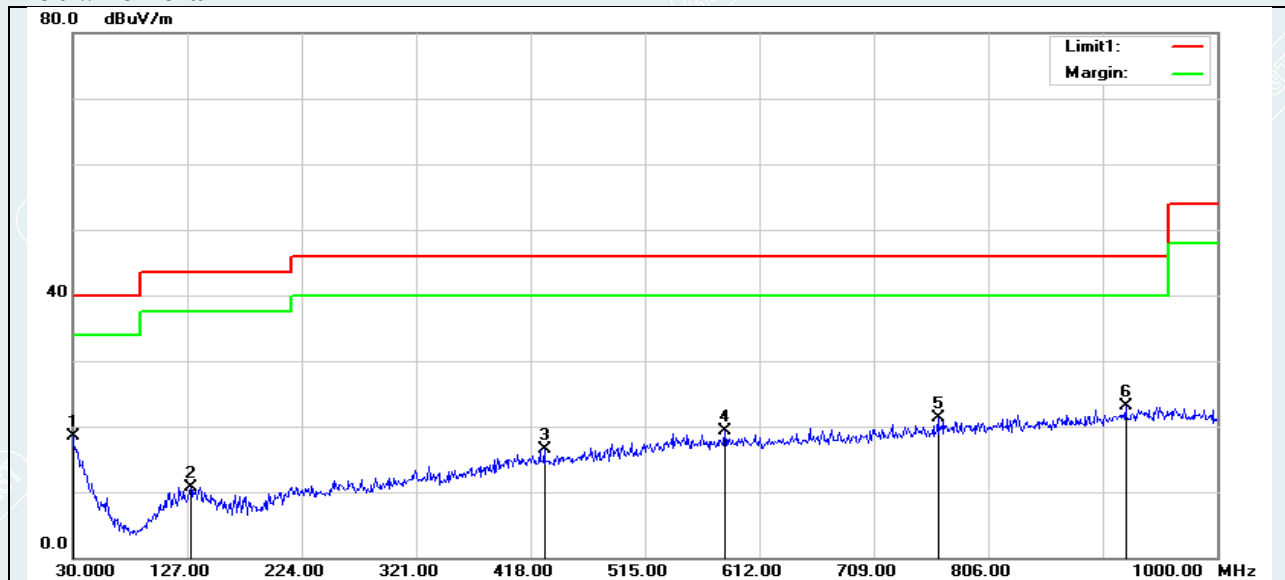


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	35.51	-16.96	18.55	40.00	-21.45	200	241	peak
2	129.9100	36.75	-25.99	10.76	43.50	-32.74	300	0	peak
3	429.6400	37.04	-20.62	16.42	46.00	-29.58	300	55	peak
4	582.9000	37.02	-17.63	19.39	46.00	-26.61	100	149	peak
5	763.3200	37.18	-15.94	21.24	46.00	-24.76	202	360	peak
6	922.4000	37.81	-14.67	23.14	46.00	-22.86	300	288	peak

Note: Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.

EUT Name	Watch	Model	W501GB
Environmental Conditions	23.7°C/45%RH/101.0kPa	Test Mode	Mode 6
Power supply	DC3.87V	Tested By	Tang Shenghui
Test Date	2021-03-14	Sample No.	E20200904990101-0015


Polar.: Vertical

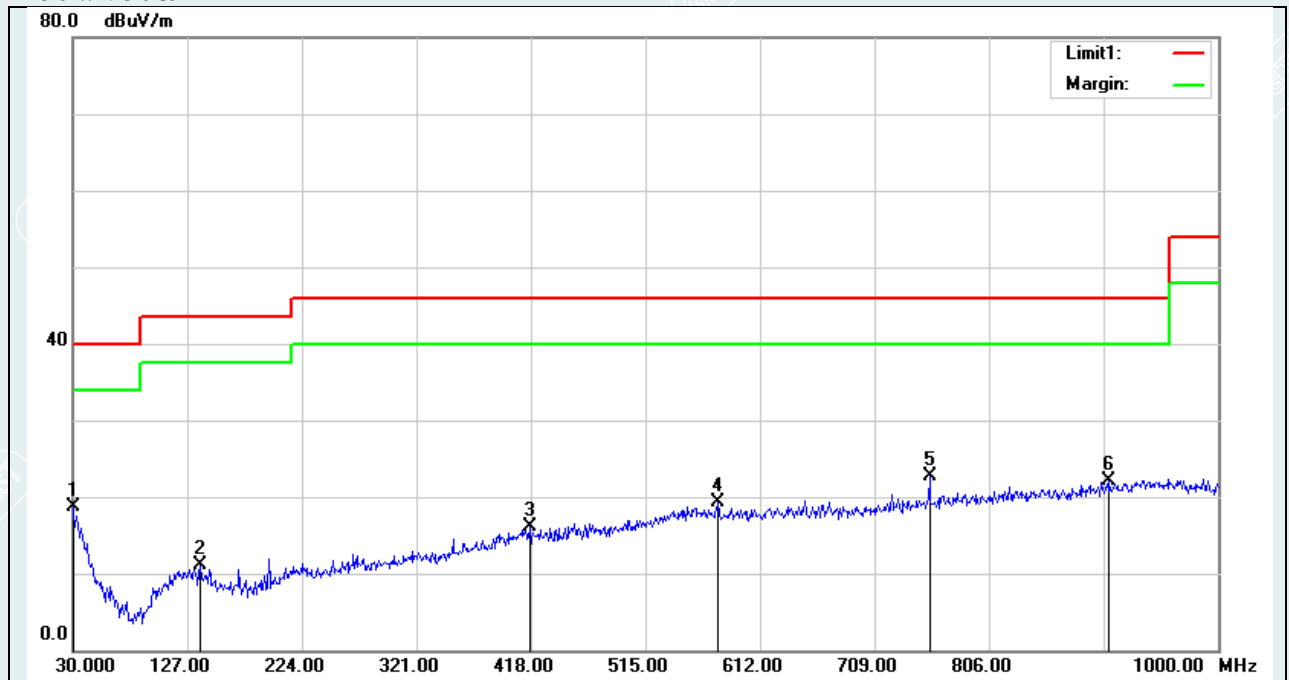

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	35.65	-16.96	18.69	40.00	-21.31	199	332	QP
2	137.6700	37.26	-26.23	11.03	43.50	-32.47	199	91	QP
3	417.0300	36.88	-20.71	16.17	46.00	-29.83	333	0	QP
4	576.1100	36.87	-17.64	19.23	46.00	-26.77	100	0	QP
5	755.5600	38.63	-16.02	22.61	46.00	-23.39	397	304	QP
6	907.8500	37.02	-14.87	22.15	46.00	-23.85	397	0	QP

EUT Name	Watch	Model	W501GB
Environmental Conditions	23.7°C/45%RH/101.0kPa	Test Mode	Mode 6
Power supply	DC3.87V	Tested By	Tang Shenghui
Test Date	2021-03-14	Sample No.	E20200904990101-0015


Polar.: Horizontal

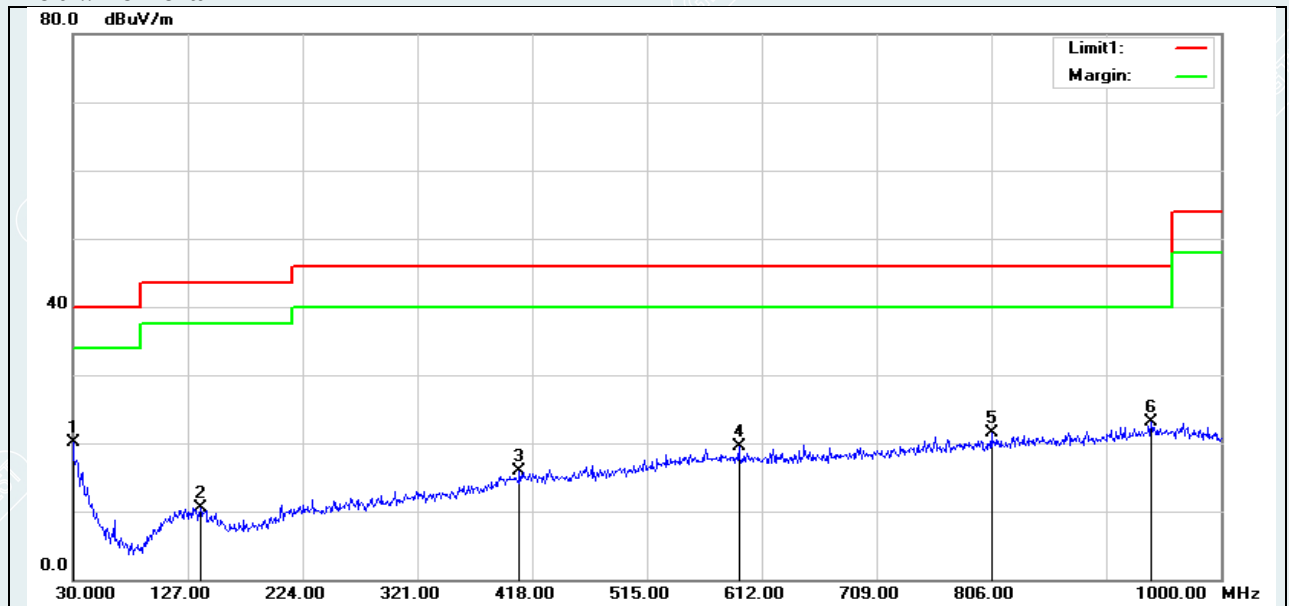

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	37.01	-16.96	20.05	40.00	-19.95	200	249	QP
2	137.6700	36.79	-26.23	10.56	43.50	-32.94	100	216	QP
3	407.3300	36.62	-20.77	15.85	46.00	-30.15	300	143	QP
4	592.6000	37.09	-17.60	19.49	46.00	-26.51	200	272	QP
5	806.0000	36.94	-15.50	21.44	46.00	-24.56	300	114	QP
6	940.8300	37.45	-14.42	23.03	46.00	-22.97	269	360	QP

Above 1G


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 1
Power supply	AC120V/60Hz	Tested By	LingYuMei
Test Date	2020-09-17	Sample No.	E20200904990101-0001

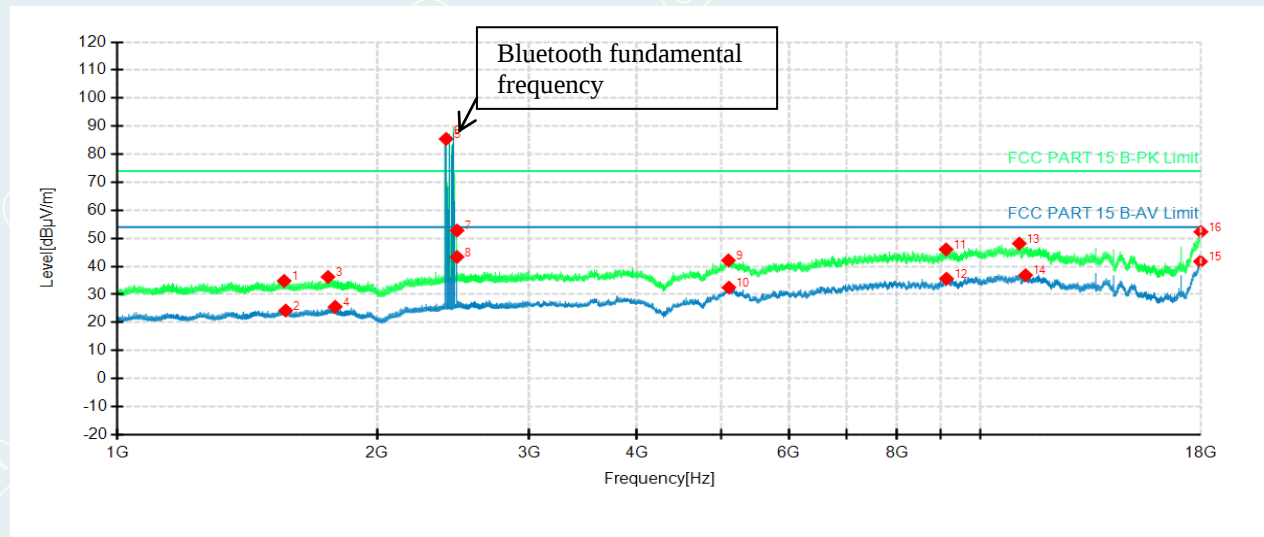

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1560.8000	57.70	34.83	-22.87	74.00	39.17	200	134	Vertical
2	1567.1000	47.13	24.27	-22.86	54.00	29.73	100	108	Vertical
3	1754.4000	57.94	36.24	-21.70	74.00	37.76	100	202	Vertical
4	1788.4000	47.03	25.61	-21.42	54.00	28.39	200	223	Vertical
5	2403.9000	105.09	85.46	-19.63	54.00	-31.46	200	290	Vertical
6	2403.9000	106.40	86.77	-19.63	74.00	-12.77	200	268	Vertical
7	2475.2000	71.96	52.80	-19.16	74.00	21.20	200	67	Vertical
8	2475.4000	62.52	43.37	-19.15	54.00	10.63	200	67	Vertical
9	5104.5000	50.11	42.14	-7.97	74.00	31.86	200	158	Vertical
10	5111.2500	40.49	32.47	-8.02	54.00	21.53	200	91	Vertical
11	9120.7500	44.79	46.05	1.26	74.00	27.95	200	248	Vertical
12	9130.5000	34.32	35.62	1.30	54.00	18.38	100	248	Vertical
13	11088.000	41.95	48.15	6.20	74.00	25.85	200	69	Vertical
14	11275.500	29.77	36.85	7.08	54.00	17.15	200	91	Vertical
15	17981.250	20.86	41.75	20.89	54.00	12.25	100	292	Vertical
16	18000.000	31.03	52.34	21.31	74.00	21.66	100	158	Vertical


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 1
Power supply	AC120V/60Hz	Tested By	LingYuMei
Test Date	2020-09-17	Sample No.	E20200904990101-0001

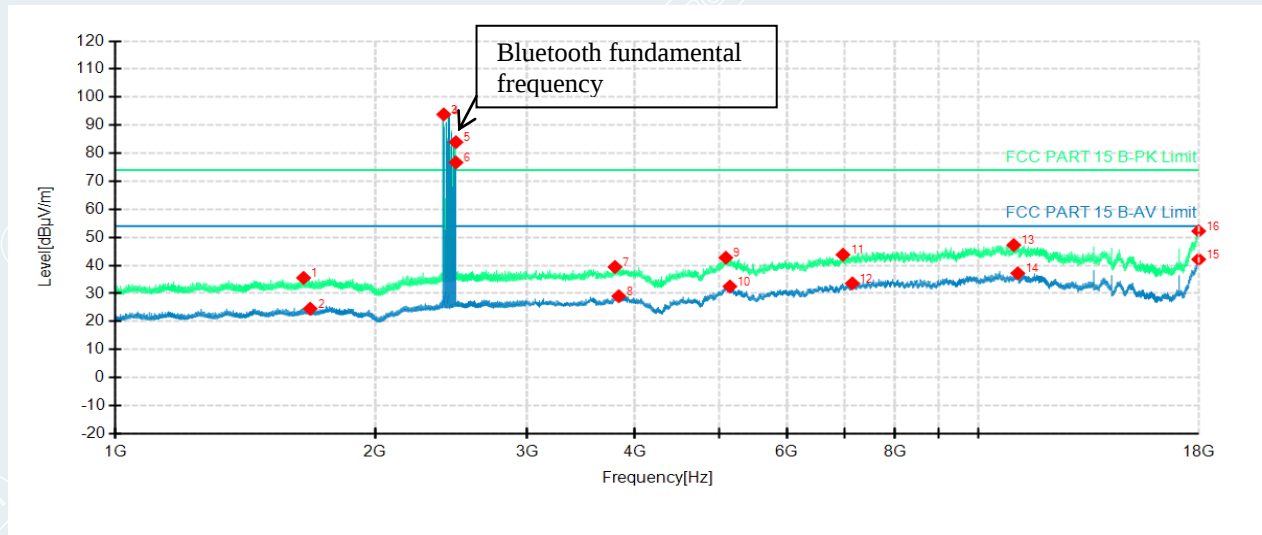

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1652.5000	58.02	35.55	-22.47	74.00	38.45	100	267	Horizontal
2	1681.9000	46.83	24.56	-22.27	54.00	29.44	100	177	Horizontal
3	2401.7000	113.51	93.86	-19.65	74.00	-19.86	100	177	Horizontal
4	2402.0000	113.01	93.36	-19.65	54.00	-39.36	100	177	Horizontal
5	2481.2000	103.06	83.94	-19.12	74.00	-9.94	200	154	Horizontal
6	2481.3000	95.82	76.70	-19.12	54.00	-22.70	200	176	Horizontal
7	3792.0000	52.89	39.46	-13.43	74.00	34.54	100	225	Horizontal
8	3831.0000	42.40	29.02	-13.38	54.00	24.98	200	181	Horizontal
9	5096.2500	50.71	42.74	-7.97	74.00	31.26	100	247	Horizontal
10	5152.5000	40.81	32.50	-8.31	54.00	21.50	100	136	Horizontal
11	6966.0000	47.74	43.80	-3.94	74.00	30.20	100	202	Horizontal
12	7142.2500	37.18	33.60	-3.58	54.00	20.40	100	114	Horizontal
13	10984.500	41.56	47.24	5.68	74.00	26.76	100	314	Horizontal
14	11103.000	30.94	37.21	6.27	54.00	16.79	100	136	Horizontal
15	17988.000	21.11	42.15	21.04	54.00	11.85	200	227	Horizontal
16	17988.750	31.16	52.22	21.06	74.00	21.78	100	225	Horizontal


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 1
Power supply	AC120V/60Hz	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

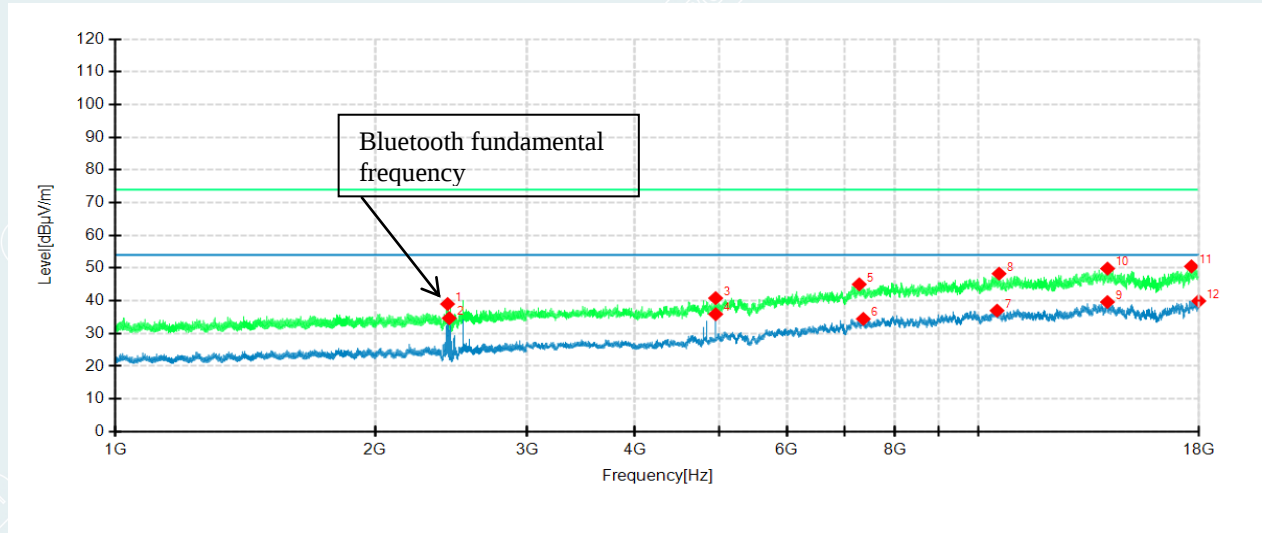

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2426.4000	59.45	39.01	-20.44	74.00	34.99	100	129	Vertical
2	2437.1000	55.08	34.68	-20.40	54.00	19.32	100	172	Vertical
3	4959.7500	51.73	40.82	-10.91	74.00	33.18	200	8	Vertical
4	4960.5000	46.80	35.89	-10.91	54.00	18.11	200	8	Vertical
5	7274.2500	50.41	45.02	-5.39	74.00	28.98	100	300	Vertical
6	7353.7500	39.41	34.47	-4.94	54.00	19.53	100	358	Vertical
7	10506.0000	35.50	37.00	1.50	54.00	17.00	100	135	Vertical
8	10563.0000	46.07	48.28	2.21	74.00	25.72	100	71	Vertical
9	14103.0000	31.68	39.62	7.94	54.00	14.38	100	96	Vertical
10	14106.0000	41.98	49.83	7.85	74.00	24.17	100	358	Vertical
11	17643.7500	40.35	50.51	10.16	74.00	23.49	200	303	Vertical
12	17991.7500	30.30	39.94	9.64	54.00	14.06	100	225	Vertical


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 1
Power supply	AC120V/60Hz	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

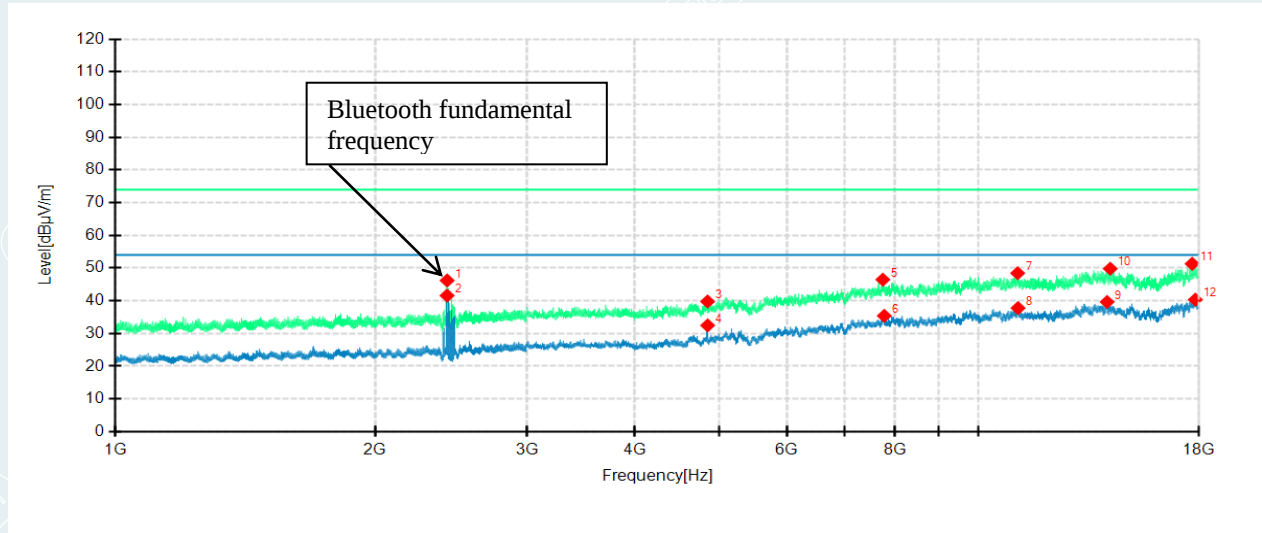

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2423.2000	66.67	46.21	-20.46	74.00	27.79	100	178	Horizontal
2	2423.3000	62.05	41.59	-20.46	54.00	12.41	100	194	Horizontal
3	4854.0000	50.36	39.78	-10.58	74.00	34.22	200	200	Horizontal
4	4854.7500	43.06	32.48	-10.58	54.00	21.52	200	200	Horizontal
5	7746.7500	49.77	46.46	-3.31	74.00	27.54	100	1	Horizontal
6	7776.0000	38.62	35.41	-3.21	54.00	18.59	200	250	Horizontal
7	11098.5000	44.75	48.43	3.68	74.00	25.57	200	250	Horizontal
8	11110.5000	34.08	37.77	3.69	54.00	16.23	100	161	Horizontal
9	14090.2500	31.85	39.64	7.79	54.00	14.36	200	84	Horizontal
10	14208.7500	41.91	49.81	7.90	74.00	24.19	200	175	Horizontal
11	17679.0000	41.23	51.31	10.08	74.00	22.69	100	34	Horizontal
12	17828.2500	30.27	40.35	10.08	54.00	13.65	200	354	Horizontal


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 2
Power supply	AC120V/60Hz	Tested By	LingYuMei
Test Date	2020-09-17	Sample No.	E20200904990101-0001

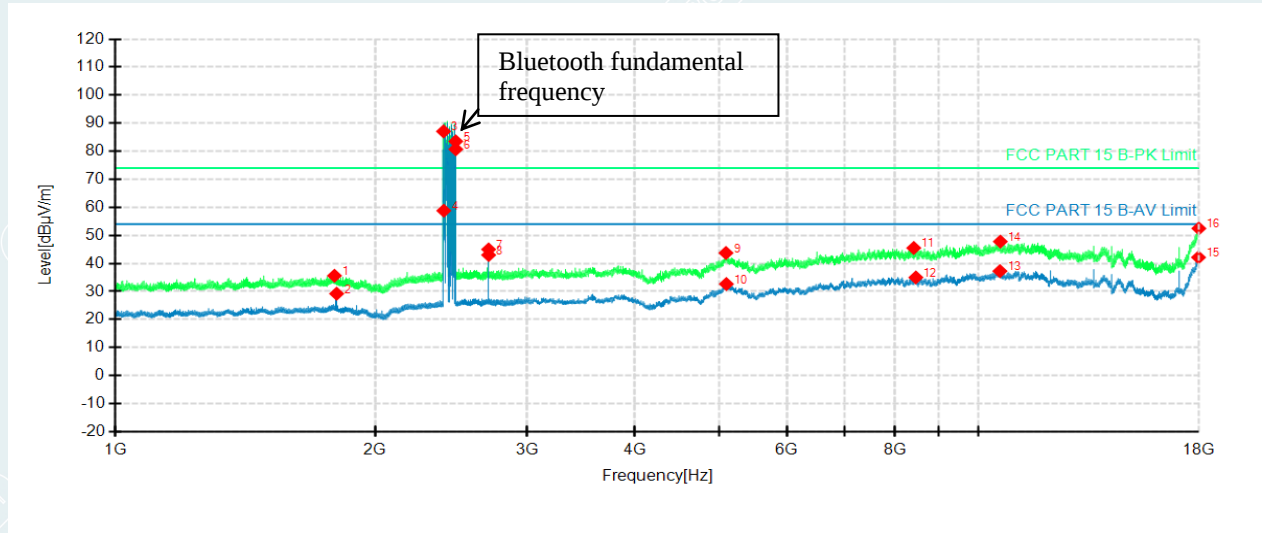

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1794.5000	56.97	35.60	-21.37	74.00	38.40	200	291	Vertical
2	1804.8000	50.53	29.20	-21.33	54.00	24.80	100	67	Vertical
3	2400.4000	106.74	87.08	-19.66	74.00	-13.08	200	23	Vertical
4	2402.1000	78.45	58.80	-19.65	54.00	-4.80	100	89	Vertical
5	2479.9000	102.64	83.52	-19.12	74.00	-9.52	100	179	Vertical
6	2480.1000	99.82	80.70	-19.12	54.00	-26.70	100	179	Vertical
7	2707.0000	63.45	45.00	-18.45	74.00	29.00	100	111	Vertical
8	2707.2000	61.44	42.99	-18.45	54.00	11.01	100	246	Vertical
9	5097.7500	51.67	43.71	-7.96	74.00	30.29	200	47	Vertical
10	5103.7500	40.61	32.64	-7.97	54.00	21.36	100	136	Vertical
11	8412.7500	46.31	45.50	-0.81	74.00	28.50	200	91	Vertical
12	8460.0000	35.75	34.99	-0.76	54.00	19.01	100	247	Vertical
13	10586.250	32.26	37.24	4.98	54.00	16.76	100	114	Vertical
14	10598.250	42.72	47.78	5.06	74.00	26.22	100	180	Vertical
15	17981.250	21.25	42.14	20.89	54.00	11.86	100	247	Vertical
16	17995.500	31.26	52.47	21.21	74.00	21.53	200	47	Vertical


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 2
Power supply	AC120V/60Hz	Tested By	LingYuMei
Test Date	2020-09-17	Sample No.	E20200904990101-0001

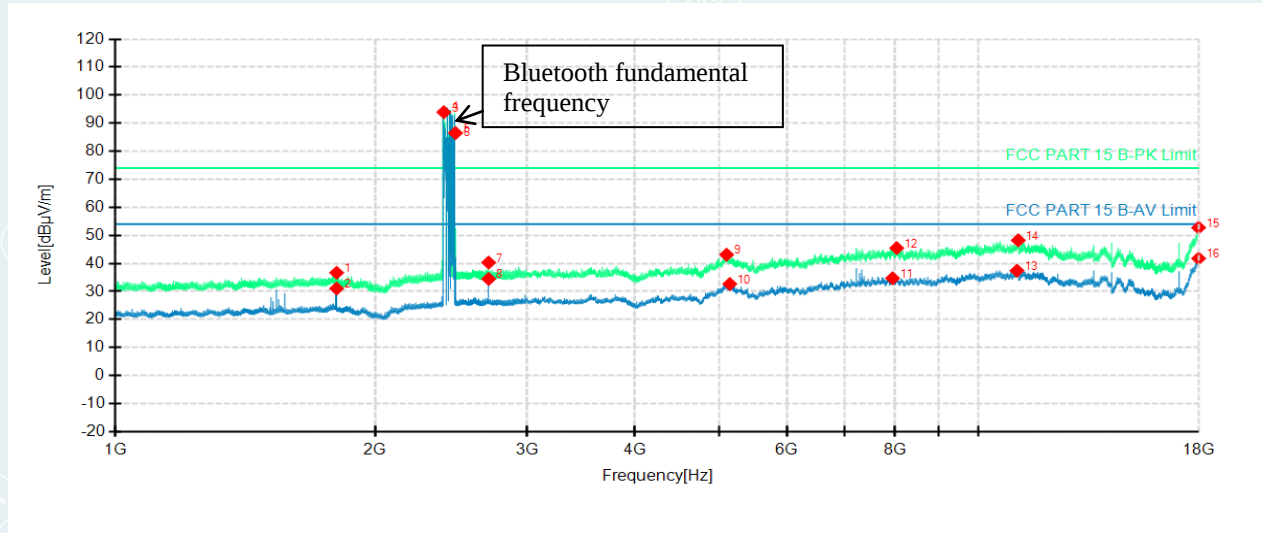

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1804.8000	57.99	36.66	-21.33	74.00	37.34	100	108	Horizontal
2	1804.8000	52.36	31.03	-21.33	54.00	22.97	100	265	Horizontal
3	2402.2000	113.58	93.93	-19.65	54.00	-39.93	100	18	Horizontal
4	2402.4000	113.99	94.35	-19.64	74.00	-20.35	100	18	Horizontal
5	2478.2000	105.64	86.50	-19.14	74.00	-12.50	200	1	Horizontal
6	2478.4000	104.38	85.25	-19.13	54.00	-31.25	200	1	Horizontal
7	2707.1000	58.75	40.30	-18.45	74.00	33.70	200	157	Horizontal
8	2707.3000	52.91	34.46	-18.45	54.00	19.54	200	45	Horizontal
9	5106.7500	51.09	43.10	-7.99	74.00	30.90	200	157	Horizontal
10	5151.0000	40.96	32.66	-8.30	54.00	21.34	100	158	Horizontal
11	7951.5000	36.19	34.70	-1.49	54.00	19.30	100	359	Horizontal
12	8039.2500	46.52	45.45	-1.07	74.00	28.55	200	90	Horizontal
13	11078.250	31.27	37.41	6.14	54.00	16.59	100	270	Horizontal
14	11116.500	41.95	48.23	6.28	74.00	25.77	100	158	Horizontal
15	17984.250	31.80	52.75	20.95	74.00	21.25	100	69	Horizontal
16	17985.000	20.79	41.76	20.97	54.00	12.24	100	114	Horizontal


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 2
Power supply	AC120V/60Hz	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

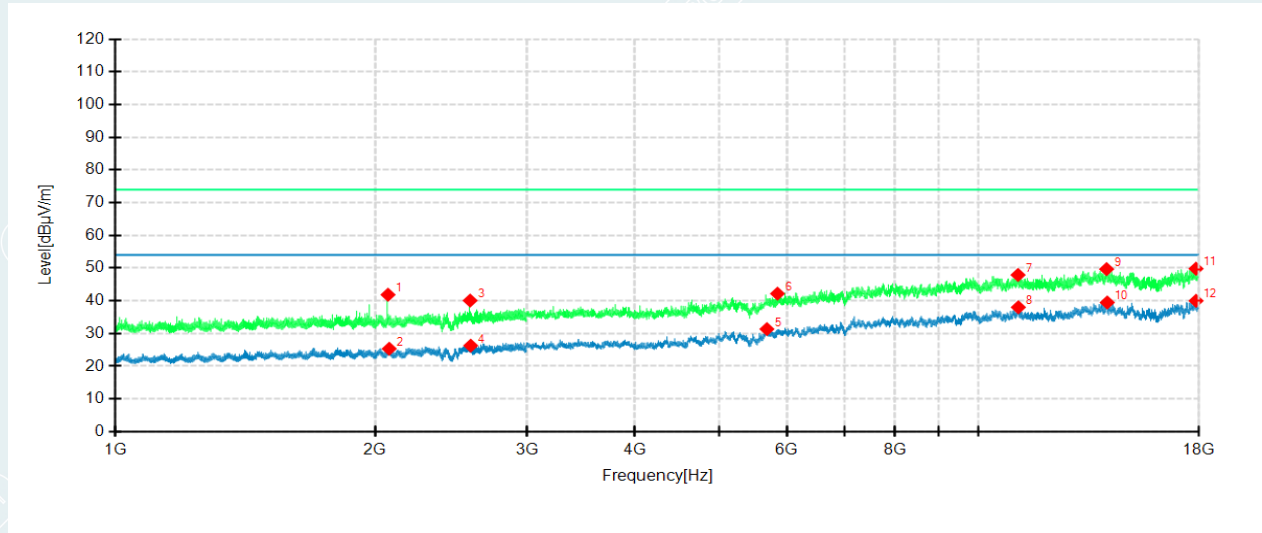

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2070.0000	63.42	41.85	-21.57	74.00	32.15	100	329	Vertical
2	2076.8000	46.91	25.34	-21.57	54.00	28.66	200	96	Vertical
3	2576.7000	59.93	40.07	-19.86	74.00	33.93	100	16	Vertical
4	2580.8000	46.20	26.29	-19.91	54.00	27.71	200	174	Vertical
5	5686.5000	40.60	31.36	-9.24	54.00	22.64	100	212	Vertical
6	5849.2500	51.00	42.18	-8.82	74.00	31.82	100	225	Vertical
7	11110.5000	44.21	47.90	3.69	74.00	26.10	100	119	Vertical
8	11118.7500	34.32	38.01	3.69	54.00	15.99	200	319	Vertical
9	14070.7500	42.37	49.67	7.30	74.00	24.33	200	123	Vertical
10	14094.7500	31.57	39.47	7.90	54.00	14.53	200	18	Vertical
11	17859.7500	39.72	49.80	10.08	74.00	24.20	200	1	Vertical
12	17863.5000	29.93	40.00	10.07	54.00	14.00	200	332	Vertical


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 2
Power supply	AC120V/60Hz	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

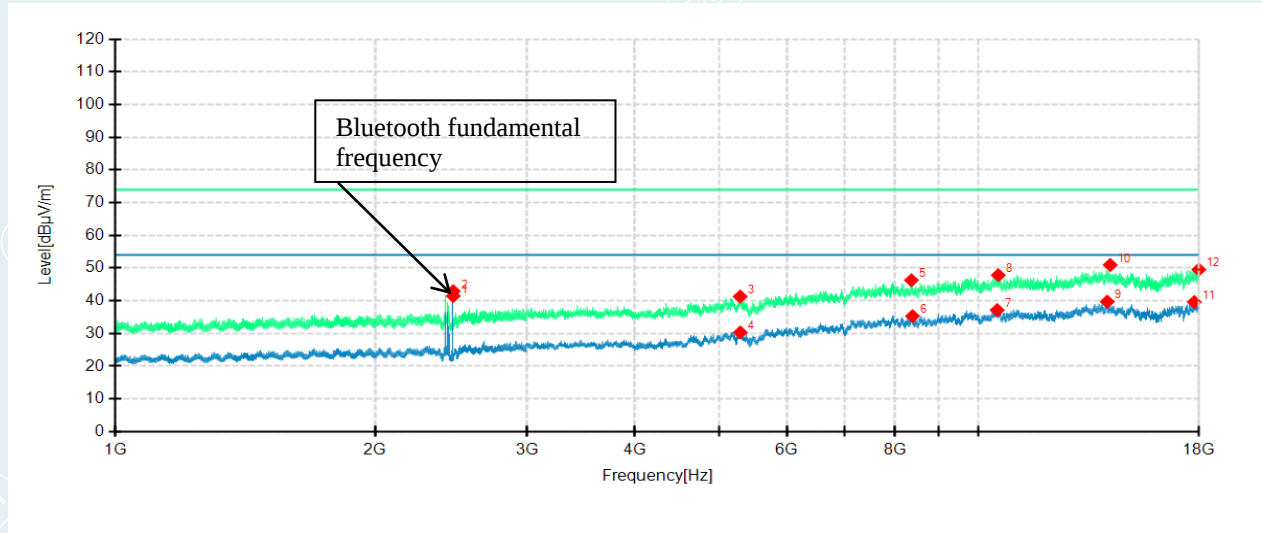

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2463.0000	61.83	41.47	-20.36	54.00	12.53	100	10	Horizontal
2	2463.1000	63.31	42.95	-20.36	74.00	31.05	100	10	Horizontal
3	5295.0000	51.88	41.30	-10.58	74.00	32.70	200	344	Horizontal
4	5296.5000	40.86	30.33	-10.53	54.00	23.67	200	71	Horizontal
5	8361.0000	49.45	46.28	-3.17	74.00	27.72	100	97	Horizontal
6	8385.7500	38.20	35.33	-2.87	54.00	18.67	100	353	Horizontal
7	10510.5000	35.59	37.16	1.57	54.00	16.84	200	306	Horizontal
8	10540.5000	45.79	47.82	2.03	74.00	26.18	200	188	Horizontal
9	14096.2500	31.81	39.75	7.94	54.00	14.25	200	1	Horizontal
10	14207.2500	43.03	50.97	7.94	74.00	23.03	100	174	Horizontal
11	17780.2500	29.84	39.61	9.77	54.00	14.39	200	319	Horizontal
12	17994.7500	39.86	49.54	9.68	74.00	24.46	200	137	Horizontal


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 3
Power supply	AC120V/60Hz	Tested By	LingYuMei
Test Date	2020-09-17	Sample No.	E20200904990101-0001

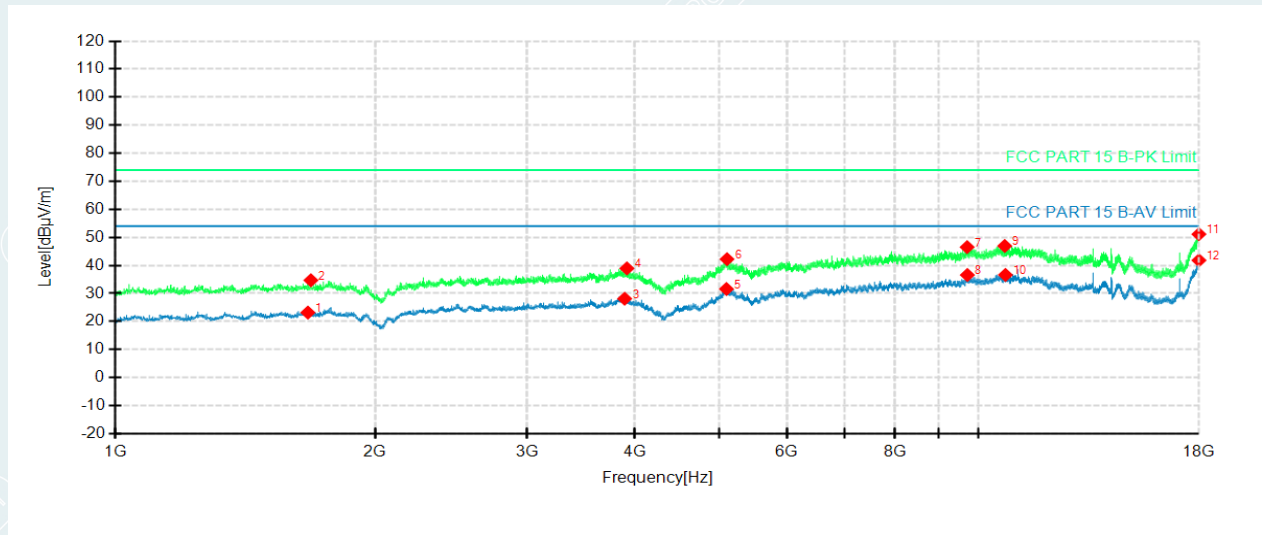

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1671.5000	45.52	23.18	-22.34	54.00	30.82	100	98	Vertical
2	1685.1000	56.94	34.69	-22.25	74.00	39.31	100	335	Vertical
3	3890.8500	42.26	28.13	-14.13	54.00	25.87	200	137	Vertical
4	3913.8000	53.07	38.93	-14.14	74.00	35.07	200	272	Vertical
5	5104.6500	40.09	31.58	-8.51	54.00	22.42	100	98	Vertical
6	5112.3000	50.81	42.23	-8.58	74.00	31.77	100	260	Vertical
7	9699.7500	44.16	46.51	2.35	74.00	27.49	200	250	Vertical
8	9704.8500	34.24	36.58	2.34	54.00	17.42	200	92	Vertical
9	10724.000	41.96	46.92	4.96	74.00	27.08	200	70	Vertical
10	10743.550	31.52	36.60	5.08	54.00	17.40	200	205	Vertical
11	17999.150	30.16	51.12	20.96	74.00	22.88	200	250	Vertical
12	18000.000	20.84	41.82	20.98	54.00	12.18	200	205	Vertical


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 3
Power supply	AC120V/60Hz	Tested By	LingYuMei
Test Date	2020-09-17	Sample No.	E20200904990101-0001

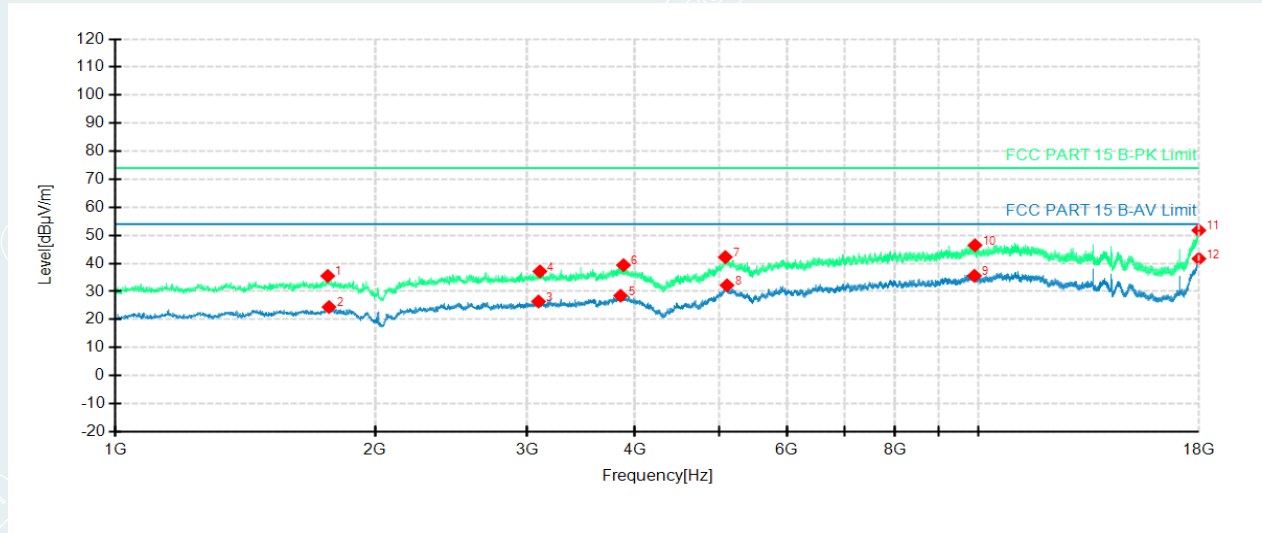

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1762.4500	57.14	35.51	-21.63	74.00	38.49	200	252	Horizontal
2	1768.4000	46.02	24.44	-21.58	54.00	29.56	200	360	Horizontal
3	3092.7000	43.88	26.40	-17.48	54.00	27.60	100	288	Horizontal
4	3103.7500	54.57	37.15	-17.42	74.00	36.85	100	84	Horizontal
5	3849.2000	42.70	28.49	-14.21	54.00	25.51	200	360	Horizontal
6	3878.9500	53.52	39.37	-14.15	74.00	34.63	200	322	Horizontal
7	5089.3500	50.88	42.25	-8.63	74.00	31.75	100	107	Horizontal
8	5112.3000	40.75	32.17	-8.58	54.00	21.83	200	230	Horizontal
9	9891.0000	33.29	35.58	2.29	54.00	18.42	200	71	Horizontal
10	9905.4500	44.16	46.47	2.31	74.00	27.53	100	222	Horizontal
11	17995.750	30.91	51.77	20.86	74.00	22.23	100	333	Horizontal
12	17999.150	20.71	41.67	20.96	54.00	12.33	200	184	Horizontal


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 3
Power supply	AC120V/60Hz	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

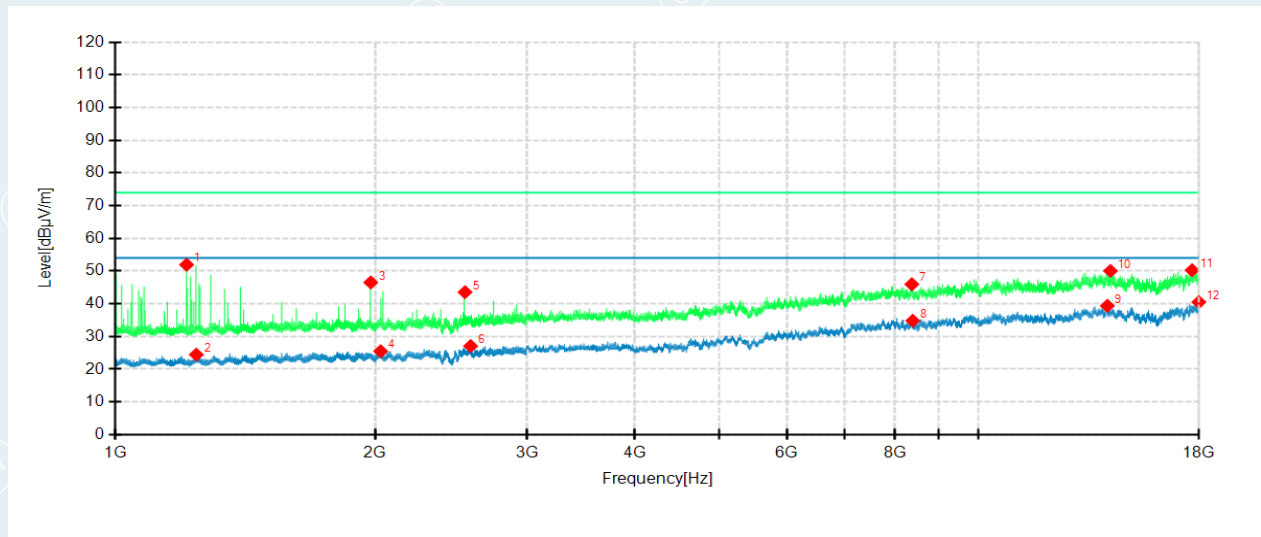

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1209.6000	76.49	51.95	-24.54	74.00	22.05	100	317	Vertical
2	1241.3000	48.78	24.46	-24.32	54.00	29.54	200	40	Vertical
3	1976.8000	68.25	46.51	-21.74	74.00	27.49	100	305	Vertical
4	2030.0000	47.05	25.50	-21.55	54.00	28.50	100	235	Vertical
5	2541.8000	63.24	43.55	-19.69	74.00	30.45	100	317	Vertical
6	2580.2000	46.96	27.06	-19.90	54.00	26.94	200	198	Vertical
7	8370.0000	49.02	45.96	-3.06	74.00	28.04	200	341	Vertical
8	8390.2500	37.63	34.82	-2.81	54.00	19.18	100	70	Vertical
9	14098.5000	31.38	39.37	7.99	54.00	14.63	100	213	Vertical
10	14216.2500	42.33	50.05	7.72	74.00	23.95	100	173	Vertical
11	17673.0000	40.17	50.26	10.09	74.00	23.74	200	159	Vertical
12	17995.5000	30.82	40.51	9.69	54.00	13.49	100	136	Vertical


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 3
Power supply	AC120V/60Hz	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

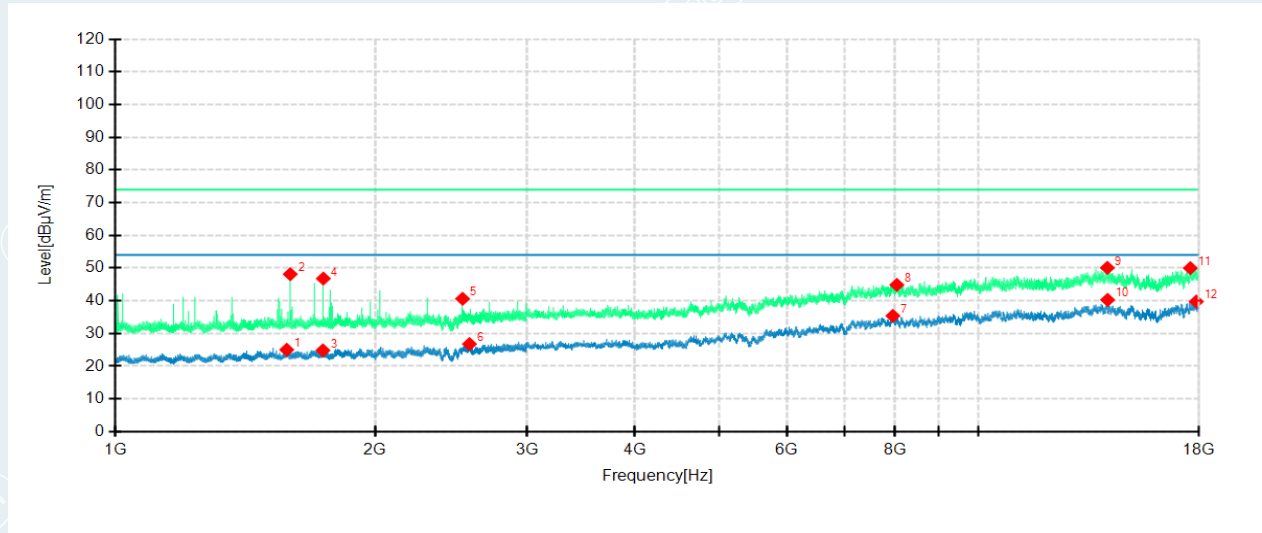

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1579.9000	48.08	25.02	-23.06	54.00	28.98	100	353	Horizontal
2	1594.9000	71.20	48.13	-23.07	74.00	25.87	200	128	Horizontal
3	1739.9000	47.38	24.85	-22.53	54.00	29.15	100	275	Horizontal
4	1742.0000	69.33	46.80	-22.53	74.00	27.20	100	117	Horizontal
5	2525.4000	60.58	40.62	-19.96	74.00	33.38	100	117	Horizontal
6	2572.0000	46.58	26.77	-19.81	54.00	27.23	100	80	Horizontal
7	7957.5000	38.69	35.39	-3.30	54.00	18.61	200	343	Horizontal
8	8041.5000	48.02	44.87	-3.15	74.00	29.13	200	241	Horizontal
9	14098.5000	42.09	50.08	7.99	74.00	23.92	100	304	Horizontal
10	14108.2500	32.51	40.29	7.78	54.00	13.71	200	138	Horizontal
11	17591.2500	39.81	49.99	10.18	74.00	24.01	200	73	Horizontal
12	17876.2500	29.76	39.78	10.02	54.00	14.22	200	279	Horizontal


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 4
Power supply	DC3.87V	Tested By	LingYuMei
Test Date	2020-09-17	Sample No.	E20200904990101-0001

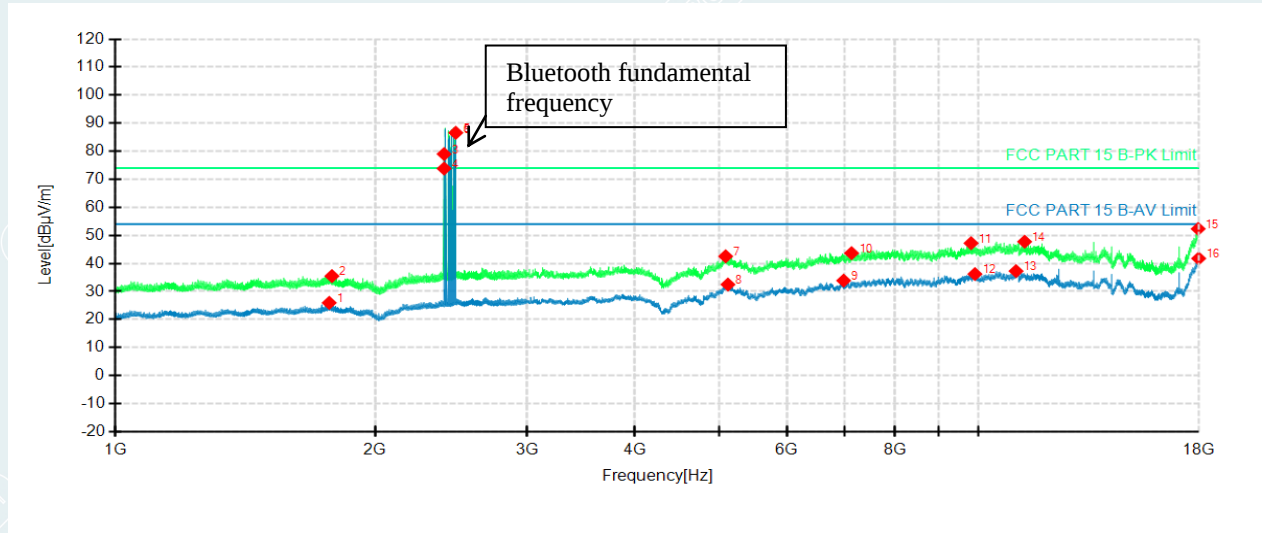

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1769.5000	47.50	25.93	-21.57	54.00	28.07	200	134	Vertical
2	1782.2000	56.94	35.47	-21.47	74.00	38.53	100	0	Vertical
3	2403.9000	98.62	78.99	-19.63	74.00	-4.99	200	268	Vertical
4	2404.0000	93.46	73.83	-19.63	54.00	-19.83	200	291	Vertical
5	2479.8000	105.71	86.58	-19.13	74.00	-12.58	200	223	Vertical
6	2480.2000	105.22	86.10	-19.12	54.00	-32.10	200	246	Vertical
7	5093.2500	50.52	42.53	-7.99	74.00	31.47	200	92	Vertical
8	5125.5000	40.59	32.47	-8.12	54.00	21.53	200	70	Vertical
9	6978.0000	37.55	33.87	-3.68	54.00	20.13	100	180	Vertical
10	7127.2500	47.45	43.65	-3.80	74.00	30.35	200	3	Vertical
11	9803.2500	44.58	47.20	2.62	74.00	26.80	100	314	Vertical
12	9903.7500	33.43	36.21	2.78	54.00	17.79	200	203	Vertical
13	11051.250	31.28	37.25	5.97	54.00	16.75	200	203	Vertical
14	11307.750	40.50	47.74	7.24	74.00	26.26	100	269	Vertical
15	17964.750	31.81	52.32	20.51	74.00	21.68	100	202	Vertical
16	17988.750	20.71	41.77	21.06	54.00	12.23	100	47	Vertical


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 4
Power supply	DC3.87V	Tested By	LingYuMei
Test Date	2020-09-17	Sample No.	E20200904990101-0001

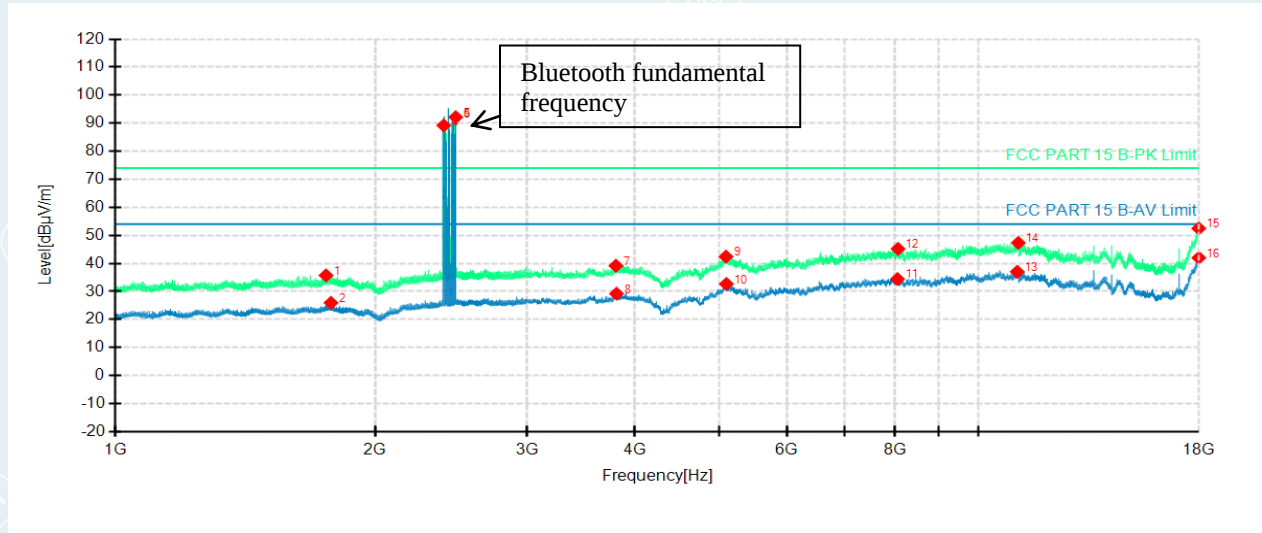

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1754.5000	57.41	35.71	-21.70	74.00	38.29	200	198	Horizontal
2	1777.9000	47.43	25.93	-21.50	54.00	28.07	200	264	Horizontal
3	2401.7000	108.84	89.19	-19.65	74.00	-15.19	100	62	Horizontal
4	2402.1000	108.23	88.58	-19.65	54.00	-34.58	100	88	Horizontal
5	2479.7000	111.28	92.15	-19.13	74.00	-18.15	100	245	Horizontal
6	2480.1000	110.71	91.59	-19.12	54.00	-37.59	100	245	Horizontal
7	3801.0000	52.44	39.15	-13.29	74.00	34.85	200	269	Horizontal
8	3807.7500	42.49	29.18	-13.31	54.00	24.82	100	182	Horizontal
9	5097.7500	50.38	42.42	-7.96	74.00	31.58	200	336	Horizontal
10	5103.7500	40.63	32.66	-7.97	54.00	21.34	200	291	Horizontal
11	8055.7500	35.53	34.42	-1.11	54.00	19.58	200	336	Horizontal
12	8067.0000	46.32	45.19	-1.13	74.00	28.81	200	91	Horizontal
13	11088.750	30.81	37.01	6.20	54.00	16.99	100	293	Horizontal
14	11118.750	41.02	47.31	6.29	74.00	26.69	200	157	Horizontal
15	17991.750	31.35	52.47	21.12	74.00	21.53	100	226	Horizontal
16	17992.500	20.85	41.99	21.14	54.00	12.01	100	248	Horizontal


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 4
Power supply	DC3.87V	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

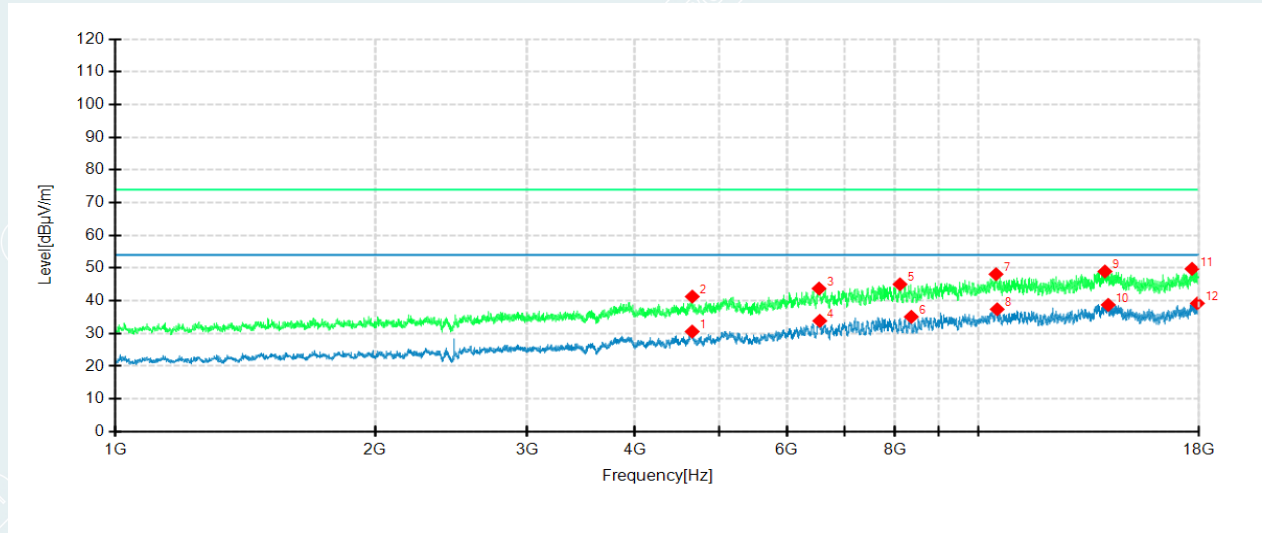

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4658.4000	40.83	30.59	-10.24	54.00	23.41	100	263	Vertical
2	4660.1000	51.54	41.29	-10.25	74.00	32.71	100	360	Vertical
3	6535.2000	50.65	43.73	-6.92	74.00	30.27	100	360	Vertical
4	6547.9500	40.49	33.86	-6.63	54.00	20.14	200	341	Vertical
5	8110.2500	48.42	45.05	-3.37	74.00	28.95	200	353	Vertical
6	8357.6000	38.44	35.10	-3.34	54.00	18.90	100	159	Vertical
7	10476.6500	46.22	48.12	1.90	74.00	25.88	100	329	Vertical
8	10509.8000	35.23	37.40	2.17	54.00	16.60	200	13	Vertical
9	14009.2500	40.95	48.96	8.01	74.00	25.04	100	238	Vertical
10	14131.6500	31.50	38.76	7.26	54.00	15.24	100	133	Vertical
11	17671.9000	39.65	49.76	10.11	74.00	24.24	200	263	Vertical
12	17926.0500	29.86	39.21	9.35	54.00	14.79	100	186	Vertical


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 4
Power supply	DC3.87V	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

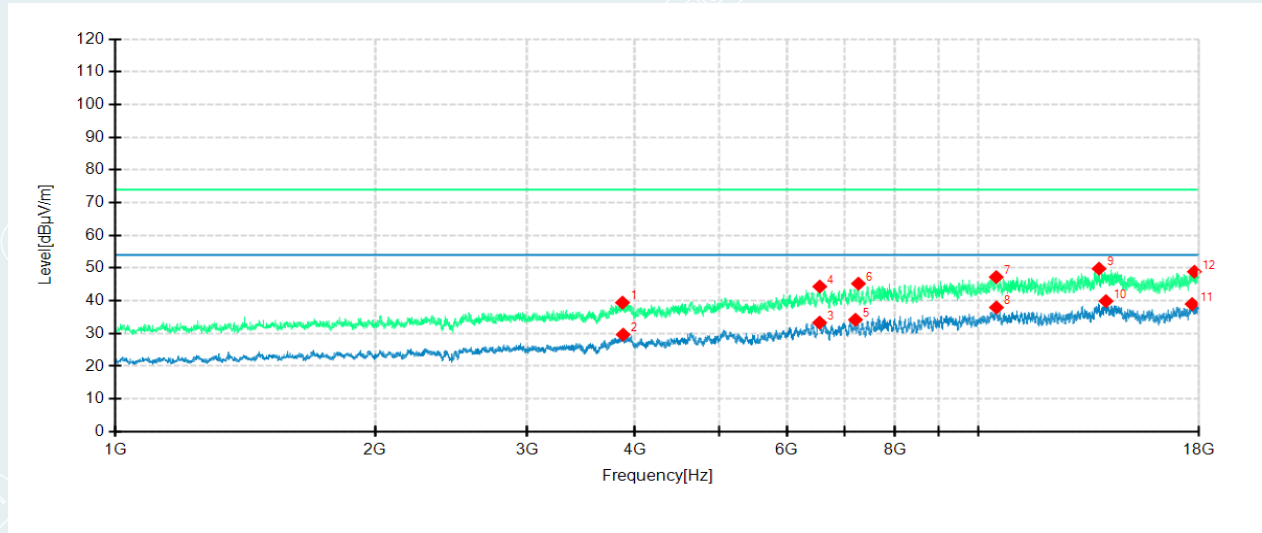

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	3868.7500	53.54	39.44	-14.10	74.00	34.56	200	23	Horizontal
2	3875.5500	43.77	29.67	-14.10	54.00	24.33	200	0	Horizontal
3	6544.5500	40.01	33.31	-6.70	54.00	20.69	100	124	Horizontal
4	6547.9500	50.97	44.34	-6.63	74.00	29.66	200	359	Horizontal
5	7201.6000	39.20	34.20	-5.00	54.00	19.80	200	316	Horizontal
6	7258.5500	51.04	45.23	-5.81	74.00	28.77	200	277	Horizontal
7	10482.6000	45.25	47.24	1.99	74.00	26.76	100	292	Horizontal
8	10488.5500	35.88	37.95	2.07	54.00	16.05	200	353	Horizontal
9	13789.1000	42.71	49.80	7.09	74.00	24.20	100	48	Horizontal
10	14047.5000	32.55	39.89	7.34	54.00	14.11	100	1	Horizontal
11	17676.1500	28.96	38.99	10.03	54.00	15.01	200	265	Horizontal
12	17783.2500	39.75	48.89	9.14	74.00	25.11	200	328	Horizontal


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 5
Power supply	DC3.87V	Tested By	LingYuMei
Test Date	2020-09-17	Sample No.	E20200904990101-0001

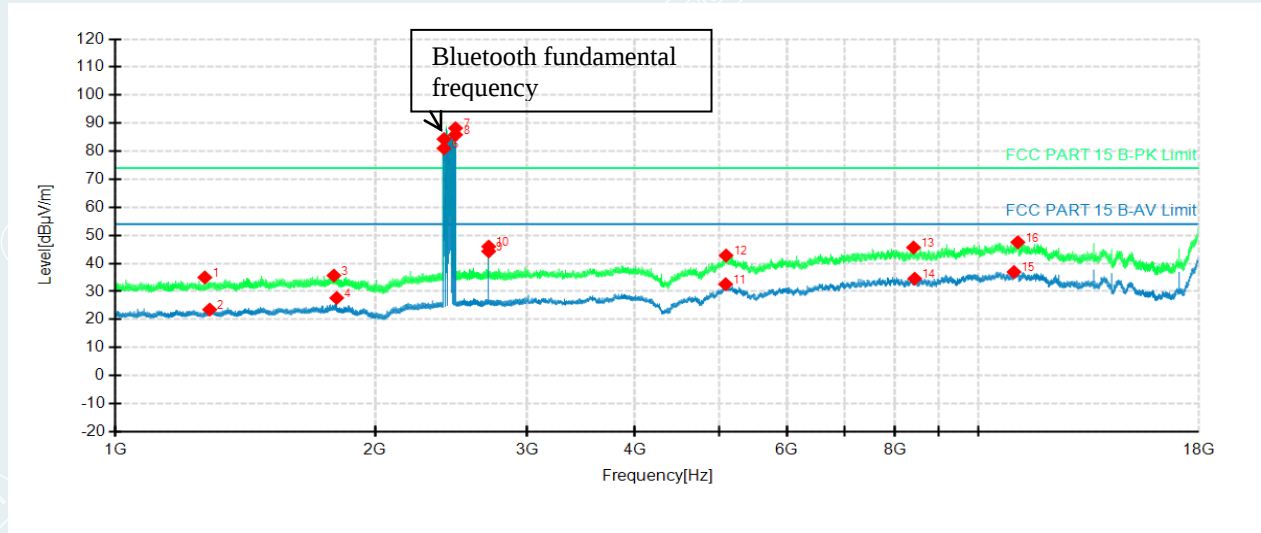

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1269.8000	59.17	35.00	-24.17	74.00	39.00	100	0	Vertical
2	1286.3000	47.62	23.53	-24.09	54.00	30.47	100	179	Vertical
3	1791.7000	57.05	35.66	-21.39	74.00	38.34	100	156	Vertical
4	1804.9000	49.00	27.67	-21.33	54.00	26.33	100	313	Vertical
5	2403.1000	103.97	84.33	-19.64	74.00	-10.33	200	246	Vertical
6	2403.2000	100.67	81.03	-19.64	54.00	-27.03	200	246	Vertical
7	2478.6000	107.33	88.20	-19.13	74.00	-14.20	100	179	Vertical
8	2478.7000	105.01	85.88	-19.13	54.00	-31.88	100	179	Vertical
9	2707.4000	62.74	44.29	-18.45	54.00	9.71	100	357	Vertical
10	2707.6000	64.44	45.99	-18.45	74.00	28.01	100	357	Vertical
11	5093.2500	40.57	32.58	-7.99	54.00	21.42	200	25	Vertical
12	5099.2500	50.77	42.82	-7.95	74.00	31.18	100	159	Vertical
13	8407.5000	46.48	45.66	-0.82	74.00	28.34	200	358	Vertical
14	8433.7500	35.34	34.55	-0.79	54.00	19.45	200	25	Vertical
15	10991.250	31.27	36.94	5.67	54.00	17.06	200	247	Vertical
16	11104.500	41.27	47.54	6.27	74.00	26.46	100	159	Vertical


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.6°C/57%RH/101kPa	Test Mode	Mode 5
Power supply	DC3.87V	Tested By	LingYuMei
Test Date	2020-09-17	Sample No.	E20200904990101-0001

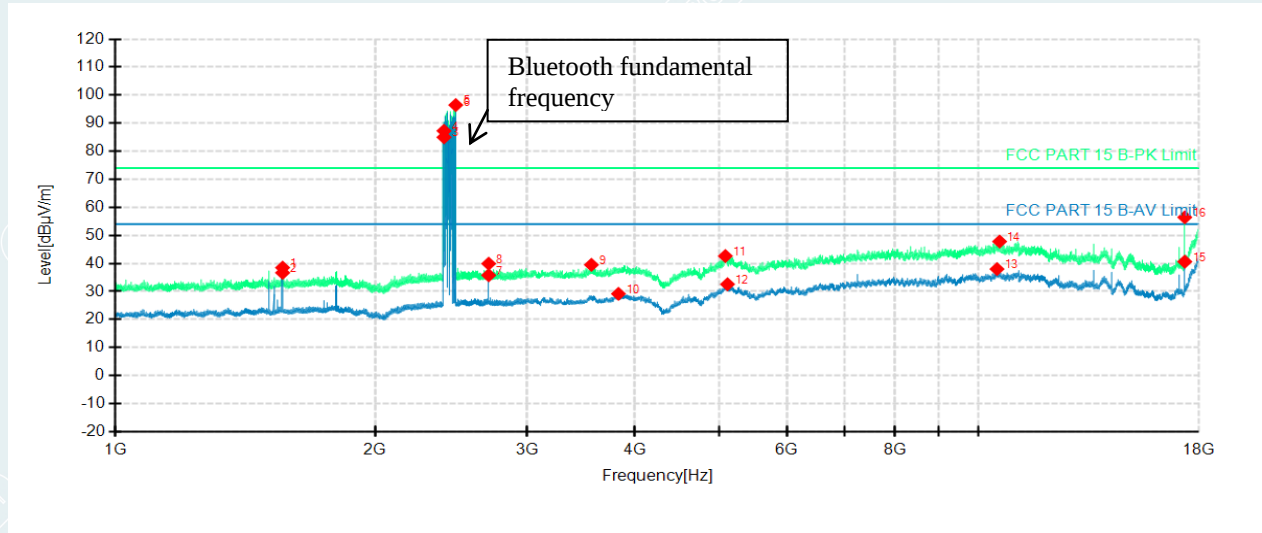

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1562.5000	61.35	38.48	-22.87	74.00	35.52	100	20	Horizontal
2	1562.7000	59.52	36.66	-22.86	54.00	17.34	100	20	Horizontal
3	2403.2000	104.62	84.98	-19.64	54.00	-30.98	200	112	Horizontal
4	2403.2000	106.90	87.26	-19.64	74.00	-13.26	200	112	Horizontal
5	2479.8000	115.60	96.47	-19.13	74.00	-22.47	200	335	Horizontal
6	2480.2000	115.08	95.96	-19.12	54.00	-41.96	200	357	Horizontal
7	2707.3000	54.22	35.77	-18.45	54.00	18.23	200	156	Horizontal
8	2707.5000	58.35	39.90	-18.45	74.00	34.10	200	64	Horizontal
9	3561.0000	53.97	39.50	-14.47	74.00	34.50	100	225	Horizontal
10	3827.2500	42.52	29.15	-13.37	54.00	24.85	200	72	Horizontal
11	5089.5000	50.64	42.62	-8.02	74.00	31.38	200	27	Horizontal
12	5118.7500	40.63	32.56	-8.07	54.00	21.44	100	292	Horizontal
13	10504.500	33.56	37.99	4.43	54.00	16.01	100	203	Horizontal
14	10578.000	42.89	47.81	4.92	74.00	26.19	100	3	Horizontal
15	17332.500	30.42	40.62	10.20	54.00	13.38	200	251	Horizontal
16	17333.250	46.21	56.43	10.22	74.00	17.57	200	251	Horizontal


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 5
Power supply	DC3.87V	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

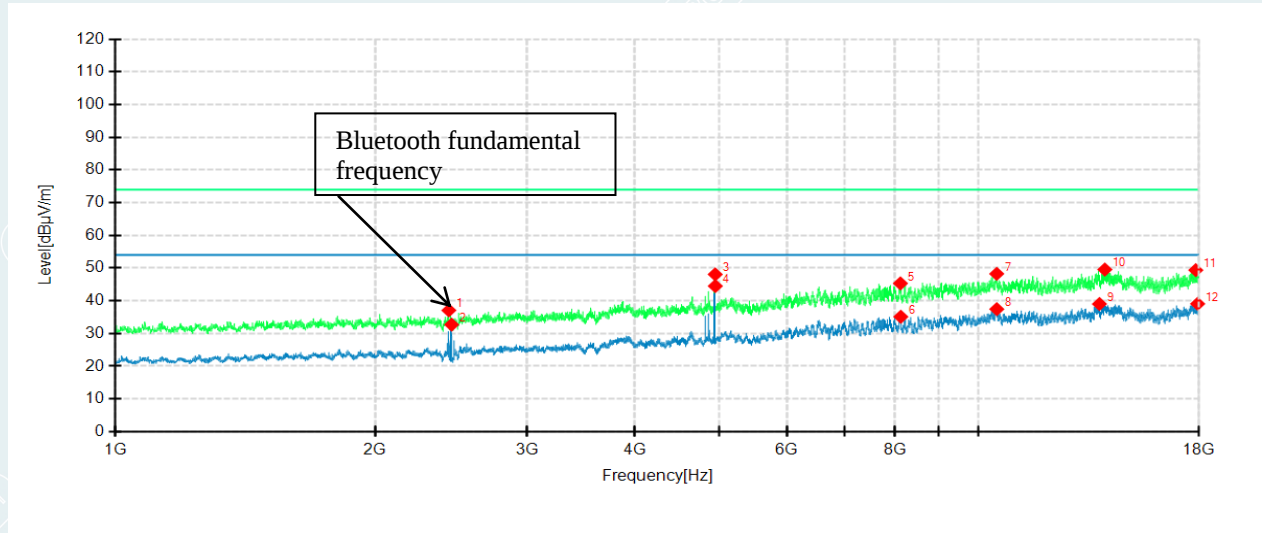

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2434.8000	57.49	37.08	-20.41	74.00	36.92	100	186	Vertical
2	2452.6500	53.06	32.71	-20.35	54.00	21.29	200	105	Vertical
3	4954.2000	59.14	48.07	-11.07	74.00	25.93	100	303	Vertical
4	4955.0500	55.55	44.50	-11.05	54.00	9.50	100	290	Vertical
5	8118.7500	48.58	45.32	-3.26	74.00	28.68	100	70	Vertical
6	8126.4000	38.27	35.11	-3.16	54.00	18.89	200	29	Vertical
7	10496.2000	46.06	48.24	2.18	74.00	25.76	100	212	Vertical
8	10497.9000	35.23	37.44	2.21	54.00	16.56	100	135	Vertical
9	13804.4000	31.94	39.02	7.08	54.00	14.98	200	140	Vertical
10	14003.3000	41.44	49.55	8.11	74.00	24.45	200	169	Vertical
11	17848.7000	39.90	49.37	9.47	74.00	24.63	200	152	Vertical
12	17936.2500	29.68	39.07	9.39	54.00	14.93	200	75	Vertical


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 5
Power supply	DC3.87V	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

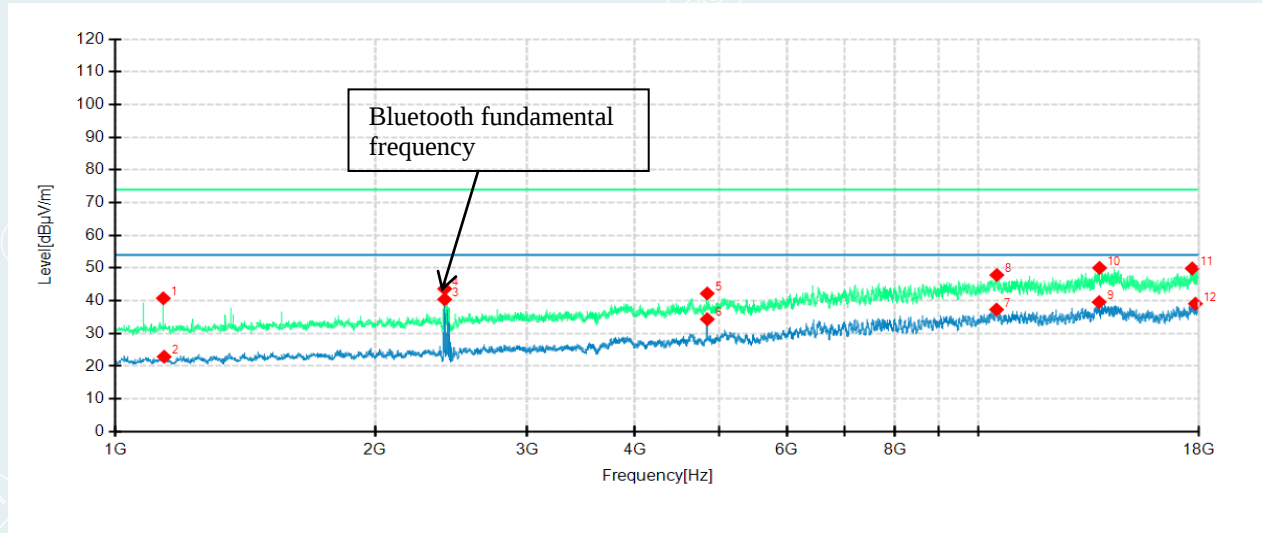

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1136.8500	65.48	40.76	-24.72	74.00	33.24	100	173	Horizontal
2	1139.4000	47.61	22.90	-24.71	54.00	31.10	200	0	Horizontal
3	2407.6000	60.95	40.43	-20.52	54.00	13.57	200	175	Horizontal
4	2407.6000	64.19	43.67	-20.52	74.00	30.33	200	175	Horizontal
5	4849.6500	52.46	42.23	-10.23	74.00	31.77	200	276	Horizontal
6	4850.5000	44.60	34.37	-10.23	54.00	19.63	200	276	Horizontal
7	10491.9500	35.19	37.31	2.12	54.00	16.69	100	173	Horizontal
8	10499.6000	45.64	47.87	2.23	74.00	26.13	100	211	Horizontal
9	13792.5000	32.48	39.60	7.12	54.00	14.40	100	57	Horizontal
10	13807.8000	43.05	50.04	6.99	74.00	23.96	100	122	Horizontal
11	17679.5500	39.92	49.89	9.97	74.00	24.11	100	122	Horizontal
12	17830.8500	29.81	39.10	9.29	54.00	14.90	100	19	Horizontal


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 6
Power supply	DC3.87V	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0001

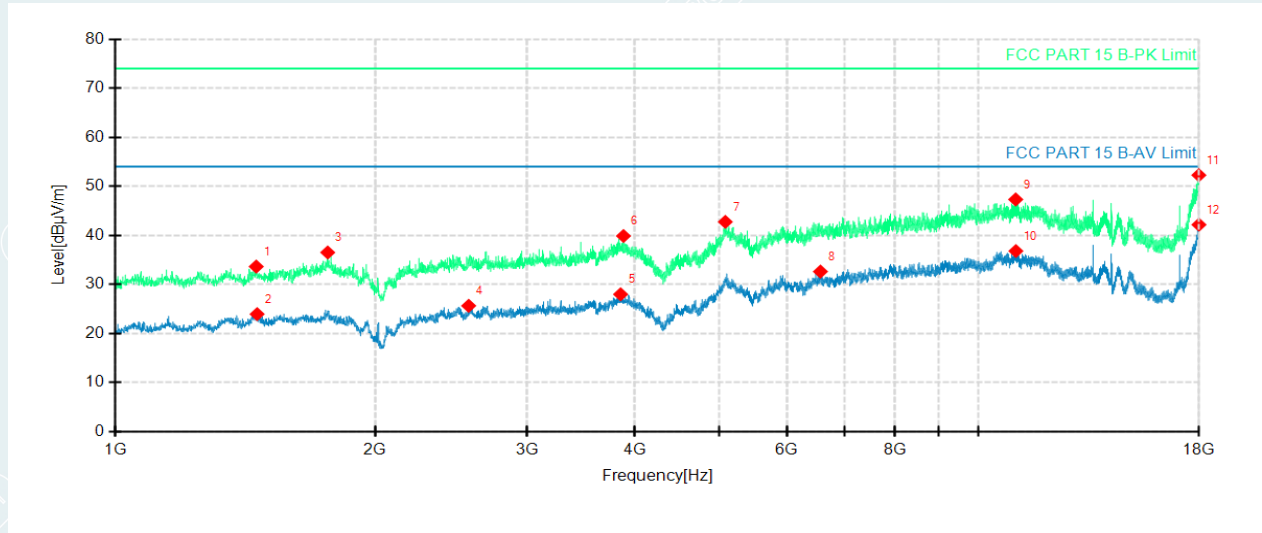

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1456.4500	56.80	33.64	-23.16	74.00	40.36	200	252	Horizontal
2	1459.8500	47.09	23.95	-23.14	54.00	30.05	200	207	Horizontal
3	1762.4500	58.14	36.51	-21.63	74.00	37.49	200	252	Horizontal
4	2566.5500	44.55	25.64	-18.91	54.00	28.36	200	322	Horizontal
5	3849.2000	42.20	27.99	-14.21	54.00	26.01	200	360	Horizontal
6	3878.9500	54.02	39.87	-14.15	74.00	34.13	200	322	Horizontal
7	5089.3500	51.38	42.75	-8.63	74.00	31.25	100	107	Horizontal
8	6559.0000	39.29	32.62	-6.67	54.00	21.38	100	244	Horizontal
9	11041.0500	41.63	47.32	5.69	74.00	26.68	200	138	Horizontal
10	11047.0000	31.10	36.80	5.70	54.00	17.20	200	252	Horizontal
11	17995.7500	31.41	52.27	20.86	74.00	21.73	100	333	Horizontal
12	17999.1500	21.21	42.17	20.96	54.00	11.83	200	184	Horizontal


EUT Name	Watch	Model	W301GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 6
Power supply	DC3.87V	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0001

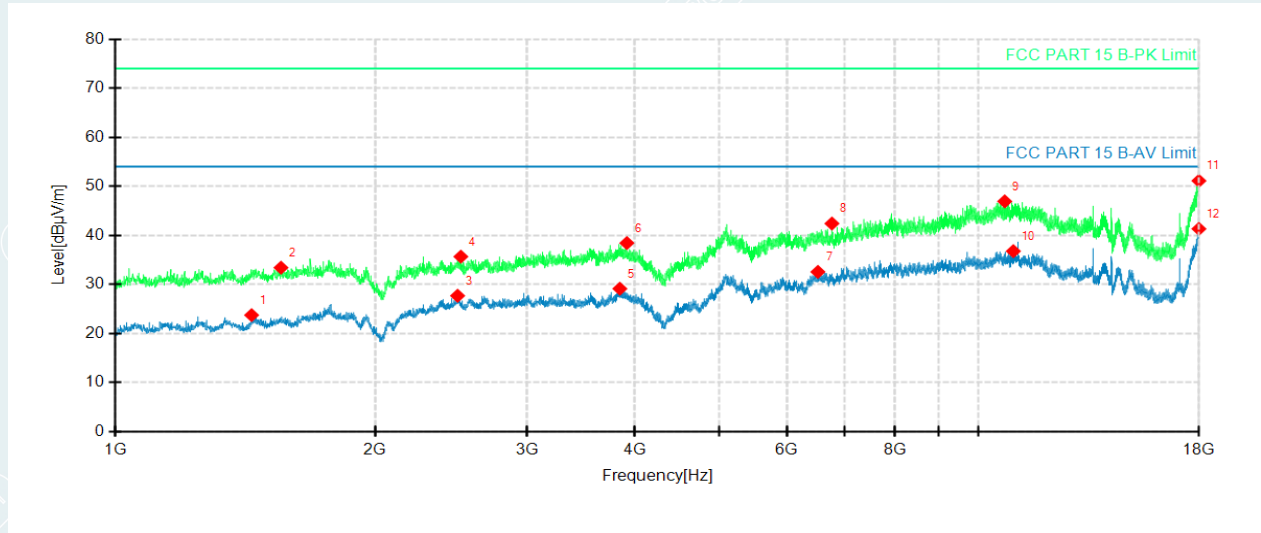

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1438.6000	46.99	23.74	-23.25	54.00	30.26	100	52	Vertical
2	1555.9000	56.28	33.41	-22.87	74.00	40.59	200	316	Vertical
3	2491.7500	46.74	27.69	-19.05	54.00	26.31	100	29	Vertical
4	2513.8500	54.64	35.67	-18.97	74.00	38.33	200	137	Vertical
5	3841.5500	43.35	29.13	-14.22	54.00	24.87	100	98	Vertical
6	3913.8000	52.57	38.43	-14.14	74.00	35.57	200	272	Vertical
7	6514.8000	39.16	32.56	-6.60	54.00	21.44	100	237	Vertical
8	6763.0000	48.32	42.41	-5.91	74.00	31.59	100	29	Vertical
9	10724.0000	41.96	46.92	4.96	74.00	27.08	200	70	Vertical
10	10971.3500	31.30	36.78	5.48	54.00	17.22	100	260	Vertical
11	17999.1500	30.16	51.12	20.96	74.00	22.88	200	250	Vertical
12	18000.0000	20.34	41.32	20.98	54.00	12.68	200	205	Vertical


EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 6
Power supply	DC3.87V	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

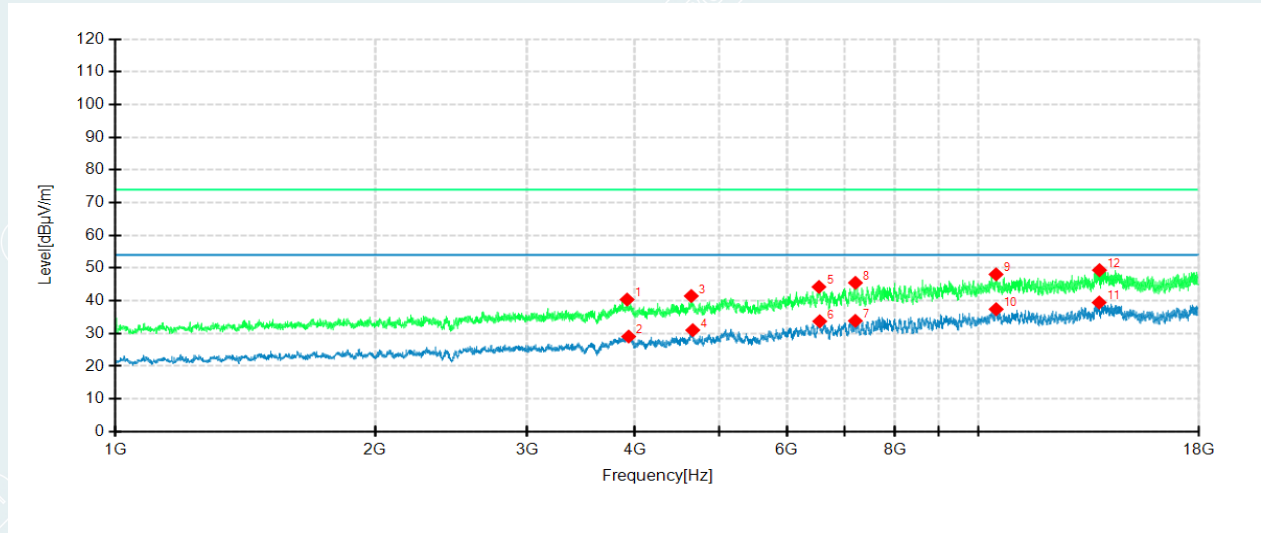

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	3916.3500	54.37	40.37	-14.00	74.00	33.63	200	107	Vertical
2	3932.5000	42.97	29.08	-13.89	54.00	24.92	200	6	Vertical
3	4647.3500	51.68	41.46	-10.22	74.00	32.54	200	29	Vertical
4	4666.0500	41.33	31.03	-10.30	54.00	22.97	200	1	Vertical
5	6533.5000	51.21	44.25	-6.96	74.00	29.75	100	84	Vertical
6	6547.1000	40.38	33.73	-6.65	54.00	20.27	100	315	Vertical
7	7199.0500	38.85	33.87	-4.98	54.00	20.13	200	132	Vertical
8	7200.7500	50.47	45.49	-4.98	74.00	28.51	100	328	Vertical
9	10477.5000	46.17	48.08	1.91	74.00	25.92	200	277	Vertical
10	10480.9000	35.45	37.41	1.96	54.00	16.59	200	263	Vertical
11	13795.0500	32.32	39.47	7.15	54.00	14.53	200	277	Vertical
12	13805.2500	42.30	49.36	7.06	74.00	24.64	100	251	Vertical

EUT Name	Watch	Model	W501GB
Environmental Conditions	24.5°C/51%RH/101.0kPa	Test Mode	Mode 6
Power supply	DC3.87V	Tested By	Luo Ping
Test Date	2021-03-16	Sample No.	E20200904990101-0015

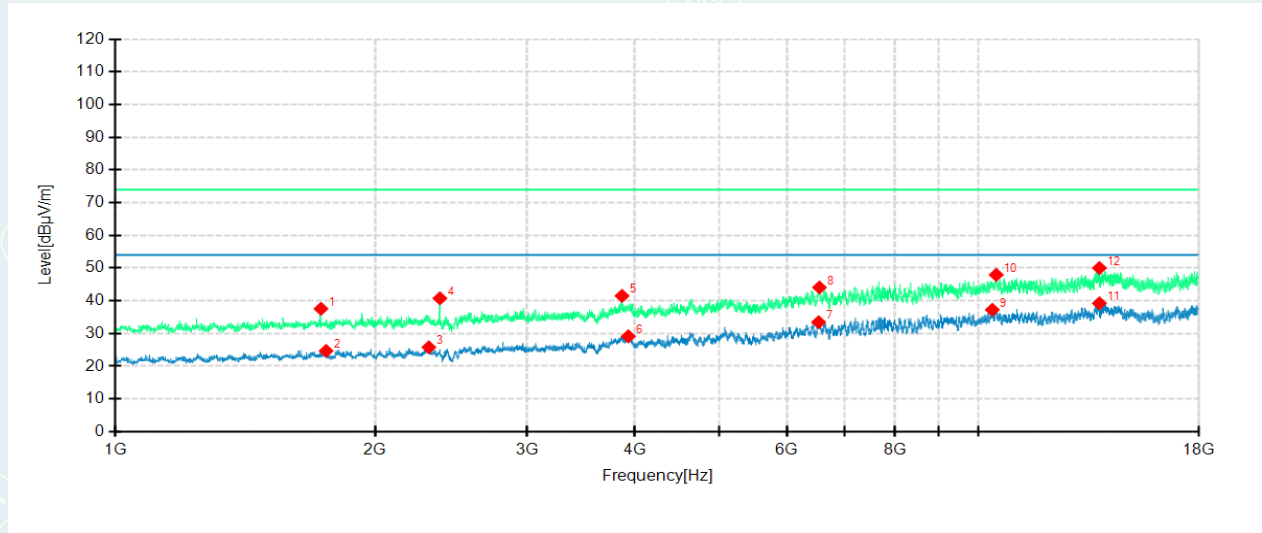

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1731.0000	60.08	37.56	-22.52	74.00	36.44	200	227	Horizontal
2	1754.8000	47.19	24.69	-22.50	54.00	29.31	100	146	Horizontal
3	2308.1500	46.43	25.79	-20.64	54.00	28.21	200	188	Horizontal
4	2377.0000	61.53	40.75	-20.78	74.00	33.25	200	227	Horizontal
5	3863.6500	55.60	41.50	-14.10	74.00	32.50	200	329	Horizontal
6	3929.1000	43.05	29.14	-13.91	54.00	24.86	100	216	Horizontal
7	6527.5500	40.56	33.47	-7.09	54.00	20.53	100	146	Horizontal
8	6541.1500	50.86	44.08	-6.78	74.00	29.92	100	173	Horizontal
9	10373.8000	35.74	37.24	1.50	54.00	16.76	100	71	Horizontal
10	10482.6000	45.94	47.93	1.99	74.00	26.07	200	8	Horizontal
11	13801.8500	32.07	39.22	7.15	54.00	14.78	200	188	Horizontal
12	13804.4000	42.93	50.01	7.08	74.00	23.99	100	271	Horizontal

-----This is the last page of the report. -----