



**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**CERTIFICATION TEST REPORT**

*For*

**WIFI+BT Module**

**MODEL NUMBER: DCT2KM2501**

**FCC ID: 2AC23-DCT2K**

**IC: 12290A-DCT2K**

**REPORT NUMBER: 4790160679.2-9**

**ISSUE DATE: December 7, 2021**

Prepared for

**Hui Zhou Gaoshengda Technology Co.,LTD  
No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou  
City,Guangdong,China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881  
Fax: +86 769 33244054  
Website: [www.ul.com](http://www.ul.com)**



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	12/07/2021	Initial Issue	

**Summary of Test Results**

Clause	Test Items	FCC/ISED Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC Part 15.247 (b) (3) RSS-247 Clause 5.4 (d)	Pass
3	Power Spectral Density	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d) RSS-247 Clause 5.5	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
7	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass

**Note:**

1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >< ISED RSS-247 > when <Accuracy Method> decision rule is applied.

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>6</b>
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	8
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	8
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	9
5.2. <i>CHANNEL LIST</i> .....	9
5.3. <i>MAXIMUM OUTPUT POWER</i> .....	9
5.4. <i>TEST CHANNEL CONFIGURATION</i> .....	10
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	10
5.6. <i>THE WORSE CASE CONFIGURATIONS</i> .....	11
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	12
5.8. <i>DESCRIPTION OF TEST SETUP</i> .....	13
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
7.1. <i>ON TIME AND DUTY CYCLE</i> .....	16
7.2. <i>6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH</i> .....	17
7.3. <i>CONDUCTED OUTPUT POWER</i> .....	19
7.4. <i>POWER SPECTRAL DENSITY</i> .....	20
7.5. <i>CONDUCTED BANDEdge AND SPURIOUS EMISSIONS</i> .....	22
<b>8. RADIATED TEST RESULTS.....</b>	<b>24</b>
8.1. <i>RESTRICTED BANDEdge</i> .....	30
8.1.1. 802.11b SISO MODE.....	30
8.1.2. 802.11g SISO MODE.....	36
8.1.3. 802.11n HT20 MIMO MODE.....	40
8.1.4. 802.11n HT40 MIMO MODE.....	44
8.2. <i>SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)</i> .....	48
8.2.1. 802.11b SISO MODE.....	48
8.3. <i>SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)</i> .....	54
8.3.1. 802.11b SISO MODE.....	54
8.3.2. 802.11g SISO MODE.....	60
8.3.3. 802.11n HT20 MIMO MODE.....	66
8.3.4. 802.11n HT40 MIMO MODE.....	72

8.5. <i>SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)</i> .....	78
8.5.1. 802.11n HT20 MIMO MODE .....	78
8.6. <i>SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)</i> .....	80
8.6.1. 802.11n HT20 MIMO MODE .....	80
8.7. <i>SPURIOUS EMISSIONS BELOW 30 MHz</i> .....	82
8.7.1. 802.11n HT20 MIMO MODE .....	82
<b>9. AC POWER LINE CONDUCTED EMISSIONS</b> .....	<b>85</b>
9.1.1. 802.11n HT20 MIMO MODE .....	86
<b>10. ANTENNA REQUIREMENTS</b> .....	<b>88</b>
<b>11. Appendix</b> .....	<b>89</b>
11.1. <i>Appendix A: DTS Bandwidth</i> .....	89
11.1.1. Test Result .....	89
11.1.2. Test Graphs .....	90
11.2. <i>Appendix B: Occupied Channel Bandwidth</i> .....	98
11.2.1. Test Result .....	98
11.2.2. Test Graphs .....	99
11.3. <i>Appendix C: Maximum conducted output power</i> .....	107
11.3.1. Test Result .....	107
11.4. <i>Appendix D: Maximum power spectral density</i> .....	108
11.4.1. Test Result .....	108
11.4.2. Test Graphs .....	109
11.5. <i>Appendix E: Band edge measurements</i> .....	115
11.5.1. Test Result .....	115
11.5.2. Test Graphs .....	116
11.6. <i>Appendix F: Conducted Spurious Emission</i> .....	120
11.6.1. Test Result .....	120
11.6.2. Test Graphs .....	121
11.7. <i>Appendix G: Duty Cycle</i> .....	139
11.7.1. Test Result .....	139
11.7.2. Test Graphs .....	140

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

### Manufacturer Information


Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

### EUT Information

EUT Name: WIFI+BT Module  
Model: DCT2KM2501  
Brand: GSD  
Sample Received Date: October 28, 2021  
Sample Status: Normal  
Sample ID: 4347117  
Date of Tested: October 28 ,2021 ~ November 10, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:




Kebo Zhang  
Project Engineer

Checked By:



Shawn Wen  
Laboratory Leader

Approved By:



Stephen Guo  
Laboratory Manager

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1: All tests measurement facilities used to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz) 5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz) ±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module
Model Name	DCT2KM2501
Radio Technology	IEEE802.11b/g/n HT20/n HT40
Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Power Supply	DC 3.3 V

### 5.2. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

### 5.3. MAXIMUM OUTPUT POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	14.51	17.51
g	2412 ~ 2462	1-11[11]	14.71	17.71
n HT20 MIMO	2412 ~ 2462	1-11[11]	17.40	20.40
n HT40 MIMO	2422 ~ 2452	3-9[7]	17.30	20.30

#### 5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

#### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		QA Tool					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	1E	1E	1E	/		
	2	1E	1E	1E			
802.11g	1	1E	1E	1E			
	2	1E	1E	1E			
802.11n HT20	1	1E	1E	1E	/		
	2	1E	1E	1E			
802.11n HT40	1	/			1E	1E	1E
	2	/			1E	1E	1E

## 5.6. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11b/g only support SISO mode.

802.11n HT20/HT40 support SISO and MIMO mode.

802.11a SISO mode, Antenna 1 and Antenna 2 has the same power setting, so only Antenna 1 worst case test data were recorded in the report.

802.11n SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 0 and Core 1 correspond to antenna 1 and antenna 2 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spartial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, CDD mode have the maximum power setting, so we only chose the worst case mode CDD for final testing.

## 5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PCB	3
2	2412-2462	PCB	3

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing was performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following mothod.

For output power measurements:

Directional gain=  $G_{ANT} + \text{Array Gain} = 3 \text{ dBi}$

$G_{ANT}$  : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain=  $G_{ANT} + \text{Array Gain} = 6 \text{ dBi}$

Array Gain =  $10 \log(N_{ANT}/N_{ss}) \text{ dB}$ .

$N_{ANT}$  : number of transmit antennas

$N_{ss}$  : number of spatial streams, The worst case directional gain will occur when  $N_{ss} = 1$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.

Note:

1. BT&WLAN 2.4G & WLAN 5G can't transmit simultaneously. (declared by client)
2. Only 802.11n HT20/HT40 support MIMO mode.
3. The value of the antenna gain was declared by customer.

## 5.8. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	XIAOXIN 5000	/
2	UART	/	/	/
3	AC Adapter	Lenovo	ADLX65YCC3D	Input: 100-240 Vac, 50/60 Hz Output: 20 Vdc, 3.25A

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	N/A	N/A	1	N/A

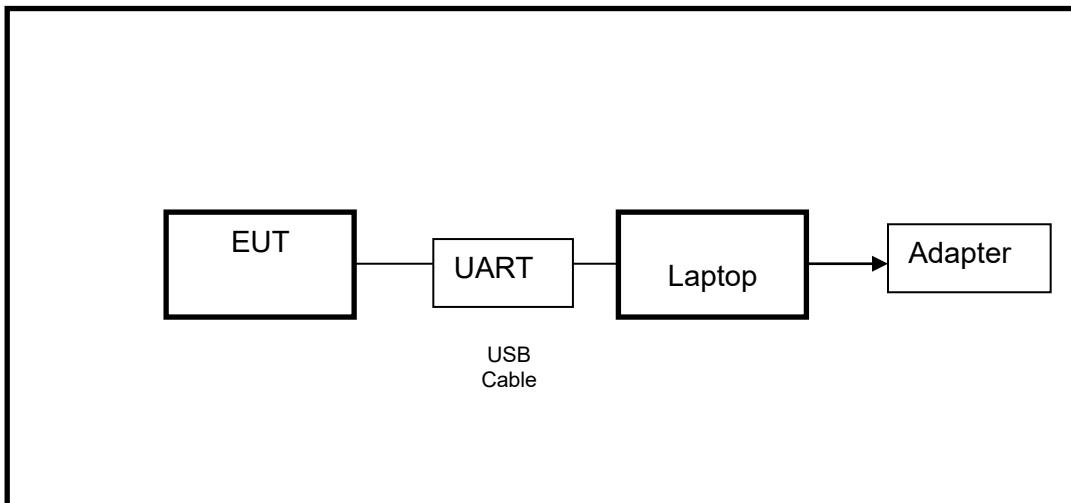
### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS



Note: AC adapter only use for AC POWER LINE CONDUCTED EMISSIONS testing.



## 6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Nov. 12, 2020	Nov. 11, 2021
Two-Line V-Network	R&S	ENV216	101983	Nov. 12, 2020	Nov. 11, 2021
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Nov. 12, 2020	Nov. 11, 2021

Software			
Description	Manufacturer	Name	Version
Test Software for Conducted Emissions	Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Nov. 12, 2020	Nov. 11, 2021
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	April 24, 2020	April 23, 2023
Preamplifier	HP	8447D	2944A09099	Nov. 12, 2020	Nov. 11, 2021
EMI Measurement Receiver	R&S	ESR26	101377	Nov. 12, 2020	Nov. 11, 2021
Horn Antenna	TDK	HRN-0118	130940	Jul. 20, 2021	Jul. 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Nov. 20, 2020	Nov. 19, 2021
Horn Antenna	Schwarzbeck	BBHA9170	#697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	TDK	PA-02-3	TRS-308-00002	Nov. 12, 2020	Nov. 11, 2021
Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Nov. 20, 2020	Nov. 19, 2021
High Pass Filter	Wi	WFKX10-2700-3000-18000-40SS	23	Nov. 12, 2020	Nov. 11, 2021
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Nov. 12, 2020	Nov. 11, 2021



Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.23,2021	Mar.24,2022
Vector Signal Generator	R&S	SMBV100A	261637	Nov.20,2020	Nov.19,2021
Signal Generator	R&S	SMB100A	178553	Nov.20,2020	Nov.19,2021
Signal Analyzer	R&S	FSV40	101118	Nov.20,2020	Nov.19,2021

Software			
Description	Manufacturer	Name	Version
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32	10.60.10

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE

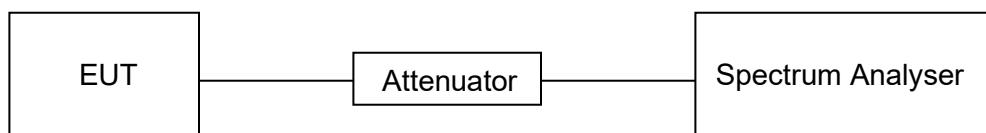
#### LIMITS

None; for reporting purposes only

#### PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	27.4 °C	Relative Humidity	54.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

#### RESULTS

Please refer to appendix G.

## 7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	$\geq 500$ kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

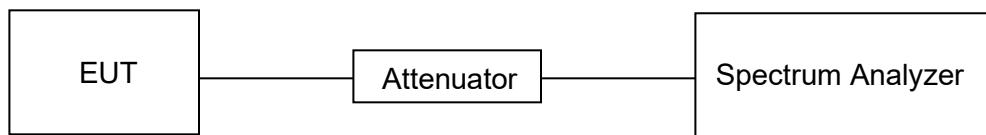
### TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP



**TEST ENVIRONMENT**

Temperature	27.4 °C	Relative Humidity	54.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to appendix A & B.

### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS

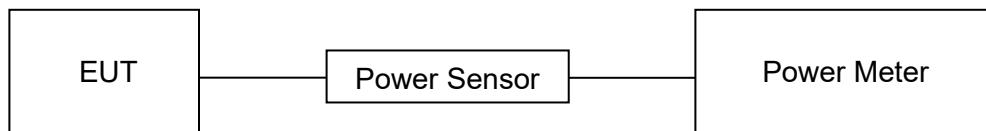
CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	27.4 °C	Relative Humidity	54.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

#### RESULTS

Please refer to appendix C.

## 7.4. POWER SPECTRAL DENSITY

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.

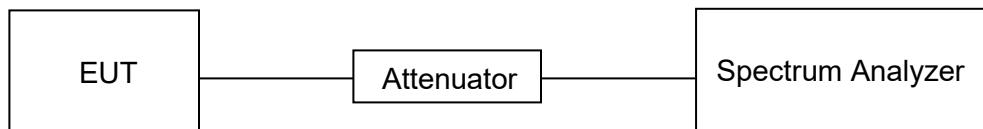
Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	27.4 °C	Relative Humidity	54.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to appendix D.

## 7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

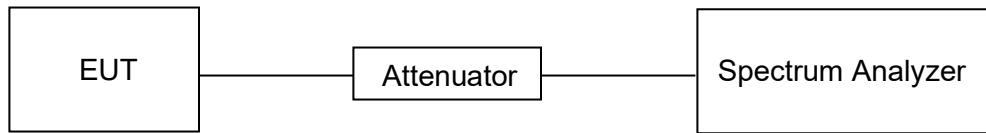
Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	$\geq$ span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	27.4 °C	Relative Humidity	54.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

### RESULTS

Please refer to appendix E & F.

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ( $\mu$ A/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

 Table 7 – Restricted frequency bands<sup>Note 1</sup>

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3280 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.0	7260 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

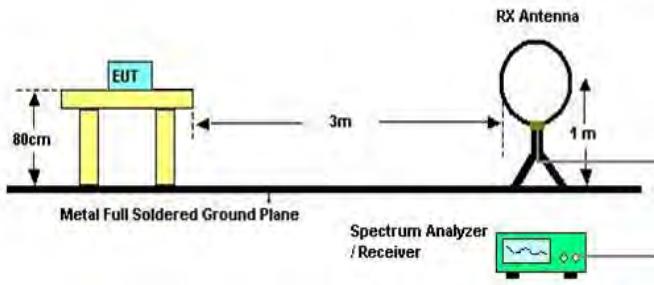
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST SETUP AND PROCEDURE

Below 30 MHz




The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency  $X$  KHz resulted in a level of  $Y$  dB<sub>uV</sub>/m, which is equivalent to  $Y-51.5 = Z$  dB<sub>uA</sub>/m, which has the same margin,  $W$  dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

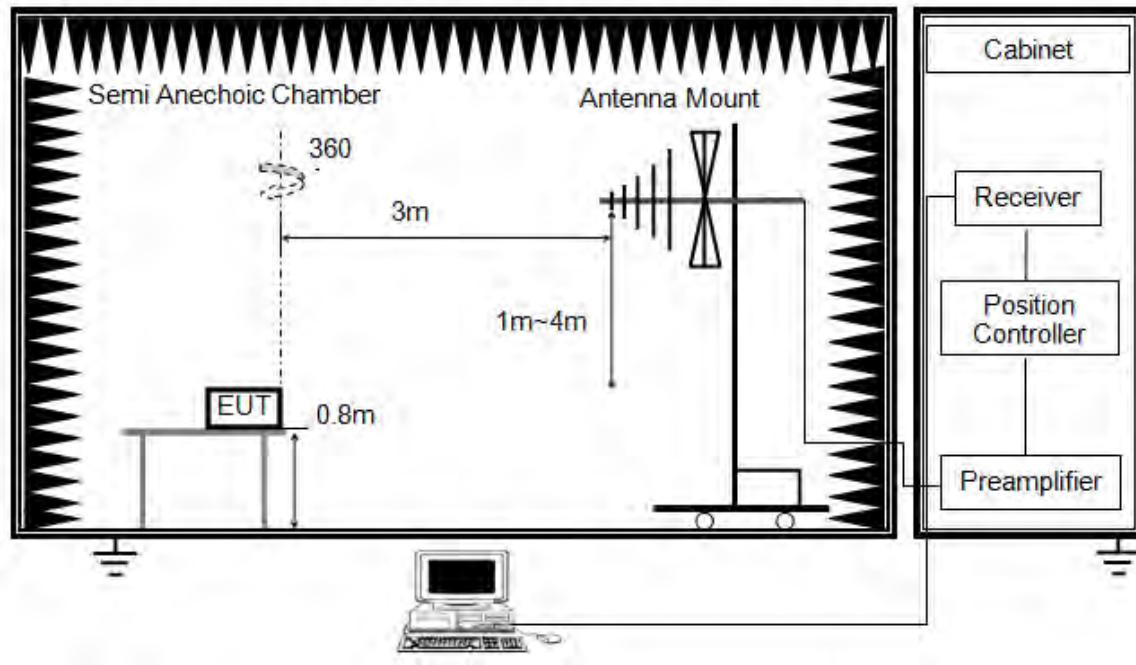Below 1 GHz and above 30 MHz




The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

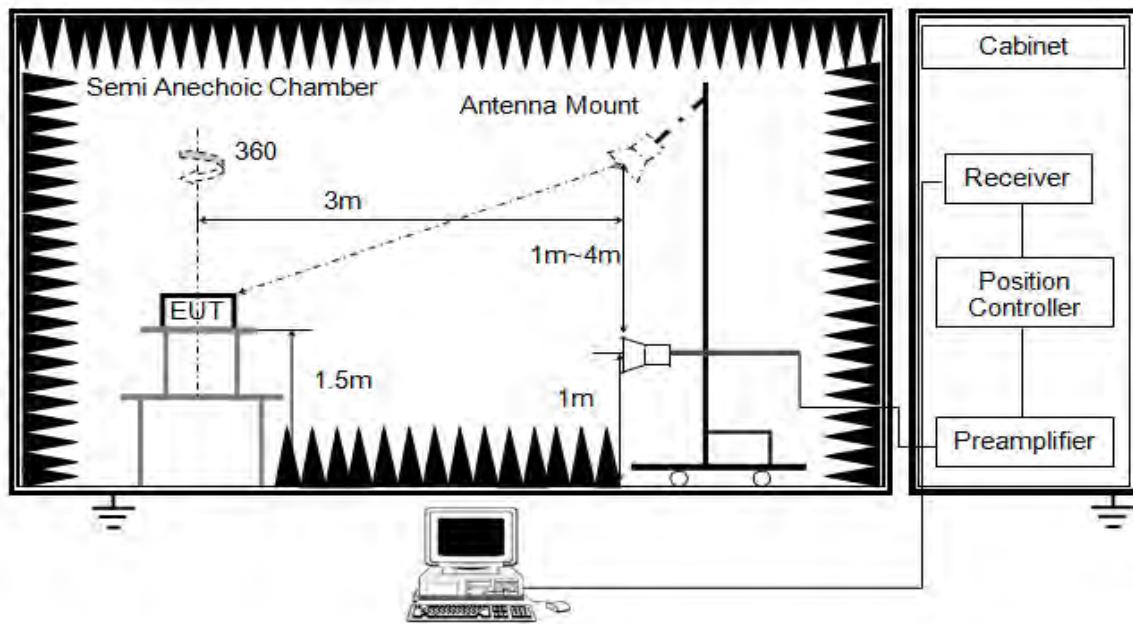Above 1 GHz




The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

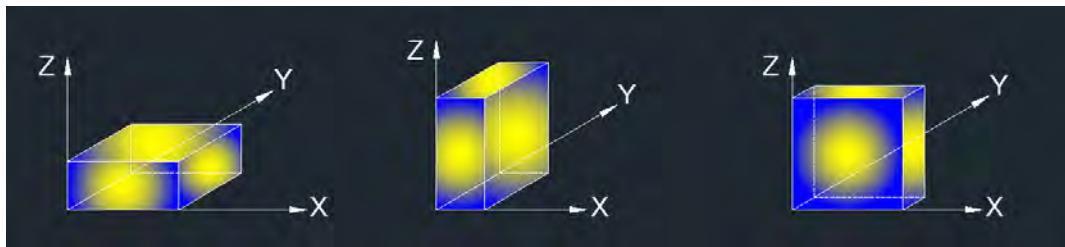X axis, Y axis, Z axis positions:



Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

### TEST ENVIRONMENT

Temperature	24.3 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

### RESULTS

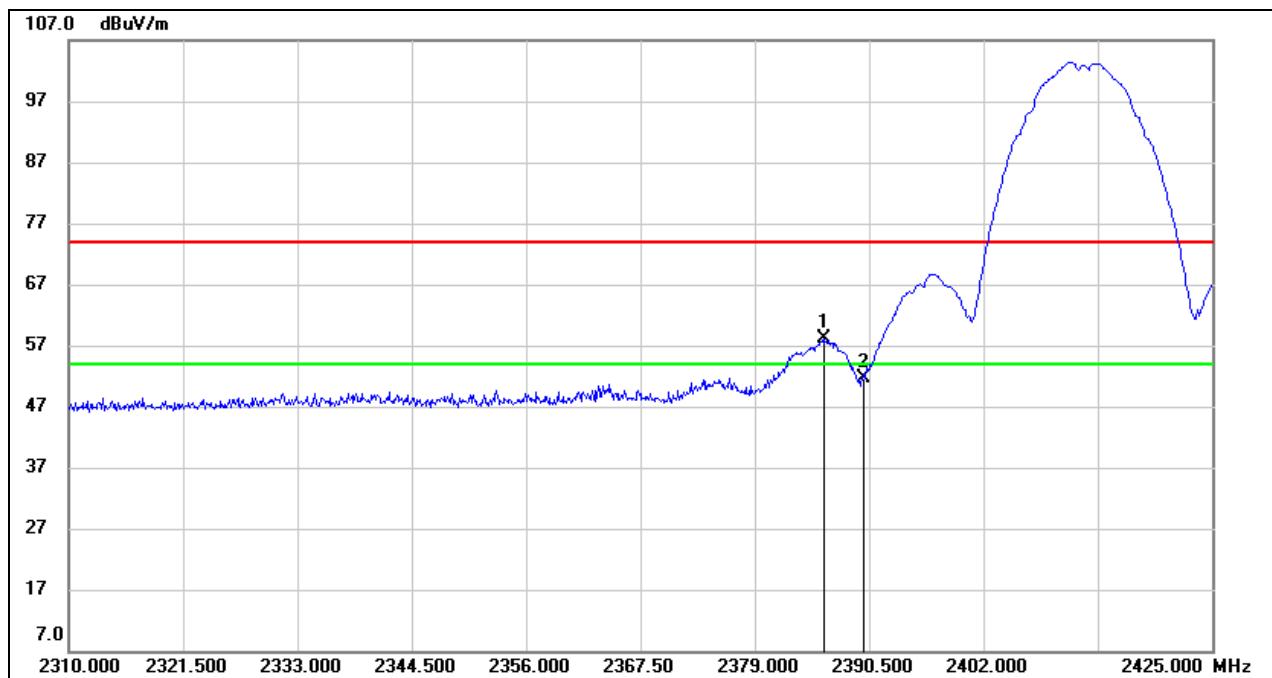
## 8.1. RESTRICTED BANDEDGE

### 8.1.1. 802.11b SISO MODE

#### ANTENNA 2 TEST RESULTS (WORST CASE)


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

#### PEAK




No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.900	24.69	33.32	58.01	74.00	-15.99	peak
2	2390.000	18.32	33.35	51.67	74.00	-22.33	peak

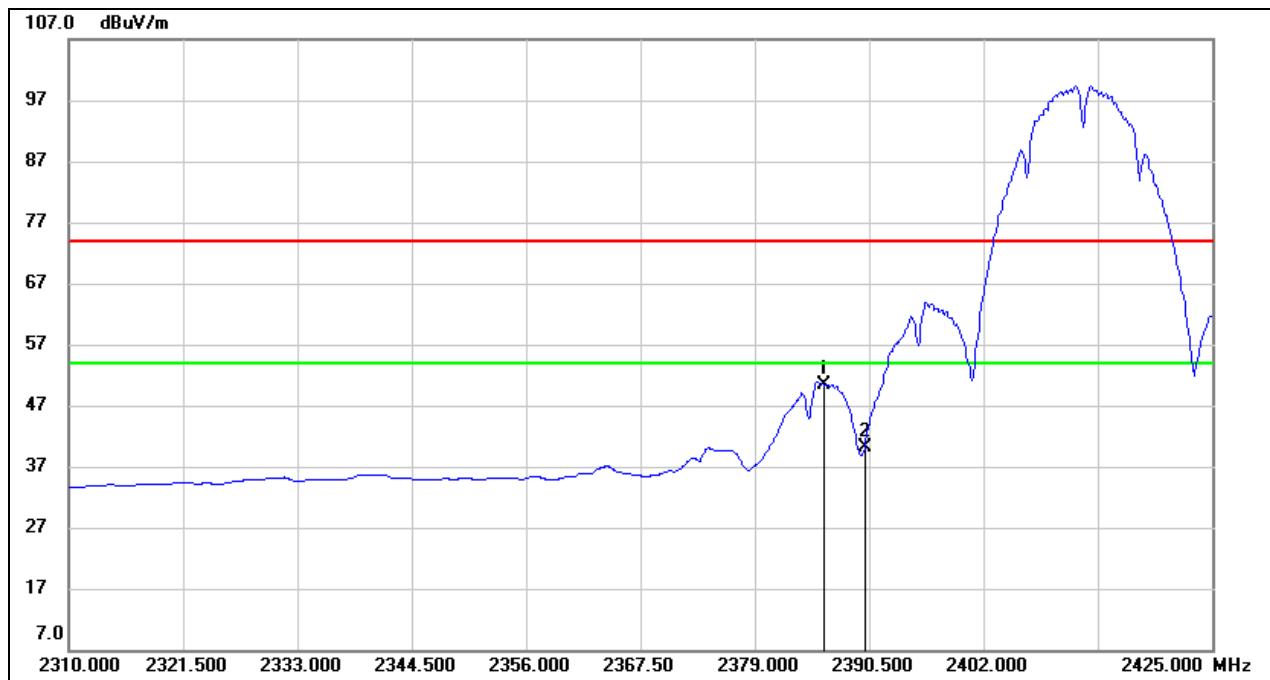Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.900	17.16	33.32	50.48	54.00	-3.52	AVG
2	2390.000	6.88	33.35	40.23	54.00	-13.77	AVG

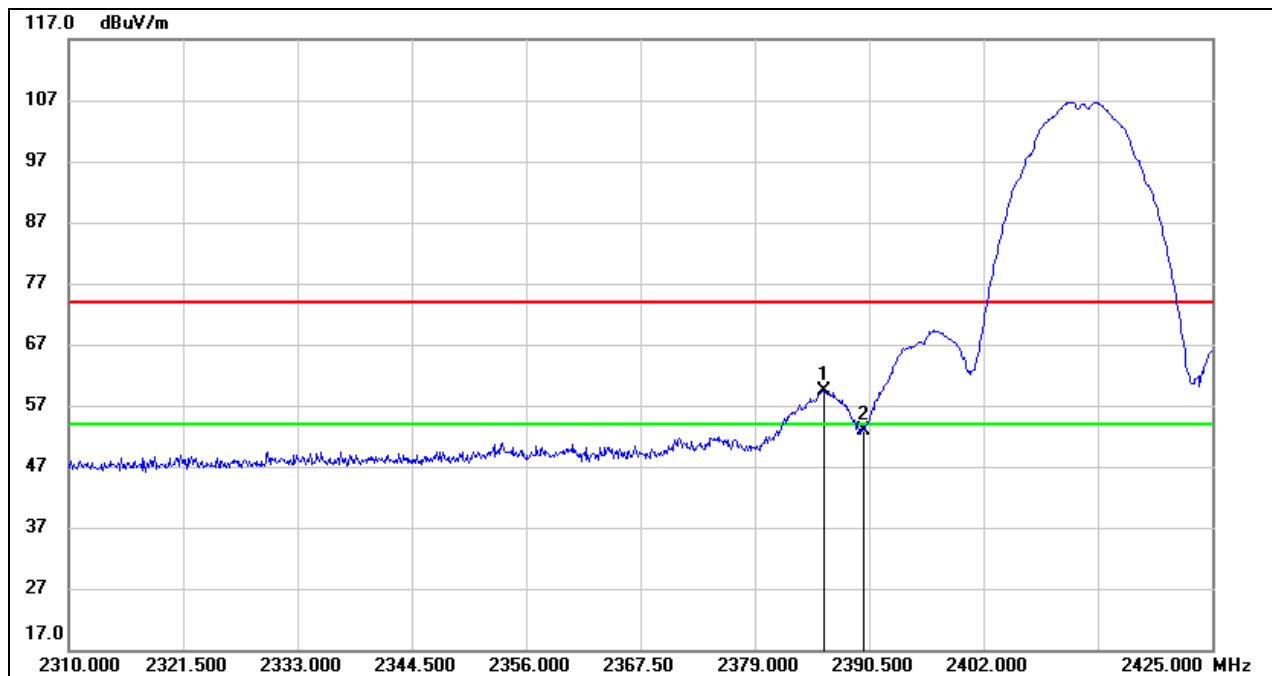Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICTAL)PEAK


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.015	26.00	33.32	59.32	74.00	-14.68	peak
2	2390.000	19.63	33.35	52.98	74.00	-21.02	peak

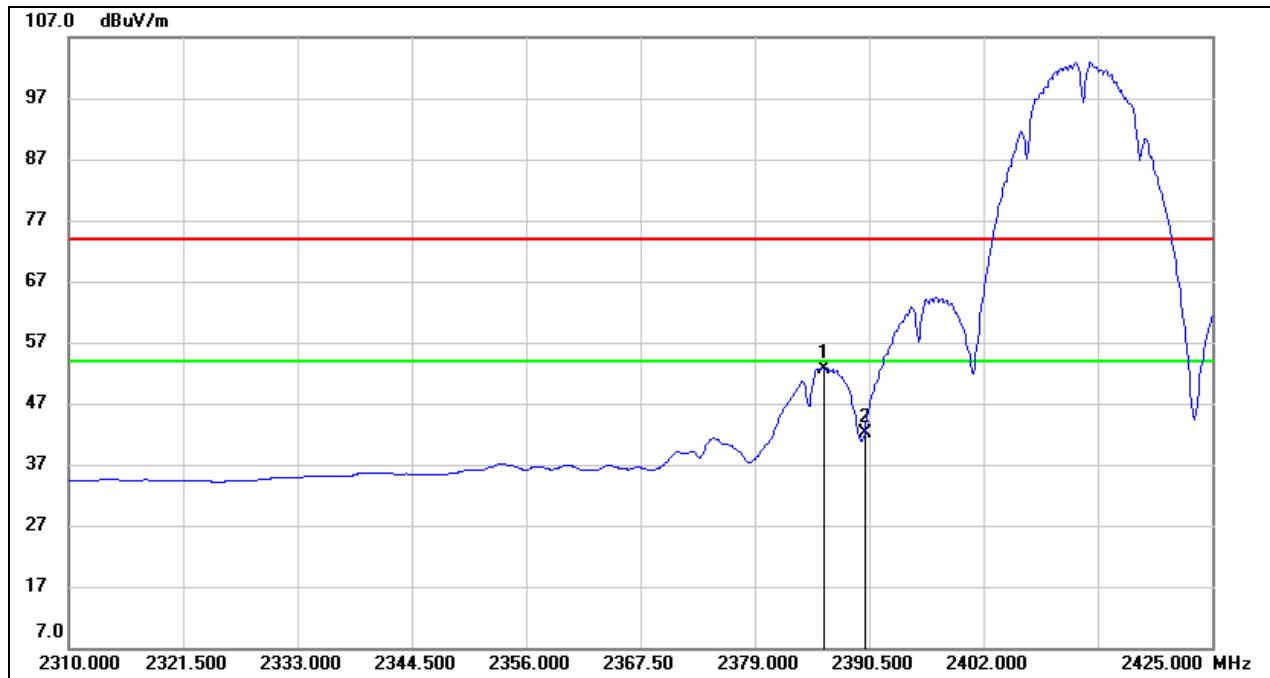Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.015	19.30	33.32	52.62	54.00	-1.38	AVG
2	2390.000	8.88	33.35	42.23	54.00	-11.77	AVG

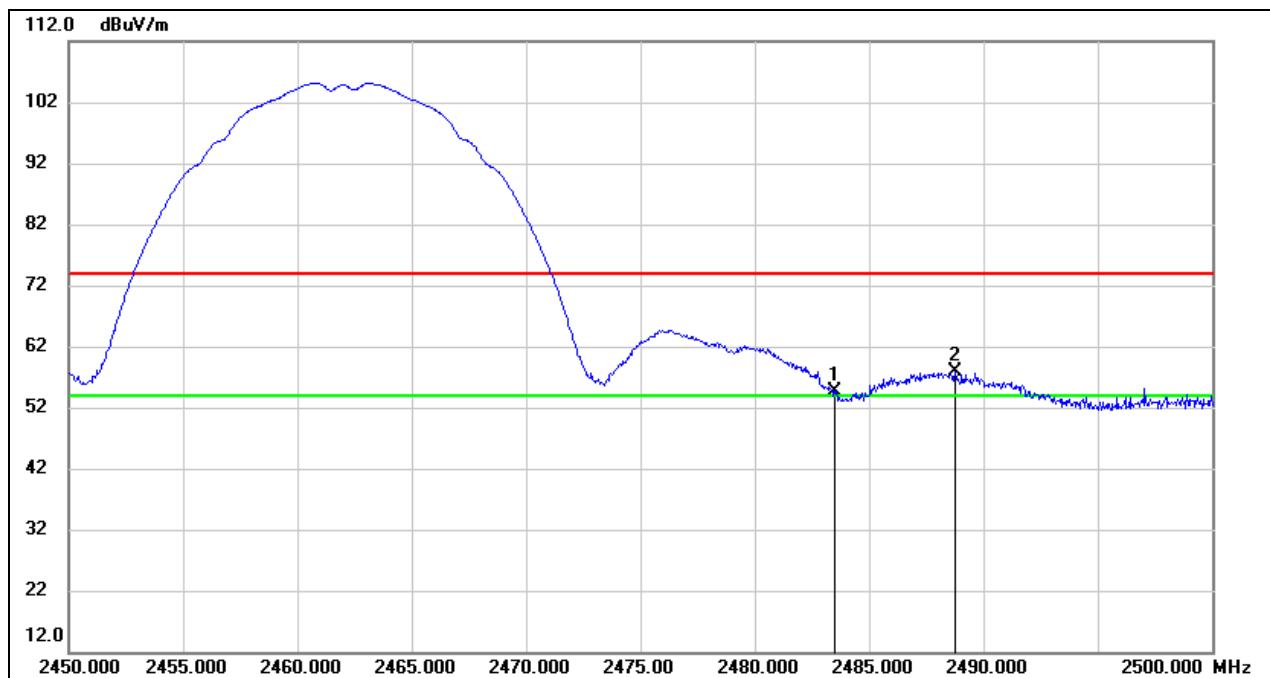Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)PEAK

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	21.04	33.71	54.75	74.00	-19.25	peak
2	2488.750	24.15	33.72	57.87	74.00	-16.13	peak

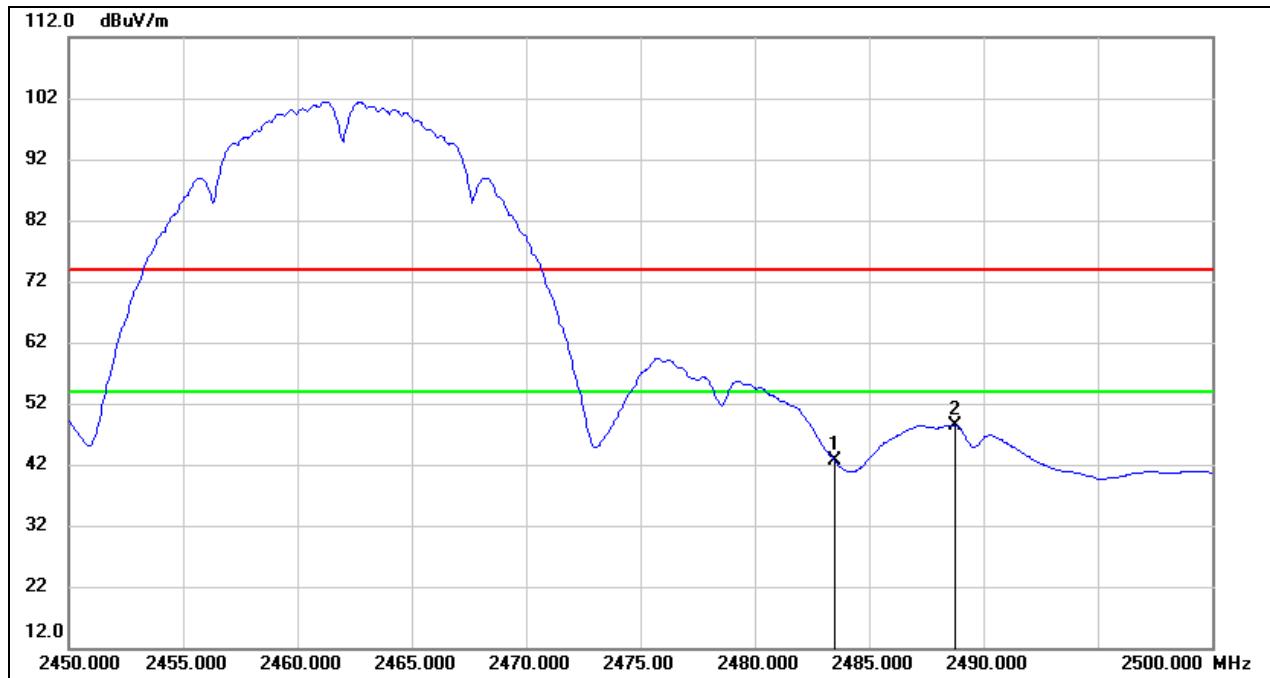Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	8.83	33.71	42.54	54.00	-11.46	AVG
2	2488.750	14.73	33.72	48.45	54.00	-5.55	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.


Note: Both antennas have been tested, only the worst data was recorded in the report.

### 8.1.2. 802.11g SISO MODE
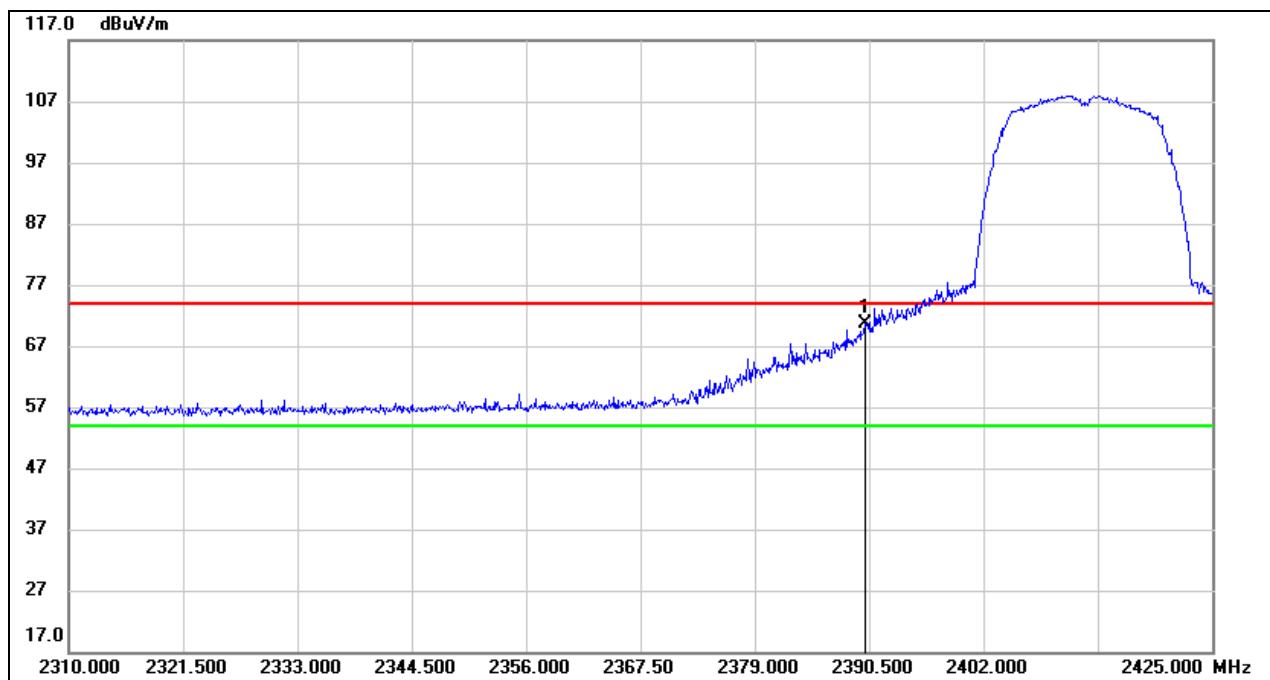
#### ANTENNA 2 TEST RESULTS (WORST CASE)


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

##### PEAK




No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	37.37	33.35	70.72	74.00	-3.28	peak

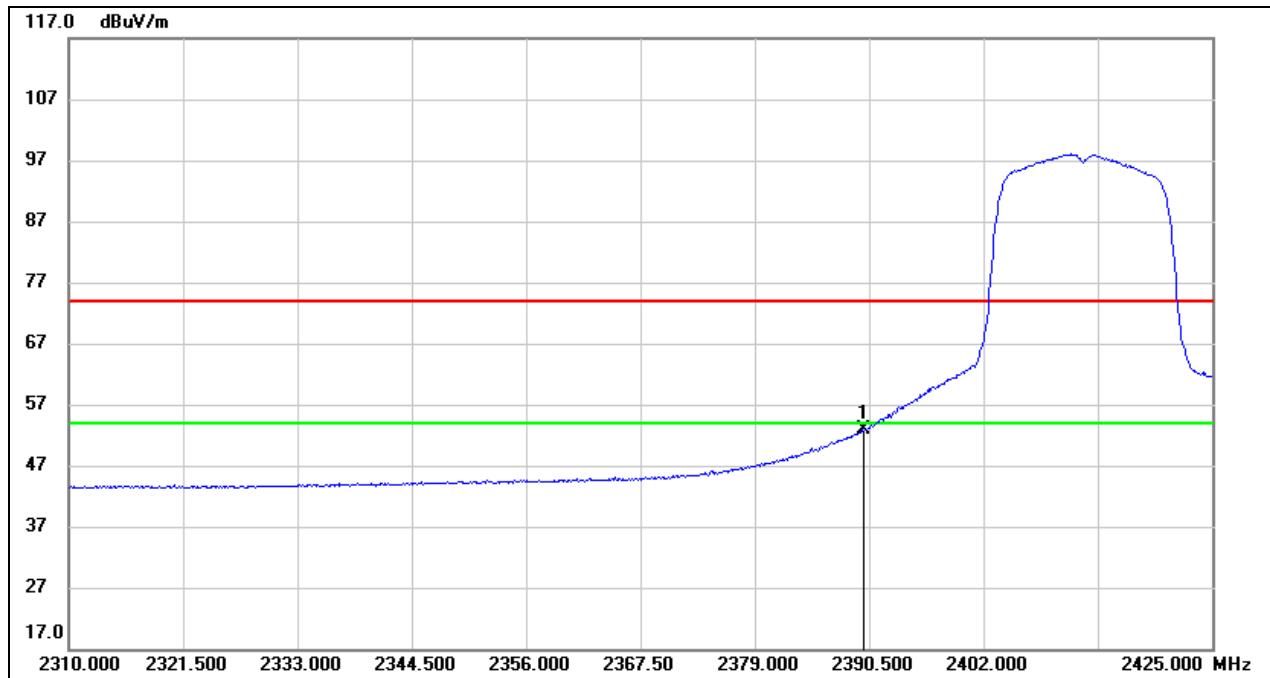Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	19.43	33.35	52.78	54.00	-1.22	AVG

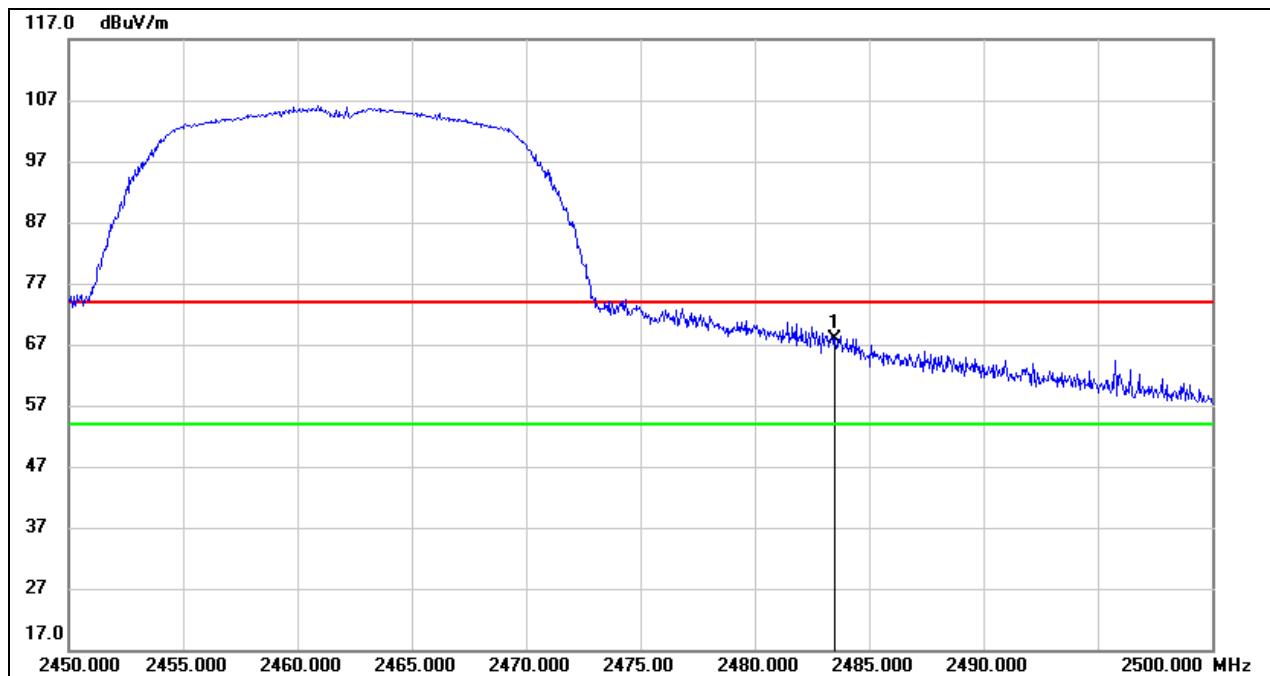Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)PEAK

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.16	33.71	67.87	74.00	-6.13	peak

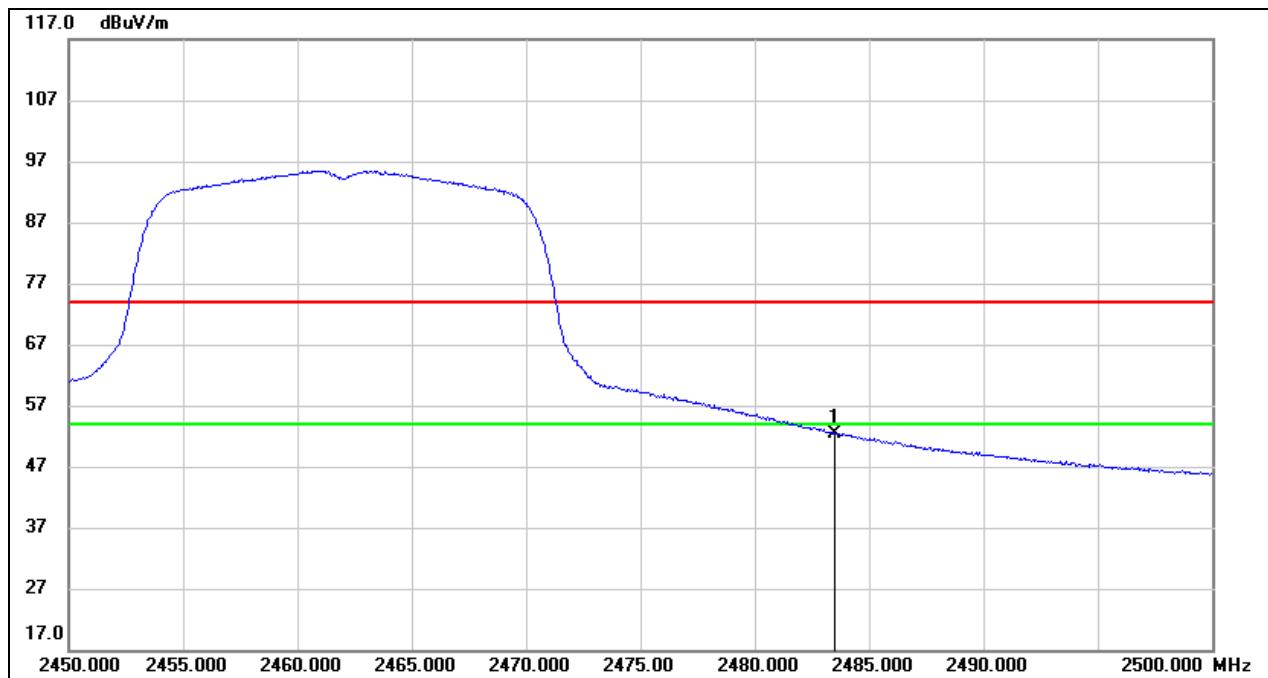Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.73	33.71	52.44	54.00	-1.56	AVG


Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.  
Note: Both antennas have been tested, only the worst data was recorded in the report.

### 8.1.3. 802.11n HT20 MIMO MODE

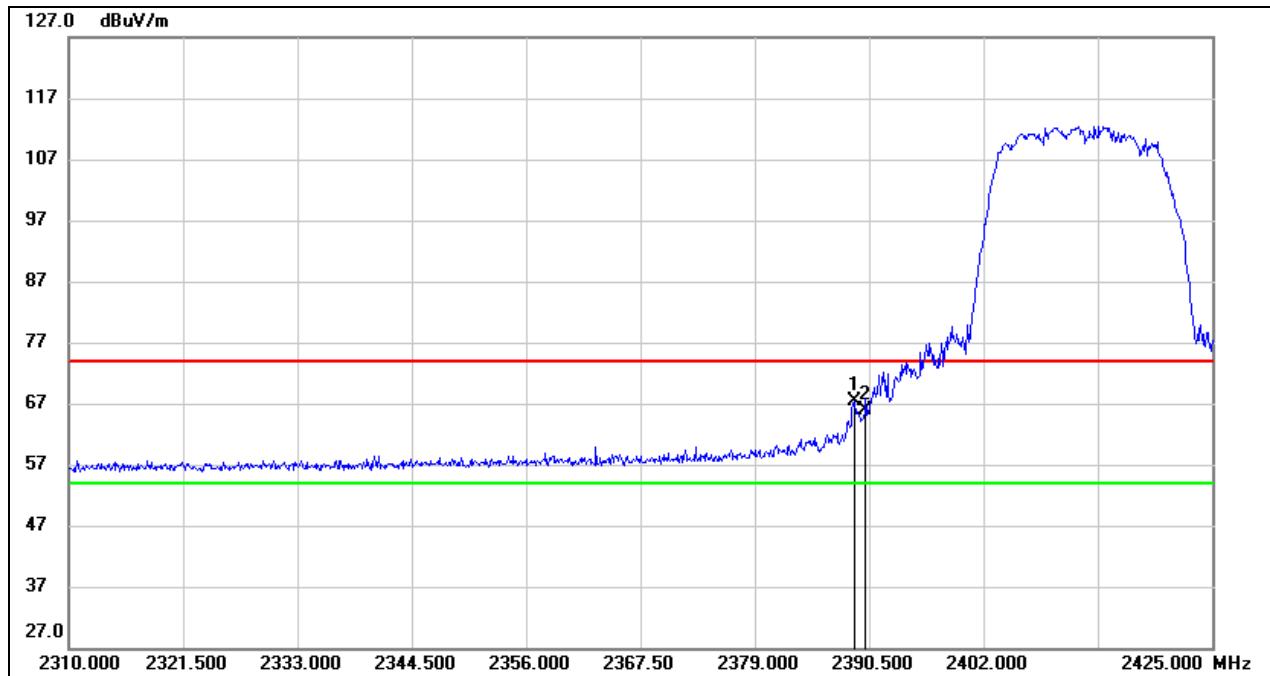
#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

##### PEAK




No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.005	34.15	33.35	67.50	74.00	-6.50	peak
2	2390.000	32.48	33.35	65.83	74.00	-8.17	peak

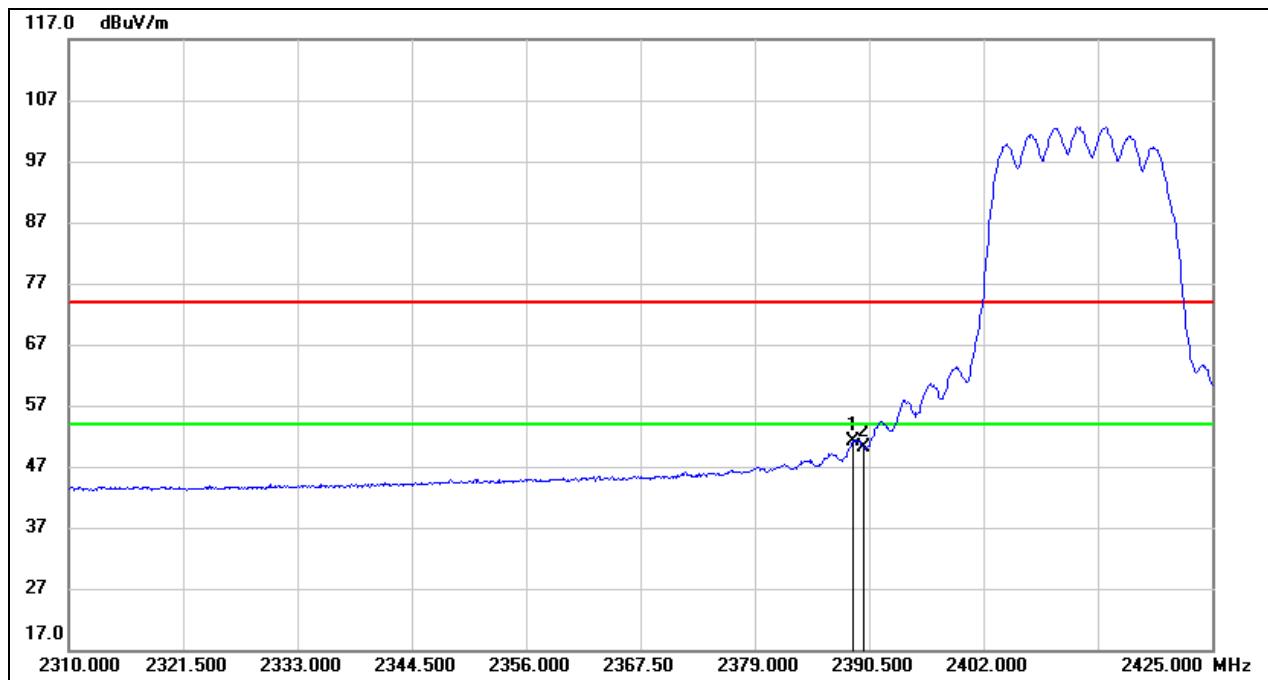Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.005	17.84	33.35	51.19	54.00	-2.81	AVG
2	2390.000	16.70	33.35	50.05	54.00	-3.95	AVG

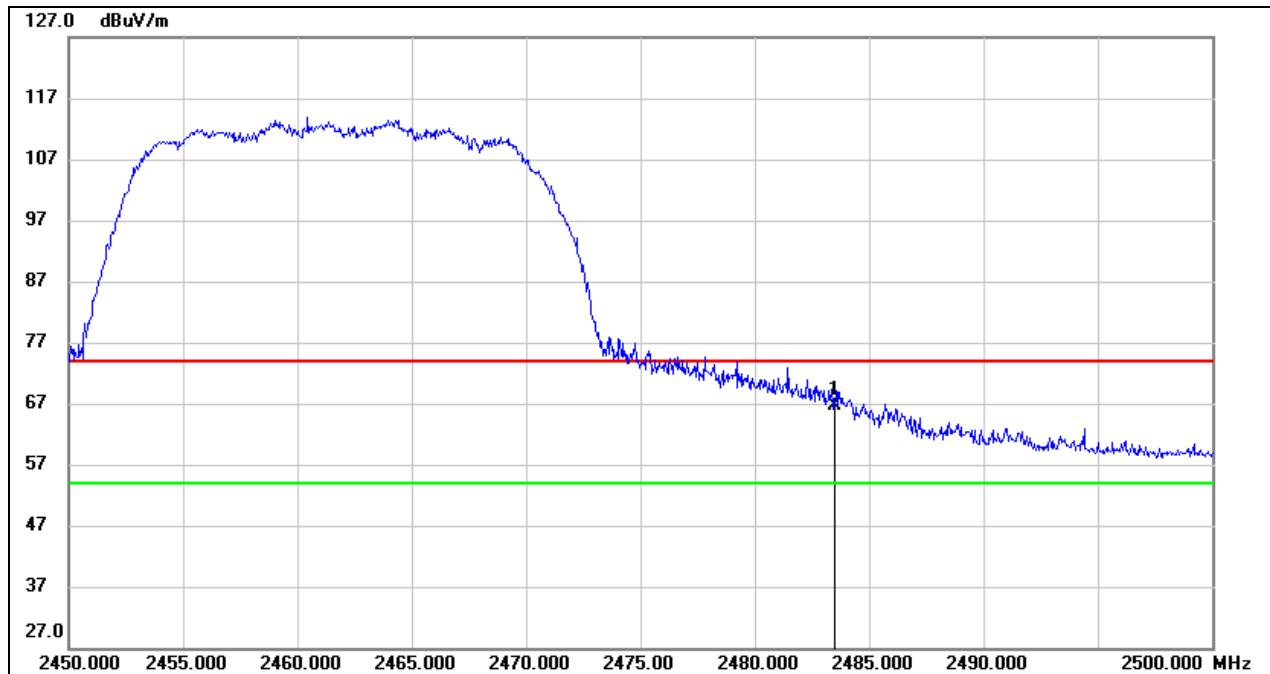Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)PEAK

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	32.87	33.71	66.58	74.00	-7.42	peak

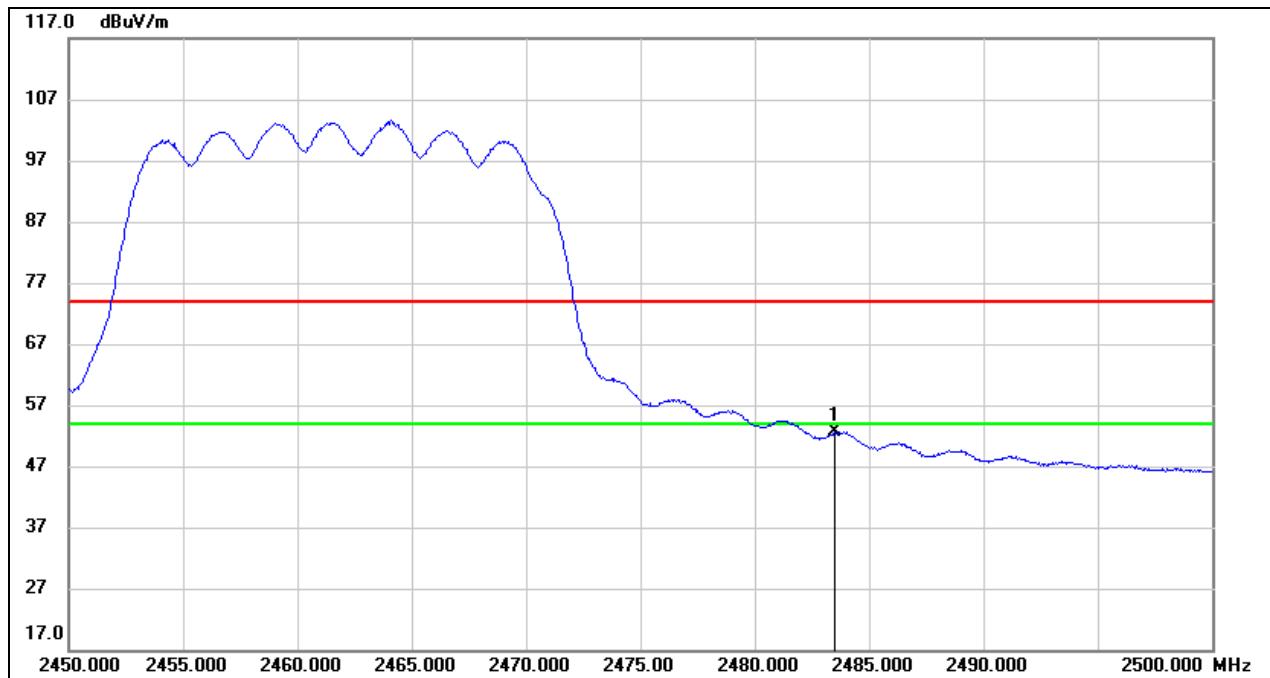Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.96	33.71	52.67	54.00	-1.33	AVG


Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.  
Note: All modes have been tested, only the worst data was recorded in the report.

### 8.1.4. 802.11n HT40 MIMO MODE

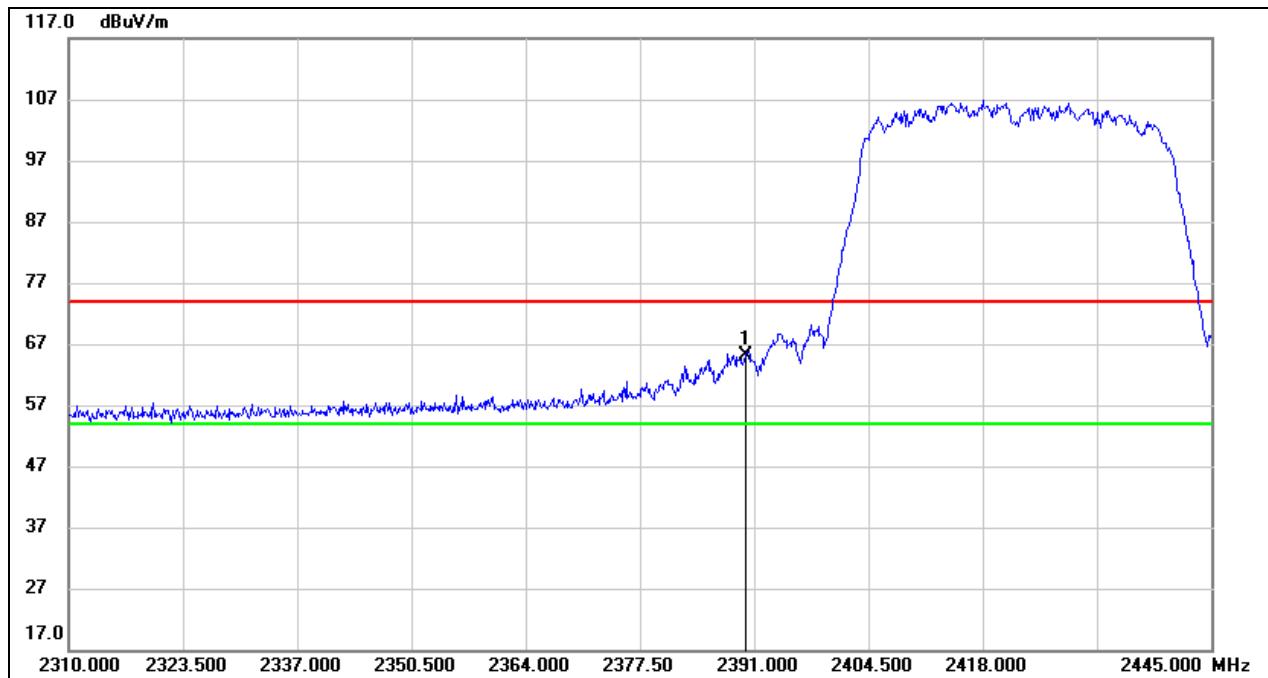
#### RESTRICTED BANDEdge (LOW CHANNEL, HORIZONTAL)

##### PEAK




No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	31.71	33.35	65.06	74.00	-8.94	peak

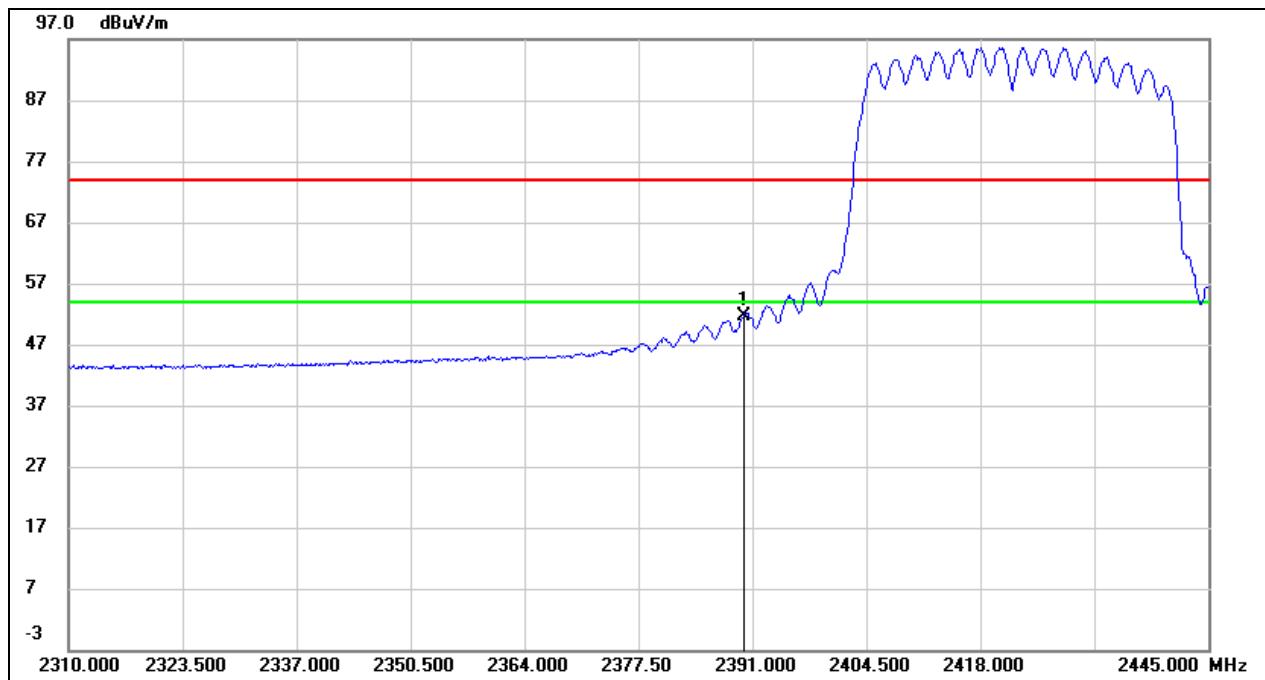Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	18.36	33.35	51.71	54.00	-2.29	AVG

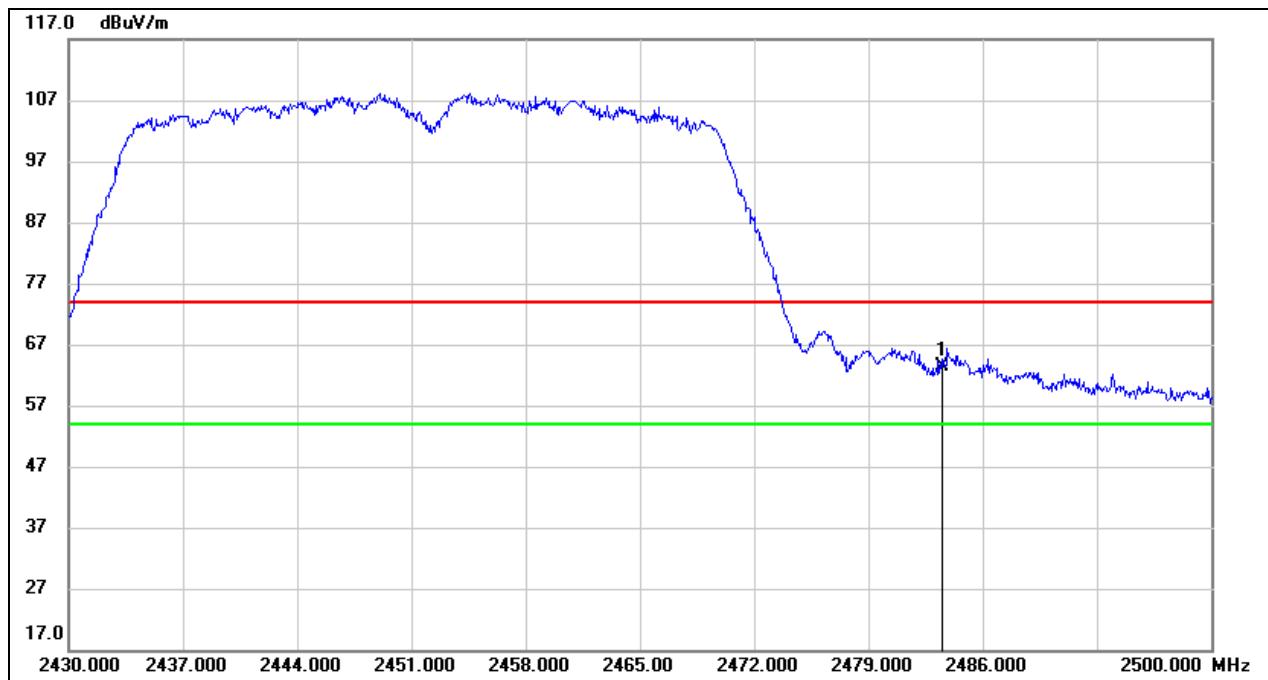Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)PEAK

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	29.68	33.71	63.39	74.00	-10.61	peak

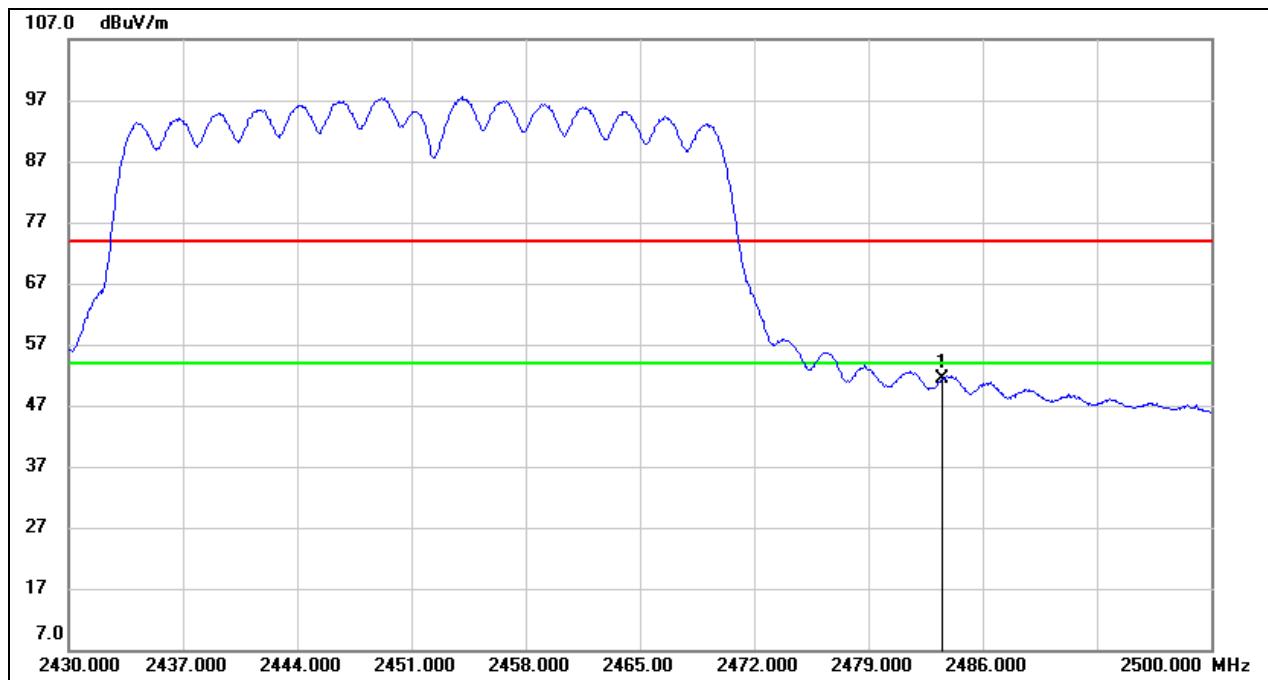Note: 1. Measurement = Reading Level + Correct Factor.  
2. Peak: Peak detector.  
3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.77	33.71	51.48	54.00	-2.52	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. AVG: VBW=1/Ton, where: Ton is the transmitting duration.  
3. For the transmitting duration, please refer to clause 7.1.  
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.  
Note: All modes have been tested, only the worst data was recorded in the report.

## 8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)
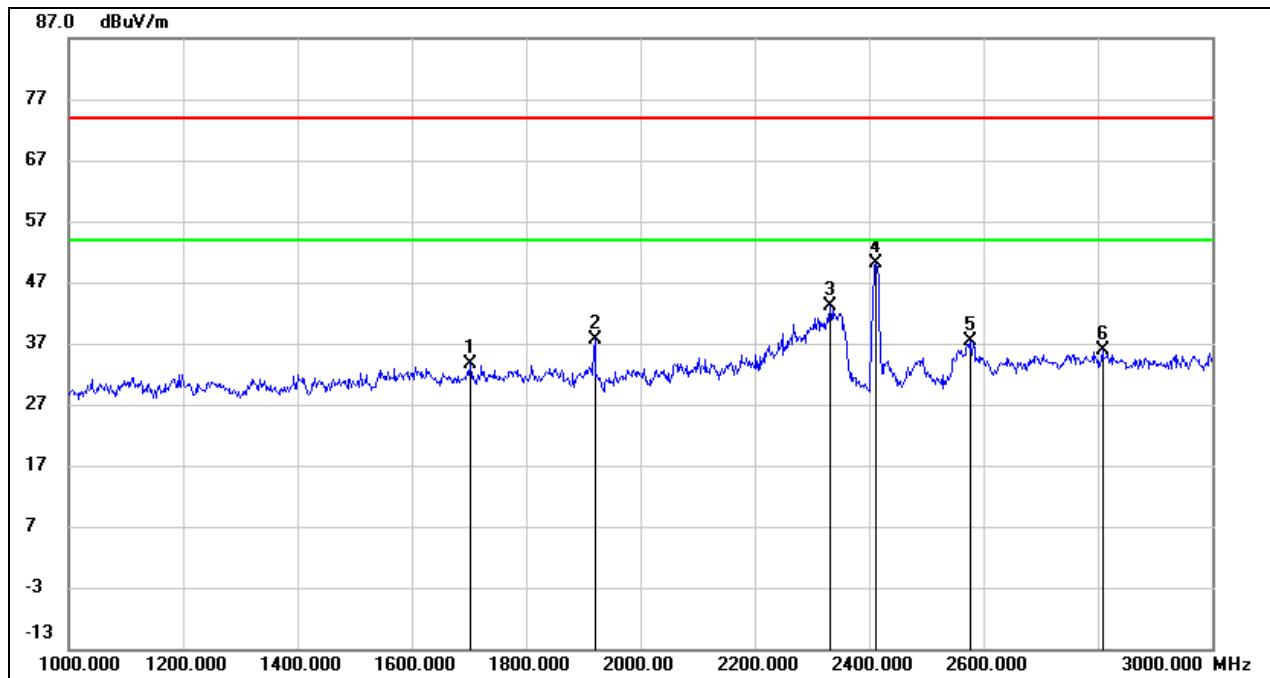
### 8.2.1. 802.11b SISO MODE

#### ANTENNA 1 TEST RESULTS (WORST CASE)


#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1702.250	44.96	-11.37	33.59	74.00	-40.41	peak
2	1920.000	48.74	-11.02	37.72	74.00	-36.28	peak
3	2332.500	52.44	-9.35	43.09	74.00	-30.91	peak
4	2412.000	59.16	-9.03	50.13	/	/	Fundamental
5	2578.250	45.95	-8.68	37.27	74.00	-36.73	peak
6	2809.250	43.49	-7.66	35.83	74.00	-38.17	peak

Note:

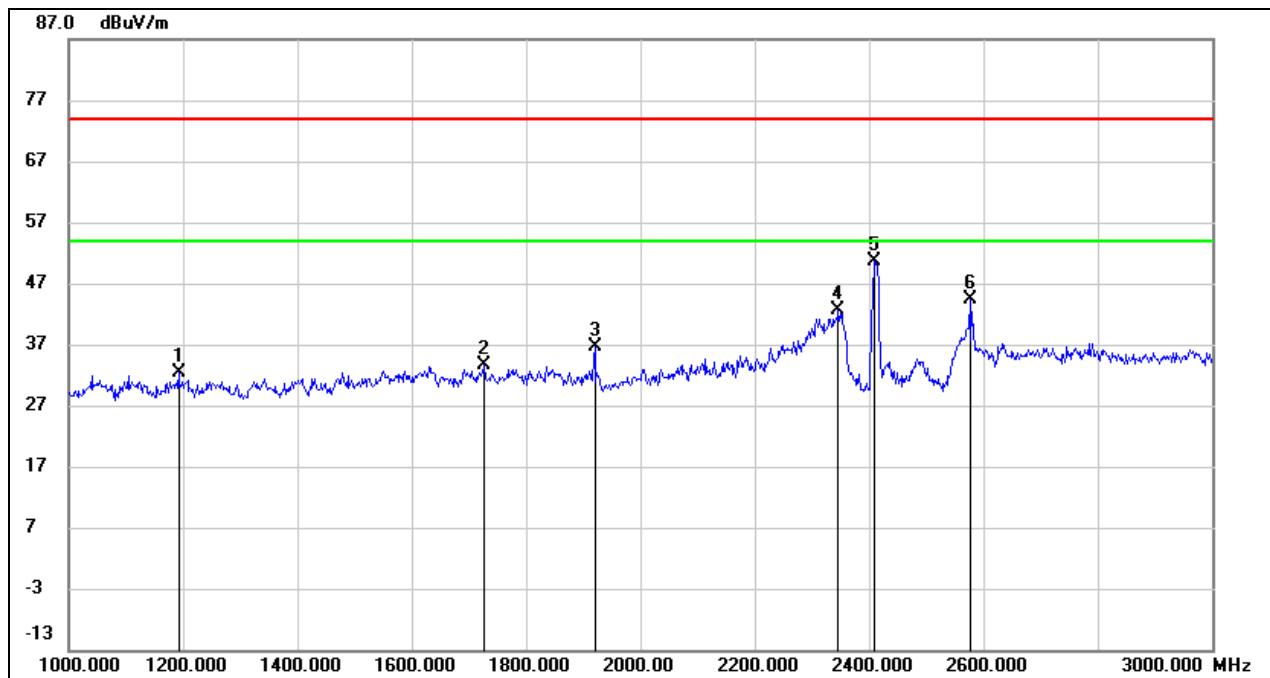
1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1192.750	46.17	-13.81	32.36	74.00	-41.64	peak
2	1727.000	44.85	-11.22	33.63	74.00	-40.37	peak
3	1920.250	47.72	-11.02	36.70	74.00	-37.30	peak
4	2347.750	52.02	-9.30	42.72	74.00	-31.28	peak
5	2412.000	59.78	-9.04	50.74	/	/	Fundamental
6	2576.500	53.16	-8.69	44.47	74.00	-29.53	peak


Note:

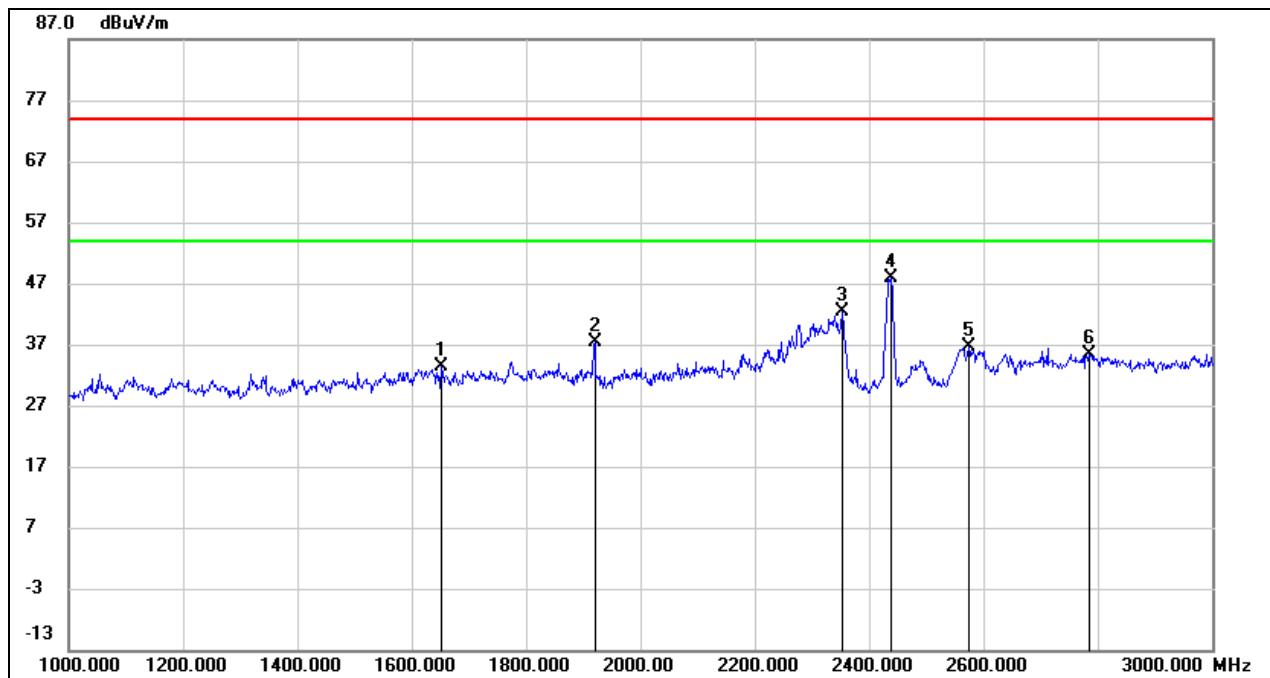1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1653.000	45.12	-11.67	33.45	74.00	-40.55	peak
2	1920.000	48.45	-11.02	37.43	74.00	-36.57	peak
3	2354.250	51.54	-9.26	42.28	74.00	-31.72	peak
4	2437.000	56.84	-8.98	47.86	/	/	Fundamental
5	2575.500	45.40	-8.69	36.71	74.00	-37.29	peak
6	2784.250	43.10	-7.77	35.33	74.00	-38.67	peak

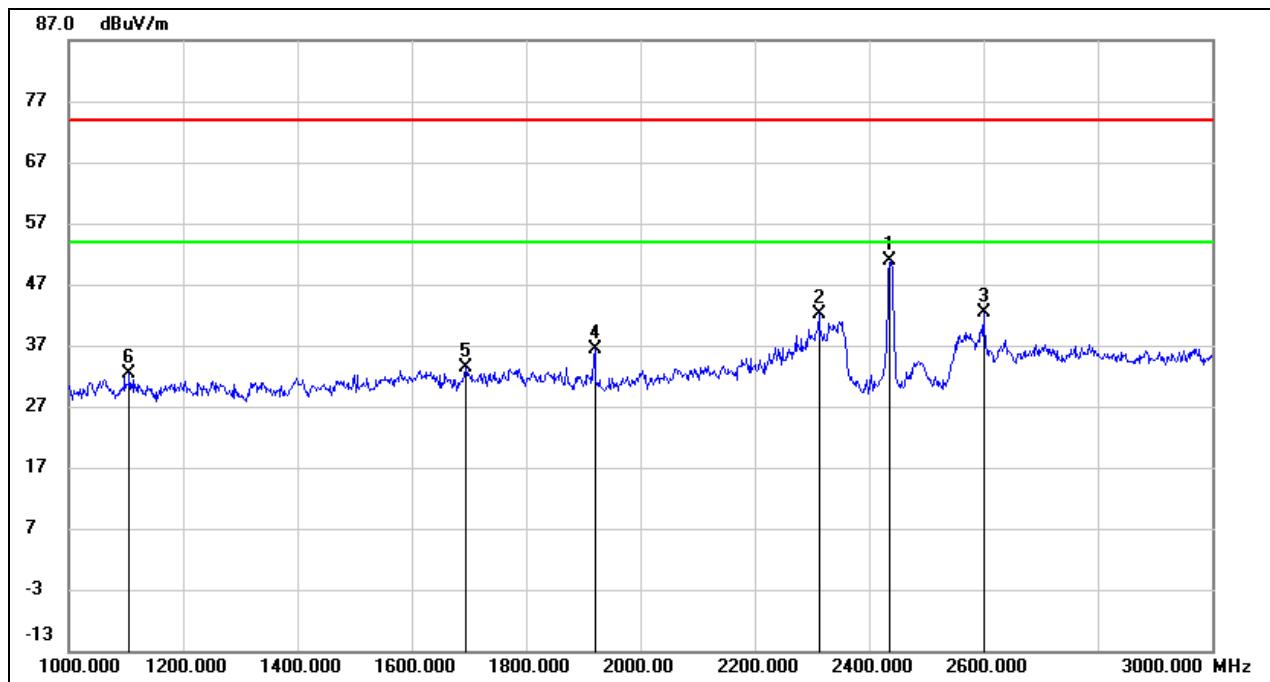
Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2437.000	59.85	-8.98	50.87	/	/	Fundamental
2	2312.500	51.65	-9.43	42.22	74.00	-31.78	peak
3	2601.000	50.91	-8.64	42.27	74.00	-31.73	peak
4	1920.500	47.29	-11.02	36.27	74.00	-37.73	peak
5	1694.750	44.79	-11.42	33.37	74.00	-40.63	peak
6	1106.500	46.72	-14.38	32.34	74.00	-41.66	peak

Note:

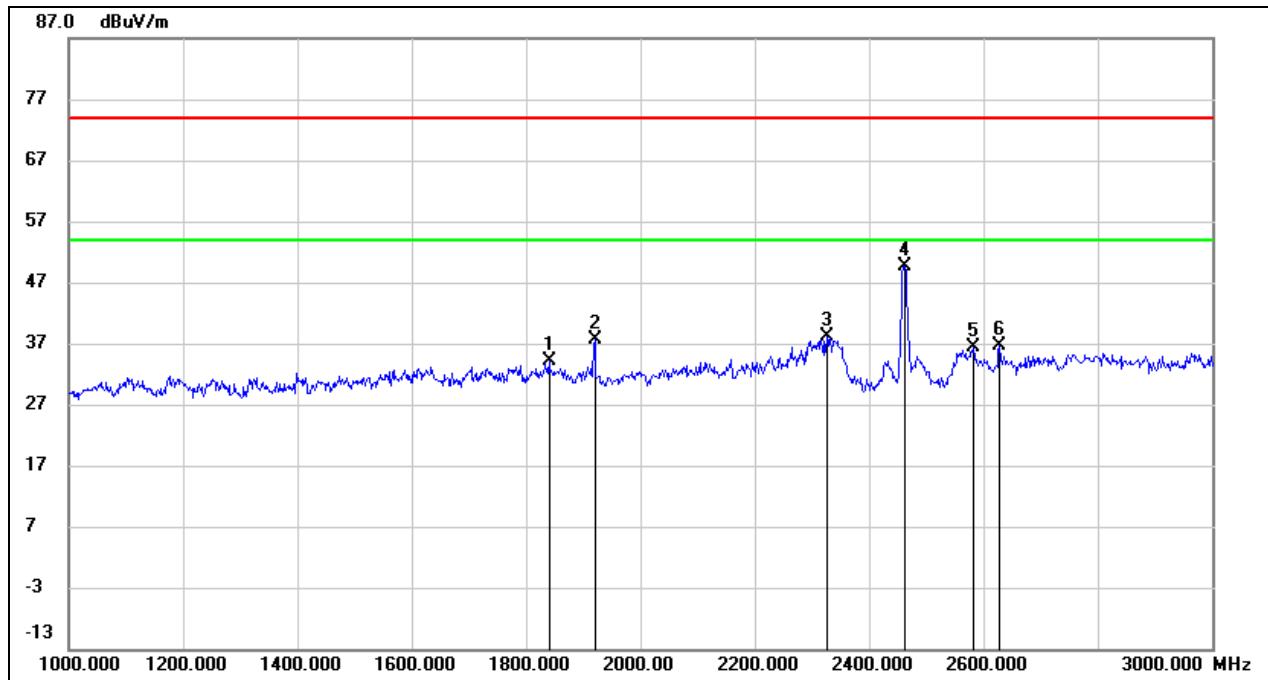
1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1841.500	44.87	-10.86	34.01	74.00	-39.99	peak
2	1920.250	48.53	-11.02	37.51	74.00	-36.49	peak
3	2326.250	47.39	-9.38	38.01	74.00	-35.99	peak
4	2462.000	58.60	-8.90	49.70	/	/	Fundamental
5	2583.500	45.16	-8.67	36.49	74.00	-37.51	peak
6	2628.250	45.05	-8.51	36.54	74.00	-37.46	peak

Note:

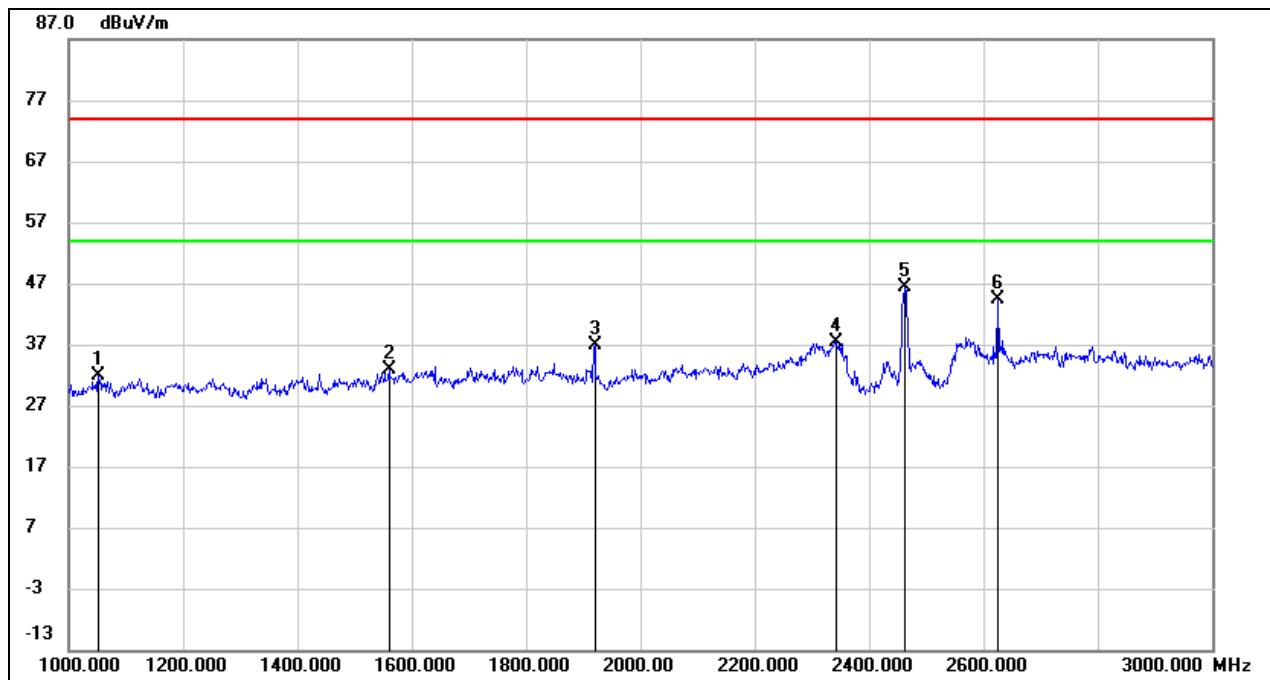1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1053.000	46.56	-14.73	31.83	74.00	-42.17	peak
2	1561.250	45.03	-12.20	32.83	74.00	-41.17	peak
3	1920.000	47.81	-11.02	36.79	74.00	-37.21	peak
4	2342.000	46.75	-9.31	37.44	74.00	-36.56	peak
5	2462.000	55.19	-8.90	46.29	/	/	Fundamental
6	2625.250	52.86	-8.52	44.34	74.00	-29.66	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.


Note: All modes, channels and antenna have been tested, only the worst data was recorded in the report.

### 8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)
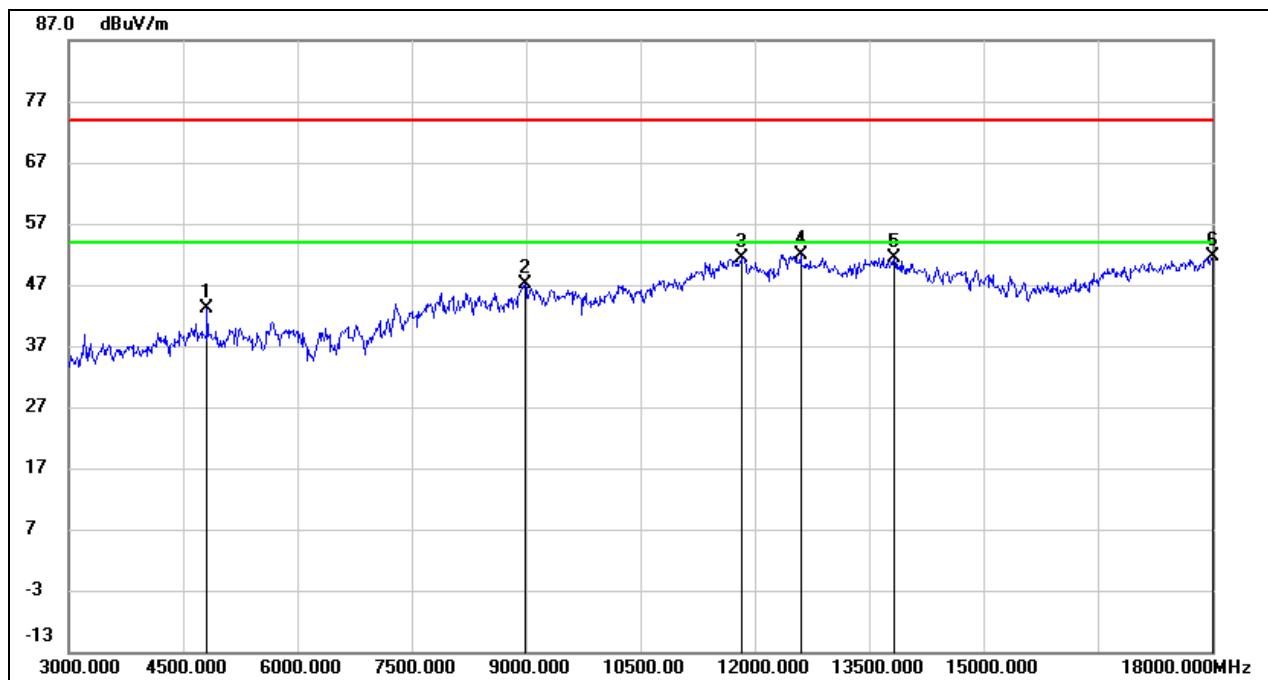
#### 8.3.1. 802.11b SISO MODE

##### ANTENNA 2 TEST RESULTS (WORST CASE)


##### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.375	43.72	-0.64	43.08	74.00	-30.92	peak
2	8986.875	37.08	9.98	47.06	74.00	-26.94	peak
3	11835.000	34.17	17.29	51.46	74.00	-22.54	peak
4	12607.500	35.30	16.64	51.94	74.00	-22.06	peak
5	13839.375	32.76	18.73	51.49	74.00	-22.51	peak
6	18000.000	28.37	23.37	51.74	74.00	-22.26	peak


Note:

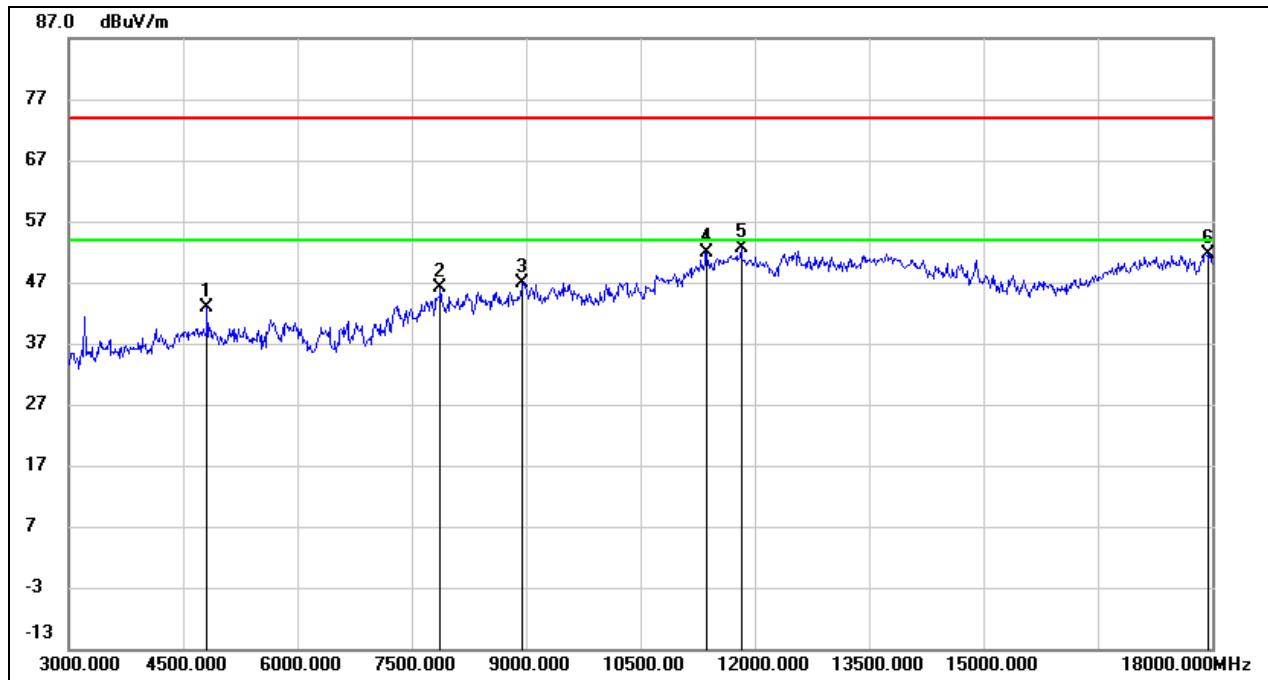1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4822.500	43.46	-0.64	42.82	74.00	-31.18	peak
2	7886.250	38.65	7.37	46.02	74.00	-27.98	peak
3	8958.750	37.29	9.68	46.97	74.00	-27.03	peak
4	11375.625	36.13	15.72	51.85	74.00	-22.15	peak
5	11823.750	35.26	17.32	52.58	74.00	-21.42	peak
6	17945.625	28.44	23.23	51.67	74.00	-22.33	peak

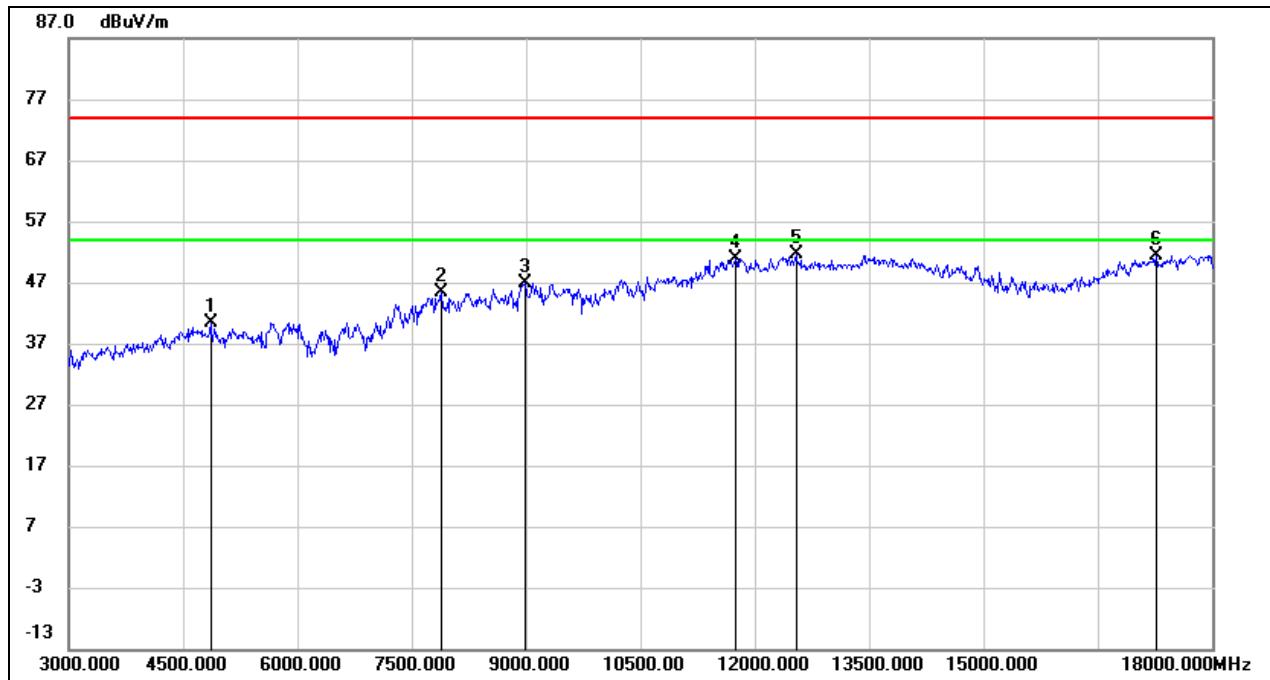Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4873.125	41.07	-0.60	40.47	74.00	-33.53	peak
2	7897.500	37.94	7.35	45.29	74.00	-28.71	peak
3	8990.625	36.91	10.03	46.94	74.00	-27.06	peak
4	11750.625	33.80	17.09	50.89	74.00	-23.11	peak
5	12549.375	34.94	16.65	51.59	74.00	-22.41	peak
6	17276.250	31.68	19.78	51.46	74.00	-22.54	peak

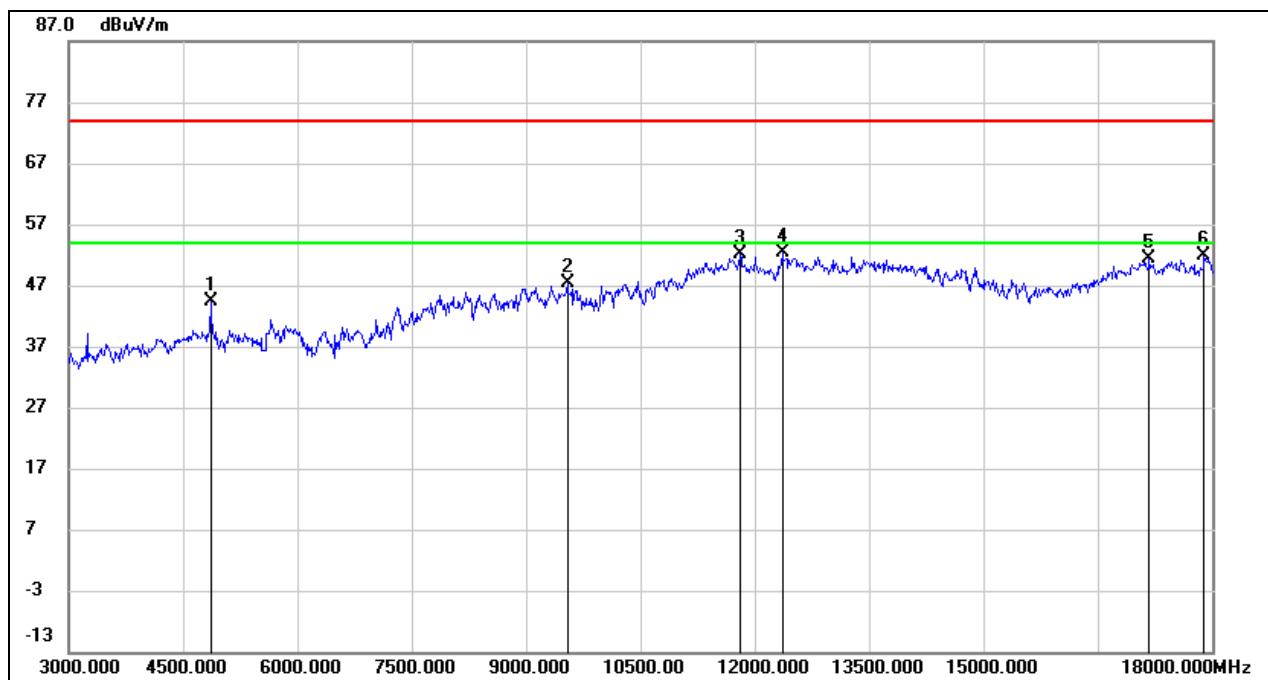Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4873.125	44.98	-0.60	44.38	74.00	-29.62	peak
2	9540.000	36.90	10.41	47.31	74.00	-26.69	peak
3	11814.375	34.71	17.33	52.04	74.00	-21.96	peak
4	12367.500	35.50	16.86	52.36	74.00	-21.64	peak
5	17188.125	31.74	19.67	51.41	74.00	-22.59	peak
6	17904.375	28.71	23.13	51.84	74.00	-22.16	peak

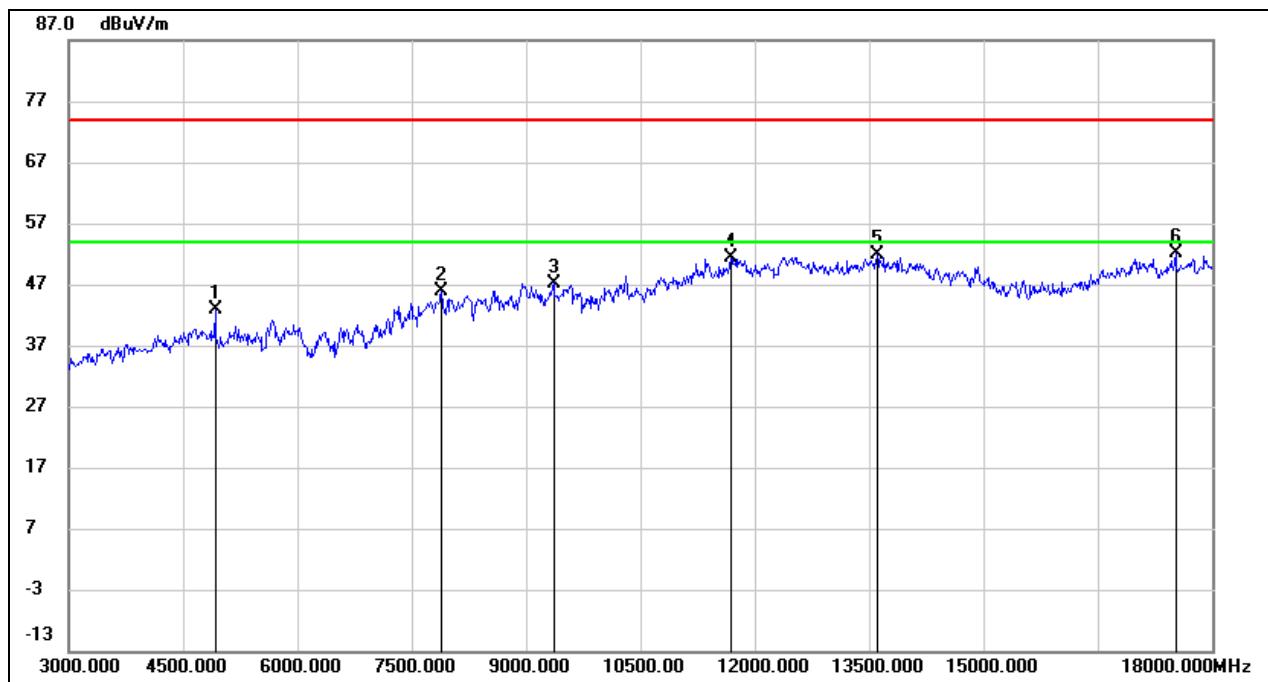Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4923.750	43.54	-0.56	42.98	74.00	-31.02	peak
2	7891.875	38.45	7.36	45.81	74.00	-28.19	peak
3	9365.625	37.33	9.92	47.25	74.00	-26.75	peak
4	11686.875	34.54	16.75	51.29	74.00	-22.71	peak
5	13605.000	33.38	18.38	51.76	74.00	-22.24	peak
6	17525.625	31.82	20.29	52.11	74.00	-21.89	peak

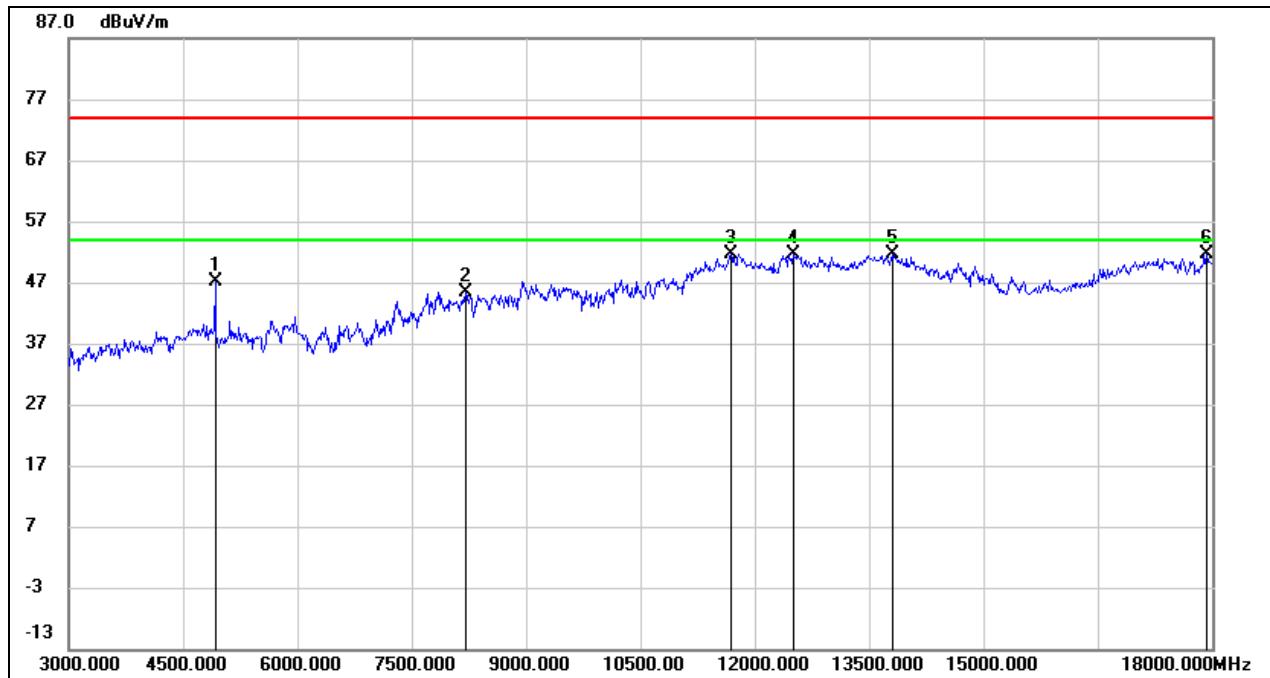Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4923.750	47.77	-0.56	47.21	74.00	-26.79	peak
2	8210.625	36.67	8.68	45.35	74.00	-28.65	peak
3	11692.500	34.75	16.78	51.53	74.00	-22.47	peak
4	12517.500	34.94	16.66	51.60	74.00	-22.40	peak
5	13815.000	32.76	18.75	51.51	74.00	-22.49	peak
6	17934.375	28.43	23.21	51.64	74.00	-22.36	peak


Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.

### 8.3.2. 802.11g SISO MODE

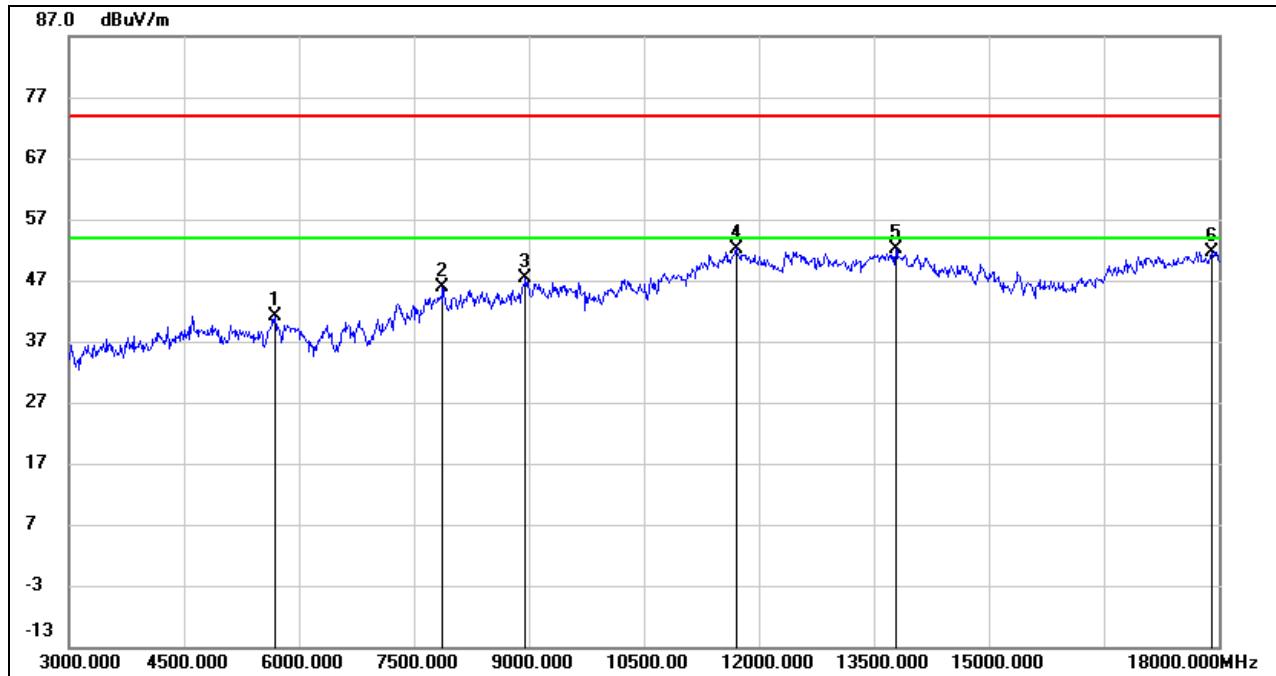
#### ANTENNA 2 TEST RESULTS (WORST CASE)

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)




No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5686.875	39.80	1.44	41.24	74.00	-32.76	peak
2	7882.500	38.45	7.39	45.84	74.00	-28.16	peak
3	8964.375	37.52	9.74	47.26	74.00	-26.74	peak
4	11713.125	35.35	16.90	52.25	74.00	-21.75	peak
5	13798.125	33.37	18.78	52.15	74.00	-21.85	peak
6	17917.500	28.50	23.16	51.66	74.00	-22.34	peak

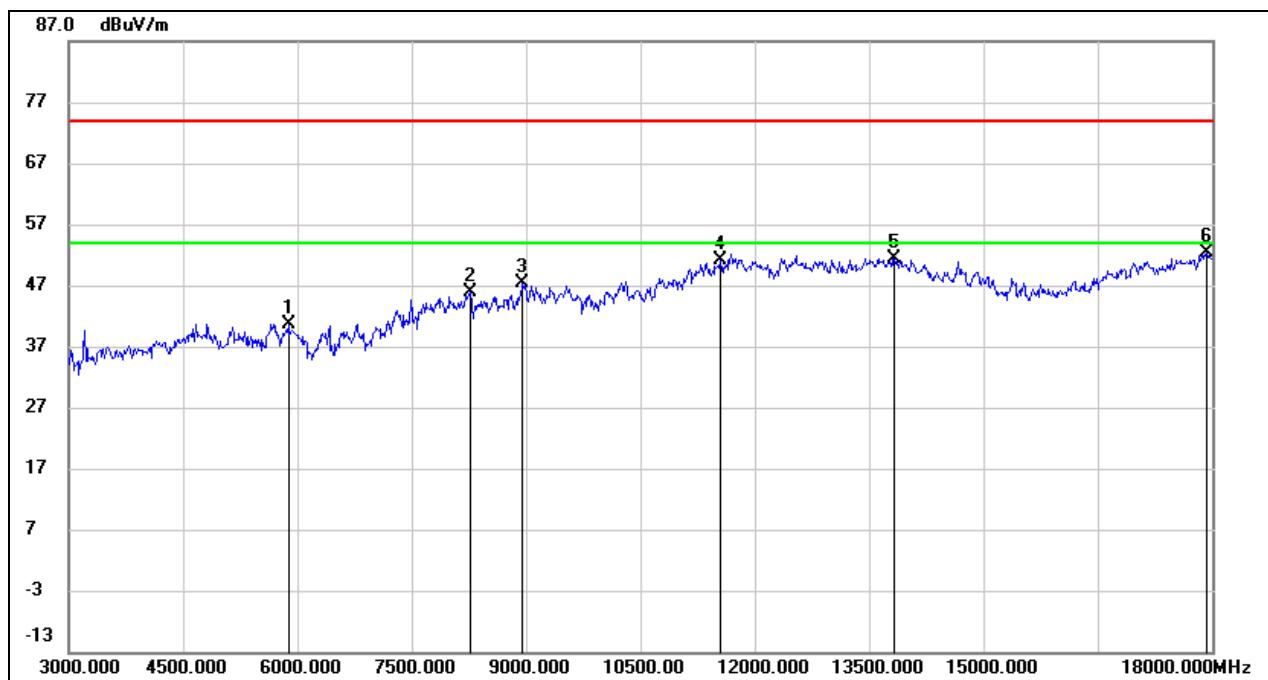Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.  
5. For the transmitting duration, please refer to clause 7.1.  
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.96	1.75	40.71	74.00	-33.29	peak
2	8274.375	37.50	8.42	45.92	74.00	-28.08	peak
3	8962.500	37.60	9.71	47.31	74.00	-26.69	peak
4	11559.375	34.96	16.24	51.20	74.00	-22.80	peak
5	13831.875	32.63	18.75	51.38	74.00	-22.62	peak
6	17934.375	29.25	23.21	52.46	74.00	-21.54	peak

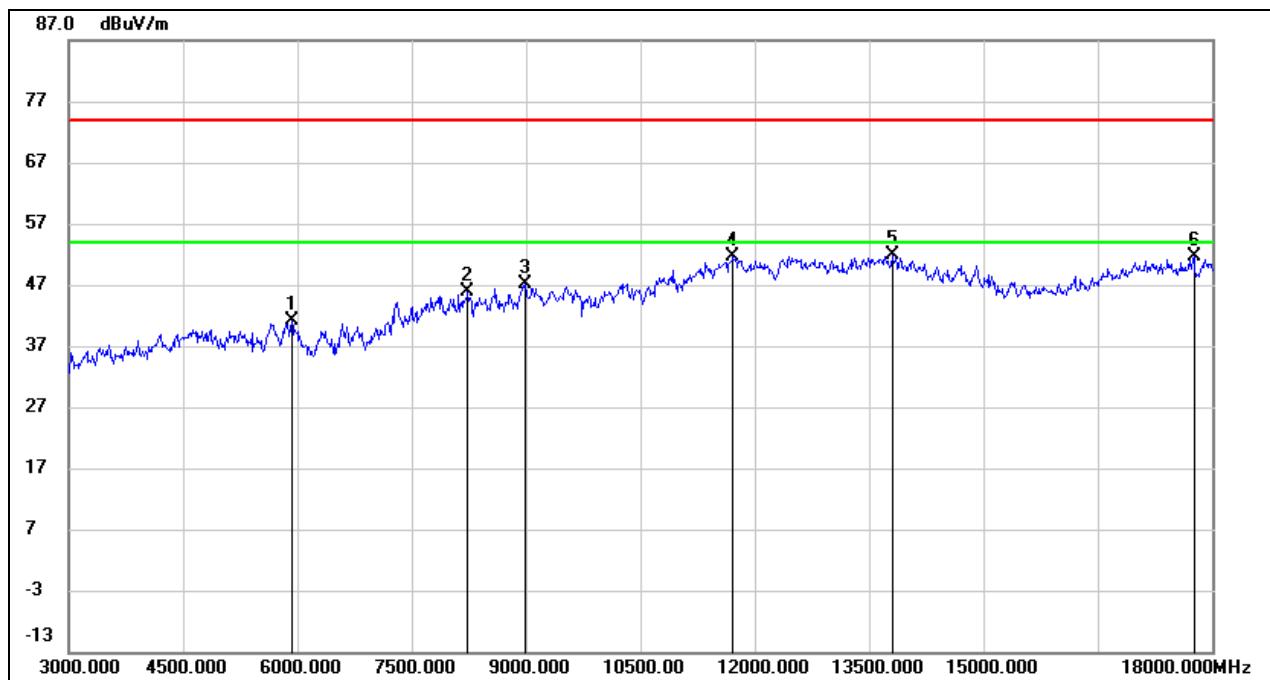
Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	39.19	1.93	41.12	74.00	-32.88	peak
2	8244.375	37.30	8.54	45.84	74.00	-28.16	peak
3	8986.875	37.21	9.98	47.19	74.00	-26.81	peak
4	11720.625	34.65	16.93	51.58	74.00	-22.42	peak
5	13803.750	33.09	18.78	51.87	74.00	-22.13	peak
6	17769.375	29.00	22.54	51.54	74.00	-22.46	peak


Note:

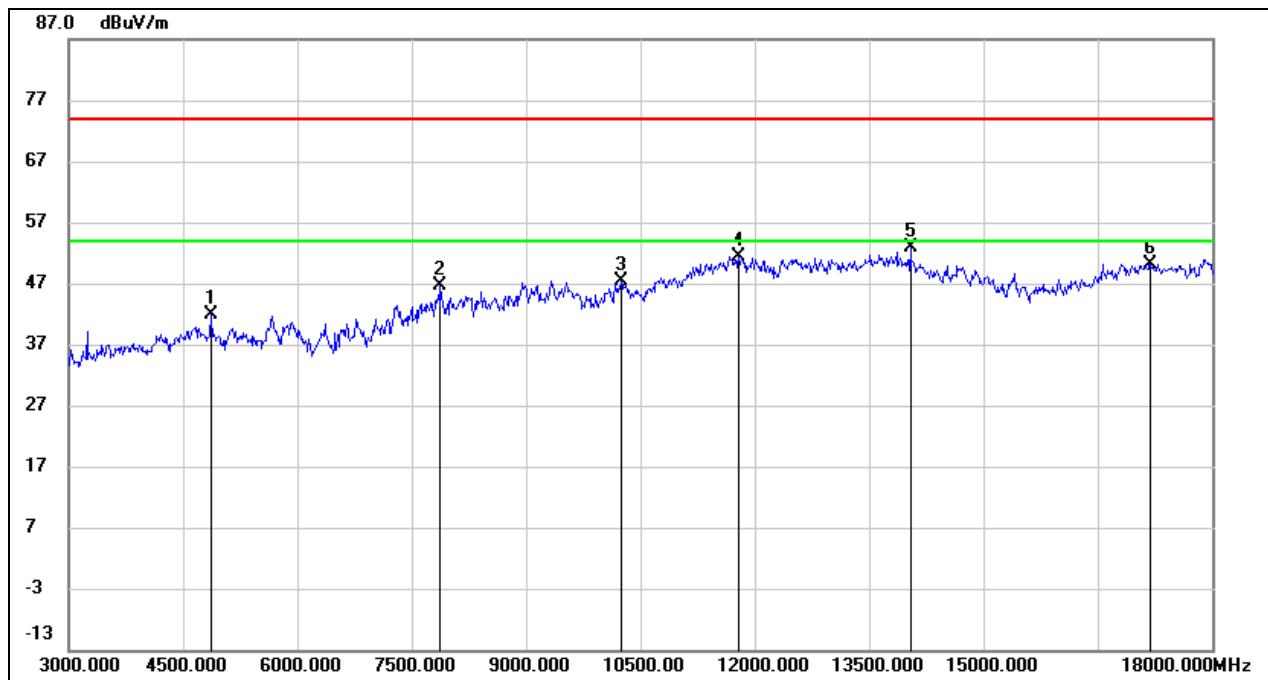1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4871.250	42.51	-0.60	41.91	74.00	-32.09	peak
2	7888.125	39.26	7.36	46.62	74.00	-27.38	peak
3	10258.125	35.94	11.49	47.43	74.00	-26.57	peak
4	11803.125	34.11	17.34	51.45	74.00	-22.55	peak
5	14051.250	34.51	18.37	52.88	74.00	-21.12	peak
6	17191.875	30.53	19.69	50.22	74.00	-23.78	peak

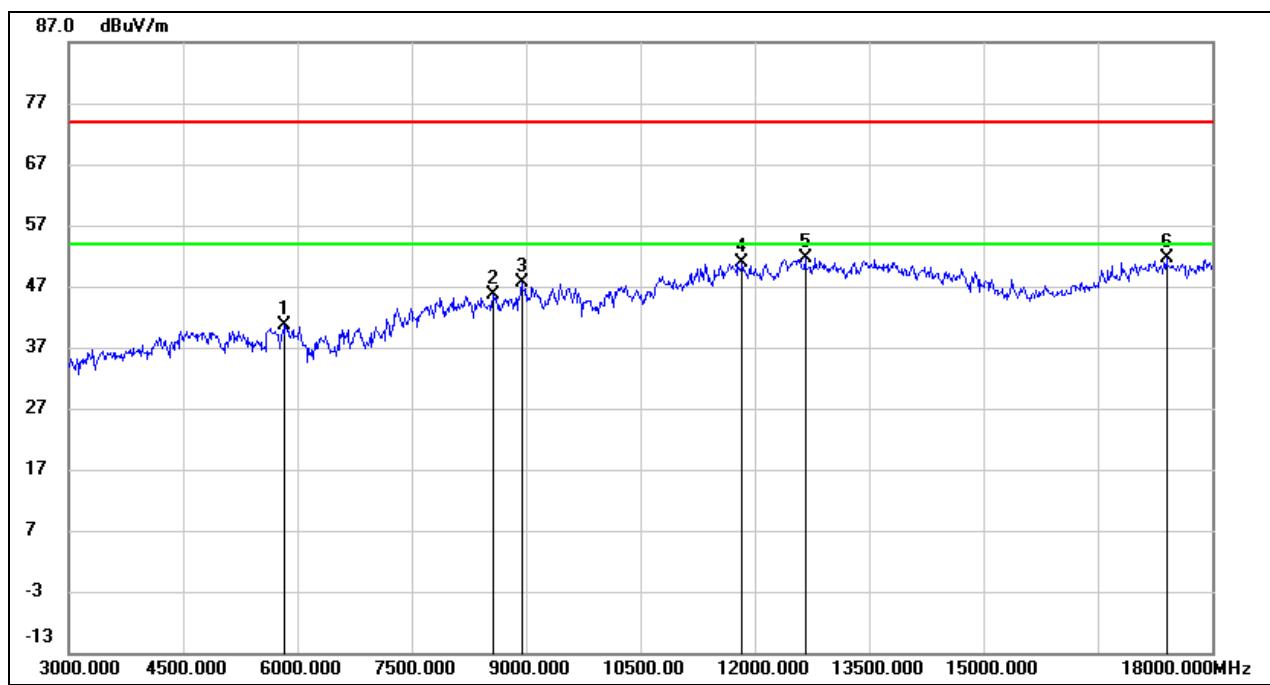
Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5846.250	38.94	1.62	40.56	74.00	-33.44	peak
2	8570.625	37.77	7.87	45.64	74.00	-28.36	peak
3	8940.000	38.27	9.47	47.74	74.00	-26.26	peak
4	11835.000	33.63	17.29	50.92	74.00	-23.08	peak
5	12671.250	34.95	16.79	51.74	74.00	-22.26	peak
6	17403.750	31.74	19.84	51.58	74.00	-22.42	peak

Note:

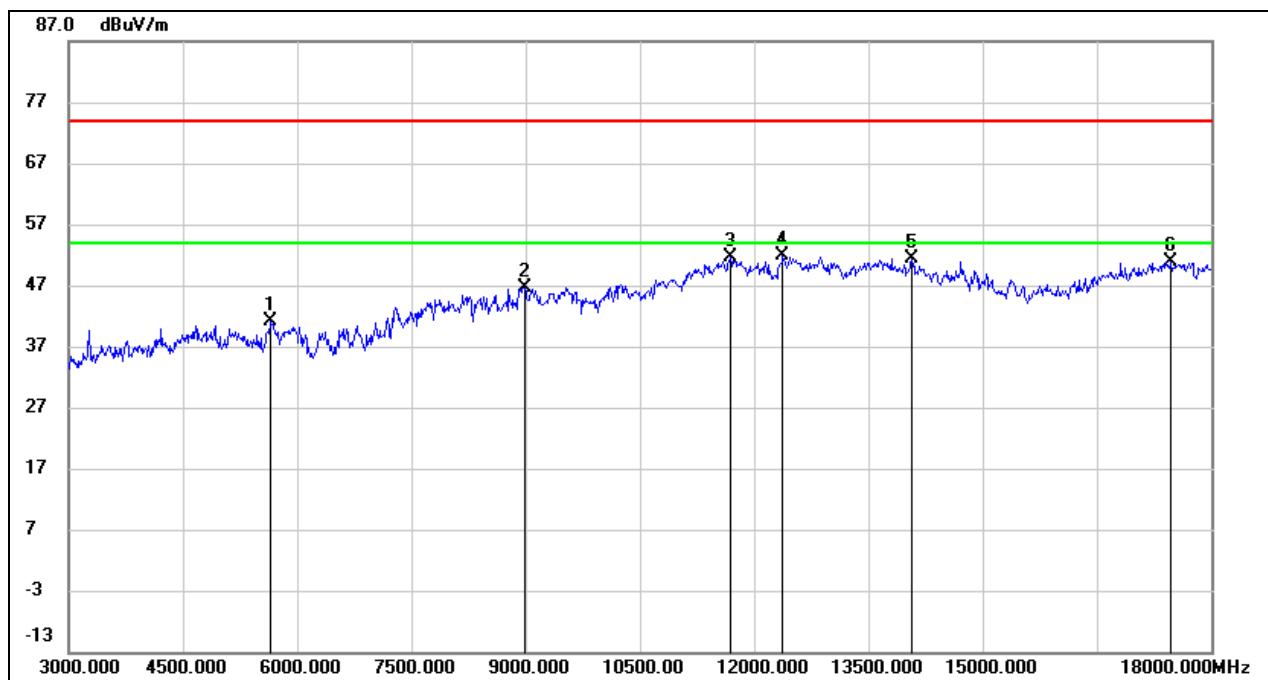1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5660.625	39.74	1.43	41.17	74.00	-32.83	peak
2	8990.625	36.70	10.03	46.73	74.00	-27.27	peak
3	11694.375	34.73	16.79	51.52	74.00	-22.48	peak
4	12375.000	34.99	16.85	51.84	74.00	-22.16	peak
5	14071.875	33.19	18.30	51.49	74.00	-22.51	peak
6	17476.875	30.72	20.07	50.79	74.00	-23.21	peak

Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.


## 8.3.3. 802.11n HT20 MIMO MODE

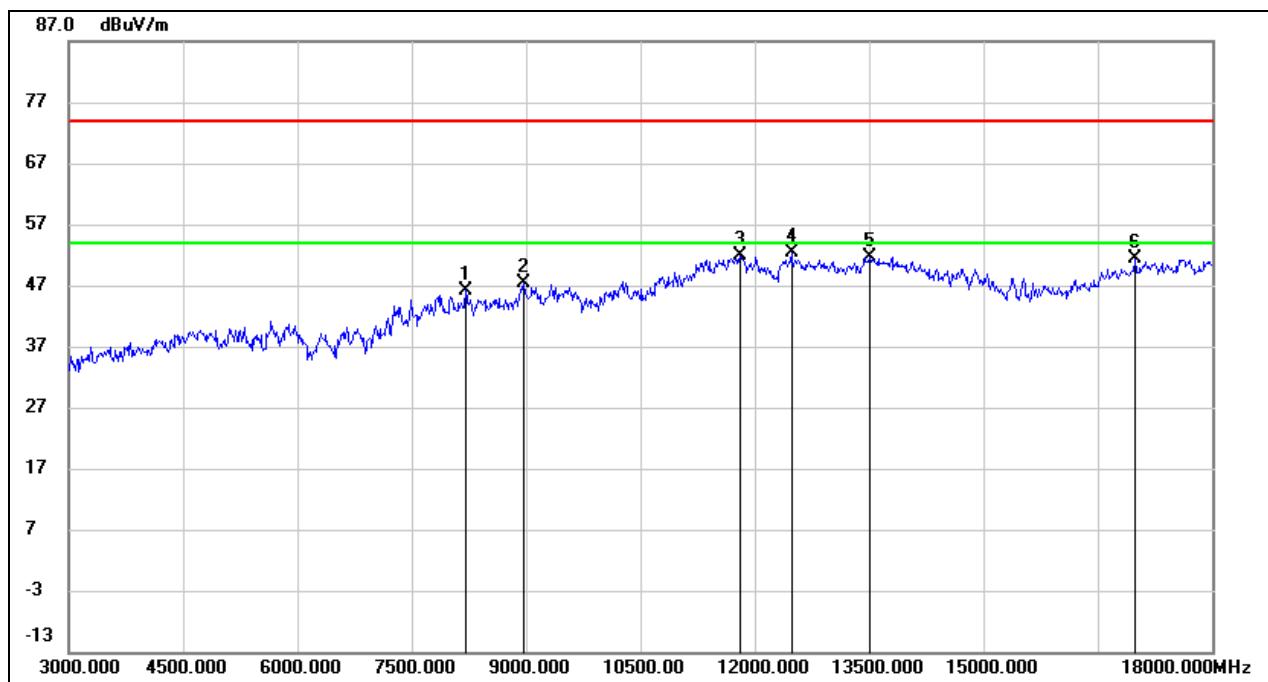HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8218.125	37.61	8.64	46.25	74.00	-27.75	peak
2	8973.750	37.42	9.84	47.26	74.00	-26.74	peak
3	11812.500	34.61	17.33	51.94	74.00	-22.06	peak
4	12481.875	35.74	16.71	52.45	74.00	-21.55	peak
5	13516.875	33.27	18.40	51.67	74.00	-22.33	peak
6	17006.250	32.81	18.57	51.38	74.00	-22.62	peak


Note:

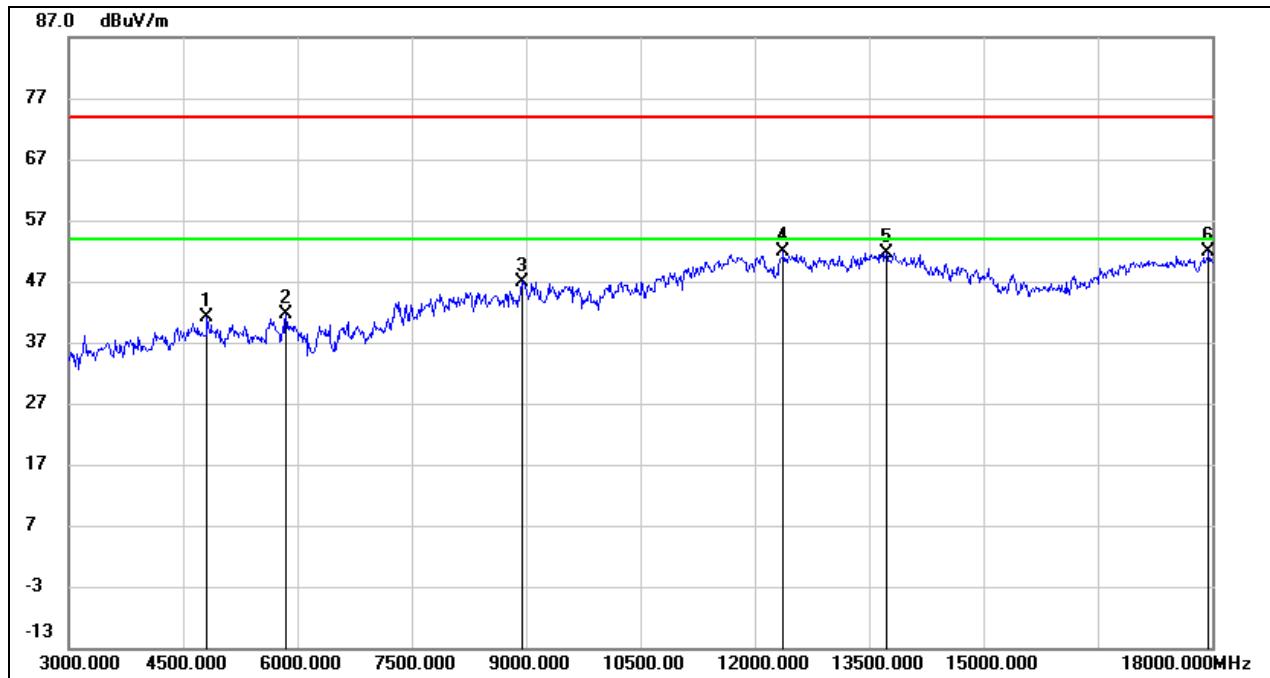1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4822.500	41.70	-0.64	41.06	74.00	-32.94	peak
2	5857.500	39.88	1.67	41.55	74.00	-32.45	peak
3	8940.000	37.45	9.47	46.92	74.00	-27.08	peak
4	12376.875	35.08	16.86	51.94	74.00	-22.06	peak
5	13736.250	32.93	18.65	51.58	74.00	-22.42	peak
6	17956.875	28.55	23.26	51.81	74.00	-22.19	peak

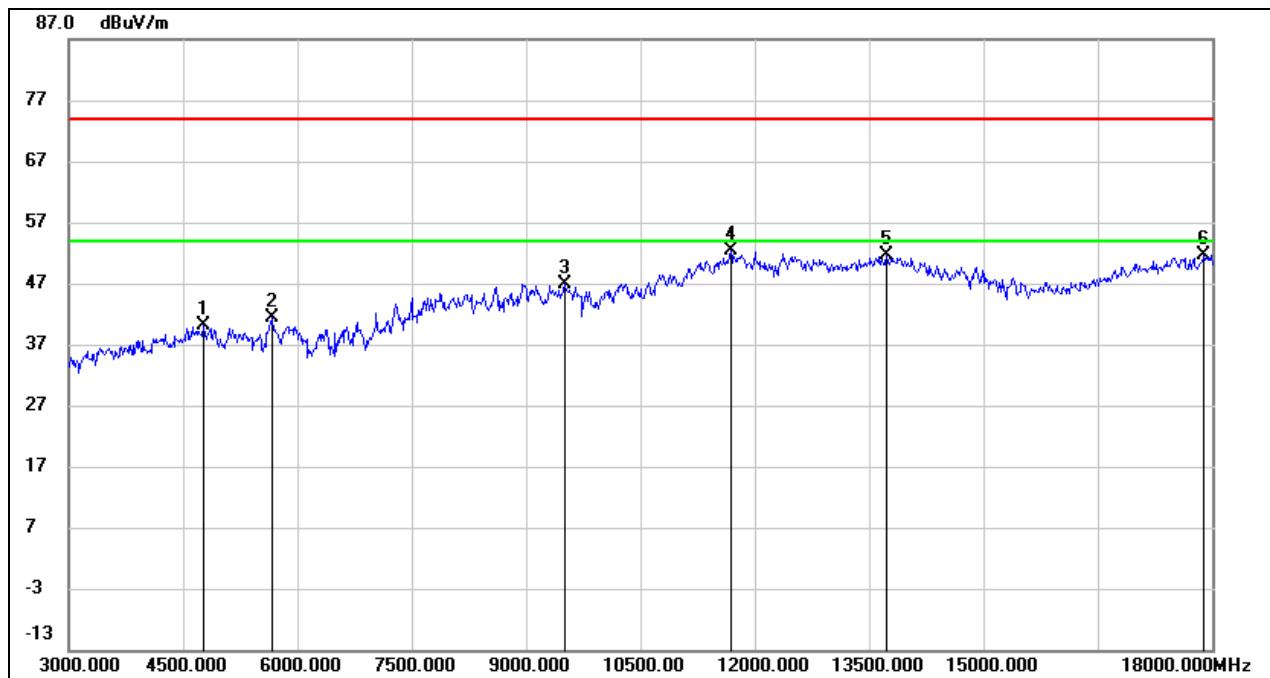Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4777.500	40.97	-0.76	40.21	74.00	-33.79	peak
2	5681.250	40.05	1.44	41.49	74.00	-32.51	peak
3	9510.000	36.45	10.36	46.81	74.00	-27.19	peak
4	11685.000	35.54	16.75	52.29	74.00	-21.71	peak
5	13738.125	32.98	18.64	51.62	74.00	-22.38	peak
6	17908.125	28.55	23.14	51.69	74.00	-22.31	peak

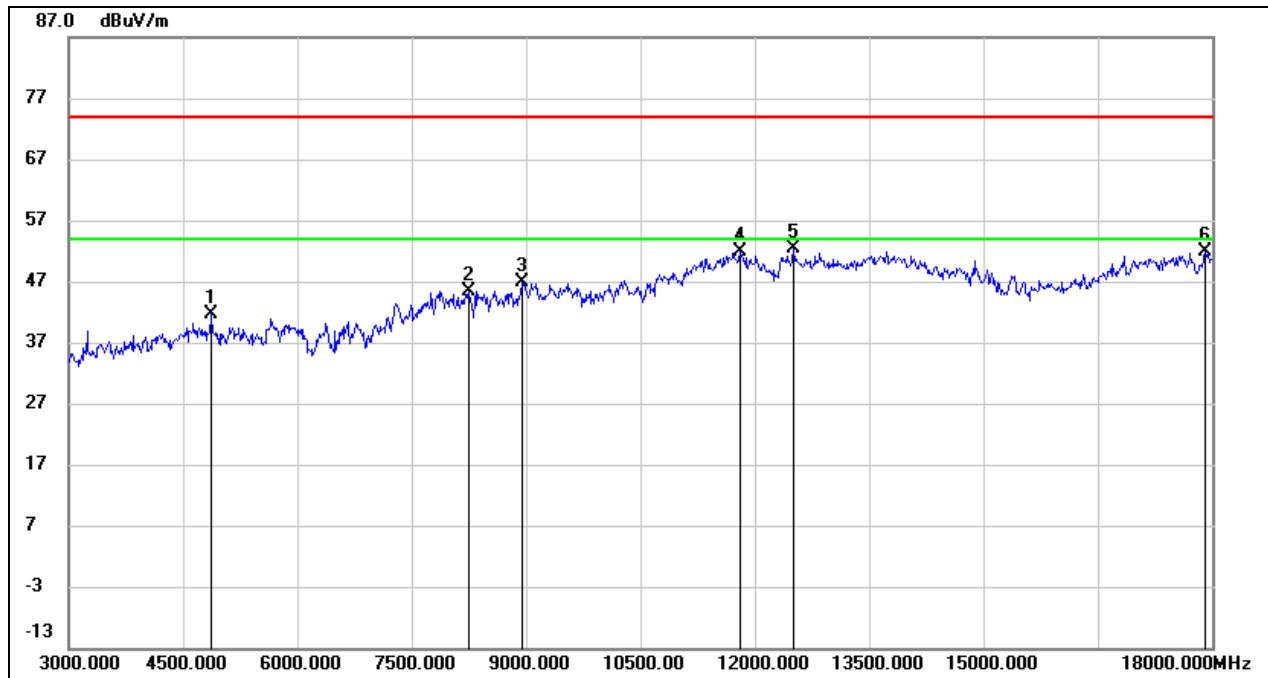Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	42.25	-0.59	41.66	74.00	-32.34	peak
2	8263.125	37.03	8.46	45.49	74.00	-28.51	peak
3	8945.625	37.30	9.53	46.83	74.00	-27.17	peak
4	11810.625	34.47	17.34	51.81	74.00	-22.19	peak
5	12521.250	35.77	16.67	52.44	74.00	-21.56	peak
6	17923.125	28.62	23.18	51.80	74.00	-22.20	peak

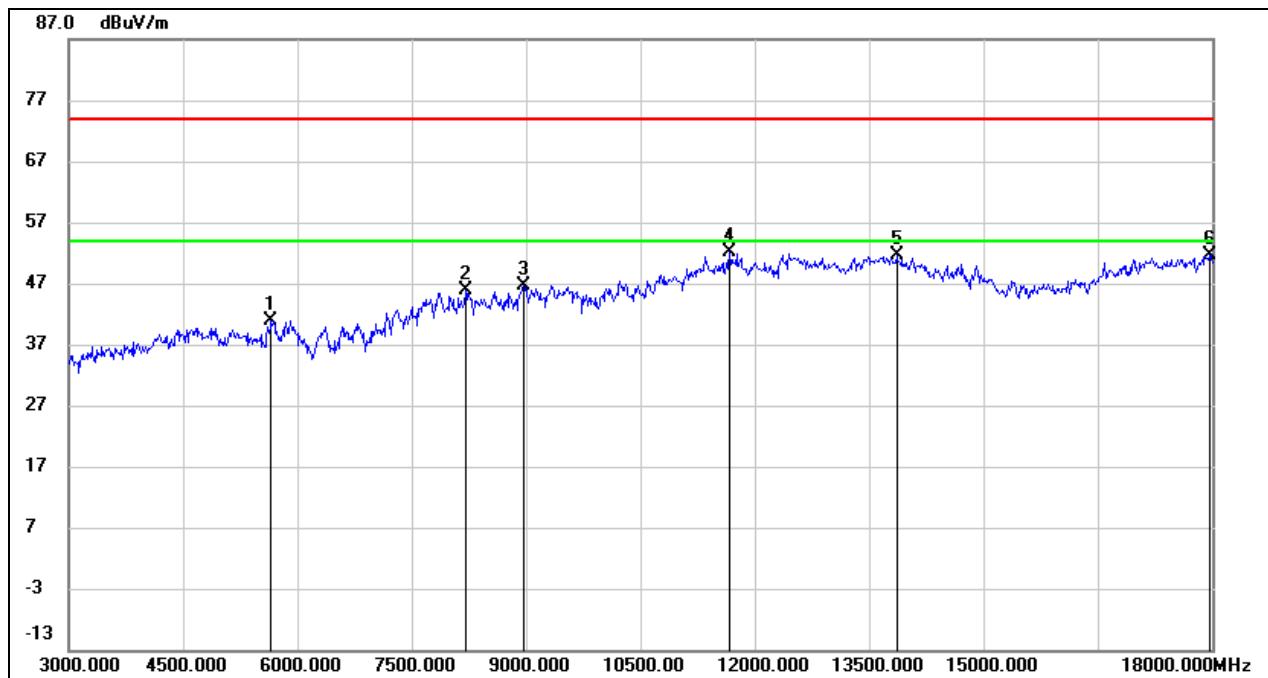Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5660.625	39.39	1.43	40.82	74.00	-33.18	peak
2	8216.250	37.29	8.65	45.94	74.00	-28.06	peak
3	8971.875	36.75	9.83	46.58	74.00	-27.42	peak
4	11679.375	35.33	16.71	52.04	74.00	-21.96	peak
5	13863.750	32.89	18.70	51.59	74.00	-22.41	peak
6	17975.625	28.44	23.30	51.74	74.00	-22.26	peak

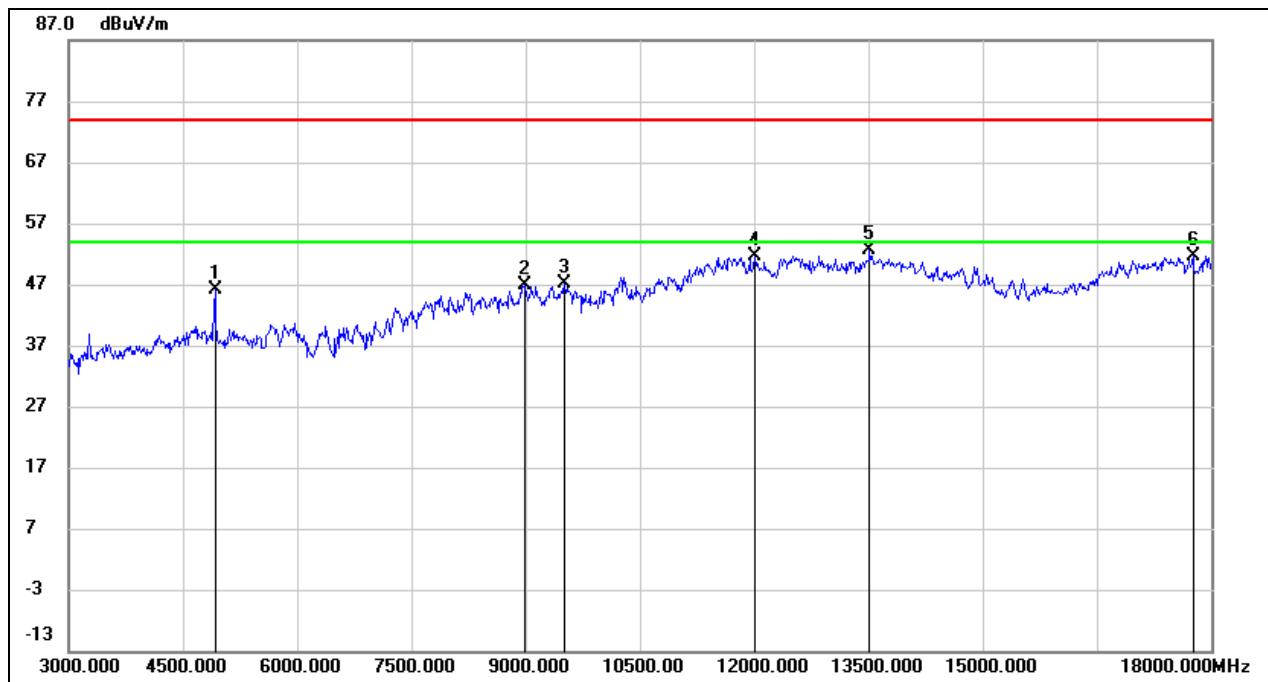Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4921.875	46.58	-0.56	46.02	74.00	-27.98	peak
2	8986.875	36.84	9.98	46.82	74.00	-27.18	peak
3	9513.750	36.82	10.36	47.18	74.00	-26.82	peak
4	12007.500	34.51	17.01	51.52	74.00	-22.48	peak
5	13515.000	34.33	18.40	52.73	74.00	-21.27	peak
6	17761.875	29.11	22.46	51.57	74.00	-22.43	peak

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

## 8.3.4. 802.11n HT40 MIMO MODE

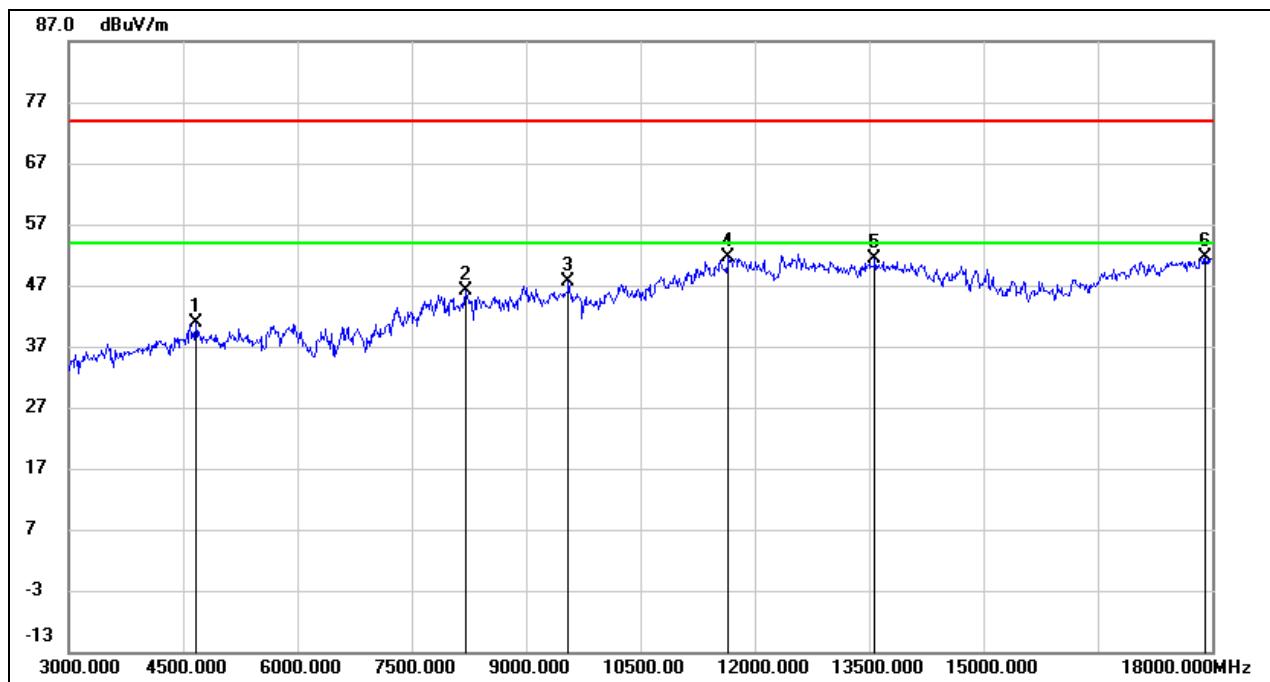HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4666.875	42.08	-1.31	40.77	74.00	-33.23	peak
2	8218.125	37.50	8.64	46.14	74.00	-27.86	peak
3	9562.500	37.23	10.44	47.67	74.00	-26.33	peak
4	11658.750	34.95	16.61	51.56	74.00	-22.44	peak
5	13580.625	32.90	18.38	51.28	74.00	-22.72	peak
6	17923.125	28.33	23.18	51.51	74.00	-22.49	peak

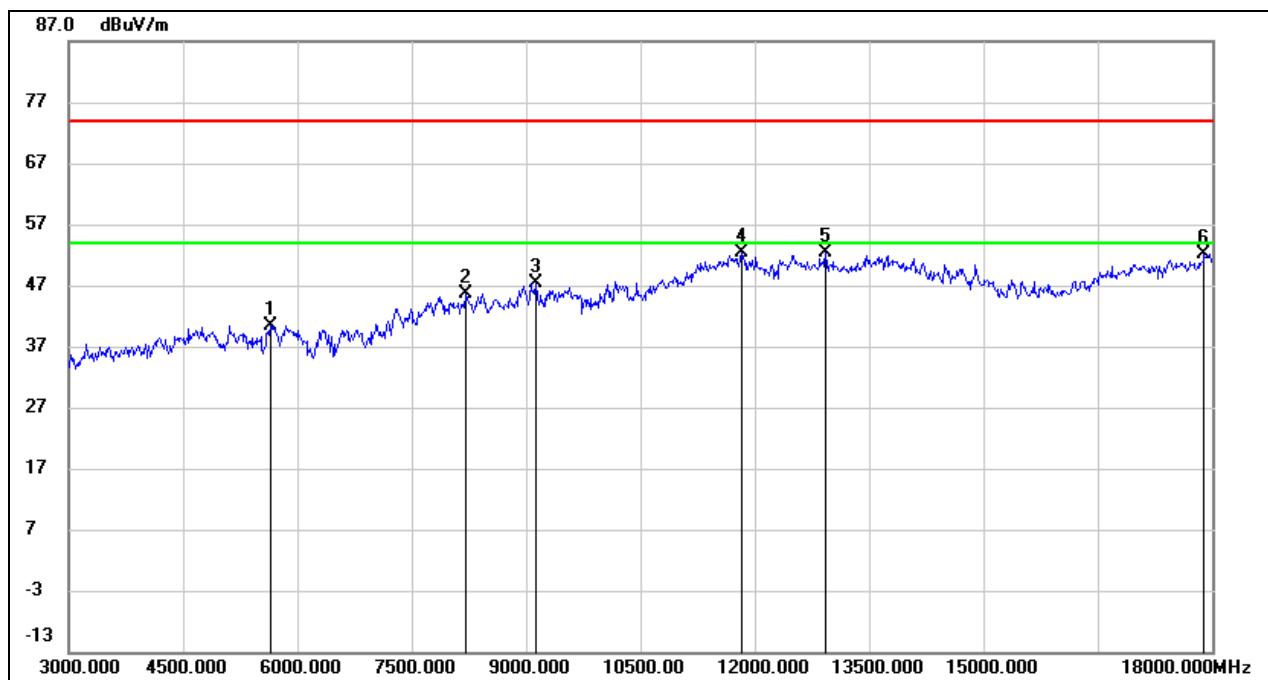Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5647.500	39.05	1.44	40.49	74.00	-33.51	peak
2	8218.125	36.96	8.64	45.60	74.00	-28.40	peak
3	9135.000	38.06	9.34	47.40	74.00	-26.60	peak
4	11825.625	35.18	17.31	52.49	74.00	-21.51	peak
5	12931.875	35.41	16.95	52.36	74.00	-21.64	peak
6	17902.500	29.05	23.12	52.17	74.00	-21.83	peak

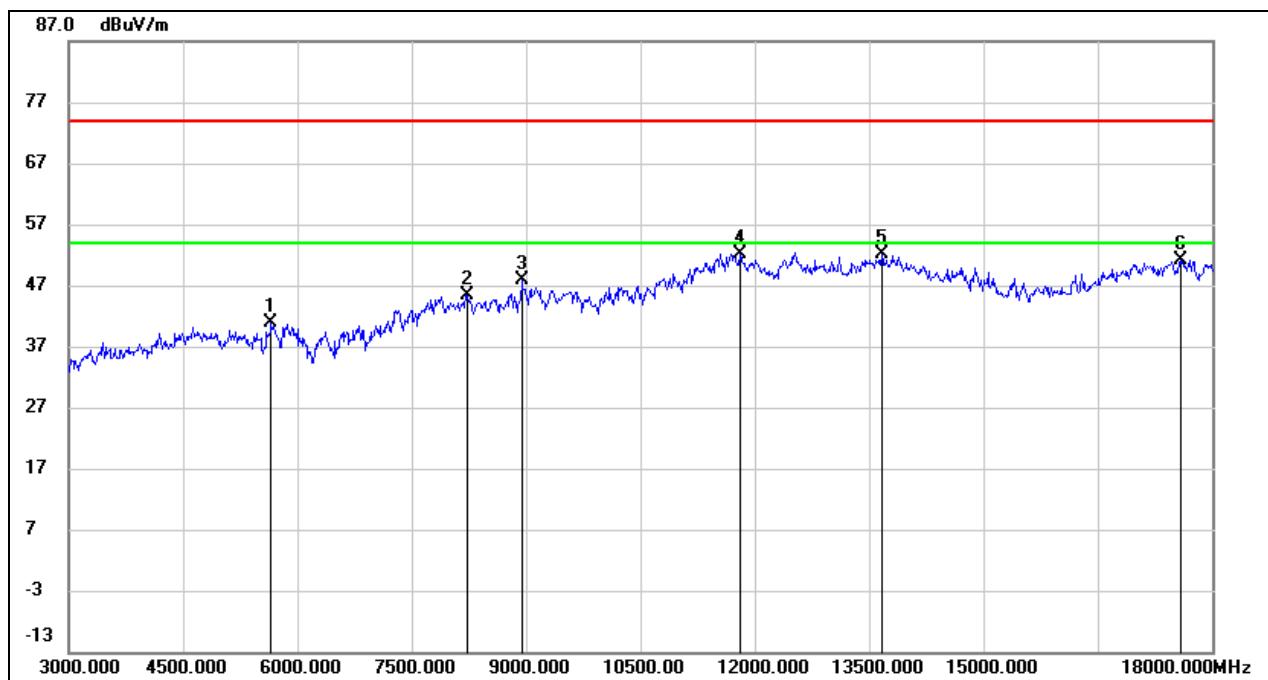
Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5668.125	39.40	1.44	40.84	74.00	-33.16	peak
2	8236.875	36.90	8.58	45.48	74.00	-28.52	peak
3	8941.875	38.28	9.49	47.77	74.00	-26.23	peak
4	11812.500	34.79	17.33	52.12	74.00	-21.88	peak
5	13678.125	33.52	18.53	52.05	74.00	-21.95	peak
6	17585.625	30.38	20.66	51.04	74.00	-22.96	peak


Note:

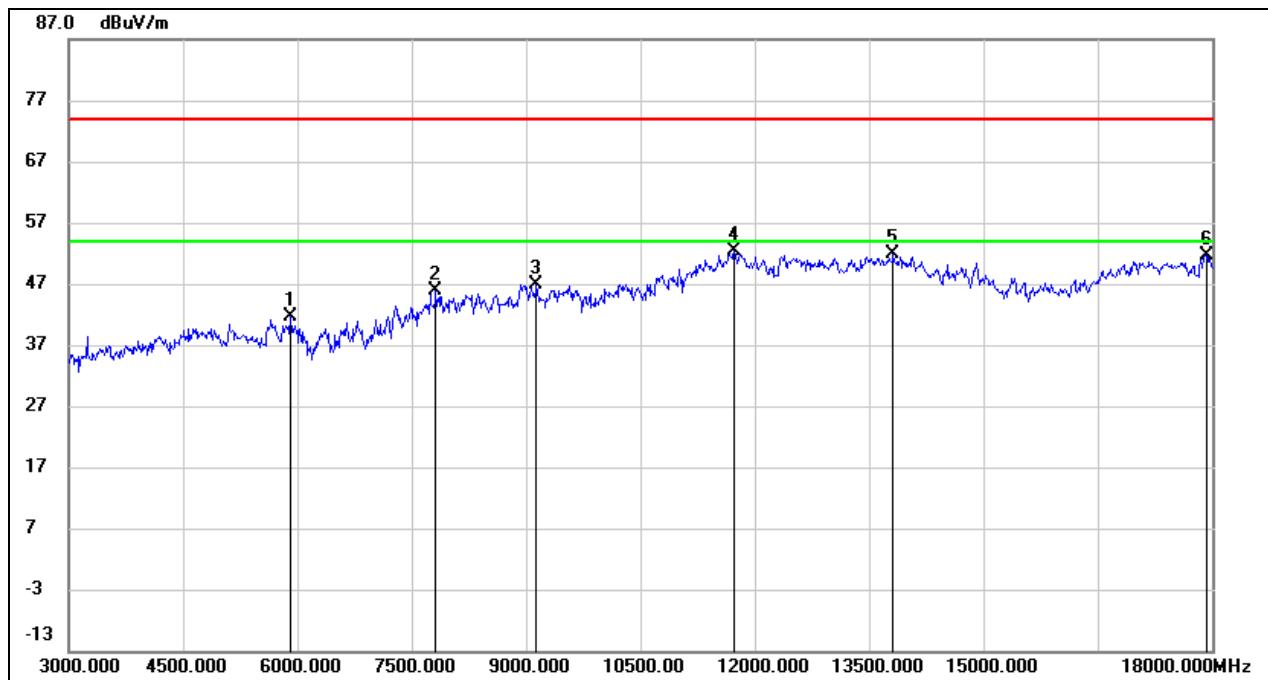1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.250	39.65	1.91	41.56	74.00	-32.44	peak
2	7824.375	38.29	7.54	45.83	74.00	-28.17	peak
3	9136.875	37.45	9.32	46.77	74.00	-27.23	peak
4	11739.375	35.26	17.03	52.29	74.00	-21.71	peak
5	13816.875	33.23	18.75	51.98	74.00	-22.02	peak
6	17925.000	28.55	23.18	51.73	74.00	-22.27	peak

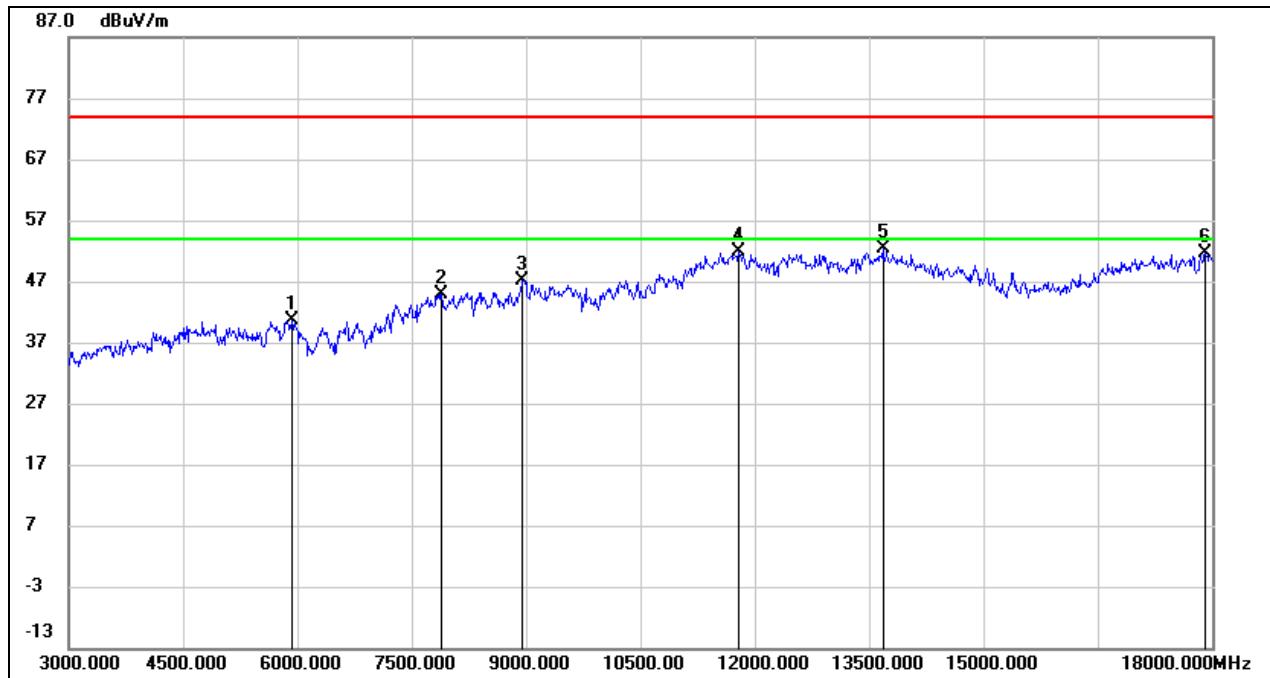
Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5930.625	38.64	1.94	40.58	74.00	-33.42	peak
2	7890.000	37.61	7.36	44.97	74.00	-29.03	peak
3	8966.250	37.47	9.76	47.23	74.00	-26.77	peak
4	11793.750	34.52	17.32	51.84	74.00	-22.16	peak
5	13681.875	33.74	18.54	52.28	74.00	-21.72	peak
6	17921.250	28.36	23.17	51.53	74.00	-22.47	peak

Note:

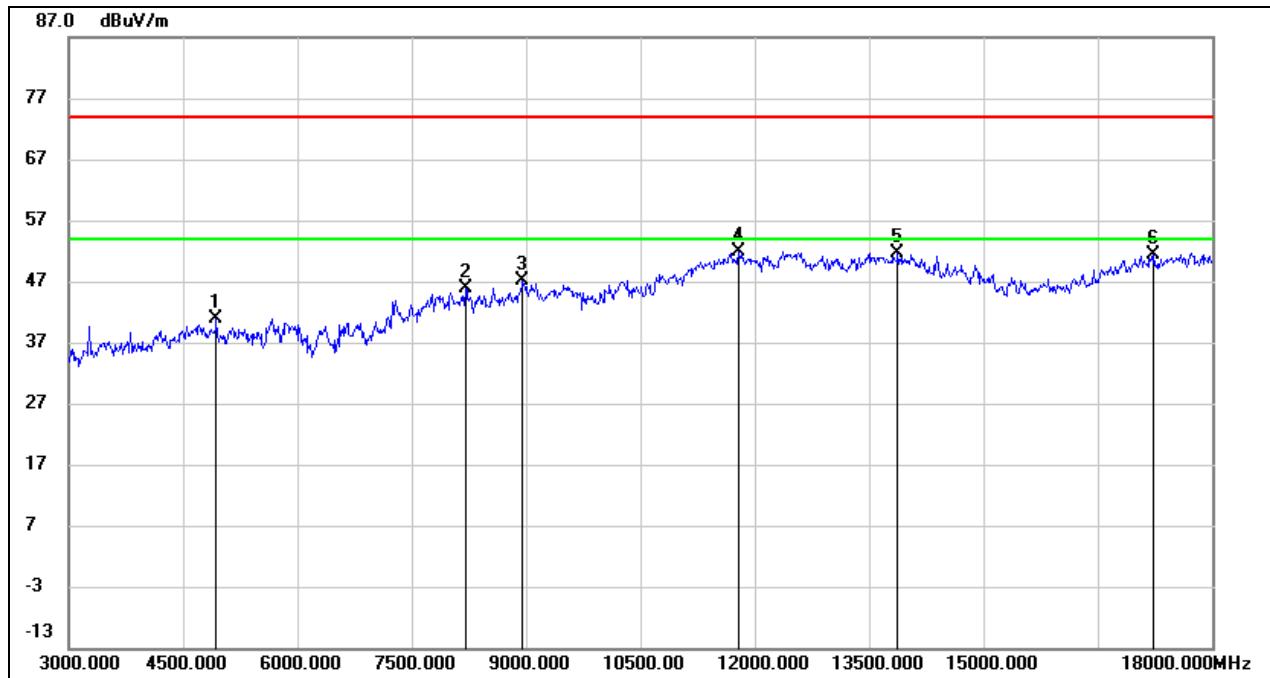1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4935.000	41.44	-0.55	40.89	74.00	-33.11	peak
2	8216.250	37.34	8.65	45.99	74.00	-28.01	peak
3	8960.625	37.32	9.70	47.02	74.00	-26.98	peak
4	11793.750	34.52	17.32	51.84	74.00	-22.16	peak
5	13888.125	32.87	18.67	51.54	74.00	-22.46	peak
6	17244.375	31.66	19.75	51.41	74.00	-22.59	peak


Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

## 8.5. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

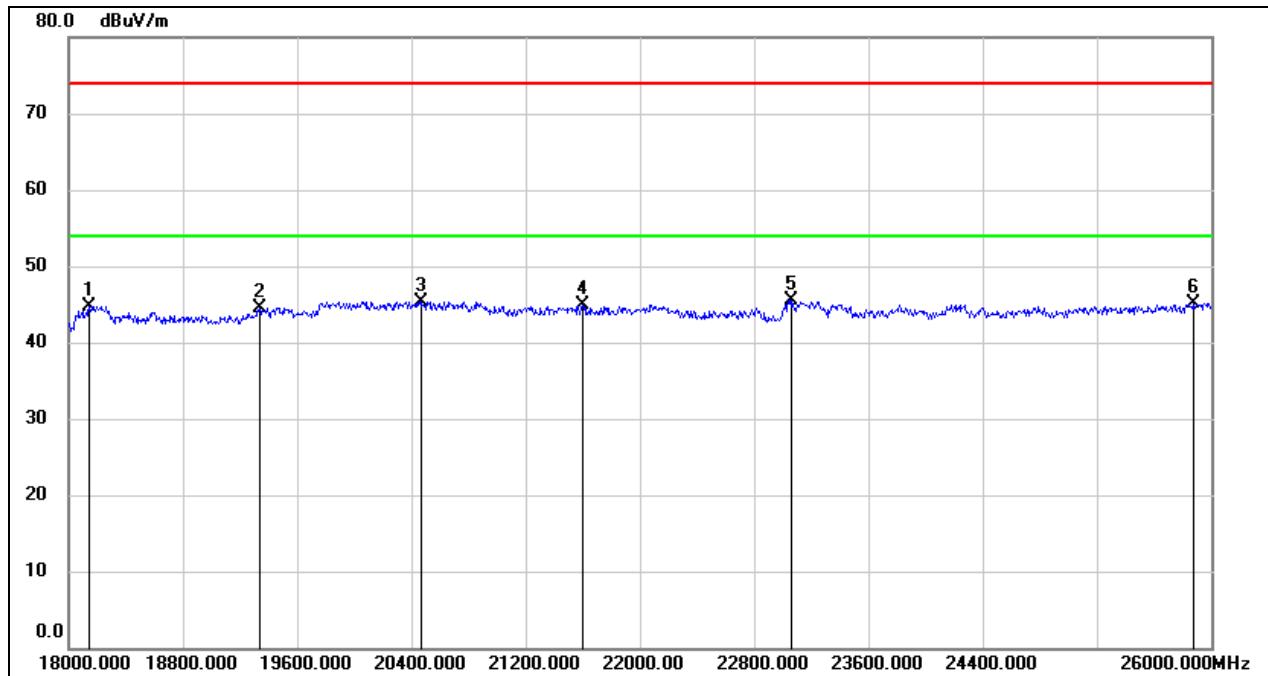
### 8.5.1. 802.11n HT20 MIMO MODE

#### SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	50.27	-5.48	44.79	74.00	-29.21	peak
2	19336.000	50.04	-5.58	44.46	74.00	-29.54	peak
3	20472.000	50.69	-5.39	45.30	74.00	-28.70	peak
4	21600.000	49.52	-4.54	44.98	74.00	-29.02	peak
5	23064.000	48.99	-3.42	45.57	74.00	-28.43	peak
6	25872.000	45.95	-0.83	45.12	74.00	-28.88	peak

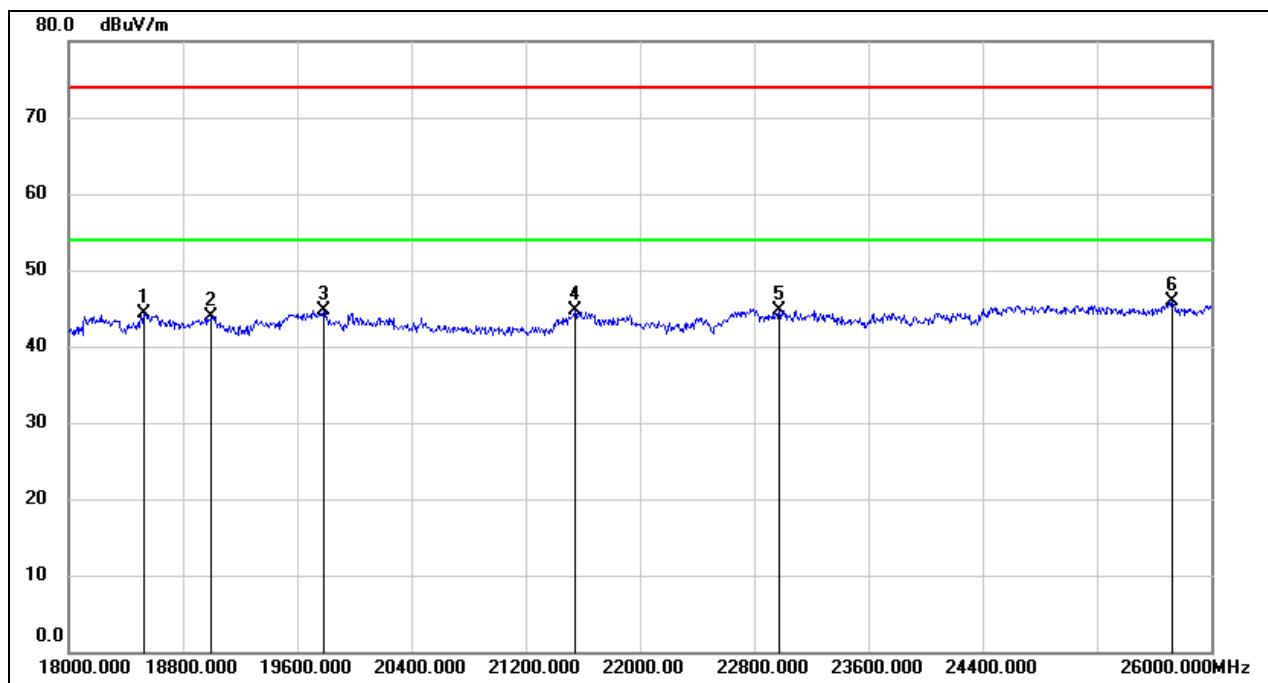Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.

**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18528.000	49.61	-5.26	44.35	74.00	-29.65	peak
2	19000.000	49.20	-5.22	43.98	74.00	-30.02	peak
3	19784.000	50.07	-5.28	44.79	74.00	-29.21	peak
4	21544.000	49.26	-4.63	44.63	74.00	-29.37	peak
5	22976.000	48.26	-3.46	44.80	74.00	-29.20	peak
6	25728.000	46.61	-0.72	45.89	74.00	-28.11	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.


Note: All modes, channels and antenna have been tested, only the worst data was recorded in the report.

## 8.6. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)
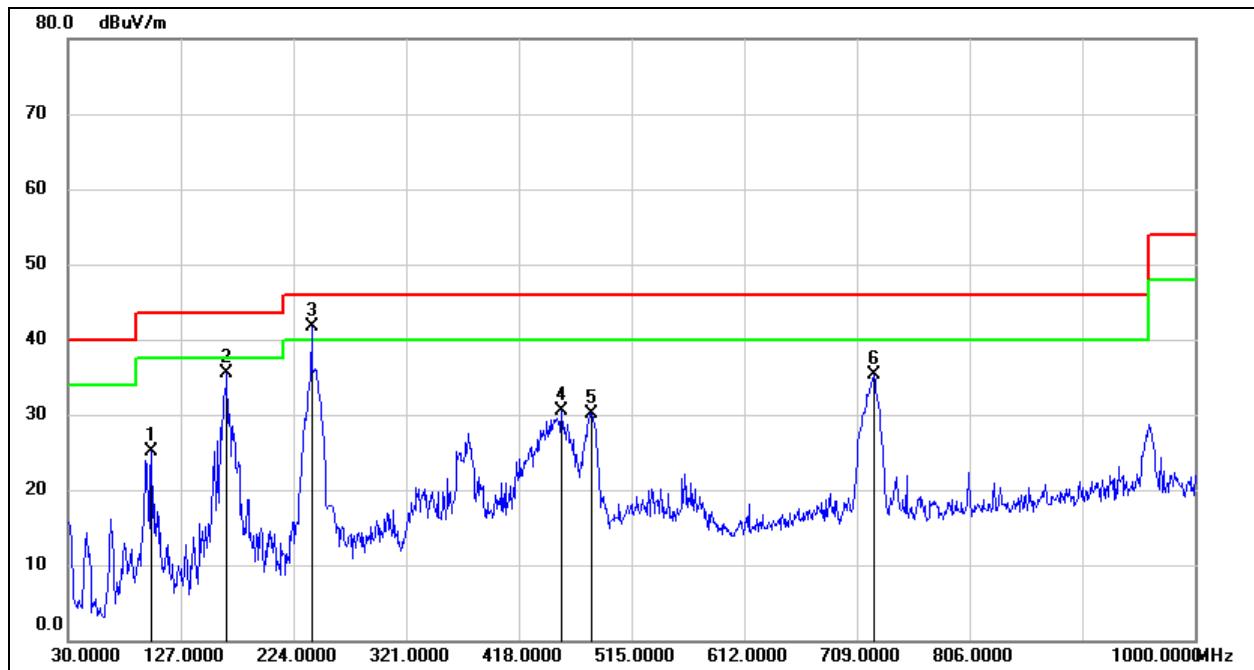
### 8.6.1. 802.11n HT20 MIMO MODE


#### ANTENNA 1 TEST RESULTS (WORST CASE)

#### SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	101.7800	46.16	-21.00	25.16	43.50	-18.34	peak
2	166.7700	52.93	-17.47	35.46	43.50	-8.04	peak
3	239.5200	60.96	-19.16	41.80	46.00	-4.20	peak
4	454.8600	42.84	-12.31	30.53	46.00	-15.47	peak
5	480.0800	41.98	-11.79	30.19	46.00	-15.81	peak
6	723.5500	43.41	-8.09	35.32	46.00	-10.68	peak

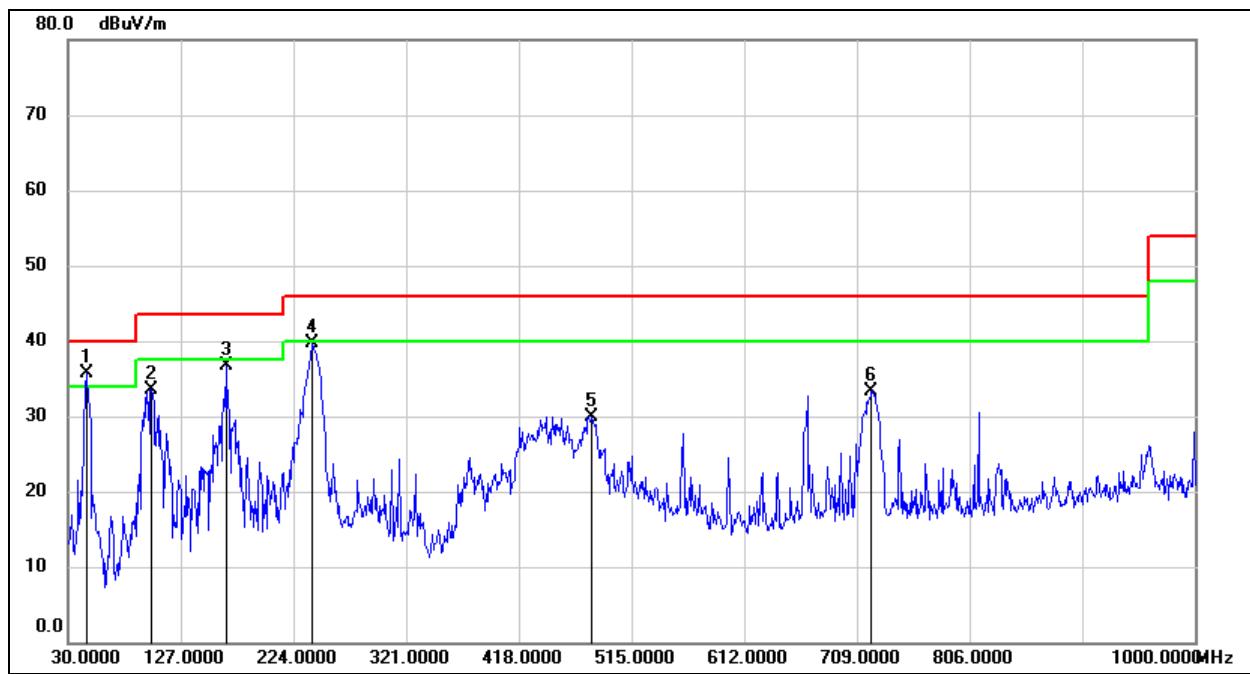Note: 1. Result Level = Read Level + Correct Factor.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	46.4900	56.13	-20.46	35.67	40.00	-4.33	peak
2	101.7800	54.53	-21.00	33.53	43.50	-9.97	peak
3	165.8000	54.28	-17.51	36.77	43.50	-6.73	peak
4	239.5200	58.80	-19.16	39.64	46.00	-6.36	peak
5	481.0500	41.76	-11.78	29.98	46.00	-16.02	peak
6	721.6100	41.38	-8.09	33.29	46.00	-12.71	peak

Note: 1. Result Level = Read Level + Correct Factor.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All modes, channels and antenna have been tested, only the worst data was recorded in the report.


## 8.7. SPURIOUS EMISSIONS BELOW 30 MHz
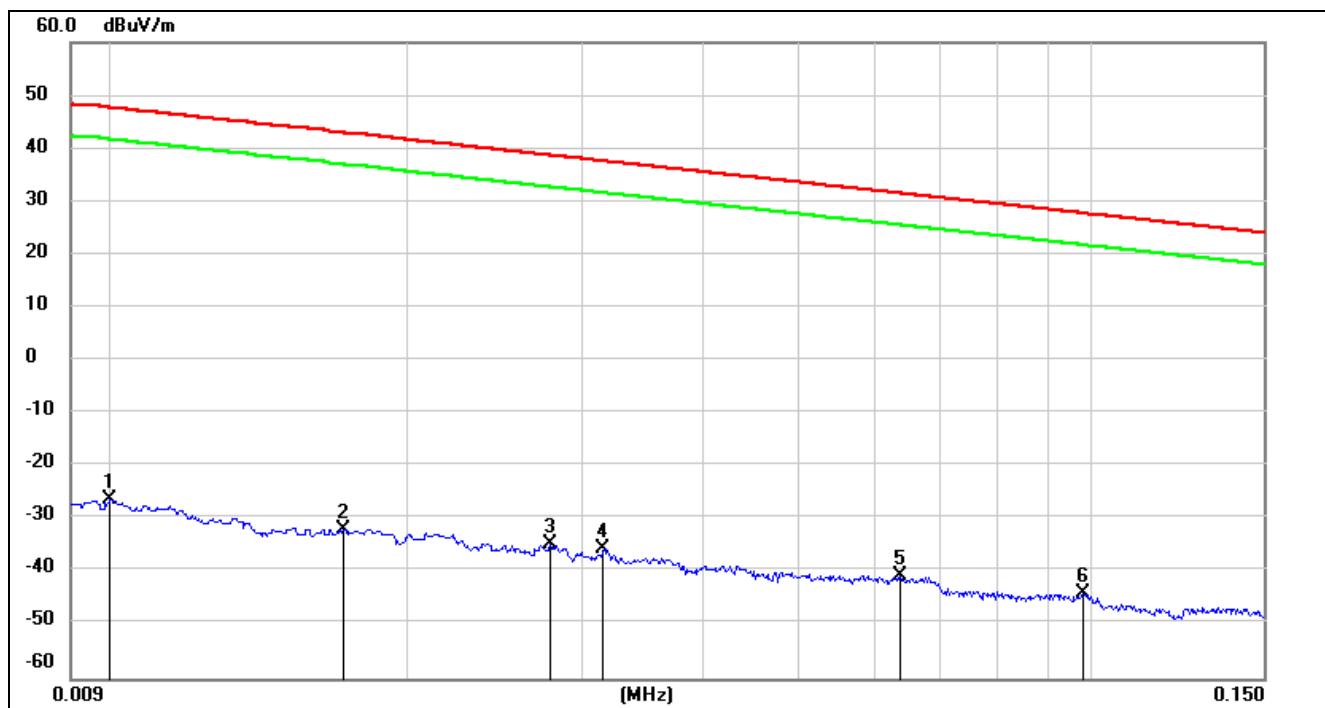
### 8.7.1. 802.11n HT20 MIMO MODE

#### ANTENNA 1 TEST RESULTS (WORST CASE)

#### SPURIOUS EMISSIONS (LOW CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz




No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	75.22	-101.40	-26.18	47.6	-77.68	-3.90	-73.78	peak
2	0.0171	69.38	-101.36	-31.98	42.94	-83.48	-8.56	-74.92	peak
3	0.0279	66.67	-101.38	-34.71	38.69	-86.21	-12.81	-73.40	peak
4	0.0316	65.74	-101.40	-35.66	37.61	-87.16	-13.89	-73.27	peak
5	0.0636	60.81	-101.54	-40.73	31.53	-92.23	-19.97	-72.26	peak
6	0.0981	57.77	-101.78	-44.01	27.77	-95.51	-23.73	-71.78	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m-  $20\log_{10}[120\pi]$  = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

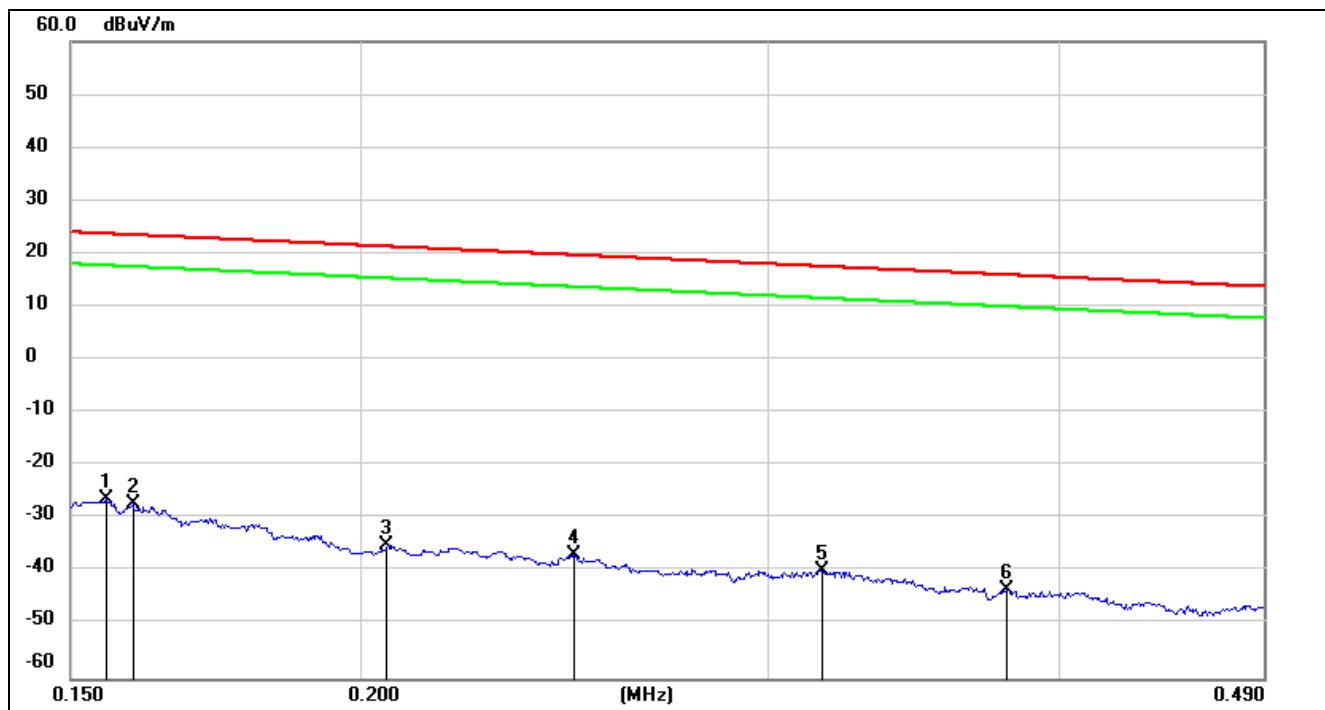3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


150 kHz ~ 490 kHz

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1554	75.27	-101.65	-26.38	23.77	-77.88	-27.73	-50.15	peak
2	0.1595	74.36	-101.65	-27.29	23.55	-78.79	-27.95	-50.84	peak
3	0.2053	66.79	-101.73	-34.94	21.35	-86.44	-30.15	-56.29	peak
4	0.2472	64.95	-101.80	-36.85	19.74	-88.35	-31.76	-56.59	peak
5	0.3163	62.20	-101.87	-39.67	17.6	-91.17	-33.90	-57.27	peak
6	0.3800	58.52	-101.94	-43.42	16.01	-94.92	-35.49	-59.43	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m-  $20\log_{10}[120\pi]$  = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

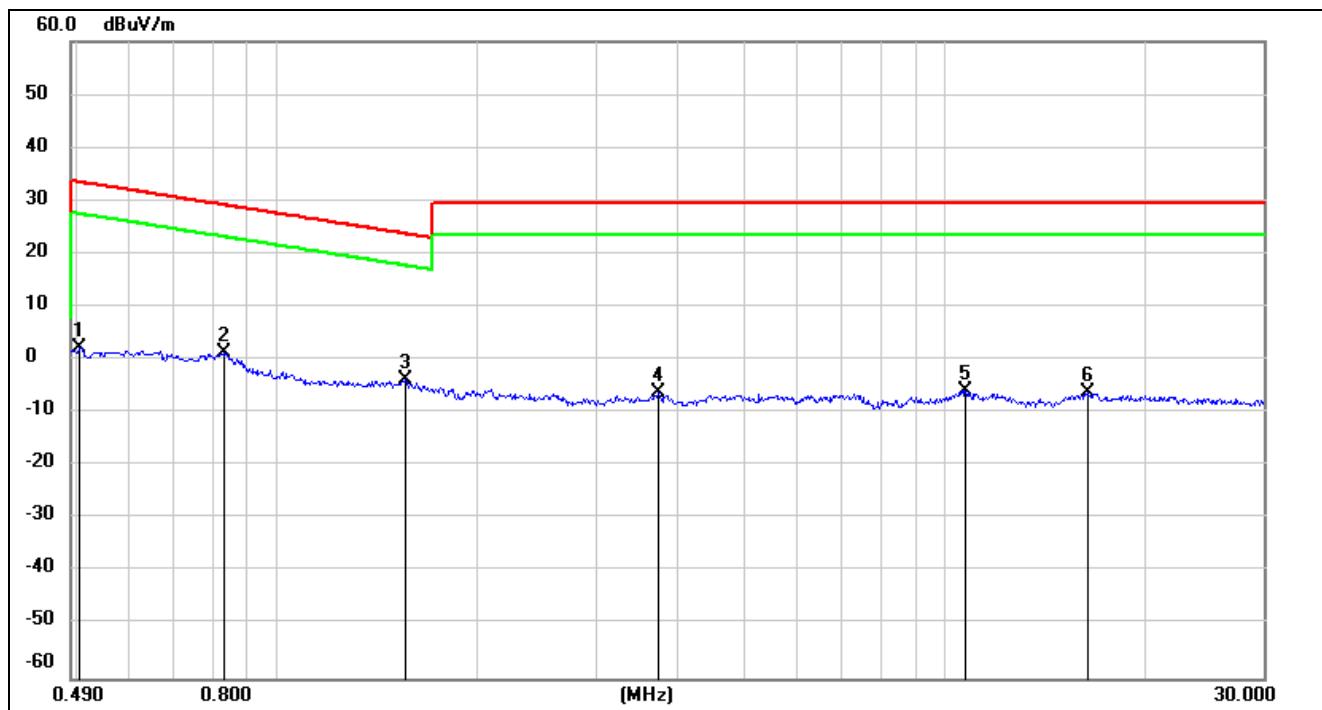3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	64.44	-62.07	2.37	33.56	-49.13	-17.94	-31.19	peak
2	0.8296	63.44	-62.17	1.27	29.23	-50.23	-22.27	-27.96	peak
3	1.5564	58.18	-62.02	-3.84	23.76	-55.34	-27.74	-27.60	peak
4	3.7100	55.20	-61.41	-6.21	29.54	-57.71	-21.96	-35.75	peak
5	10.7299	54.98	-60.83	-5.85	29.54	-57.35	-21.96	-35.39	peak
6	16.3959	54.67	-60.96	-6.29	29.54	-57.79	-21.96	-35.83	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m-  $20\log_{10}[120\pi]$  = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All modes, channels and antenna have been tested, only the worst data was recorded in the report.

## 9. AC POWER LINE CONDUCTED EMISSIONS

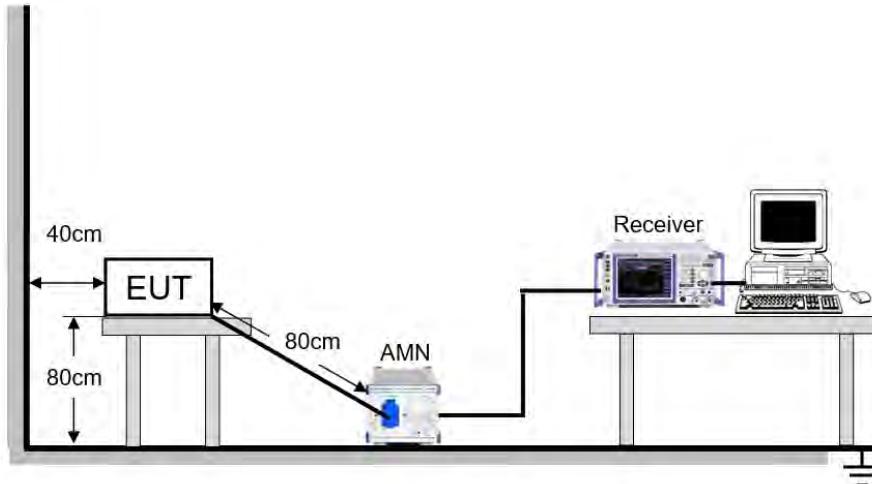
### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.




The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST ENVIRONMENT

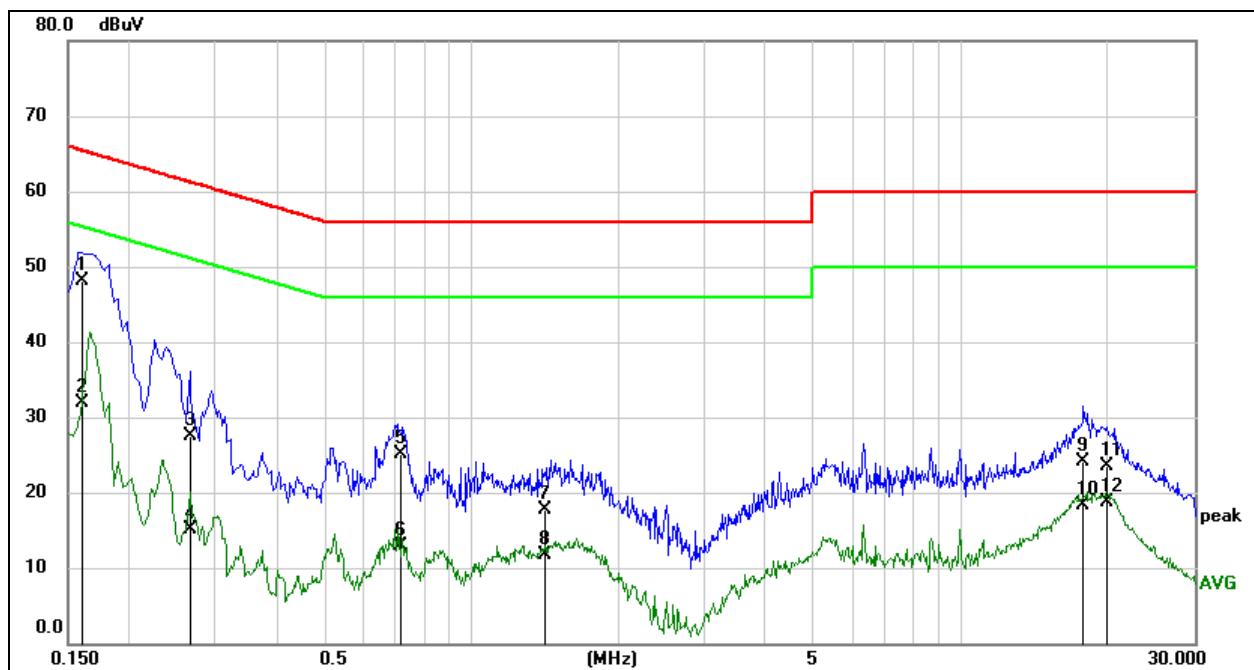Temperature	22.7 °C	Relative Humidity	54.6 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

RESULTS**9.1.1. 802.11n HT20 MIMO MODE****LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1613	48.57	-0.40	48.17	65.40	-17.23	QP
2	0.1613	32.21	-0.40	31.81	55.40	-23.59	AVG
3	0.2665	27.91	-0.40	27.51	61.23	-33.72	QP
4	0.2665	15.60	-0.40	15.20	51.23	-36.03	AVG
5	0.7191	25.43	-0.40	25.03	56.00	-30.97	QP
6	0.7191	13.30	-0.40	12.90	46.00	-33.10	AVG
7	1.4097	17.90	-0.10	17.80	56.00	-38.20	QP
8	1.4097	11.87	-0.10	11.77	46.00	-34.23	AVG
9	17.8577	25.22	-1.11	24.11	60.00	-35.89	QP
10	17.8577	19.46	-1.11	18.35	50.00	-31.65	AVG
11	19.8666	24.69	-1.19	23.50	60.00	-36.50	QP
12	19.8666	19.84	-1.19	18.65	50.00	-31.35	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

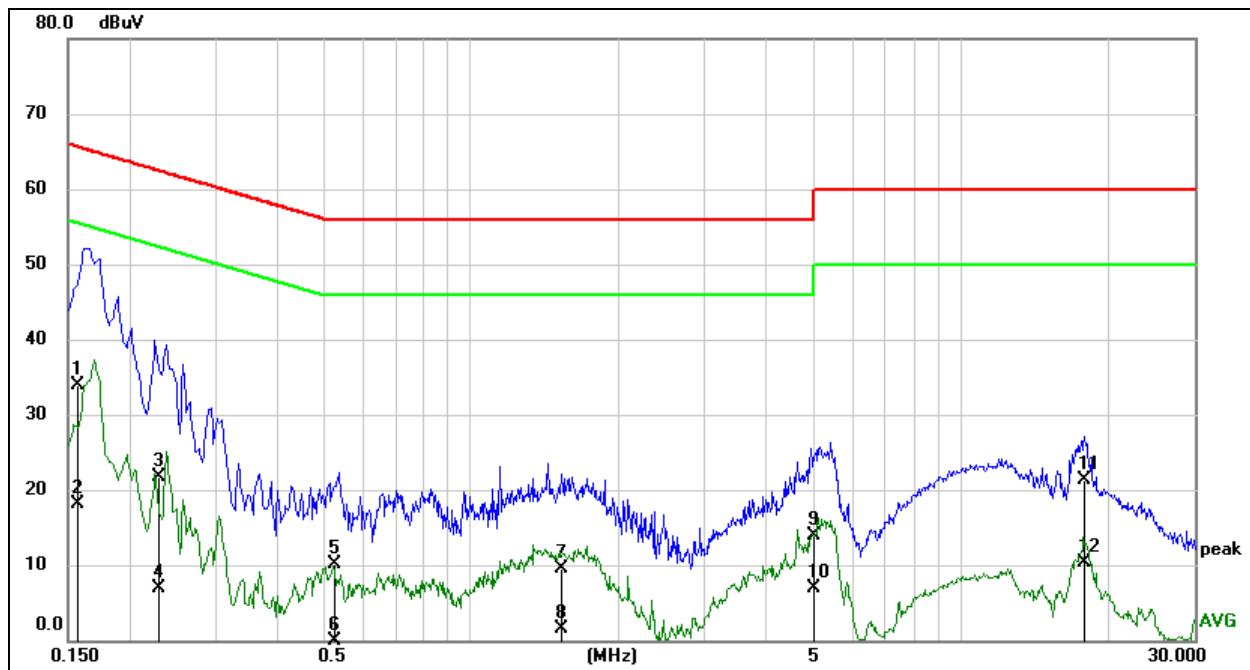4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1579	34.38	-0.40	33.98	65.57	-31.59	QP
2	0.1579	18.43	-0.40	18.03	55.57	-37.54	AVG
3	0.2303	22.07	-0.40	21.67	62.44	-40.77	QP
4	0.2303	7.25	-0.40	6.85	52.44	-45.59	AVG
5	0.5228	10.51	-0.40	10.11	56.00	-45.89	QP
6	0.5228	-1.09	-0.40	-1.49	46.00	-47.49	AVG
7	1.5231	9.53	-0.10	9.43	56.00	-46.57	QP
8	1.5231	1.66	-0.10	1.56	46.00	-44.44	AVG
9	4.9946	14.30	-0.40	13.90	56.00	-42.10	QP
10	4.9946	7.31	-0.40	6.91	46.00	-39.09	AVG
11	17.8924	22.41	-1.12	21.29	60.00	-38.71	QP
12	17.8924	11.52	-1.12	10.40	50.00	-39.60	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All modes, channels and antenna have been tested, only the worst data was recorded in the report.

## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies

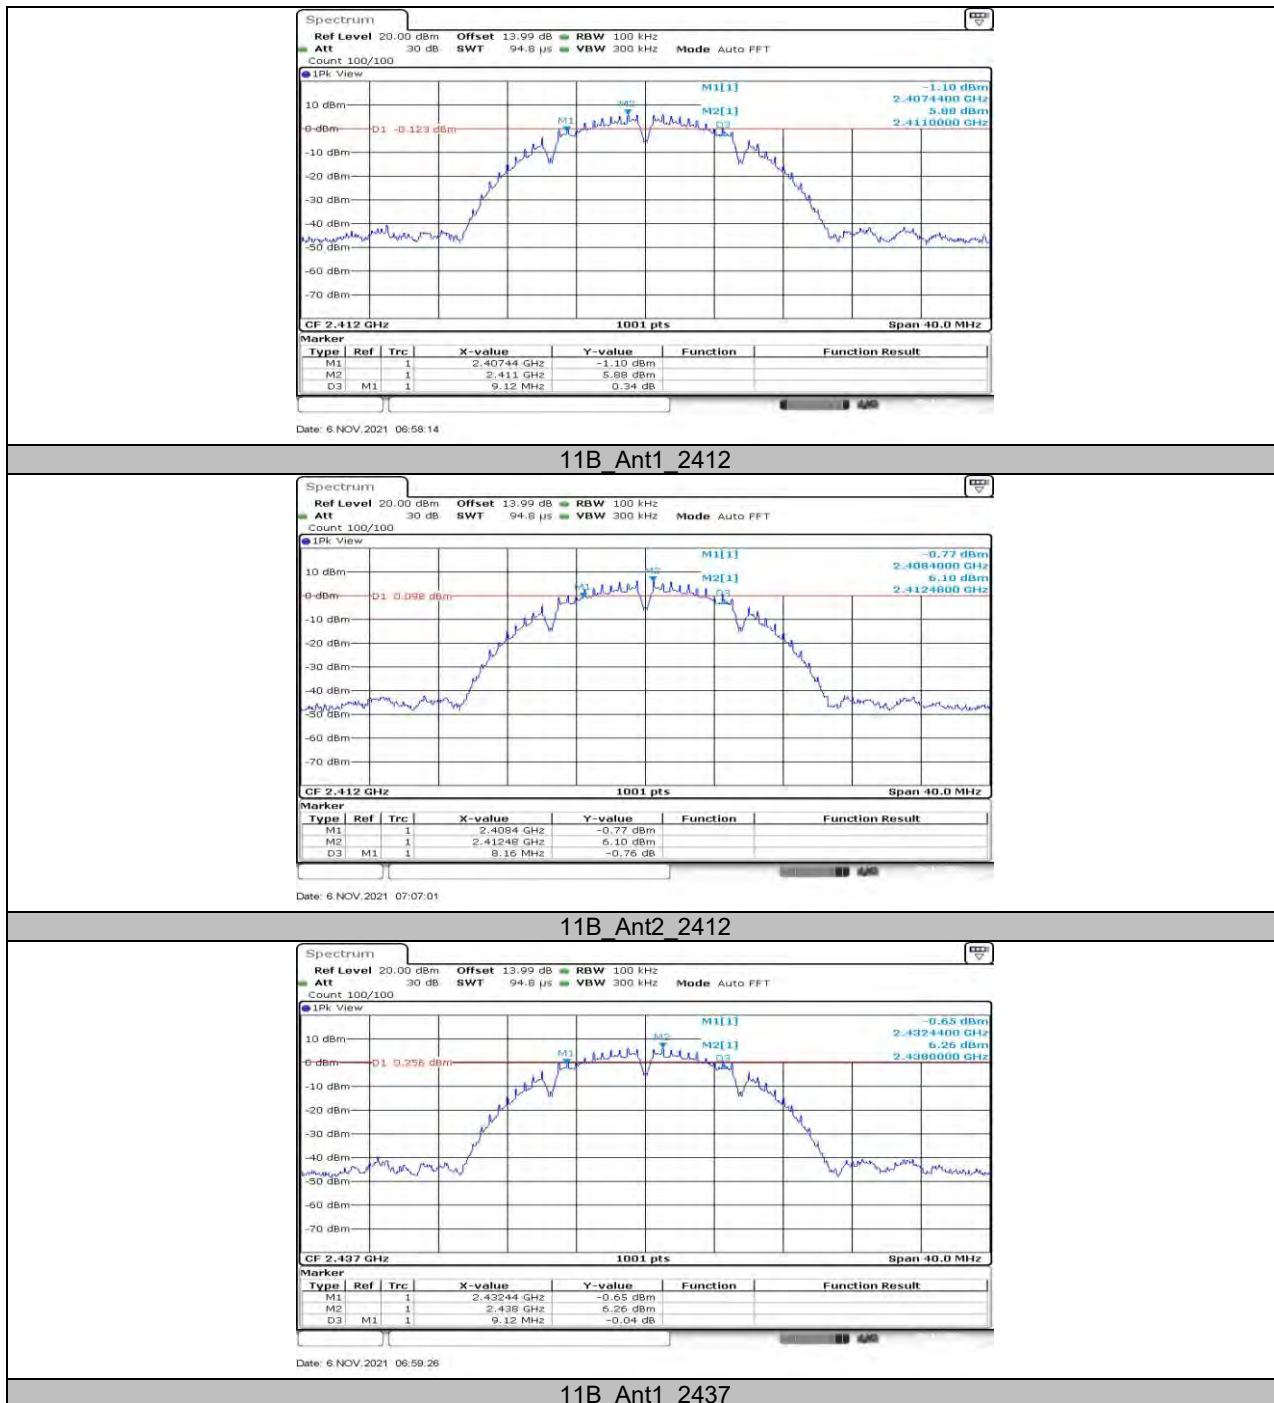
## 11. Appendix

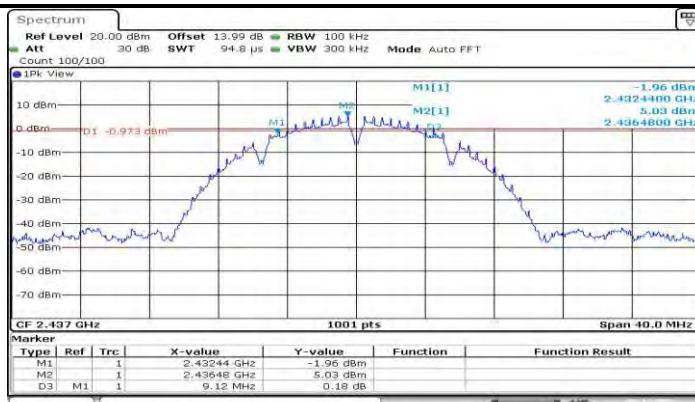
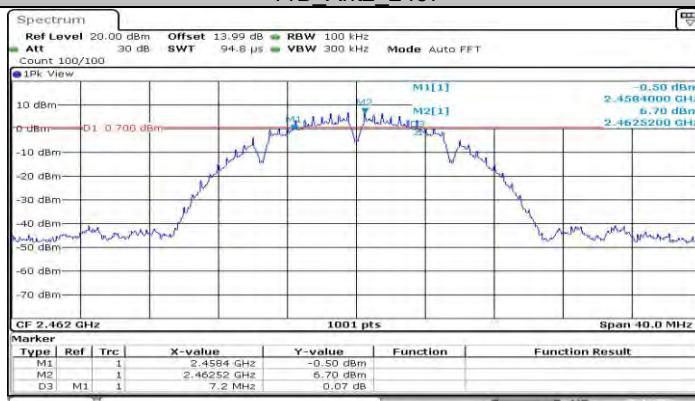
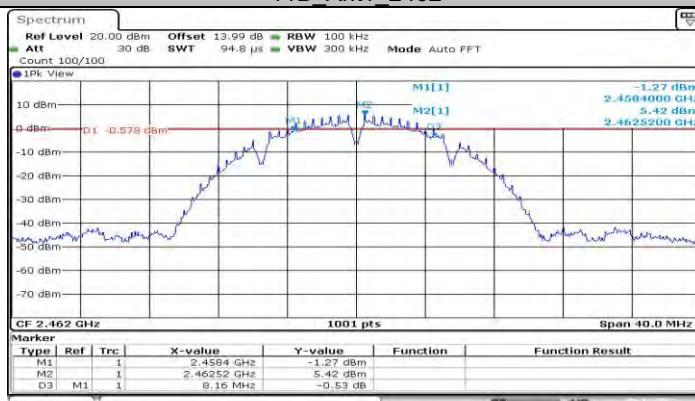
### 11.1. Appendix A: DTS Bandwidth




#### 11.1.1. Test Result




Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.120	2407.440	2416.560	0.5	PASS
	Ant2	2412	8.160	2408.400	2416.560	0.5	PASS
	Ant1	2437	9.120	2432.440	2441.560	0.5	PASS
	Ant2	2437	9.120	2432.440	2441.560	0.5	PASS
	Ant1	2462	7.200	2458.400	2465.600	0.5	PASS
	Ant2	2462	8.160	2458.400	2466.560	0.5	PASS
11G	Ant1	2412	15.200	2404.400	2419.600	0.5	PASS
	Ant2	2412	16.120	2404.080	2420.200	0.5	PASS
	Ant1	2437	15.360	2429.440	2444.800	0.5	PASS
	Ant2	2437	15.880	2429.080	2444.960	0.5	PASS
	Ant1	2462	16.120	2454.040	2470.160	0.5	PASS
	Ant2	2462	15.200	2454.400	2469.600	0.5	PASS
11N20MIMO	Ant1	2412	17.600	2403.200	2420.800	0.5	PASS
	Ant2	2412	17.600	2403.200	2420.800	0.5	PASS
	Ant1	2437	17.680	2428.160	2445.840	0.5	PASS
	Ant2	2437	17.240	2428.200	2445.440	0.5	PASS
	Ant1	2462	17.680	2453.160	2470.840	0.5	PASS
	Ant2	2462	17.600	2453.200	2470.800	0.5	PASS
11N40MIMO	Ant1	2422	35.280	2404.400	2439.680	0.5	PASS
	Ant2	2422	35.280	2404.400	2439.680	0.5	PASS
	Ant1	2437	35.280	2419.400	2454.680	0.5	PASS
	Ant2	2437	35.280	2419.400	2454.680	0.5	PASS
	Ant1	2452	35.280	2434.400	2469.680	0.5	PASS
	Ant2	2452	35.280	2434.400	2469.680	0.5	PASS




## 11.1.2. Test Graphs








**11B\_Ant2\_2437****11B\_Ant1\_2462****11B\_Ant2\_2462**

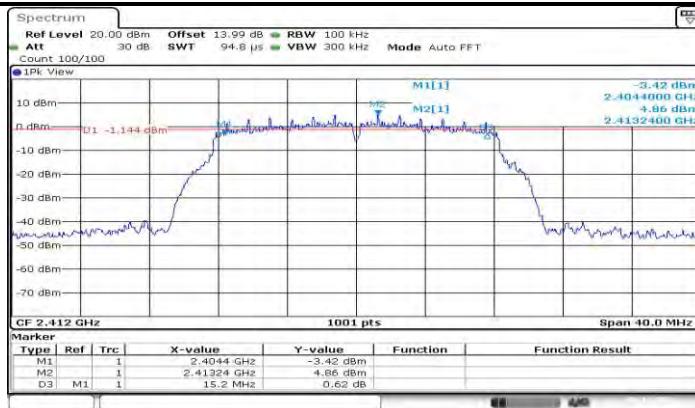
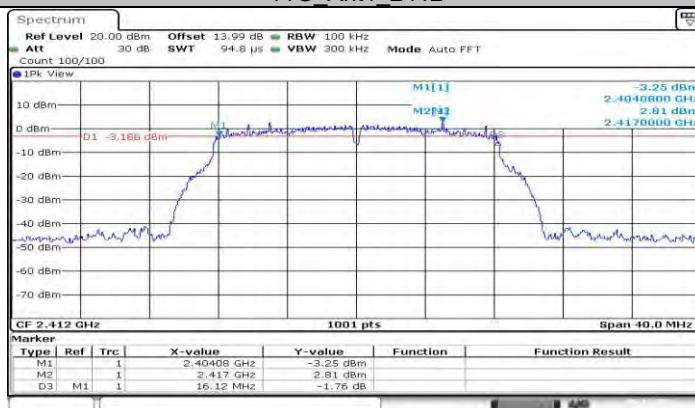
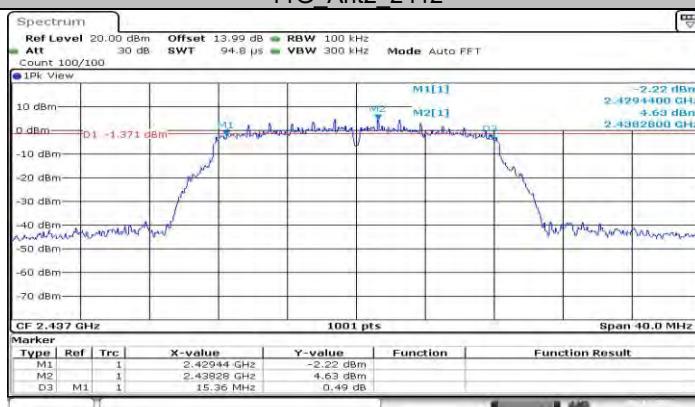
**11G\_Ant1\_2412****11G\_Ant2\_2412****11G\_Ant1\_2437**

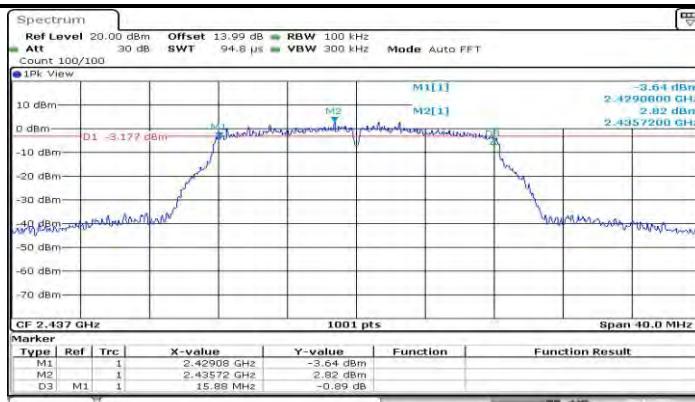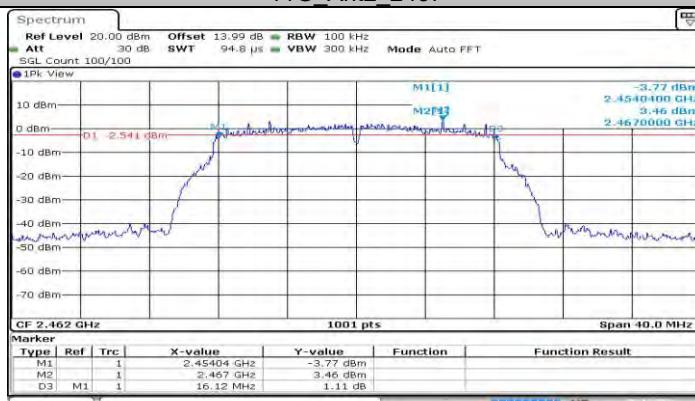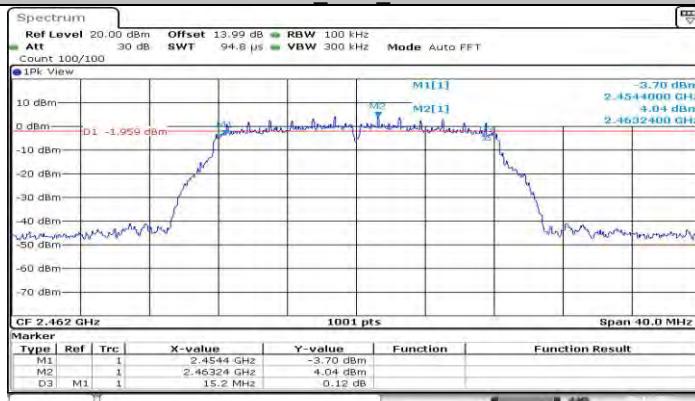**11G\_Ant2\_2437****11G\_Ant1\_2462****11G\_Ant2\_2462**

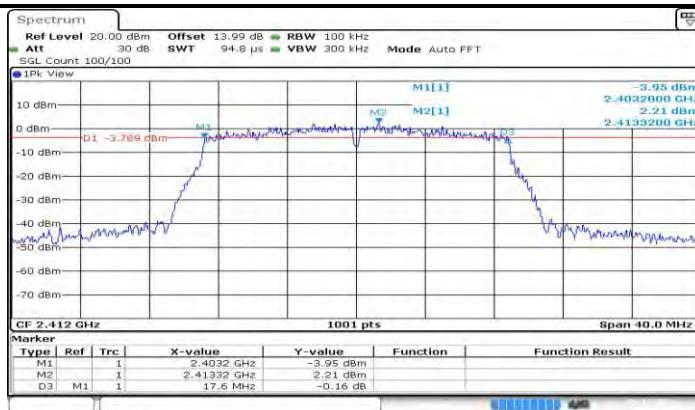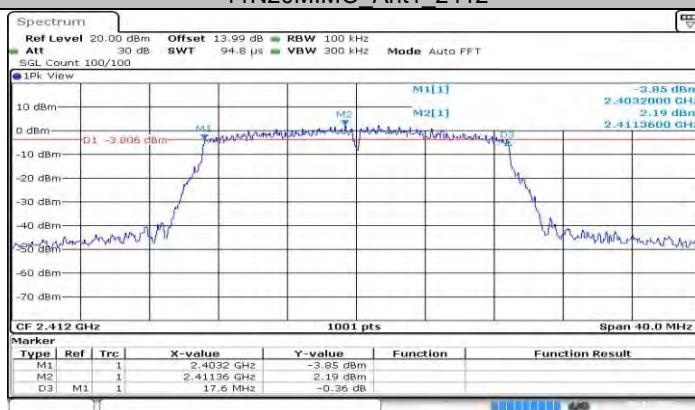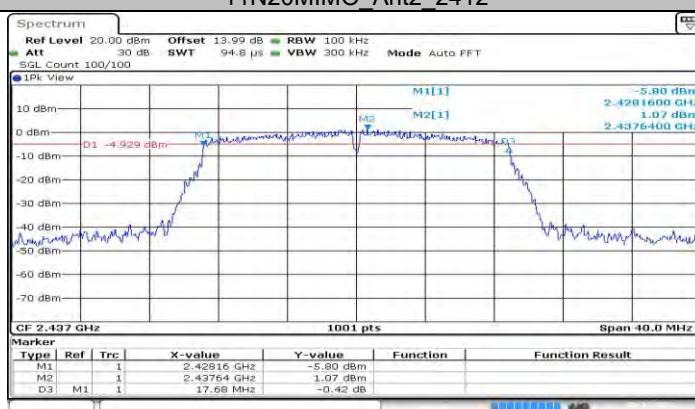
**11N20MIMO\_Ant1\_2412**

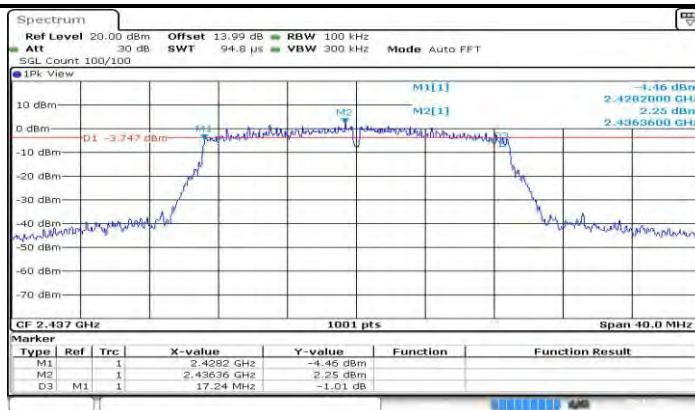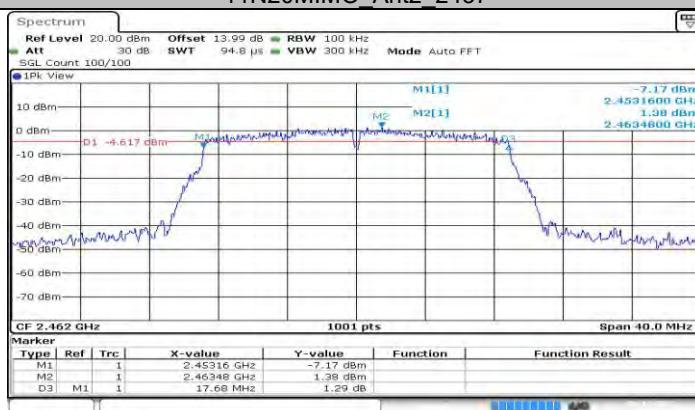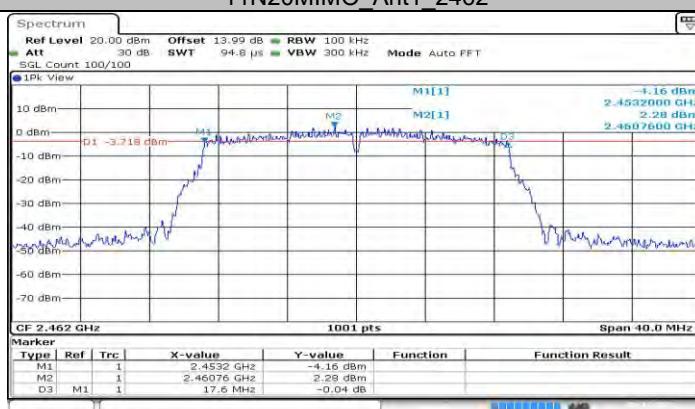**11N20MIMO\_Ant2\_2412**

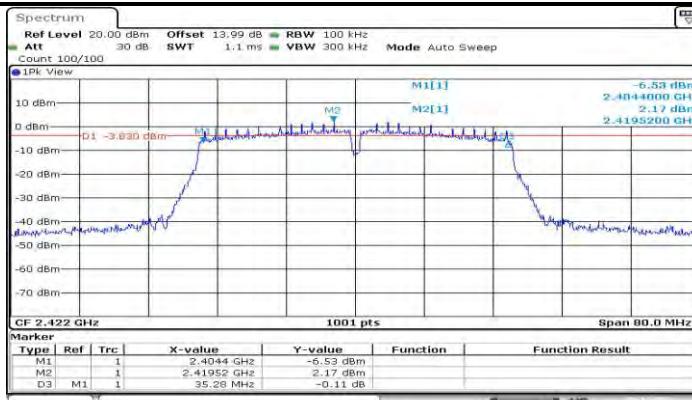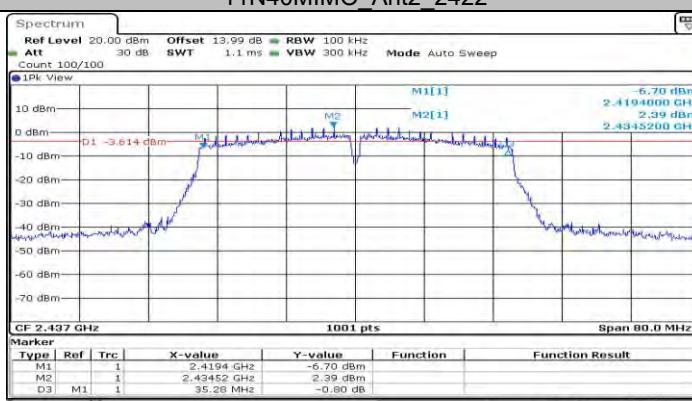**11N20MIMO\_Ant1\_2437**

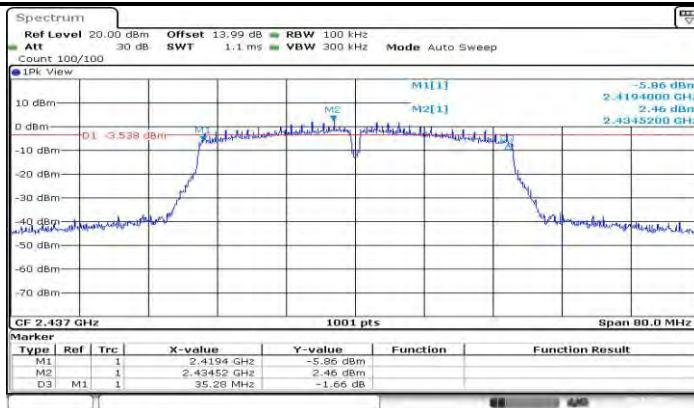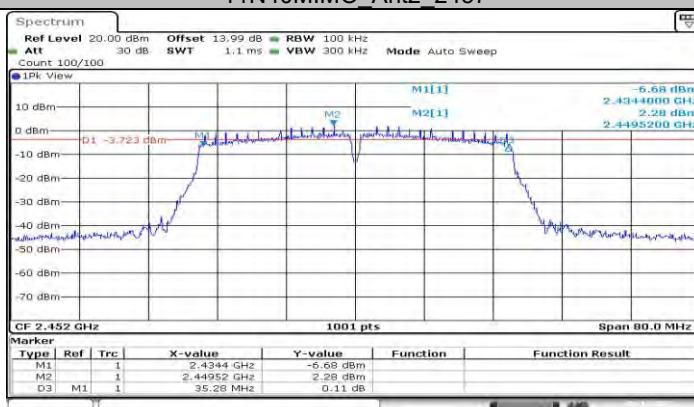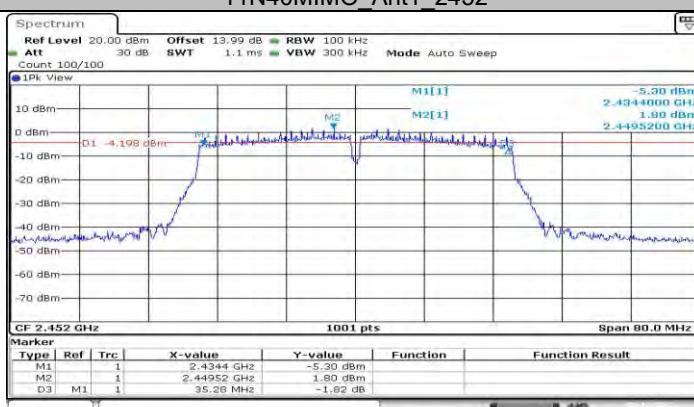
**11N20MIMO\_Ant2\_2437**

**11N20MIMO\_Ant1\_2462**

**11N20MIMO\_Ant2\_2462**

**11N40MIMO\_Ant1\_2422****11N40MIMO\_Ant2\_2422****11N40MIMO\_Ant1\_2437**

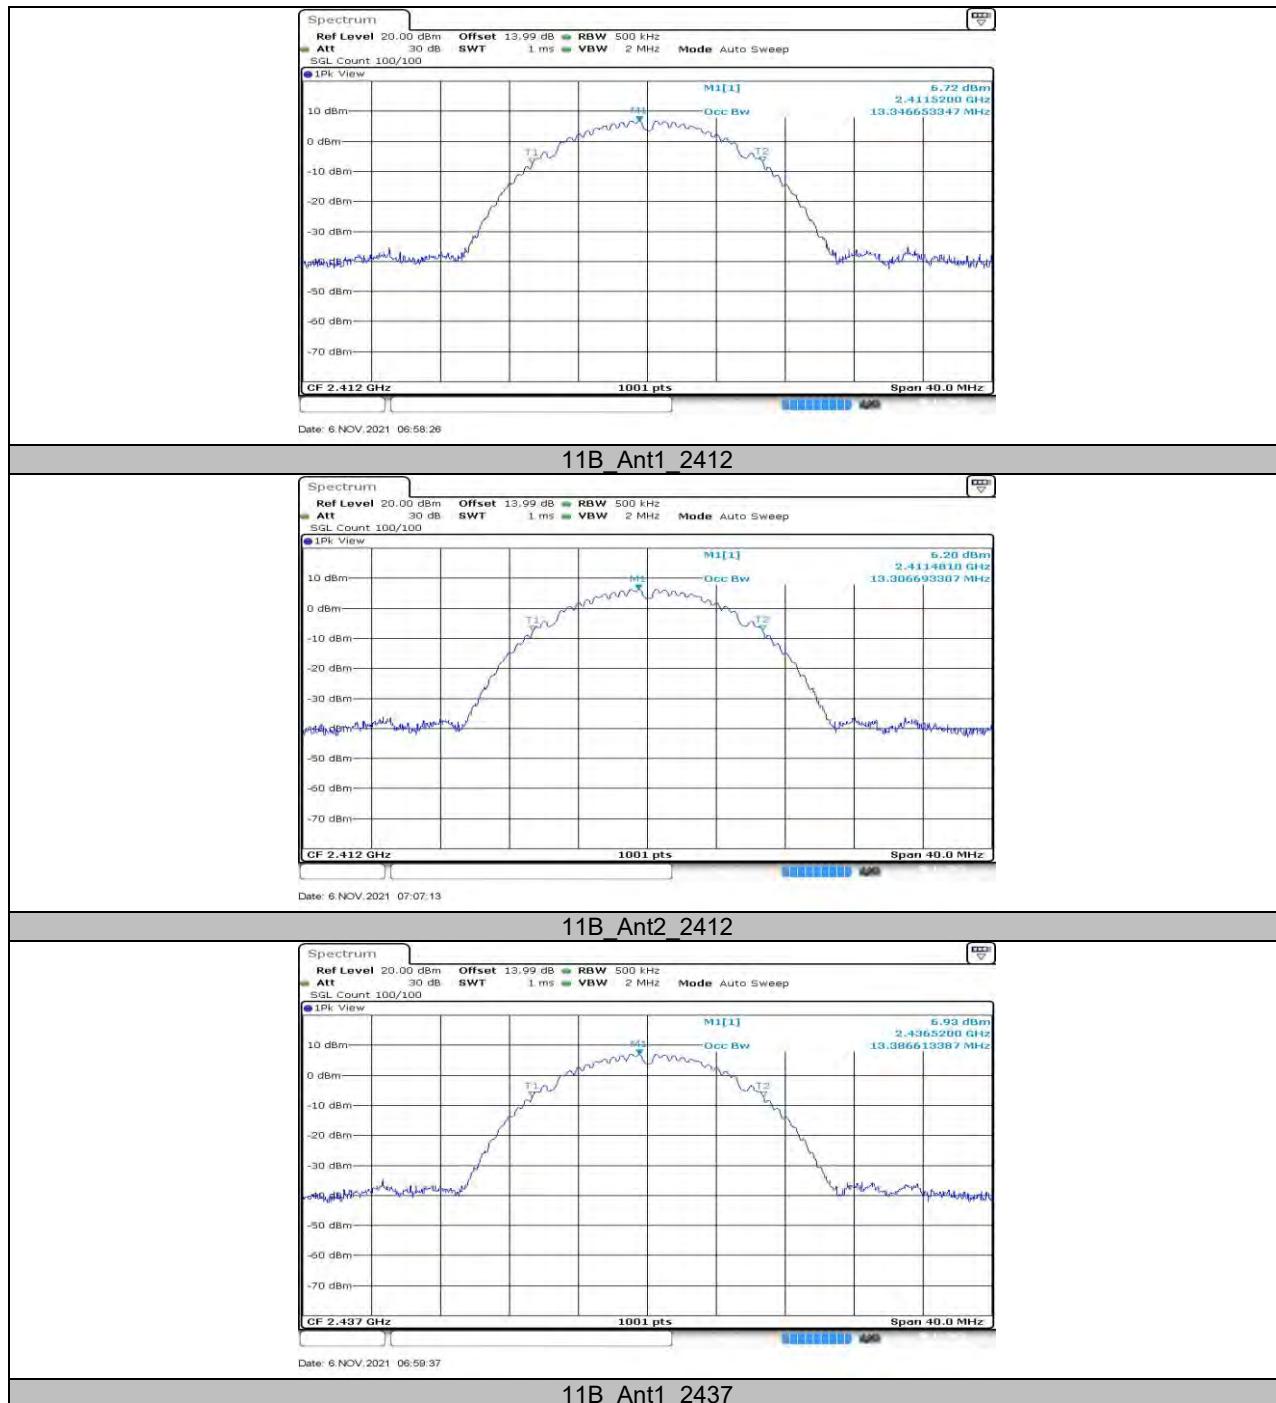
**11N40MIMO\_Ant2\_2437****11N40MIMO\_Ant1\_2452****11N40MIMO\_Ant2\_2452**

## 11.2. Appendix B: Occupied Channel Bandwidth

### 11.2.1. Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	13.347	2405.327	2418.673	PASS
	Ant2	2412	13.307	2405.367	2418.673	PASS
	Ant1	2437	13.387	2430.327	2443.713	PASS
	Ant2	2437	13.387	2430.287	2443.673	PASS
	Ant1	2462	13.387	2455.327	2468.713	PASS
	Ant2	2462	13.387	2455.327	2468.713	PASS
11G	Ant1	2412	16.943	2403.568	2420.511	PASS
	Ant2	2412	16.903	2403.568	2420.472	PASS
	Ant1	2437	16.903	2428.528	2445.432	PASS
	Ant2	2437	16.943	2428.528	2445.472	PASS
	Ant1	2462	16.983	2453.528	2470.511	PASS
	Ant2	2462	16.903	2453.608	2470.511	PASS
11N20MIMO	Ant1	2412	17.782	2403.129	2420.911	PASS
	Ant2	2412	17.742	2403.129	2420.871	PASS
	Ant1	2437	17.862	2428.089	2445.951	PASS
	Ant2	2437	17.782	2428.089	2445.871	PASS
	Ant1	2462	17.862	2453.089	2470.951	PASS
	Ant2	2462	17.782	2453.129	2470.911	PASS
11N40MIMO	Ant1	2422	36.124	2404.018	2440.142	PASS
	Ant2	2422	36.044	2404.018	2440.062	PASS
	Ant1	2437	36.044	2419.018	2455.062	PASS
	Ant2	2437	36.124	2418.938	2455.062	PASS
	Ant1	2452	36.204	2433.938	2470.142	PASS
	Ant2	2452	36.044	2434.018	2470.062	PASS


## 11.2.2. Test Graphs






Date: 6.NOV.2021 07:08:56

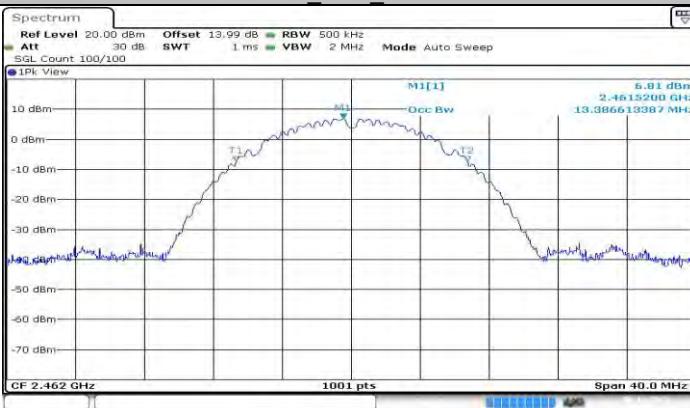11B Ant2 2437



Date: 6.NOV.2021 07:01:09

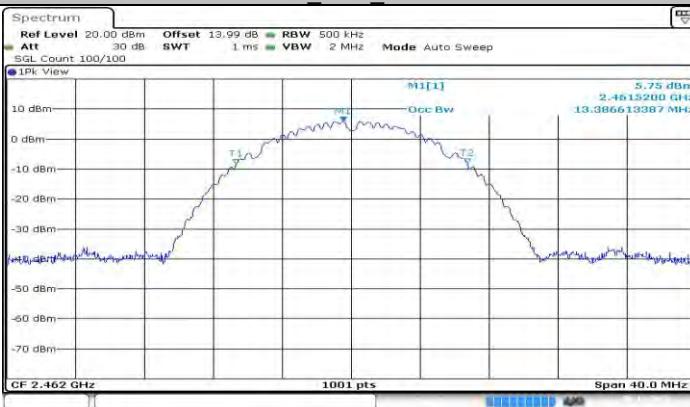11B Ant1 2462



Date: 6.NOV.2021 07:10:22

11B\_Ant2\_2462



Date: 6.NOV.2021 07:02:19


**11G\_Ant1\_2412**

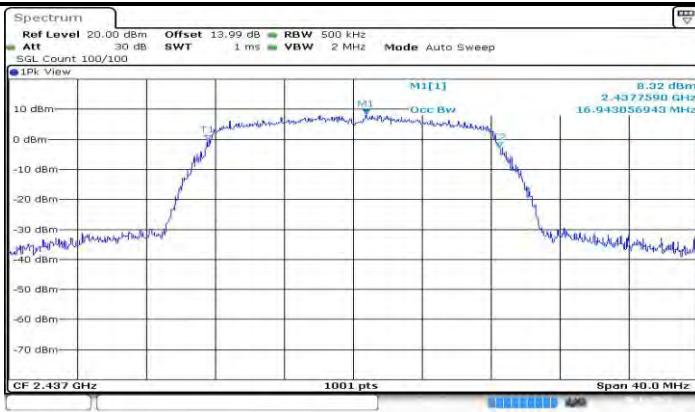Date: 6.NOV.2021 07:11:57

**11G\_Ant2\_2412**

Date: 6.NOV.2021 07:04:11

**11G\_Ant1\_2437**



Date: 6.NOV.2021 07:12:52

### 11G\_Ant2\_2437



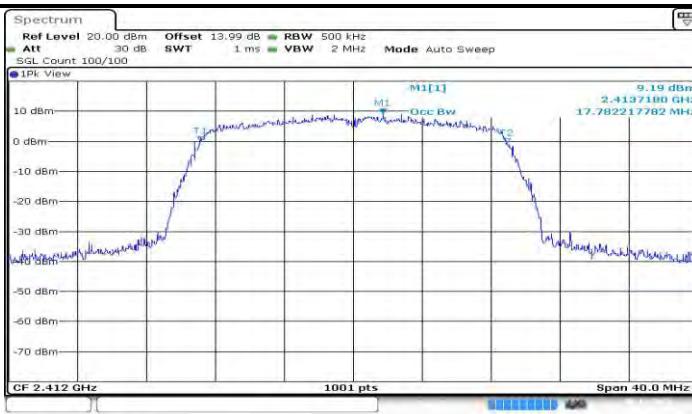
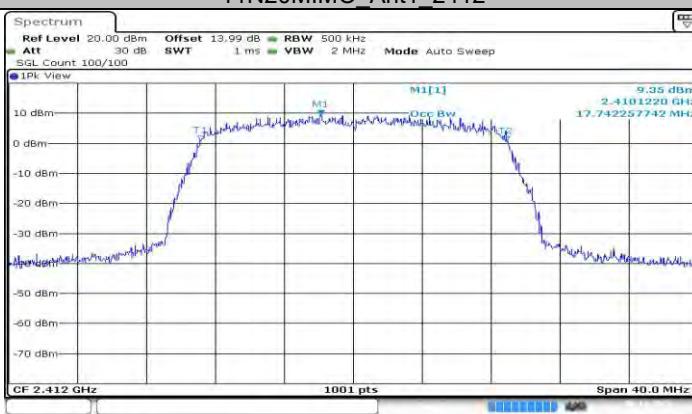
Date: 6.NOV.2021 07:06:10



### 11G\_Ant1\_2462






Date: 6.NOV.2021 07:17:08

### 11G\_Ant2\_2462


**11N20MIMO\_Ant1\_2412****11N20MIMO\_Ant2\_2412****11N20MIMO\_Ant1\_2437**

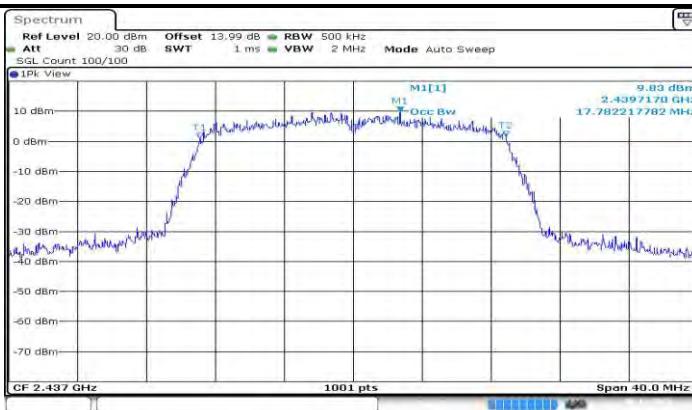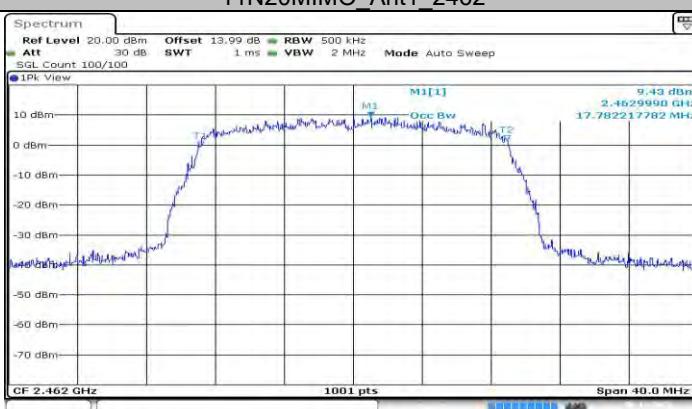**11N20MIMO\_Ant2\_2437****11N20MIMO\_Ant1\_2462****11N20MIMO\_Ant2\_2462**

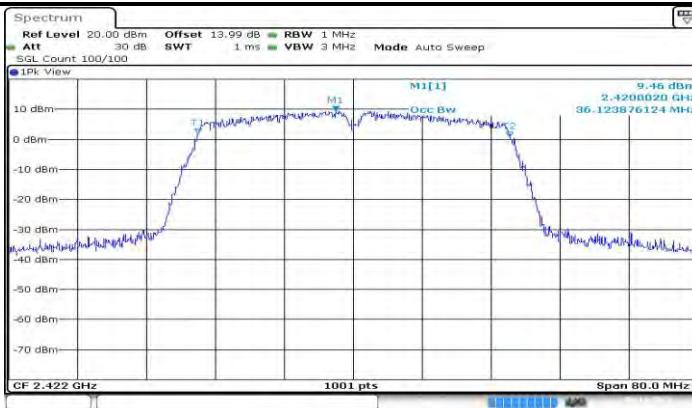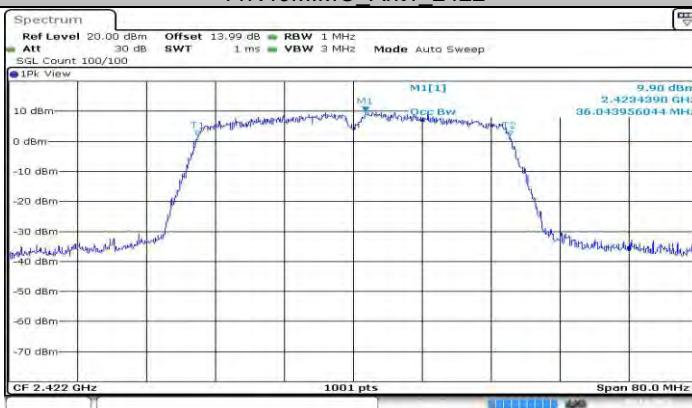**11N40MIMO\_Ant1\_2422****11N40MIMO\_Ant2\_2422****11N40MIMO\_Ant1\_2437**

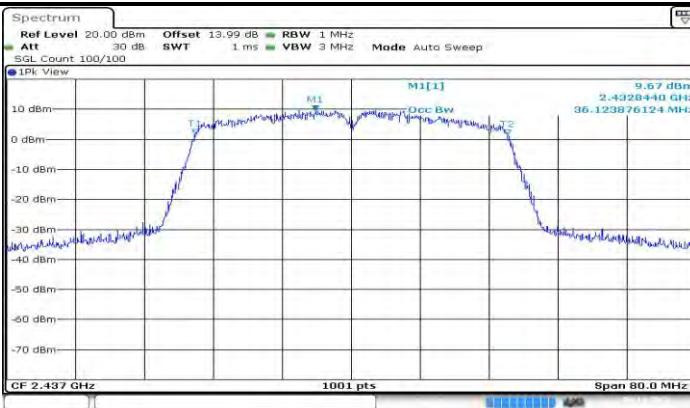

Date: 6.NOV.2021 07:56:27

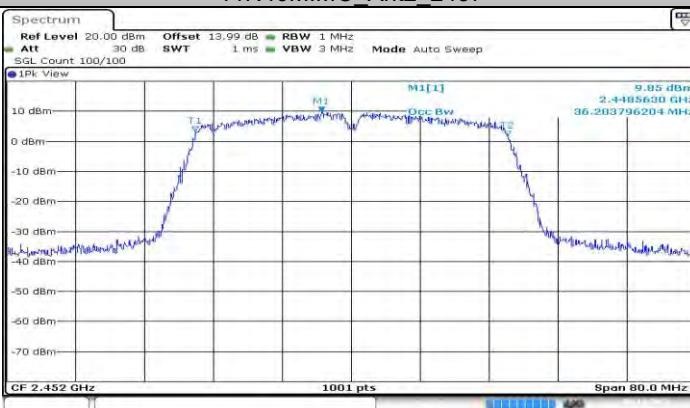**11N40MIMO\_Ant2\_2437**

Date: 6.NOV.2021 08:00:25

**11N40MIMO\_Ant1\_2452**

Date: 6.NOV.2021 08:02:28

**11N40MIMO\_Ant2\_2452**

## 11.3. Appendix C: Maximum conducted output power

### 11.3.1. Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	14.18	≤30	PASS
	Ant2	2412	13.70	≤30	PASS
	Ant1	2437	14.51	≤30	PASS
	Ant2	2437	13.38	≤30	PASS
	Ant1	2462	14.33	≤30	PASS
	Ant2	2462	13.41	≤30	PASS
11G	Ant1	2412	14.71	≤30	PASS
	Ant2	2412	14.29	≤30	PASS
	Ant1	2437	14.41	≤30	PASS
	Ant2	2437	13.78	≤30	PASS
	Ant1	2462	14.62	≤30	PASS
	Ant2	2462	13.91	≤30	PASS
11N20MIMO	Ant1	2412	14.48	≤30	PASS
	Ant2	2412	14.20	≤30	PASS
	total	2412	17.4	≤30	PASS
	Ant1	2437	14.25	≤30	PASS
	Ant2	2437	13.61	≤30	PASS
	total	2437	17.0	≤30	PASS
	Ant1	2462	14.36	≤30	PASS
	Ant2	2462	13.86	≤30	PASS
	total	2462	17.1	≤30	PASS
	Ant1	2422	14.40	≤30	PASS
11N40MIMO	Ant2	2422	14.14	≤30	PASS
	total	2422	17.3	≤30	PASS
	Ant1	2437	14.28	≤30	PASS
	Ant2	2437	14.05	≤30	PASS
	total	2437	17.2	≤30	PASS
	Ant1	2452	14.53	≤30	PASS
	Ant2	2452	13.99	≤30	PASS
	total	2452	17.3	≤30	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor

2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.


## 11.4. Appendix D: Maximum power spectral density


### 11.4.1. Test Result

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-7.24	≤8	PASS
		2437	-7.4	≤8	PASS
		2462	-6.84	≤8	PASS
11G	Ant1	2412	-7.6	≤8	PASS
		2437	-8.55	≤8	PASS
		2462	-8.49	≤8	PASS
11N20MIMO	Ant1	2412	-8.32	≤8	PASS
	Ant2	2412	-8.69	≤8	PASS
	total	2412	-5.49	≤8	PASS
	Ant1	2437	-8.31	≤8	PASS
	Ant2	2437	-10.19	≤8	PASS
	total	2437	-6.14	≤8	PASS
	Ant1	2462	-9.45	≤8	PASS
	Ant2	2462	-9.23	≤8	PASS
	total	2462	-6.33	≤8	PASS
	Ant1	2422	-11.82	≤8	PASS
11N40MIMO	Ant2	2422	-12.32	≤8	PASS
	total	2422	-9.05	≤8	PASS
	Ant1	2437	-11.68	≤8	PASS
	Ant2	2437	-10.88	≤8	PASS
	total	2437	-8.25	≤8	PASS
	Ant1	2452	-11.95	≤8	PASS
	Ant2	2452	-12.84	≤8	PASS
	total	2452	-9.36	≤8	PASS

For 802.11b&g mode, only the worst case antenna record in this report.

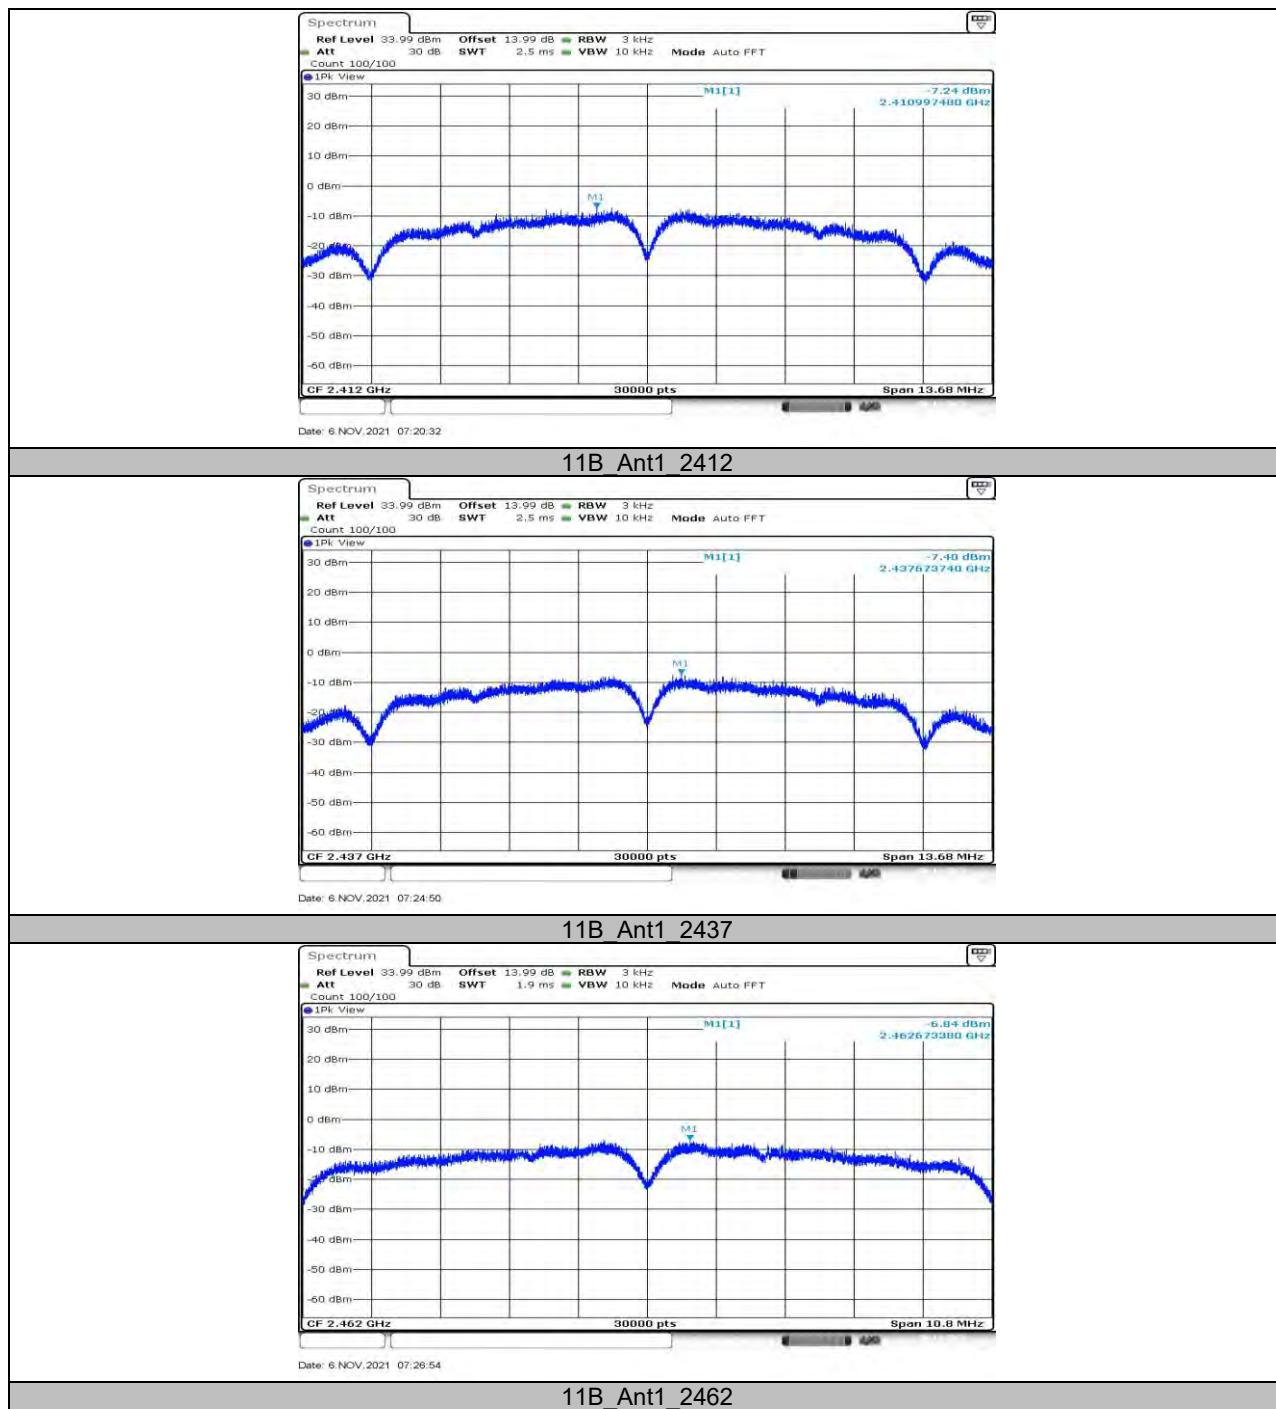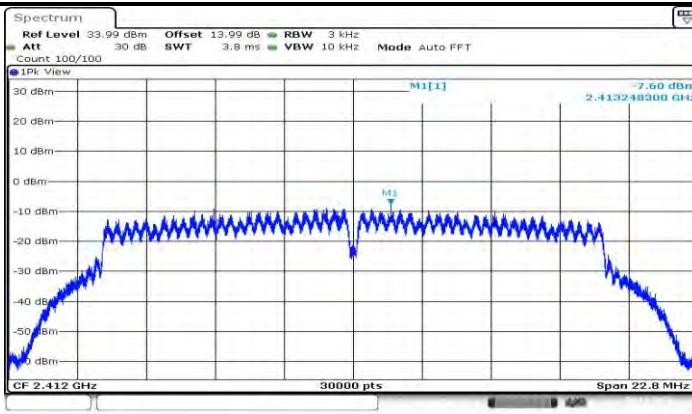
## 11.4.2. Test Graphs






Date: 6 NOV. 2021 07:29:58

### 11G\_Ant1\_2412

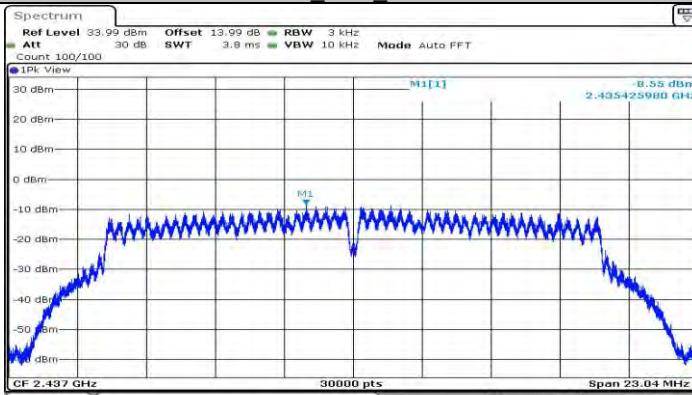


Date: 6 NOV. 2021 07:31:40

### 11G\_Ant1\_2437

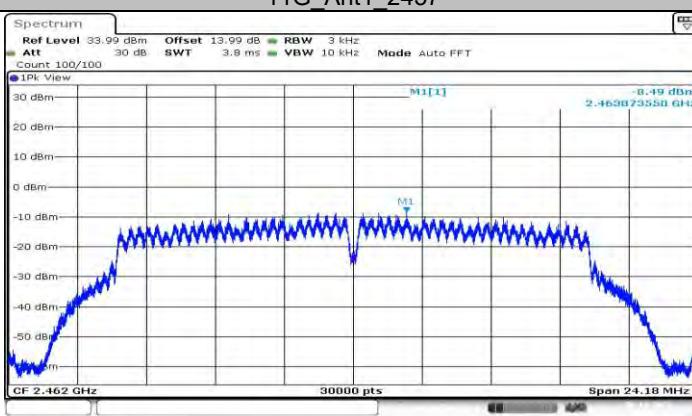


Date: 6 NOV. 2021 07:33:22


### 11G\_Ant1\_2462

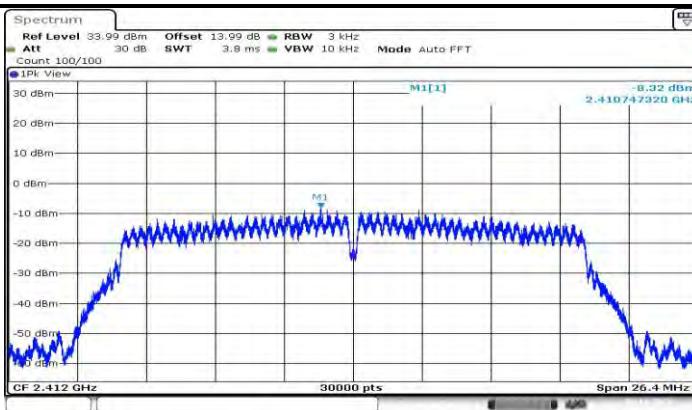

Date: 6.NOV.2021 07:36:12



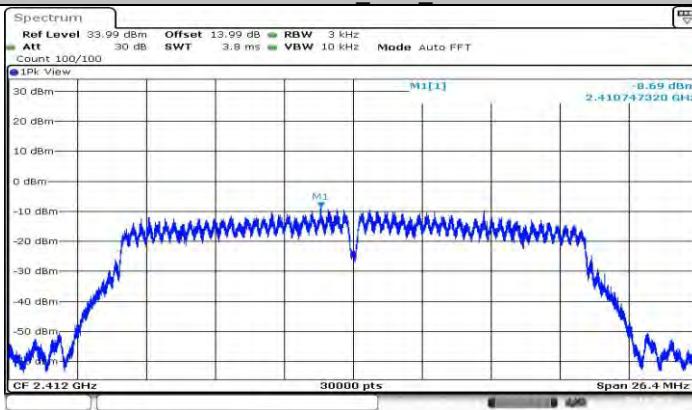
**11N20MIMO\_Ant1\_2412**

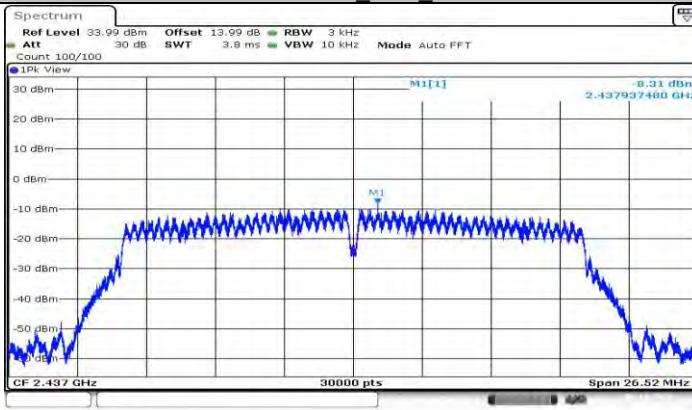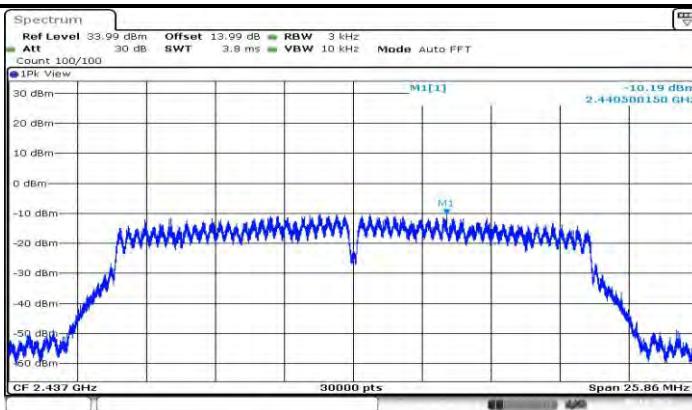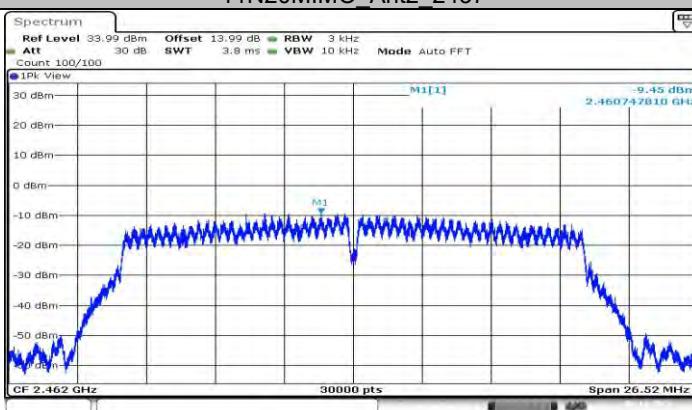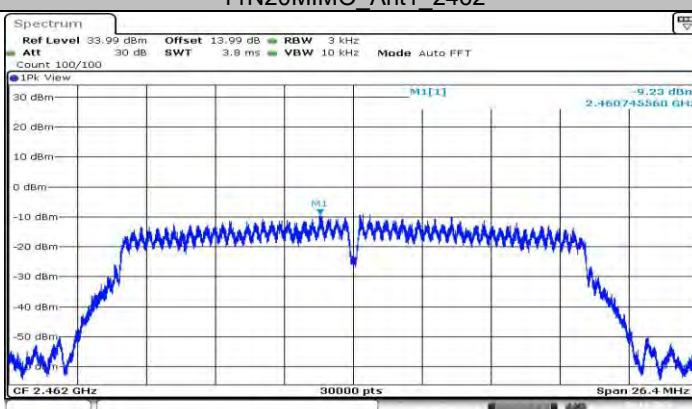
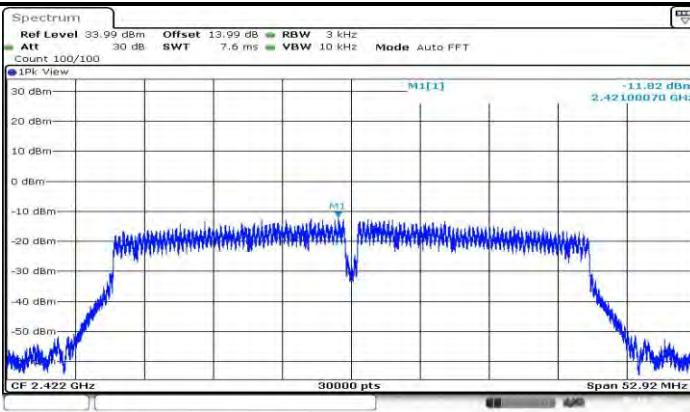
Date: 6.NOV.2021 07:38:07

**11N20MIMO\_Ant2\_2412**


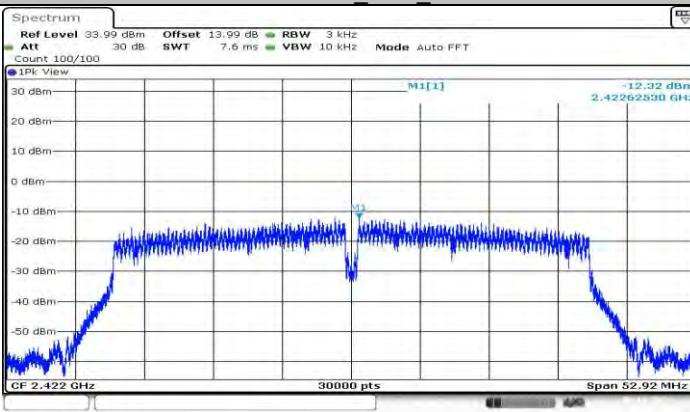
Date: 6.NOV.2021 07:40:13

**11N20MIMO\_Ant1\_2437**

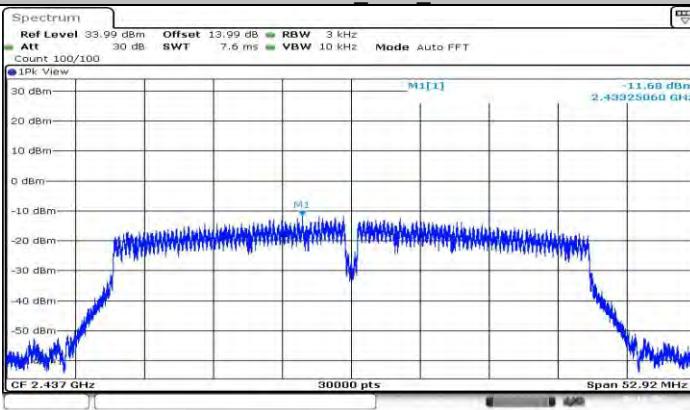

**11N20MIMO\_Ant2\_2437**

**11N20MIMO\_Ant1\_2462**

**11N20MIMO\_Ant2\_2462**



Date: 6.NOV.2021 07:49:02




**11N40MIMO\_Ant1\_2422**

Date: 6.NOV.2021 07:51:48

**11N40MIMO\_Ant2\_2422**

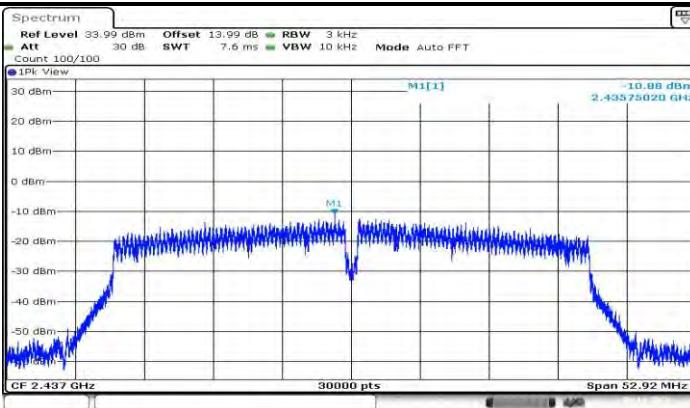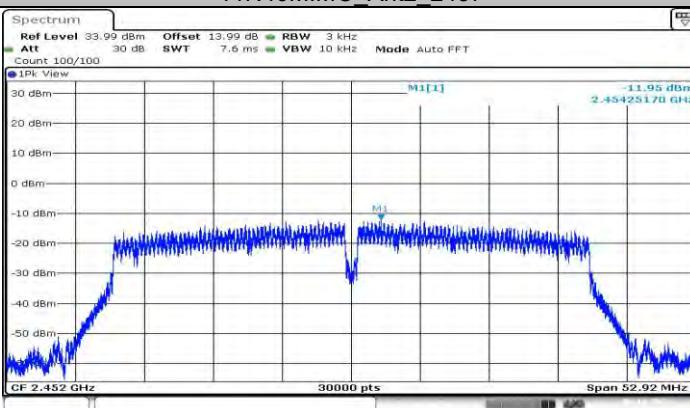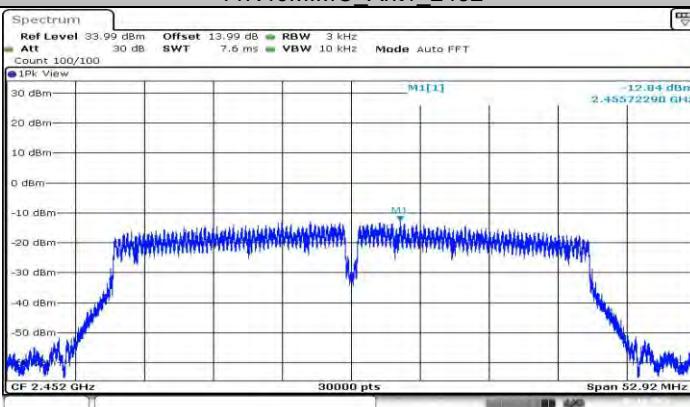Date: 6.NOV.2021 07:54:48

**11N40MIMO\_Ant1\_2437**

**11N40MIMO\_Ant2\_2437****11N40MIMO\_Ant1\_2452****11N40MIMO\_Ant2\_2452**


## 11.5. Appendix E: Band edge measurements




### 11.5.1. Test Result




Test Mode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	4.72	-41.72	≤-25.28	PASS
		High	2462	6.49	-44.7	≤-23.51	PASS
11G	Ant1	Low	2412	4.76	-40.07	≤-25.24	PASS
		High	2462	4.47	-44.47	≤-25.53	PASS
11N20MIMO	Ant1	Low	2412	4.52	-37.57	≤-25.48	PASS
	Ant2	Low	2412	3.33	-39.32	≤-26.67	PASS
	Ant1	High	2462	4.37	-44.17	≤-25.63	PASS
	Ant2	High	2462	4.27	-44.93	≤-25.73	PASS
11N40MIMO	Ant1	Low	2422	1.62	-36.1	≤-28.38	PASS
	Ant2	Low	2422	1.80	-39.59	≤-28.2	PASS
	Ant1	High	2452	2.25	-43.8	≤-27.75	PASS
	Ant2	High	2452	1.09	-44.15	≤-28.91	PASS


For 802.11b&g mode, only the worst case antenna record in this report.
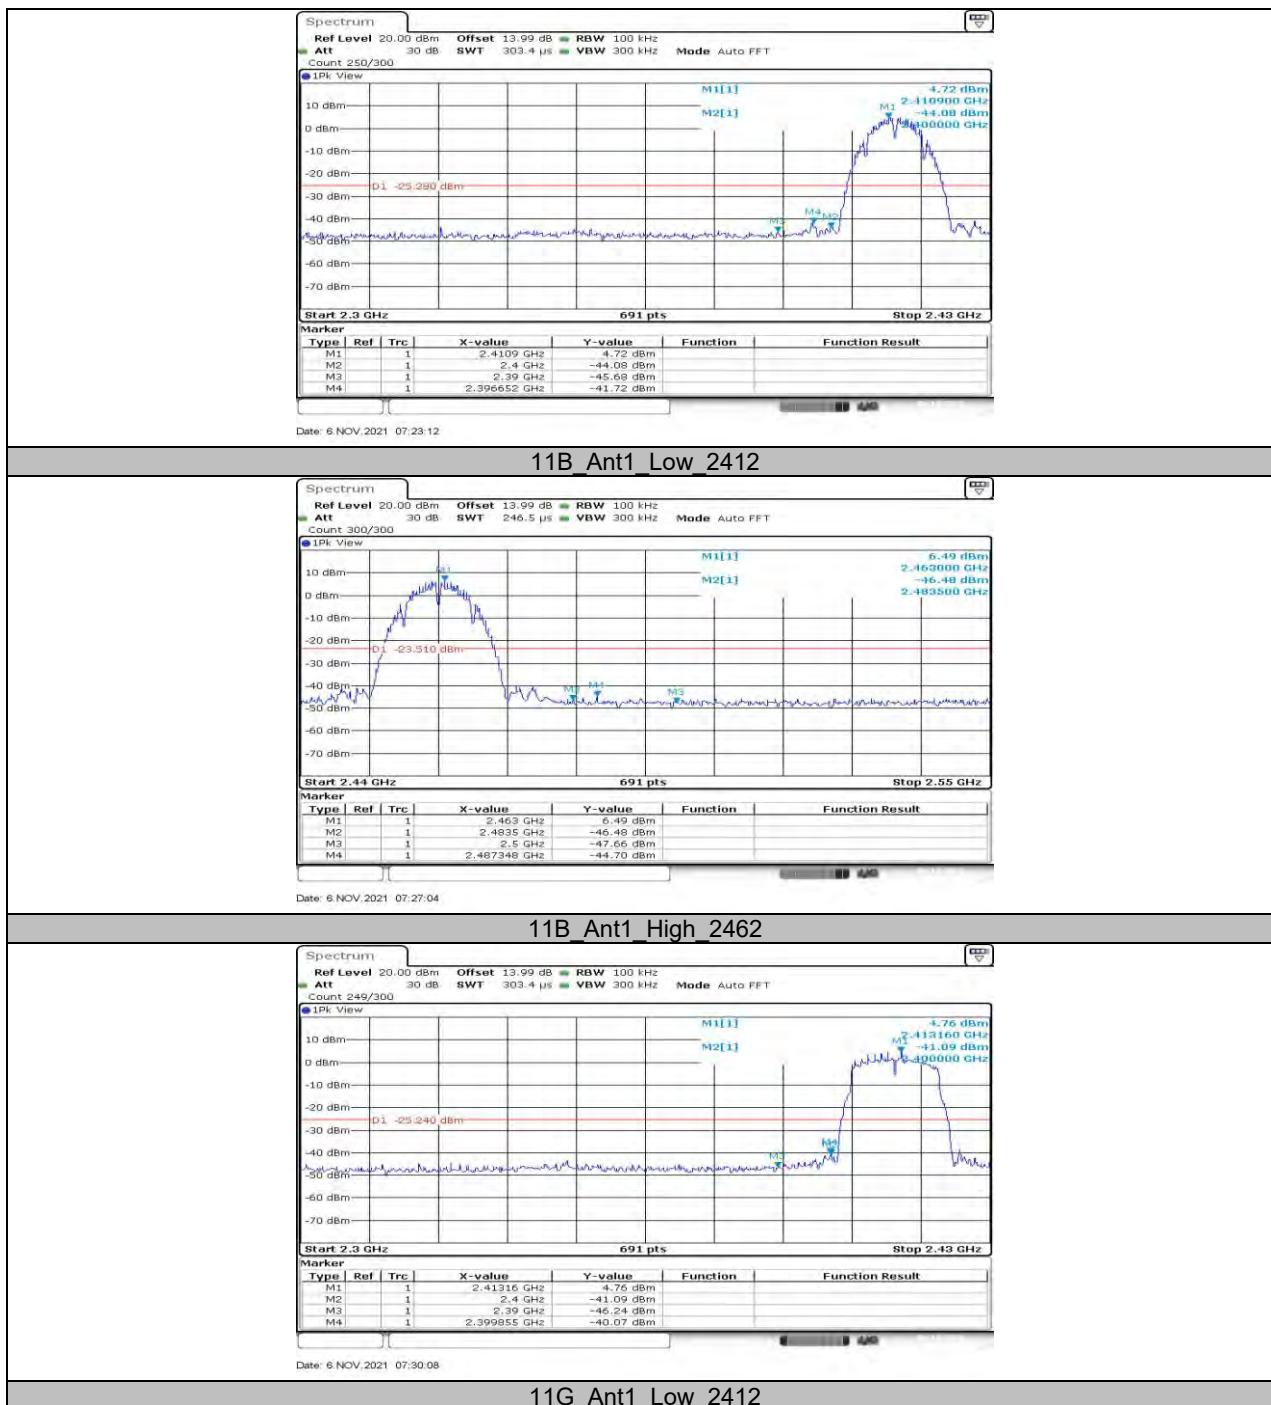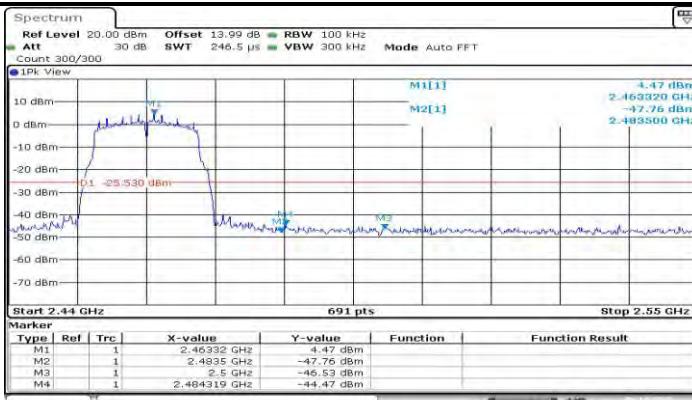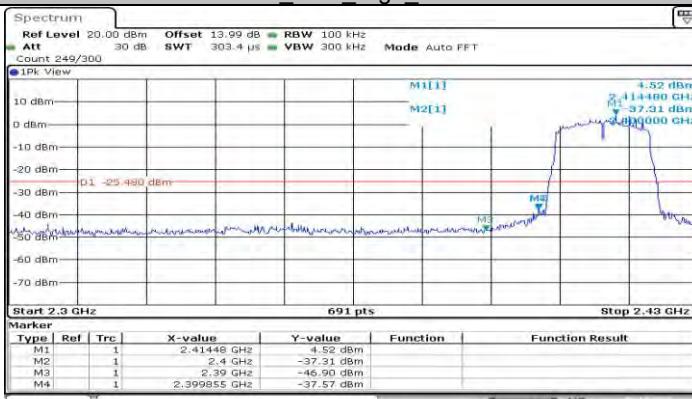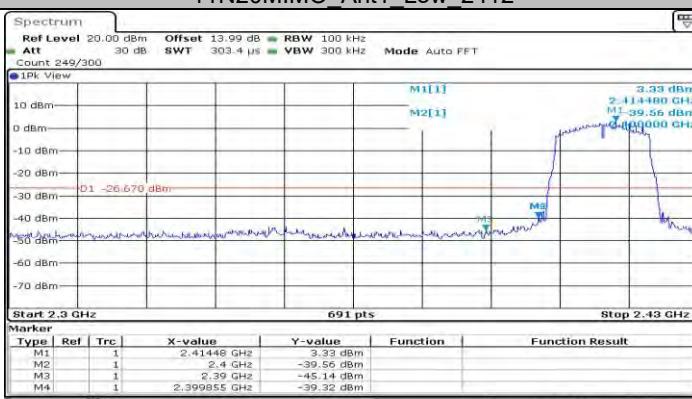
## 11.5.2. Test Graphs



**11G\_Ant1\_High\_2462****11N20MIMO\_Ant1\_Low\_2412****11N20MIMO\_Ant2\_Low\_2412**

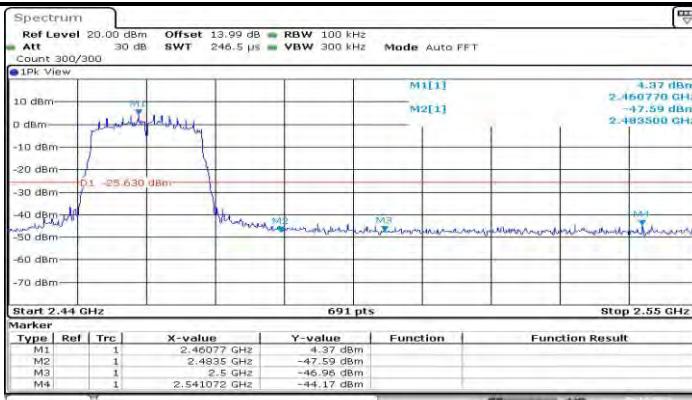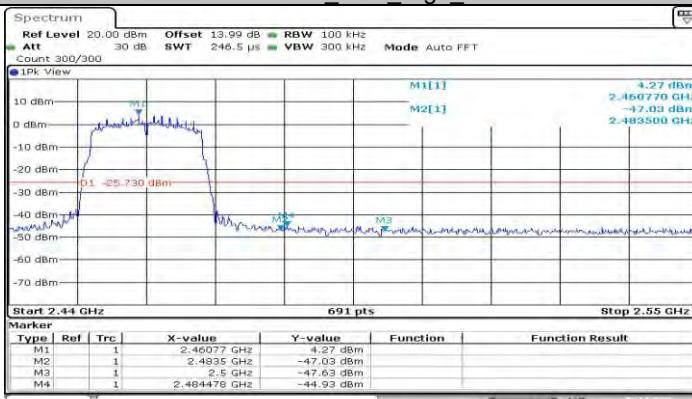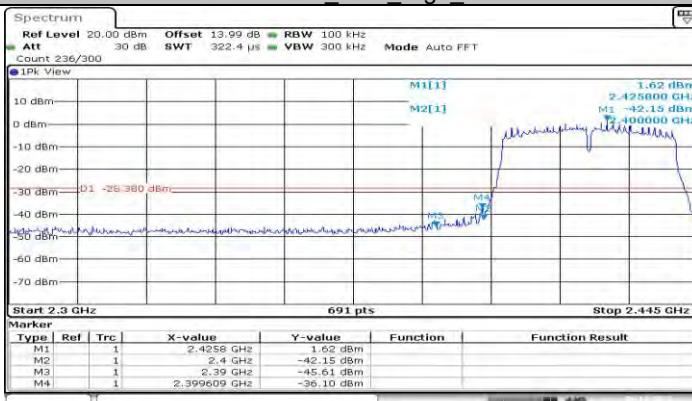**11N20MIMO Ant1\_High\_2462****11N20MIMO Ant2\_High\_2462****11N40MIMO Ant1\_Low\_2422**

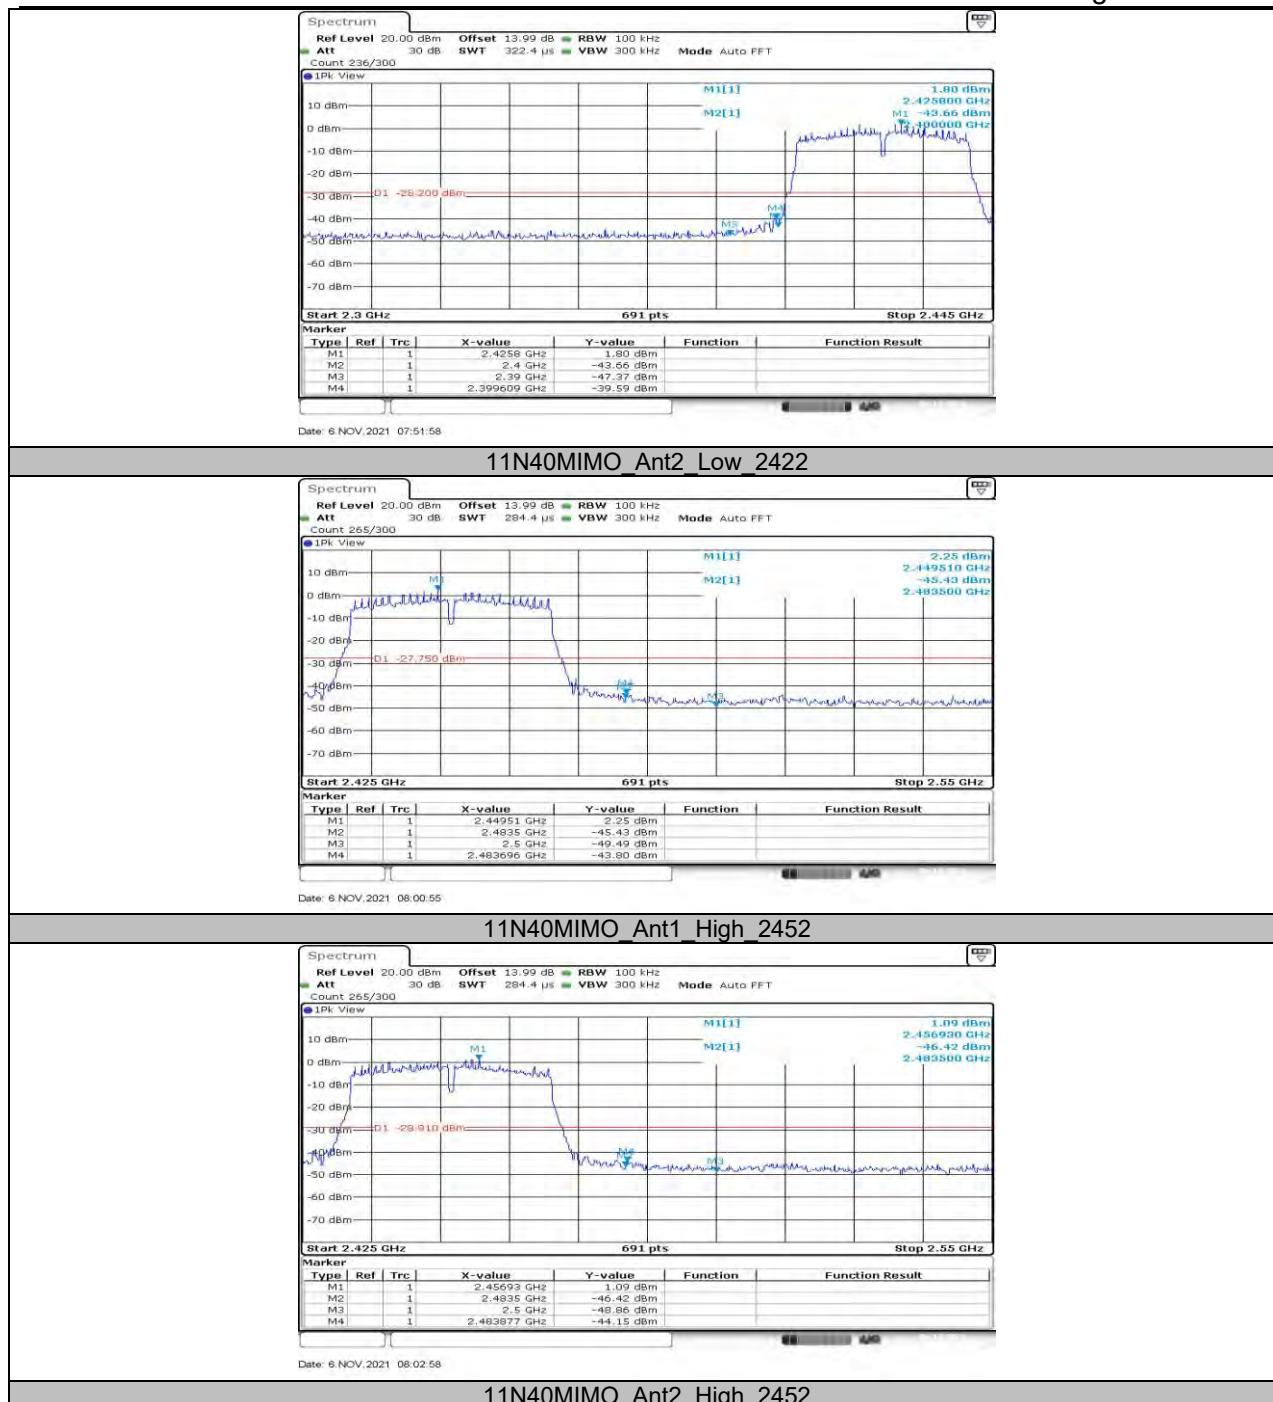


## 11.6. Appendix F: Conducted Spurious Emission


### 11.6.1. Test Result

Test Mode	Antenna	Channel	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	5.86	---	PASS
			30~1000	-54.35	≤-24.14	PASS
			1000~26500	-49.17	≤-24.14	PASS
		2437	Reference	6.13	---	PASS
			30~1000	-53.45	≤-23.87	PASS
			1000~26500	-48.39	≤-23.87	PASS
		2462	Reference	6.35	---	PASS
			30~1000	-53.97	≤-23.65	PASS
			1000~26500	-48.5	≤-23.65	PASS
11G	Ant1	2412	Reference	5.02	---	PASS
			30~1000	-53.79	≤-24.98	PASS
			1000~26500	-48.92	≤-24.98	PASS
		2437	Reference	4.61	---	PASS
			30~1000	-53.93	≤-25.39	PASS
			1000~26500	-48.5	≤-25.39	PASS
		2462	Reference	4.45	---	PASS
			30~1000	-53.53	≤-25.55	PASS
			1000~26500	-48.73	≤-25.55	PASS
11N20MIMO	Ant1	2412	Reference	4.88	---	PASS
			30~1000	-54.59	≤-25.12	PASS
			1000~26500	-47.87	≤-25.12	PASS
	Ant2	2412	Reference	4.54	---	PASS
			30~1000	-54.52	≤-25.46	PASS
			1000~26500	-48.42	≤-25.46	PASS
	Ant1	2437	Reference	4.69	---	PASS
			30~1000	-54.11	≤-25.31	PASS
			1000~26500	-48.93	≤-25.31	PASS
	Ant2	2437	Reference	3.38	---	PASS
			30~1000	-54.45	≤-26.62	PASS
			1000~26500	-48.74	≤-26.62	PASS
	Ant1	2462	Reference	5.08	---	PASS
			30~1000	-53.85	≤-24.92	PASS
			1000~26500	-48.39	≤-24.92	PASS
	Ant2	2462	Reference	4.30	---	PASS
			30~1000	-53.5	≤-25.7	PASS
			1000~26500	-48.93	≤-25.7	PASS
11N40MIMO	Ant1	2422	Reference	1.75	---	PASS
			30~1000	-54.15	≤-28.25	PASS
			1000~26500	-48.38	≤-28.25	PASS
	Ant2	2422	Reference	1.75	---	PASS
			30~1000	-54.44	≤-28.25	PASS
			1000~26500	-48.51	≤-28.25	PASS
	Ant1	2437	Reference	1.84	---	PASS
			30~1000	-53.88	≤-28.16	PASS
			1000~26500	-48.72	≤-28.16	PASS
	Ant2	2437	Reference	2.04	---	PASS
			30~1000	-53.97	≤-27.96	PASS
			1000~26500	-48.53	≤-27.96	PASS
	Ant1	2452	Reference	1.81	---	PASS
			30~1000	-53.89	≤-28.19	PASS
			1000~26500	-48.93	≤-28.19	PASS
	Ant2	2452	Reference	1.78	---	PASS
			30~1000	-53.62	≤-28.22	PASS
			1000~26500	-48.51	≤-28.22	PASS

For 802.11b&g mode, only the worst case antenna record in this report.

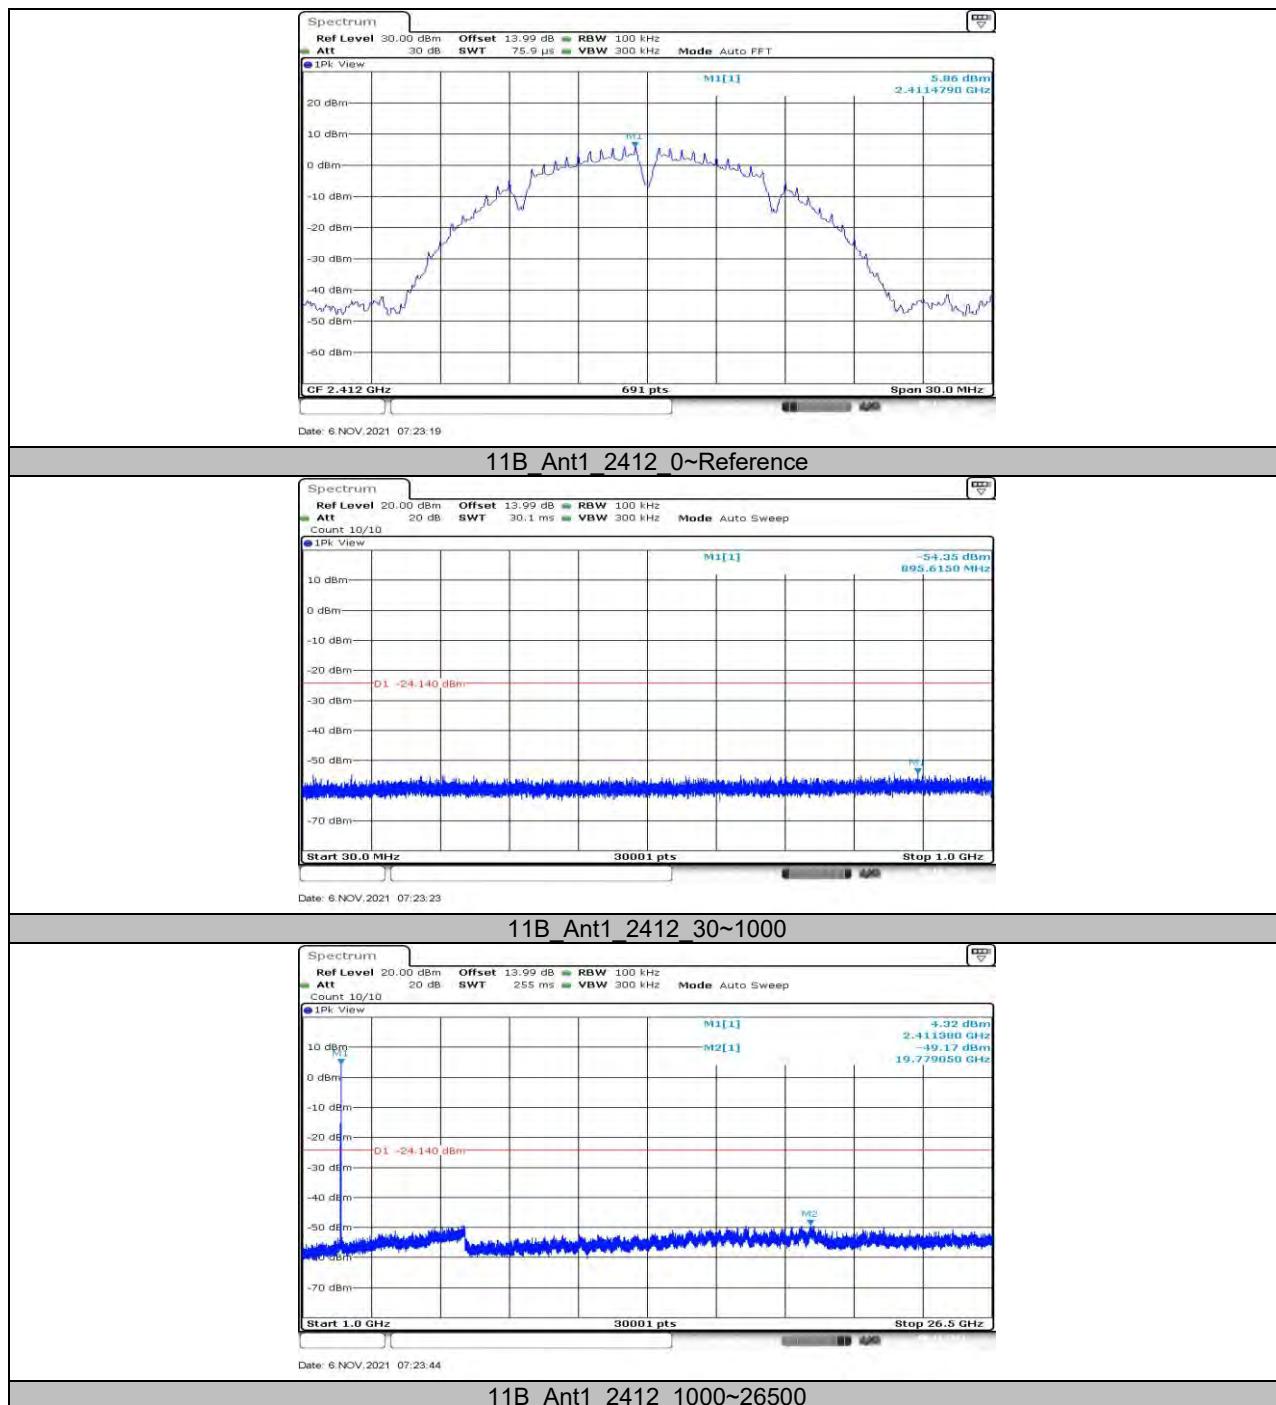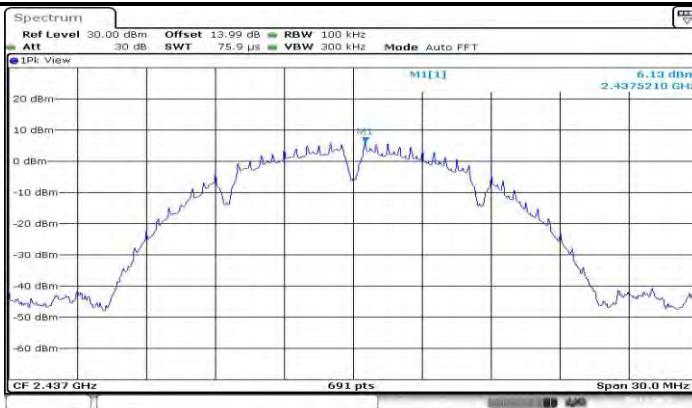
## 11.6.2. Test Graphs






Date: 6.NOV.2021 07:24:55

### 11B\_Ant1\_2437\_~Reference

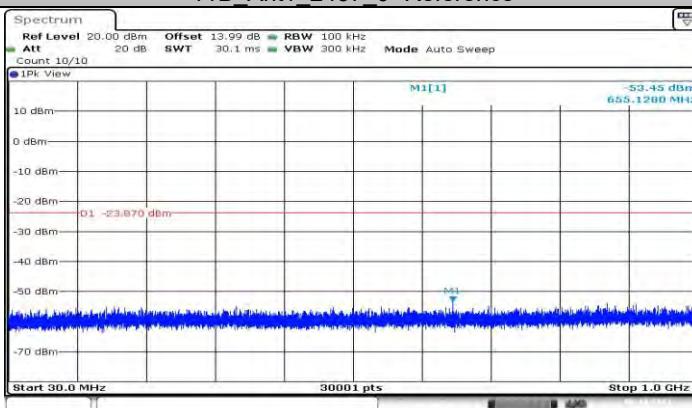


Date: 6.NOV.2021 07:25:00

### 11B\_Ant1\_2437\_30~1000

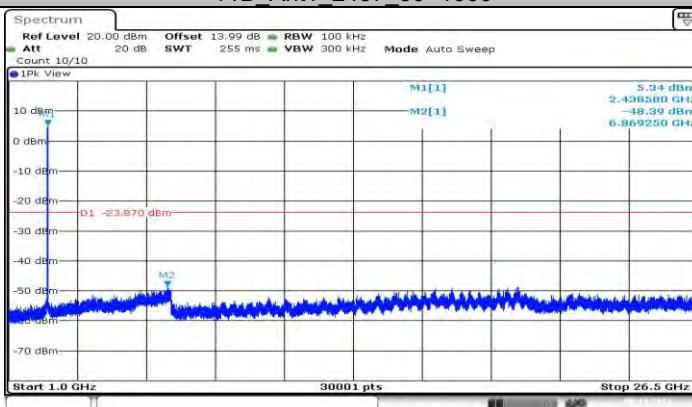


Date: 6.NOV.2021 07:25:21


### 11B\_Ant1\_2437\_1000~26500

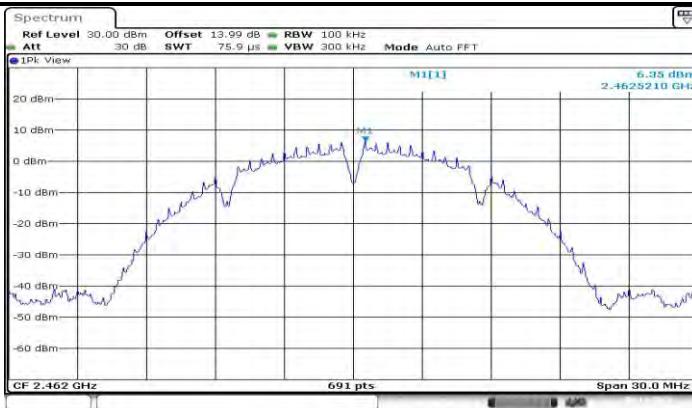


### 11B\_Ant1\_2462\_0~Reference

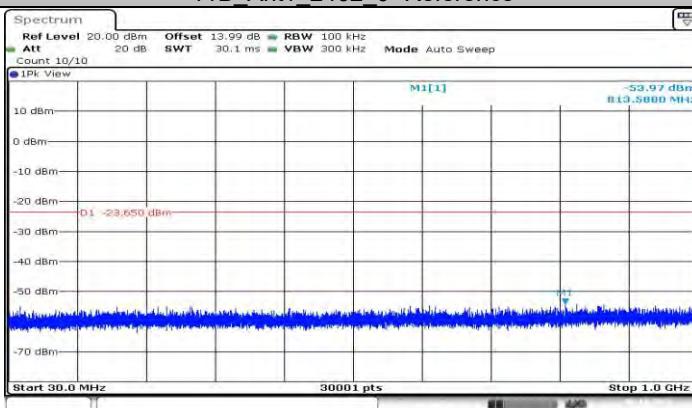


### 11B\_Ant1\_2462\_30~1000

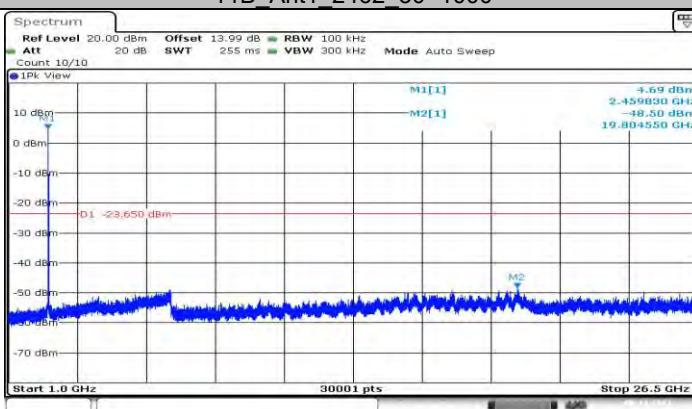


### 11B\_Ant1\_2462\_1000~26500

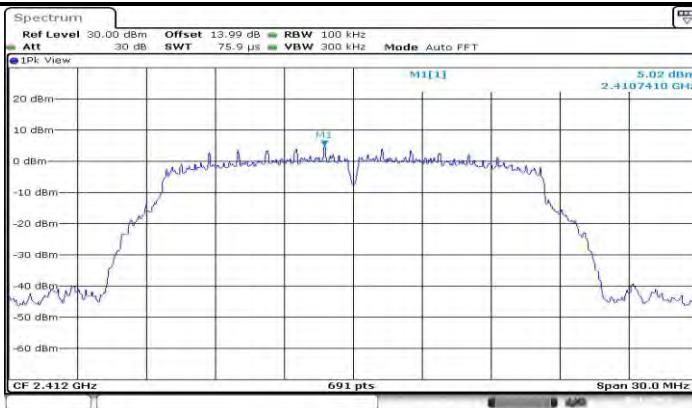

### 11G\_Ant1\_2412\_0~Reference

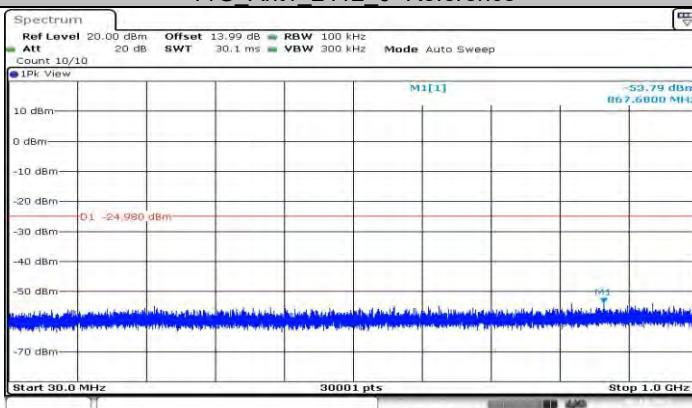


### 11G\_Ant1\_2412\_30~1000

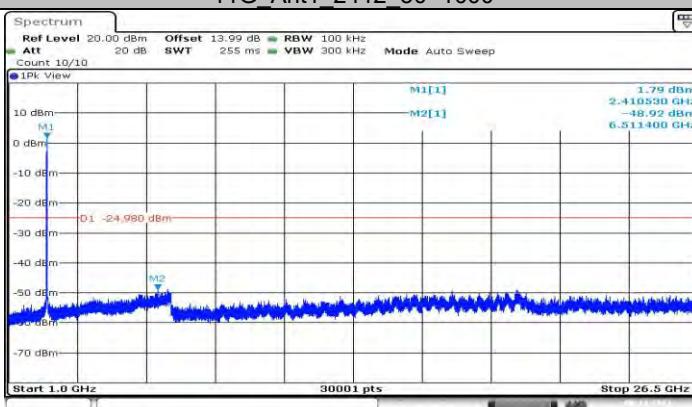


### 11G\_Ant1\_2412\_1000~26500



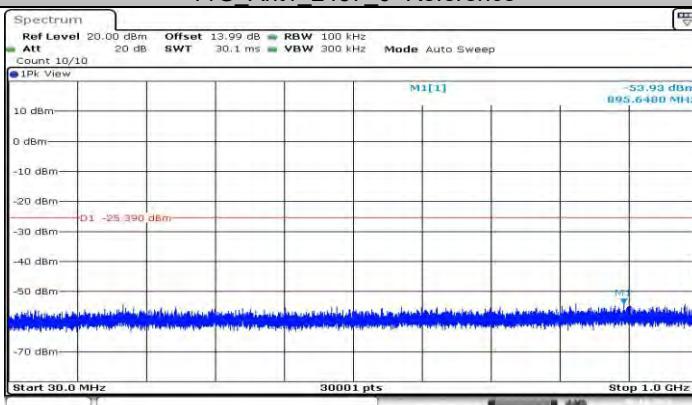
### 11G\_Ant1\_2437\_0~Reference




### 11G\_Ant1\_2437\_30~1000

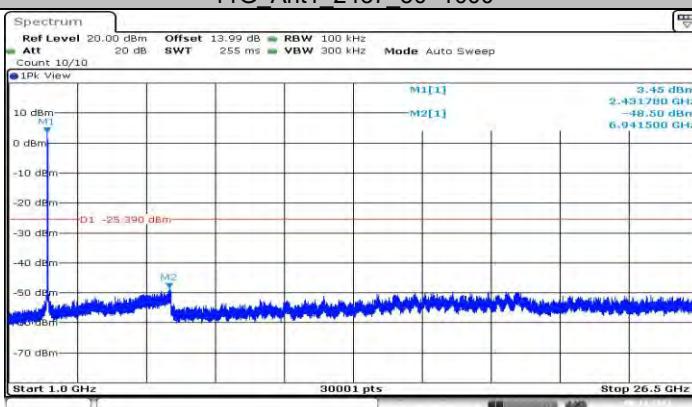


### 11G\_Ant1\_2437\_1000~26500

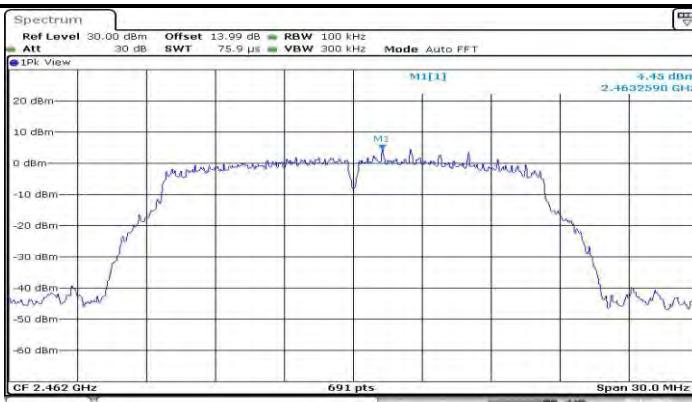


### 11G\_Ant1\_2462\_0~Reference

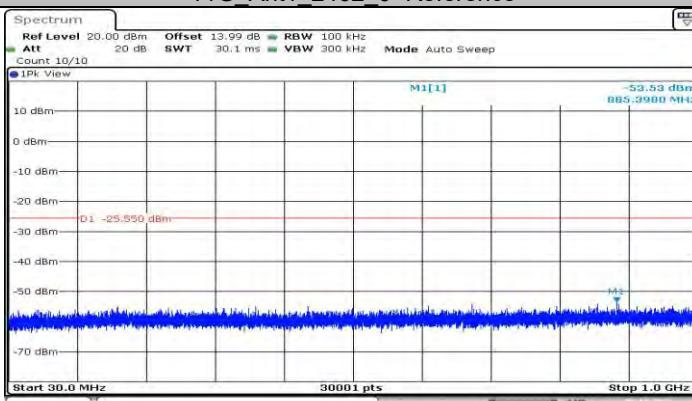


### 11G\_Ant1\_2462\_30~1000

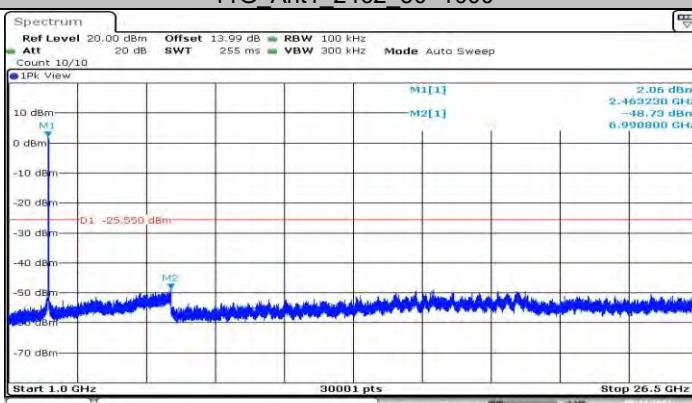


### 11G\_Ant1\_2462\_1000~26500

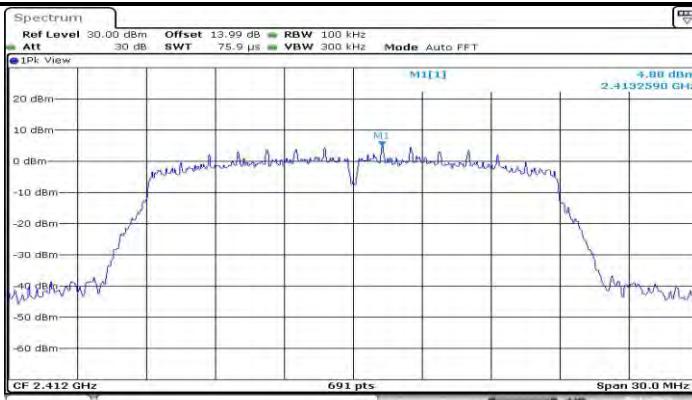


### 11N20MIMO\_Ant1\_2412\_0~Reference

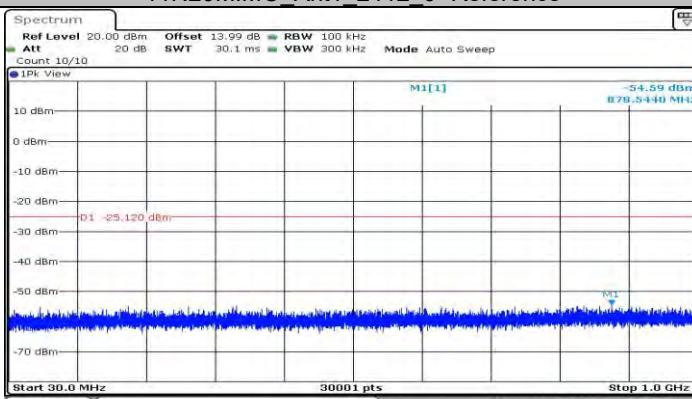


### 11N20MIMO\_Ant1\_2412\_30~1000

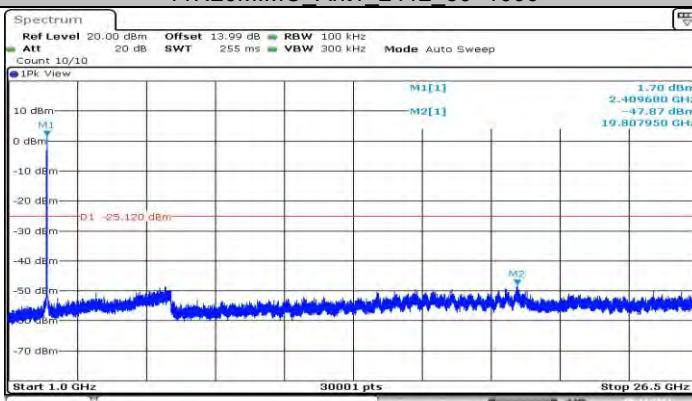


### 11N20MIMO\_Ant1\_2412\_1000~26500

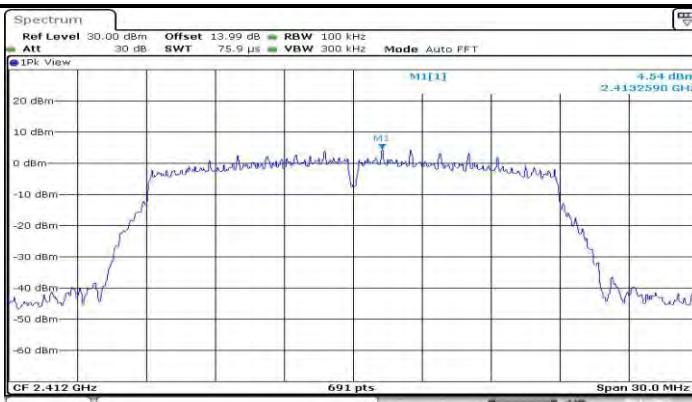


### 11N20MIMO\_Ant2\_2412\_0~Reference

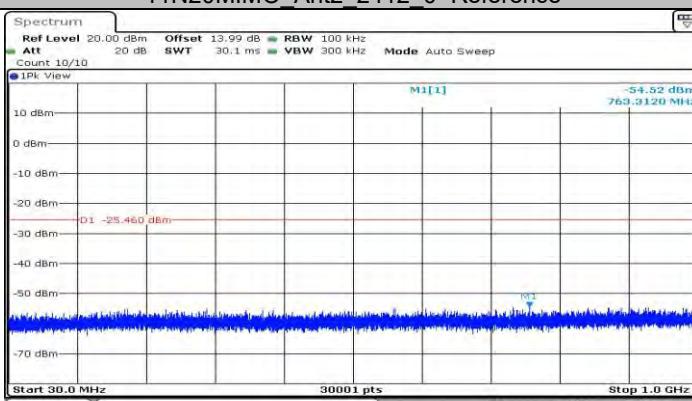


### 11N20MIMO\_Ant2\_2412\_30~1000

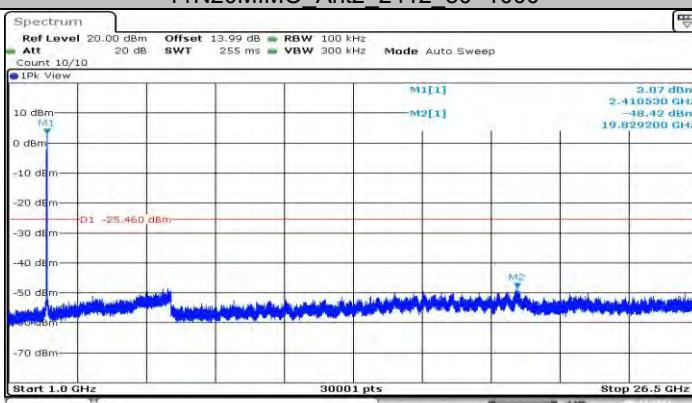


### 11N20MIMO\_Ant2\_2412\_1000~26500

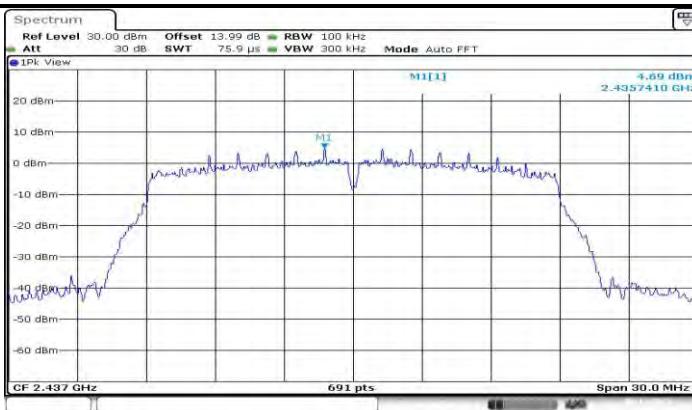


### 11N20MIMO\_Ant1\_2437\_0~Reference

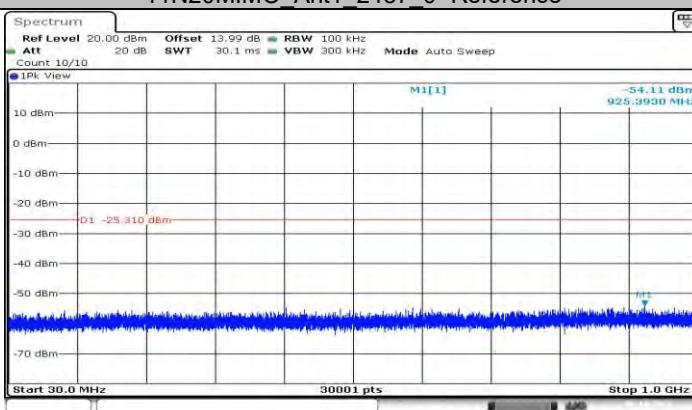


### 11N20MIMO\_Ant1\_2437\_30~1000

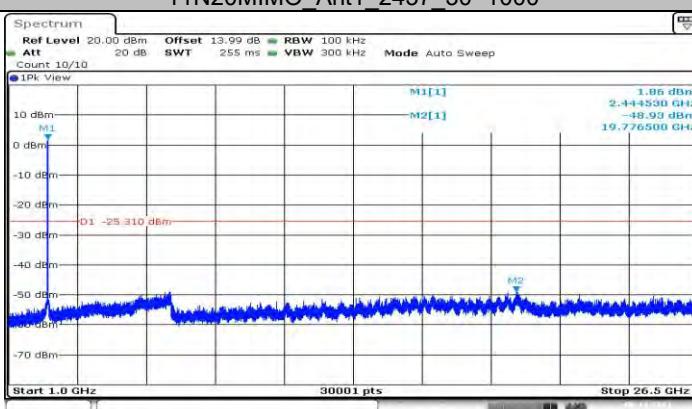


### 11N20MIMO\_Ant1\_2437\_1000~26500

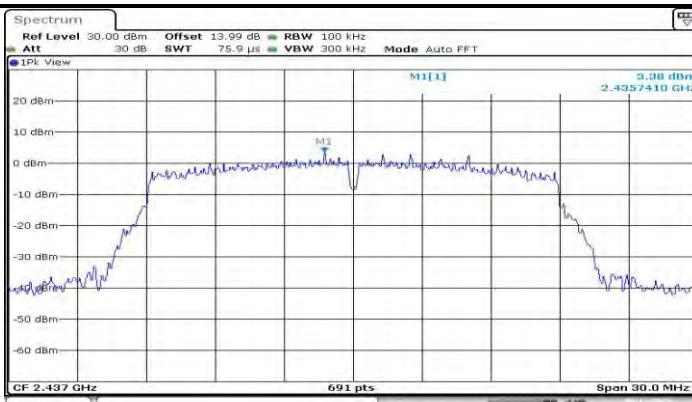


### 11N20MIMO\_Ant2\_2437\_0~Reference

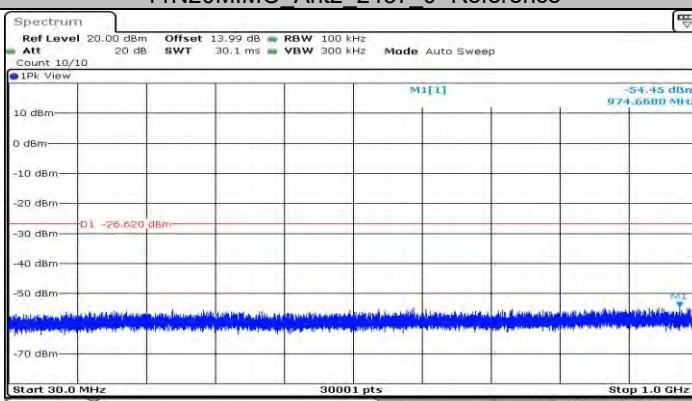


### 11N20MIMO\_Ant2\_2437\_30~1000

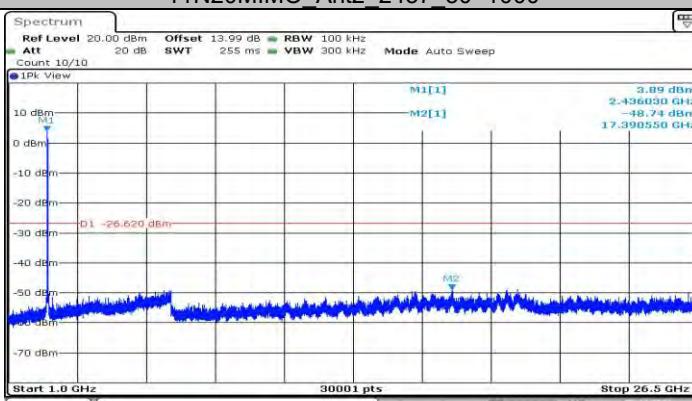


### 11N20MIMO\_Ant2\_2437\_1000~26500

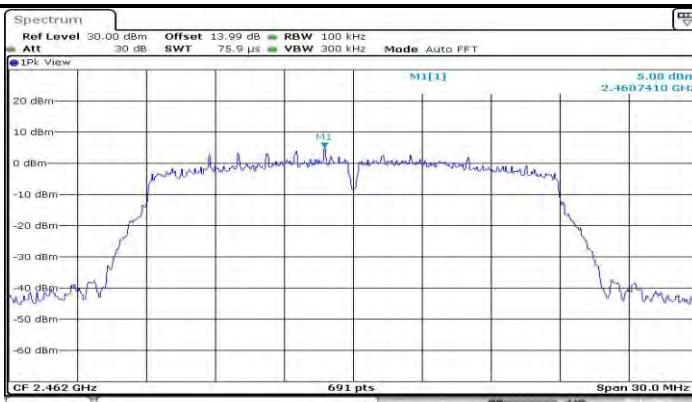


### 11N20MIMO\_Ant1\_2462\_0~Reference

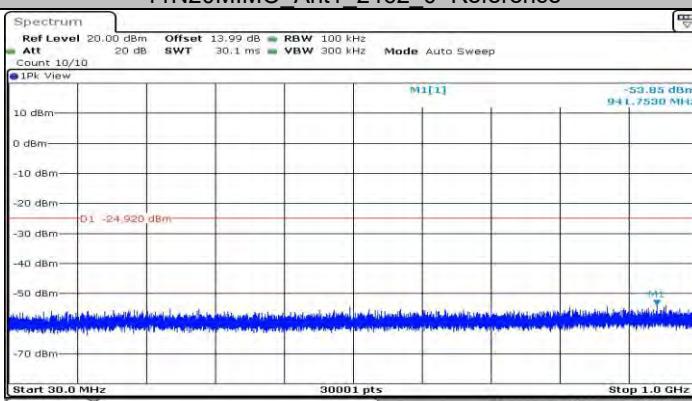


### 11N20MIMO\_Ant1\_2462\_30~1000

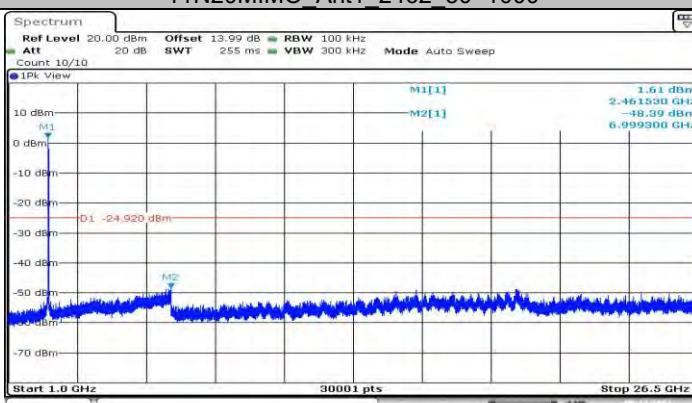


### 11N20MIMO\_Ant1\_2462\_1000~26500

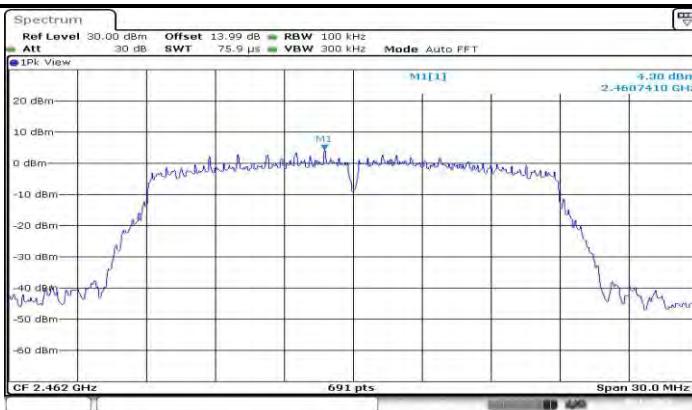


### 11N20MIMO\_Ant2\_2462\_0~Reference

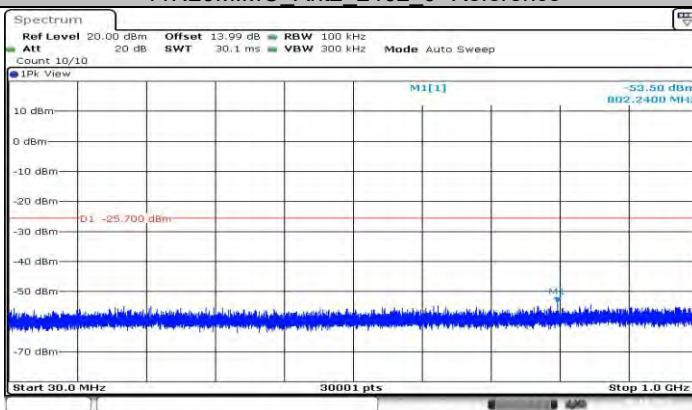


### 11N20MIMO\_Ant2\_2462\_30~1000

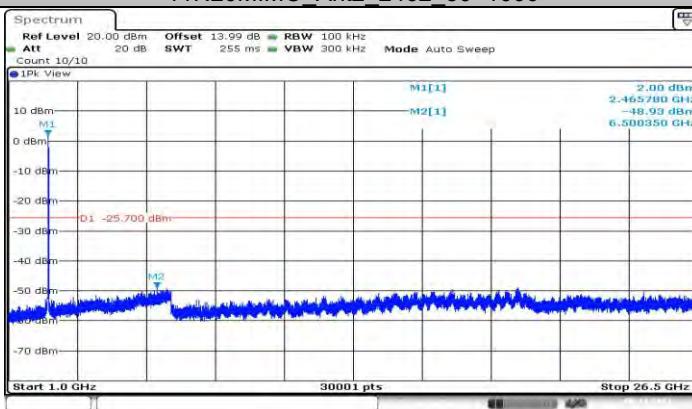


### 11N20MIMO\_Ant2\_2462\_1000~26500

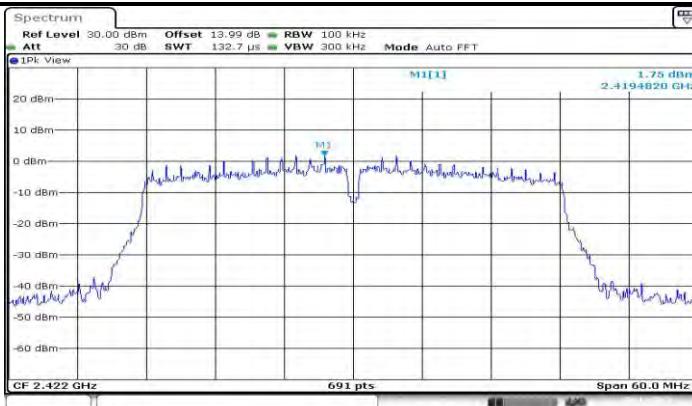


### 11N40MIMO\_Ant1\_2422\_0~Reference

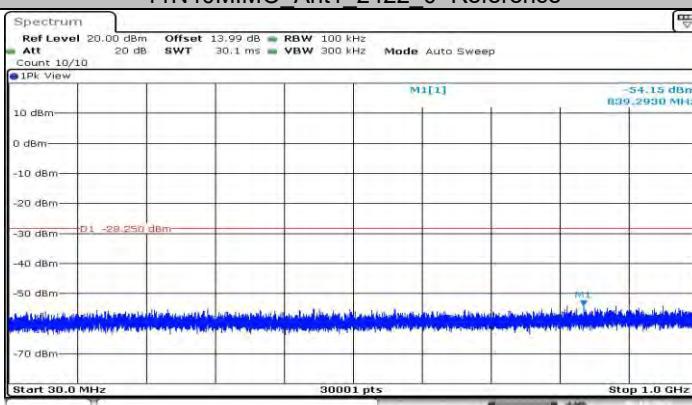


### 11N40MIMO\_Ant1\_2422\_30~1000

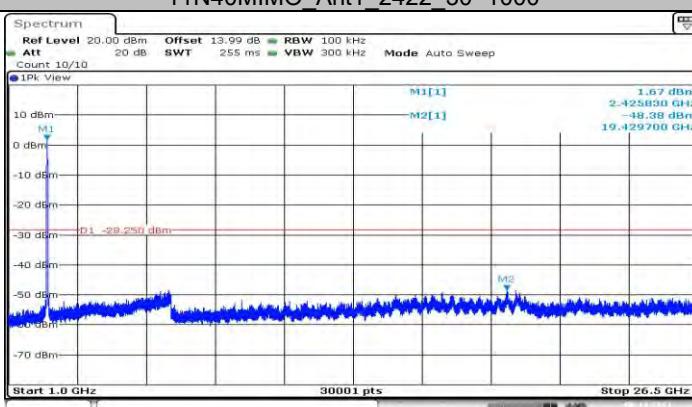


### 11N40MIMO\_Ant1\_2422\_1000~26500

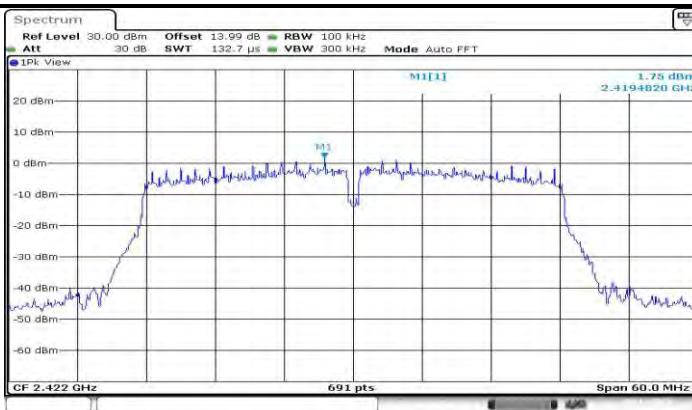


### 11N40MIMO\_Ant2\_2422\_0~Reference

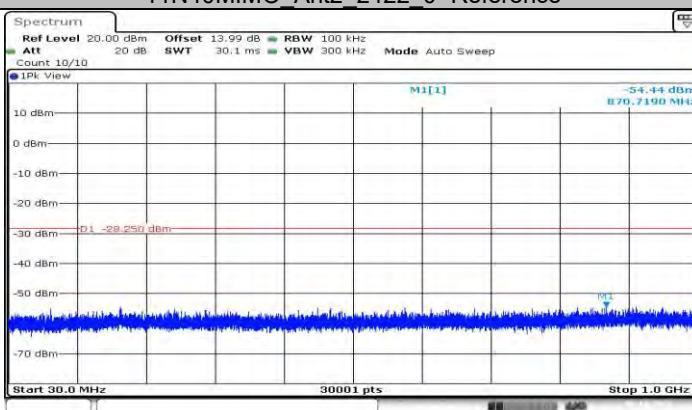


### 11N40MIMO\_Ant2\_2422\_30~1000

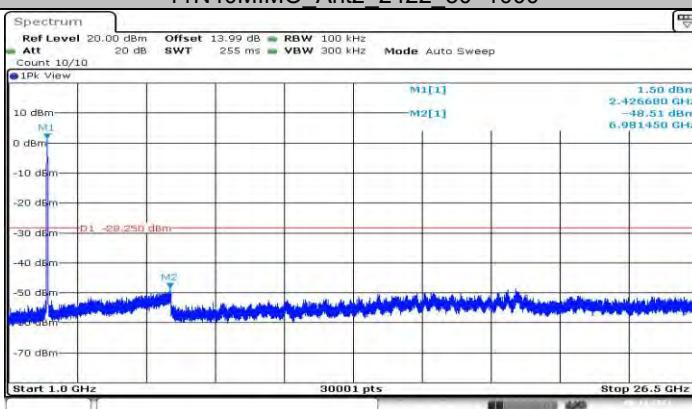


### 11N40MIMO\_Ant2\_2422\_1000~26500

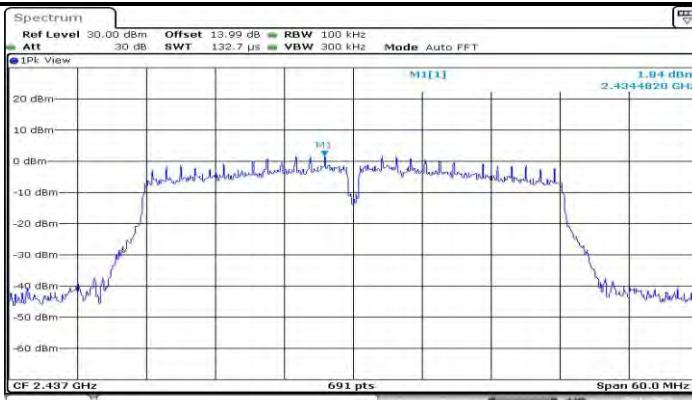


### 11N40MIMO\_Ant1\_2437\_0~Reference

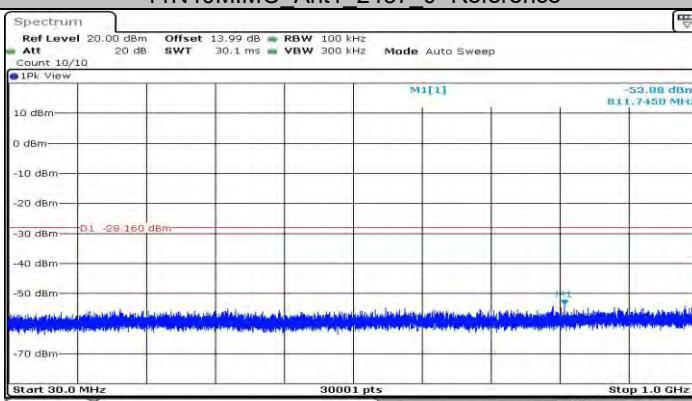


### 11N40MIMO\_Ant1\_2437\_30~1000

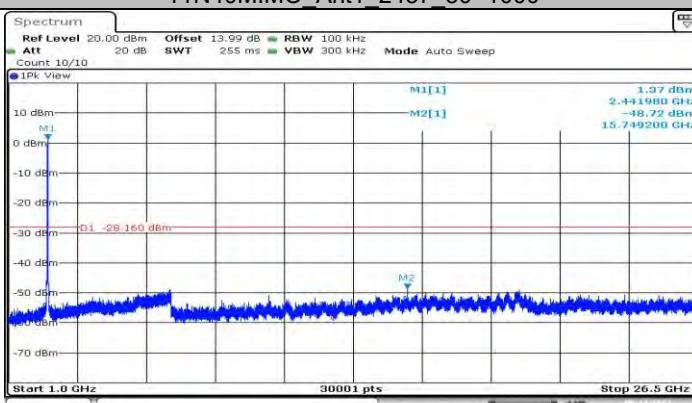


### 11N40MIMO\_Ant1\_2437\_1000~26500

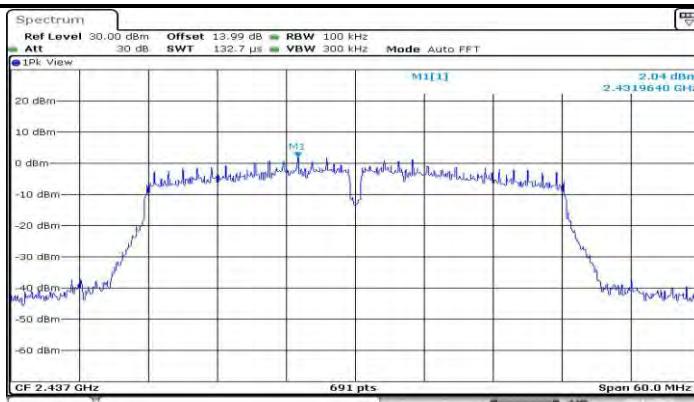


### 11N40MIMO\_Ant2\_2437\_0~Reference



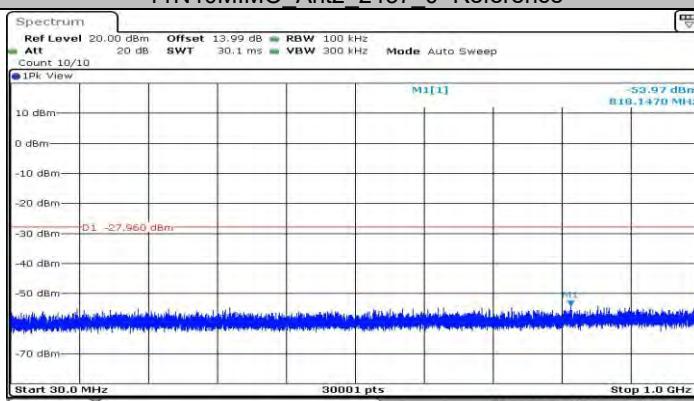


### 11N40MIMO\_Ant2\_2437\_30~1000

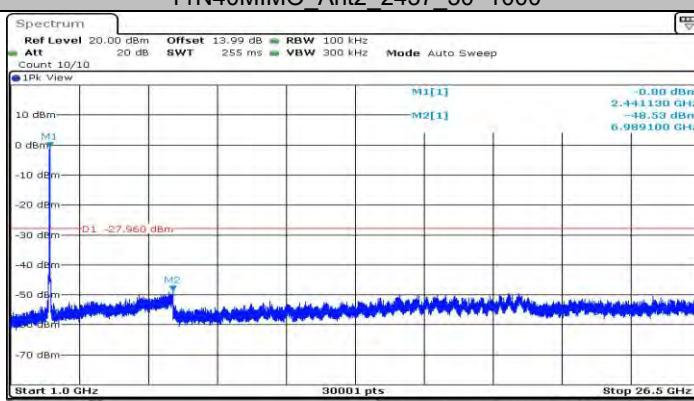

### 11N40MIMO\_Ant2\_2437\_1000~26500

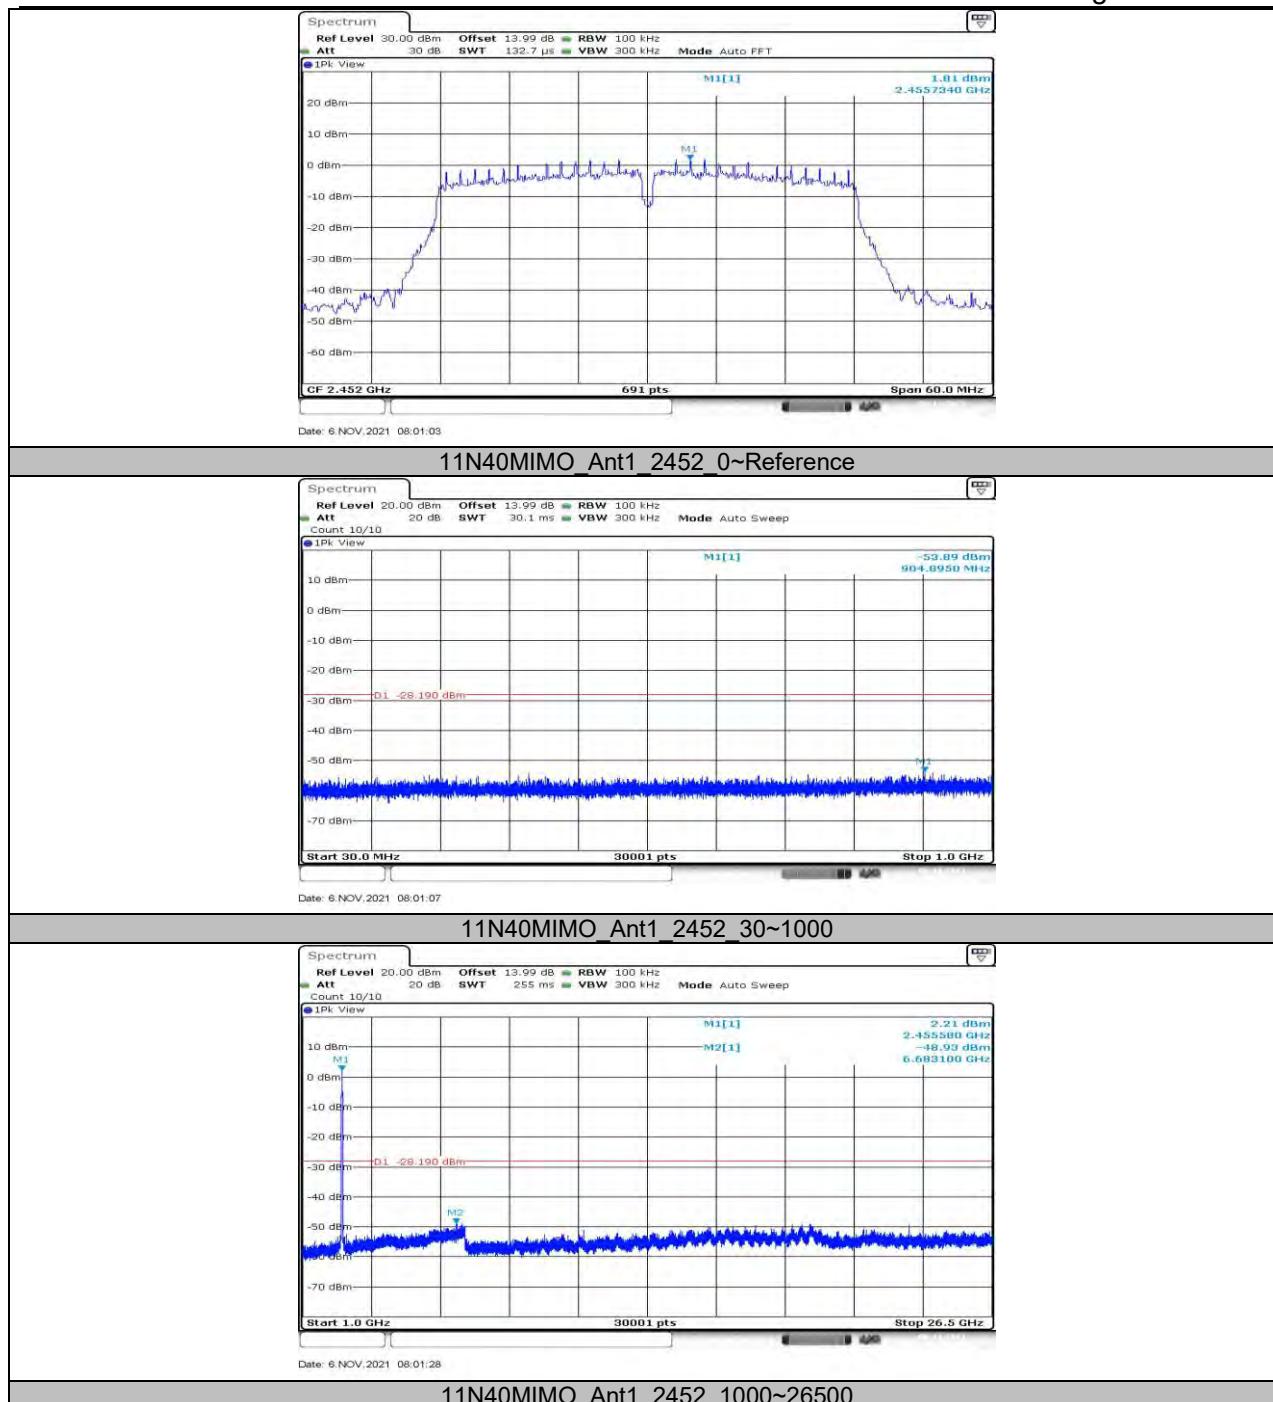

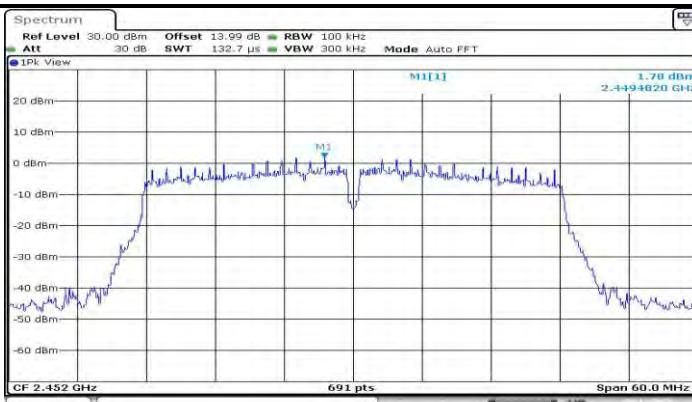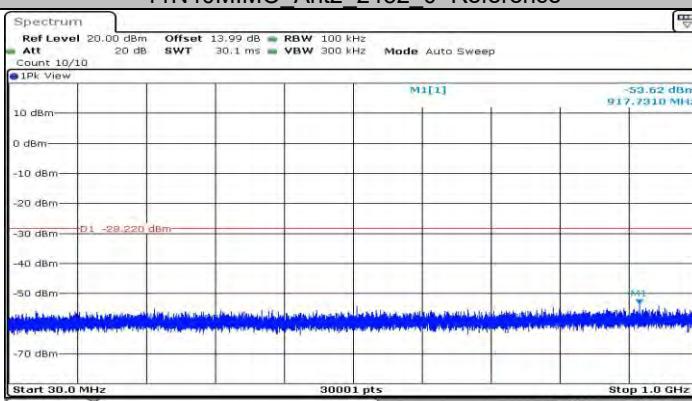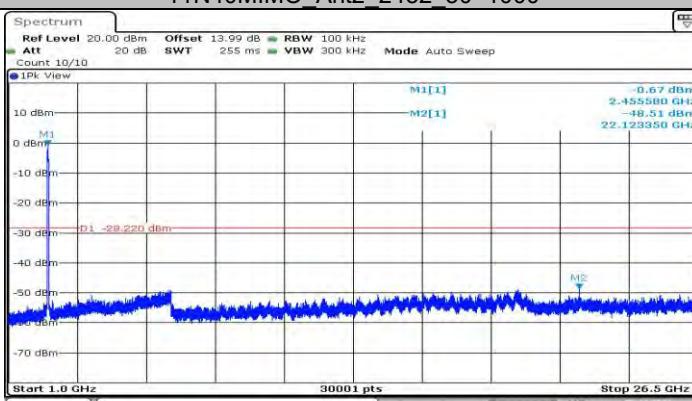
**11N40MIMO\_Ant2\_2452\_0~Reference**

**11N40MIMO\_Ant2\_2452\_30~1000**

**11N40MIMO\_Ant2\_2452\_1000~26500**

## 11.7. Appendix G: Duty Cycle

### 11.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	8.35	8.39	0.9952	99.52	0.02	0.12	0.01
11G	1.38	1.42	0.9718	97.18	0.12	0.72	1
11N20MIMO	1.29	1.33	0.9699	96.99	0.13	0.78	1
11N40MIMO	0.64	0.68	0.9412	94.12	0.26	1.56	2

Note:

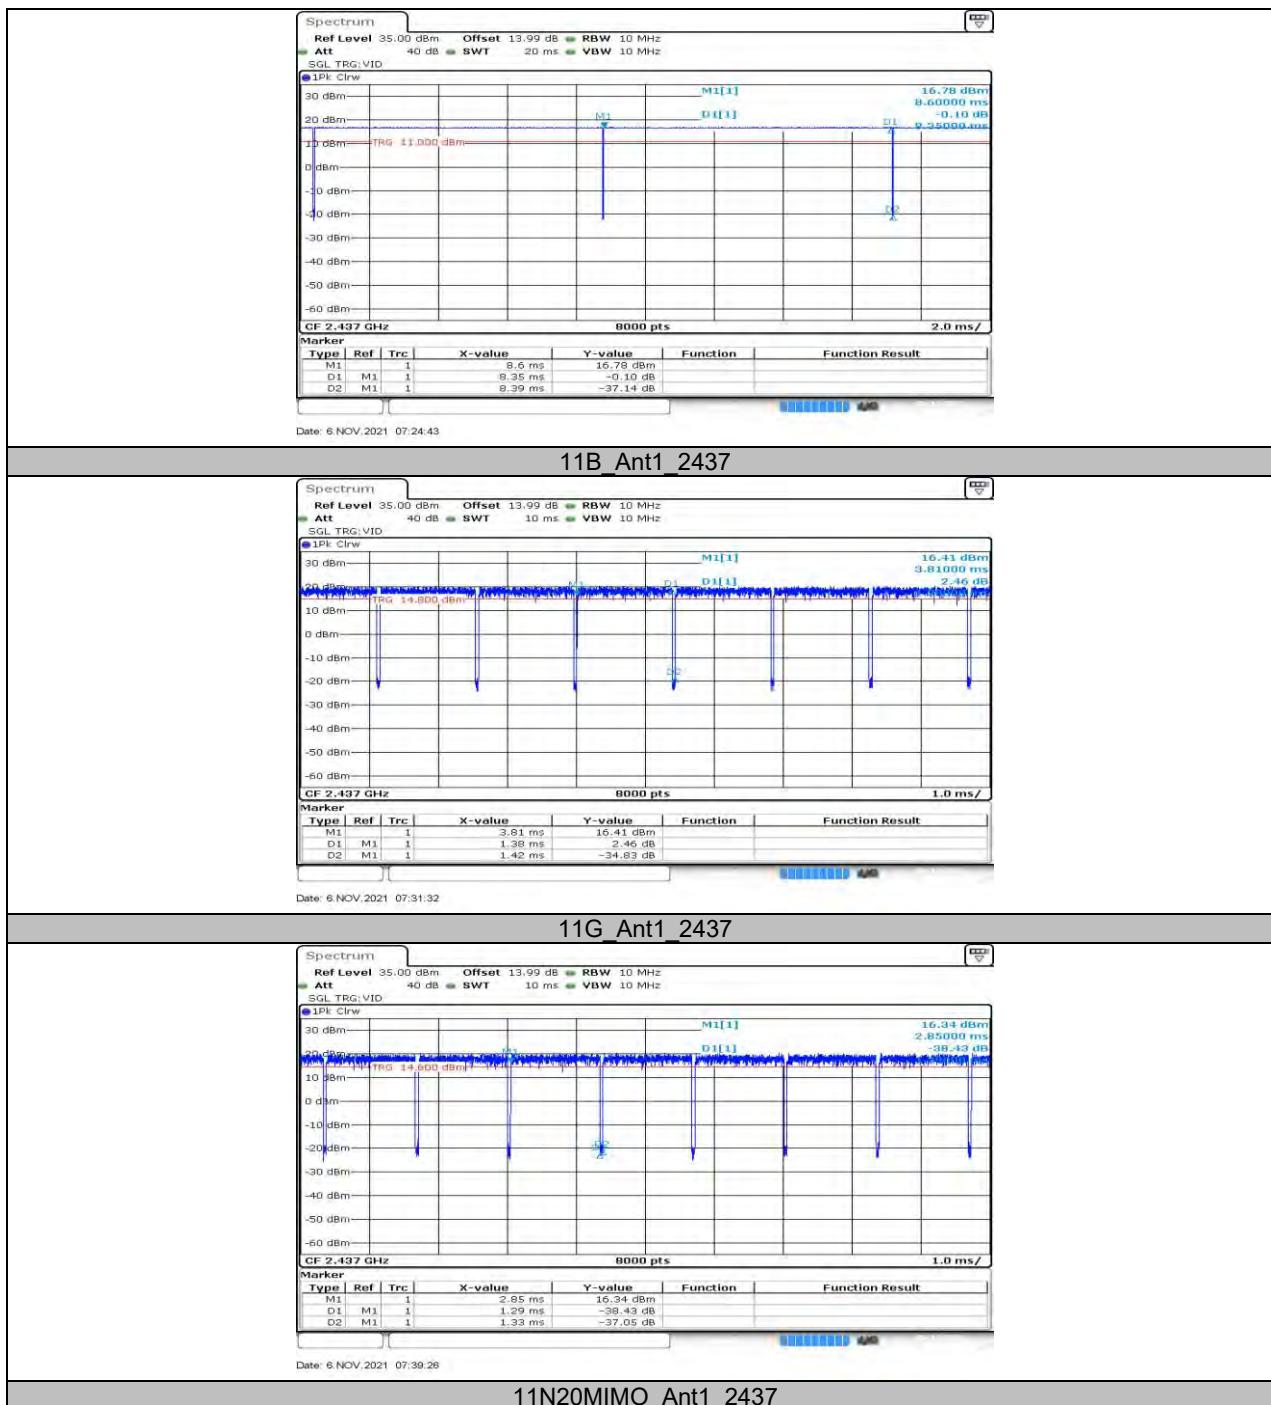
Duty Cycle Correction Factor=10log (1/x).

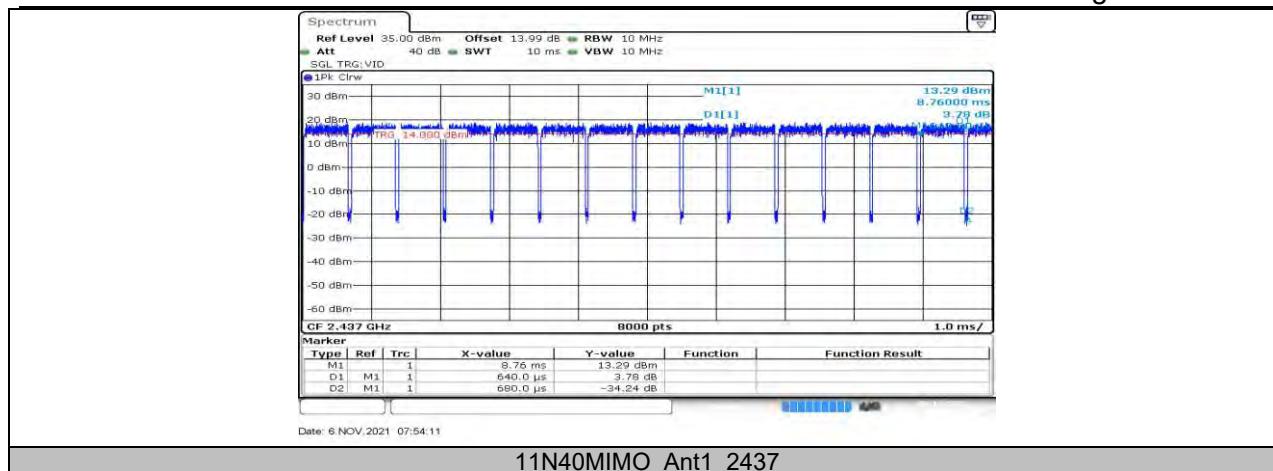
Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

## 11.7.2. Test Graphs





---

**END OF REPORT**