


Test Report

Project Information

Mode:	802.11a 20-5825	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

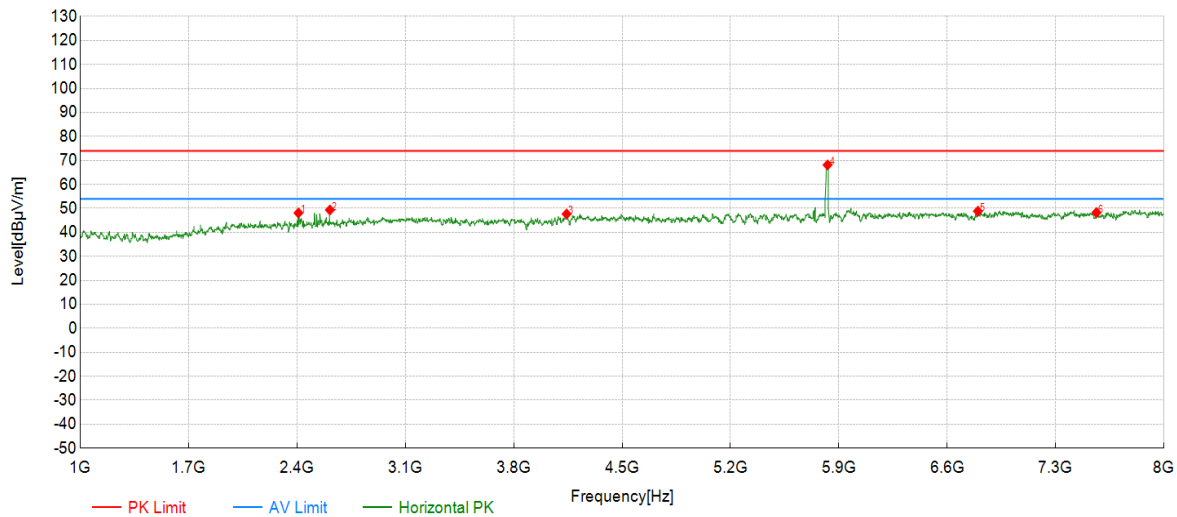

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2409.80	54.65	48.10	-6.55	74.00	25.90	PK	Horizontal	PASS
2	2612.87	55.23	49.35	-5.88	74.00	24.65	PK	Horizontal	PASS
3	4141.71	50.40	47.67	-2.73	74.00	26.33	PK	Horizontal	PASS
4	5825.00	68.33	68.13	-0.20	/	/	PK	Horizontal	Fundamental
5	6797.93	47.02	48.85	1.83	74.00	25.15	PK	Horizontal	PASS
6	7563.52	46.07	48.27	2.20	74.00	25.73	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5825	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

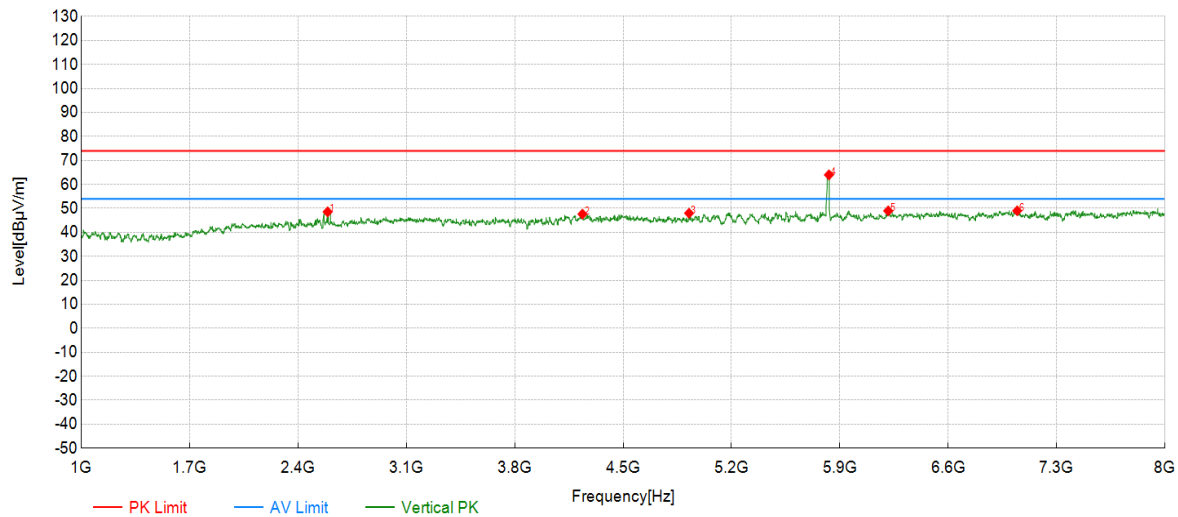

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2591.86	54.51	48.57	-5.94	74.00	25.43	PK	Vertical	PASS
2	4237.41	49.86	47.63	-2.23	74.00	26.37	PK	Vertical	PASS
3	4925.98	50.36	47.99	-2.37	74.00	26.01	PK	Vertical	PASS
4	5825.00	64.17	63.98	-0.19	/	/	PK	Vertical	Fundamental
5	6212.07	48.17	48.98	0.81	74.00	25.02	PK	Vertical	PASS
6	7045.35	46.24	49.01	2.77	74.00	24.99	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


SPURIOUS EMISSIONS(8 GHz~18 GHz)

Test Report

Project Information

Mode:	802.11a 20-5180	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

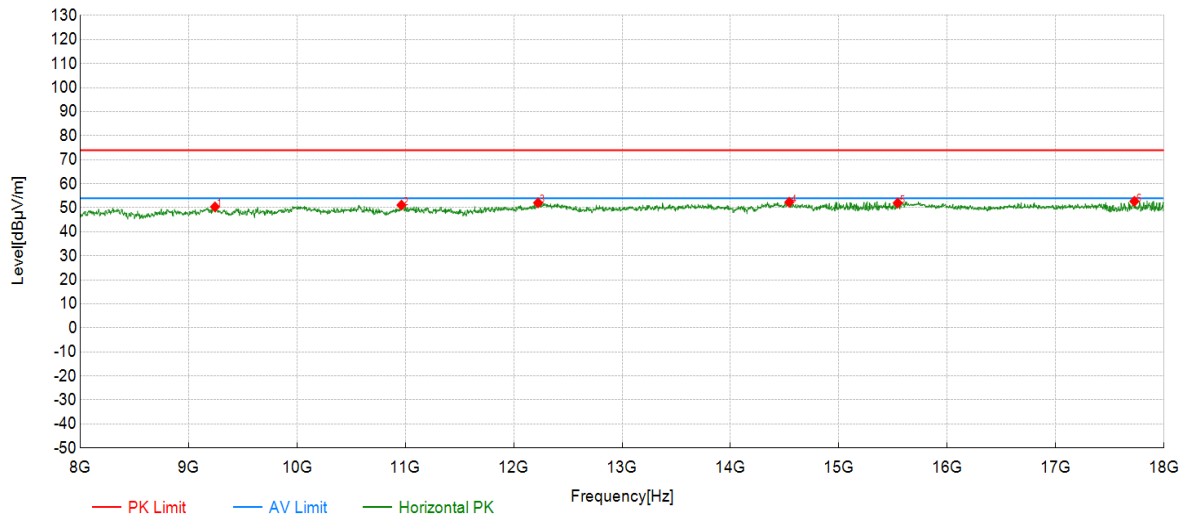

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9243.75	45.80	50.39	4.59	74.00	23.61	PK	Horizontal	PASS
2	10964.32	46.61	51.12	4.51	74.00	22.88	PK	Horizontal	PASS
3	12224.74	45.23	52.06	6.83	74.00	21.94	PK	Horizontal	PASS
4	14542.18	43.43	52.34	8.91	74.00	21.66	PK	Horizontal	PASS
5	15542.51	41.77	51.99	10.22	74.00	22.01	PK	Horizontal	PASS
6	17726.58	38.10	52.69	14.59	74.00	21.31	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5180	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

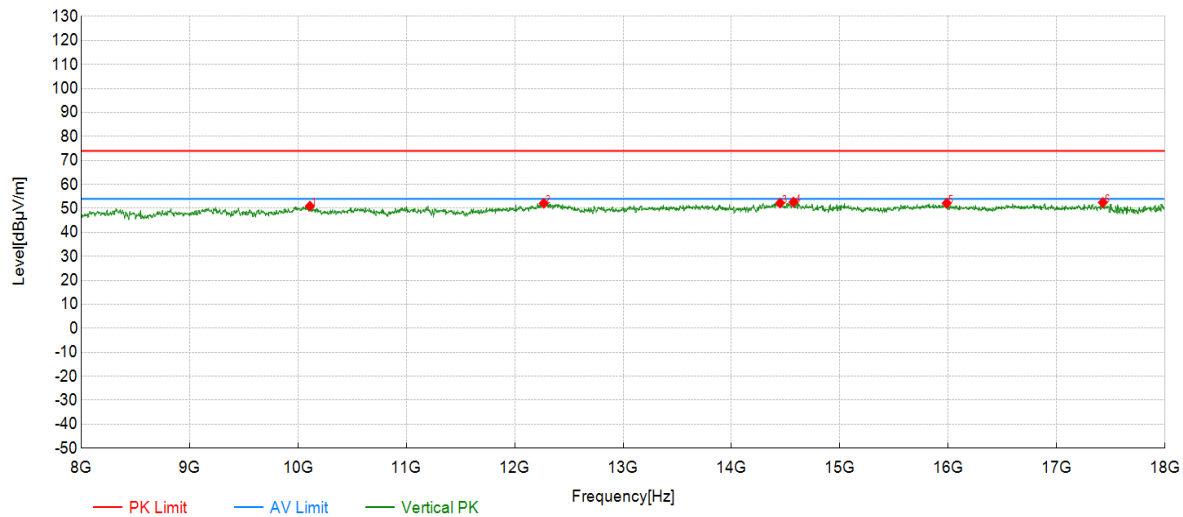

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10110.70	46.27	50.96	4.69	74.00	23.04	PK	Vertical	PASS
2	12268.09	45.16	52.14	6.98	74.00	21.86	PK	Vertical	PASS
3	14448.82	43.67	52.24	8.57	74.00	21.76	PK	Vertical	PASS
4	14572.19	43.62	52.62	9.00	74.00	21.38	PK	Vertical	PASS
5	15986.00	41.70	52.15	10.45	74.00	21.85	PK	Vertical	PASS
6	17426.48	39.19	52.45	13.26	74.00	21.55	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5200	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

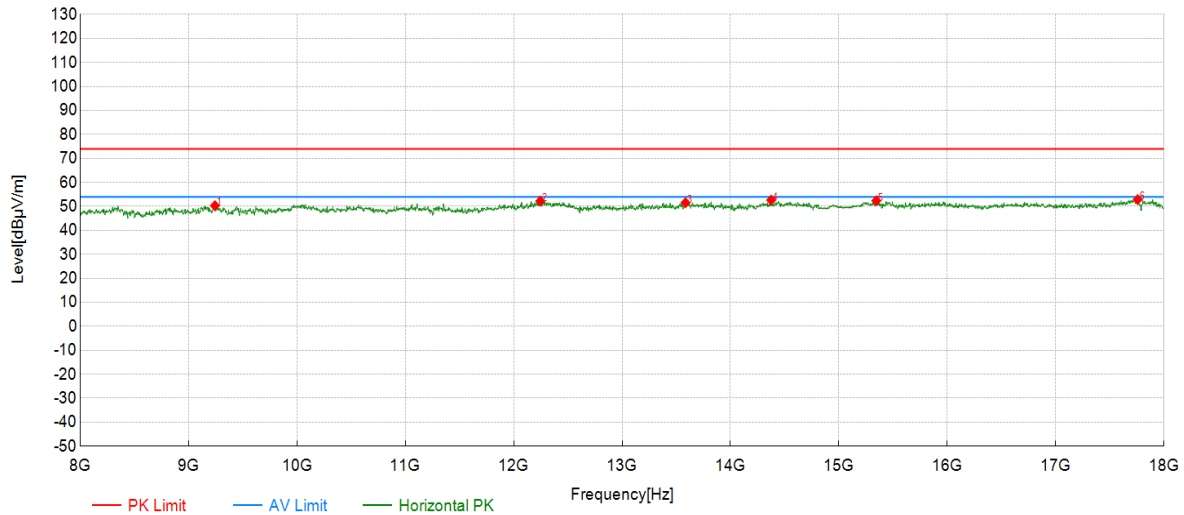

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9243.75	45.71	50.30	4.59	74.00	23.70	PK	Horizontal	PASS
2	12244.75	45.32	52.23	6.91	74.00	21.77	PK	Horizontal	PASS
3	13585.20	43.89	51.55	7.66	74.00	22.45	PK	Horizontal	PASS
4	14375.46	44.27	52.65	8.38	74.00	21.35	PK	Horizontal	PASS
5	15345.78	42.64	52.38	9.74	74.00	21.62	PK	Horizontal	PASS
6	17756.59	38.07	52.85	14.78	74.00	21.15	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5200	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

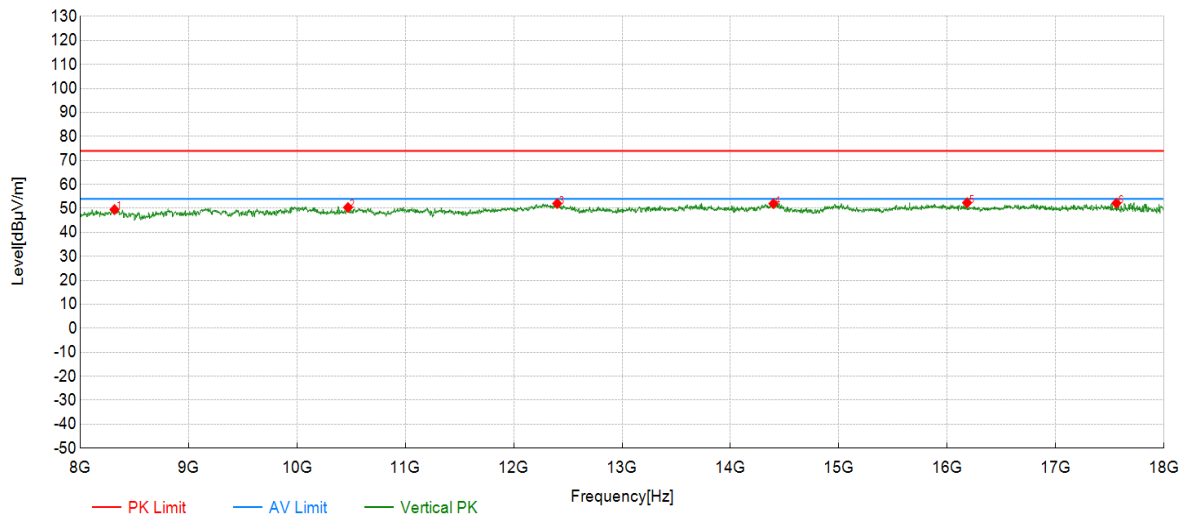

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8316.77	45.58	49.51	3.93	74.00	24.49	PK	Vertical	PASS
2	10470.82	45.92	50.39	4.47	74.00	23.61	PK	Vertical	PASS
3	12401.47	44.55	52.02	7.47	74.00	21.98	PK	Vertical	PASS
4	14395.47	43.57	51.96	8.39	74.00	22.04	PK	Vertical	PASS
5	16182.73	42.19	52.36	10.17	74.00	21.64	PK	Vertical	PASS
6	17559.85	38.54	52.14	13.60	74.00	21.86	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5240	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

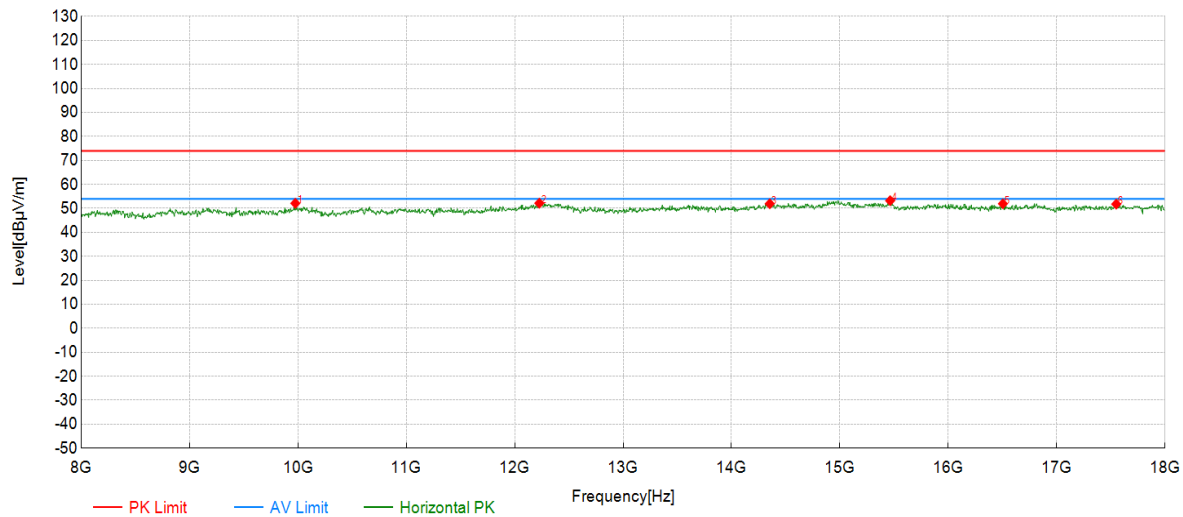

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9975.99	46.82	52.14	5.32	74.00	21.86	PK	Horizontal	PASS
2	12227.11	45.33	52.17	6.84	74.00	21.83	PK	Horizontal	PASS
3	14353.18	43.61	51.95	8.34	74.00	22.05	PK	Horizontal	PASS
4	15463.73	43.20	53.23	10.03	74.00	22.27	PK	Horizontal	PASS
5	16504.25	41.20	51.94	10.74	74.00	22.06	PK	Horizontal	PASS
6	17549.77	38.21	51.78	13.57	74.00	22.22	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5240	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

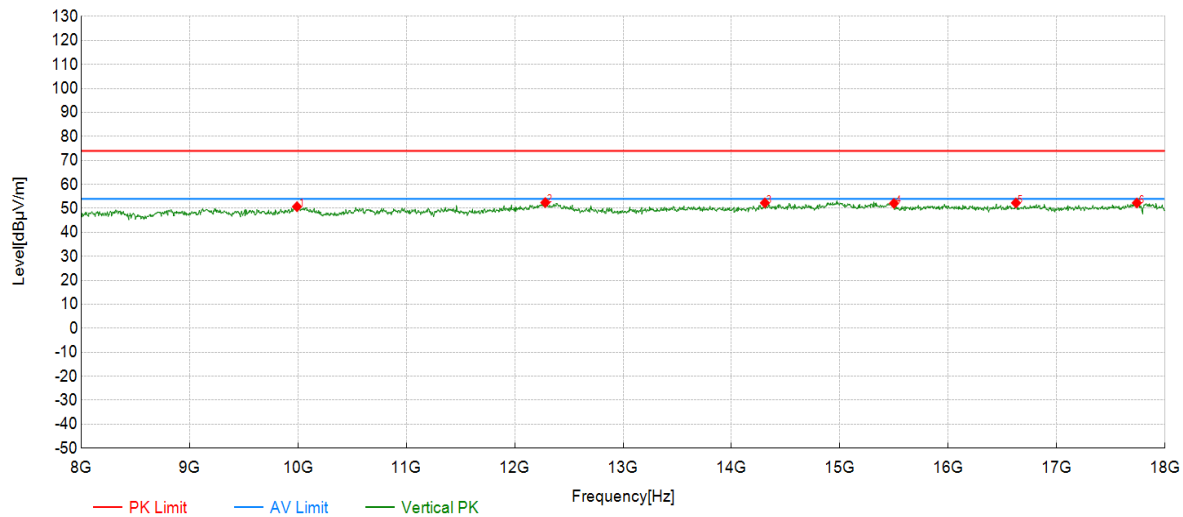

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9991.00	45.26	50.71	5.45	74.00	23.29	PK	Vertical	PASS
2	12282.14	45.38	52.43	7.05	74.00	21.57	PK	Vertical	PASS
3	14308.15	43.98	52.28	8.30	74.00	21.72	PK	Vertical	PASS
4	15498.75	42.00	52.10	10.10	74.00	21.90	PK	Vertical	PASS
5	16624.31	41.01	52.27	11.26	74.00	21.73	PK	Vertical	PASS
6	17739.87	37.58	52.26	14.68	74.00	21.74	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5260	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

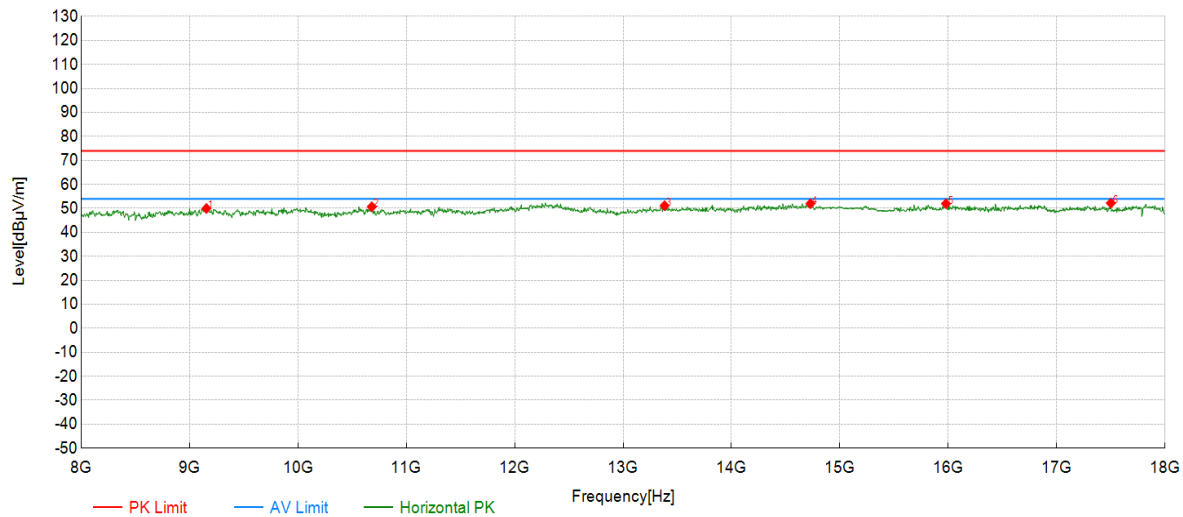

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9155.58	45.57	49.98	4.41	74.00	24.02	PK	Horizontal	PASS
2	10681.34	45.98	50.66	4.68	74.00	23.34	PK	Horizontal	PASS
3	13382.69	43.58	51.14	7.56	74.00	22.86	PK	Horizontal	PASS
4	14728.36	43.07	51.97	8.90	74.00	22.03	PK	Horizontal	PASS
5	15978.99	41.52	51.96	10.44	74.00	22.04	PK	Horizontal	PASS
6	17499.75	38.77	52.20	13.43	74.00	21.80	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5260	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

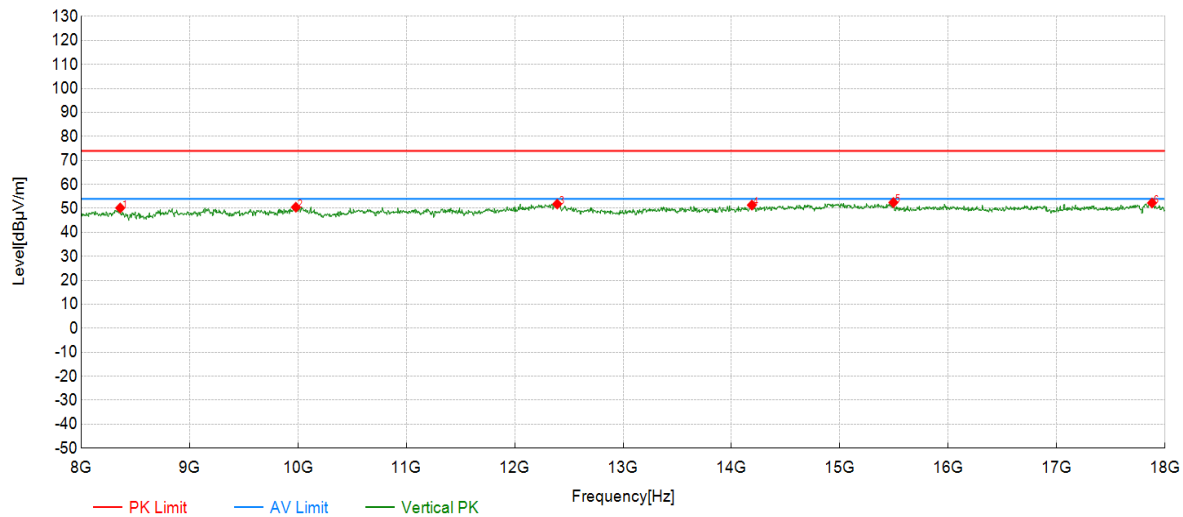

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8360.18	46.01	50.18	4.17	74.00	23.82	PK	Vertical	PASS
2	9980.99	45.14	50.50	5.36	74.00	23.50	PK	Vertical	PASS
3	12392.20	44.37	51.82	7.45	74.00	22.18	PK	Vertical	PASS
4	14188.09	43.18	51.37	8.19	74.00	22.63	PK	Vertical	PASS
5	15493.75	42.35	52.44	10.09	74.00	21.56	PK	Vertical	PASS
6	17879.94	37.66	52.28	14.62	74.00	21.72	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5280	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

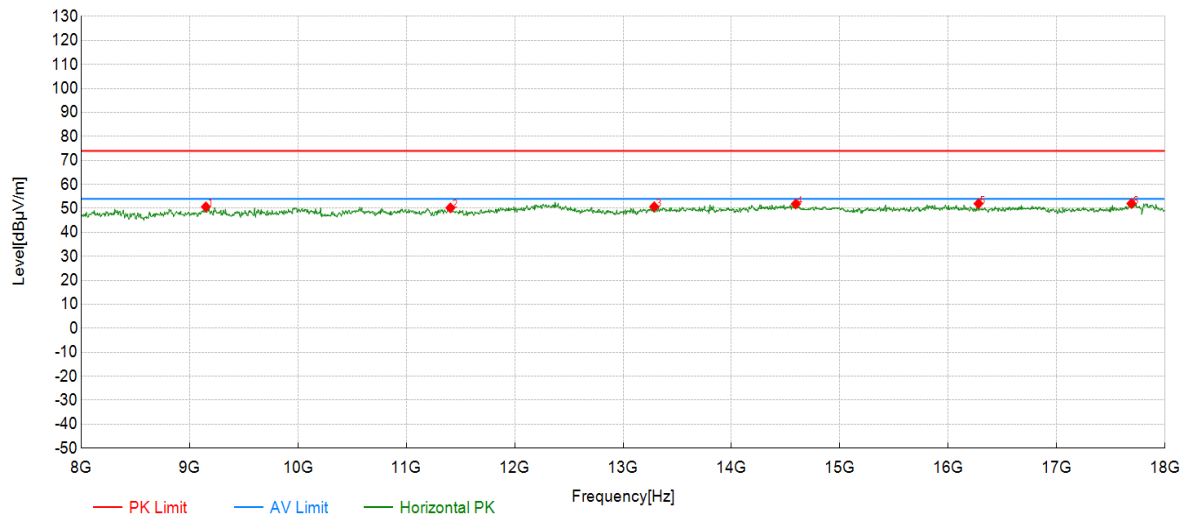

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9150.58	46.26	50.64	4.38	74.00	23.36	PK	Horizontal	PASS
2	11406.70	45.16	50.22	5.06	74.00	23.78	PK	Horizontal	PASS
3	13287.64	43.27	50.70	7.43	74.00	23.30	PK	Horizontal	PASS
4	14593.30	42.75	51.83	9.08	74.00	22.17	PK	Horizontal	PASS
5	16279.14	41.83	51.98	10.15	74.00	22.02	PK	Horizontal	PASS
6	17689.84	37.68	52.01	14.33	74.00	21.99	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5280	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

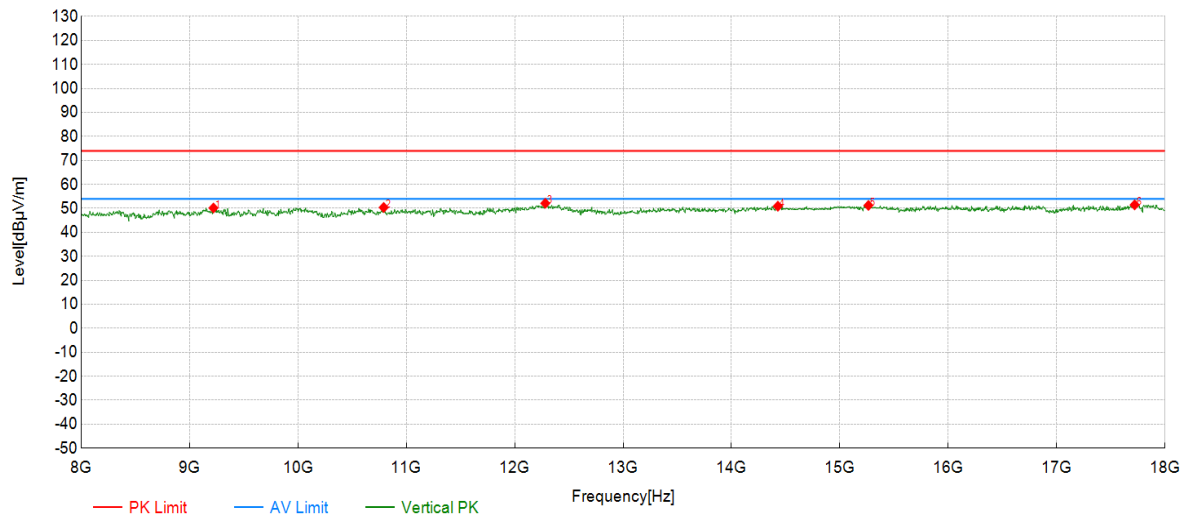

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9220.61	45.56	50.17	4.61	74.00	23.83	PK	Vertical	PASS
2	10791.40	45.85	50.39	4.54	74.00	23.61	PK	Vertical	PASS
3	12282.14	45.09	52.14	7.05	74.00	21.86	PK	Vertical	PASS
4	14428.21	42.42	50.92	8.50	74.00	23.08	PK	Vertical	PASS
5	15263.63	41.73	51.25	9.52	74.00	22.75	PK	Vertical	PASS
6	17719.86	36.95	51.48	14.53	74.00	22.52	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5320	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

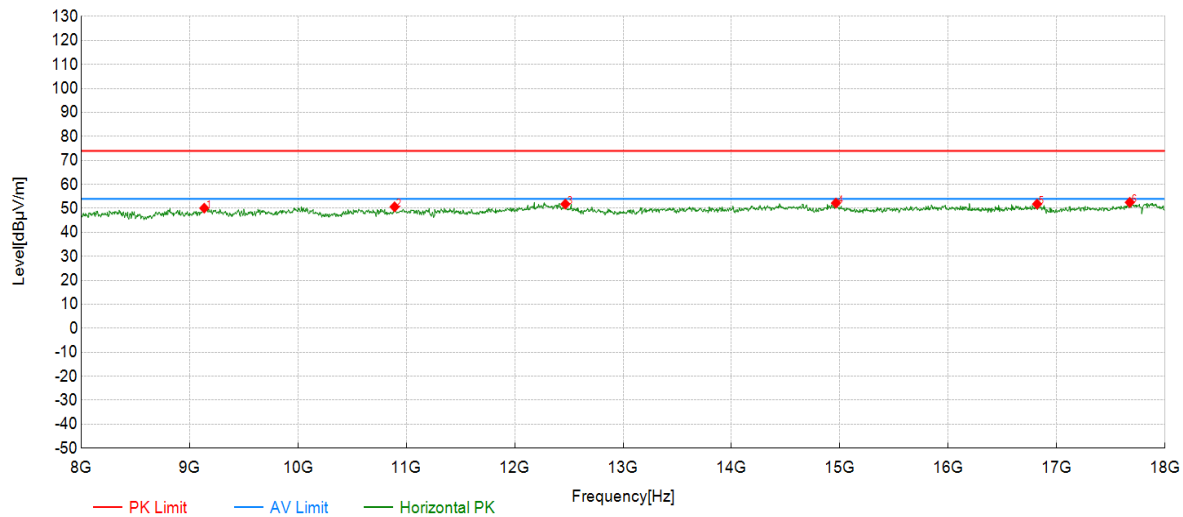

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9135.57	45.77	50.09	4.32	74.00	23.91	PK	Horizontal	PASS
2	10891.45	46.14	50.65	4.51	74.00	23.35	PK	Horizontal	PASS
3	12467.23	44.71	51.80	7.09	74.00	22.20	PK	Horizontal	PASS
4	14963.48	42.53	52.22	9.69	74.00	21.78	PK	Horizontal	PASS
5	16819.41	40.48	51.81	11.33	74.00	22.19	PK	Horizontal	PASS
6	17674.84	38.30	52.52	14.22	74.00	21.48	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5320	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

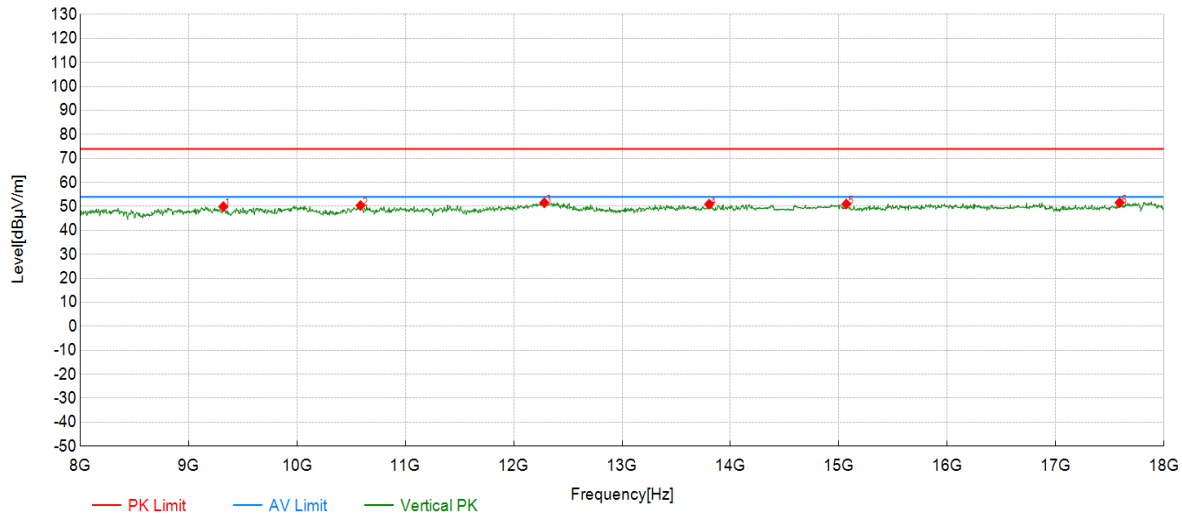

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9320.66	45.41	49.90	4.49	74.00	24.10	PK	Vertical	PASS
2	10586.29	45.65	50.38	4.73	74.00	23.62	PK	Vertical	PASS
3	12282.14	44.46	51.51	7.05	74.00	22.49	PK	Vertical	PASS
4	13802.90	42.65	50.90	8.25	74.00	23.10	PK	Vertical	PASS
5	15068.53	41.29	51.00	9.71	74.00	23.00	PK	Vertical	PASS
6	17589.79	37.84	51.53	13.69	74.00	22.47	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5500	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

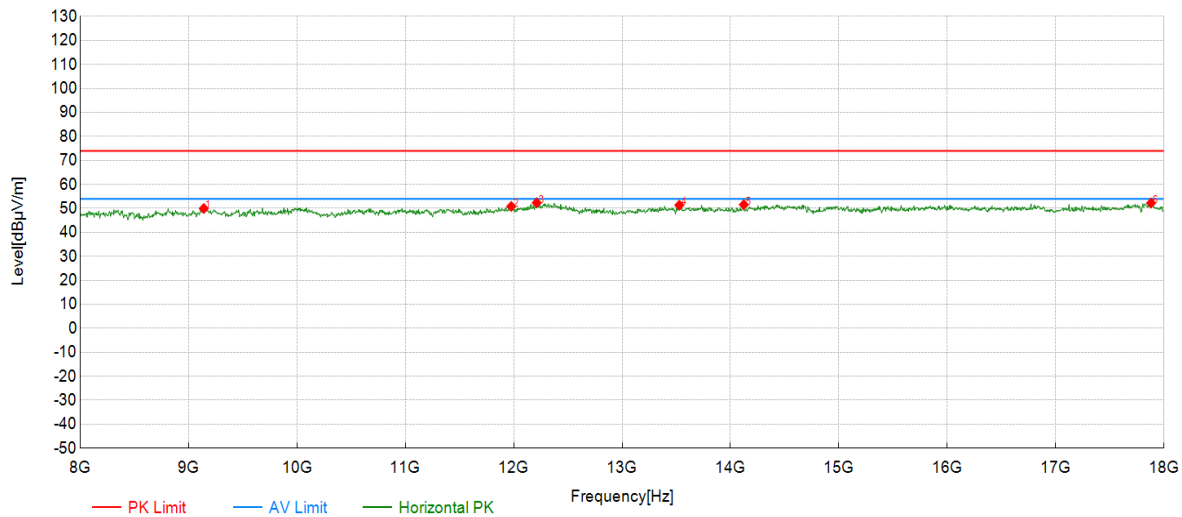

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9140.57	45.62	49.95	4.33	74.00	24.05	PK	Horizontal	PASS
2	11976.99	44.56	50.82	6.26	74.00	23.18	PK	Horizontal	PASS
3	12212.11	45.58	52.36	6.78	74.00	21.64	PK	Horizontal	PASS
4	13527.76	43.72	51.34	7.62	74.00	22.66	PK	Horizontal	PASS
5	14123.06	43.41	51.54	8.13	74.00	22.46	PK	Horizontal	PASS
6	17879.94	37.61	52.23	14.62	74.00	21.77	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5500	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

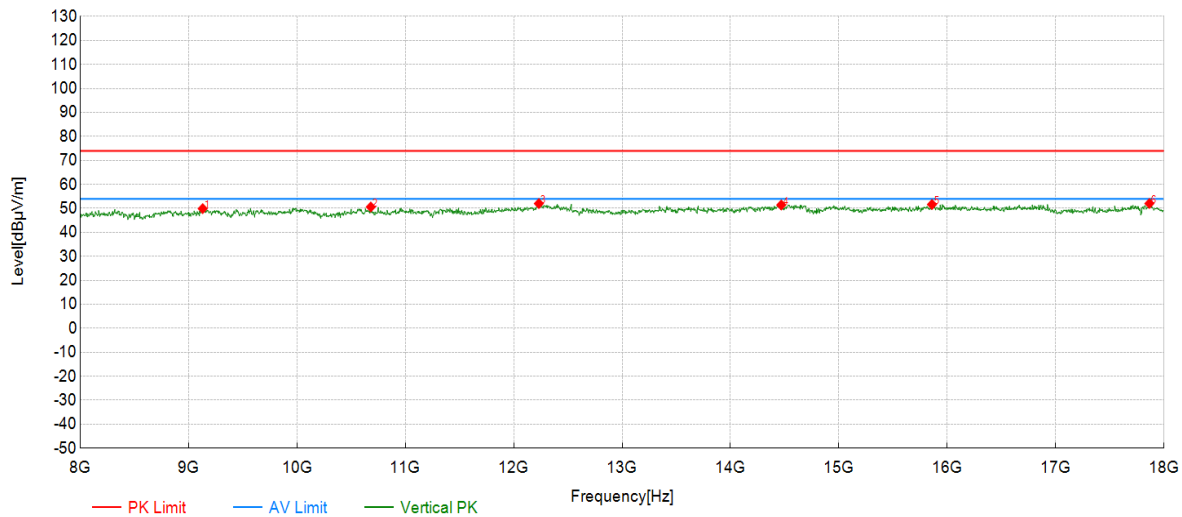

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9130.57	45.61	49.90	4.29	74.00	24.10	PK	Vertical	PASS
2	10681.34	45.92	50.60	4.68	74.00	23.40	PK	Vertical	PASS
3	12232.12	45.16	52.03	6.87	74.00	21.97	PK	Vertical	PASS
4	14468.23	42.78	51.42	8.64	74.00	22.58	PK	Vertical	PASS
5	15858.93	41.41	51.66	10.25	74.00	22.34	PK	Vertical	PASS
6	17864.93	37.35	52.05	14.70	74.00	21.95	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5580	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

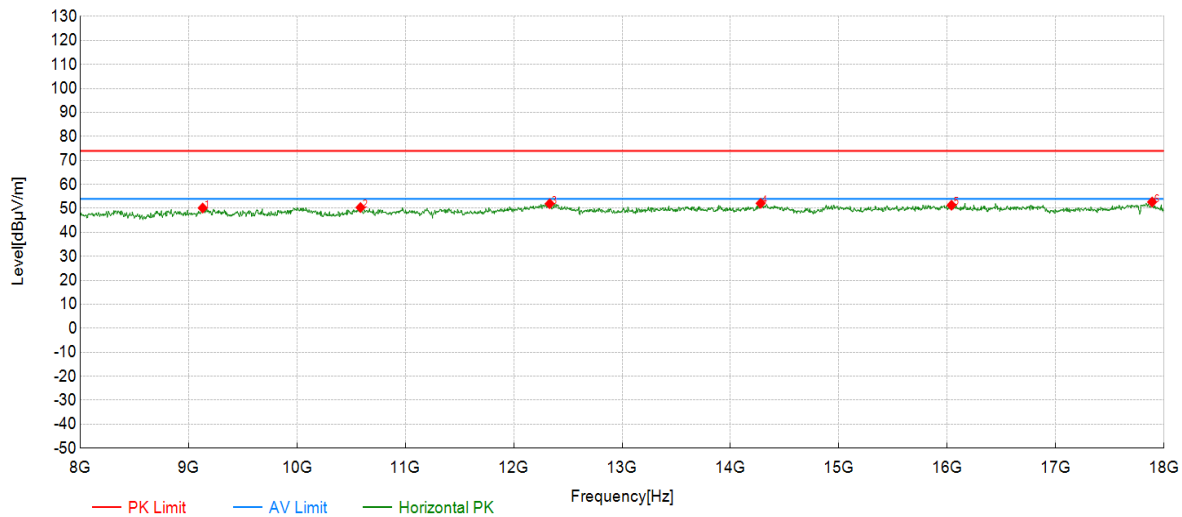

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9130.57	45.86	50.15	4.29	74.00	23.85	PK	Horizontal	PASS
2	10586.29	45.65	50.38	4.73	74.00	23.62	PK	Horizontal	PASS
3	12332.17	44.72	51.96	7.24	74.00	22.04	PK	Horizontal	PASS
4	14278.14	43.84	52.12	8.28	74.00	21.88	PK	Horizontal	PASS
5	16039.02	42.41	51.32	8.91	74.00	22.68	PK	Horizontal	PASS
6	17889.94	40.11	52.67	12.56	74.00	21.33	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5580	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

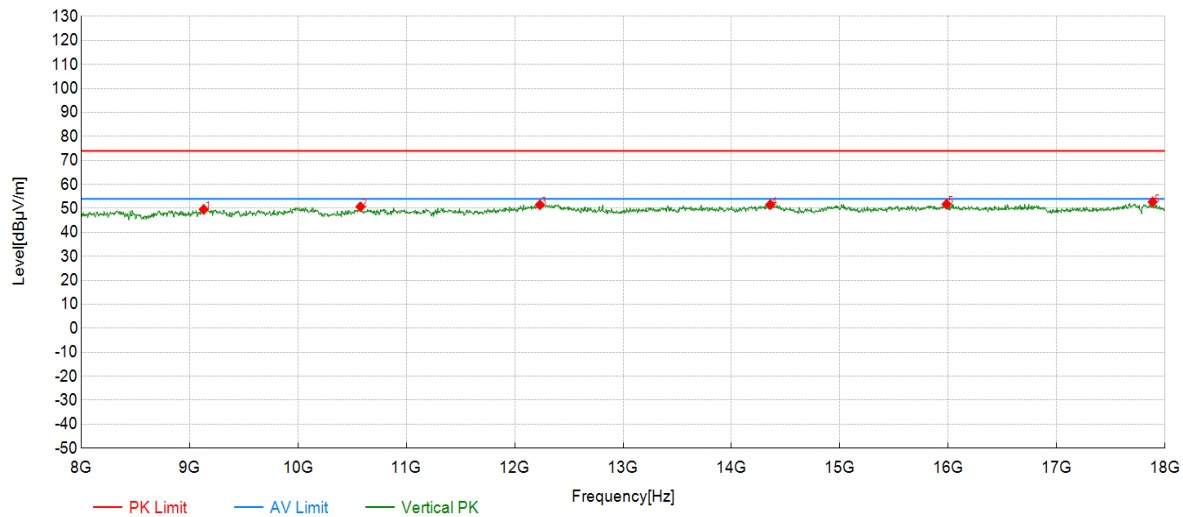

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9130.57	45.28	49.57	4.29	74.00	24.43	PK	Vertical	PASS
2	10576.29	45.96	50.68	4.72	74.00	23.32	PK	Vertical	PASS
3	12232.12	44.66	51.53	6.87	74.00	22.47	PK	Vertical	PASS
4	14358.18	43.25	51.60	8.35	74.00	22.40	PK	Vertical	PASS
5	15983.99	42.81	51.76	8.95	74.00	22.24	PK	Vertical	PASS
6	17884.94	40.11	52.70	12.59	74.00	21.30	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5700	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

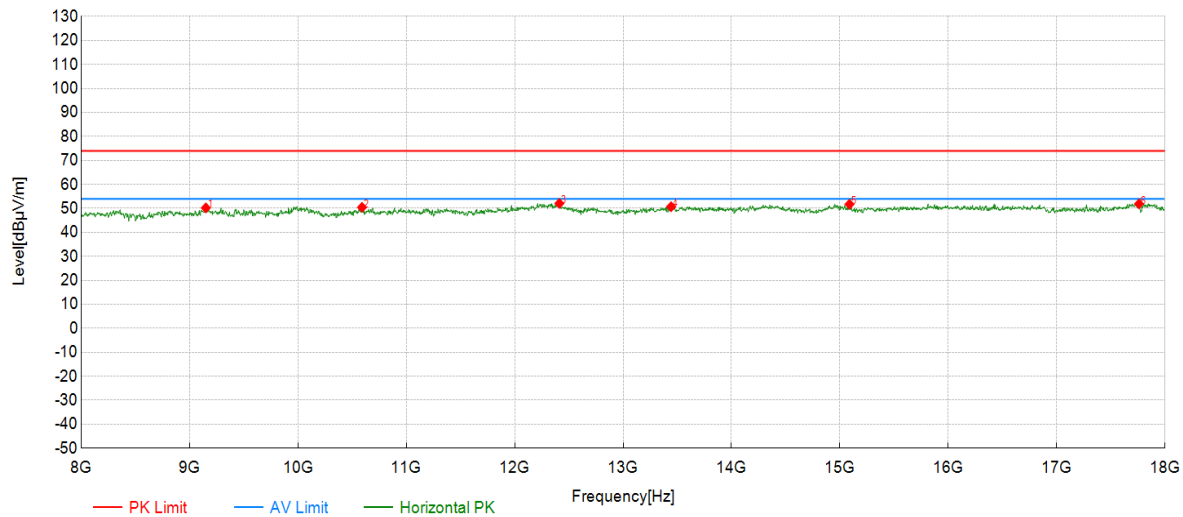

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9150.58	45.84	50.22	4.38	74.00	23.78	PK	Horizontal	PASS
2	10591.30	45.71	50.45	4.74	74.00	23.55	PK	Horizontal	PASS
3	12412.21	44.66	52.07	7.41	74.00	21.93	PK	Horizontal	PASS
4	13442.72	43.09	50.69	7.60	74.00	23.31	PK	Horizontal	PASS
5	15088.54	43.57	51.72	8.15	74.00	22.28	PK	Horizontal	PASS
6	17759.88	39.08	51.88	12.80	74.00	22.12	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5700	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

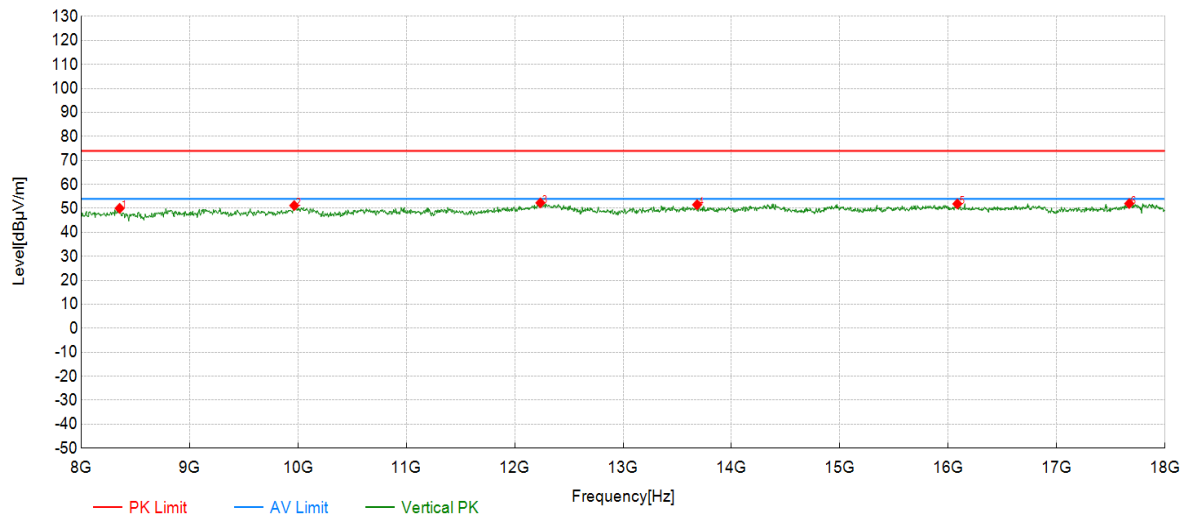

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8355.18	45.89	50.03	4.14	74.00	23.97	PK	Vertical	PASS
2	9965.98	45.95	51.18	5.23	74.00	22.82	PK	Vertical	PASS
3	12237.12	45.44	52.32	6.88	74.00	21.68	PK	Vertical	PASS
4	13682.84	43.62	51.53	7.91	74.00	22.47	PK	Vertical	PASS
5	16084.04	43.04	51.88	8.84	74.00	22.12	PK	Vertical	PASS
6	17669.83	39.83	52.02	12.19	74.00	21.98	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5720	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

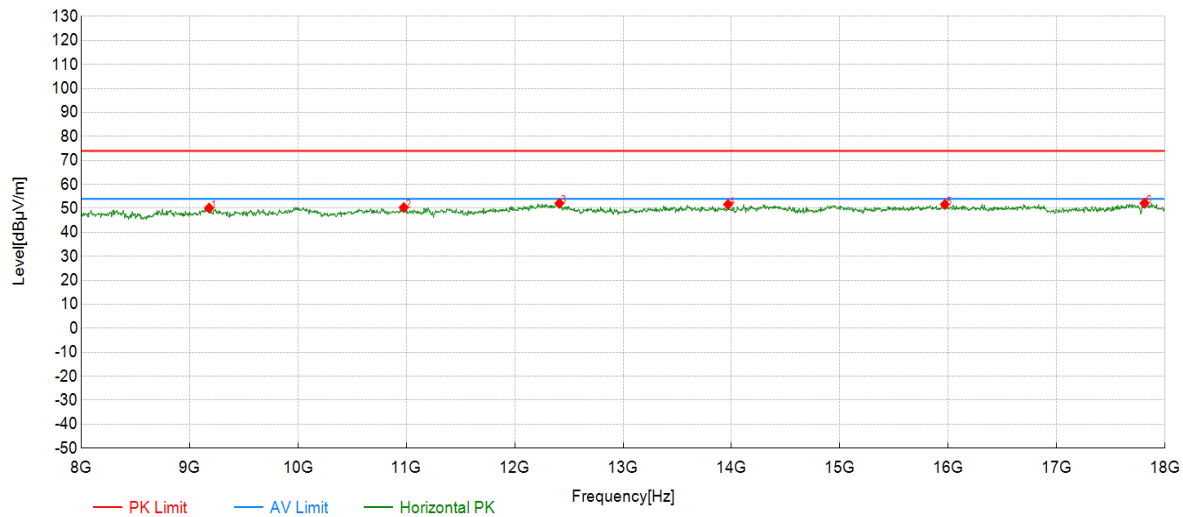

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9180.59	45.62	50.16	4.54	74.00	23.84	PK	Horizontal	PASS
2	10976.49	45.83	50.34	4.51	74.00	23.66	PK	Horizontal	PASS
3	12412.21	44.71	52.12	7.41	74.00	21.88	PK	Horizontal	PASS
4	13967.98	43.55	51.63	8.08	74.00	22.37	PK	Horizontal	PASS
5	15968.98	42.72	51.65	8.93	74.00	22.35	PK	Horizontal	PASS
6	17809.90	39.13	52.15	13.02	74.00	21.85	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5720	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

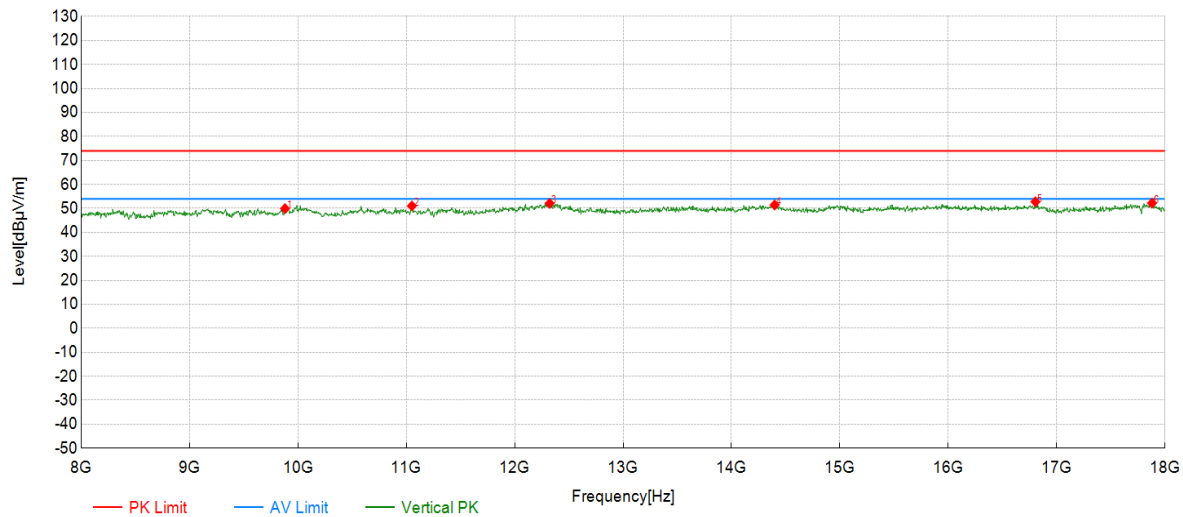

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9880.94	45.39	49.92	4.53	74.00	24.08	PK	Vertical	PASS
2	11051.53	46.40	51.02	4.62	74.00	22.98	PK	Vertical	PASS
3	12322.16	44.90	52.09	7.19	74.00	21.91	PK	Vertical	PASS
4	14398.20	43.03	51.42	8.39	74.00	22.58	PK	Vertical	PASS
5	16804.40	43.04	52.75	9.71	74.00	21.25	PK	Vertical	PASS
6	17879.94	39.58	52.20	12.62	74.00	21.80	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5745	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

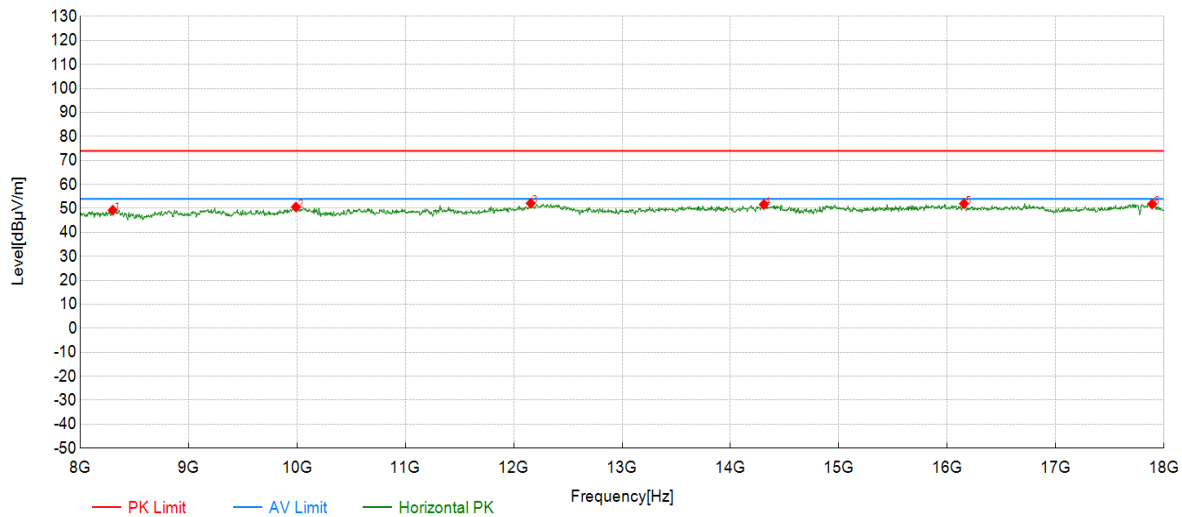

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8300.15	45.43	49.27	3.84	74.00	24.73	PK	Horizontal	PASS
2	9991.00	45.11	50.56	5.45	74.00	23.44	PK	Horizontal	PASS
3	12157.08	45.46	52.12	6.66	74.00	21.88	PK	Horizontal	PASS
4	14308.15	43.33	51.63	8.30	74.00	22.37	PK	Horizontal	PASS
5	16154.08	43.24	51.96	8.72	74.00	22.04	PK	Horizontal	PASS
6	17889.94	39.24	51.80	12.56	74.00	22.20	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5745	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

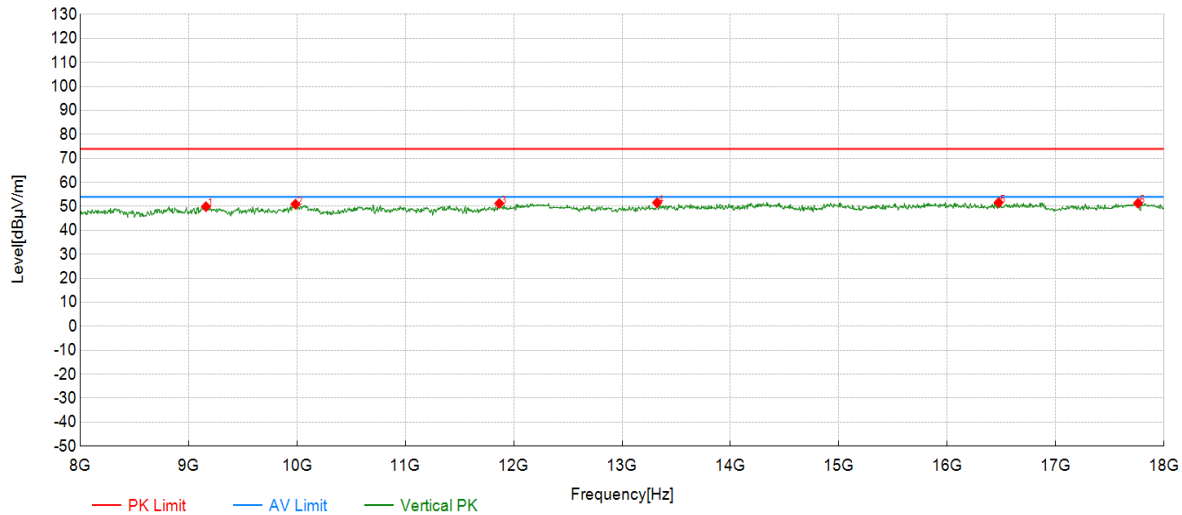

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9160.58	45.45	49.89	4.44	74.00	24.11	PK	Vertical	PASS
2	9985.99	45.51	50.91	5.40	74.00	23.09	PK	Vertical	PASS
3	11866.93	45.40	51.23	5.83	74.00	22.77	PK	Vertical	PASS
4	13322.66	44.05	51.53	7.48	74.00	22.47	PK	Vertical	PASS
5	16474.24	42.53	51.61	9.08	74.00	22.39	PK	Vertical	PASS
6	17759.88	38.53	51.33	12.80	74.00	22.67	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5785	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

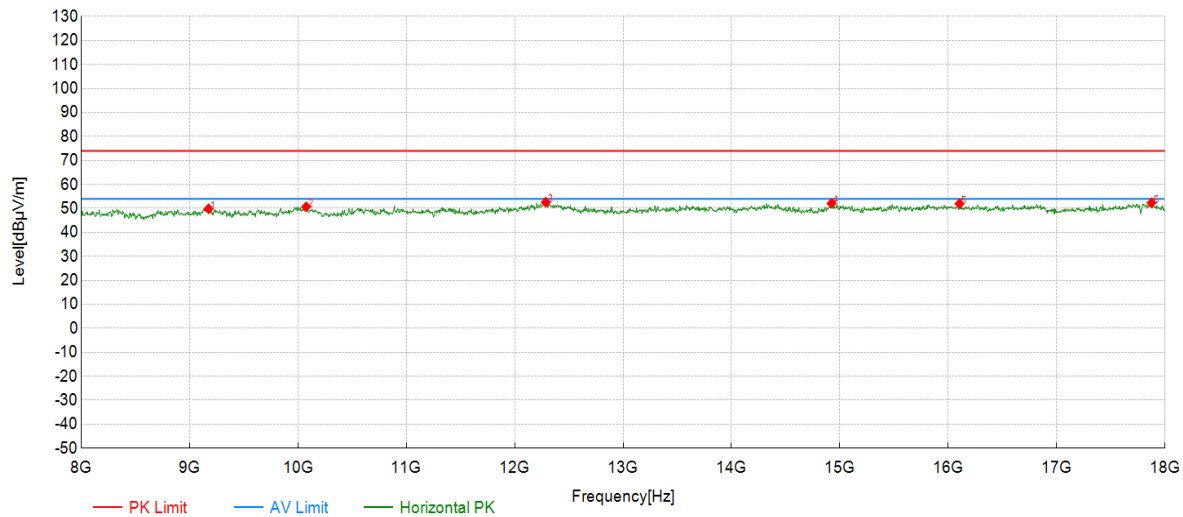

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9175.59	45.31	49.83	4.52	74.00	24.17	PK	Horizontal	PASS
2	10076.04	45.69	50.65	4.96	74.00	23.35	PK	Horizontal	PASS
3	12287.14	45.52	52.59	7.07	74.00	21.41	PK	Horizontal	PASS
4	14923.46	44.12	52.08	7.96	74.00	21.92	PK	Horizontal	PASS
5	16104.05	43.15	51.95	8.80	74.00	22.05	PK	Horizontal	PASS
6	17874.94	39.65	52.29	12.64	74.00	21.71	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5785	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

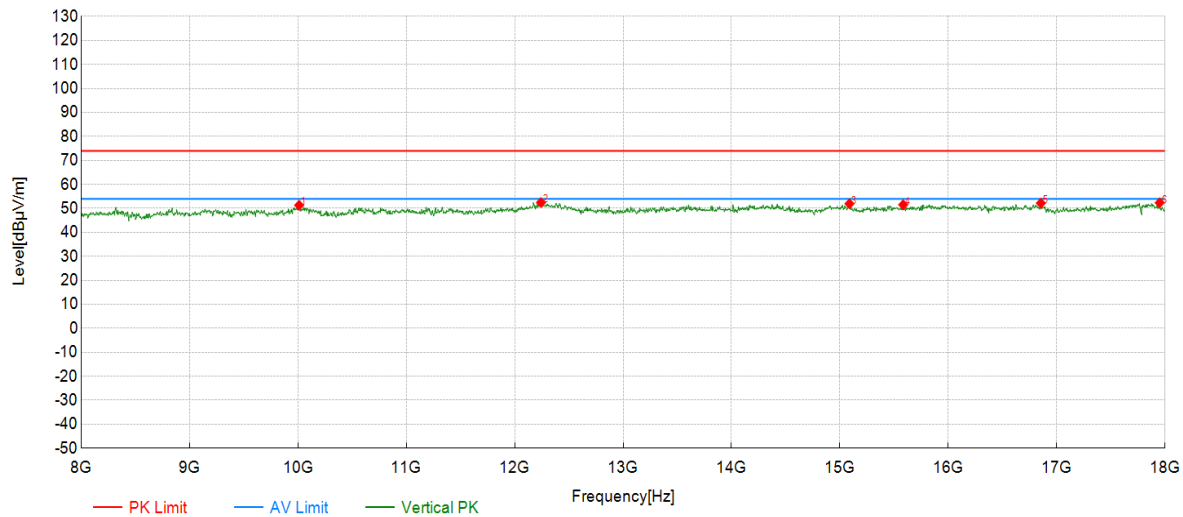

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10011.01	45.87	51.31	5.44	74.00	22.69	PK	Vertical	PASS
2	12242.12	45.54	52.43	6.89	74.00	21.57	PK	Vertical	PASS
3	15088.54	43.80	51.95	8.15	74.00	22.05	PK	Vertical	PASS
4	15583.79	42.67	51.52	8.85	74.00	22.48	PK	Vertical	PASS
5	16854.43	42.25	52.17	9.92	74.00	21.83	PK	Vertical	PASS
6	17949.97	40.14	52.35	12.21	74.00	21.65	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5825	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

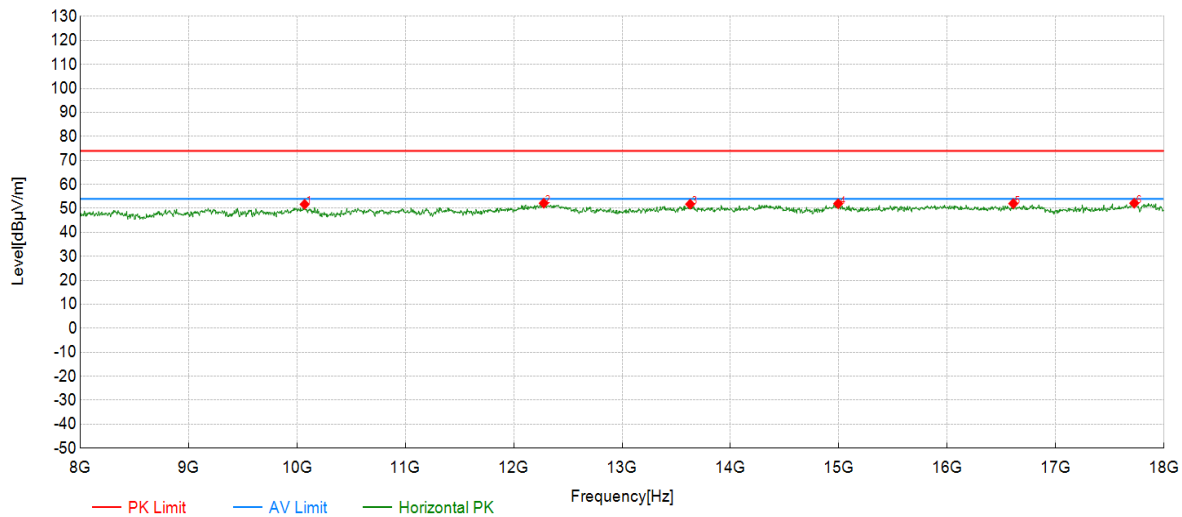

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10071.04	46.71	51.70	4.99	74.00	22.30	PK	Horizontal	PASS
2	12277.14	45.14	52.17	7.03	74.00	21.83	PK	Horizontal	PASS
3	13627.81	44.02	51.77	7.75	74.00	22.23	PK	Horizontal	PASS
4	14993.50	43.59	51.96	8.37	74.00	22.04	PK	Horizontal	PASS
5	16609.30	42.24	52.01	9.77	74.00	21.99	PK	Horizontal	PASS
6	17724.86	39.60	52.17	12.57	74.00	21.83	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11a 20-5825	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

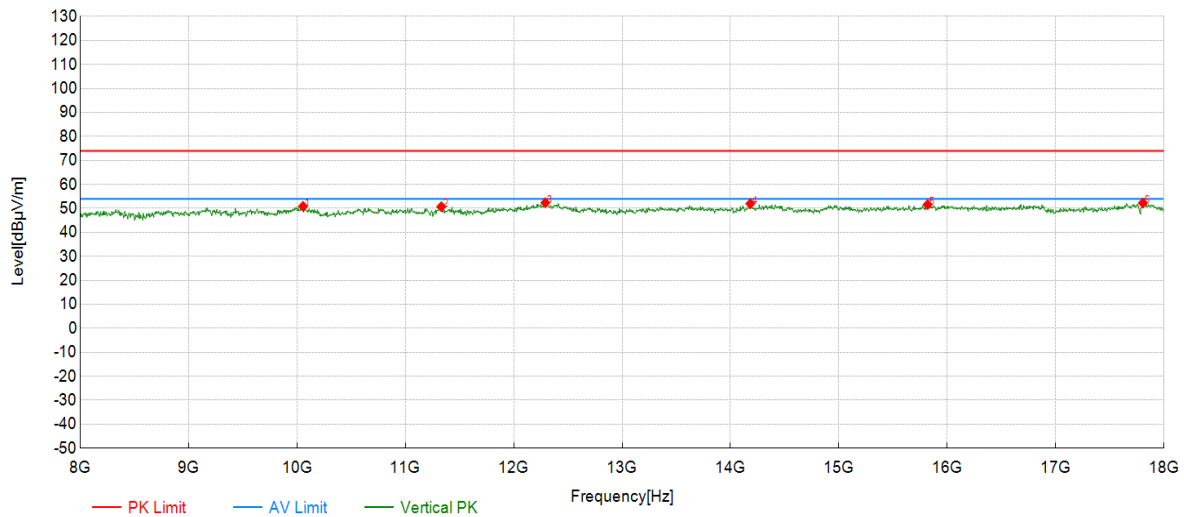

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10056.03	45.76	50.86	5.10	74.00	23.14	PK	Vertical	PASS
2	11331.67	45.69	50.73	5.04	74.00	23.27	PK	Vertical	PASS
3	12292.15	45.29	52.37	7.08	74.00	21.63	PK	Vertical	PASS
4	14183.09	43.77	51.96	8.19	74.00	22.04	PK	Vertical	PASS
5	15818.91	42.92	51.60	8.68	74.00	22.40	PK	Vertical	PASS
6	17804.90	39.19	52.24	13.05	74.00	21.76	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5180	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

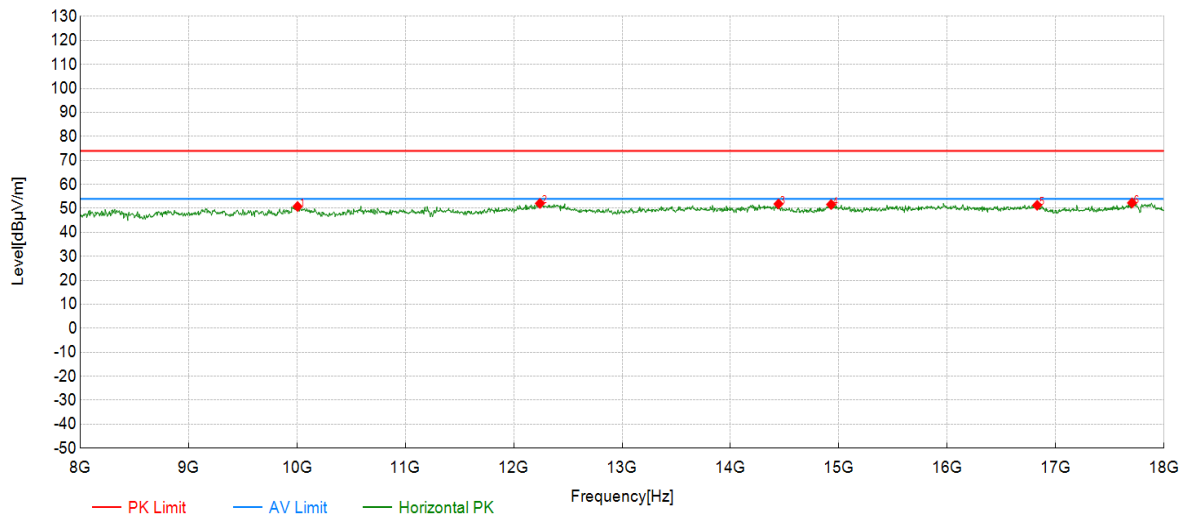

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10006.00	45.31	50.79	5.48	74.00	23.21	PK	Horizontal	PASS
2	12242.12	45.19	52.08	6.89	74.00	21.92	PK	Horizontal	PASS
3	14443.22	43.64	51.87	8.23	74.00	22.13	PK	Horizontal	PASS
4	14928.46	43.60	51.61	8.01	74.00	22.39	PK	Horizontal	PASS
5	16829.41	41.48	51.30	9.82	74.00	22.70	PK	Horizontal	PASS
6	17704.85	39.86	52.29	12.43	74.00	21.71	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5180	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

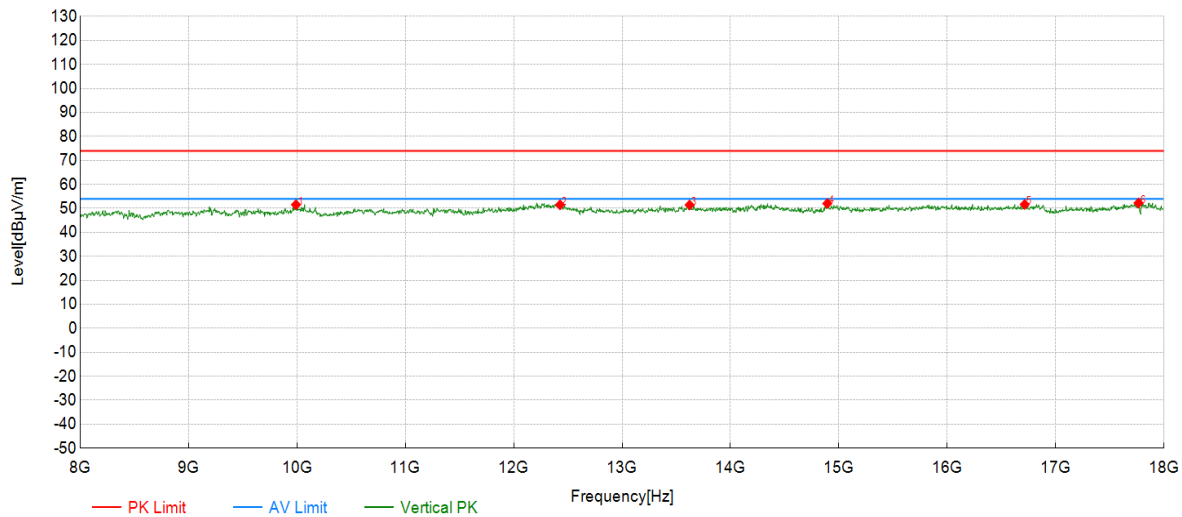

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9991.00	46.09	51.54	5.45	74.00	22.46	PK	Vertical	PASS
2	12427.21	44.17	51.50	7.33	74.00	22.50	PK	Vertical	PASS
3	13622.81	43.66	51.41	7.75	74.00	22.59	PK	Vertical	PASS
4	14893.45	44.23	52.04	7.81	74.00	21.96	PK	Vertical	PASS
5	16714.36	41.93	51.66	9.73	74.00	22.34	PK	Vertical	PASS
6	17764.88	39.38	52.22	12.84	74.00	21.78	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5200	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

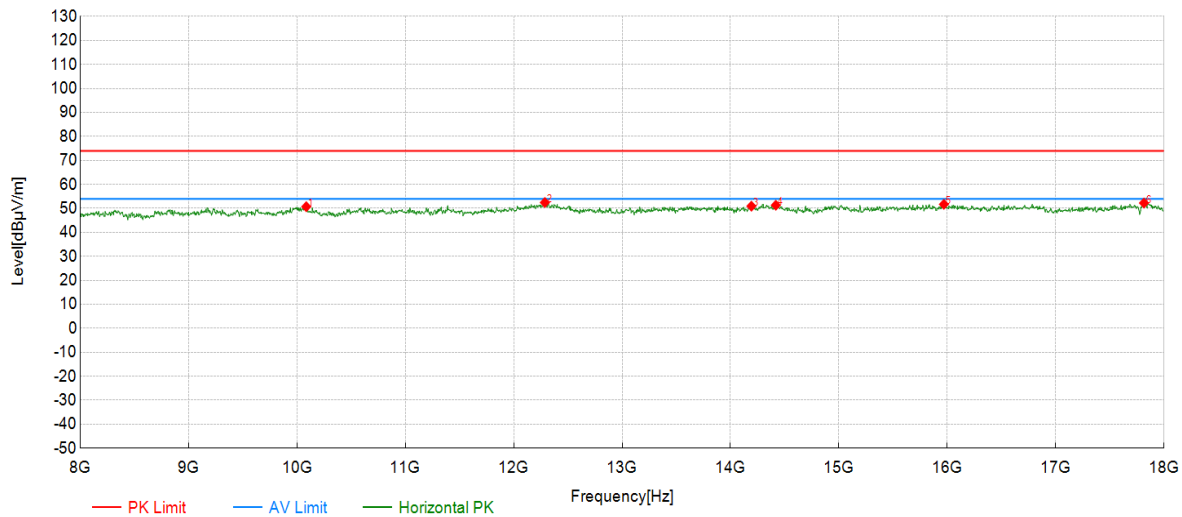

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10086.04	45.84	50.71	4.87	74.00	23.29	PK	Horizontal	PASS
2	12287.14	45.38	52.45	7.07	74.00	21.55	PK	Horizontal	PASS
3	14193.10	42.74	50.93	8.19	74.00	23.07	PK	Horizontal	PASS
4	14418.21	43.00	51.32	8.32	74.00	22.68	PK	Horizontal	PASS
5	15968.98	42.78	51.71	8.93	74.00	22.29	PK	Horizontal	PASS
6	17814.91	39.25	52.24	12.99	74.00	21.76	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5200	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

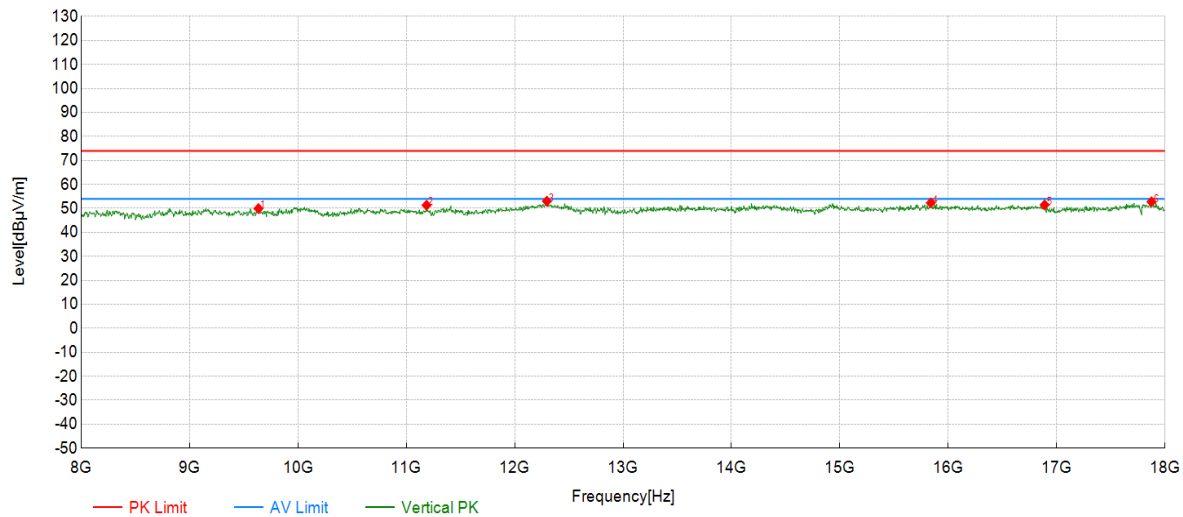

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9635.82	45.41	49.93	4.52	74.00	24.07	PK	Vertical	PASS
2	11186.59	46.41	51.33	4.92	74.00	22.67	PK	Vertical	PASS
3	12297.15	45.90	53.00	7.10	74.00	21.00	PK	Vertical	PASS
4	15838.92	43.60	52.30	8.70	74.00	21.70	PK	Vertical	PASS
5	16889.44	41.40	51.46	10.06	74.00	22.54	PK	Vertical	PASS
6	17874.94	40.10	52.74	12.64	74.00	21.26	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5240	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

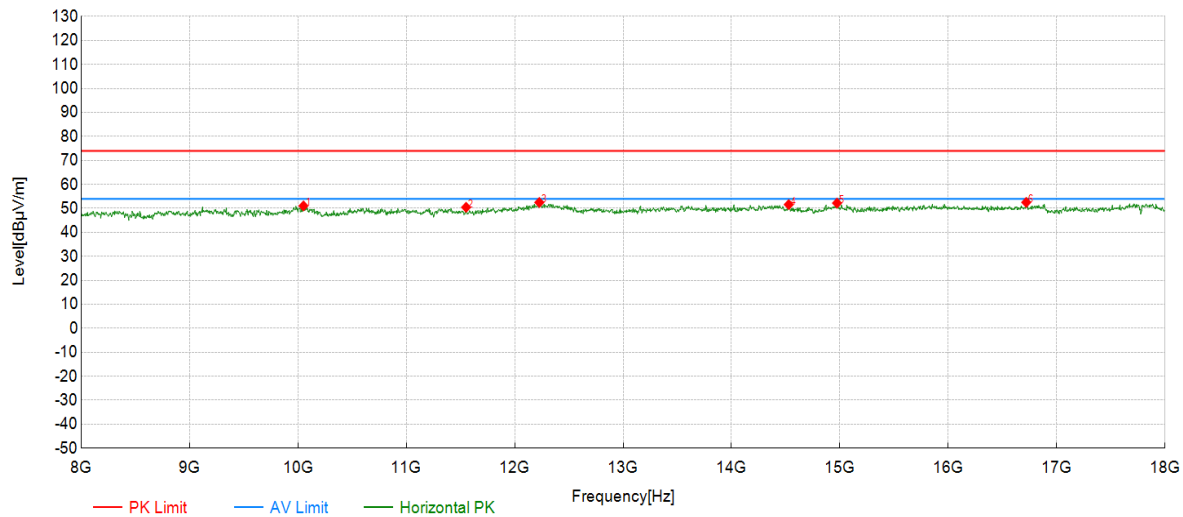

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10051.03	45.92	51.05	5.13	74.00	22.95	PK	Horizontal	PASS
2	11551.78	45.78	50.46	4.68	74.00	23.54	PK	Horizontal	PASS
3	12227.11	45.64	52.48	6.84	74.00	21.52	PK	Horizontal	PASS
4	14528.26	43.69	51.60	7.91	74.00	22.40	PK	Horizontal	PASS
5	14973.49	43.98	52.22	8.24	74.00	21.78	PK	Horizontal	PASS
6	16719.36	42.77	52.51	9.74	74.00	21.49	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5240	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

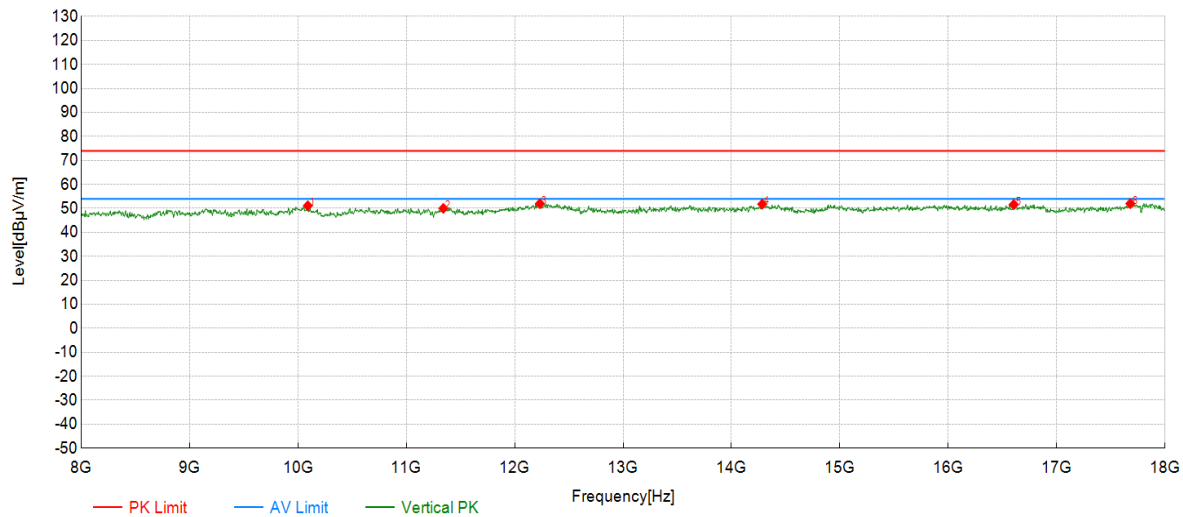

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10091.05	46.27	51.10	4.83	74.00	22.90	PK	Vertical	PASS
2	11341.67	44.95	50.01	5.06	74.00	23.99	PK	Vertical	PASS
3	12232.12	45.10	51.97	6.87	74.00	22.03	PK	Vertical	PASS
4	14283.14	43.49	51.77	8.28	74.00	22.23	PK	Vertical	PASS
5	16604.30	41.86	51.62	9.76	74.00	22.38	PK	Vertical	PASS
6	17679.84	39.72	51.99	12.27	74.00	22.01	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5260	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15 C		

Test Graph

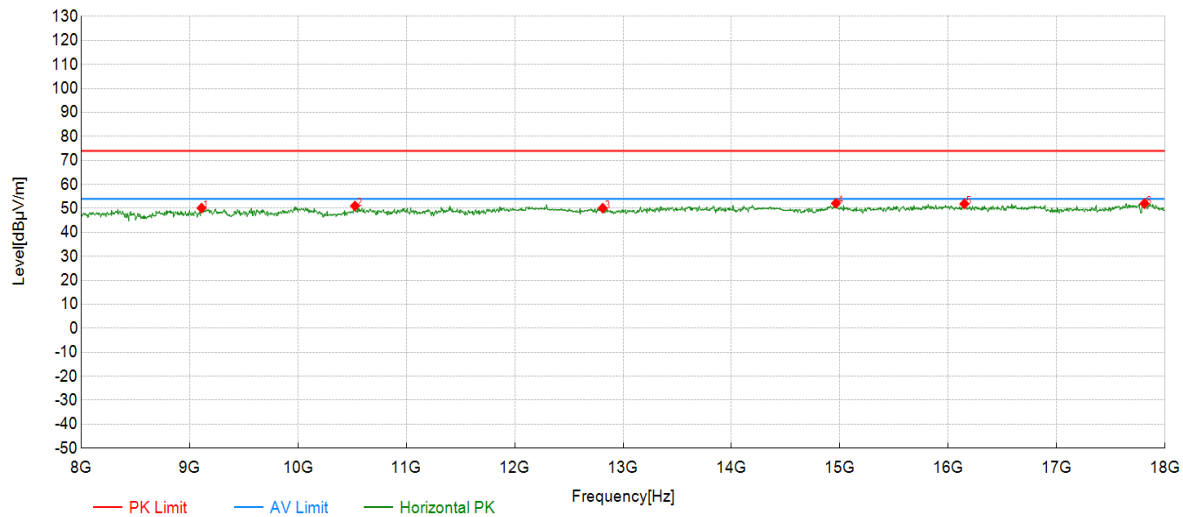

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9110.56	45.96	50.13	4.17	74.00	23.87	PK	Horizontal	PASS
2	10526.26	46.41	51.02	4.61	74.00	22.98	PK	Horizontal	PASS
3	12812.41	43.19	50.08	6.89	74.00	23.92	PK	Horizontal	PASS
4	14963.48	43.91	52.10	8.19	74.00	21.90	PK	Horizontal	PASS
5	16149.07	43.15	51.88	8.73	74.00	22.12	PK	Horizontal	PASS
6	17809.90	38.95	51.97	13.02	74.00	22.03	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5260	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

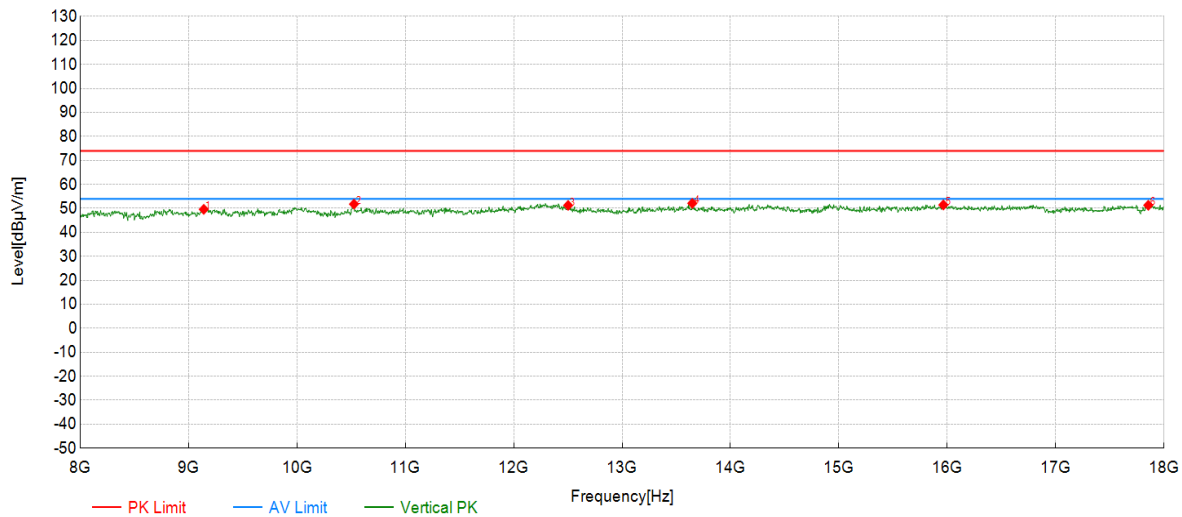

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9140.57	45.28	49.61	4.33	74.00	24.39	PK	Vertical	PASS
2	10526.26	47.17	51.78	4.61	74.00	22.22	PK	Vertical	PASS
3	12502.25	44.38	51.27	6.89	74.00	22.73	PK	Vertical	PASS
4	13647.82	44.29	52.11	7.82	74.00	21.89	PK	Vertical	PASS
5	15963.98	42.52	51.44	8.92	74.00	22.56	PK	Vertical	PASS
6	17854.93	38.55	51.31	12.76	74.00	22.69	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5280	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15 C		

Test Graph

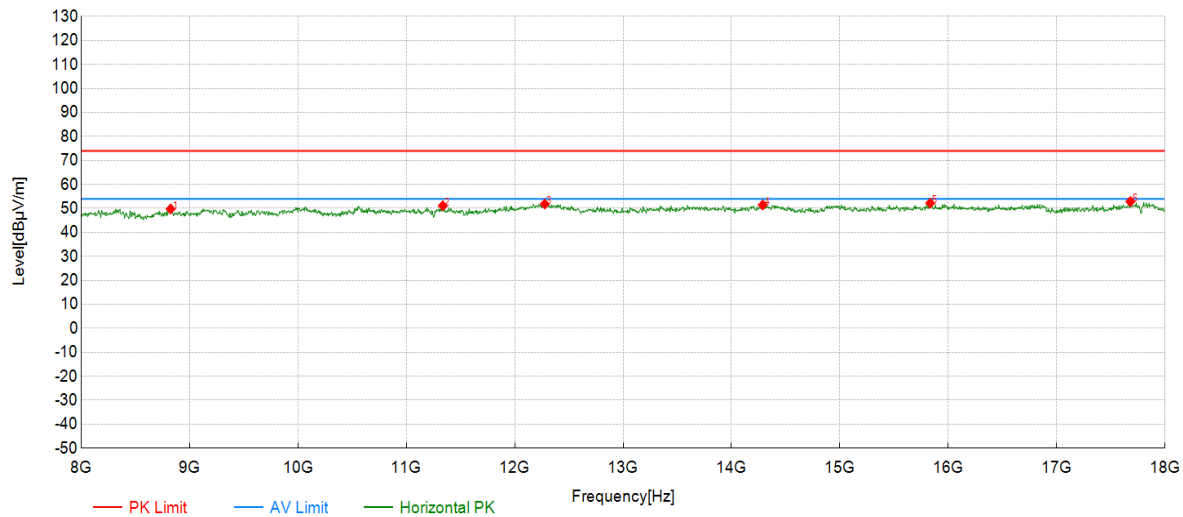

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8825.41	45.49	49.77	4.28	74.00	24.23	PK	Horizontal	PASS
2	11336.67	46.08	51.12	5.04	74.00	22.88	PK	Horizontal	PASS
3	12277.14	44.79	51.82	7.03	74.00	22.18	PK	Horizontal	PASS
4	14288.14	43.14	51.43	8.29	74.00	22.57	PK	Horizontal	PASS
5	15833.92	43.51	52.21	8.70	74.00	21.79	PK	Horizontal	PASS
6	17679.84	40.59	52.86	12.27	74.00	21.14	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Mode:	802.11n HT20-5280	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

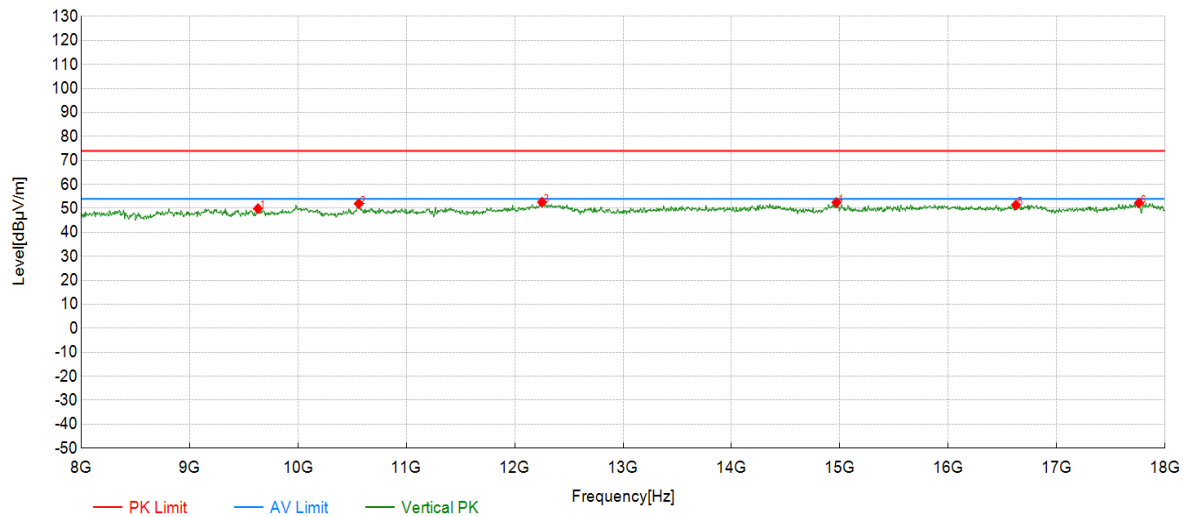

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9630.82	45.33	49.89	4.56	74.00	24.11	PK	Vertical	PASS
2	10561.28	47.29	51.98	4.69	74.00	22.02	PK	Vertical	PASS
3	12252.13	45.68	52.61	6.93	74.00	21.39	PK	Vertical	PASS
4	14968.48	44.24	52.46	8.22	74.00	21.54	PK	Vertical	PASS
5	16624.31	41.68	51.44	9.76	74.00	22.56	PK	Vertical	PASS
6	17759.88	39.47	52.27	12.80	74.00	21.73	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5320	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

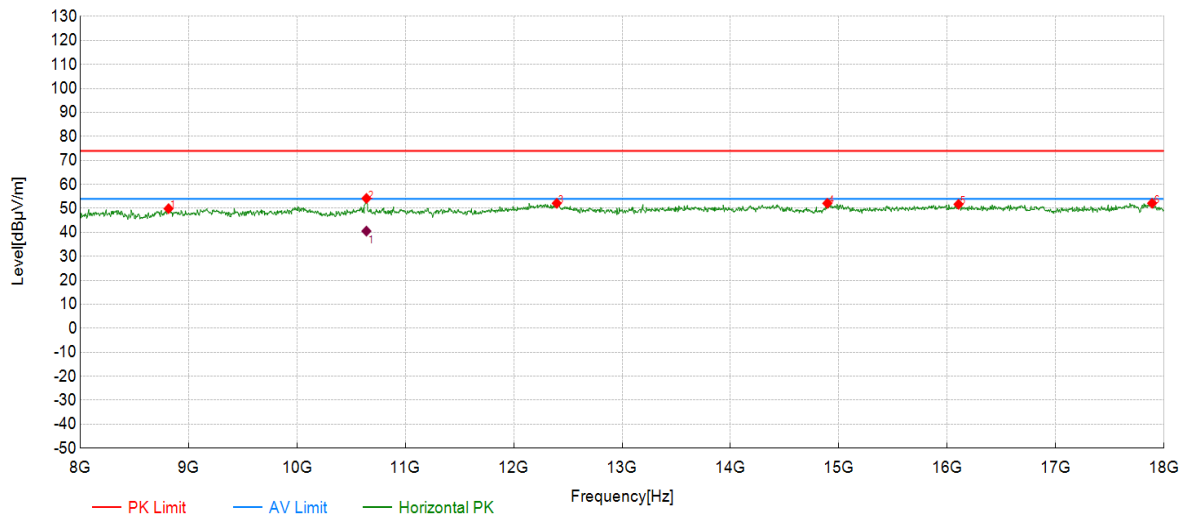

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8815.41	45.59	49.91	4.32	74.00	24.09	PK	Horizontal	PASS
2	10641.32	49.43	54.15	4.72	74.00	19.85	PK	Horizontal	PASS
3	12397.20	44.67	52.14	7.47	74.00	21.86	PK	Horizontal	PASS
4	14893.45	44.29	52.10	7.81	74.00	21.90	PK	Horizontal	PASS
5	16104.05	42.92	51.72	8.80	74.00	22.28	PK	Horizontal	PASS
6	17889.94	39.58	52.14	12.56	74.00	21.86	PK	Horizontal	PASS

Final Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	10640.93	4.72	35.80	40.52	54.00	13.48	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5320	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

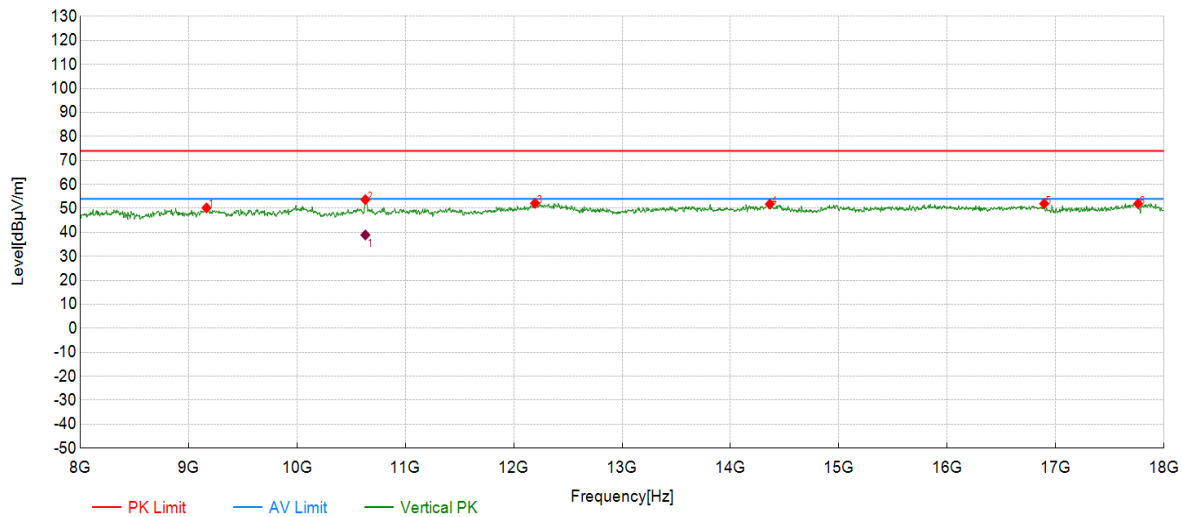

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9165.58	45.75	50.21	4.46	74.00	23.79	PK	Vertical	PASS
2	10631.32	48.93	53.66	4.73	74.00	20.34	PK	Vertical	PASS
3	12197.10	45.38	52.12	6.74	74.00	21.88	PK	Vertical	PASS
4	14363.18	43.45	51.80	8.35	74.00	22.20	PK	Vertical	PASS
5	16894.45	41.87	51.96	10.09	74.00	22.04	PK	Vertical	PASS
6	17759.88	39.12	51.92	12.80	74.00	22.08	PK	Vertical	PASS

Final Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol	Verdict
1	10631.55	4.73	34.21	38.94	54.00	15.06	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5500	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

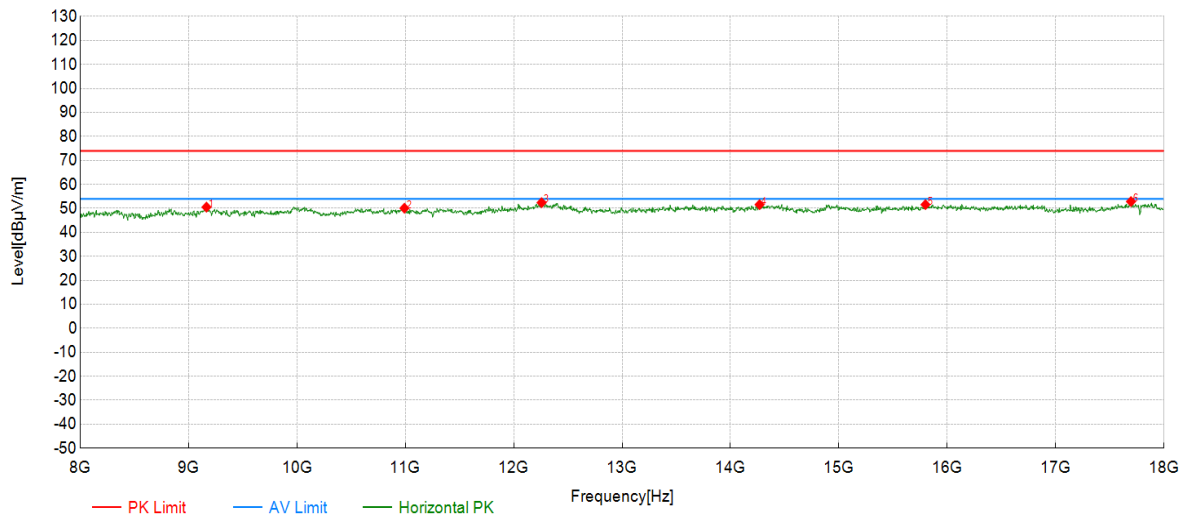

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9165.58	46.08	50.54	4.46	74.00	23.46	PK	Horizontal	PASS
2	10991.50	45.59	50.08	4.49	74.00	23.92	PK	Horizontal	PASS
3	12257.13	45.46	52.41	6.95	74.00	21.59	PK	Horizontal	PASS
4	14268.13	43.33	51.59	8.26	74.00	22.41	PK	Horizontal	PASS
5	15798.90	42.92	51.57	8.65	74.00	22.43	PK	Horizontal	PASS
6	17694.85	40.48	52.85	12.37	74.00	21.15	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5500	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

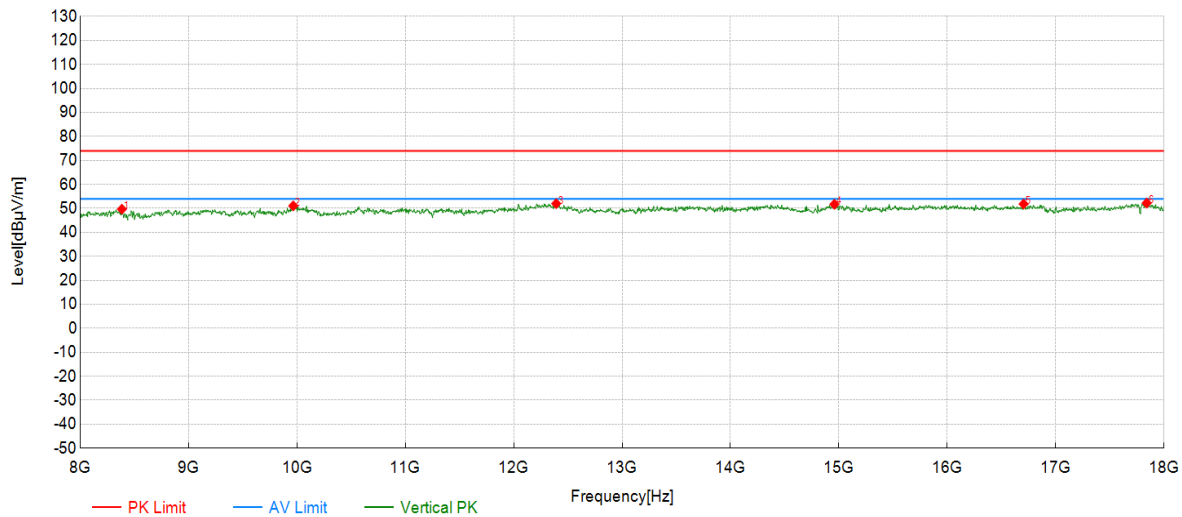

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8385.19	45.38	49.69	4.31	74.00	24.31	PK	Vertical	PASS
2	9965.98	45.81	51.04	5.23	74.00	22.96	PK	Vertical	PASS
3	12392.20	44.55	52.00	7.45	74.00	22.00	PK	Vertical	PASS
4	14958.48	43.53	51.70	8.17	74.00	22.30	PK	Vertical	PASS
5	16704.35	42.12	51.85	9.73	74.00	22.15	PK	Vertical	PASS
6	17839.92	39.36	52.21	12.85	74.00	21.79	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5580	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

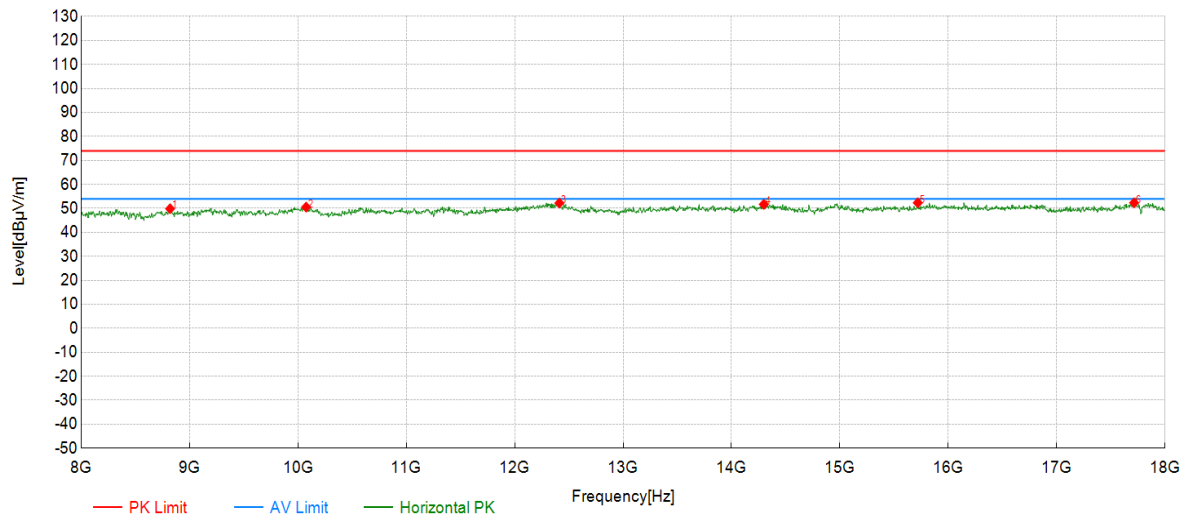

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8820.41	45.56	49.86	4.30	74.00	24.14	PK	Horizontal	PASS
2	10076.04	45.57	50.53	4.96	74.00	23.47	PK	Horizontal	PASS
3	12412.21	44.83	52.24	7.41	74.00	21.76	PK	Horizontal	PASS
4	14298.15	43.40	51.70	8.30	74.00	22.30	PK	Horizontal	PASS
5	15718.86	43.58	52.33	8.75	74.00	21.67	PK	Horizontal	PASS
6	17714.86	39.83	52.33	12.50	74.00	21.67	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5580	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

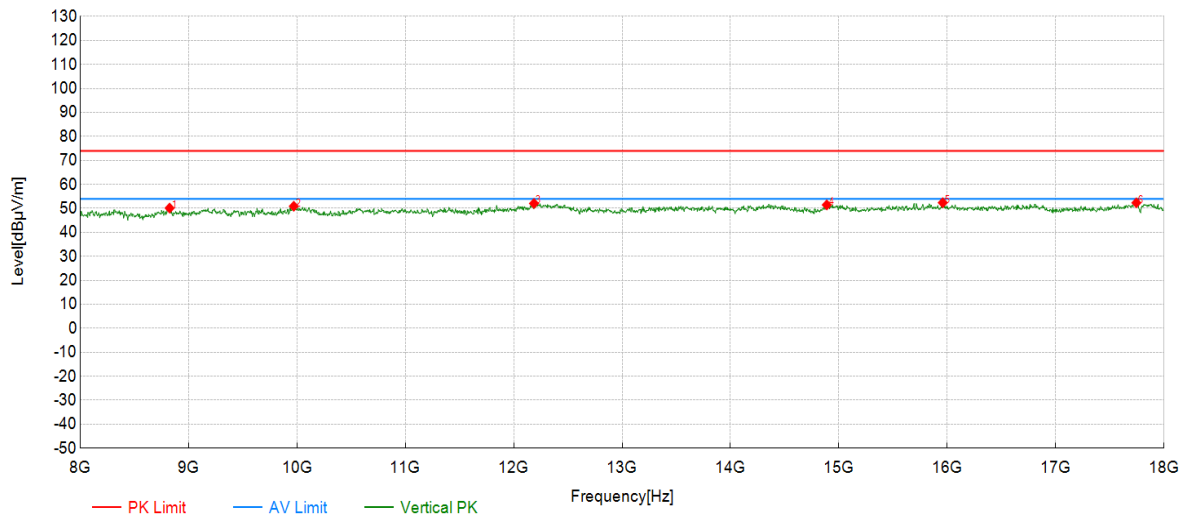

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8825.41	45.85	50.13	4.28	74.00	23.87	PK	Vertical	PASS
2	9970.99	45.61	50.89	5.28	74.00	23.11	PK	Vertical	PASS
3	12187.09	45.34	52.06	6.72	74.00	21.94	PK	Vertical	PASS
4	14888.44	43.69	51.46	7.77	74.00	22.54	PK	Vertical	PASS
5	15958.98	43.47	52.38	8.91	74.00	21.62	PK	Vertical	PASS
6	17744.87	39.63	52.33	12.70	74.00	21.67	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5700	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

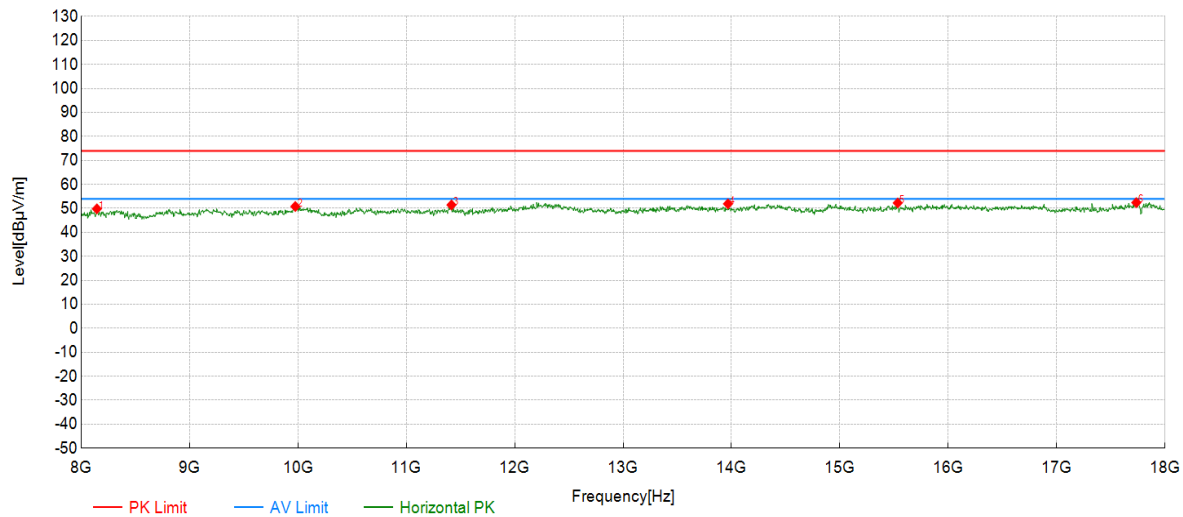

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8145.07	46.38	49.82	3.44	74.00	24.18	PK	Horizontal	PASS
2	9975.99	45.47	50.79	5.32	74.00	23.21	PK	Horizontal	PASS
3	11416.71	46.39	51.44	5.05	74.00	22.56	PK	Horizontal	PASS
4	13967.98	43.82	51.90	8.08	74.00	22.10	PK	Horizontal	PASS
5	15533.77	43.57	52.27	8.70	74.00	21.73	PK	Horizontal	PASS
6	17734.87	39.77	52.41	12.64	74.00	21.59	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5700	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

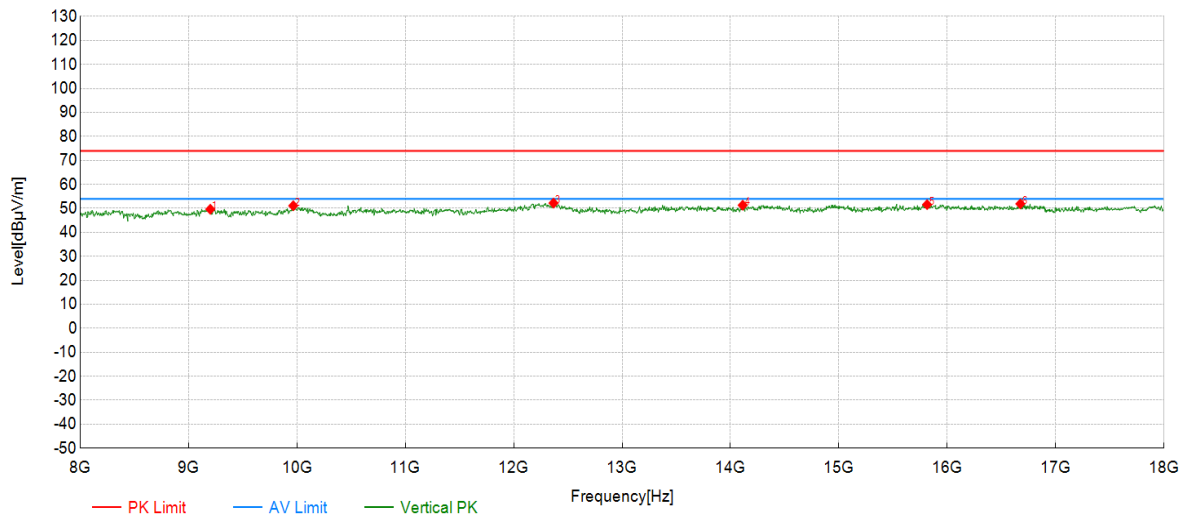

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9200.60	45.00	49.64	4.64	74.00	24.36	PK	Vertical	PASS
2	9965.98	45.89	51.12	5.23	74.00	22.88	PK	Vertical	PASS
3	12367.18	44.88	52.23	7.35	74.00	21.77	PK	Vertical	PASS
4	14113.06	43.21	51.33	8.12	74.00	22.67	PK	Vertical	PASS
5	15813.91	42.91	51.58	8.67	74.00	22.42	PK	Vertical	PASS
6	16674.34	42.15	51.90	9.75	74.00	22.10	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5720	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

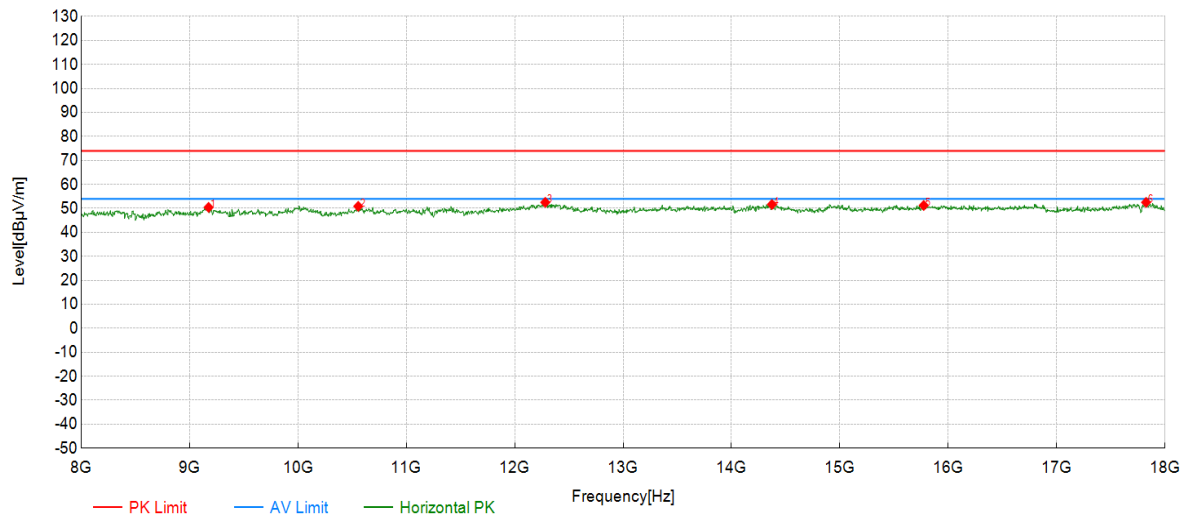

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9175.59	45.90	50.42	4.52	74.00	23.58	PK	Horizontal	PASS
2	10556.28	46.20	50.87	4.67	74.00	23.13	PK	Horizontal	PASS
3	12282.14	45.47	52.52	7.05	74.00	21.48	PK	Horizontal	PASS
4	14373.19	43.28	51.64	8.36	74.00	22.36	PK	Horizontal	PASS
5	15773.89	42.56	51.24	8.68	74.00	22.76	PK	Horizontal	PASS
6	17824.91	39.60	52.53	12.93	74.00	21.47	PK	Horizontal	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Mode:	802.11n HT20-5720	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

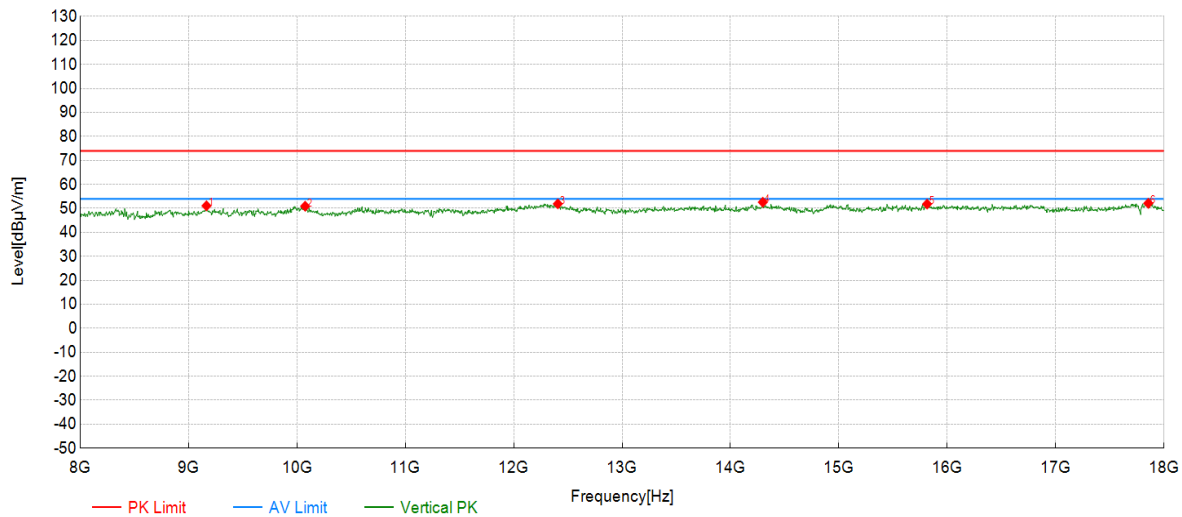

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9165.58	46.62	51.08	4.46	74.00	22.92	PK	Vertical	PASS
2	10076.04	45.95	50.91	4.96	74.00	23.09	PK	Vertical	PASS
3	12407.20	44.45	51.89	7.44	74.00	22.11	PK	Vertical	PASS
4	14298.15	44.29	52.59	8.30	74.00	21.41	PK	Vertical	PASS
5	15813.91	43.15	51.82	8.67	74.00	22.18	PK	Vertical	PASS
6	17854.93	39.36	52.12	12.76	74.00	21.88	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5745	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

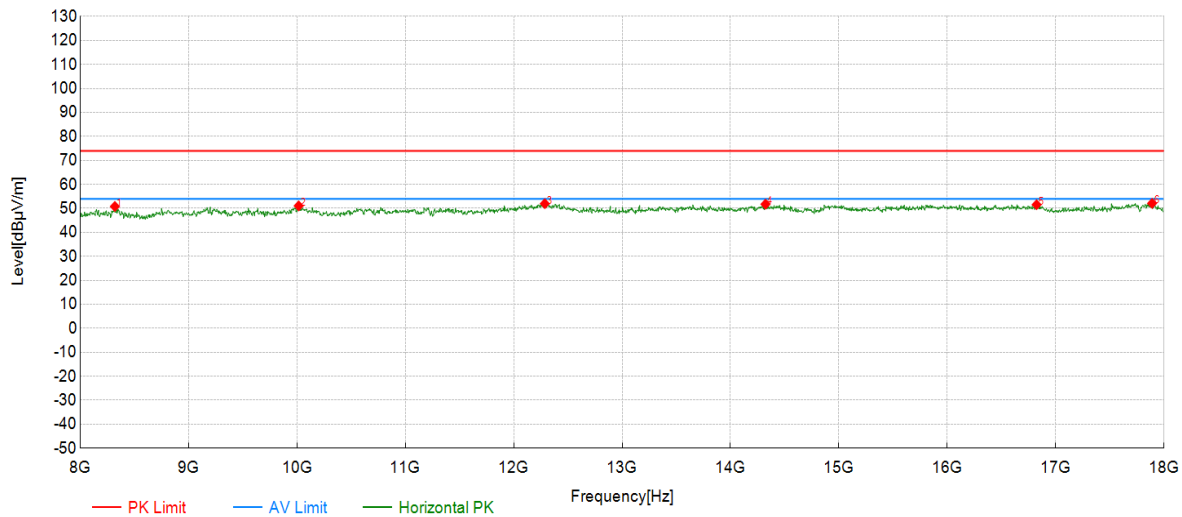

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8320.16	46.85	50.80	3.95	74.00	23.20	PK	Horizontal	PASS
2	10016.01	45.65	51.06	5.41	74.00	22.94	PK	Horizontal	PASS
3	12287.14	44.91	51.98	7.07	74.00	22.02	PK	Horizontal	PASS
4	14323.16	43.45	51.76	8.31	74.00	22.24	PK	Horizontal	PASS
5	16824.41	41.76	51.56	9.80	74.00	22.44	PK	Horizontal	PASS
6	17889.94	39.56	52.12	12.56	74.00	21.88	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5745	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

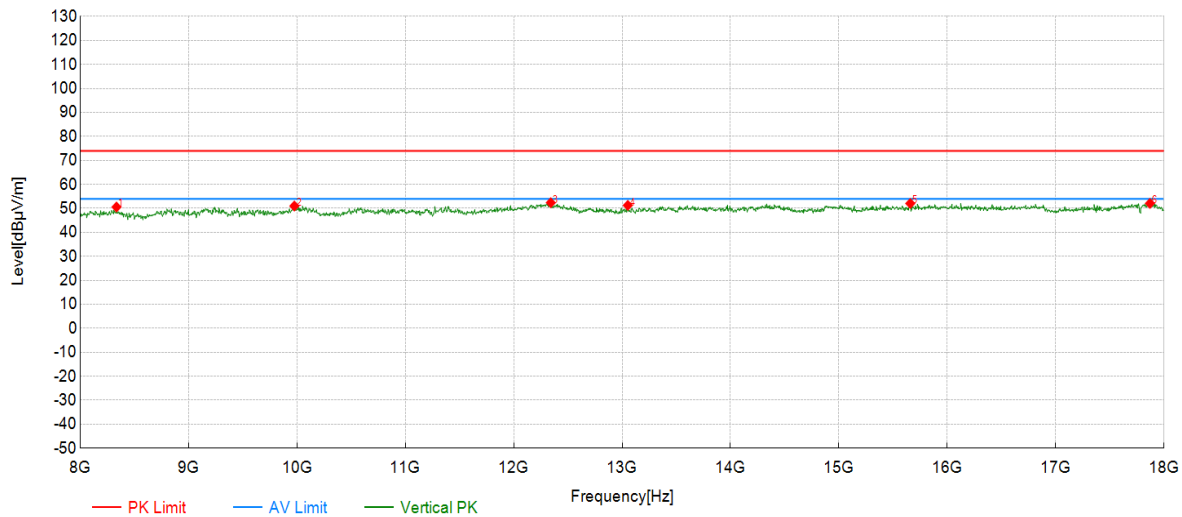

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8335.17	46.54	50.57	4.03	74.00	23.43	PK	Vertical	PASS
2	9975.99	45.66	50.98	5.32	74.00	23.02	PK	Vertical	PASS
3	12342.17	45.11	52.37	7.26	74.00	21.63	PK	Vertical	PASS
4	13052.53	44.41	51.26	6.85	74.00	22.74	PK	Vertical	PASS
5	15658.83	43.25	52.07	8.82	74.00	21.93	PK	Vertical	PASS
6	17869.93	39.41	52.08	12.67	74.00	21.92	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5785	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

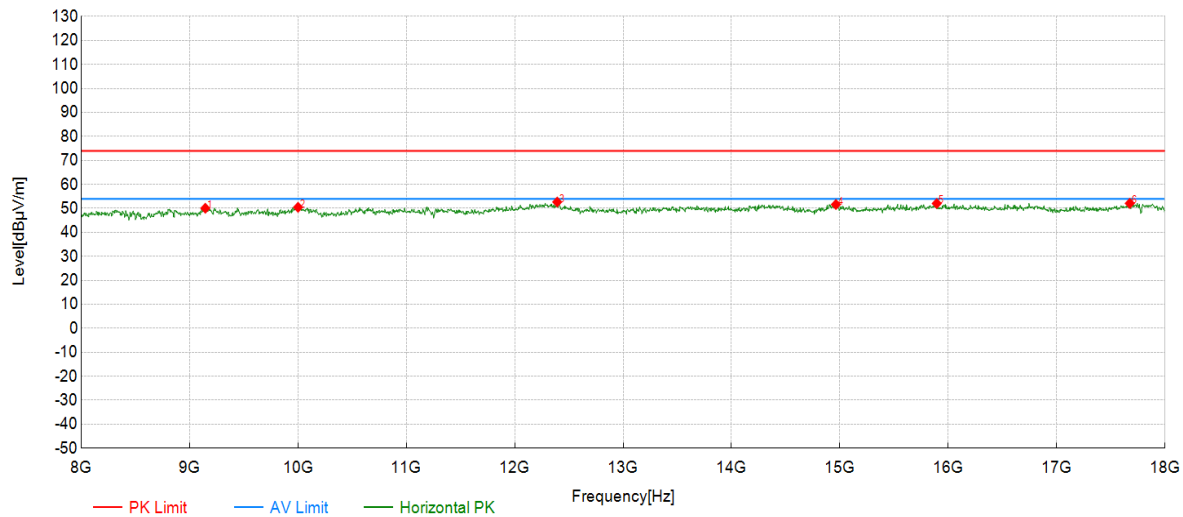

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9145.57	45.71	50.07	4.36	74.00	23.93	PK	Horizontal	PASS
2	10001.00	44.96	50.47	5.51	74.00	23.53	PK	Horizontal	PASS
3	12392.20	45.22	52.67	7.45	74.00	21.33	PK	Horizontal	PASS
4	14963.48	43.43	51.62	8.19	74.00	22.38	PK	Horizontal	PASS
5	15893.95	43.27	52.07	8.80	74.00	21.93	PK	Horizontal	PASS
6	17674.84	39.89	52.11	12.22	74.00	21.89	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5785	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

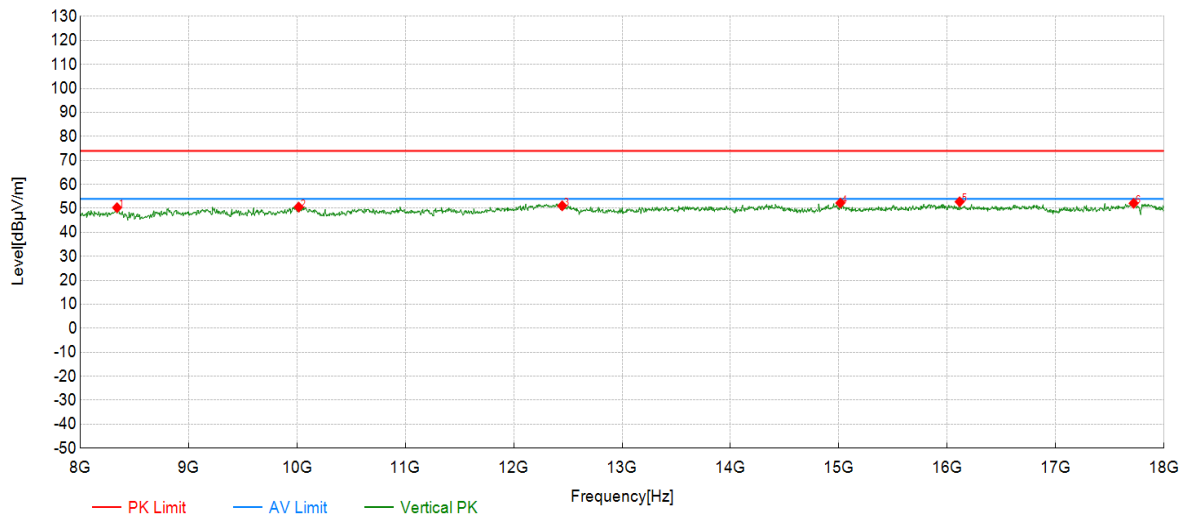

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8340.17	46.26	50.32	4.06	74.00	23.68	PK	Vertical	PASS
2	10016.01	45.14	50.55	5.41	74.00	23.45	PK	Vertical	PASS
3	12447.22	43.87	51.08	7.21	74.00	22.92	PK	Vertical	PASS
4	15013.51	43.89	52.25	8.36	74.00	21.75	PK	Vertical	PASS
5	16114.06	43.98	52.76	8.78	74.00	21.24	PK	Vertical	PASS
6	17719.86	39.60	52.13	12.53	74.00	21.87	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5825	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

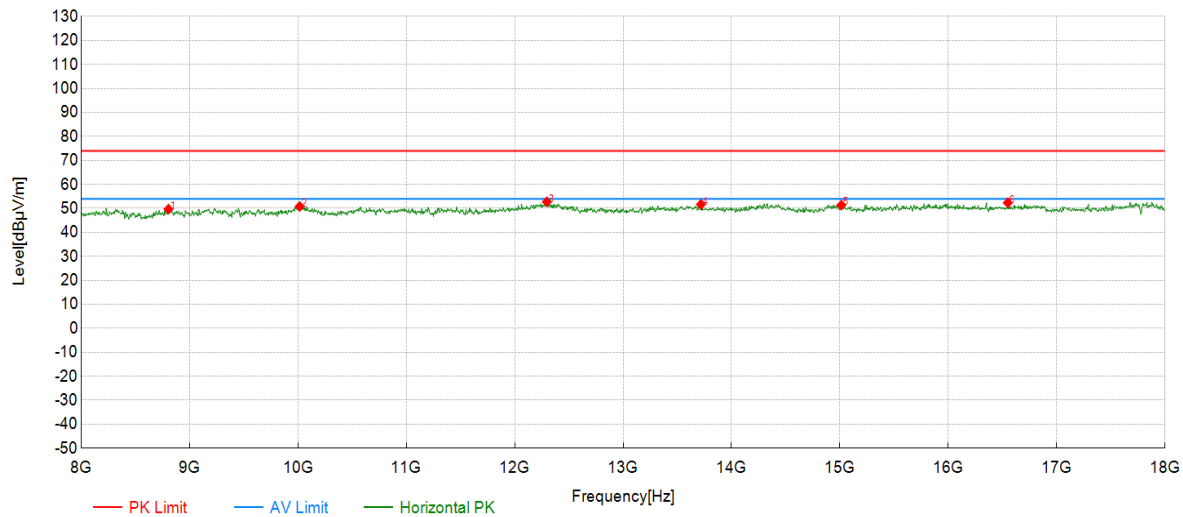

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8805.40	45.32	49.68	4.36	74.00	24.32	PK	Horizontal	PASS
2	10016.01	45.40	50.81	5.41	74.00	23.19	PK	Horizontal	PASS
3	12297.15	45.64	52.74	7.10	74.00	21.26	PK	Horizontal	PASS
4	13717.86	43.62	51.64	8.02	74.00	22.36	PK	Horizontal	PASS
5	15013.51	43.03	51.39	8.36	74.00	22.61	PK	Horizontal	PASS
6	16549.27	42.85	52.34	9.49	74.00	21.66	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT20-5825	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

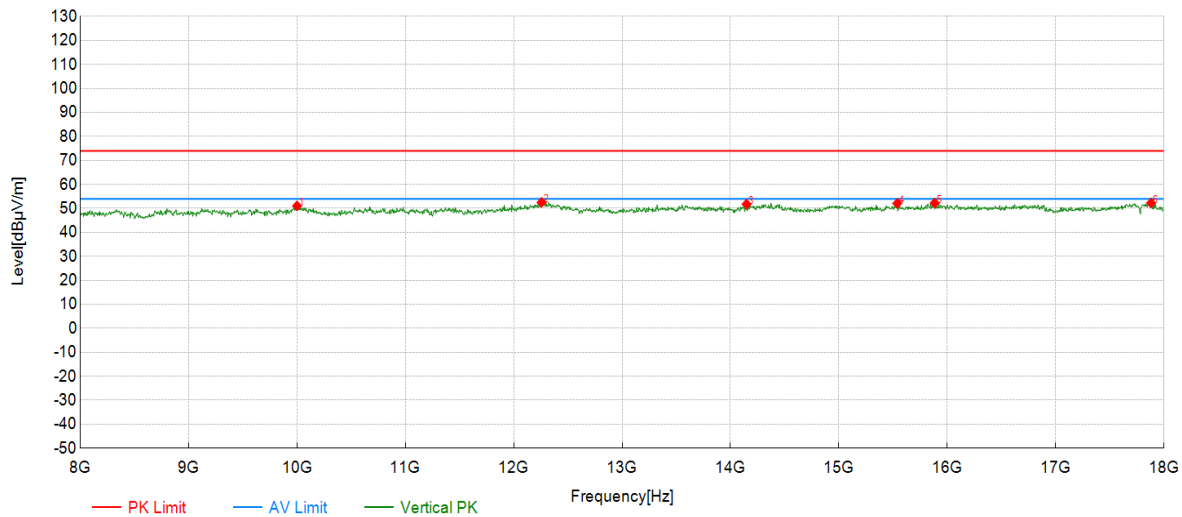

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10001.00	45.52	51.03	5.51	74.00	22.97	PK	Vertical	PASS
2	12257.13	45.56	52.51	6.95	74.00	21.49	PK	Vertical	PASS
3	14148.07	43.61	51.77	8.16	74.00	22.23	PK	Vertical	PASS
4	15538.77	43.40	52.10	8.70	74.00	21.90	PK	Vertical	PASS
5	15883.94	43.43	52.22	8.79	74.00	21.78	PK	Vertical	PASS
6	17879.94	39.62	52.24	12.62	74.00	21.76	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5190	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

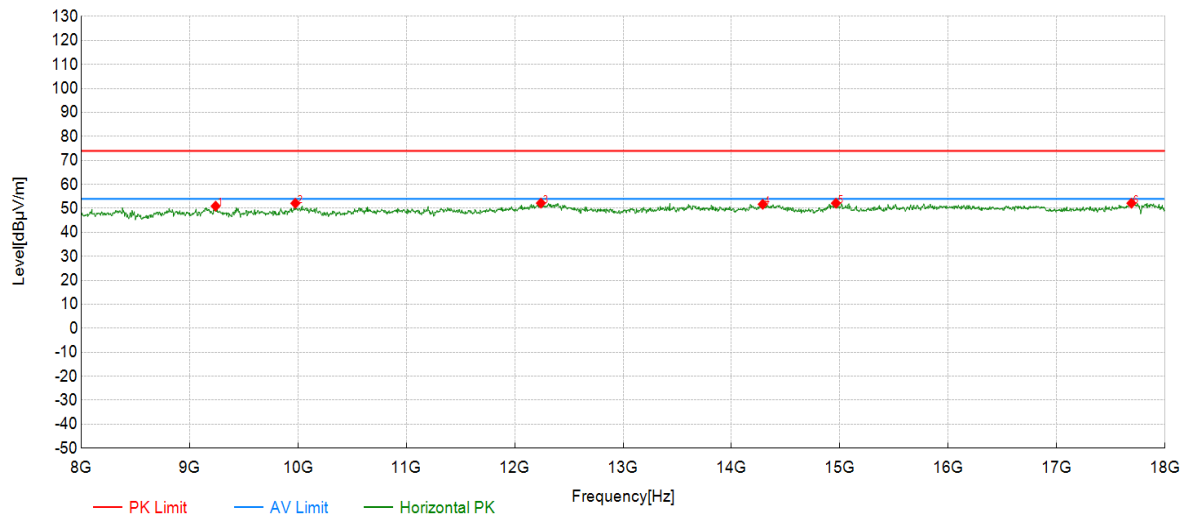

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9240.62	46.37	50.96	4.59	74.00	23.04	PK	Horizontal	PASS
2	9975.99	46.80	52.12	5.32	74.00	21.88	PK	Horizontal	PASS
3	12242.12	45.31	52.20	6.89	74.00	21.80	PK	Horizontal	PASS
4	14288.14	43.43	51.72	8.29	74.00	22.28	PK	Horizontal	PASS
5	14963.48	43.98	52.17	8.19	74.00	21.83	PK	Horizontal	PASS
6	17689.84	39.83	52.16	12.33	74.00	21.84	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5190	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

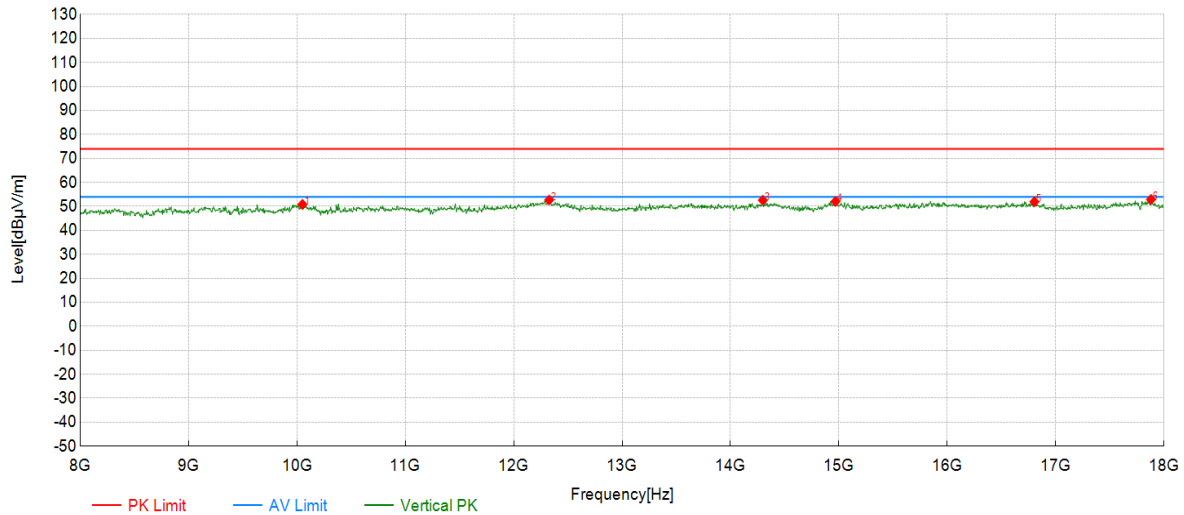

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10051.03	45.70	50.83	5.13	74.00	23.17	PK	Vertical	PASS
2	12327.16	45.46	52.67	7.21	74.00	21.33	PK	Vertical	PASS
3	14298.15	44.28	52.58	8.30	74.00	21.42	PK	Vertical	PASS
4	14968.48	43.84	52.06	8.22	74.00	21.94	PK	Vertical	PASS
5	16804.40	42.22	51.93	9.71	74.00	22.07	PK	Vertical	PASS
6	17879.94	40.26	52.88	12.62	74.00	21.12	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5230	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

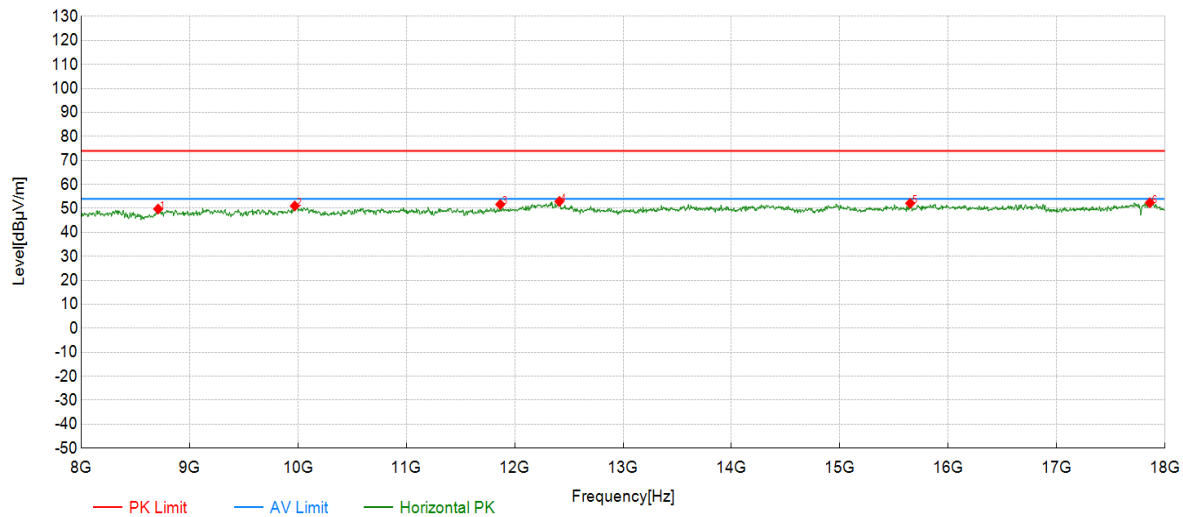

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8710.36	45.98	49.74	3.76	74.00	24.26	PK	Horizontal	PASS
2	9970.99	45.76	51.04	5.28	74.00	22.96	PK	Horizontal	PASS
3	11866.93	45.83	51.66	5.83	74.00	22.34	PK	Horizontal	PASS
4	12412.21	45.50	52.91	7.41	74.00	21.09	PK	Horizontal	PASS
5	15648.82	43.28	52.11	8.83	74.00	21.89	PK	Horizontal	PASS
6	17859.93	39.63	52.36	12.73	74.00	21.64	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5230	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

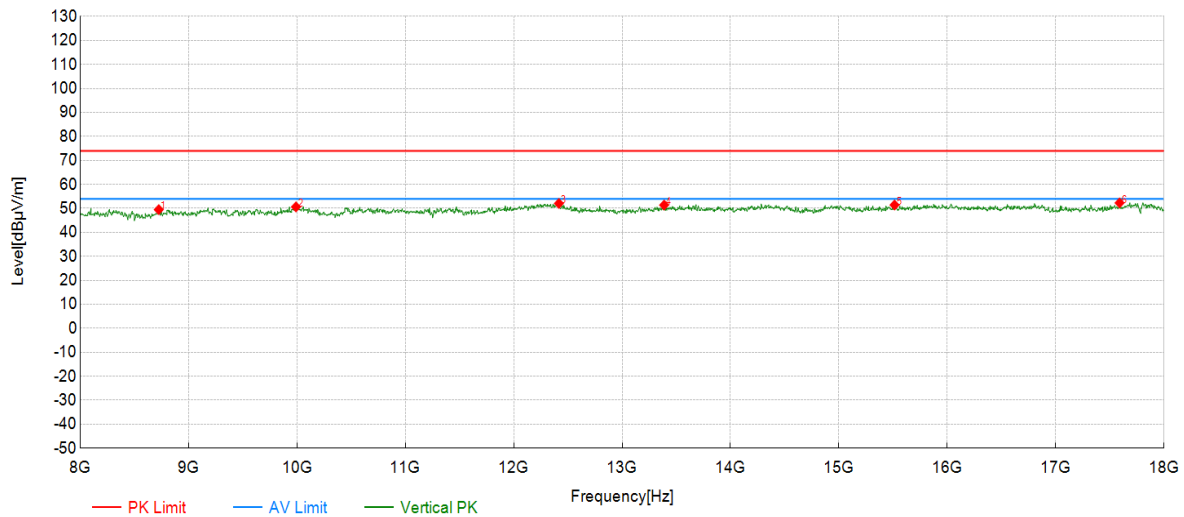

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8725.36	45.64	49.50	3.86	74.00	24.50	PK	Vertical	PASS
2	9991.00	45.17	50.62	5.45	74.00	23.38	PK	Vertical	PASS
3	12417.21	44.69	52.06	7.37	74.00	21.94	PK	Vertical	PASS
4	13387.69	43.81	51.38	7.57	74.00	22.62	PK	Vertical	PASS
5	15513.76	42.77	51.41	8.64	74.00	22.59	PK	Vertical	PASS
6	17589.79	40.61	52.30	11.69	74.00	21.70	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5270	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

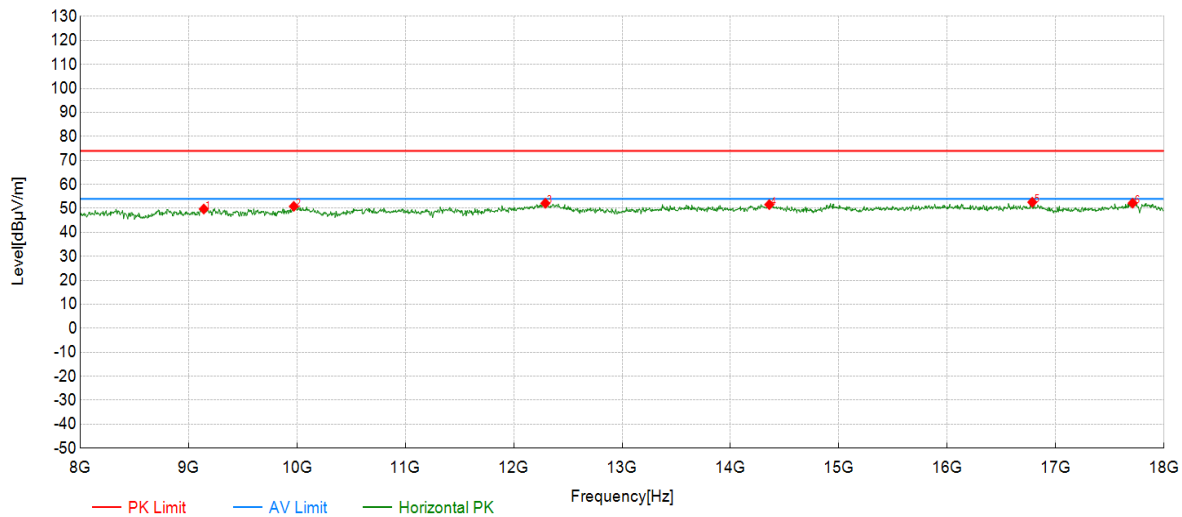

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9140.57	45.40	49.73	4.33	74.00	24.27	PK	Horizontal	PASS
2	9970.99	45.58	50.86	5.28	74.00	23.14	PK	Horizontal	PASS
3	12292.15	45.04	52.12	7.08	74.00	21.88	PK	Horizontal	PASS
4	14358.18	43.23	51.58	8.35	74.00	22.42	PK	Horizontal	PASS
5	16784.39	42.88	52.59	9.71	74.00	21.41	PK	Horizontal	PASS
6	17709.85	39.71	52.18	12.47	74.00	21.82	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5270	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

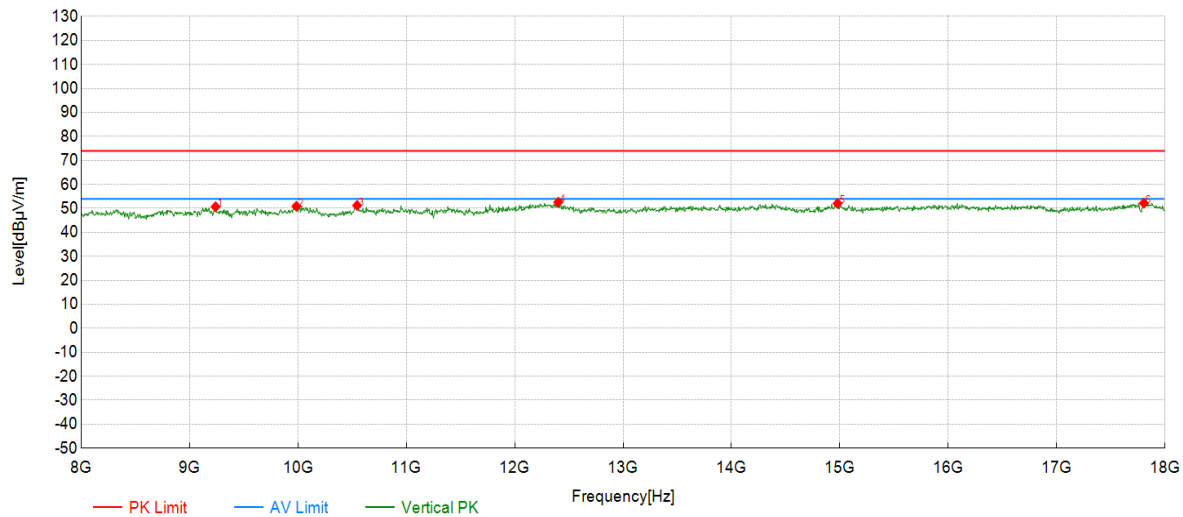

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9240.62	46.10	50.69	4.59	74.00	23.31	PK	Vertical	PASS
2	9985.99	45.49	50.89	5.40	74.00	23.11	PK	Vertical	PASS
3	10546.27	46.57	51.23	4.66	74.00	22.77	PK	Vertical	PASS
4	12402.20	45.10	52.57	7.47	74.00	21.43	PK	Vertical	PASS
5	14978.49	43.77	52.06	8.29	74.00	21.94	PK	Vertical	PASS
6	17804.90	39.11	52.16	13.05	74.00	21.84	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5310	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

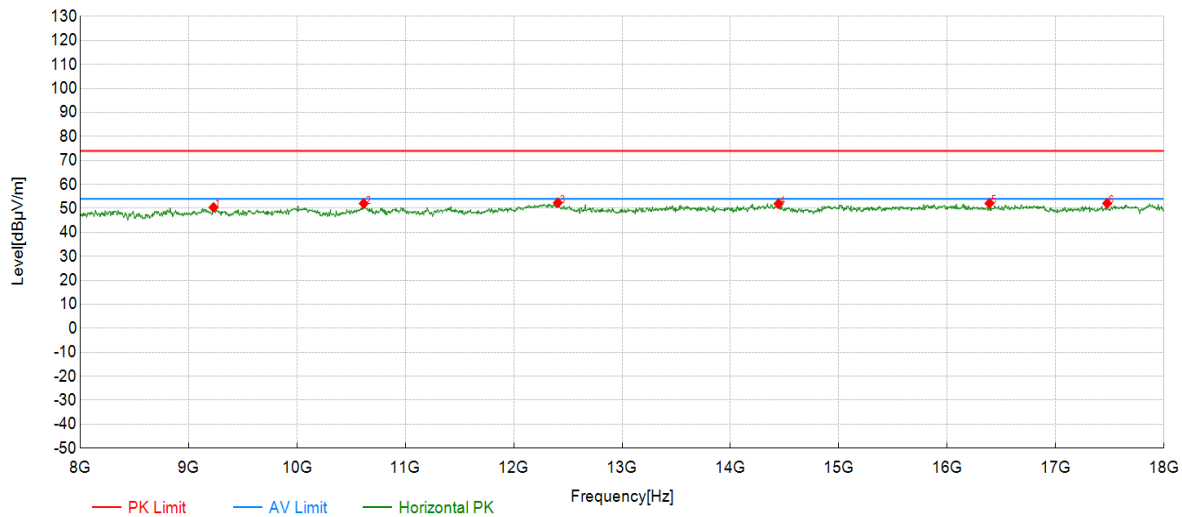

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9230.62	45.79	50.40	4.61	74.00	23.60	PK	Horizontal	PASS
2	10616.31	47.26	52.02	4.76	74.00	21.98	PK	Horizontal	PASS
3	12407.20	44.92	52.36	7.44	74.00	21.64	PK	Horizontal	PASS
4	14443.22	43.71	51.94	8.23	74.00	22.06	PK	Horizontal	PASS
5	16389.19	43.45	52.11	8.66	74.00	21.89	PK	Horizontal	PASS
6	17474.74	40.71	52.08	11.37	74.00	21.92	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5310	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

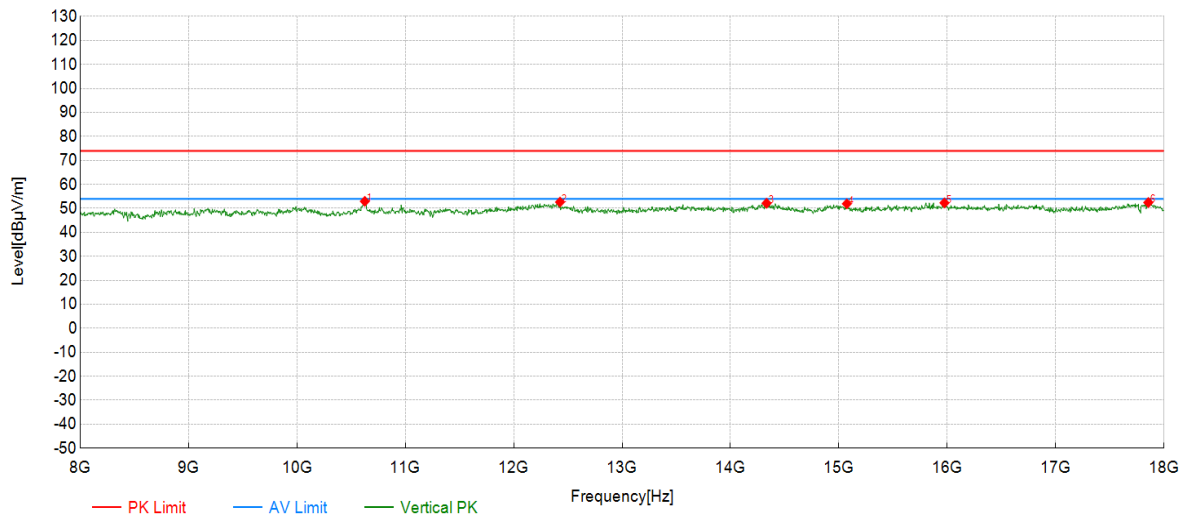

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10626.31	48.21	52.95	4.74	74.00	21.05	PK	Vertical	PASS
2	12427.21	45.31	52.64	7.33	74.00	21.36	PK	Vertical	PASS
3	14333.17	43.82	52.15	8.33	74.00	21.85	PK	Vertical	PASS
4	15073.54	43.73	51.92	8.19	74.00	22.08	PK	Vertical	PASS
5	15973.99	43.37	52.30	8.93	74.00	21.70	PK	Vertical	PASS
6	17854.93	39.70	52.46	12.76	74.00	21.54	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5510	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

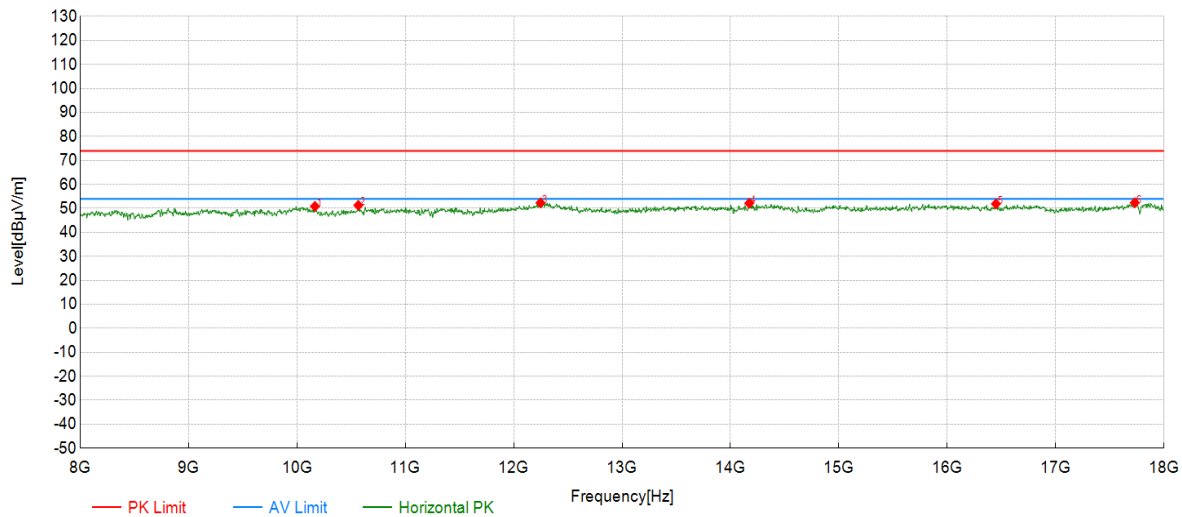

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10166.08	46.57	50.85	4.28	74.00	23.15	PK	Horizontal	PASS
2	10566.28	46.60	51.30	4.70	74.00	22.70	PK	Horizontal	PASS
3	12247.12	45.41	52.33	6.92	74.00	21.67	PK	Horizontal	PASS
4	14173.09	43.98	52.15	8.17	74.00	21.85	PK	Horizontal	PASS
5	16449.22	42.96	51.89	8.93	74.00	22.11	PK	Horizontal	PASS
6	17729.86	39.75	52.36	12.61	74.00	21.64	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5510	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

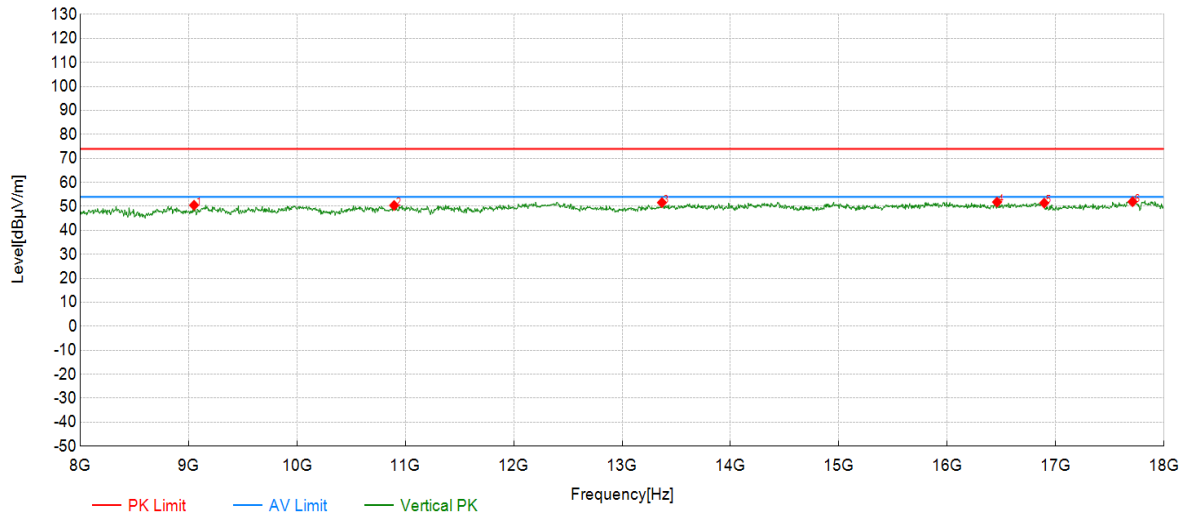

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9050.53	46.63	50.50	3.87	74.00	23.50	PK	Vertical	PASS
2	10896.45	45.89	50.41	4.52	74.00	23.59	PK	Vertical	PASS
3	13367.68	44.05	51.60	7.55	74.00	22.40	PK	Vertical	PASS
4	16459.23	42.81	51.80	8.99	74.00	22.20	PK	Vertical	PASS
5	16894.45	41.31	51.40	10.09	74.00	22.60	PK	Vertical	PASS
6	17709.85	39.48	51.95	12.47	74.00	22.05	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5550	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

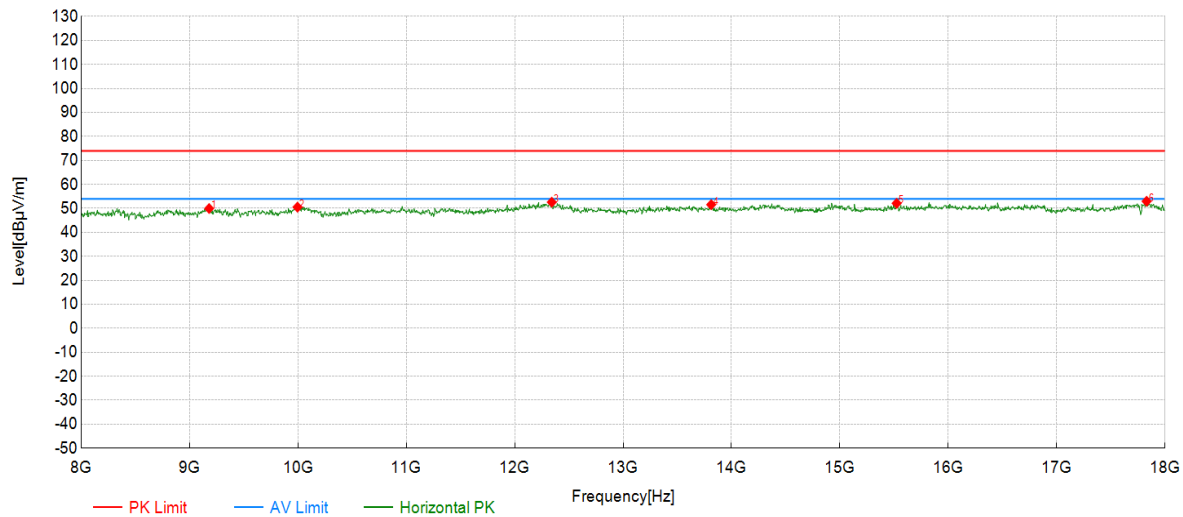

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9180.59	45.41	49.95	4.54	74.00	24.05	PK	Horizontal	PASS
2	9996.00	45.04	50.53	5.49	74.00	23.47	PK	Horizontal	PASS
3	12342.17	45.33	52.59	7.26	74.00	21.41	PK	Horizontal	PASS
4	13812.91	43.33	51.57	8.24	74.00	22.43	PK	Horizontal	PASS
5	15523.76	43.46	52.12	8.66	74.00	21.88	PK	Horizontal	PASS
6	17829.91	40.07	52.98	12.91	74.00	21.02	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5550	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

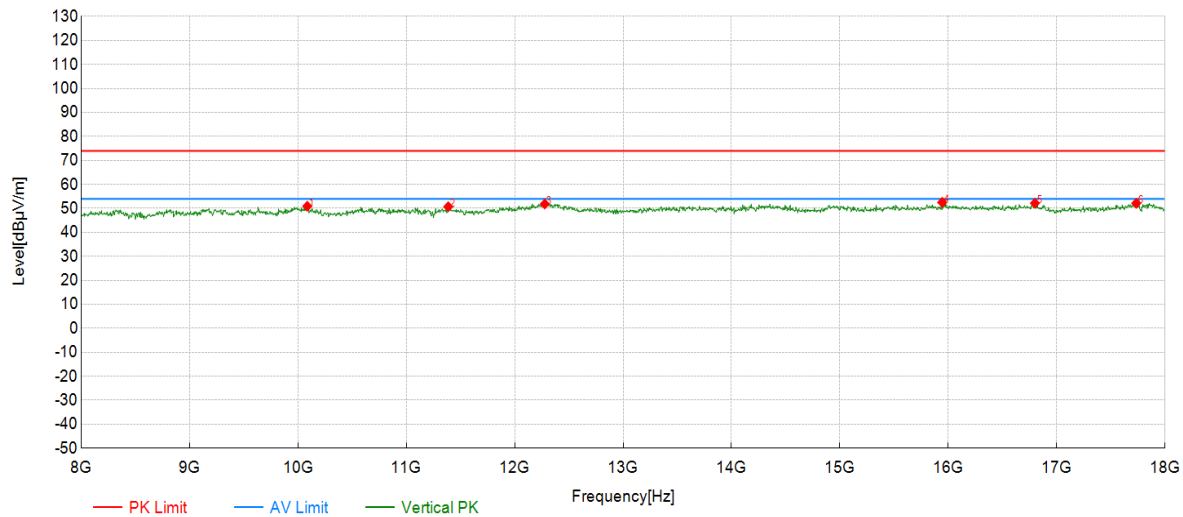

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10086.04	46.03	50.90	4.87	74.00	23.10	PK	Vertical	PASS
2	11386.69	45.63	50.70	5.07	74.00	23.30	PK	Vertical	PASS
3	12277.14	44.82	51.85	7.03	74.00	22.15	PK	Vertical	PASS
4	15943.97	43.65	52.52	8.87	74.00	21.48	PK	Vertical	PASS
5	16799.40	42.48	52.18	9.70	74.00	21.82	PK	Vertical	PASS
6	17734.87	39.49	52.13	12.64	74.00	21.87	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5670	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

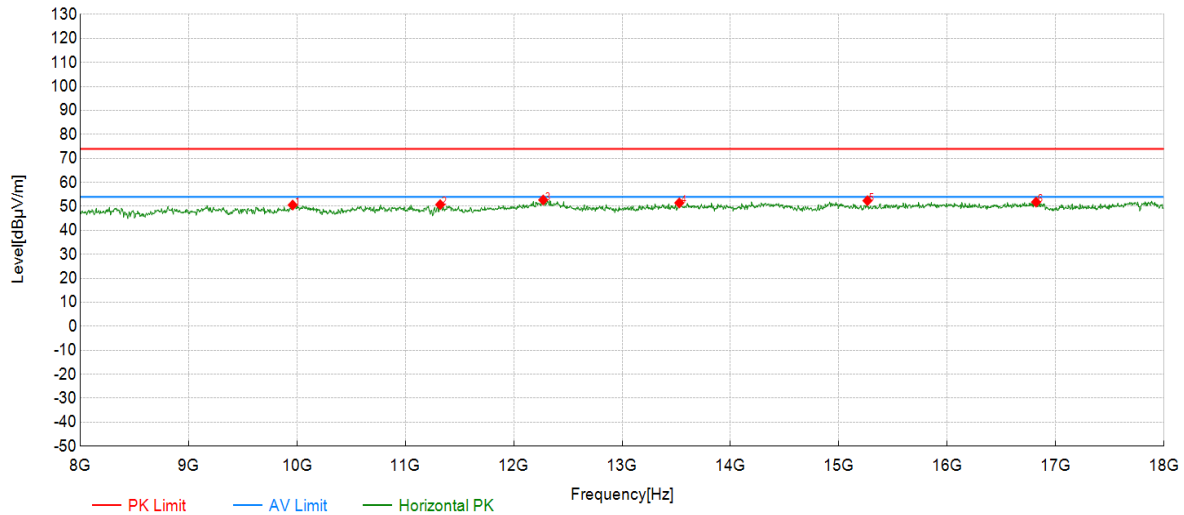

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9960.98	45.37	50.56	5.19	74.00	23.44	PK	Horizontal	PASS
2	11321.66	45.70	50.74	5.04	74.00	23.26	PK	Horizontal	PASS
3	12272.14	45.68	52.68	7.00	74.00	21.32	PK	Horizontal	PASS
4	13527.76	43.83	51.45	7.62	74.00	22.55	PK	Horizontal	PASS
5	15263.63	44.36	52.38	8.02	74.00	21.62	PK	Horizontal	PASS
6	16819.41	42.02	51.80	9.78	74.00	22.20	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5670	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

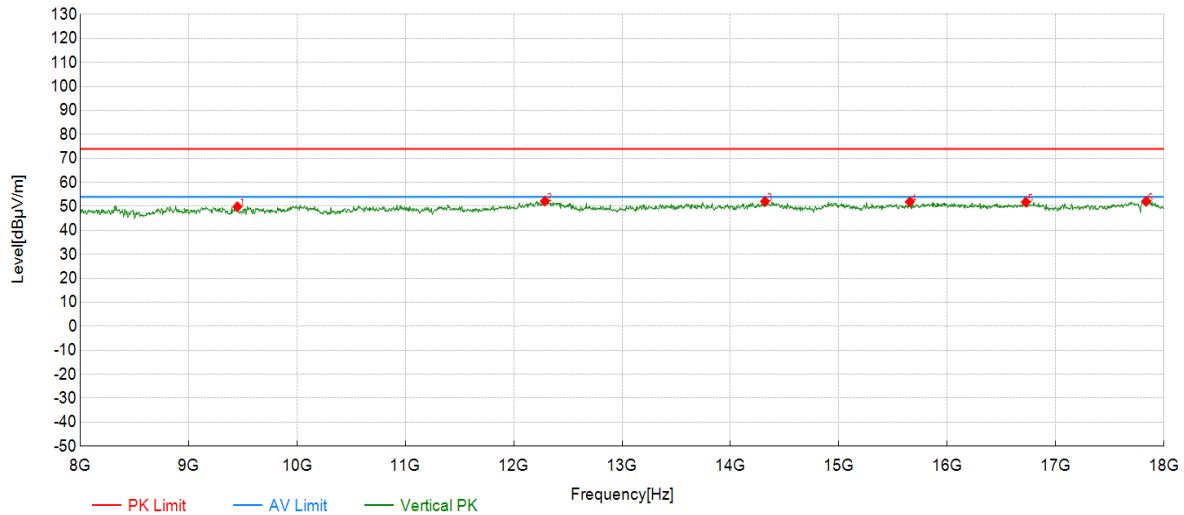

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9450.73	45.44	49.87	4.43	74.00	24.13	PK	Vertical	PASS
2	12287.14	45.12	52.19	7.07	74.00	21.81	PK	Vertical	PASS
3	14318.16	43.76	52.07	8.31	74.00	21.93	PK	Vertical	PASS
4	15653.83	43.06	51.89	8.83	74.00	22.11	PK	Vertical	PASS
5	16724.36	42.08	51.81	9.73	74.00	22.19	PK	Vertical	PASS
6	17834.92	39.26	52.14	12.88	74.00	21.86	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5710	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

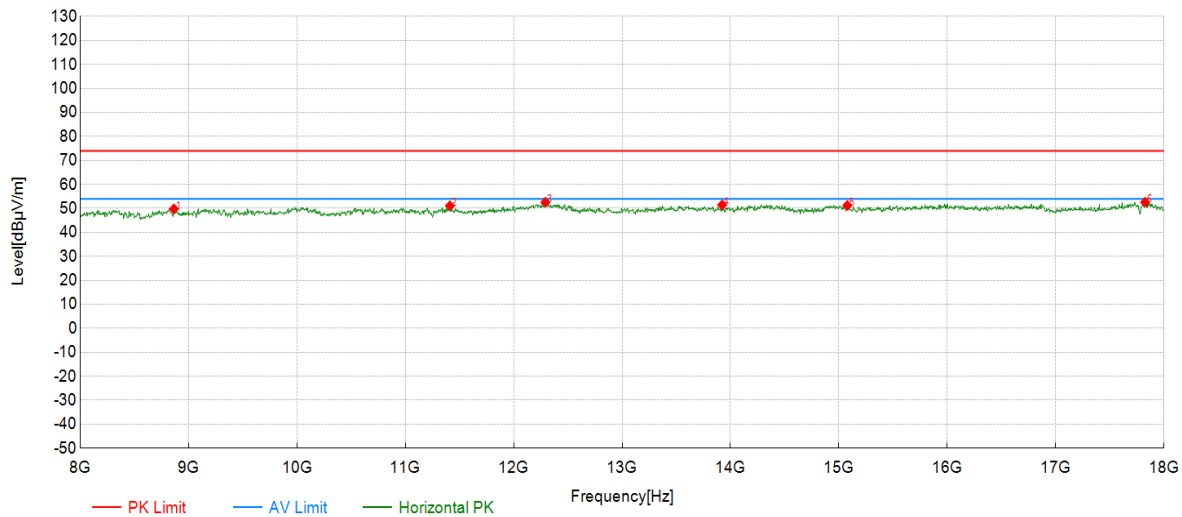

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8865.43	45.65	49.78	4.13	74.00	24.22	PK	Horizontal	PASS
2	11411.71	46.01	51.07	5.06	74.00	22.93	PK	Horizontal	PASS
3	12292.15	45.48	52.56	7.08	74.00	21.44	PK	Horizontal	PASS
4	13922.96	43.30	51.43	8.13	74.00	22.57	PK	Horizontal	PASS
5	15078.54	43.03	51.22	8.19	74.00	22.78	PK	Horizontal	PASS
6	17824.91	39.62	52.55	12.93	74.00	21.45	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5710	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

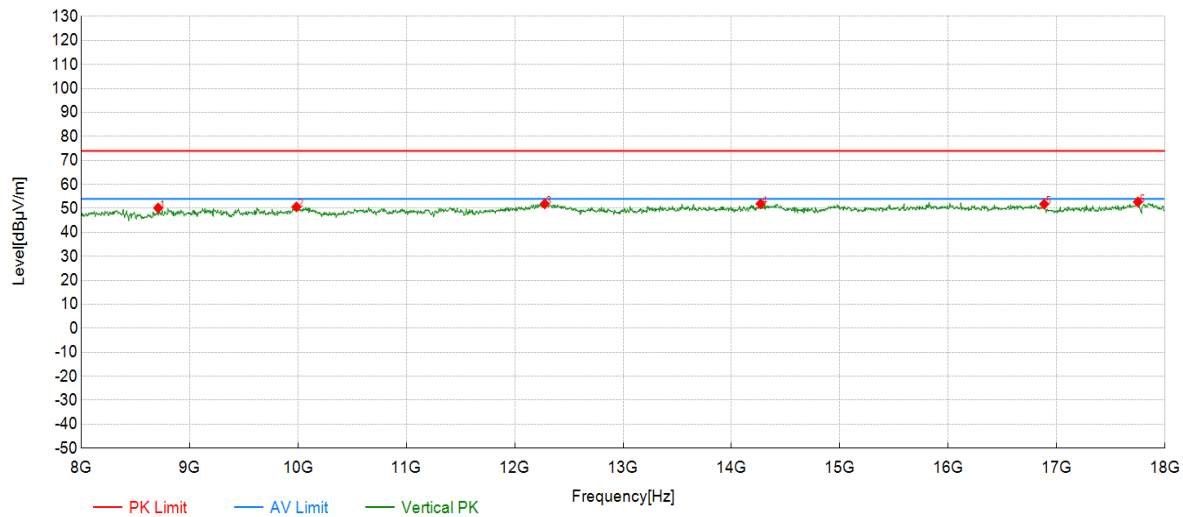

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8710.36	46.40	50.16	3.76	74.00	23.84	PK	Vertical	PASS
2	9985.99	45.23	50.63	5.40	74.00	23.37	PK	Vertical	PASS
3	12277.14	44.86	51.89	7.03	74.00	22.11	PK	Vertical	PASS
4	14268.13	43.64	51.90	8.26	74.00	22.10	PK	Vertical	PASS
5	16884.44	41.74	51.78	10.04	74.00	22.22	PK	Vertical	PASS
6	17749.87	39.97	52.70	12.73	74.00	21.30	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5755	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

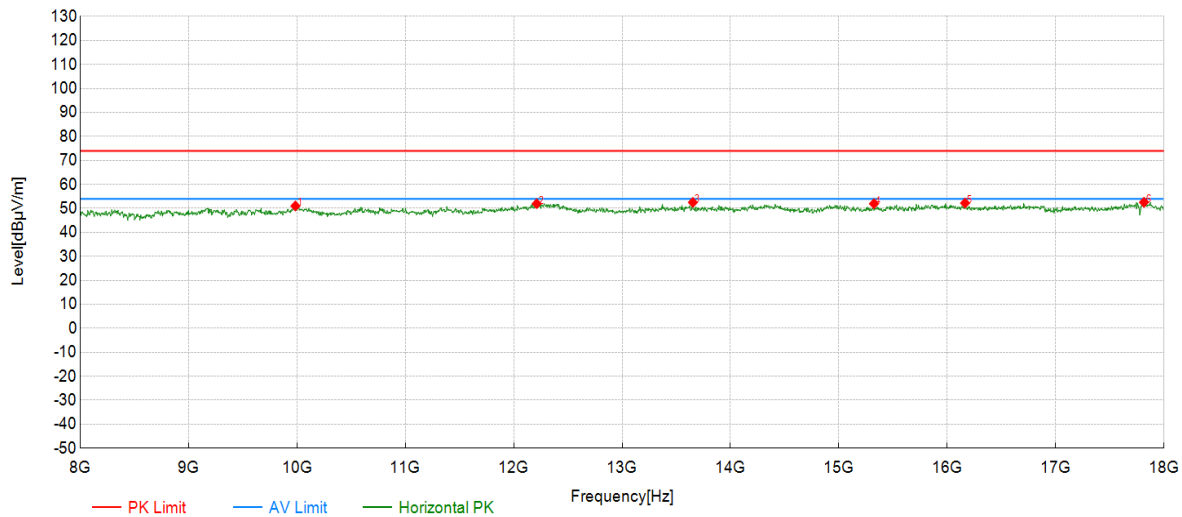

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9985.99	45.61	51.01	5.40	74.00	22.99	PK	Horizontal	PASS
2	12212.11	45.20	51.98	6.78	74.00	22.02	PK	Horizontal	PASS
3	13652.83	44.67	52.50	7.83	74.00	21.50	PK	Horizontal	PASS
4	15323.66	43.78	51.95	8.17	74.00	22.05	PK	Horizontal	PASS
5	16164.08	43.50	52.21	8.71	74.00	21.79	PK	Horizontal	PASS
6	17814.91	39.57	52.56	12.99	74.00	21.44	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5755	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

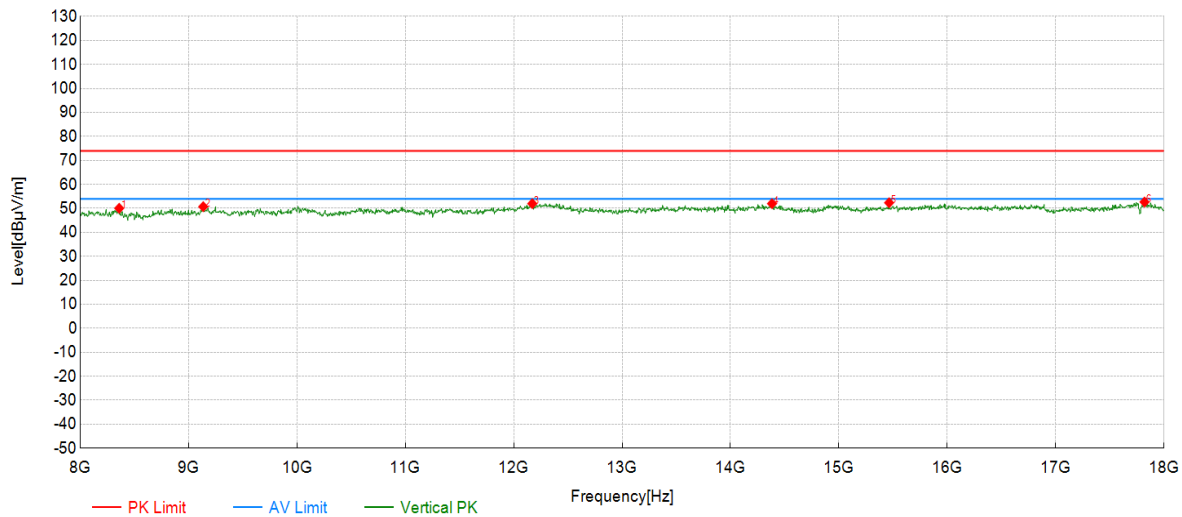

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8360.18	45.88	50.05	4.17	74.00	23.95	PK	Vertical	PASS
2	9135.57	46.39	50.71	4.32	74.00	23.29	PK	Vertical	PASS
3	12172.09	45.31	51.99	6.68	74.00	22.01	PK	Vertical	PASS
4	14383.19	43.61	51.98	8.37	74.00	22.02	PK	Vertical	PASS
5	15463.73	43.83	52.36	8.53	74.00	21.64	PK	Vertical	PASS
6	17819.91	39.71	52.67	12.96	74.00	21.33	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5795	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

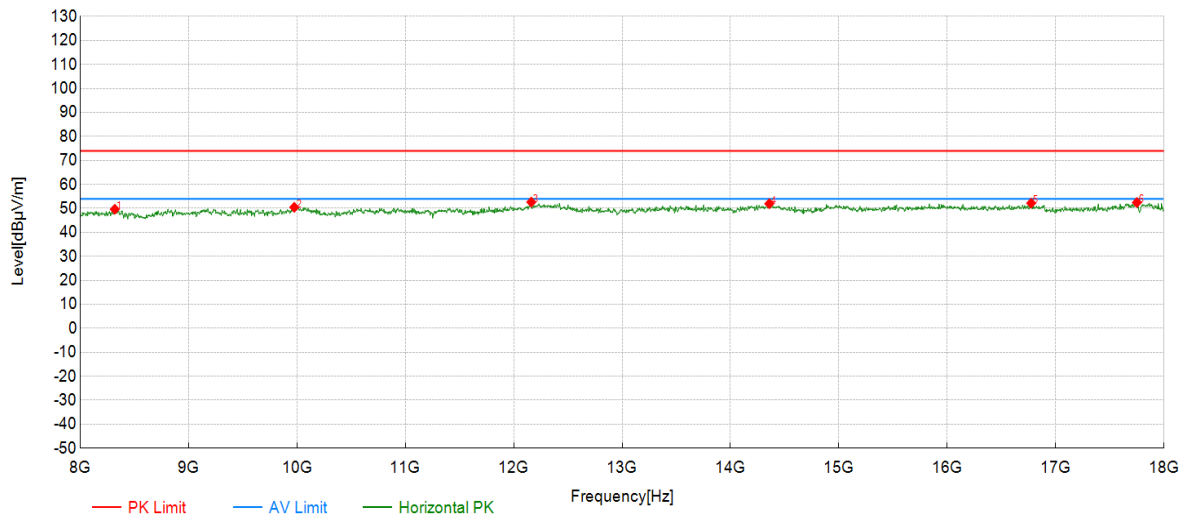

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8320.16	45.69	49.64	3.95	74.00	24.36	PK	Horizontal	PASS
2	9975.99	45.14	50.46	5.32	74.00	23.54	PK	Horizontal	PASS
3	12162.08	45.97	52.63	6.66	74.00	21.37	PK	Horizontal	PASS
4	14358.18	43.62	51.97	8.35	74.00	22.03	PK	Horizontal	PASS
5	16774.39	42.48	52.19	9.71	74.00	21.81	PK	Horizontal	PASS
6	17749.87	39.72	52.45	12.73	74.00	21.55	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n HT40-5795	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

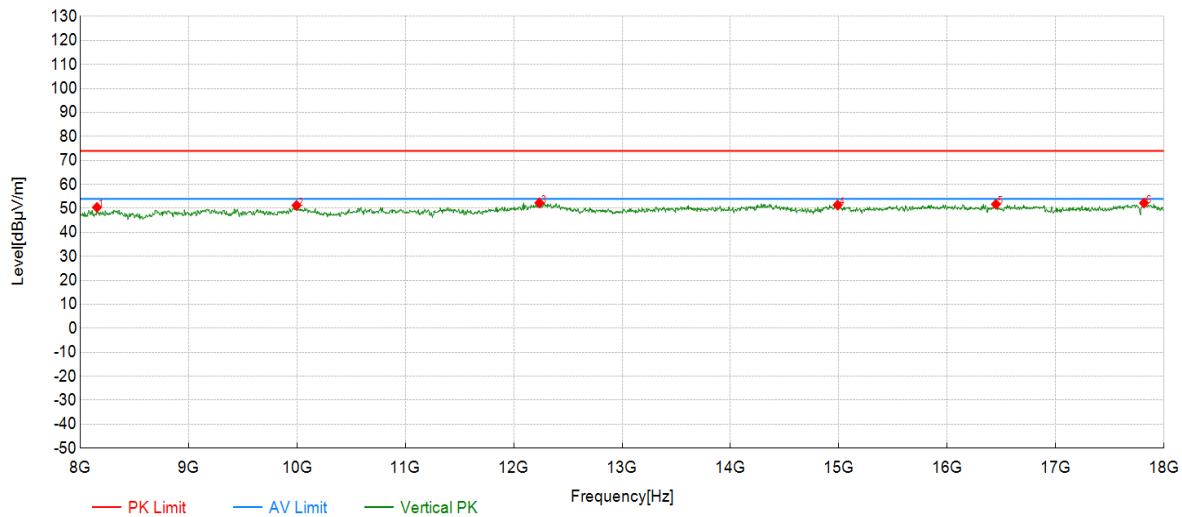

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8155.08	47.02	50.43	3.41	74.00	23.57	PK	Vertical	PASS
2	9996.00	45.75	51.24	5.49	74.00	22.76	PK	Vertical	PASS
3	12237.12	45.40	52.28	6.88	74.00	21.72	PK	Vertical	PASS
4	14988.49	43.05	51.38	8.33	74.00	22.62	PK	Vertical	PASS
5	16449.22	42.80	51.73	8.93	74.00	22.27	PK	Vertical	PASS
6	17814.91	39.23	52.22	12.99	74.00	21.78	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n VHT80-5210	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

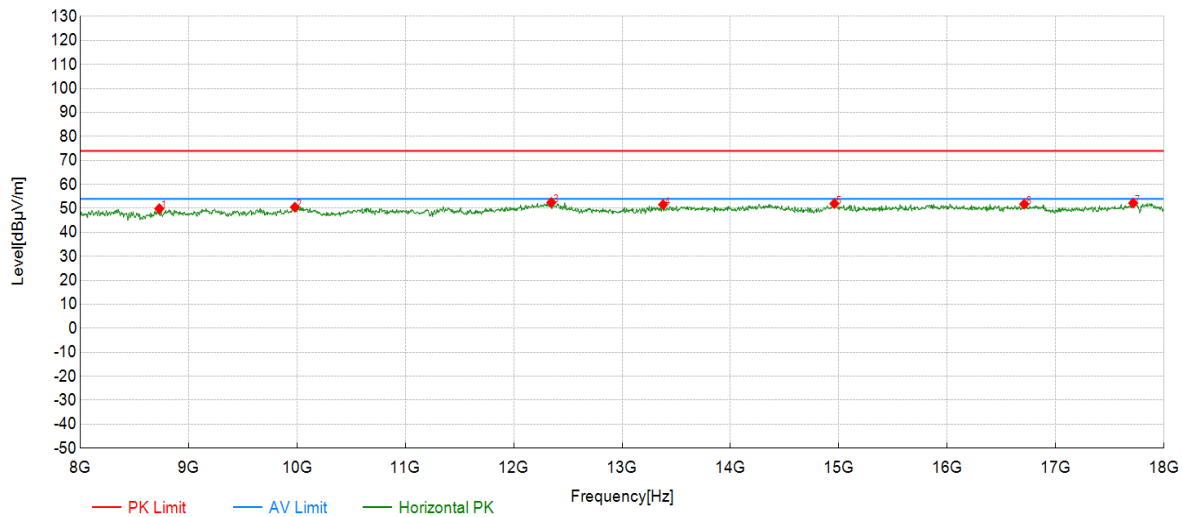

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8730.37	45.99	49.89	3.90	74.00	24.11	PK	Horizontal	PASS
2	9980.99	45.14	50.50	5.36	74.00	23.50	PK	Horizontal	PASS
3	12347.17	45.18	52.47	7.29	74.00	21.53	PK	Horizontal	PASS
4	13377.69	44.02	51.58	7.56	74.00	22.42	PK	Horizontal	PASS
5	14958.48	43.83	52.00	8.17	74.00	22.00	PK	Horizontal	PASS
6	16709.35	42.01	51.75	9.74	74.00	22.25	PK	Horizontal	PASS
7	17714.86	39.72	52.22	12.50	74.00	21.78	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n VHT80-5210	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

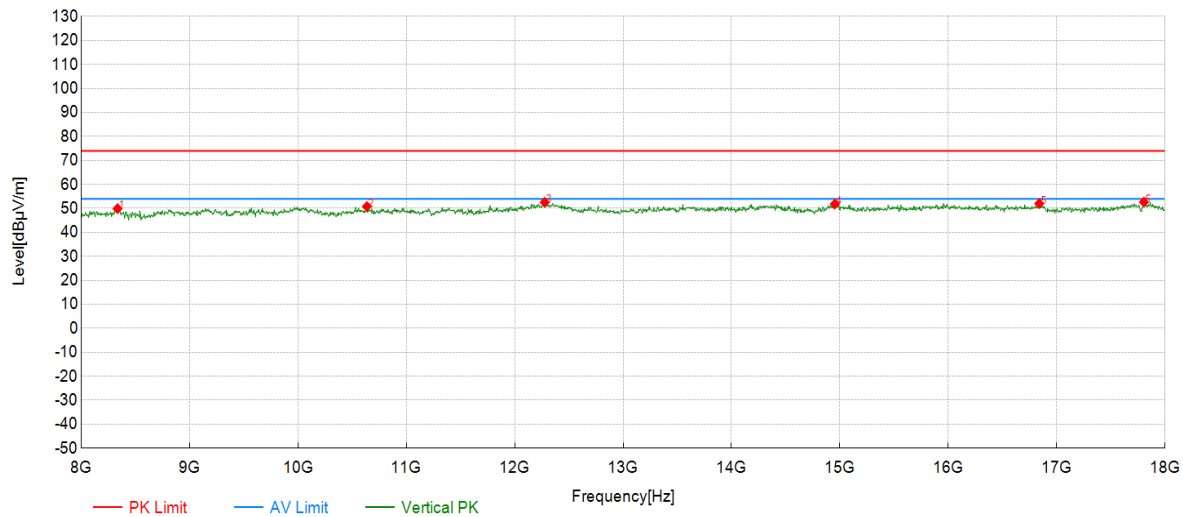

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8335.17	45.86	49.89	4.03	74.00	24.11	PK	Vertical	PASS
2	10636.32	46.07	50.80	4.73	74.00	23.20	PK	Vertical	PASS
3	12277.14	45.51	52.54	7.03	74.00	21.46	PK	Vertical	PASS
4	14953.48	43.69	51.83	8.14	74.00	22.17	PK	Vertical	PASS
5	16839.42	42.14	52.00	9.86	74.00	22.00	PK	Vertical	PASS
6	17804.90	39.59	52.64	13.05	74.00	21.36	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n VHT80-5290	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

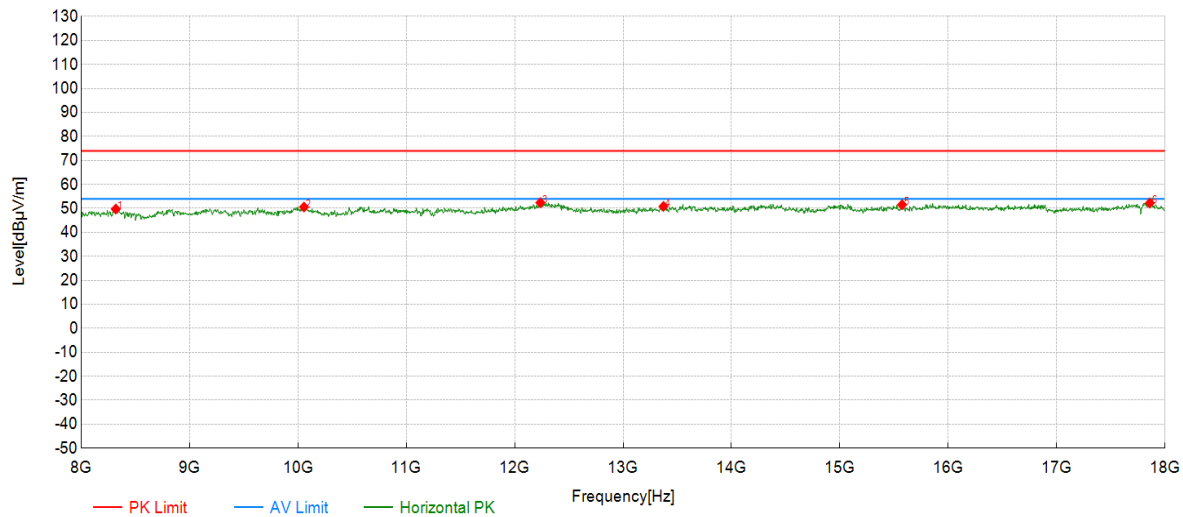

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8320.16	45.78	49.73	3.95	74.00	24.27	PK	Horizontal	PASS
2	10056.03	45.46	50.56	5.10	74.00	23.44	PK	Horizontal	PASS
3	12237.12	45.49	52.37	6.88	74.00	21.63	PK	Horizontal	PASS
4	13372.69	43.29	50.84	7.55	74.00	23.16	PK	Horizontal	PASS
5	15573.79	42.72	51.53	8.81	74.00	22.47	PK	Horizontal	PASS
6	17859.93	39.52	52.25	12.73	74.00	21.75	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n VHT80-5290	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

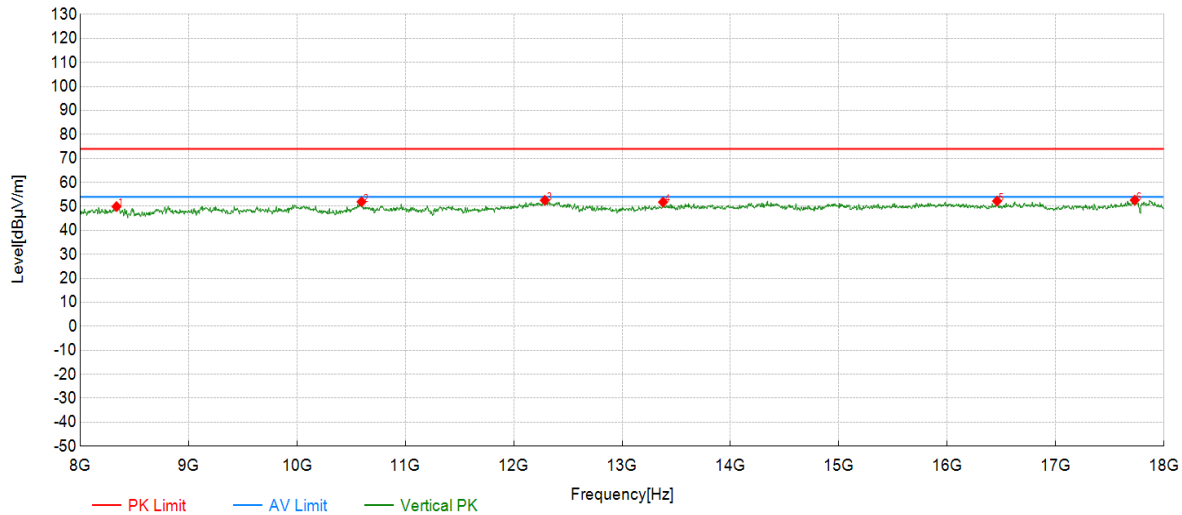

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	8335.17	45.90	49.93	4.03	74.00	24.07	PK	Vertical	PASS
2	10596.30	47.16	51.92	4.76	74.00	22.08	PK	Vertical	PASS
3	12287.14	45.47	52.54	7.07	74.00	21.46	PK	Vertical	PASS
4	13377.69	44.22	51.78	7.56	74.00	22.22	PK	Vertical	PASS
5	16459.23	43.23	52.22	8.99	74.00	21.78	PK	Vertical	PASS
6	17729.86	39.99	52.60	12.61	74.00	21.40	PK	Vertical	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n VHT80-5530	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

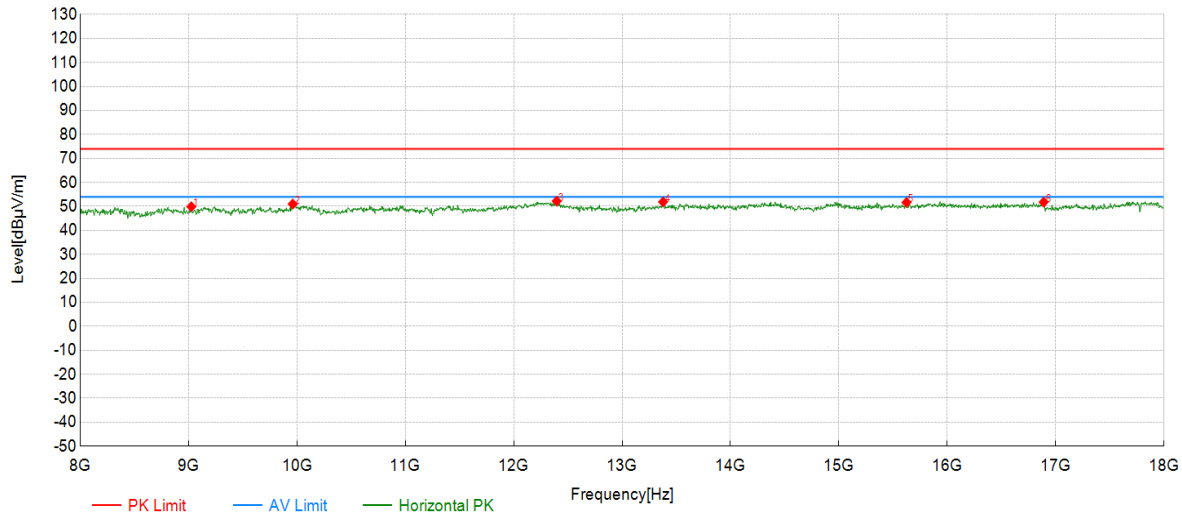

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9025.51	46.13	49.87	3.74	74.00	24.13	PK	Horizontal	PASS
2	9960.98	45.80	50.99	5.19	74.00	23.01	PK	Horizontal	PASS
3	12397.20	44.73	52.20	7.47	74.00	21.80	PK	Horizontal	PASS
4	13377.69	44.29	51.85	7.56	74.00	22.15	PK	Horizontal	PASS
5	15623.81	42.80	51.66	8.86	74.00	22.34	PK	Horizontal	PASS
6	16889.44	41.72	51.78	10.06	74.00	22.22	PK	Horizontal	PASS


Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

Test Report

Project Information

Mode:	802.11n VHT80-5530	Voltage:	DC5V
Environment:	Temp: 25°C; Humi:60%	Engineer:	Rex Huang
Remark:	X		
Test Standard:	FCC PART 15E		

Test Graph

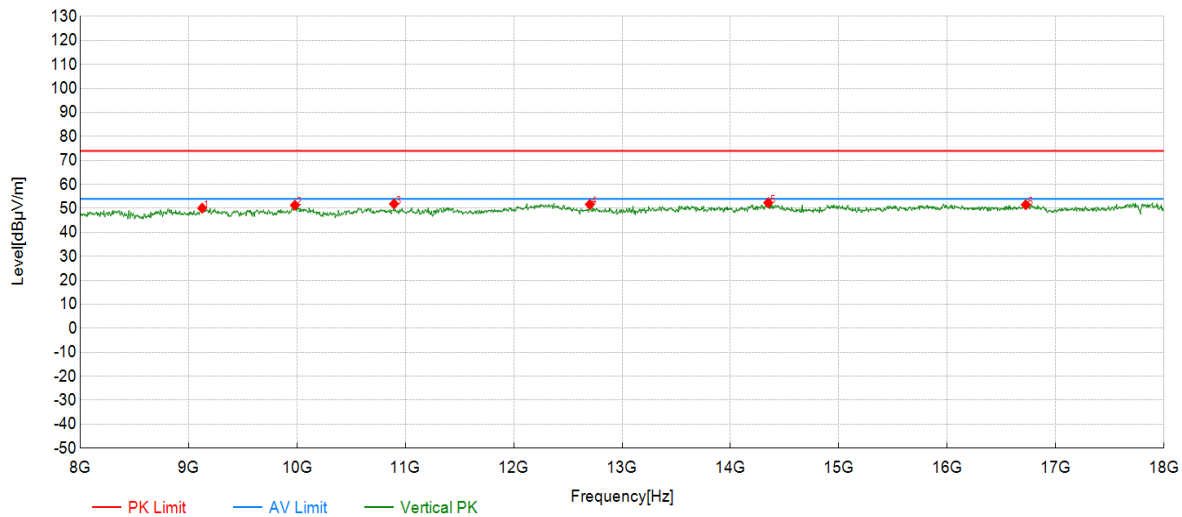

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	9125.56	45.84	50.10	4.26	74.00	23.90	PK	Vertical	PASS
2	9980.99	45.98	51.34	5.36	74.00	22.66	PK	Vertical	PASS
3	10896.45	47.36	51.88	4.52	74.00	22.12	PK	Vertical	PASS
4	12702.35	45.01	51.66	6.65	74.00	22.34	PK	Vertical	PASS
5	14348.17	44.02	52.36	8.34	74.00	21.64	PK	Vertical	PASS
6	16724.36	41.78	51.51	9.73	74.00	22.49	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level