

FCC PART 15E TEST REPORT FOR CERTIFICATION
On Behalf of

Hui Zhou Gaoshengda Technology Co., Ltd

WIFI+BT Module

Model Number: WKCT27M2501

FCC ID: 2AC23-WKCT27

Applicant :	Hui Zhou Gaoshengda Technology Co.,LTD
Address:	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: 86-769-83081888-808	



Report Number:	ESTE-R2201202
Date of Test:	Dec. 17, 2021~Jan. 18, 2022
Date of Report:	Jan. 24, 2022

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. The antenna information for EUT.....	7
1.3. Information of RF Cable.....	7
2. SUMMARY OF TEST.....	8
2.1. Summary of test result.....	8
2.2. Test Facilities.....	9
2.3. Measurement uncertainty for EST Technology Co., Ltd.....	10
2.4. Assistant equipment used for test.....	10
2.5. Block Diagram.....	10
2.6. Test Mode.....	11
2.7. Channel List.....	13
2.8. Power Setting of Test Software.....	14
2.9. Duty Cycle of Test Signal.....	15
2.10. Test Equipment List.....	19
3. 6DB BANDWIDTH & 26DB BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	21
3.1. Limit.....	21
3.2. Test Setup.....	21
3.3. Spectrum Analyzer Setting.....	21
3.4. Test Procedure.....	22
3.5. Test Result.....	23
3.6. Test Result.....	26
4. MAXIMUM CONDUCTED OUTPUT POWER.....	47
4.1. Limit.....	47
4.2. Test Setup.....	47
4.3. Test Procedure.....	47
4.4. Test Result.....	48
5. PEAK POWER SPECTRAL DENSITY.....	50
5.1. Limit.....	50
5.2. Test Setup.....	50
5.3. Spectrum Analyzer Setting.....	50
5.4. Test Procedure.....	50
5.5. Test Result.....	51
6. UNWANTED EMISSIONS AND BAND EDGE.....	77
6.1. Limit.....	77
6.2. Test Setup.....	78
6.3. Spectrum Analyzer Setting.....	79
6.4. Test Procedure.....	80
6.5. Test Result.....	81
7. FREQUENCY STABILITY.....	131
7.1. Limit.....	131
7.2. Test Setup.....	131
7.3. Spectrum Analyzer Setting.....	131

7.4.	Test Procedure	132
7.5.	Test Result	133
8.	AC POWER LINE CONDUCTED EMISSIONS	137
8.1.	Limit	137
8.2.	Test Setup	137
8.3.	Spectrum Analyzer Setting	137
8.4.	Test Procedure	137
8.5.	Test Result	138
9.	ANTENNA REQUIREMENTS	142
9.1.	Limit	142
9.2.	Test Result	142
10.	TEST SETUP PHOTO	143
11.	EUT PHOTO	145

EST Technology Co., Ltd.

Applicant:	Hui Zhou Gaoshengda Technology Co.,LTD		
Address:	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China		
Manufacturer:	Hui Zhou Gaoshengda Technology Co.,LTD		
Address:	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China		
Factory:	Hui Zhou Gaoshengda Technology Co.,LTD		
Address:	NO.75 Zhongkai Development Area, Huizhou, Guangdong, China		
E.U.T:	WIFI+BT Module		
Model Number:	WKCT27M2501		
Power Supply:	DC 3.3V From PC		
Trade Name:	GSD	Serial No.:	-----
Date of Receipt:	Dec. 17, 2021	Date of Test:	Dec. 17, 2021~Jan. 18, 2022
Test Specification:	FCC Part 15 Subpart E 15.407 ANSI C63.10:2013 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart E requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: Jan. 24, 2022		
Prepared by:	Reviewed by:	Approved by:	
 Ring Yang / Assistant	 Seven Wang / Engineer	 Iceman Hu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

FCC ID	:	2AC23-WKCT27
Product Name	:	WIFI+BT Module
Model Number	:	WKCT27M2501
Software Version	:	V01
Hardware Version	:	V01
Operation frequency	:	U-NII-1: 5150 MHz~5250 MHz U-NII-2A: 5250 MHz~5350 MHz U-NII-2C: 5470 MHz~5725 MHz U-NII-3: 5725 MHz~5850 MHz
Number of channel	:	U-NII-1: IEEE 802.11a / n HT20 / ac VHT20: 4 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel. U-NII-2A: IEEE 802.11a / n HT20 / ac VHT20: 4 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel. U-NII-2C: IEEE 802.11a / n HT20 / ac VHT20: 11 Channels; IEEE 802.11n HT40 / ac VHT40: 5 Channels; IEEE 802.11ac VHT80: 2 Channel. U-NII-3: IEEE 802.11a / n HT20 / ac VHT20: 5 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel.
Modulation	:	OFDM(QPSK, BPSK, 16-QAM, 64-QAM,256-QAM)
Transmit Data Rate	:	IEEE 802.11a: 54, 48, 36, 24, 18, 12, 9, 6Mbps; IEEE 802.11n: up 300Mbps; IEEE 802.11ac: up to 866.6Mbps;
Channels Spacing	:	IEEE 802.11a: 20MHz; IEEE 802.11n HT20: 20MHz; IEEE 802.11n HT40: 40MHz; IEEE 802.11ac VHT20: 20MHz; IEEE 802.11ac VHT40: 40MHz; IEEE 802.11ac VHT80: 80MHz;

Transmit Power	:	U-NII-1	IEEE 802.11a: 12.975dBm IEEE 802.11n HT20: 11.086dBm IEEE 802.11n HT40: 12.092dBm IEEE 802.11ac VHT20: 11.636dBm IEEE 802.11ac VHT40: 12.163dBm IEEE 802.11ac VHT80: 12.912dBm
		U-NII-2A	IEEE 802.11a: 13.398dBm IEEE 802.11n HT20: 12.747dBm IEEE 802.11n HT40: 12.364dBm IEEE 802.11ac VHT20: 12.234dBm IEEE 802.11ac VHT40: 12.379dBm IEEE 802.11ac VHT80: 13.237dBm
		U-NII-2C	IEEE 802.11a: 14.710dBm IEEE 802.11n HT20: 13.517dBm IEEE 802.11n HT40: 13.605dBm IEEE 802.11ac VHT20: 13.487dBm IEEE 802.11ac VHT40: 13.602dBm IEEE 802.11ac VHT80: 14.201dBm
		U-NII-3	IEEE 802.11a: 13.221dBm IEEE 802.11n HT20: 12.530dBm IEEE 802.11n HT40: 14.043dBm IEEE 802.11ac VHT20: 12.489dBm IEEE 802.11ac VHT40: 14.109dBm IEEE 802.11ac VHT80: 14.898dBm
Sample Type	:	Prototype production	

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. The antenna information for EUT

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	PCB	-	4.8
2	-	-	PCB	-	4.8

Remark:

- (1) The EUT can work as CDD mode in IEEE 802.11n and IEEE 802.11ac, and can operate with one spatial stream.
- (2) According to ANSI C63.10:2013 14.4.3.2.5 a):
 $\text{Directional gain} = 4.8\text{dBi} + 10 \times \log(2/1)\text{dB} = 7.81\text{dBi} > 6\text{dBi}$
 So, the output power limit and power spectral density should be reduced.
 For output Power:
 U-NII-1 Limit is $23.98\text{dBm} - (7.81\text{dBi} - 6\text{dBi}) = 22.17\text{dBm}$
 U-NII-2A&U-NII-2C Limit is $23.98\text{dBm} - (7.81\text{dBi} - 6\text{dBi}) = 22.17\text{dBm}$
 U-NII-3 Limit is $30\text{dBm} - (7.81\text{dBi} - 6\text{dBi}) = 28.19\text{dBm}$
 For power spectral density:
 U-NII-1 Limit is $11\text{dBm/MHz} - (7.81\text{dBi} - 6\text{dBi}) = 9.19\text{dBm/MHz}$
 U-NII-2A&U-NII-2C Limit is $11\text{dBm/MHz} - (7.81\text{dBi} - 6\text{dBi}) = 9.19\text{dBm/MHz}$
 U-NII-3 Limit is $30\text{dBm}/500\text{KHz} - (7.81\text{dBi} - 6\text{dBi}) = 28.19\text{dBm}/500\text{KHz}$
- (3) After pre-test all antenna configurations, the worst case configuration as list below.
- (4) This information is provided by the applicant.

TX Mode \ ANT No.	SISO Configuration	MIMO Configuration
IEEE 802.11a	ANT 1 and Ant 2	/
IEEE 802.11n HT20	/	ANT1+ANT2
IEEE 802.11n HT40	/	ANT1+ANT2
IEEE 802.11ac VHT20	/	ANT1+ANT2
IEEE 802.11ac VHT40	/	ANT1+ANT2
IEEE 802.11ac VHT80	/	ANT1+ANT2

1.3. Information of RF Cable

Cable Loss(dB)	Provided by
1.0	Hui Zhou Gaoshengda Technology Co.,LTD
Note: 1.The customer declared the loss value of the RF Cable, and the test results of this report only apply to the sample as received. 2. This information is provided by the applicant.	

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth & 26dB Bandwidth & 99% Occupied Bandwidth	15.407(a) 15.407(e)	PASS
4	Maximum Conducted Output Power	15.407(a)	PASS
5	Peak Power Spectral Density	15.407(a)	PASS
6	Unwanted Emissions and Band Edge	15.205 15.209 15.407(b)	PASS
7	Frequency Stability	15.407(g)	PASS
8	AC Power Line Conducted Emissions	15.207 15.407(b)(9)	PASS
9	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty for EST Technology Co., Ltd.

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for spurious emissions test (18GHz to 40GHz)	4.67
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB
Temperature	$\pm 0.6^{\circ}\text{C}$
Humidity	$\pm 4.0\%$
Volatage DC	$\pm 1.0\%$
Volatage (AC, <10KHz)	$\pm 1.5\%$

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Notebook	-	Thinkpad X280	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground.



DC 3.3V From PC

(EUT: WIFI+BT Module)

2.6. Test Mode

Pre-scan has been combined all possible modulations and data rates to determine the worst case test mode, the worst case test mode was selected for the final test as listed below.

Test Item	Test Mode	Channel	Modulation	Data rate
6dB Bandwidth	IEEE 802.11a	149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	155	OFDM	MCS0
26dB Bandwidth	IEEE 802.11a	36/40/48/52/60/64/100/116/140	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/114/134	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/114/134	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122	OFDM	MCS0
99% Occupied Bandwidth	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0
Maximum Conducted Output Power	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0

Peak Power Spectral Density	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0
Unwanted Emissions and Band Edge(Above 1GHz)	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/54/62/102/114/134/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/58/106/122/155	OFDM	MCS0
Unwanted Emissions Below 1GHz	IEEE 802.11a	100	OFDM	6Mbps
Frequency Stability	Unmodulation	36/64/100/149	N/A	N/A
AC Power Line Conducted Emissions	IEEE 802.11a	100	OFDM	6Mbps

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Channel List

Band	Mode	Channel	Frequency (MHz)
U-NII-1	IEEE 802.11a & n HT20 & ac VHT20	36	5180
		40	5200
		44	5220
		48	5240
	IEEE 802.11n HT40 & ac VHT40	38	5190
		46	5230
	IEEE 802.11ac VHT80	42	5210
U-NII-2A	IEEE 802.11a & n HT20 & ac VHT20	52	5260
		56	5280
		60	5300
		64	5320
	IEEE 802.11n HT40 & ac VHT40	54	5270
		62	5310
	IEEE 802.11ac VHT80	58	5290
U-NII-2C	IEEE 802.11a & n HT20 & ac VHT20	100	5500
		104	5520
		108	5540
		112	5560
		116	5580
		120	5600
		124	5620
		128	5640
		132	5660
		136	5680
	IEEE 802.11n HT40 & ac VHT40	140	5700
		102	5510
		110	5550
		118	5590
		126	5630
	IEEE 802.11ac VHT80	134	5670
		106	5530
		122	5610
U-NII-3	IEEE 802.11a & n HT20 & ac VHT20	149	5745
		153	5765
		157	5785
		161	5805
		165	5825
	IEEE 802.11n HT40 & ac VHT40	151	5755
		159	5795
	IEEE 802.11ac VHT80	155	5775

2.8. Power Setting of Test Software

Software Name	QATool_Dbg.exe		
U-NII-1			
Frequency(MHz)	5180	5200	5240
IEEE 802.11a Setting	18	18	18
IEEE 802.11n HT20 Setting	17	17	17
IEEE 802.11ac VHT20 Setting	17	17	17
Frequency(MHz)	5190	5230	
IEEE 802.11n HT40 Setting	19	19	
IEEE 802.11ac VHT40 Setting	19	19	
Frequency(MHz)	5210		
IEEE 802.11ac VHT80 Setting	19		
U-NII-2A			
Frequency(MHz)	5260	5300	5320
IEEE 802.11a Setting	19	19	19
IEEE 802.11n HT20 Setting	19	19	19
IEEE 802.11ac VHT20 Setting	19	19	19
Frequency(MHz)	5270	5310	
IEEE 802.11n HT40 Setting	19	19	
IEEE 802.11ac VHT40 Setting	19	19	
Frequency(MHz)	5290		
IEEE 802.11ac VHT80 Setting	19		
U-NII-2C			
Frequency(MHz)	5500	5580	5700
IEEE 802.11a Setting	19	19	19
IEEE 802.11n HT20 Setting	19	19	19
IEEE 802.11ac VHT20 Setting	19	19	19
Frequency(MHz)	5510	5590	5670
IEEE 802.11n HT40 Setting	19	19	19
IEEE 802.11ac VHT40 Setting	19	19	19
Frequency(MHz)	5530	5610	
IEEE 802.11ac VHT80 Setting	19	19	
U-NII-3			
Frequency(MHz)	5745	5785	5825
IEEE 802.11a Setting	19	19	19
IEEE 802.11n HT20 Setting	19	19	19
IEEE 802.11ac VHT20 Setting	19	19	19
Frequency(MHz)	5755	5795	
IEEE 802.11n HT40 Setting	19	19	
IEEE 802.11ac VHT40 Setting	19	19	
Frequency(MHz)	5775		
IEEE 802.11ac VHT80 Setting	19		

Note: This information is provided by the applicant.


2.9. Duty Cycle of Test Signal

Temperature	25.4℃	Relative Humidity		56%	Test Voltage		DC 3.3V
Mode	Frequency (MHz)	On time (ms)	Total Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T (Hz)	VBW Setting (dB)
IEEE 802.11a	5180	1.40400	1.44000	97.50	0.11	712	712
IEEE 802.11n HT20	5180	1.31400	1.35000	97.33	0.12	761	761
IEEE 802.11ac VHT20	5180	1.32600	1.35600	97.79	0.10	754	754
IEEE 802.11n HT40	5190	0.66600	0.69600	95.69	0.19	1502	1502
IEEE 802.11ac VHT40	5190	0.66000	0.69600	94.83	0.23	1515	1515
IEEE 802.11ac VHT80	5210	0.33600	0.36600	91.80	0.37	2976	2976


Note:

1. Duty Cycle=On Time/Total Time×100%.
2. Duty Factor=10×Log(1/Duty Cycle).
3. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
4. If duty cycle ≥98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor.
5. The on-time time is transmission duration(T).
6. The VBW Setting is use for RMS measurement in unwanted emissions and band edge(Above 1GHz) test.


IEEE 802.11a 5180MHz

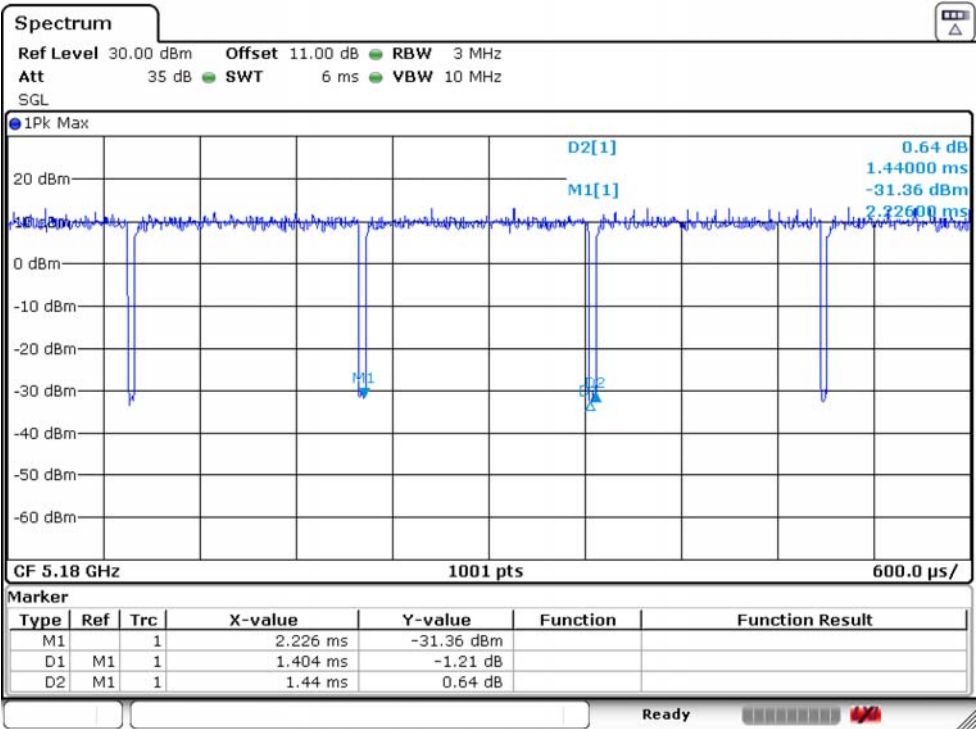


IEEE 802.11n HT20 5180MHz

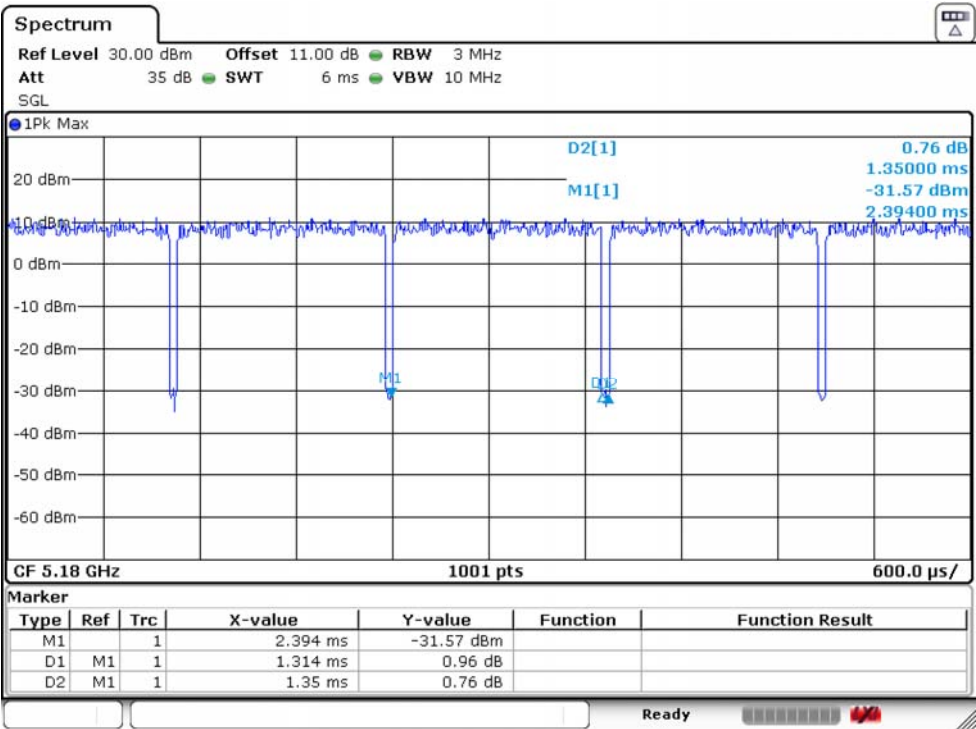


IEEE 802.11n HT40 5190MHz

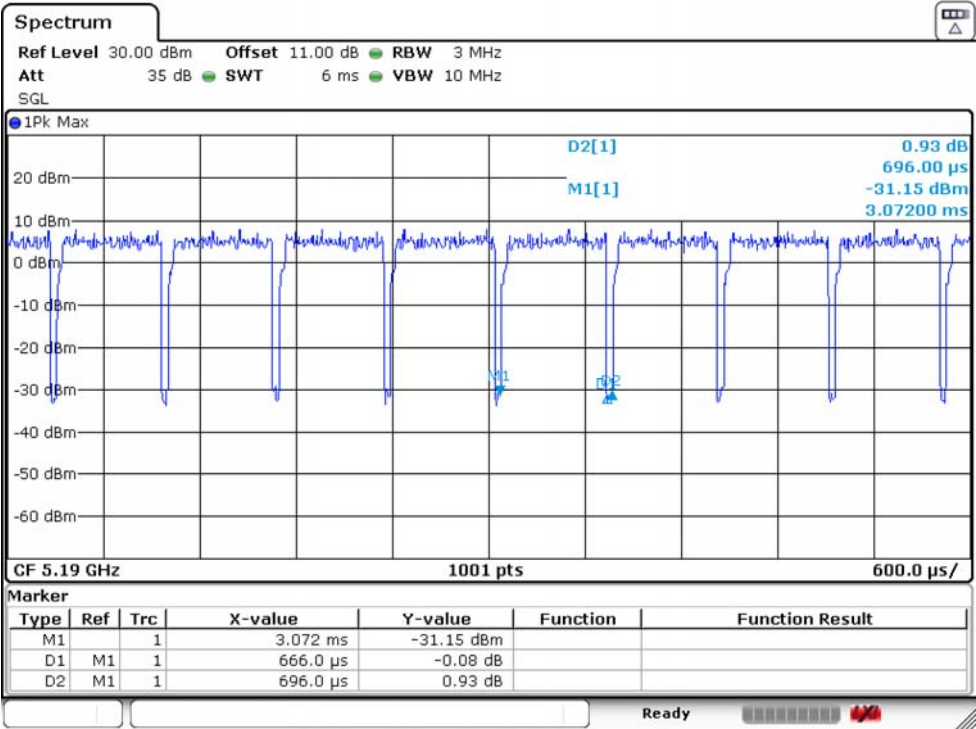


IEEE 802.11ac VHT20 5180MHz

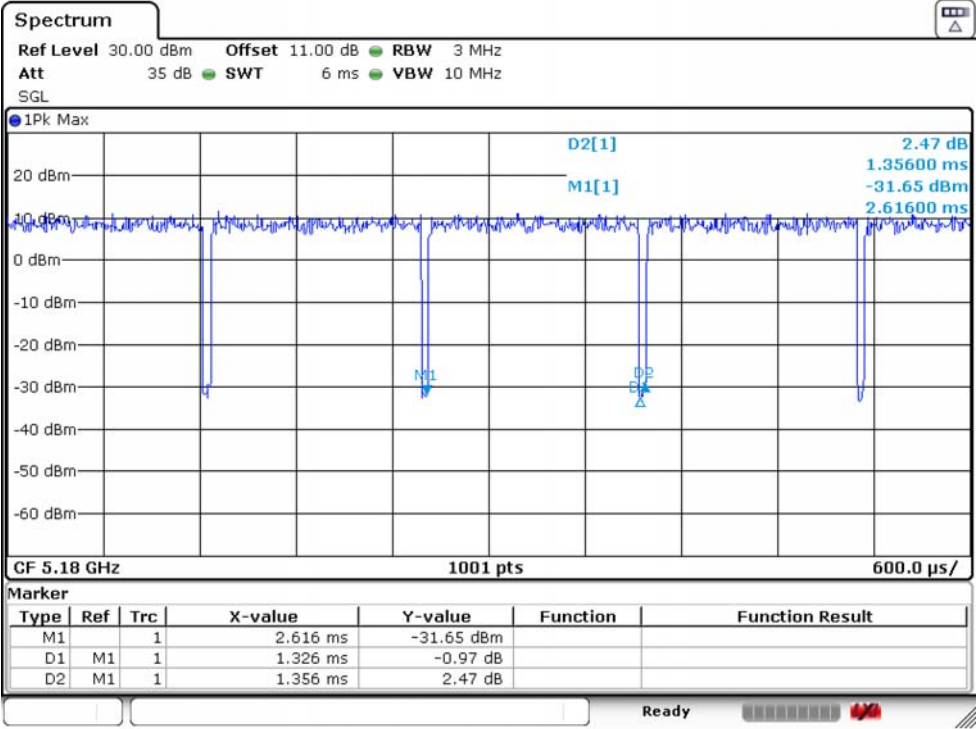

IEEE 802.11ac VHT40 5190MHz

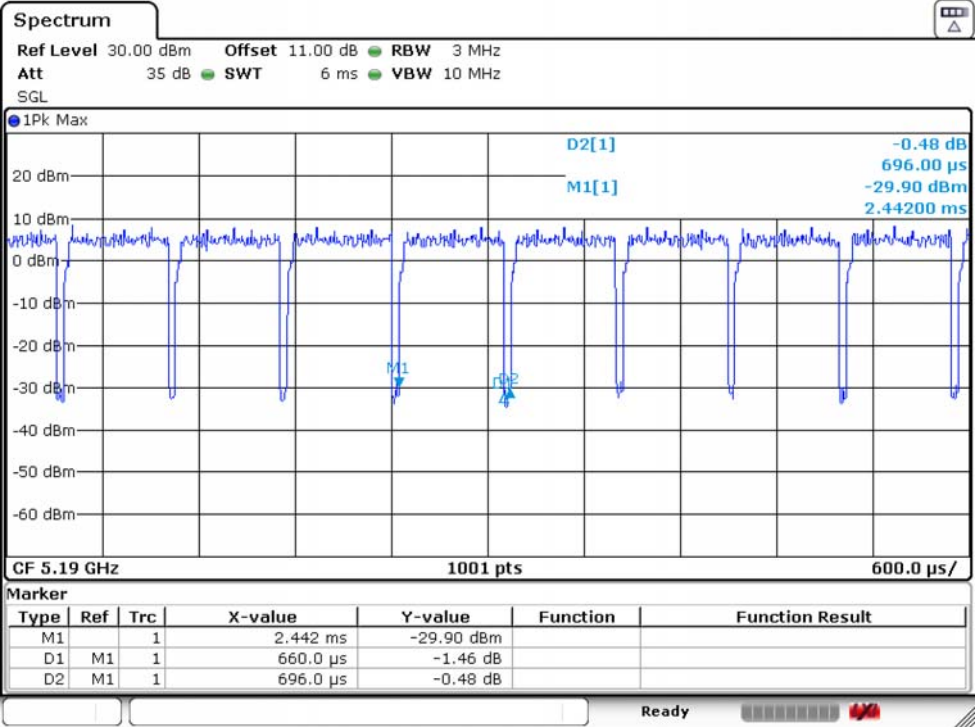

IEEE 802.11ac VHT80 5210MHz

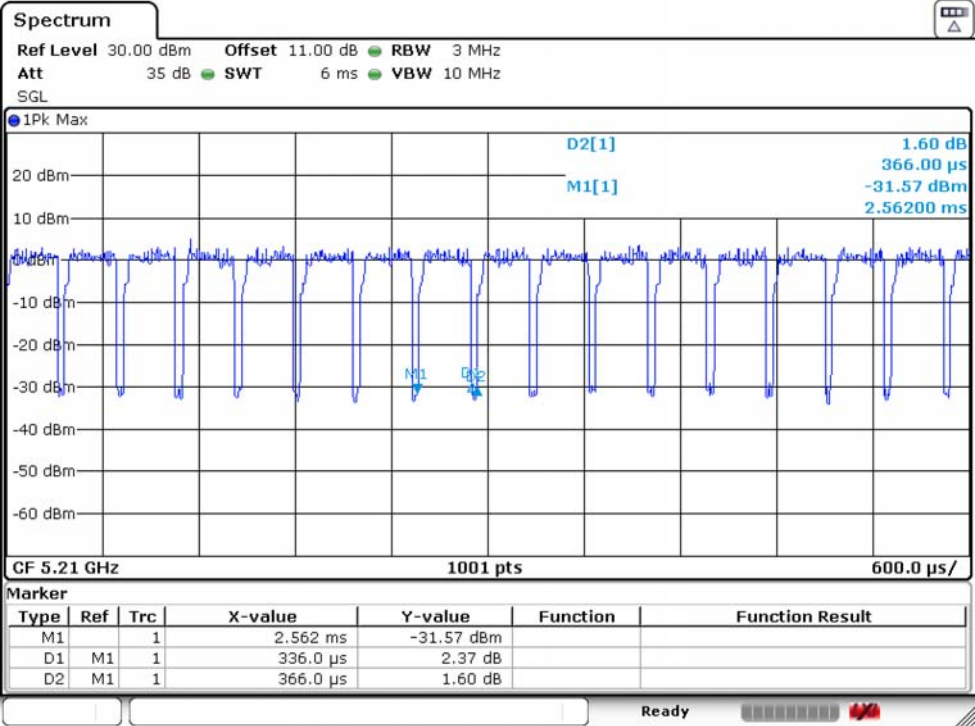

2.10. Test Equipment List

For AC power conducted emissions test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,21	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,21	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emissions test(9KHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test(30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emissions test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	EST-E031	LISAI	June 13,21	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 13,21	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	July 19,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
TS 8997	Rohde & Schwarz	/	/	/	/	/
Open Switch and Control Unit	Rohde & Schwarz	OSP-B157WB	EST-E036	LISAI	June 13,21	1 Year
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV	EST-E037	LISAI	June 13,21	1 Year
Signal Generator	Rohde & Schwarz	SMB100A	EST-E038	LISAI	June 13,21	1 Year
Vector Signal Generator	Rohde & Schwarz	SMBV100A	EST-E039	LISAI	June 13,21	1 Year
Test Software	Rohde & Schwarz	WMS32	V10.50.00	N/A	N/A	N/A
Temperature controller	Terchy	MHQ	EST-E101	LISAI	June 13,21	1 Year

3. 6dB BANDWIDTH & 26dB BANDWIDTH & 99% OCCUPIED BANDWIDTH

3.1. Limit

Band	Frequency (MHz)	Test Item	Limit
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth $\geq$ 500KHz

3.2. Test Setup



3.3. Spectrum Analyzer Setting

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	>RBW
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

3.4. Test Procedure

For 26dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 6dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 99% Occupied Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the 99% power bandwidth function to measure bandwidth.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

3.5. Test Result

Temperature	25.4℃	Relative Humidity		56%	Test Voltage	DC 3.3V
26dB Bandwidth&99% Occupied Bandwidth						
AND	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Calculate Power Limit (W)	Calculate Power Limit (dBm)
U-NII-1	IEEE 802.11a	5180	20.203	16.583	0.2500	23.98
		5200	20.492	16.703	0.2500	23.98
		5240	20.145	16.504	0.2500	23.98
	IEEE 802.11n HT20	5180	20.260	17.543	0.2500	23.98
		5200	20.260	17.622	0.2500	23.98
		5240	20.087	17.543	0.2500	23.98
	IEEE 802.11ac VHT20	5180	20.434	17.543	0.2500	23.98
		5200	20.376	17.622	0.2500	23.98
		5240	20.029	17.582	0.2500	23.98
	IEEE 802.11n HT40	5190	40.410	36.524	0.2500	23.98
		5230	40.410	36.603	0.2500	23.98
	IEEE 802.11ac VHT40	5190	40.060	36.524	0.2500	23.98
		5230	40.170	36.603	0.2500	23.98
	IEEE 802.11ac VHT80	5210	80.810	75.285	0.2500	23.98
U-NII-2A	IEEE 802.11a	5260	20.318	16.504	0.2500	23.98
		5300	20.029	16.504	0.2500	23.98
		5320	19.971	16.504	0.2500	23.98
	IEEE 802.11n HT20	5260	20.376	17.622	0.2500	23.98
		5300	20.087	17.662	0.2500	23.98
		5320	20.434	17.582	0.2500	23.98
	IEEE 802.11ac VHT20	5260	20.203	17.543	0.2500	23.98
		5300	20.029	17.582	0.2500	23.98
		5320	19.971	17.582	0.2500	23.98
	IEEE 802.11n HT40	5270	40.640	36.524	0.2500	23.98
		5310	40.870	36.444	0.2500	23.98
	IEEE 802.11ac VHT40	5270	40.170	36.524	0.2500	23.98
		5310	40.290	36.444	0.2500	23.98
	IEEE 802.11ac VHT80	5290	80.850	75.285	0.2500	23.98


Temperature	24.7℃	Relative Humidity		53%	Test Voltage	120V/60 Hz
26dB Bandwidth&99% Occupied Bandwidth						
AND	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Calculate Power Limit (W)	Calculate Power Limit (dBm)
U-NII-2C	IEEE 802.11a	5500	20.145	16.504	0.2500	23.98
		5580	20.029	16.464	0.2500	23.98
		5700	20.145	16.464	0.2500	23.98
	IEEE 802.11n HT20	5500	20.029	17.582	0.2500	23.98
		5580	20.203	17.582	0.2500	23.98
		5700	20.376	17.582	0.2500	23.98
	IEEE 802.11ac VHT20	5500	20.260	17.582	0.2500	23.98
		5580	20.145	17.543	0.2500	23.98
		5700	20.145	17.622	0.2500	23.98
	IEEE 802.11n HT40	5510	40.640	36.444	0.2500	23.98
		5590	40.520	36.603	0.2500	23.98
		5670	40.640	36.444	0.2500	23.98
	IEEE 802.11ac VHT40	5510	40.060	36.364	0.2500	23.98
		5590	40.290	36.524	0.2500	23.98
		5670	40.290	36.237	0.2500	23.98
	IEEE 802.11ac VHT80	5530	80.580	75.285	0.2500	23.98
		5610	80.580	75.285	0.2500	23.98






Temperature	25.4℃	Relative Humidity		56%	Test Voltage	DC 3.3V
6dB Bandwidth&99% Occupied Bandwidth						
BAND	Test Mode	Fre (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	6dB BW Min Limit (MHz)	Result
U-NII-3	IEEE 802.11a	5745	15.105	16.4635	0.5	PASS
		5785	16.266	16.5035	0.5	PASS
		5825	15.105	16.5434	0.5	PASS
	IEEE 802.11n HT20	5745	16.264	17.5824	0.5	PASS
		5785	16.304	17.5824	0.5	PASS
		5825	16.264	17.5824	0.5	PASS
	IEEE 802.11ac VHT20	5745	16.224	17.5425	0.5	PASS
		5785	16.304	17.5425	0.5	PASS
		5825	16.344	17.5425	0.5	PASS
	IEEE 802.11n HT40	5755	35.165	36.4436	0.5	PASS
		5795	35.165	36.4436	0.5	PASS
	IEEE 802.11ac VHT40	5755	35.085	36.5235	0.5	PASS
		5795	35.165	36.4436	0.5	PASS
	IEEE 802.11ac VHT80	5775	75.280	75.2847	0.5	PASS

Note :

For Band U-NII-2A and U-NII-2C,the maximum conducted output power limit is 250mw or $11+10 \times \log B$, which is lesser,where B is the 26dB Bandwidth in MHz.So in this section,the maximum conducted output power limit can calculate with 26dB Bandwidth.


3.6. Test Result

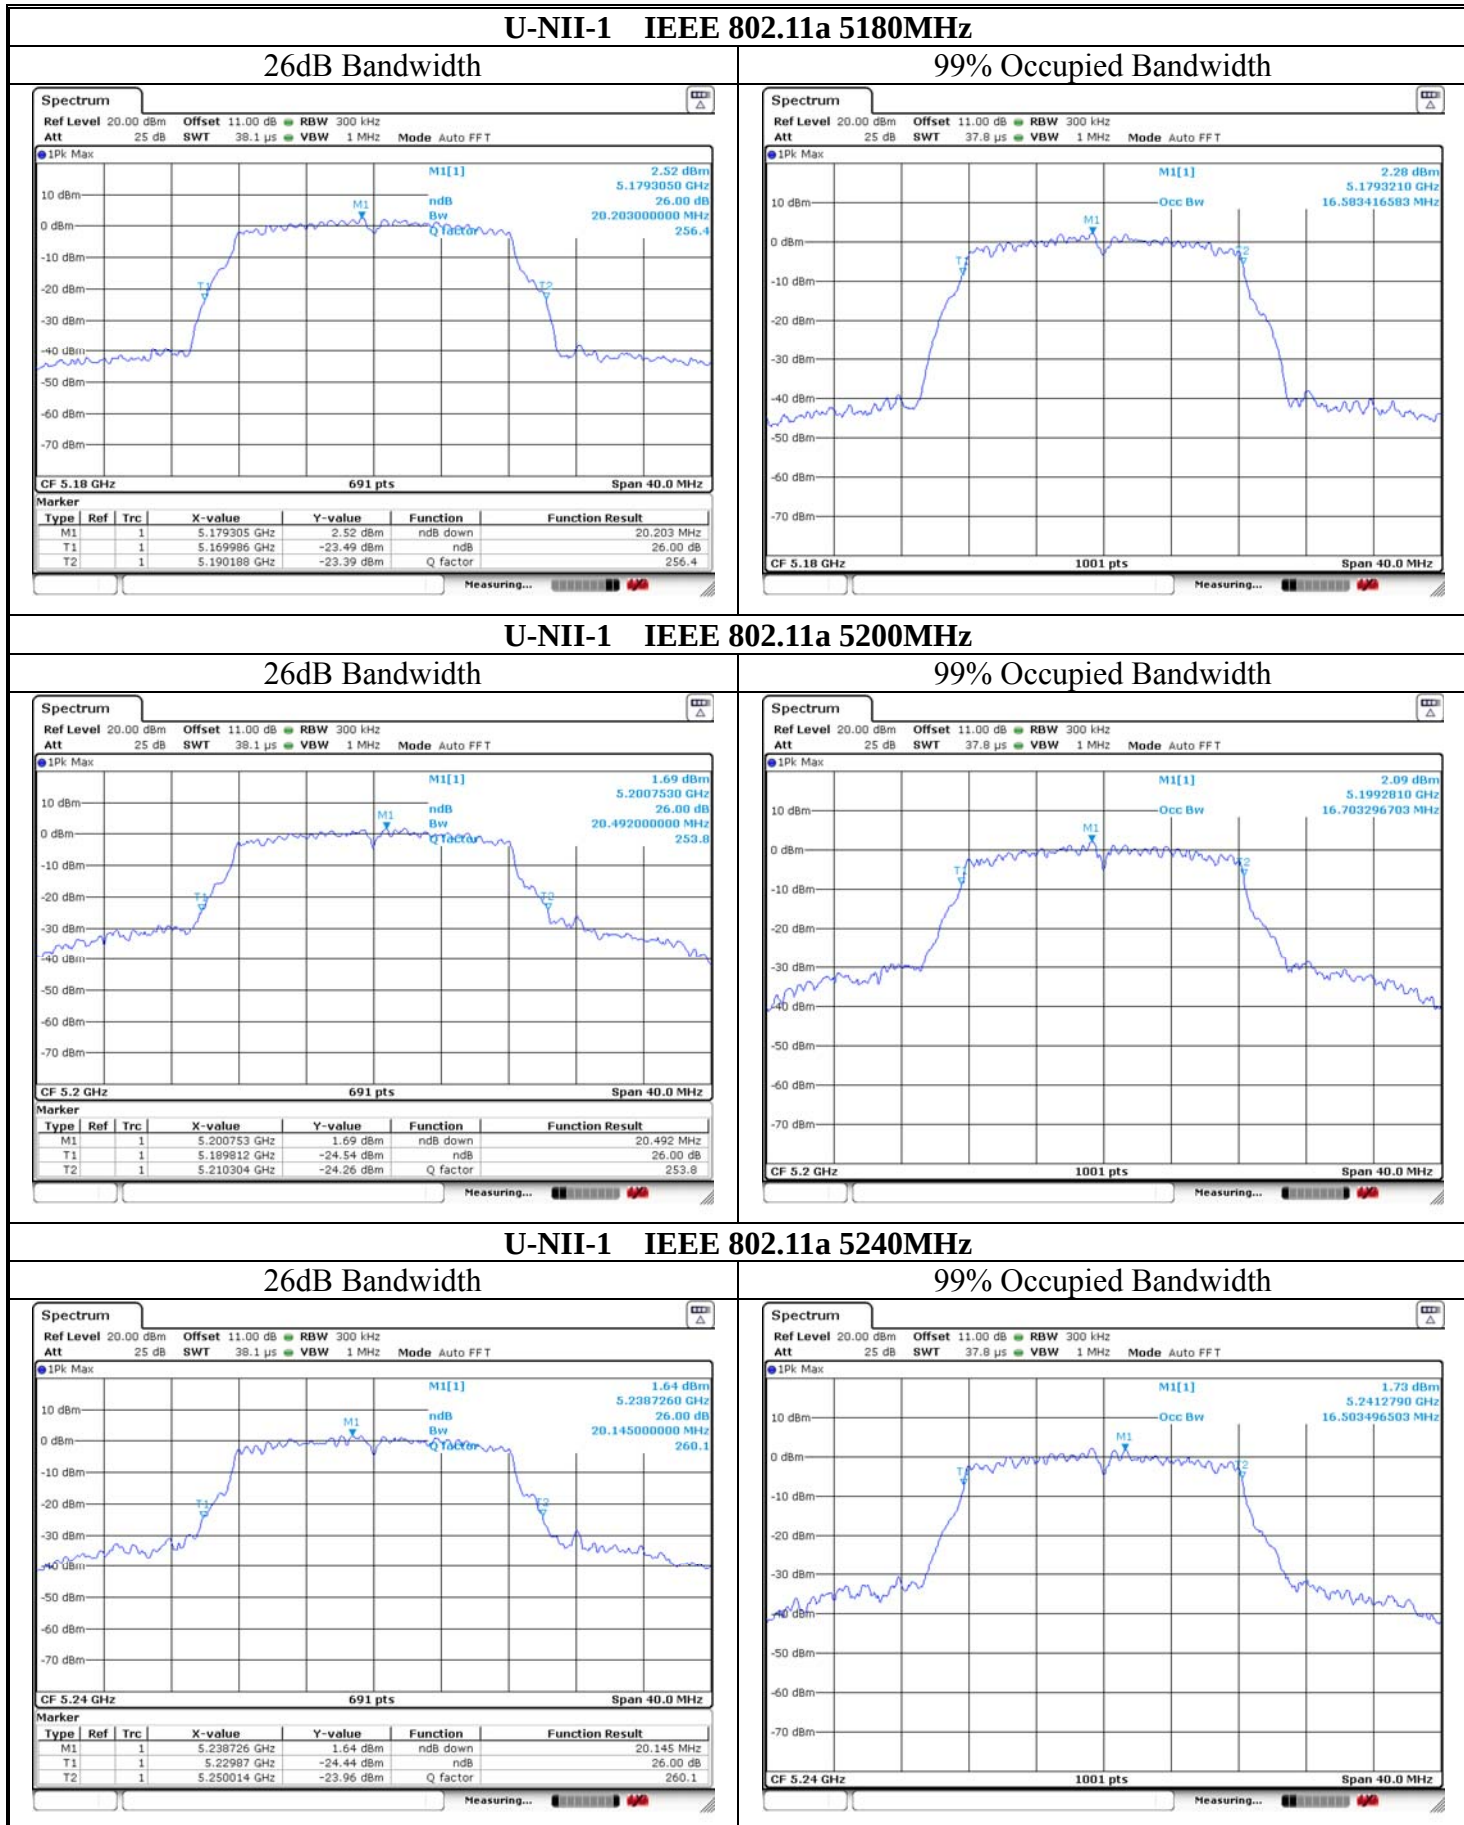

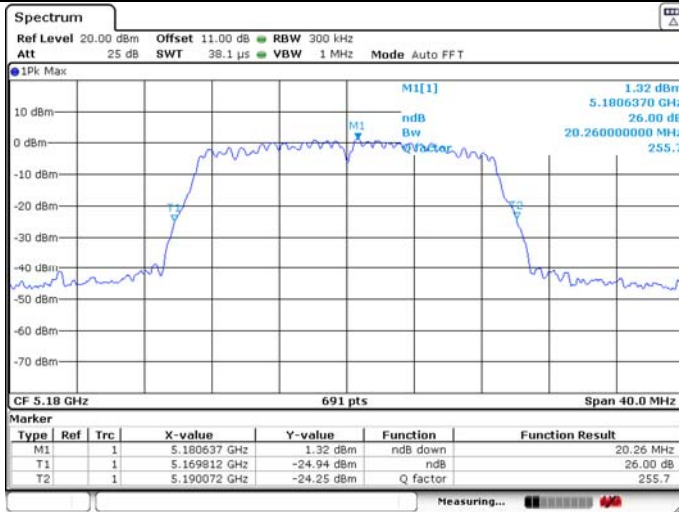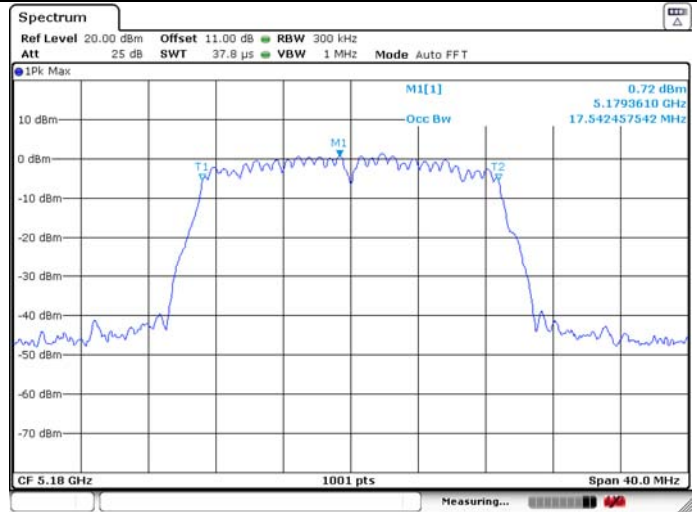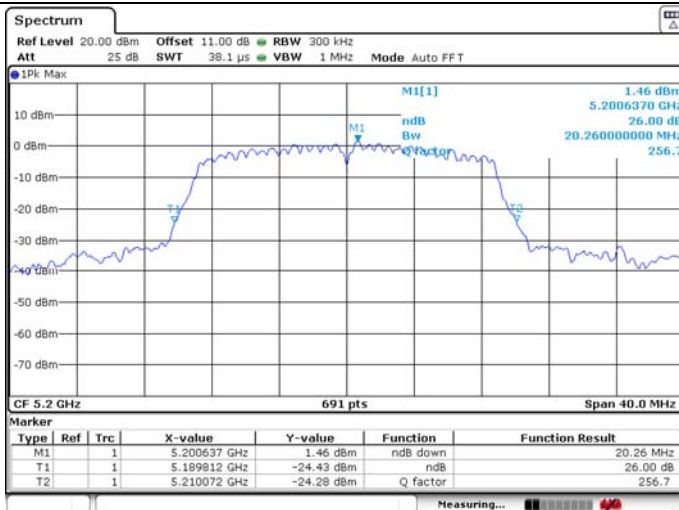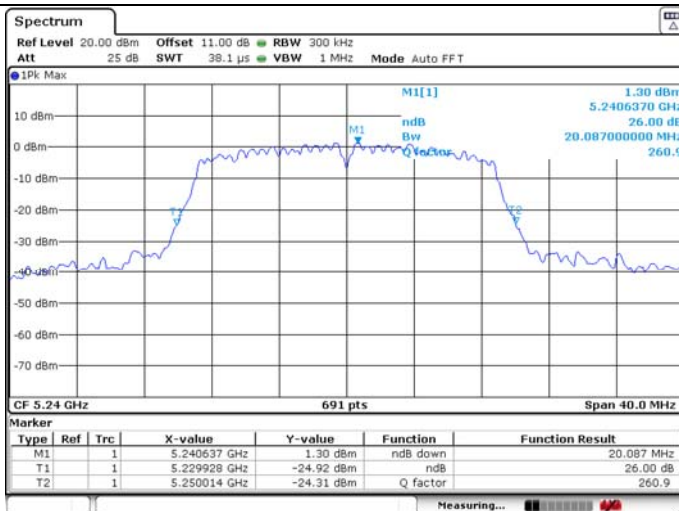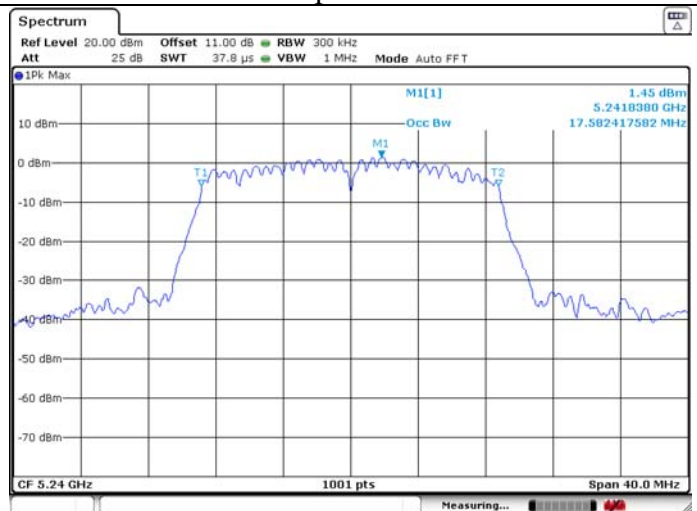
U-NII-1 IEEE 802.11n HT20 5180MHz**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5200MHz****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5240MHz****26dB Bandwidth****99% Occupied Bandwidth**

U-NII-1 IEEE 802.11ac VHT20 5180MHz

26dB Bandwidth

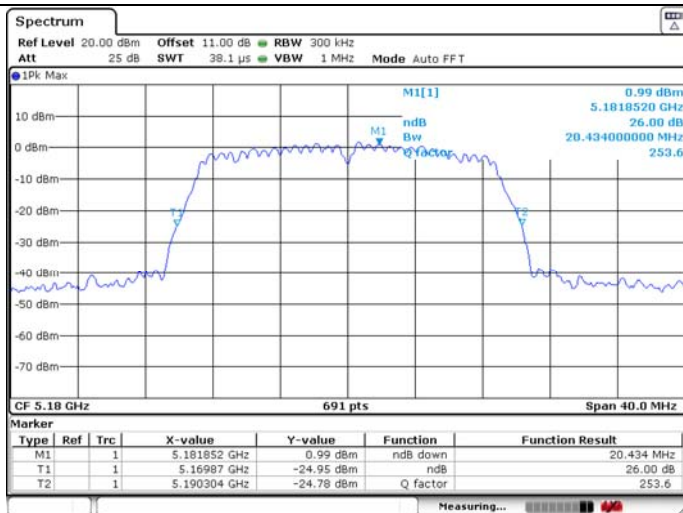


99% Occupied Bandwidth

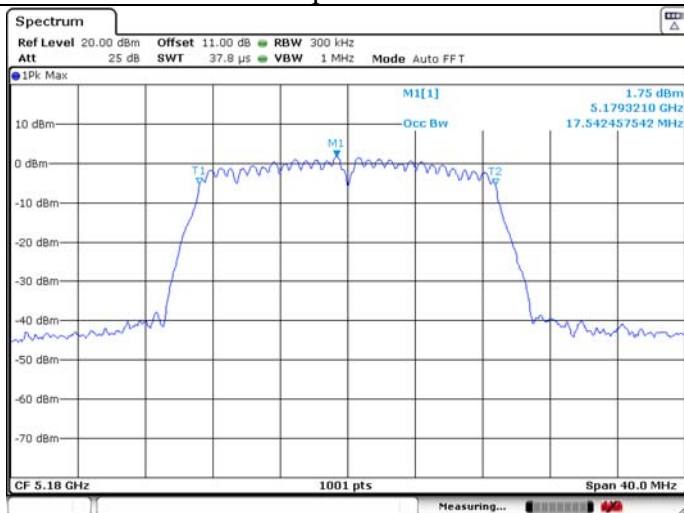


U-NII-1 IEEE 802.11ac VHT20 5200MHz

26dB Bandwidth

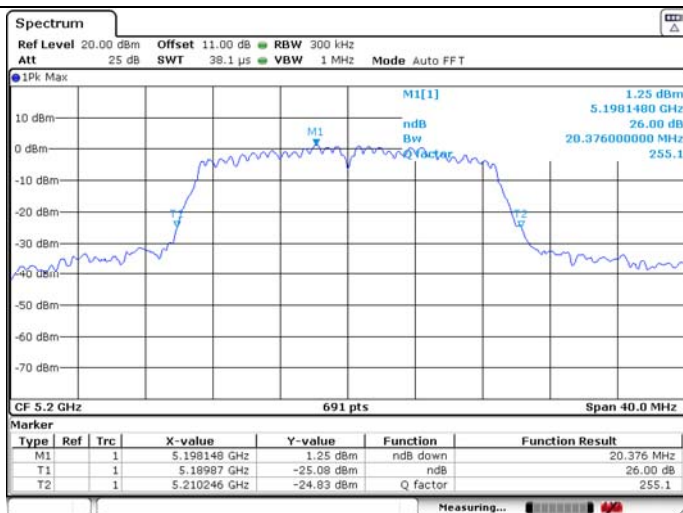


99% Occupied Bandwidth

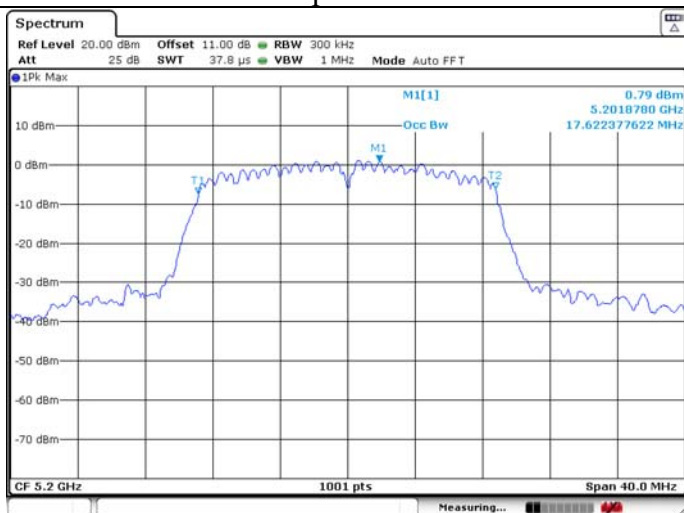







U-NII-1 IEEE 802.11ac VHT20 5240MHz


26dB Bandwidth

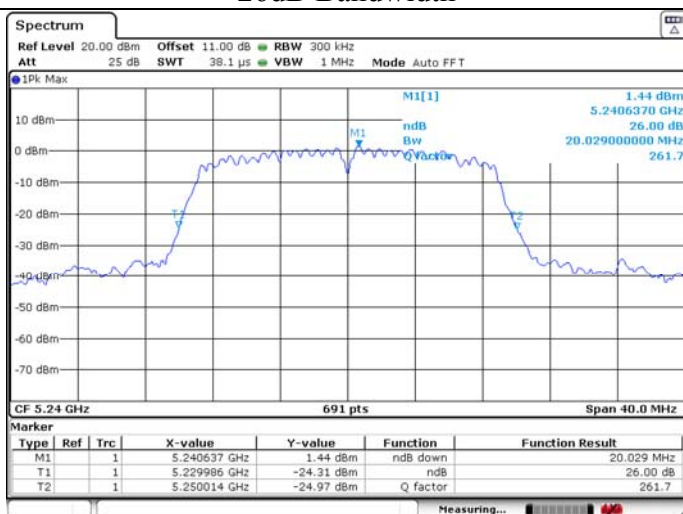

99% Occupied Bandwidth

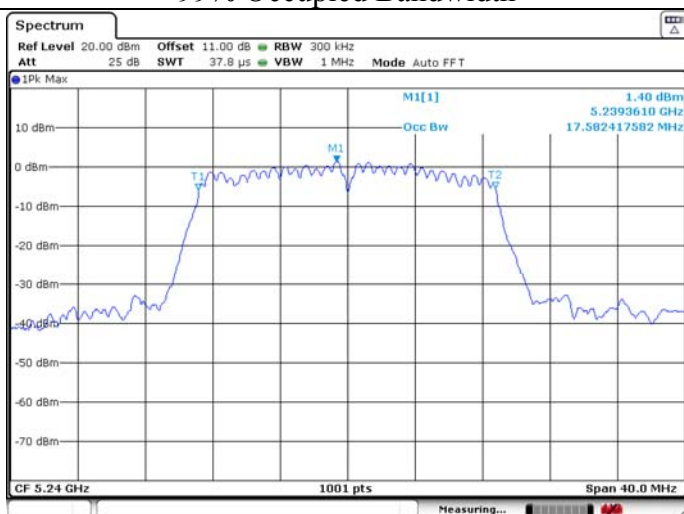


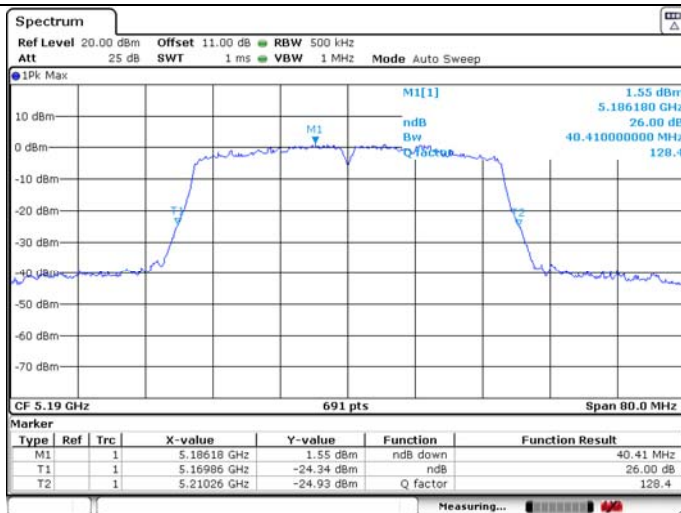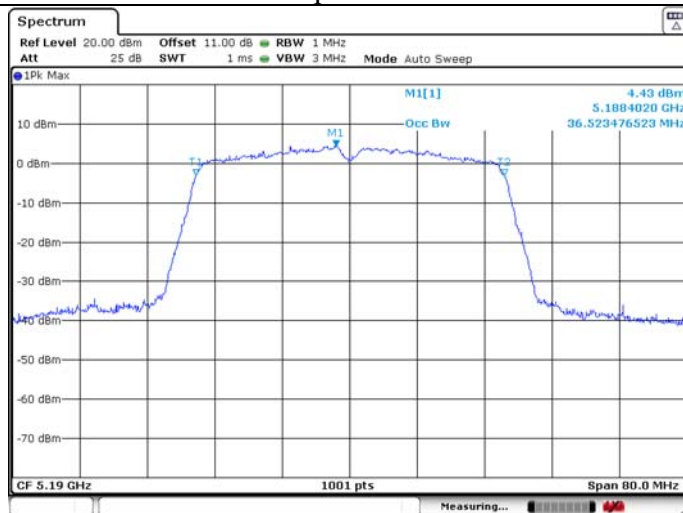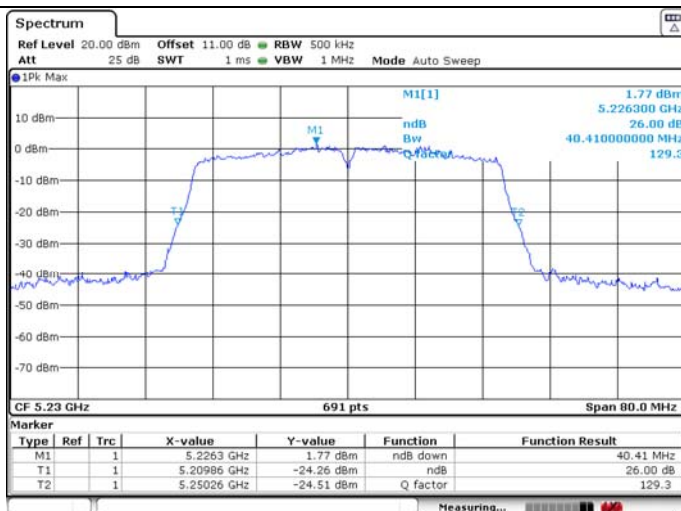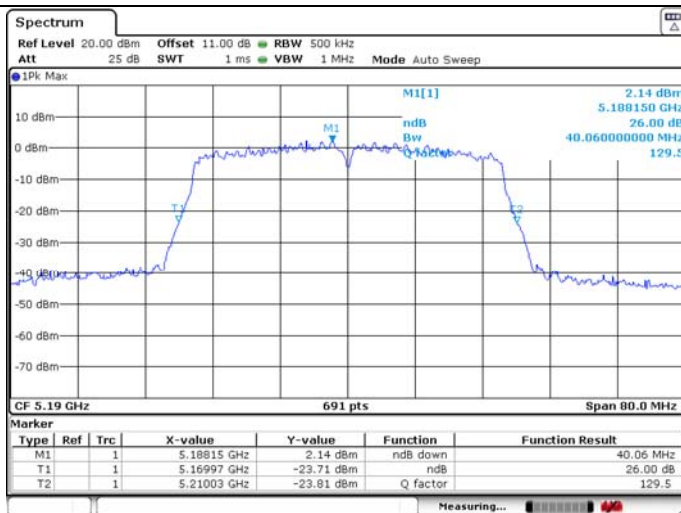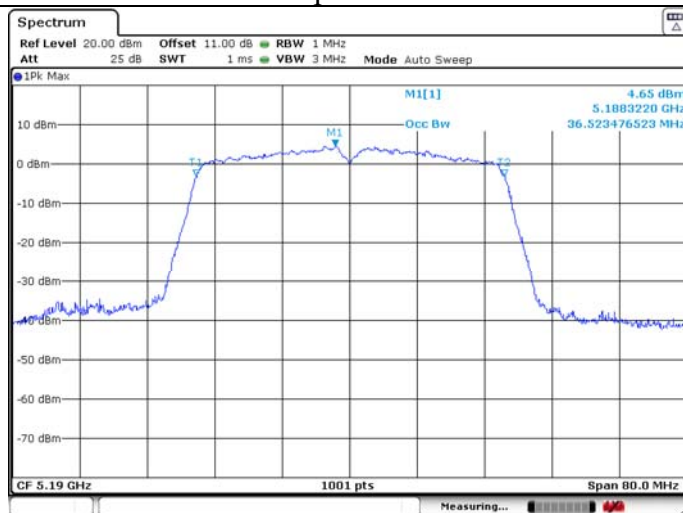U-NII-1 IEEE 802.11n HT40 5190MHz**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT40 5230MHz****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT40 5190MHz****26dB Bandwidth****99% Occupied Bandwidth**

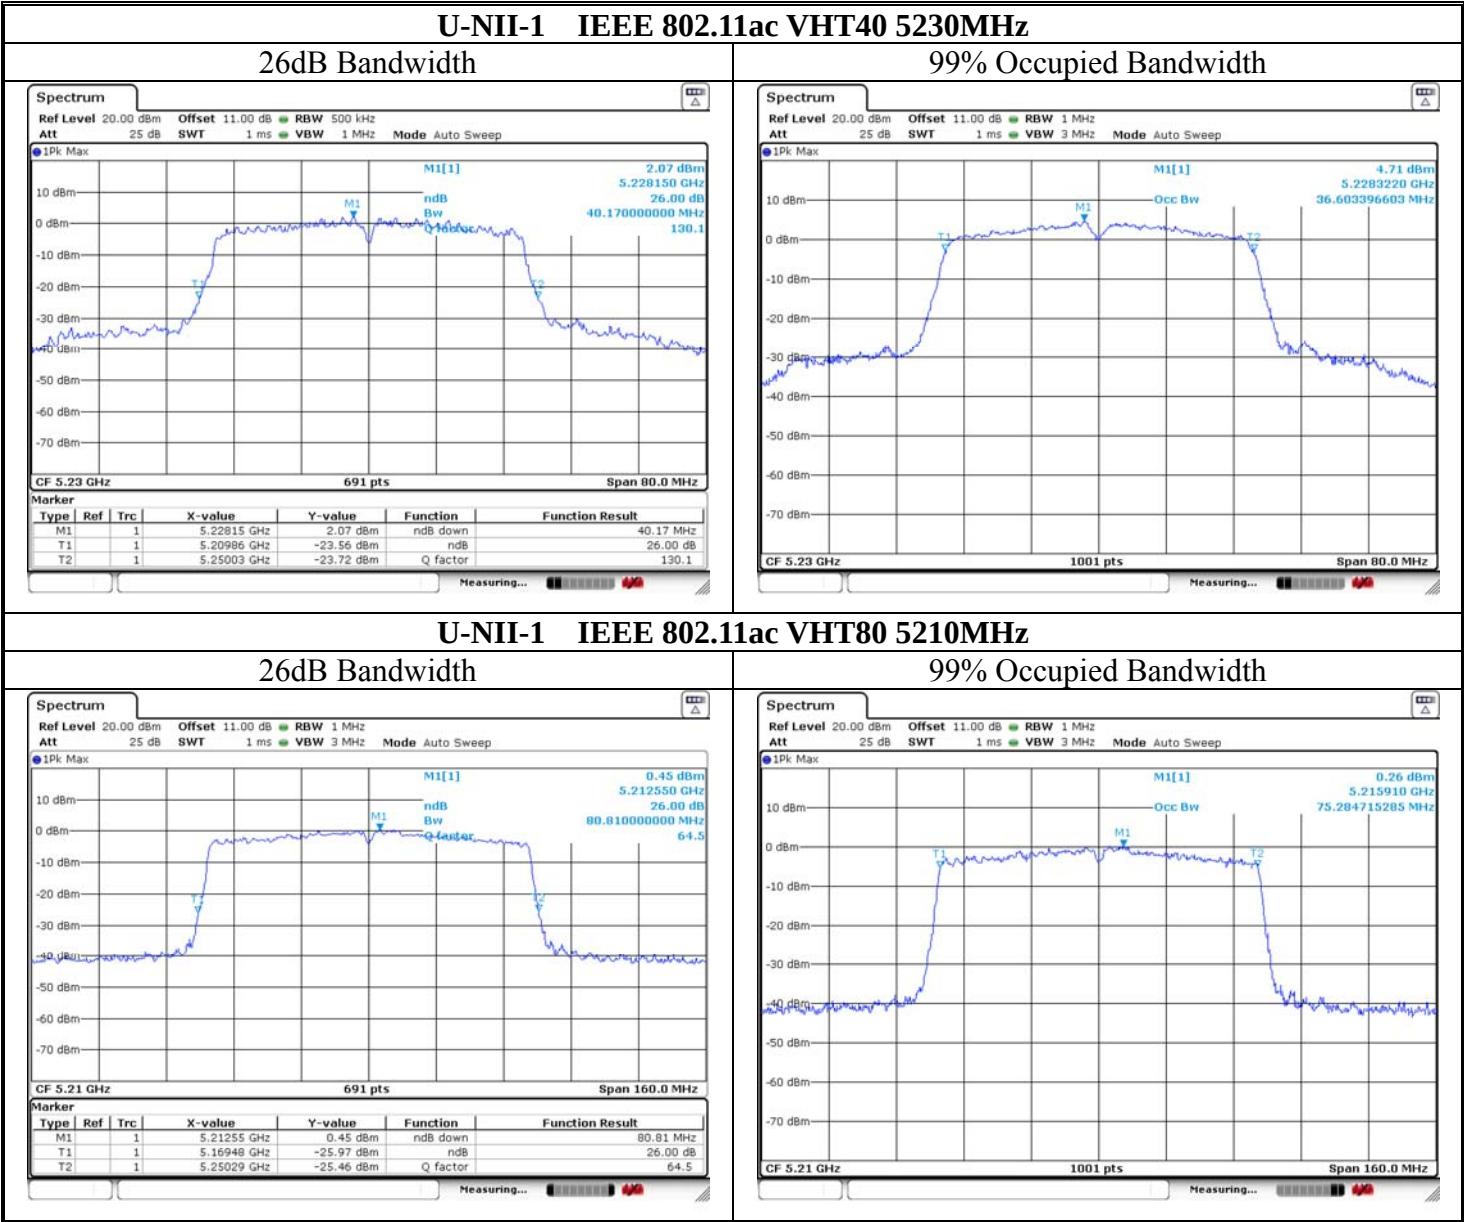

U-NII-2A IEEE 802.11a 5260MHz

26dB Bandwidth

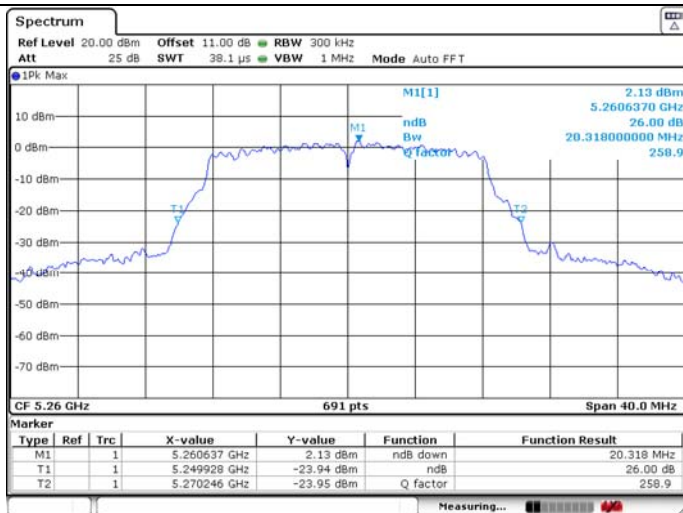


99% Occupied Bandwidth




U-NII-2A IEEE 802.11a 5300MHz

26dB Bandwidth

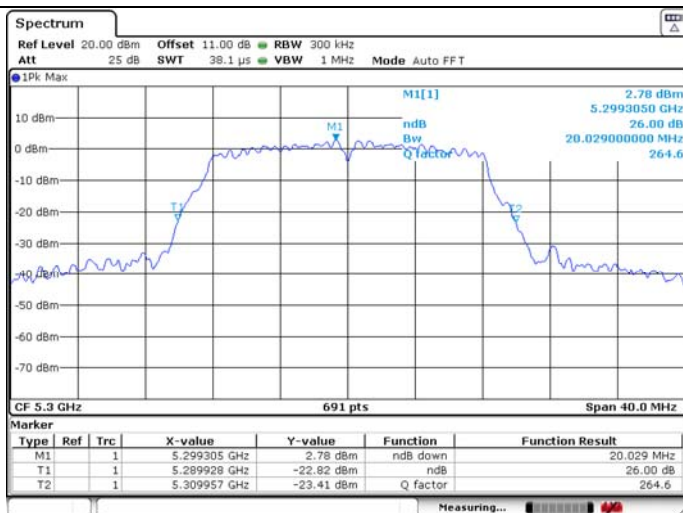


99% Occupied Bandwidth

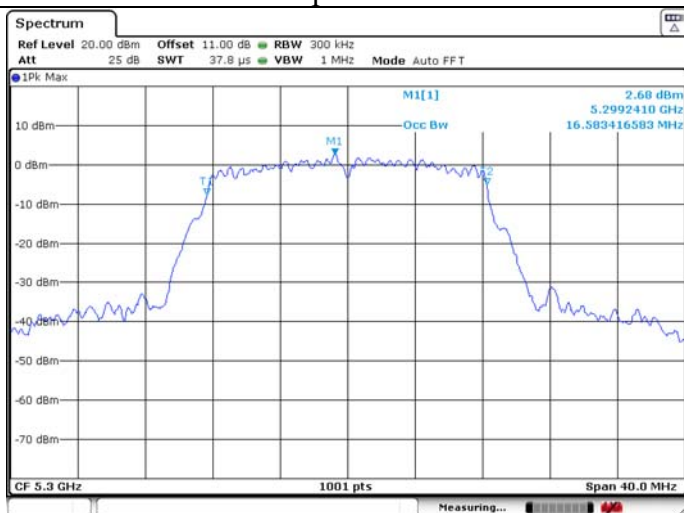






U-NII-2A IEEE 802.11a 5320MHz







26dB Bandwidth




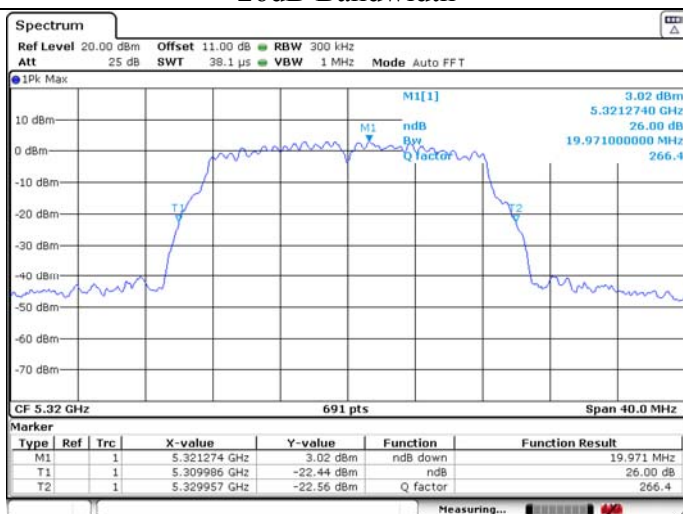



99% Occupied Bandwidth

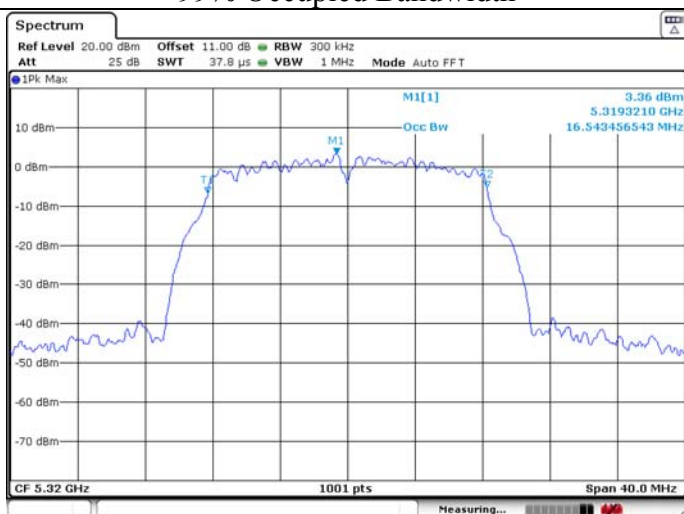

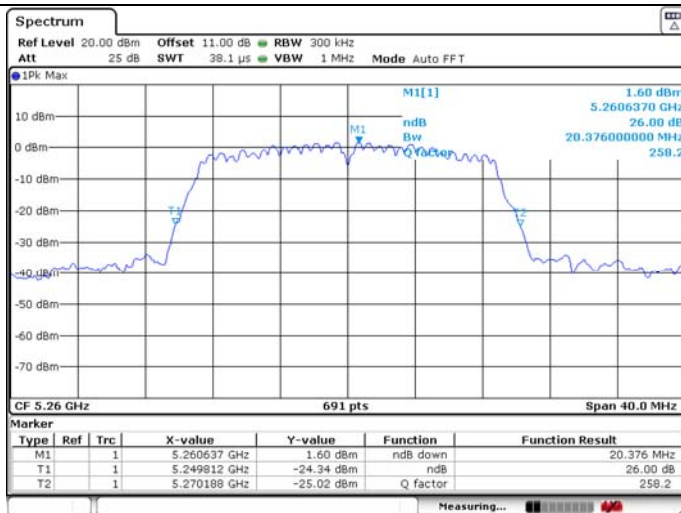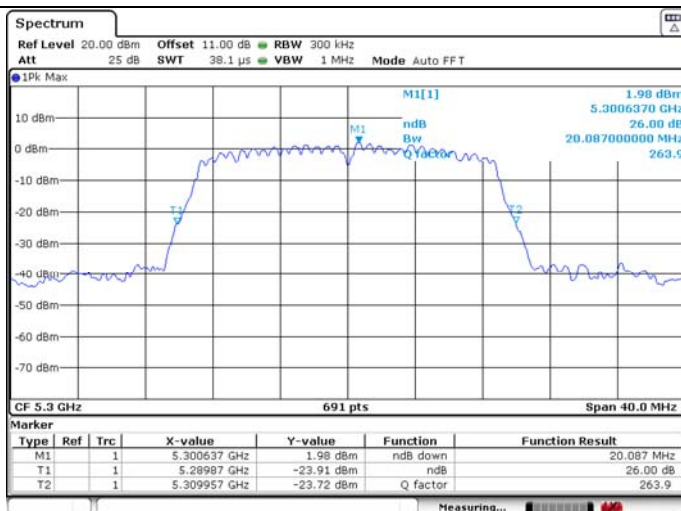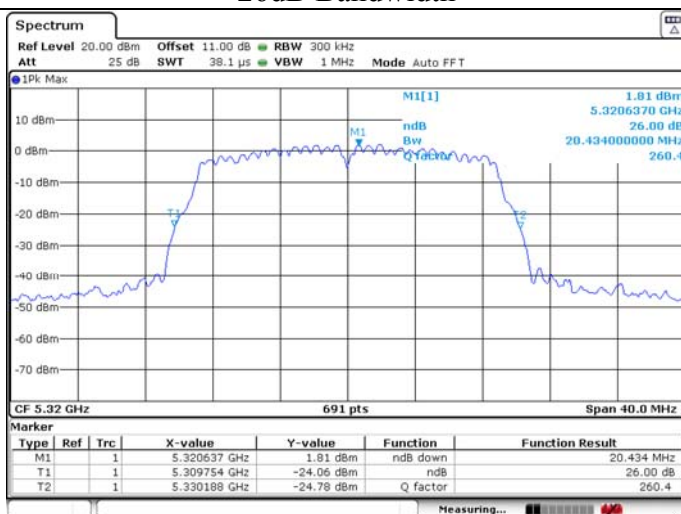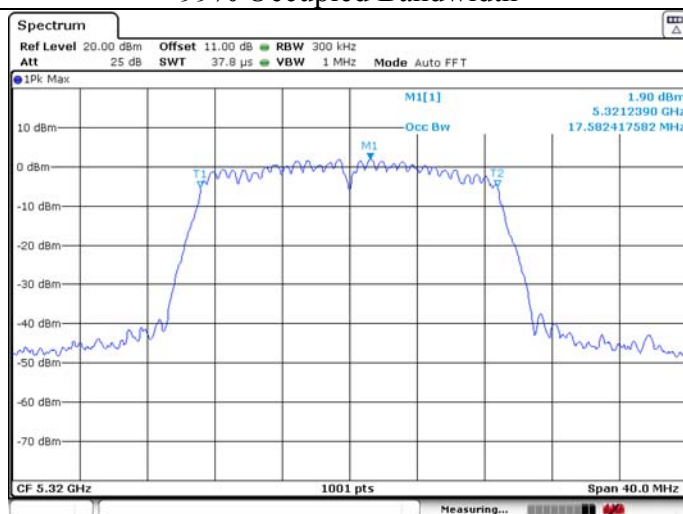U-NII-2A IEEE 802.11n HT20 5260MHz**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11n HT20 5300MHz****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11n HT20 5320MHz****26dB Bandwidth****99% Occupied Bandwidth**

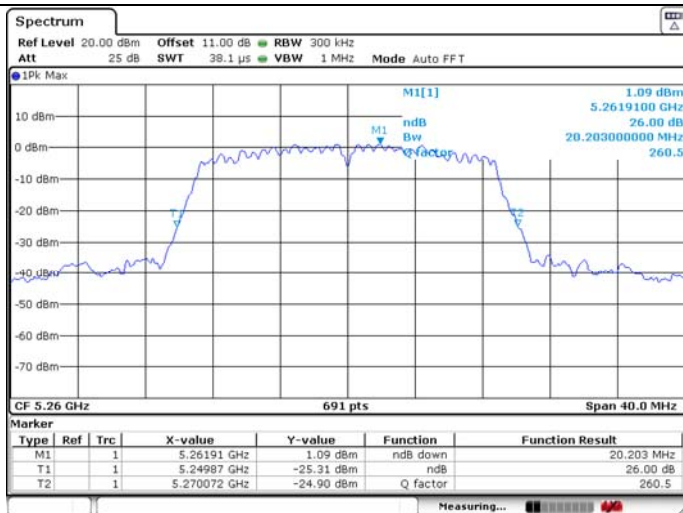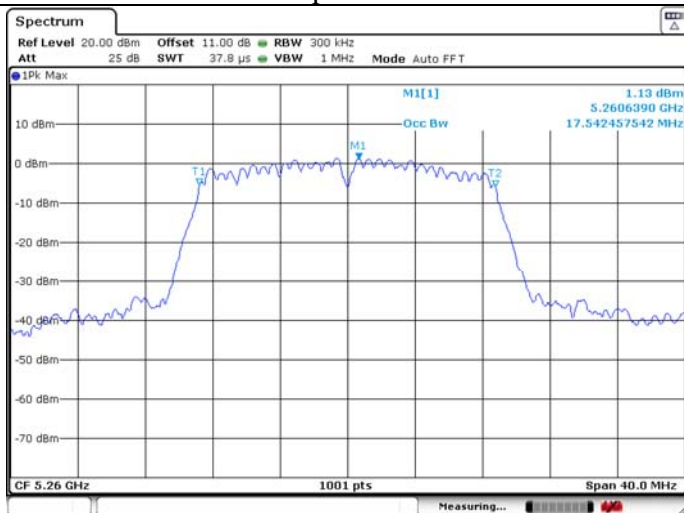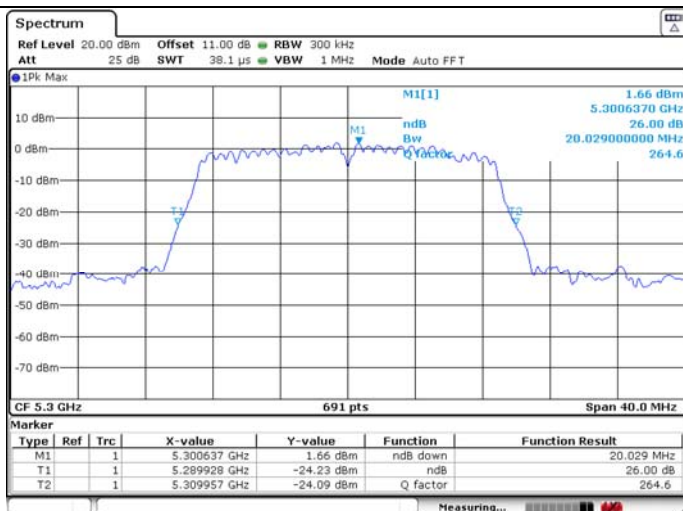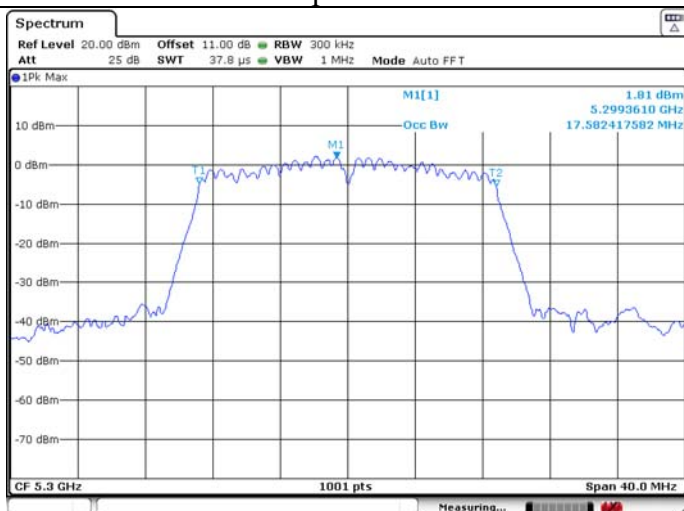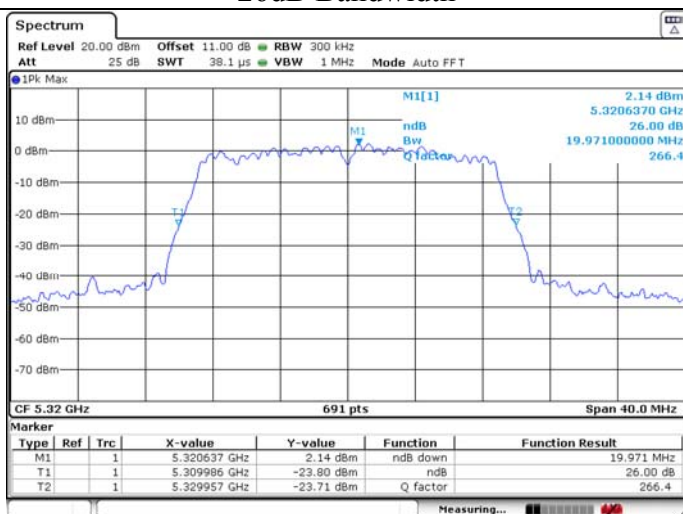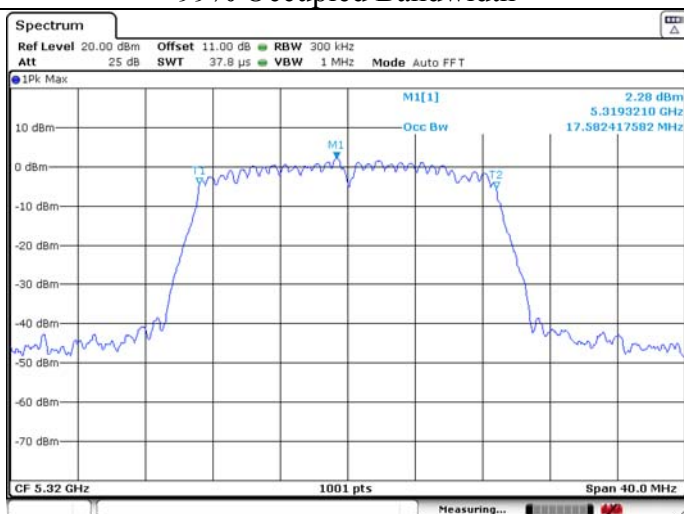
U-NII-2A IEEE 802.11ac VHT20 5260MHz**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11ac VHT20 5300MHz****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11ac VHT20 5320MHz****26dB Bandwidth****99% Occupied Bandwidth**

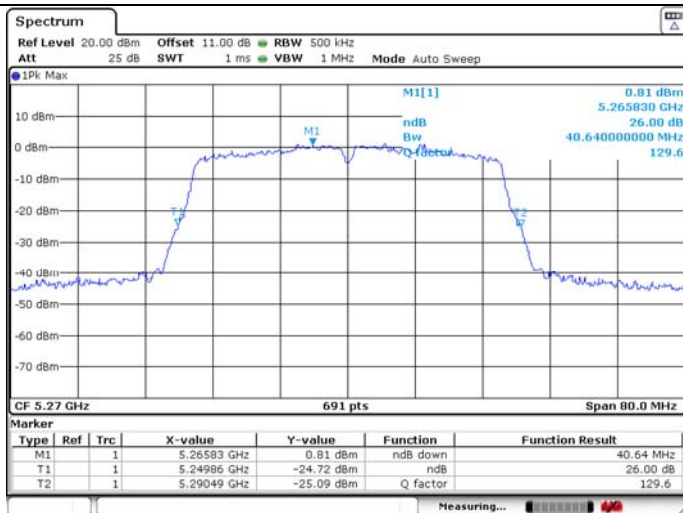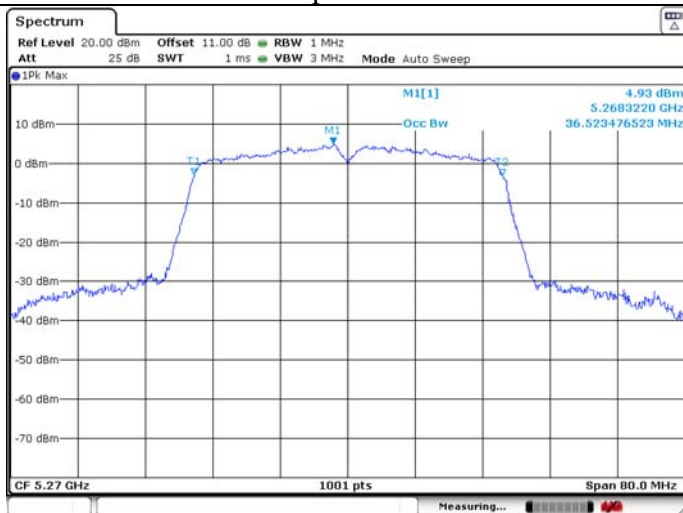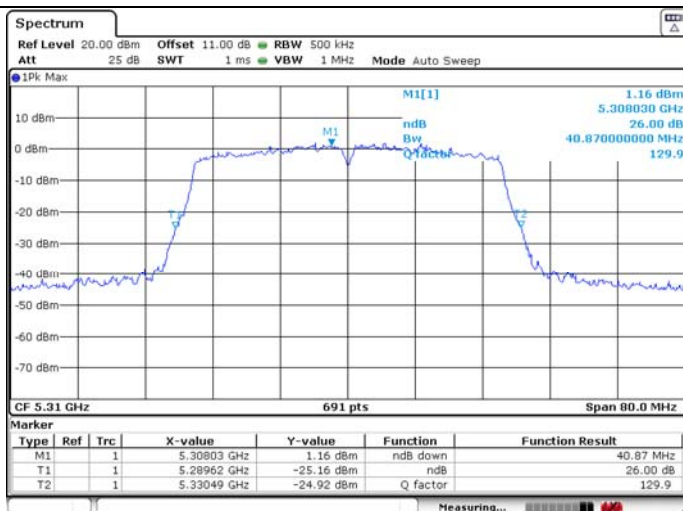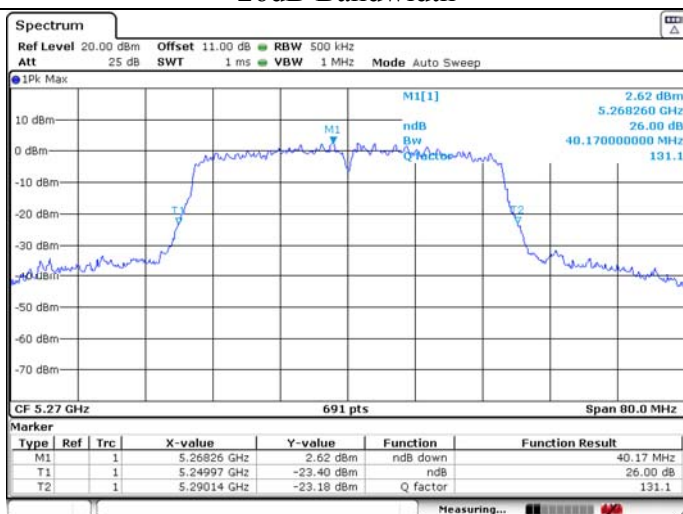U-NII-2A IEEE 802.11n HT40 5270MHz**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11n HT40 5310MHz****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11ac VHT40 5270MHz****26dB Bandwidth****99% Occupied Bandwidth**

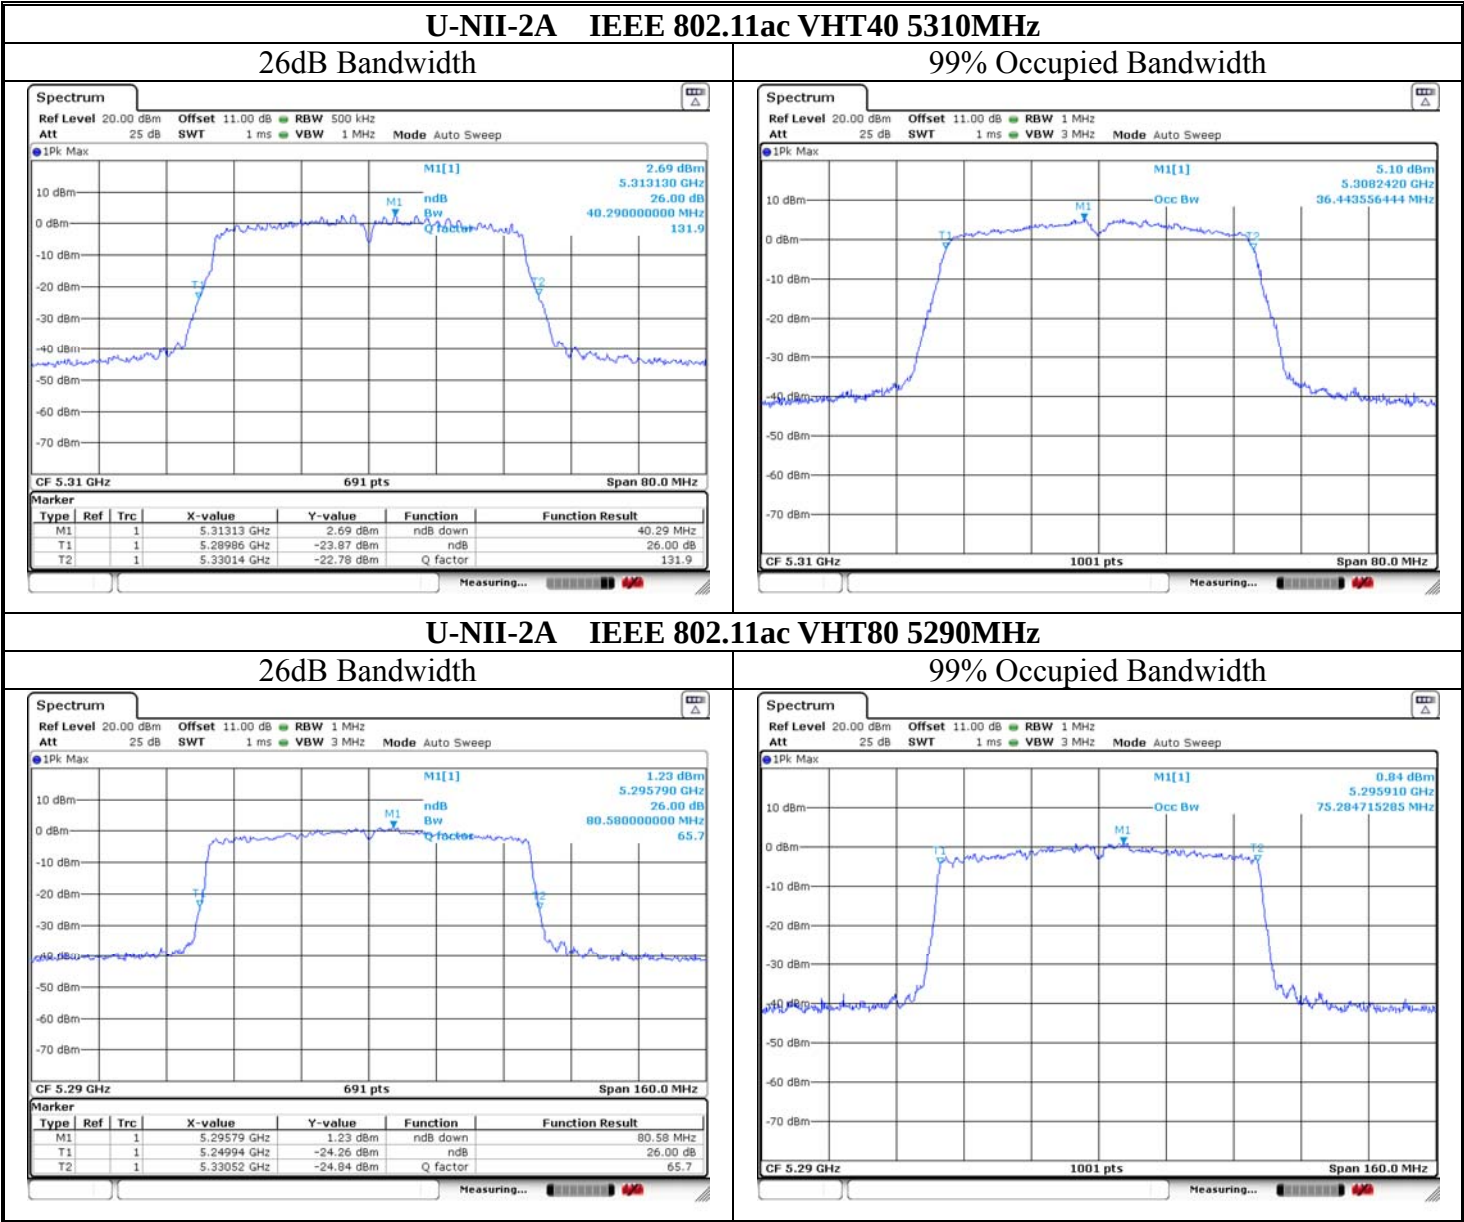


U-NII-2C IEEE 802.11a 5500MHz

26dB Bandwidth

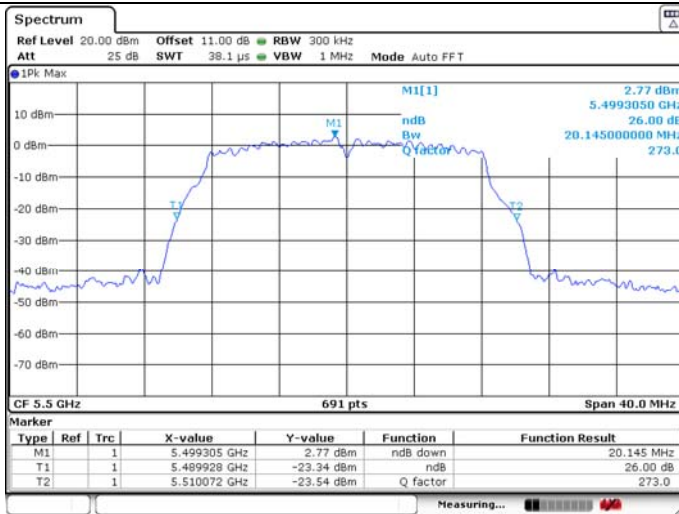


99% Occupied Bandwidth

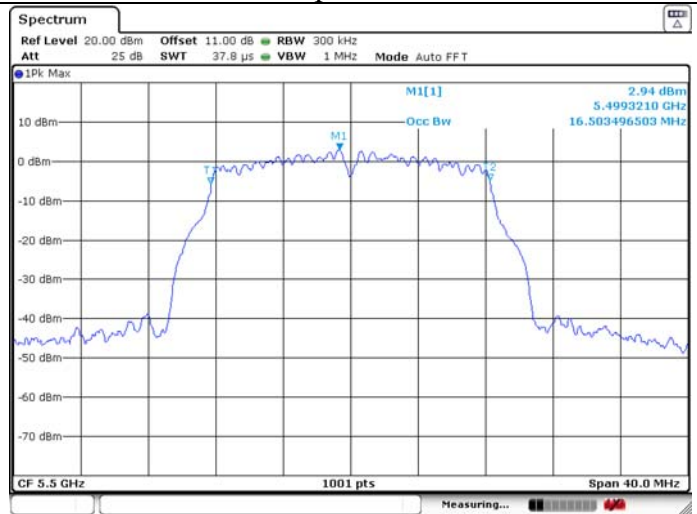

U-NII-2C IEEE 802.11a 5580MHz

26dB Bandwidth

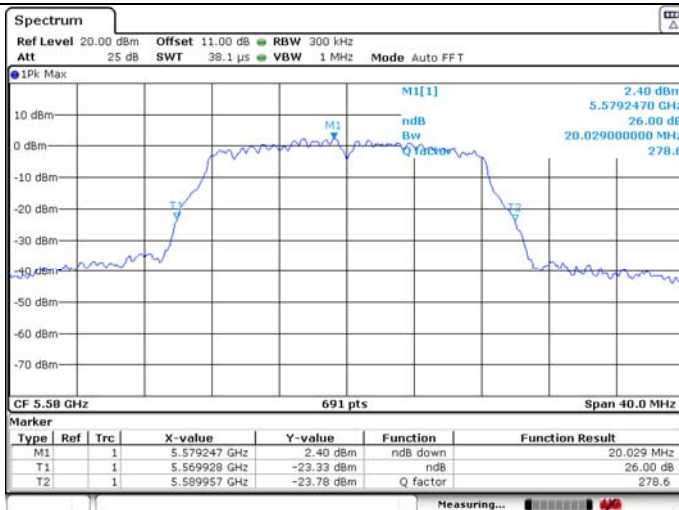


99% Occupied Bandwidth









U-NII-2C IEEE 802.11a 5700MHz

26dB Bandwidth

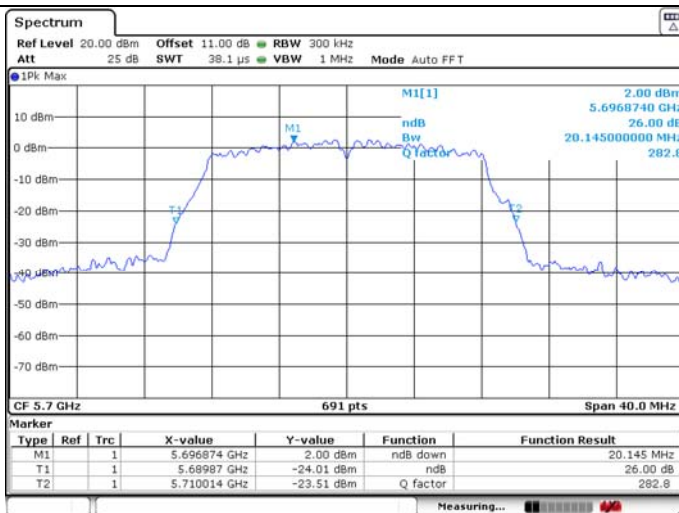


99% Occupied Bandwidth

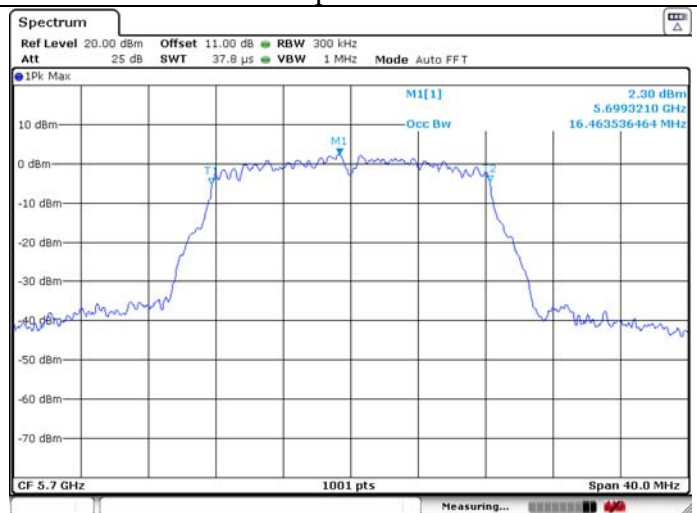

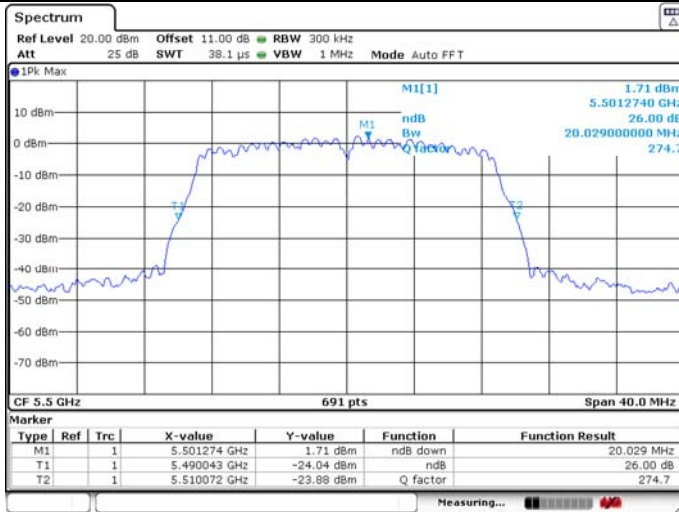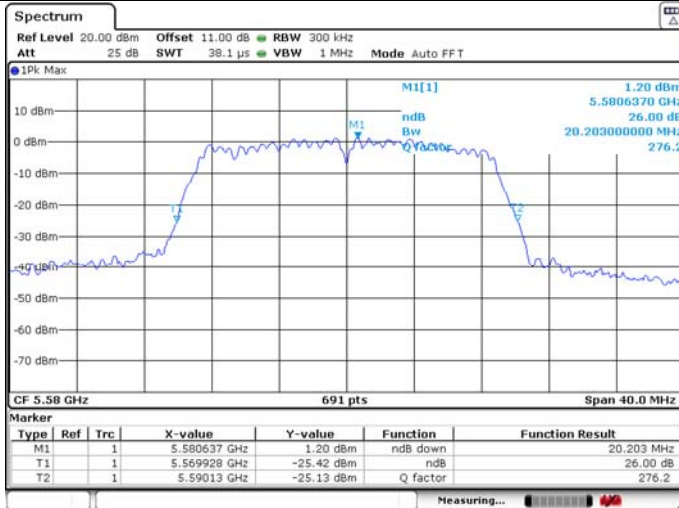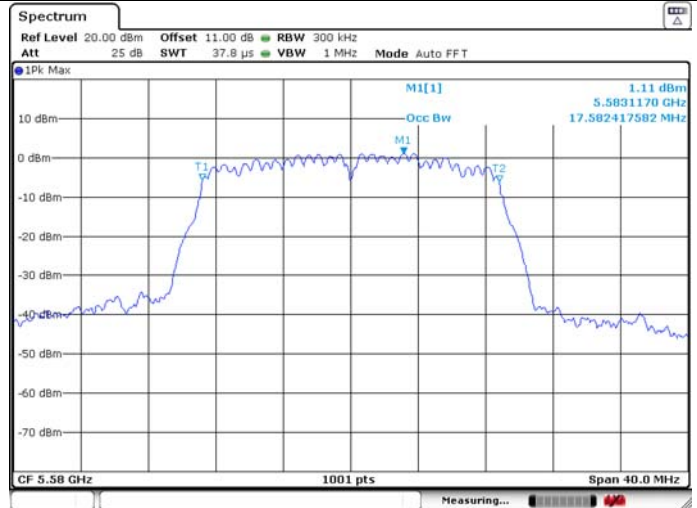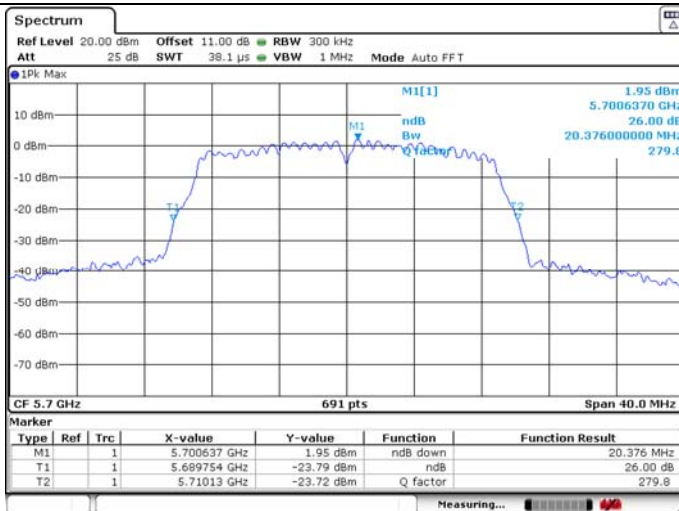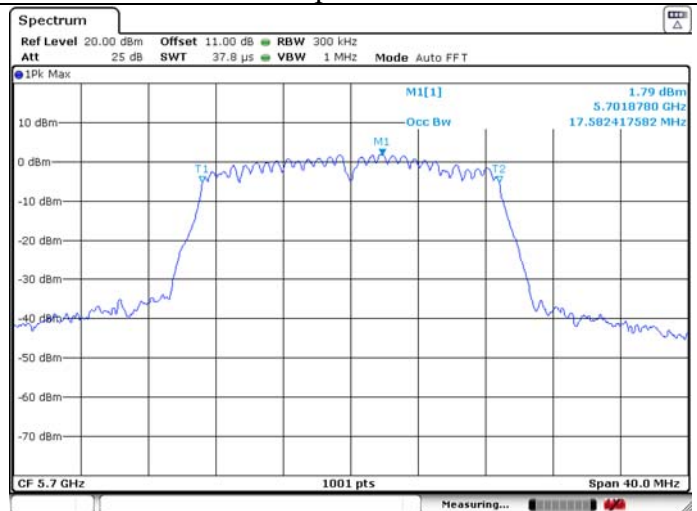
U-NII-2C IEEE 802.11n HT20 5500MHz**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2C IEEE 802.11n HT20 5580MHz****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2C IEEE 802.11n HT20 5700MHz****26dB Bandwidth****99% Occupied Bandwidth**

U-NII-2C IEEE 802.11ac VHT20 5500MHz

26dB Bandwidth

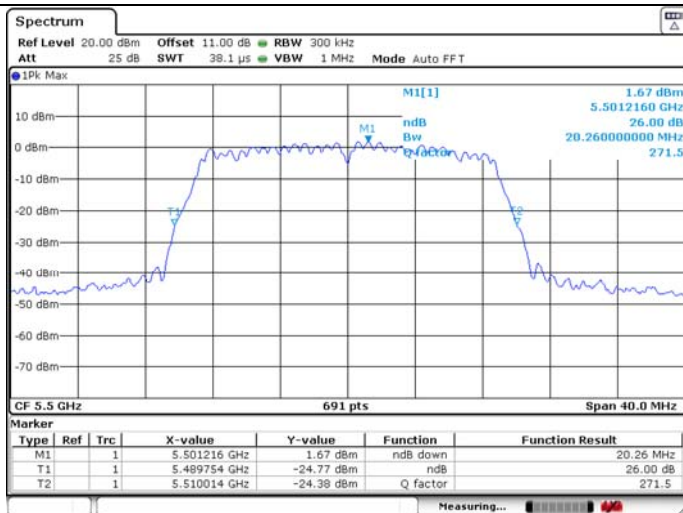


99% Occupied Bandwidth

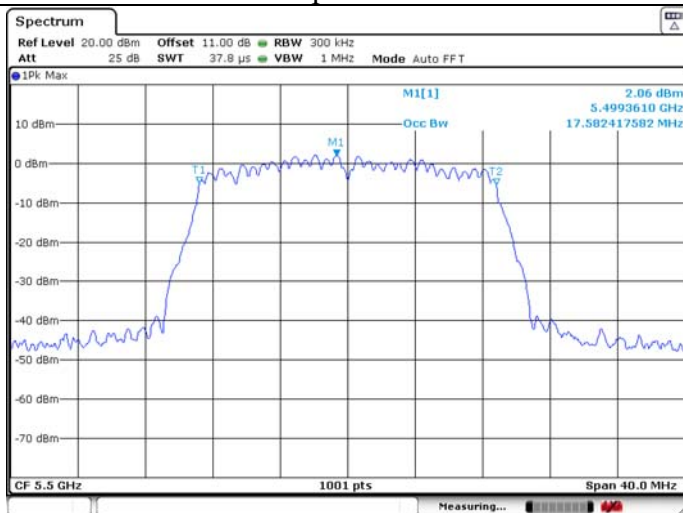


U-NII-2C IEEE 802.11ac VHT20 5580MHz

26dB Bandwidth

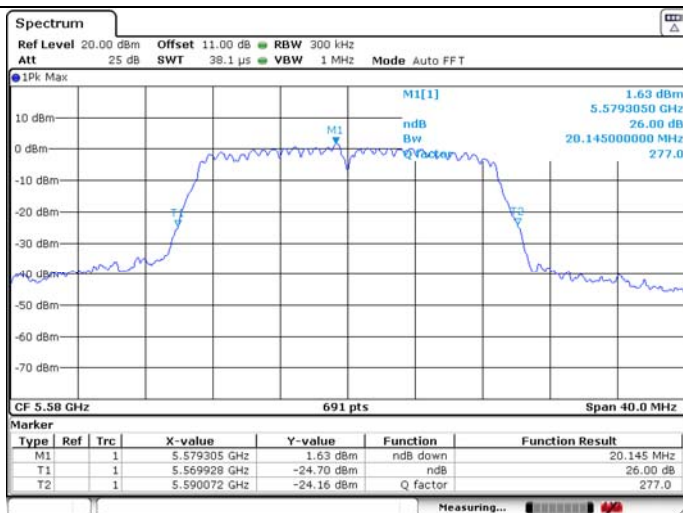


99% Occupied Bandwidth

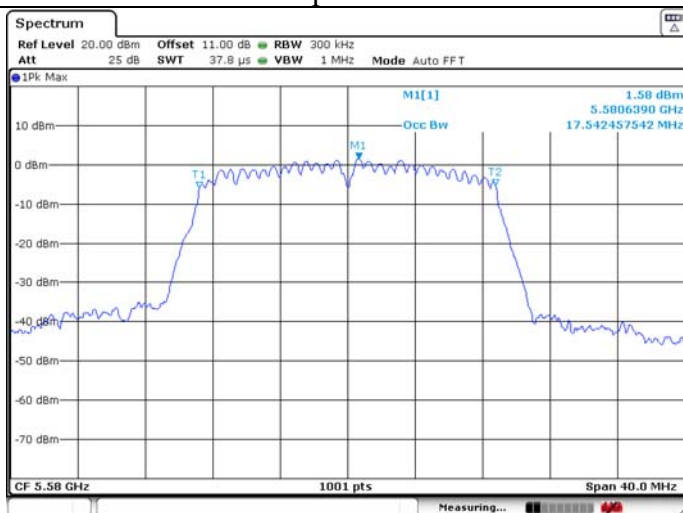


U-NII-2C IEEE 802.11ac VHT20 5700MHz

26dB Bandwidth

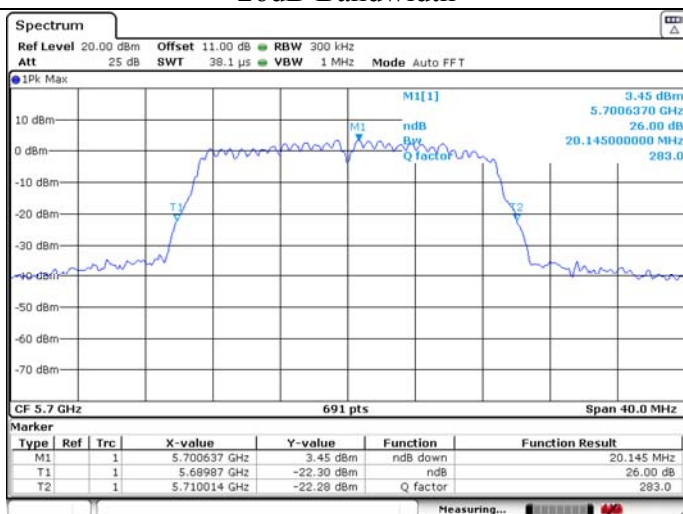


99% Occupied Bandwidth

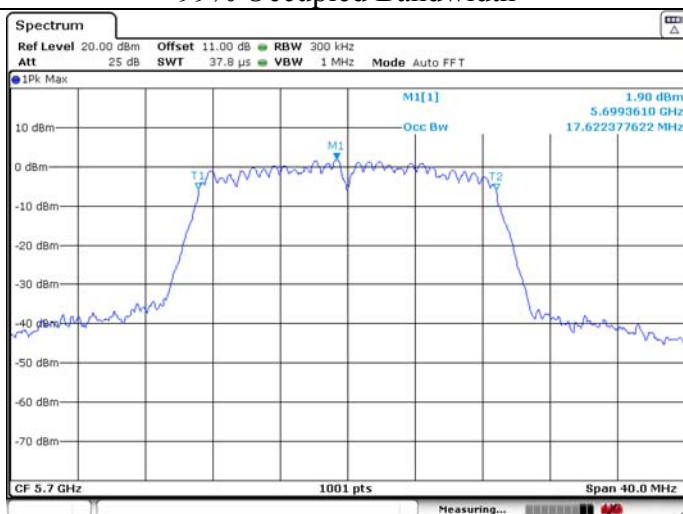


U-NII-2C IEEE 802.11n HT40 5510MHz

26dB Bandwidth

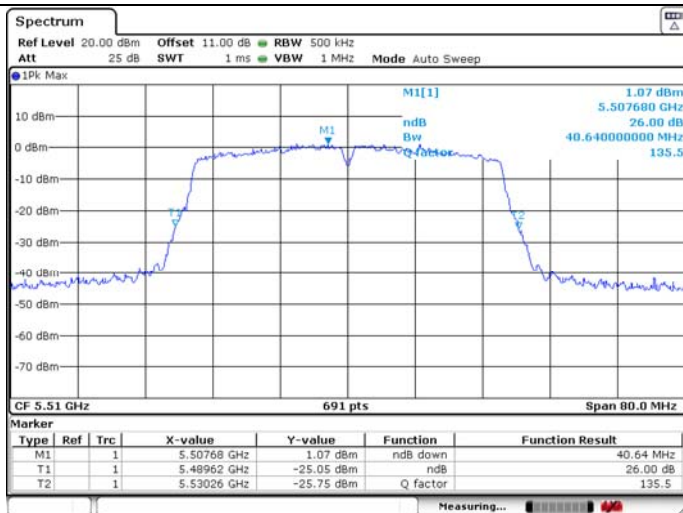


99% Occupied Bandwidth

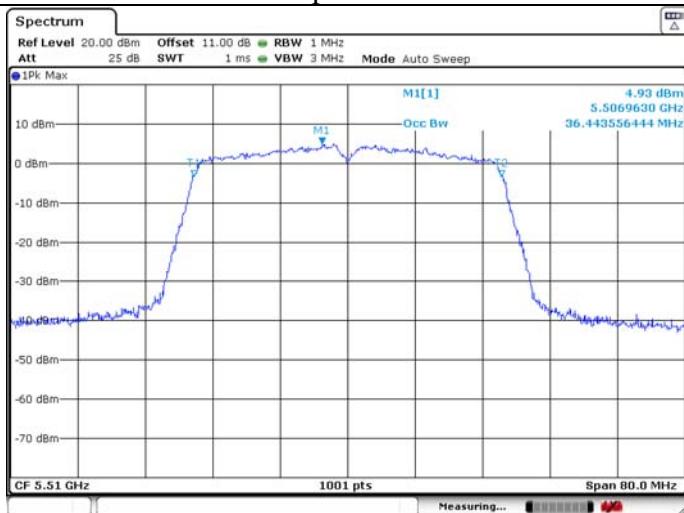

U-NII-2C IEEE 802.11n HT40 5590MHz

26dB Bandwidth

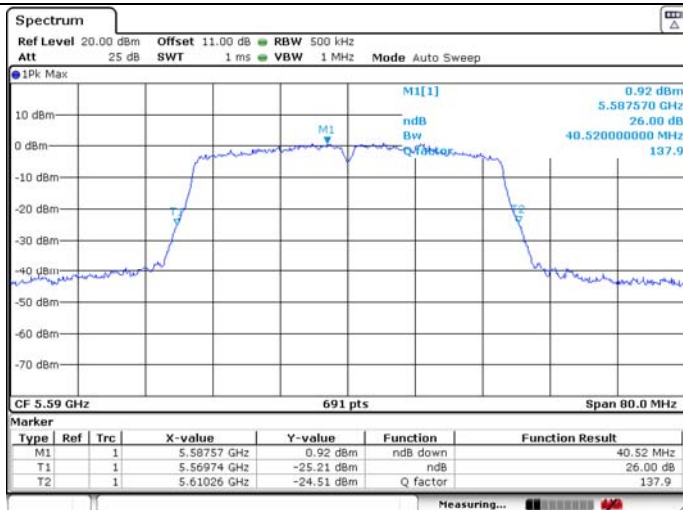


99% Occupied Bandwidth






U-NII-2C IEEE 802.11n HT40 5670MHz


26dB Bandwidth





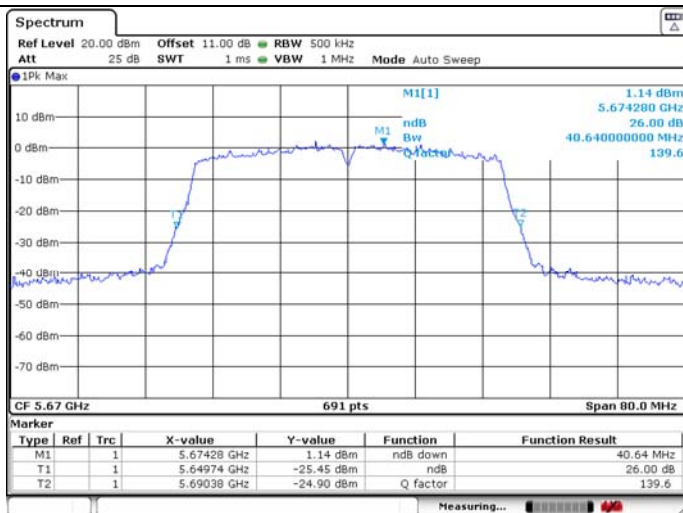








99% Occupied Bandwidth

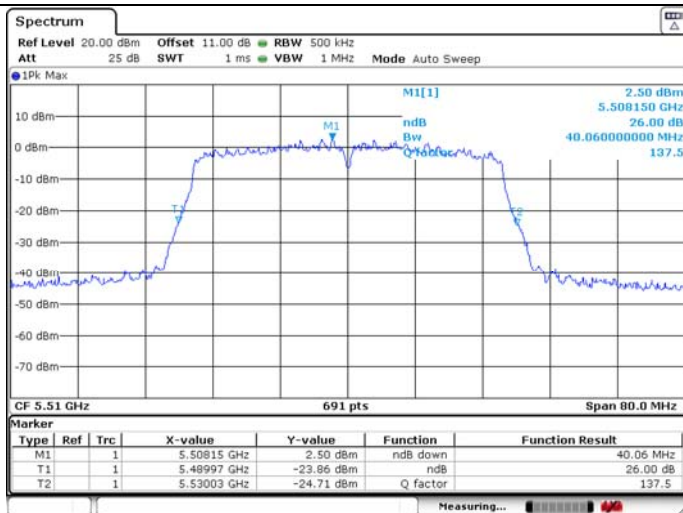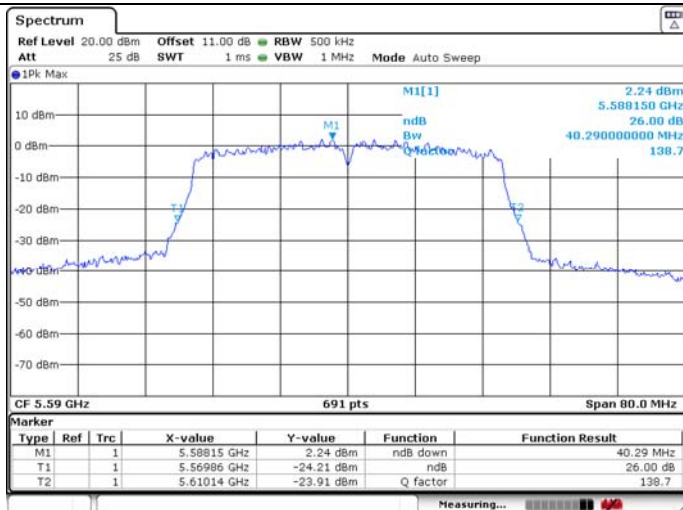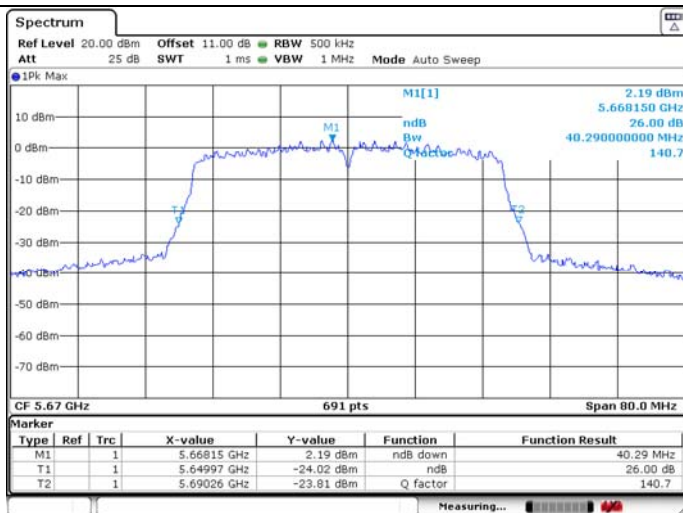

U-NII-2C IEEE 802.11ac VHT40 5510MHz**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2C IEEE 802.11ac VHT40 5590MHz****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2C IEEE 802.11ac VHT40 5670MHz****26dB Bandwidth****99% Occupied Bandwidth**

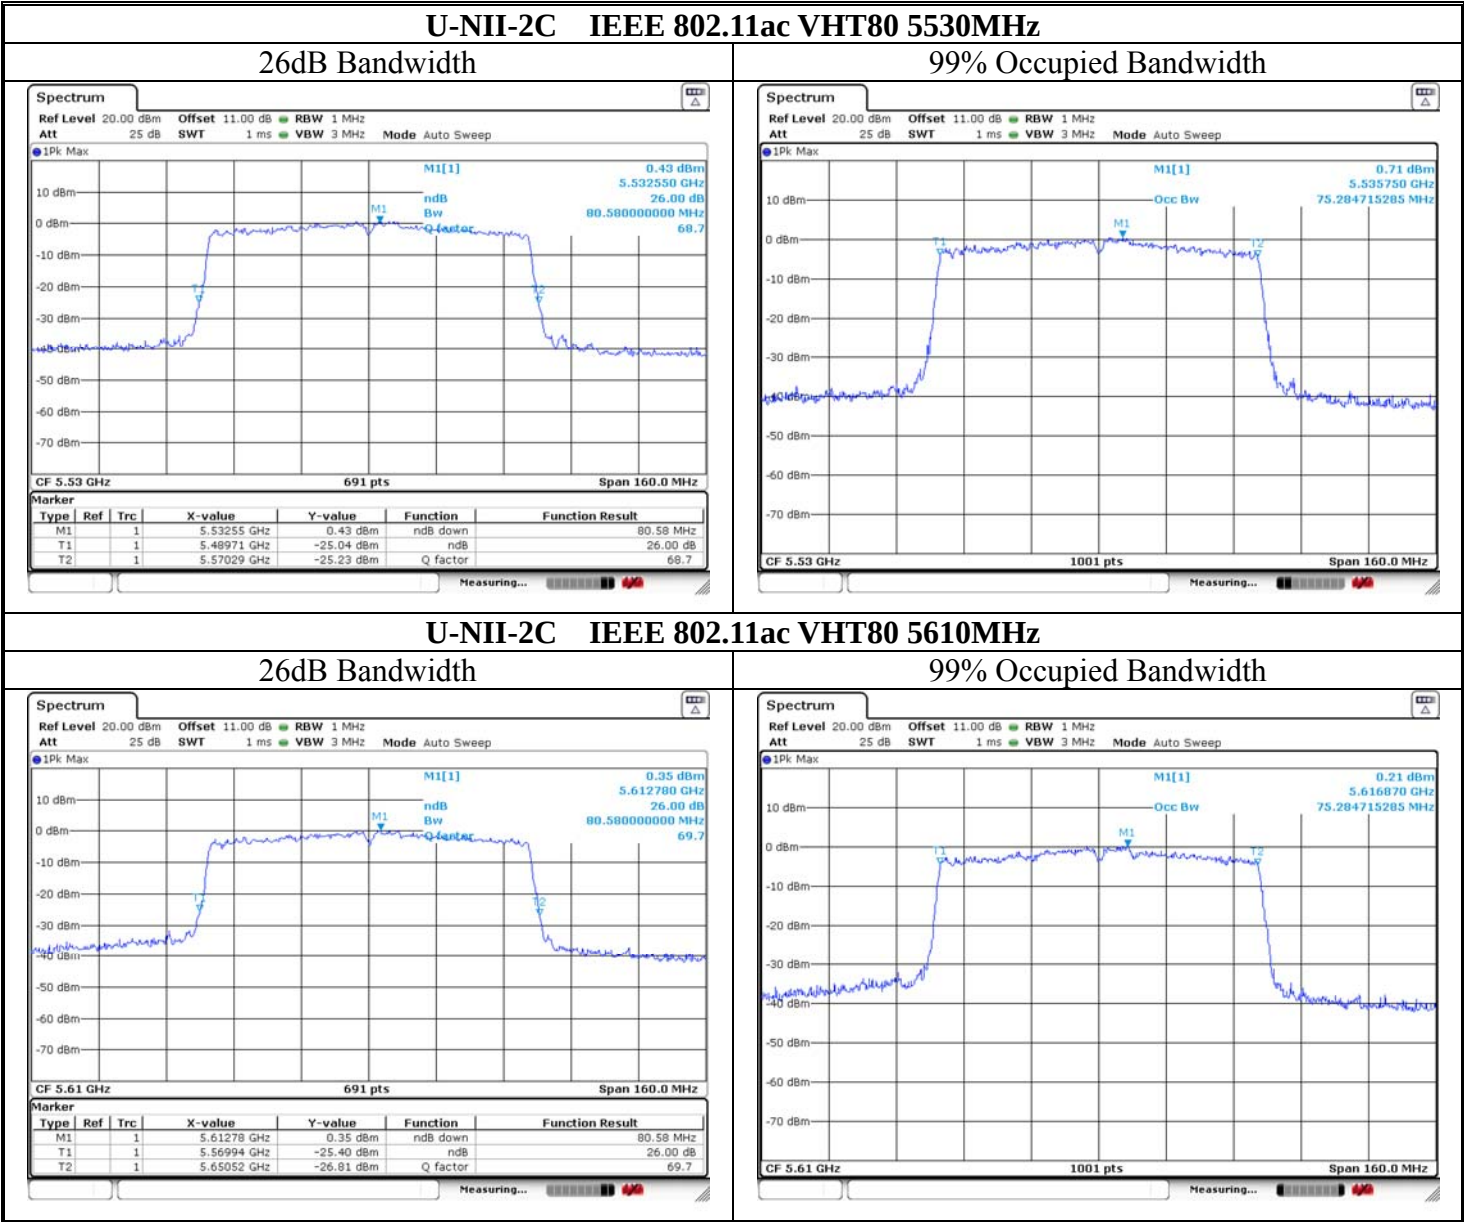


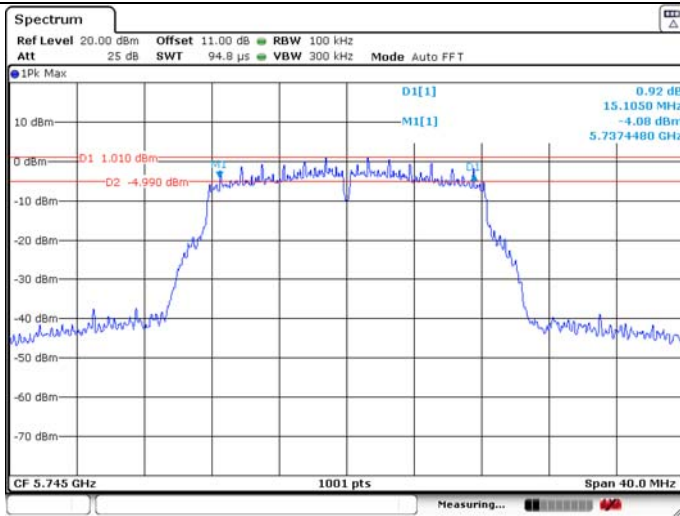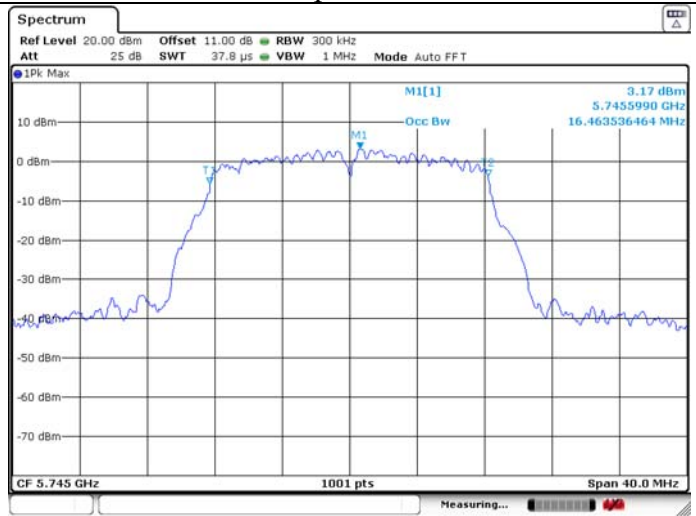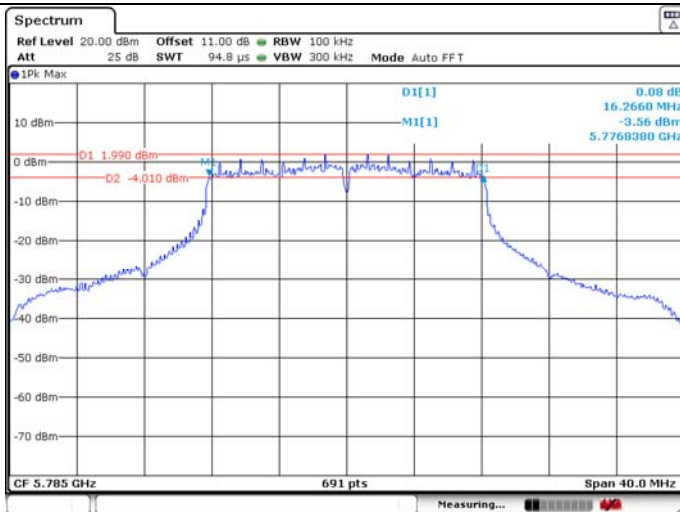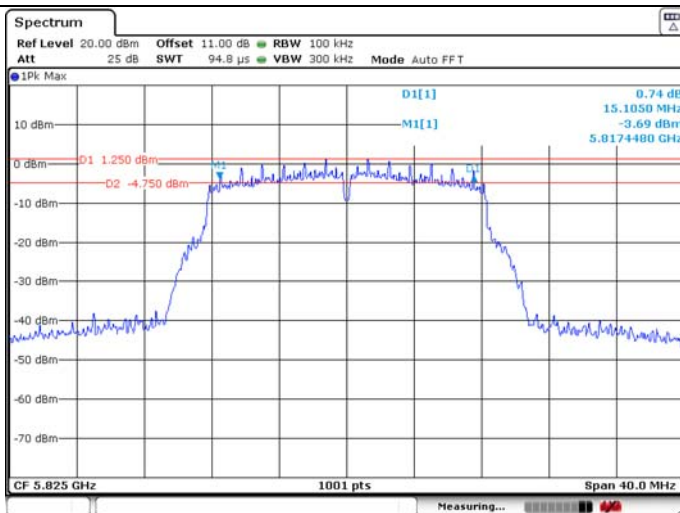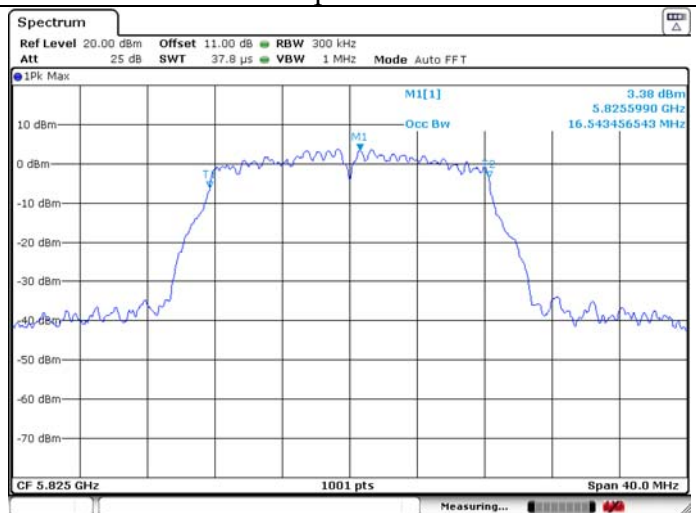U-NII-3 IEEE 802.11a 5745MHz**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11a 5785MHz****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11a 5825MHz****6dB Bandwidth****99% Occupied Bandwidth**

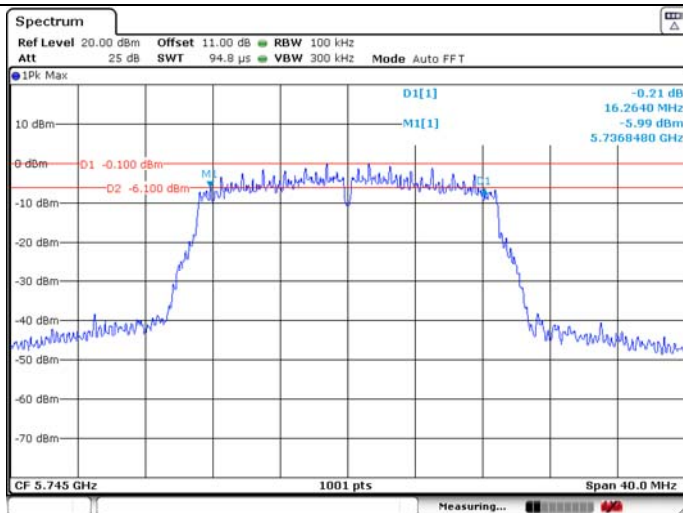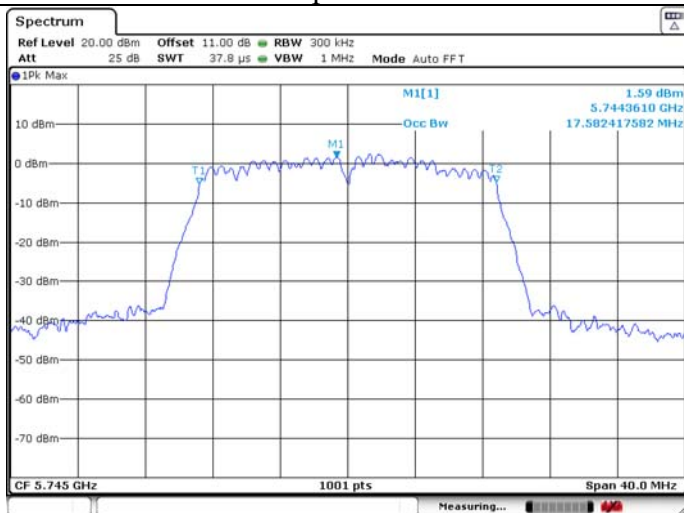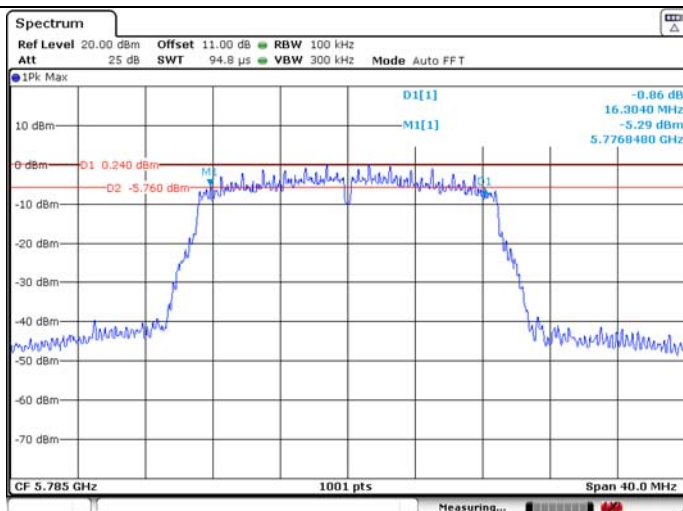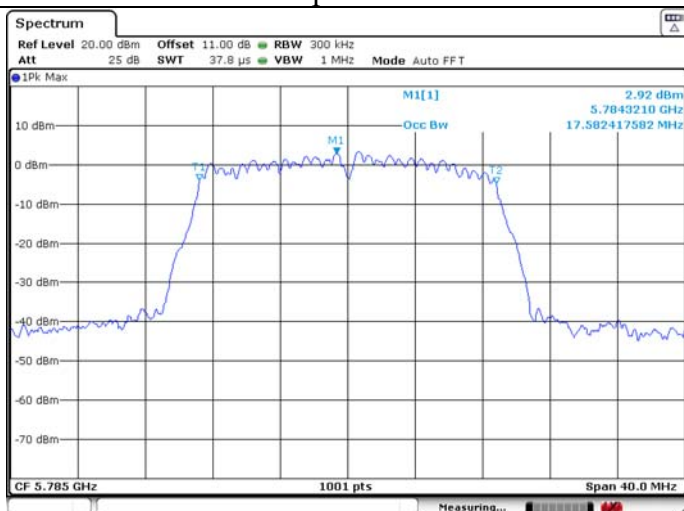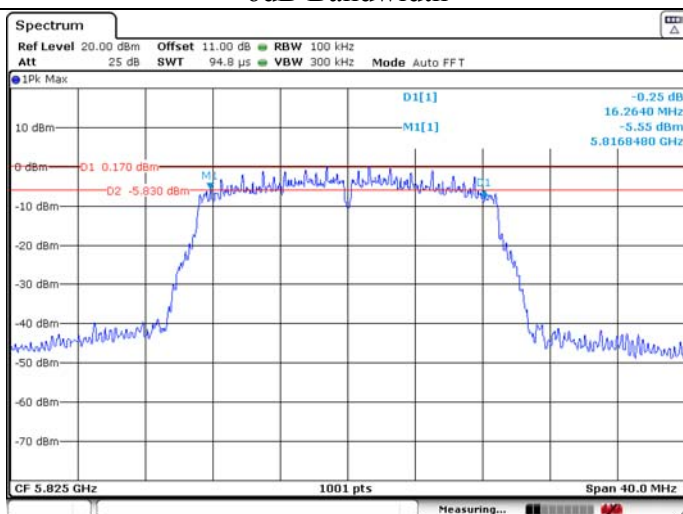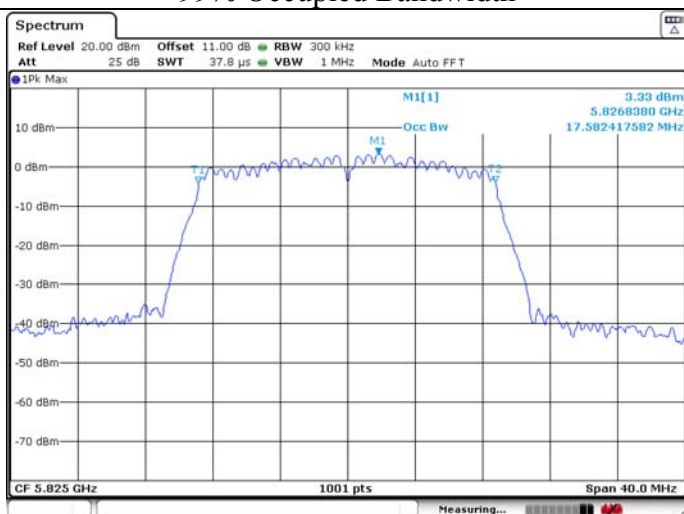
U-NII-3 IEEE 802.11n HT20 5745MHz**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT20 5785MHz****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT20 5825MHz****6dB Bandwidth****99% Occupied Bandwidth**

U-NII-3 IEEE 802.11ac VHT20 5745MHz

6dB Bandwidth

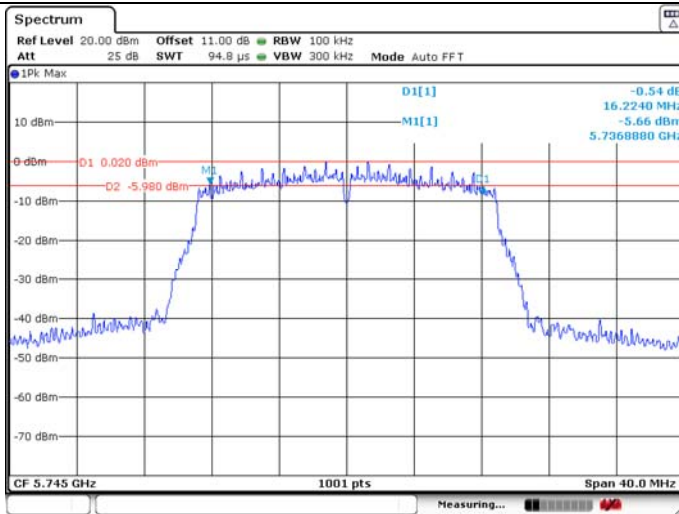


99% Occupied Bandwidth

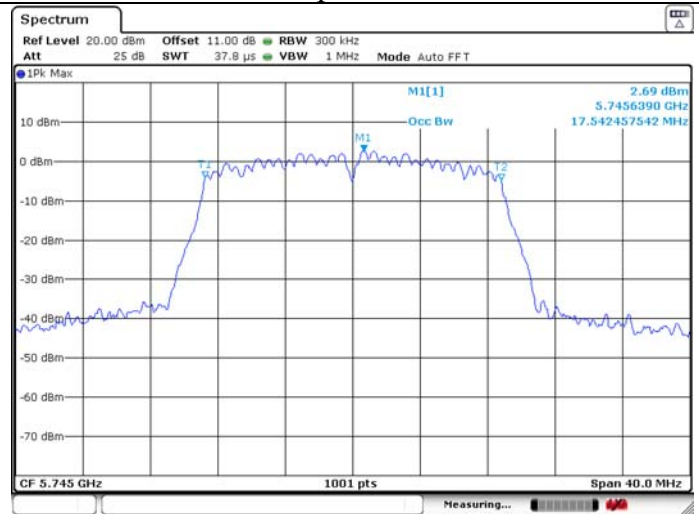


U-NII-3 IEEE 802.11ac VHT20 5785MHz

6dB Bandwidth

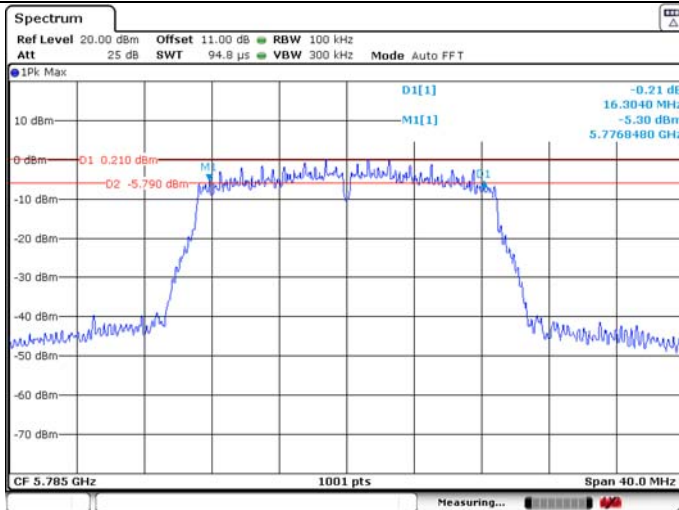


99% Occupied Bandwidth

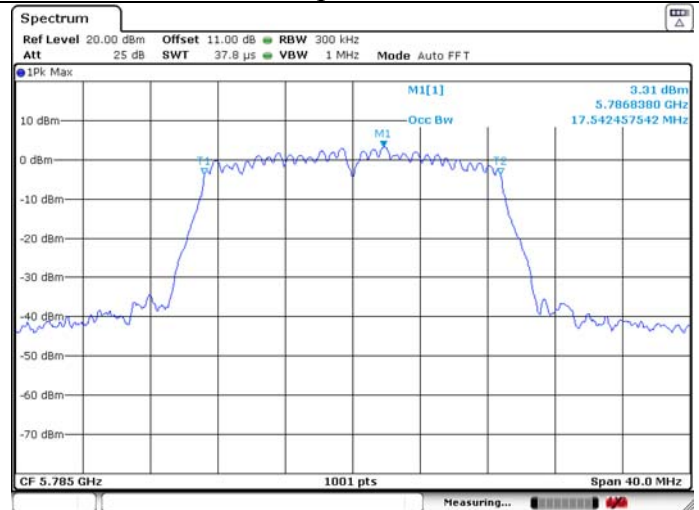





U-NII-3 IEEE 802.11ac VHT20 5825MHz



6dB Bandwidth

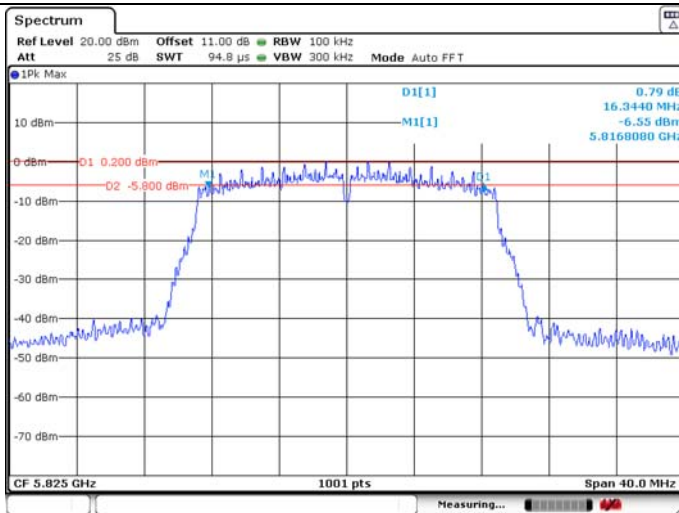

99% Occupied Bandwidth

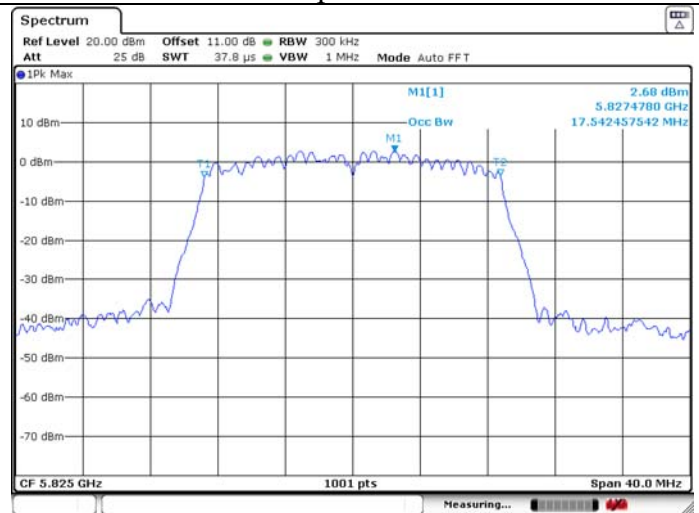

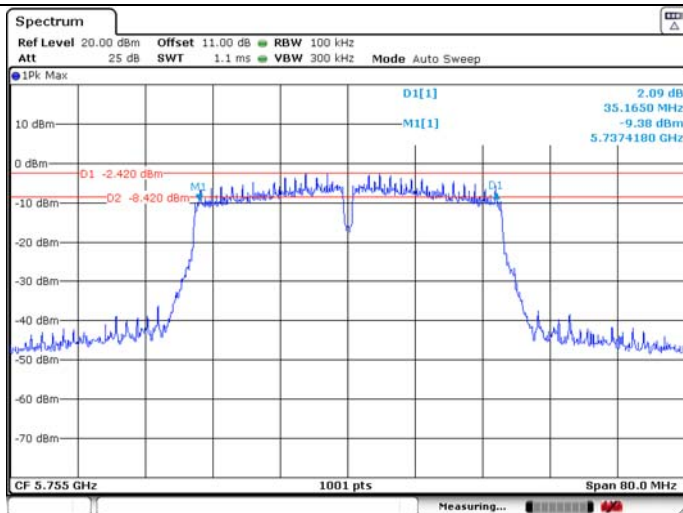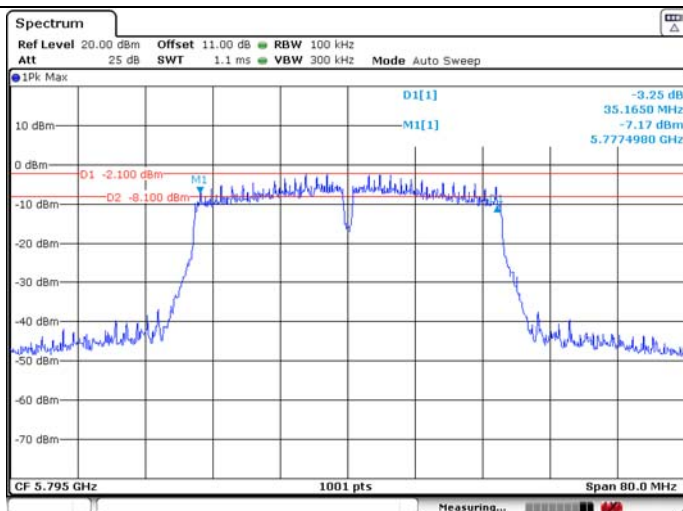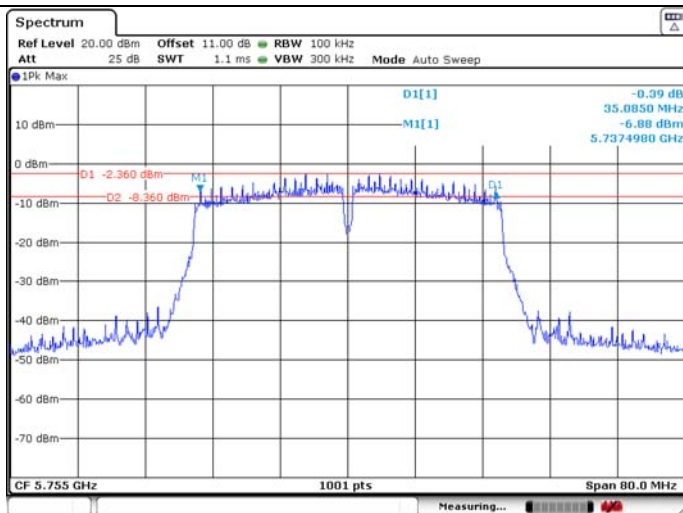U-NII-3 IEEE 802.11n HT40 5755MHz**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT40 5795MHz****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11ac VHT40 5755MHz****6dB Bandwidth****99% Occupied Bandwidth**

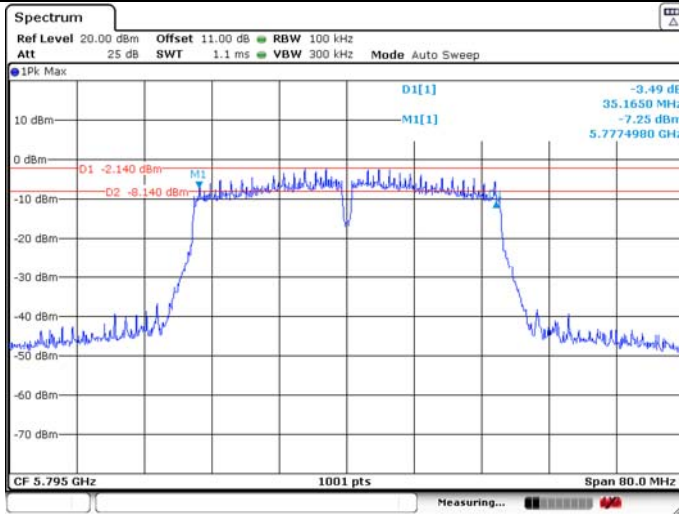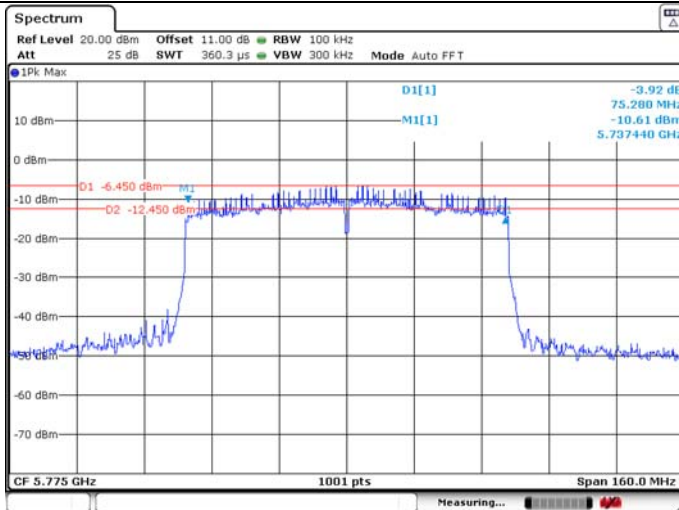U-NII-3 IEEE 802.11ac VHT40 5795MHz**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11ac VHT80 5775MHz****6dB Bandwidth****99% Occupied Bandwidth**

4. MAXIMUM CONDUCTED OUTPUT POWER


4.1. Limit

Band	EUT Type	Limit
U-NII-1	Outdoor Access Point	1W(30dBm) (Max. e.i.r.p $\leq 125\text{mW}$ at any elevation angle above 30 degrees as measured from the horizon)
	Indoor Access Point	1W(30dBm)
	Fixed point-to-point Access Point	1W(30dBm)
	Mobile and Portable Client Device	250mW(23.98dBm)
U-NII-2A	All Device	250mW(23.98dBm) or $11\text{dBm} + 10 \log B$, Which is lesser. (B is 26dB Bandwidth in MHz)
U-NII-2C	All Device	250mW(23.98dBm) or $11\text{dBm} + 10 \log B$, Which is lesser. (B is 26dB Bandwidth in MHz)
U-NII-3	All Device	1W(30dBm)

Note:

For the Band U-NII-2A and U-NII-2C, the maximum conducted output power limit calculate result refer to section 3.5.

4.2. Test Setup

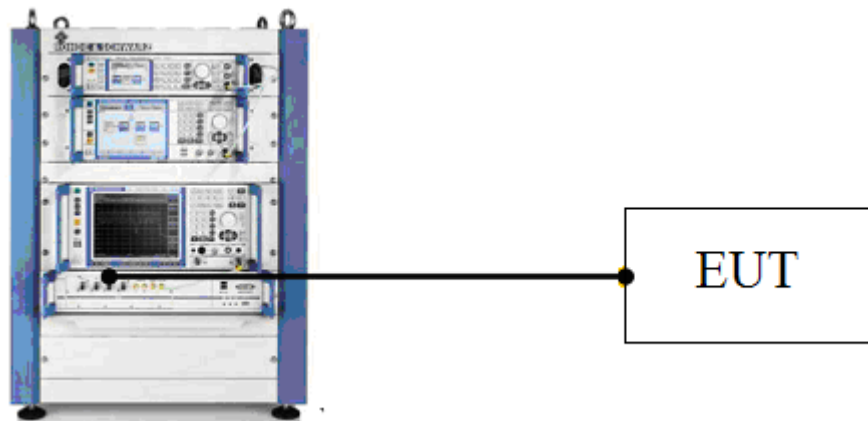

4.3. Test Procedure

- Connect EUT antenna terminal to the OSP-B157WB with RF cable.
- Set the EUT transmit continuously with maximum output power.
- Through the test software in TS8897 to control a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

4.4. Test Result

Temperature	25.4℃	Relative Humidity			56%	Test Voltage	DC 3.3V	
BAND	Test Mode	Fre (MHz)	Conducted AVG Output Power (dBm)		Total Conducted Output Power (W)	Total Conducted Output Power (dBm)	Limit (dBm)	Result
			Ant 1	Ant 2				
U-NII-1	IEEE 802.11a	5180	12.121	12.539	/	/	23.98	PASS
		5200	12.222	12.748	/	/	23.98	PASS
		5240	11.846	12.975	/	/	23.98	PASS
	IEEE 802.11n HT20	5180	10.483	10.726	0.02300	13.62	22.17	PASS
		5200	10.609	10.895	0.02379	13.76	22.17	PASS
		5240	10.853	11.086	0.02501	13.98	22.17	PASS
	IEEE 802.11ac VHT20	5180	10.573	11.335	0.02501	13.98	22.17	PASS
		5200	10.685	11.406	0.02553	14.07	22.17	PASS
		5240	10.903	11.636	0.02689	14.30	22.17	PASS
	IEEE 802.11n HT40	5190	11.847	11.277	0.02872	14.58	22.17	PASS
		5230	12.092	11.611	0.03068	14.87	22.17	PASS
	IEEE 802.11ac VHT40	5190	11.841	11.361	0.02896	14.62	22.17	PASS
		5230	12.163	11.541	0.03071	14.87	22.17	PASS
	IEEE 802.11ac VHT80	5210	12.476	12.912	0.03724	15.71	22.17	PASS
U-NII-2A	IEEE 802.11a	5260	12.441	13.201	/	/	23.98	PASS
		5300	12.492	13.388	/	/	23.98	PASS
		5320	12.465	13.398	/	/	23.98	PASS
	IEEE 802.11n HT20	5260	10.915	12.021	0.02827	14.51	22.17	PASS
		5300	12.747	12.102	0.03505	15.45	22.17	PASS
		5320	12.722	12.248	0.03550	15.50	22.17	PASS
	IEEE 802.11ac VHT20	5260	11.443	12.053	0.02998	14.77	22.17	PASS
		5300	11.430	12.234	0.03063	14.86	22.17	PASS
		5320	11.529	12.167	0.03069	14.87	22.17	PASS
	IEEE 802.11n HT40	5270	12.293	11.758	0.03195	15.04	22.17	PASS
		5310	12.364	11.848	0.03254	15.12	22.17	PASS
	IEEE 802.11ac VHT40	5270	12.219	11.801	0.03181	15.03	22.17	PASS
		5310	12.379	11.895	0.03276	15.15	22.17	PASS
	IEEE 802.11ac VHT80	5290	12.878	13.237	0.04047	16.07	22.17	PASS

BAND	Test Mode	Fre (MHz)	Conducted AVG Output Power (dBm)		Total Conducted Output Power (W)	Total Conducted Output Power (dBm)	Limit (dBm)	Result
			Ant 1	Ant 2				
U-NII-2C	IEEE 802.11a	5500	12.882	13.845	/	/	23.98	PASS
		5580	13.151	14.219	/	/	23.98	PASS
		5700	13.767	14.710	/	/	23.98	PASS
	IEEE 802.11n HT20	5500	13.156	12.598	0.03887	15.90	22.17	PASS
		5580	13.517	12.884	0.04190	16.22	22.17	PASS
		5700	11.098	12.093	0.02907	14.63	22.17	PASS
	IEEE 802.11ac VHT20	5500	11.860	12.629	0.03367	15.27	22.17	PASS
		5580	12.226	12.925	0.03631	15.60	22.17	PASS
		5700	12.802	13.487	0.04138	16.17	22.17	PASS
	IEEE 802.11n HT40	5510	12.900	12.381	0.03680	15.66	22.17	PASS
		5590	13.173	12.686	0.03932	15.95	22.17	PASS
		5670	13.605	13.079	0.04325	16.36	22.17	PASS
	IEEE 802.11ac VHT40	5510	12.817	12.344	0.03628	15.60	22.17	PASS
		5590	13.227	12.678	0.03955	15.97	22.17	PASS
		5670	13.602	13.155	0.04360	16.39	22.17	PASS
	IEEE 802.11ac VHT80	5530	13.436	13.843	0.04629	16.65	22.17	PASS
		5610	13.789	14.201	0.05024	17.01	22.17	PASS
U-NII-3	IEEE 802.11a	5745	11.490	13.160	/	/	30.00	PASS
		5785	11.536	13.221	/	/	30.00	PASS
		5825	11.551	13.209	/	/	30.00	PASS
	IEEE 802.11n HT20	5745	11.254	12.288	0.03028	14.81	28.19	PASS
		5785	11.345	12.422	0.03110	14.93	28.19	PASS
		5825	11.429	12.530	0.03180	15.02	28.19	PASS
	IEEE 802.11ac VHT20	5745	10.553	12.355	0.02856	14.56	28.19	PASS
		5785	10.563	12.339	0.02852	14.55	28.19	PASS
		5825	10.699	12.489	0.02948	14.70	28.19	PASS
	IEEE 802.11n HT40	5755	14.012	13.432	0.04723	16.74	28.19	PASS
		5795	14.043	13.581	0.04818	16.83	28.19	PASS
	IEEE 802.11ac VHT40	5755	13.962	13.523	0.04741	16.76	28.19	PASS
		5795	14.109	13.593	0.04863	16.87	28.19	PASS
	IEEE 802.11ac VHT80	5775	14.470	14.898	0.05888	17.70	28.19	PASS

5. PEAK POWER SPECTRAL DENSITY

5.1. Limit

Band	EUT Type	Limit
U-NII-1	Outdoor Access Point	17dBm/MHz
	Indoor Access Point	17dBm/MHz
	Fixed point-to-point Access Point	17dBm/MHz
	Mobile and Portable Client Device	11dBm/MHz
U-NII-2A	All Device	11dBm/MHz
U-NII-2C	All Device	11dBm/MHz
U-NII-3	All Device	30dBm/500KHz

5.2. Test Setup



5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz(For U-NII-1&U-NII-2A&U-NII-2C) 500KHz(For U-NII-3)
VBW	3MHz(For U-NII-1&U-NII-2A&U-NII-2C) 2MHz(For U-NII-3)
Span	encompass the entire 26 dB EBW or 99% OBW of the signal
Sweep Time	Auto
Number of Sweep Point	$\geq 2 \times \text{SPAN}/\text{RBW}$
Detector	RMS(power averaging)
Trace Average	≥ 100 traces

5.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 5.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker-to-peak function to set the marker to the average of the emission.
- If the duty cycle of test signal $< 98\%$, the result = max measured value + $10 \times \log(1/\text{duty cycle})$;
If the duty cycle of test signal $\geq 98\%$, the result = max measured value.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

5.5. Test Result

Temperature		25.4℃	Relative Humidity		56%	Test Voltage	DC 3.3V	
BAND	Test Mode	Fre (MHz)	Power Density (dBm/MHz)		Duty Factor (dB)	Total Power Density (dBm/MHz)	Limit (dBm/MHz)	Result
			Ant 1	Ant 2				
U-NII-1	IEEE 802.11a	5180	2.66	3.18	0.11	/	11.0	PASS
		5200	2.79	2.98	0.11	/	11.0	PASS
		5240	2.92	3.22	0.11	/	11.0	PASS
	IEEE 802.11n HT20	5180	0.50	0.71	0.12	3.73	9.19	PASS
		5200	0.31	0.47	0.12	3.52	9.19	PASS
		5240	0.74	0.73	0.12	3.86	9.19	PASS
	IEEE 802.11ac VHT20	5180	0.40	0.72	0.10	3.67	9.19	PASS
		5200	0.28	0.58	0.10	3.54	9.19	PASS
		5240	0.63	0.71	0.10	3.78	9.19	PASS
	IEEE 802.11n HT40	5190	-0.43	0.26	0.19	3.13	9.19	PASS
		5230	-0.17	0.63	0.19	3.45	9.19	PASS
	IEEE 802.11ac VHT40	5190	-0.40	0.29	0.23	3.20	9.19	PASS
		5230	-0.34	0.68	0.23	3.44	9.19	PASS
	IEEE 802.11ac VHT80	5210	-4.31	-3.42	0.37	-0.46	9.19	PASS
U-NII-2A	IEEE 802.11a	5260	4.20	4.70	0.11	/	11.0	PASS
		5300	4.46	5.23	0.11	/	11.0	PASS
		5320	4.99	5.70	0.11	/	11.0	PASS
	IEEE 802.11n HT20	5260	2.97	3.77	0.12	6.52	9.19	PASS
		5300	3.28	4.29	0.12	6.94	9.19	PASS
		5320	3.75	4.73	0.12	7.40	9.19	PASS
	IEEE 802.11ac VHT20	5260	2.83	3.52	0.10	6.30	9.19	PASS
		5300	3.30	4.06	0.10	6.80	9.19	PASS
		5320	3.68	4.76	0.10	7.36	9.19	PASS
	IEEE 802.11n HT40	5270	0.34	0.92	0.19	3.84	9.19	PASS
		5310	0.80	1.35	0.19	4.29	9.19	PASS
	IEEE 802.11ac VHT40	5270	0.37	1.02	0.23	3.95	9.19	PASS
		5310	0.96	1.58	0.23	4.52	9.19	PASS
	IEEE 802.11ac VHT80	5290	-3.38	-2.86	0.37	0.27	9.19	PASS

BAND	Test Mode	Fre (MHz)	Power Density (dBm/MHz)		Duty Factor (dB)	Total Power Density (dBm/MHz)	Limit (dBm/MHz)	Result
			Ant 1	Ant 2				
U-NII-2C	IEEE 802.11a	5500	4.40	5.59	0.11	/	11.0	PASS
		5580	3.13	4.81	0.11	/	11.0	PASS
		5700	3.53	5.14	0.11	/	11.0	PASS
	IEEE 802.11n HT20	5500	3.05	4.73	0.12	7.10	9.19	PASS
		5580	1.91	3.82	0.12	6.10	9.19	PASS
		5700	2.48	4.40	0.12	6.67	9.19	PASS
	IEEE 802.11ac VHT20	5500	3.03	1.67	0.10	5.51	9.19	PASS
		5580	1.76	3.67	0.10	5.93	9.19	PASS
		5700	2.37	4.16	0.10	6.46	9.19	PASS
	IEEE 802.11n HT40	5510	0.23	1.44	0.19	4.08	9.19	PASS
		5590	-0.66	0.84	0.19	3.36	9.19	PASS
		5670	-0.52	1.09	0.19	3.56	9.19	PASS
	IEEE 802.11ac VHT40	5510	0.41	1.39	0.23	4.17	9.19	PASS
		5590	-0.69	0.86	0.23	3.39	9.19	PASS
		5670	-0.47	1.18	0.23	3.67	9.19	PASS
	IEEE 802.11ac VHT80	5530	-4.33	-2.83	0.37	-0.13	9.19	PASS
		5610	-5.03	-3.34	0.37	-0.72	9.19	PASS

BAND	Test Mode	Fre (MHz)	Power Density (dBm/500KHz)		Duty Factor (dB)	Total Power Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
			Ant 1	Ant 2				
U-NII-3	IEEE 802.11a	5745	1.83	3.74	0.11	/	30.0	PASS
		5785	2.51	3.72	0.11	/	30.0	PASS
		5825	2.18	3.87	0.11	/	30.0	PASS
	IEEE 802.11n HT20	5745	1.35	2.83	0.12	5.28	28.19	PASS
		5785	1.63	3.47	0.12	5.77	28.19	PASS
		5825	1.84	3.30	0.12	5.76	28.19	PASS
	IEEE 802.11ac VHT20	5745	1.14	2.54	0.10	5.00	28.19	PASS
		5785	1.75	2.79	0.10	5.41	28.19	PASS
		5825	1.68	3.17	0.10	5.60	28.19	PASS
	IEEE 802.11n HT40	5755	-1.28	-3.45	0.19	0.97	28.19	PASS
		5795	-1.06	0.35	0.19	2.90	28.19	PASS
	IEEE 802.11ac VHT40	5755	-1.44	-0.38	0.23	2.36	28.19	PASS
		5795	-1.21	0.12	0.23	2.75	28.19	PASS
	IEEE 802.11ac VHT80	5775	-5.36	-3.74	0.37	-1.09	28.19	PASS