



# TEST REPORT

**APPLICANT** : Shenzhen Chainway Information Technology Co., Ltd.

**PRODUCT NAME** : Mobile Data Terminal

**MODEL NAME** : C60

**BRAND NAME** : CHAINWAY

**FCC ID** : 2AC6AC60

**STANDARD(S)** : 47 CFR Part 22 Subpart H

**RECEIPT DATE** : 2020-10-14

**TEST DATE** : 2020-12-23 to 2020-12-28

**ISSUE DATE** : 2020-12-28

Edited by:

Zeng Xiaoying  
Zeng Xiaoying (Rapporteur)

Approved by:

Peng Huarui  
Peng Huarui ( Supervisor )



## DIRECTORY

<b>1. Technical Information</b> .....	<b>3</b>
<b>1.1. Applicant and Manufacturer Information</b> .....	<b>3</b>
<b>1.2. Equipment Under Test (EUT) Description</b> .....	<b>3</b>
<b>1.3. Maximum E.R.P./E.I.R.P. and Emission Designator</b> .....	<b>4</b>
<b>1.4. Test Standards and Results</b> .....	<b>5</b>
<b>1.5. Environmental Conditions</b> .....	<b>6</b>
<b>2. 47 CFR Part 2, Part 22H Requirements</b> .....	<b>7</b>
<b>2.1. Conducted RF Output Power</b> .....	<b>7</b>
<b>2.2. Peak to Average Ratio</b> .....	<b>9</b>
<b>2.3. Occupied Bandwidth</b> .....	<b>10</b>
<b>2.4. Frequency Stability</b> .....	<b>13</b>
<b>2.5. Conducted Out of Band Emissions</b> .....	<b>15</b>
<b>2.6. Band Edge</b> .....	<b>18</b>
<b>2.7. Determining E.R.P. and/or E.I.R.P. from conducted RF output power measurements</b> .....	<b>20</b>
<b>2.8. Radiated Out of Band Emissions</b> .....	<b>22</b>
<b>Annex A Test Uncertainty</b> .....	<b>28</b>
<b>Annex B Testing Laboratory Information</b> .....	<b>29</b>

Change History		
Version	Date	Reason for change
1.0	2020-12-28	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Shenzhen Chainway Information Technology Co., Ltd.
<b>Applicant Address:</b>	9F Building 2, Daqian Industrial Park, District 67, XingDong Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
<b>Manufacturer:</b>	Shenzhen Chainway Information Technology Co., Ltd.
<b>Manufacturer Address:</b>	9F Building 2, Daqian Industrial Park, District 67, XingDong Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Mobile Data Terminal	
<b>Serial No.:</b>	(N/A, marked #1 by test site)	
<b>Hardware Version:</b>	A115_MB_V2	
<b>Software Version:</b>	c60_yuancheng_gitb4ed7c0_20200924	
<b>Modulation Type:</b>	CDMA2000 1xRTT: QPSK CDMA2000 1xEVDO 0: QPSK,8PSK	
<b>Operating Frequency Range:</b>	CDMA 2000 BC0	Tx: 824MHz-849MHz Rx: 869MHz-894MHz
<b>Antenna Type:</b>	Fixed Internal Antenna	
<b>Antenna Gain:</b>	CDMA 2000 BC0	0.3dBi
<b>Accessory Information:</b>	Battery	
	Brand Name:	Hixon
	Model No.:	J855
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	4250.00mAh
	Rated Voltage:	3.80V
	Charge Limit:	4.35V
	Manufacturer:	Hixon(Shenzhen) Technology Limited



<b>Accessory Information:</b>	AC Adapter	
	Brand Name:	
	Model No.:	NA010050020
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V=2A
	Rated Input:	100-240V~50/60Hz, 0.5A
	Manufacturer:	Shenzhen Shi Ying Yuan Electronics Co., Ltd.

**Note 1:** According to the certificate holder, they declared that the model C60 has two internal models 4710 and 6603. The difference between the two internal models is that the scan head is different. Except for the above differences, their circuit design, layout and internal wiring are the same. Due to the above changes, we have evaluated and retested worst case of internal model 6603, the test results are better than internal model 4710, all other test items are no need to be retested. The main measuring internal model is 4710, only the results for 4710 were recorded in this report.

**Note 2:** SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.

**Note 3:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator

Test Mode	Maximum E.R.P./E.I.R.P. (W)	Emission Designator
CDMA2000 BC0	0.179	1M27F9W



## 1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-12 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-12 Edition)	Public Mobile Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination/ Remark
1	2.1046	Conducted RF Output Power	Dec 27, 2020	Zhou Xiaolong	PASS	No deviation
2	24.232(d)	Peak -Average Ratio	N/A	N/A	N/A <sub>Note1</sub>	N/A
3	2.1049	Occupied Bandwidth	Dec 25, 2020	Zhou Xiaolong	PASS	No deviation
4	2.1055, 22.355	Frequency Stability	Dec 28, 2020	Zhou Xiaolong	PASS	No deviation
5	2.1051, 22.917(a)	Conducted Out of Band Emissions	Dec 25, 2020	Zhou Xiaolong	PASS	No deviation
6	2.1051, 22.917(a)	Band Edge	Dec 25, 2020	Zhou Xiaolong	PASS	No deviation
7	22.913(a)	Transmitter Radiated Power (EIPR/E.R.P.)	Dec 28, 2020	Peng Xuewei	PASS	No deviation
8	2.1051, 22.917(a)	Radiated Out of Band Emissions	Dec 23, 2020	Peng Xuewei	PASS	No deviation

**Note 1:** This test case does not support CDMA BC 0 band.

**Note 1:** The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03r01 and ANSI/TIA-603-E-2016.

**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 23.5dB contains two parts that cable loss 13.5dB and Attenuator 10dB.



**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

## 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

## 2.47 CFR Part 2, Part 22H Requirements


### 2.1. Conducted RF Output Power

#### 2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

#### 2.1.2. Test Description

Test Setup:

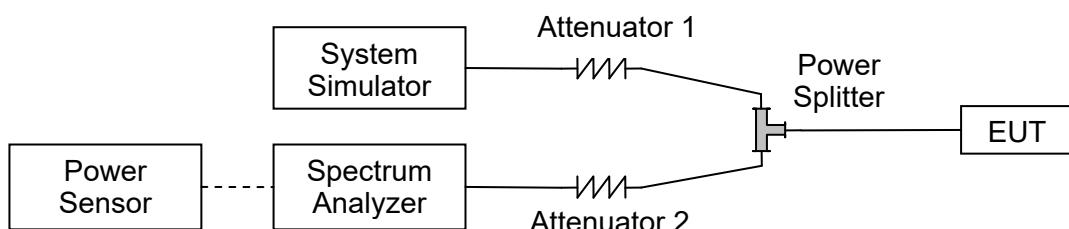

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.



### 2.1.3. Test Result

CDMA2000 BC0	Average Power (dBm)		
<b>TX Channel</b>	<b>1013</b>	<b>384</b>	<b>777</b>
<b>Frequency (MHz)</b>	<b>824.7</b>	<b>836.52</b>	<b>848.31</b>
1xRTT RC1 SO55	24.21	24.23	24.18
1xRTT RC3 SO55	24.27	24.15	24.12
1xRTT RC3 SO32 (F+SCH)	24.07	24.08	24.20
1xRTT RC3 SO32 (+SCH)	24.02	24.07	24.15
1xEVDO RTAP 153.6Kbps	24.29	24.28	24.39
1xEVDO RETAP 4096Bits	23.10	23.19	23.27


## 2.2. Peak to Average Ratio

### 2.2.1. Requirement

According to FCC 24.232(d) the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 2.2.2. Test Description

Test Setup:

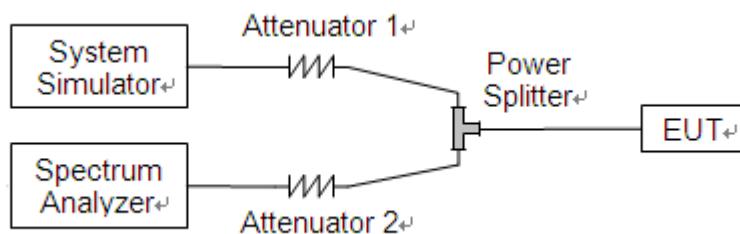

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

### 2.2.3. Test Procedure

- 1 .For GSM/EDGE operating mode:
  - a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
  - b. Set EUT in maximum output power, and triggered the burst signal.
  - c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.
2. For UMTS operating mode:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.

### 2.2.4. Test Result

**Note:** This test case does not support CDMA BC 0 band.


## 2.3. Occupied Bandwidth

### 2.3.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

### 2.3.2. Test Description


Test Setup:

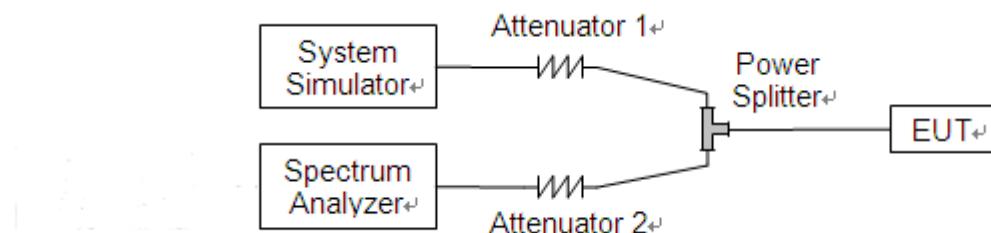

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

## 2.3.3. Test Result


CDMA2000 BC0				
Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
1xRTT	1013	824.7	1.27	1.43
	384	836.52	1.27	1.43
	777	848.31	1.27	1.43
1xEVDO Rev 0	1013	824.7	1.27	1.42
	384	836.52	1.27	1.43
	777	848.31	1.27	1.42

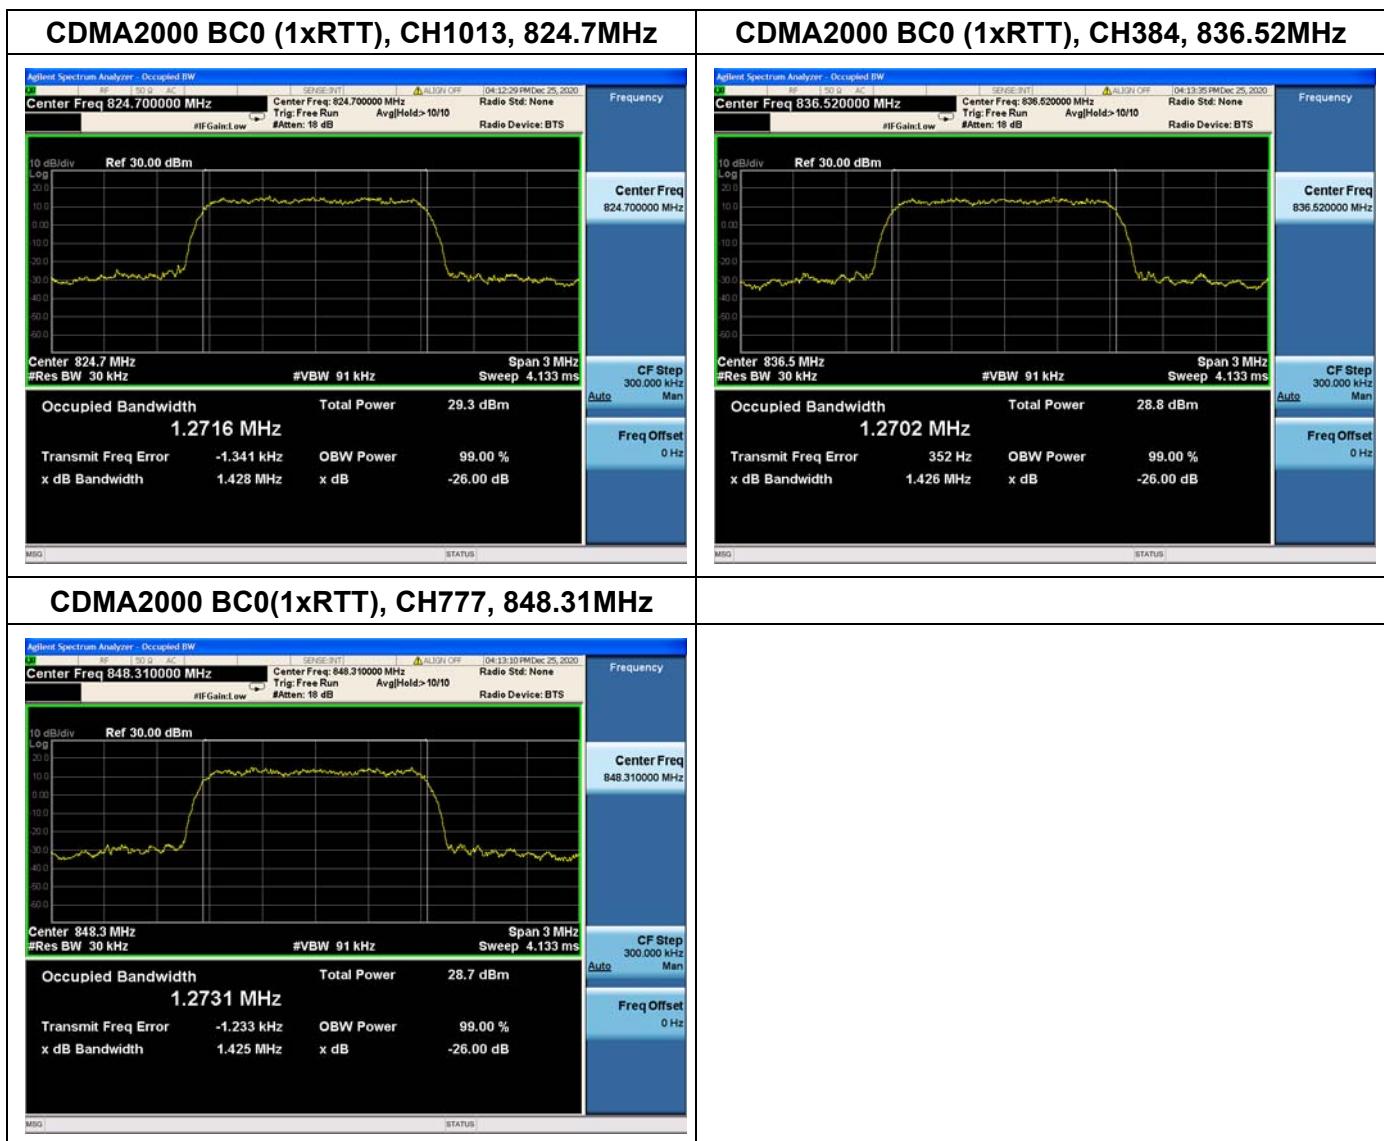



REPORT No.: SZ20100035W07

### CDMA2000 BC0(1xEVDO), CH1013, 824.7MHz

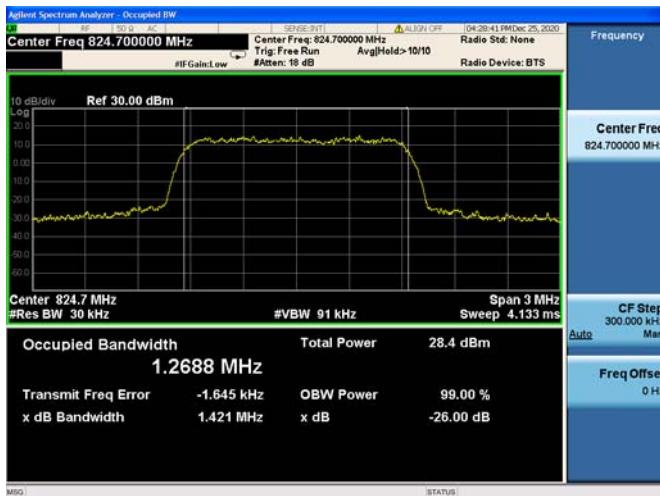

### CDMA2000 BC0(1xEVDO), CH384, 836.52MHz



### CDMA2000 BC0(1xEVDO), CH777, 848.31MHz



MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.  
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525  
Http://www.morlab.cn E-mail: service@morlab.cn

## 2.4. Frequency Stability

### 2.4.1. Requirement


According to FCC section 22.355 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

**Note:** The operating temperature of EUT is from -20°C to 50°C, which are specified by the applicant.

### 2.4.2. Test Description

Test Setup:

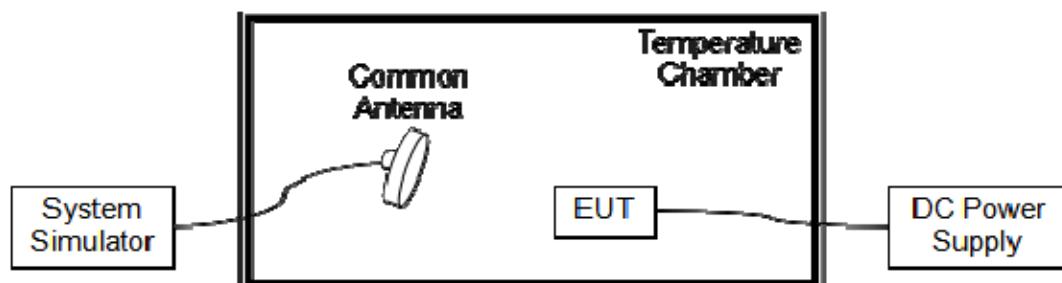

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.



### 2.4.3. Test Result

The nominal, highest and lowest extreme voltages are separately 3.80V, 4.35V and 3.00V, which are specified by the applicant; the normal temperature here used is 20°C.

CDMA2000 BC0(1xRTT), CH384, 836.52MHz					
Limit =±2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.80	+20(Ref)	52	0.062	PASS
100		-20	36	0.043	
100		-10	-24	-0.029	
100		0	35	0.042	
100		+10	-15	-0.018	
100		+20	31	0.037	
100		+30	21	0.025	
100		+40	22	0.026	
100		+50	35	0.042	
115	4.35	+20	19	0.023	
85	3.23	+20	52	0.062	

CDMA2000 BC0(1xEVDO), CH384, 836.52MHz					
Limit =±2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.80	+20(Ref)	20	0.024	PASS
100		-20	-53	-0.063	
100		-10	-23	-0.027	
100		0	18	0.022	
100		+10	-39	-0.047	
100		+20	51	0.061	
100		+30	21	0.025	
100		+40	37	0.044	
100		+50	43	0.051	
115	4.35	+20	27	0.032	
85	3.23	+20	-49	0.059	


## 2.5. Conducted Out of Band Emissions

### 2.5.1. Requirement

According to FCC section 22.917(a) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10\log(P)$  dB. This calculated to be -13dBm. The measurement frequency range is from 30MHz to the 10<sup>th</sup> harmonic of the fundamental frequency.


### 2.5.2. Test Description


Test Setup:

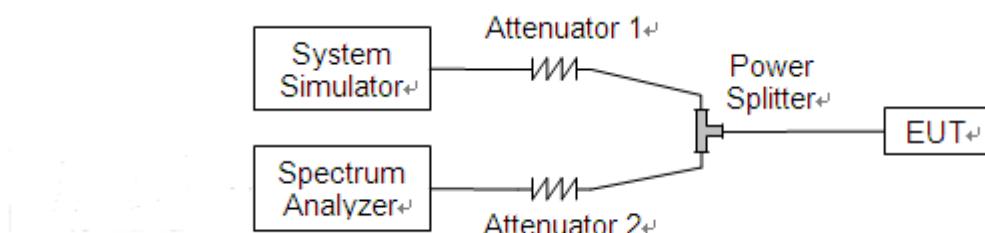

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

## 2.5.3. Test Result

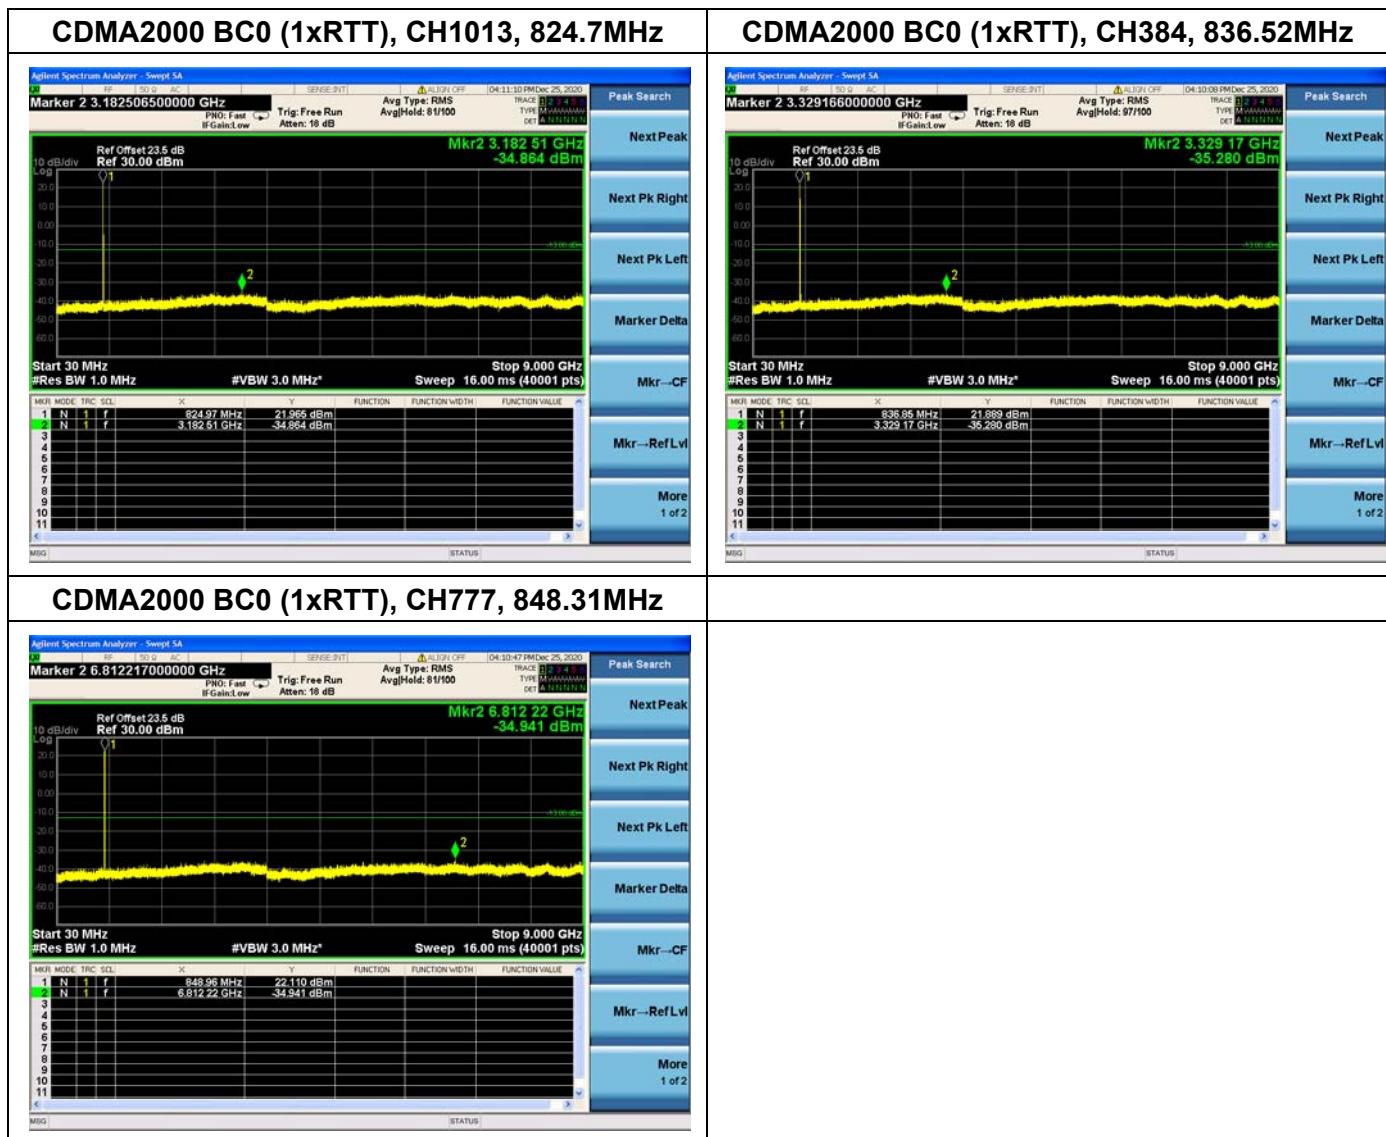

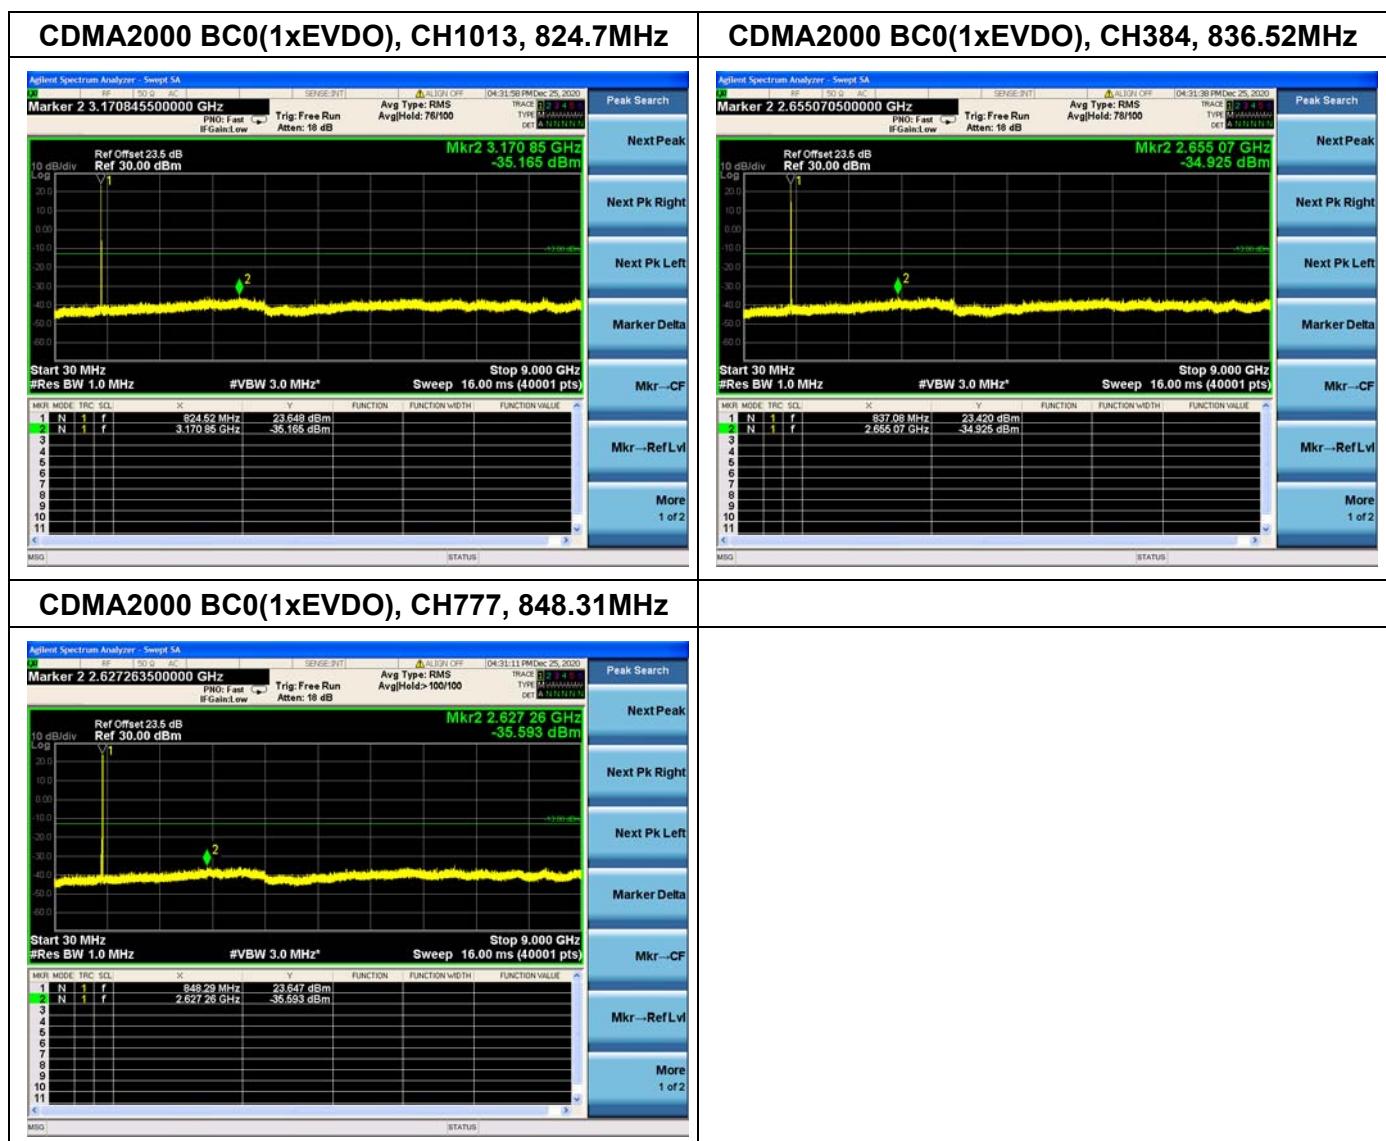


## 2.6. Band Edge

### 2.6.1. Requirement

According to FCC section 22.917(b) in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

### 2.6.2. Test Description


Test Setup:

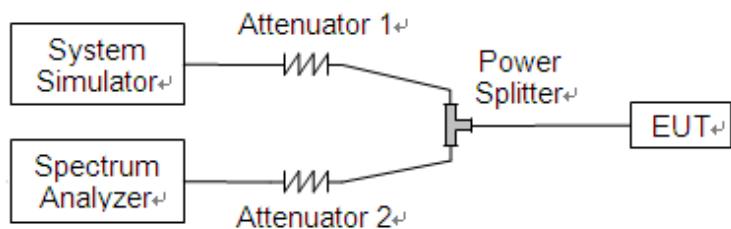

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

### 2.6.3. Test Result

The lowest and highest channels are tested to verify the band edge emissions.

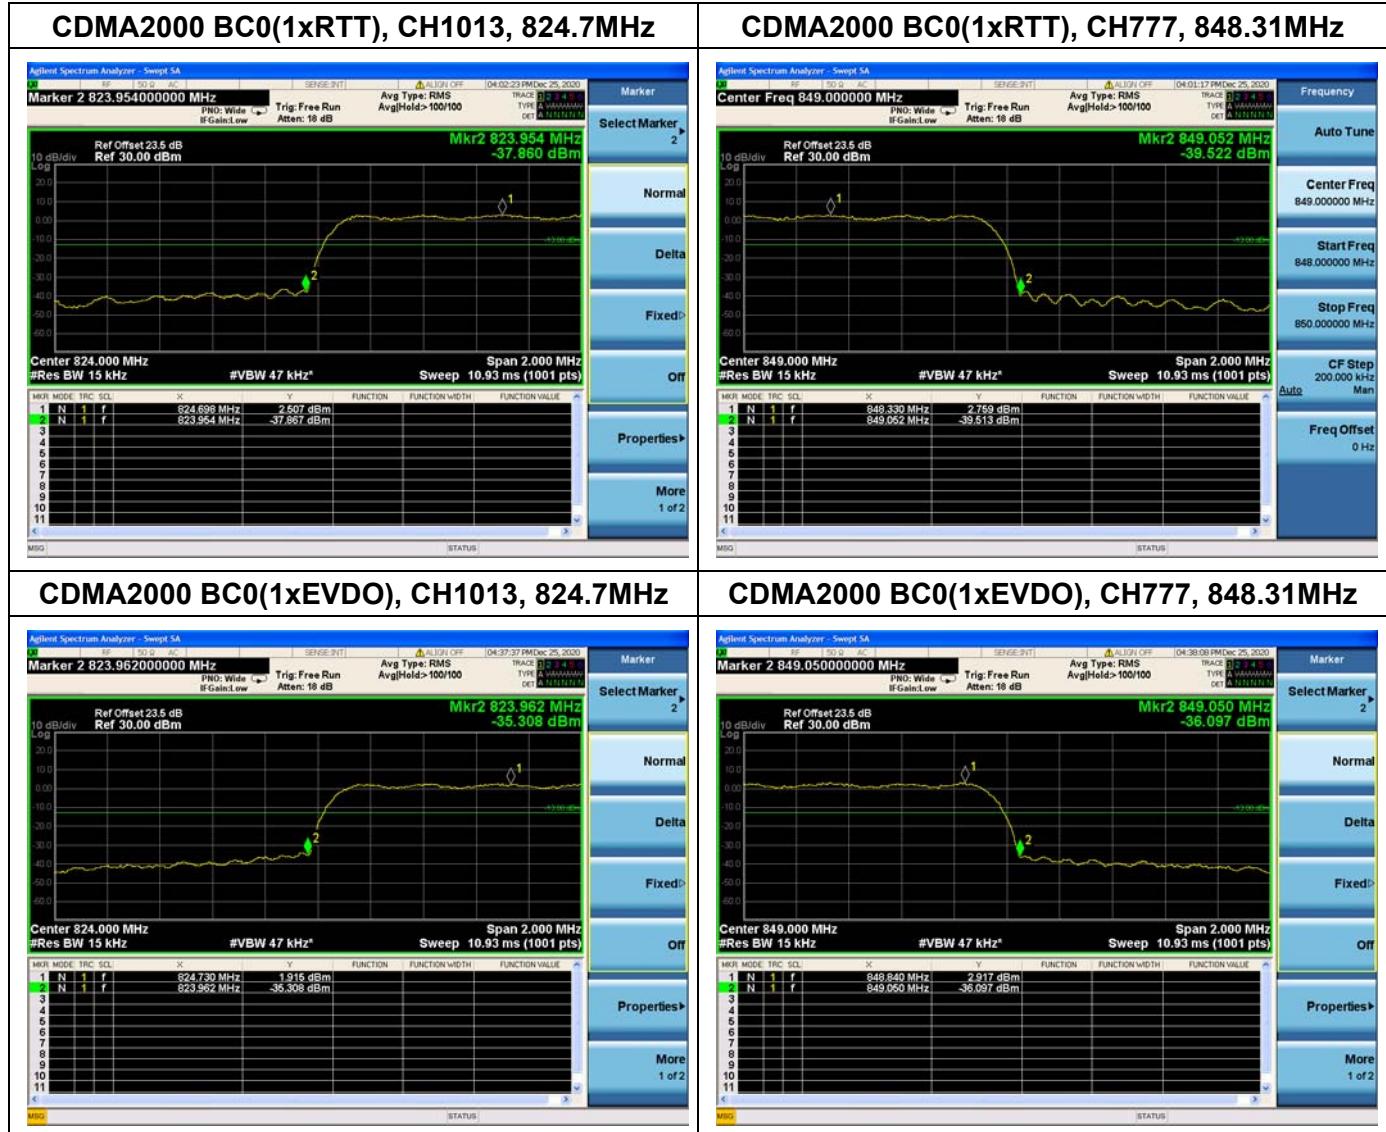



## 2.7. Determining E.R.P. and/or E.I.R.P. from conducted RF output power measurements

### 2.7.1. Requirement

According to FCC section 22.913, the Effective Radiated Power (E.R.P.) of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

### 2.7.2. Test Description

The test setups refer to section 2.1.3

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded. Please refer to section 2.1.3 of this report.

The relevant equation for determining the maximum E.R.P. or E.I.R.P. from the measured RF output power is given in Equation (1) as follows:

$$\text{E.R.P. or E.I.R.P.} = P_{\text{Meas}} + G_T$$

Where:

E.R.P. or E.I.R.P. effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , e.g., dBm or dBW)

$P_{\text{Meas}}$  measured transmitter output power or PSD, in dBm or dBW

$G_T$  gain of the transmitting antenna, in dBd (E.R.P.) or dBi (E.I.R.P.)

For devices utilizing multiple antennas, see ANSI C63.25-2015 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

The following equations demonstrate the mathematical relationship between E.R.P. and E.I.R.P.:

a) E.R.P. = E.I.R.P. - 2.15, where E.R.P. and E.I.R.P. are expressed in consistent units.

b) E.I.R.P. = E.R.P. + 2.15, where E.R.P. and E.I.R.P. are expressed in consistent units.



### 2.7.3. Test Result

CDMA2000 BC0								
Band	Channel	Frequency (MHz)	PCL	Measured E.R.P.		Limit		Verdict
				dBm	W	dBm	W	
1xRTT	1013	824.70	5	22.42	0.175	38.5	7	PASS
	384	836.52	5	22.38	0.173			PASS
	777	848.31	5	22.35	0.172			PASS
1xEVDO Rev 0	1013	824.70	5	22.44	0.175	38.5	7	PASS
	384	836.52	5	22.43	0.175			PASS
	777	848.31	5	22.54	0.179			PASS

**Note 1:** Only the worst data were recorded in this report.

## 2.8. Radiated Out of Band Emissions


### 2.8.1. Requirement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10\log(P)$  dB. This calculated to be -13dBm. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency.


### 2.8.2. Test Description

Test Setup:

#### 1) Below 1GHz

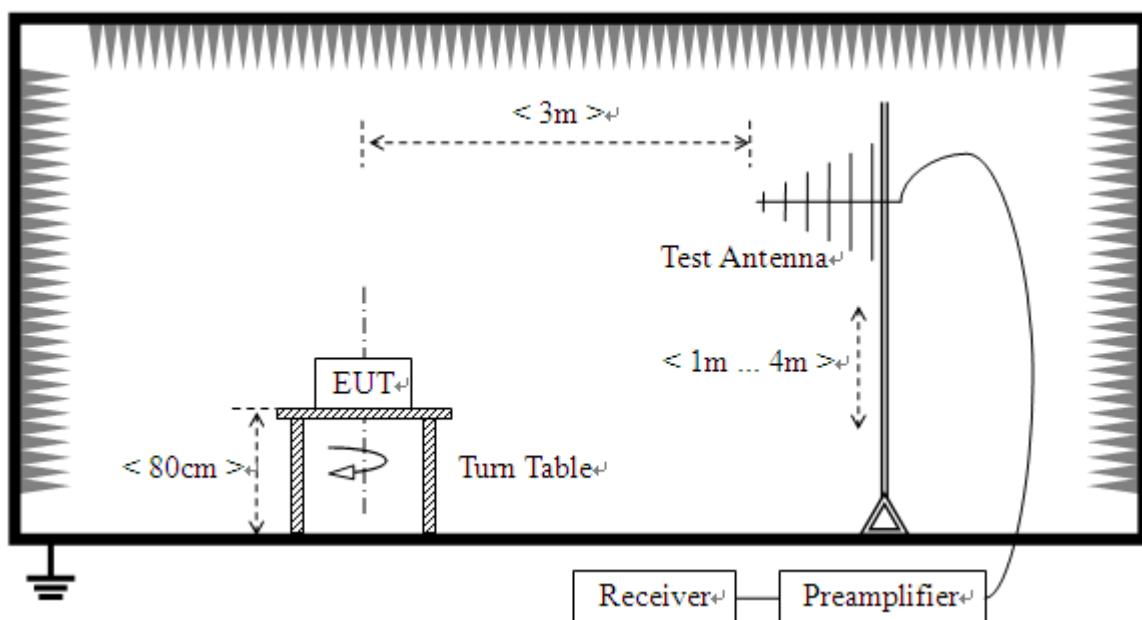

## 2) Above 1GHz

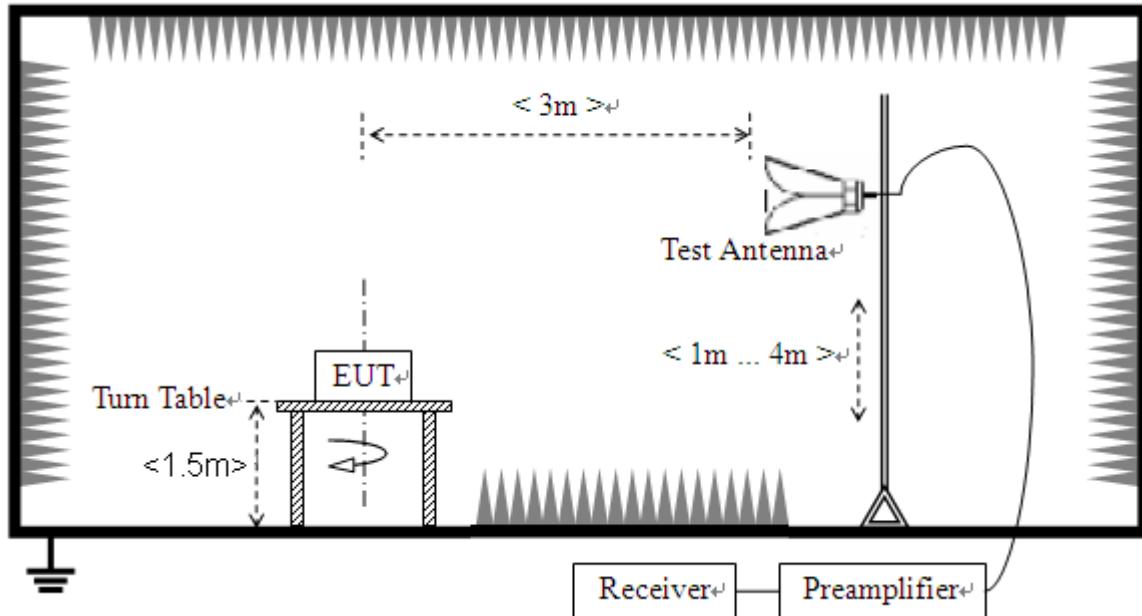

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power, and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

**Note:** When doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

### 2.8.3. Test Procedure

KDB 971168 D01v03 Section 5.8 and ANSI/TIA-603-E-2016.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.



## 2.8.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\_TX} - P_{SUBST\_RX} - L_{SUBST\_CABLES} + G_{SUBST\_TX\_ANT}$$

$$A_{TOT} = L_{CABLES} + A_{SUBST}$$

Where  $A_{SUBST}$  is the final substitution correction including receive antenna gain.

$P_{SUBST\_TX}$  is signal generator level,

$P_{SUBST\_RX}$  is receiver level,

$L_{SUBST\_CABLES}$  is cable losses including TX cable,

$G_{SUBST\_TX\_ANT}$  is substitution antenna gain.

$A_{TOT}$  is total correction factor including cable loss and substitution correction


During the test, the data of  $A_{TOT}$  was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of  $A_{TOT}$ .

**Note1:** The power of the EUT transmitting frequency should be ignored.


**Note2:** All test mode and condition mentioned were considered and evaluated respectively by performing full test, only the worst data were recorded and reported.

**Note3:** All spurious emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

## CDMA2000 BC0(1xRTT), Low Channel

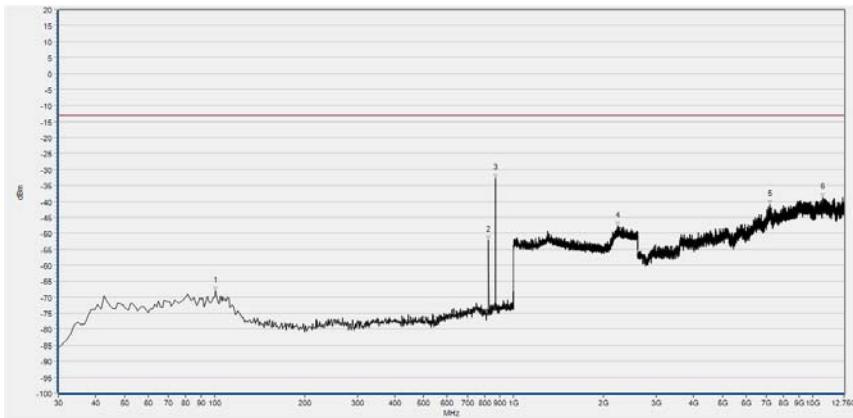


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	100.810	-68.04	-13.00	Horizontal	PASS
2	824.430	-52.12	-13.00	Horizontal	N/A
3	870.020	-32.73	-13.00	Horizontal	N/A
4	2228.651	-47.61	-13.00	Horizontal	PASS
5	7190.480	-41.06	-13.00	Horizontal	PASS
6	10819.304	-38.84	-13.00	Horizontal	PASS

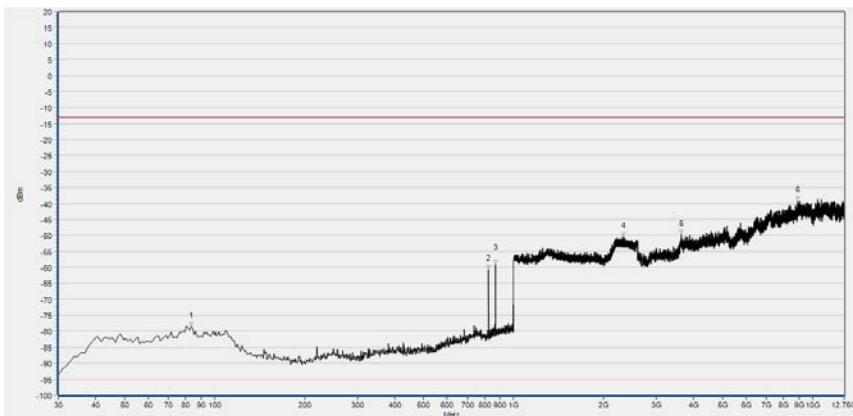

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	83.350	-78.60	-13.00	Vertical	PASS
2	824.430	-60.59	-13.00	Vertical	N/A
3	870.020	-59.10	-13.00	Vertical	N/A
4	2324.050	-50.45	-13.00	Vertical	PASS
5	3644.717	-49.73	-13.00	Vertical	PASS
6	8921.831	-39.22	-13.00	Vertical	PASS

## CDMA2000 BC0(1xRTT), Mid Channel

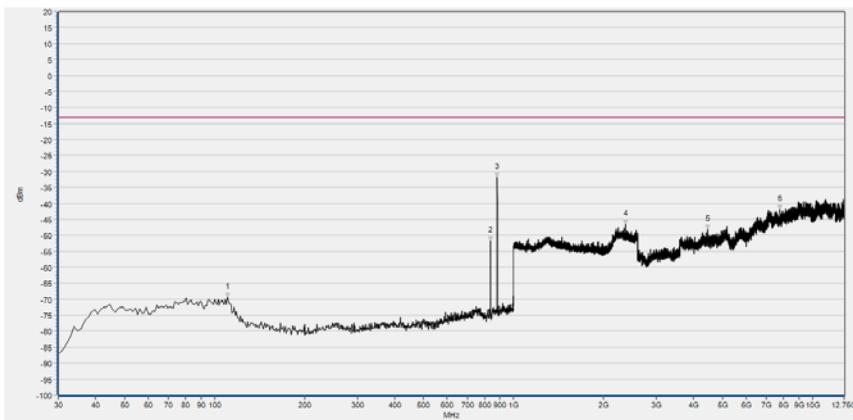


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	110.510	-69.44	-13.00	Horizontal	PASS
2	836.070	-51.66	-13.00	Horizontal	N/A
3	881.660	-31.93	-13.00	Horizontal	N/A
4	2365.026	-46.64	-13.00	Horizontal	PASS
5	4460.556	-48.09	-13.00	Horizontal	PASS
6	7771.904	-41.86	-13.00	Horizontal	PASS




No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	82.380	-78.71	-13.00	Vertical	PASS
2	836.070	-57.76	-13.00	Vertical	N/A
3	881.660	-61.39	-13.00	Vertical	N/A
4	1842.577	-55.36	-13.00	Vertical	PASS
5	3622.568	-49.27	-13.00	Vertical	PASS
6	9405.428	-38.74	-13.00	Vertical	PASS

## CDMA2000 BC0(1xRTT), High Channel

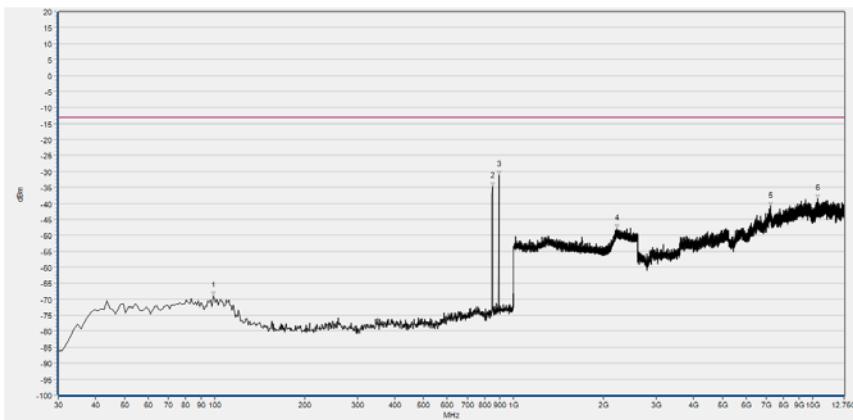

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	98.870	-68.93	-13.00	Horizontal	PASS
2	848.680	-34.70	-13.00	Horizontal	N/A
3	893.300	-31.09	-13.00	Horizontal	N/A
4	2218.407	-48.03	-13.00	Horizontal	PASS
5	7227.396	-40.94	-13.00	Horizontal	PASS
6	10411.384	-38.62	-13.00	Horizontal	PASS

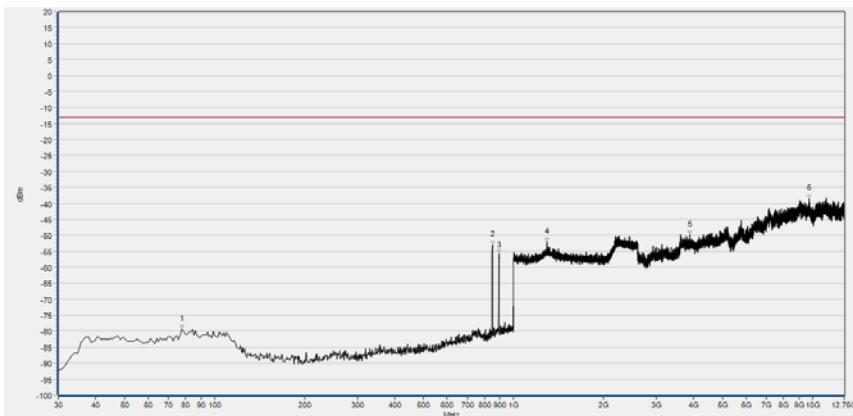

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	77.530	-79.48	-13.00	Vertical	PASS
2	848.680	-52.96	-13.00	Vertical	N/A
3	894.270	-55.68	-13.00	Vertical	N/A
4	1291.317	-52.14	-13.00	Vertical	PASS
5	3892.053	-49.98	-13.00	Vertical	PASS
6	9721.058	-38.46	-13.00	Vertical	PASS



## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Output Power	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77 dB
Radiated Emission	±2.95dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	Weinschel	2020.04.15	2021.04.14
Attenuator 1	(N/A.)	10dB	Resnet	2020.04.15	2021.04.14
Attenuator 2	(N/A.)	3dB	Resnet	2020.04.15	2021.04.14
EXA Signal Analyzer	MY51511149	N9020A	Agilent	2020.07.27	2021.07.26
System Simulator	6200995016	MT8820C	Anritsu	2020.01.13	2021.01.12
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Temperature Chamber	(N/A)	HUT705P	CHONGQING HANBA EXPERIMENTAL EQUIPMENT CO.,LTD	2020.03.25	2021.03.24
Computer	T430i	Think Pad	Lenovo	N/A	N/A



#### 4.2 Radiated Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
System Simulator	152038	CMW500	R&S	2020.01.13	2021.01.12
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2019.05.24	2022.05.23
Coaxial cable (N male) (9kHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-CDM A2000 BC0	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2019.07.13	2022.07.12

END OF REPORT