




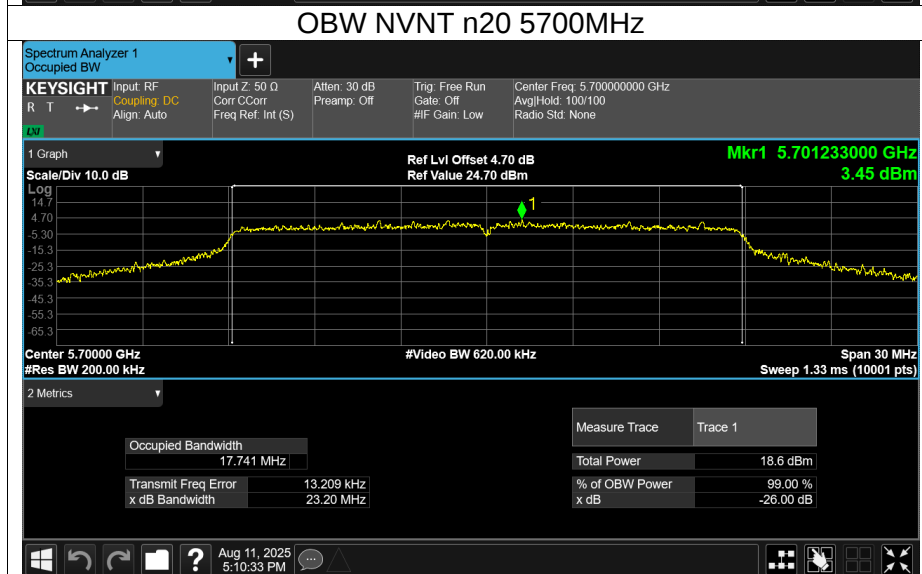
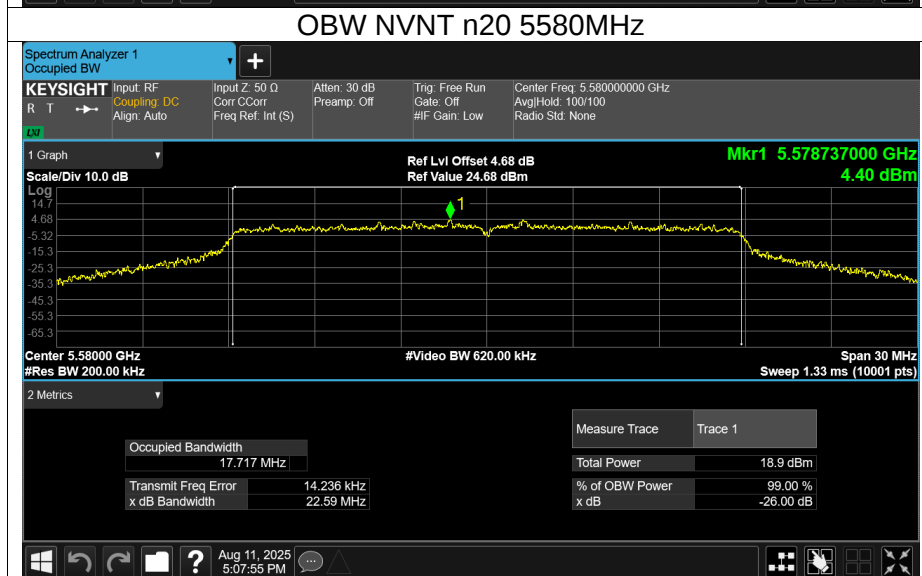
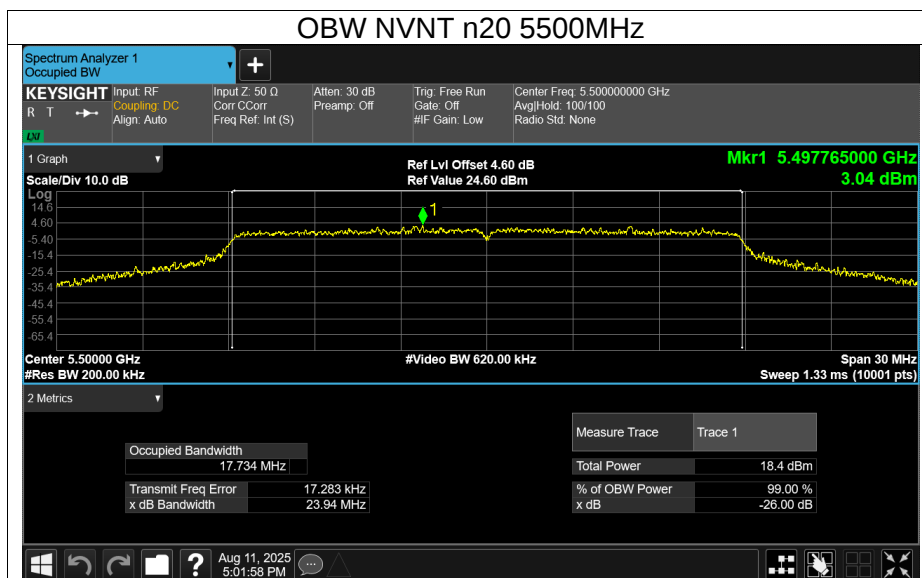
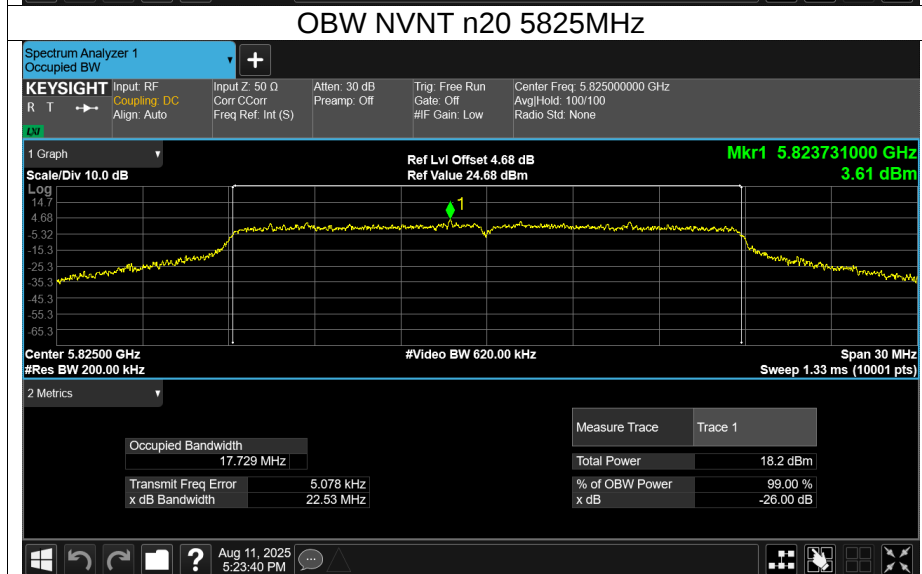
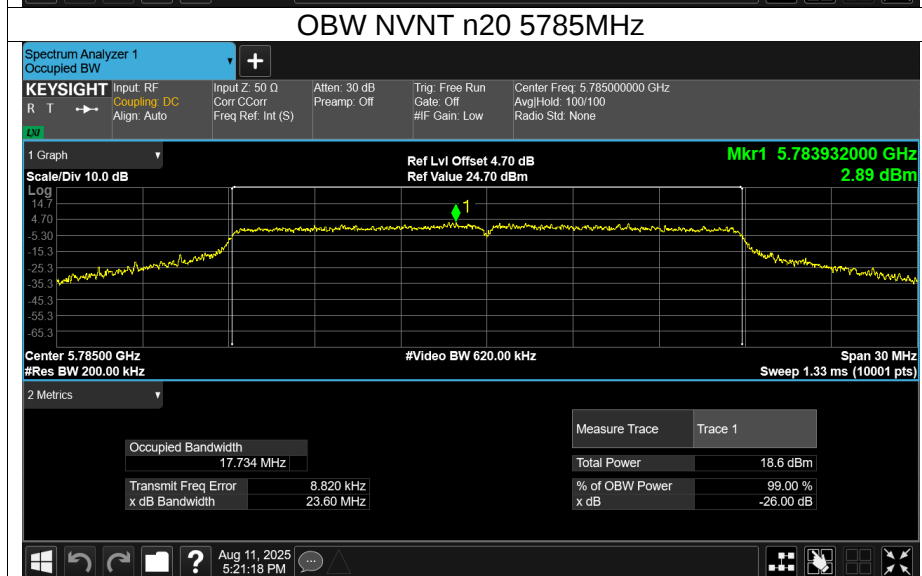
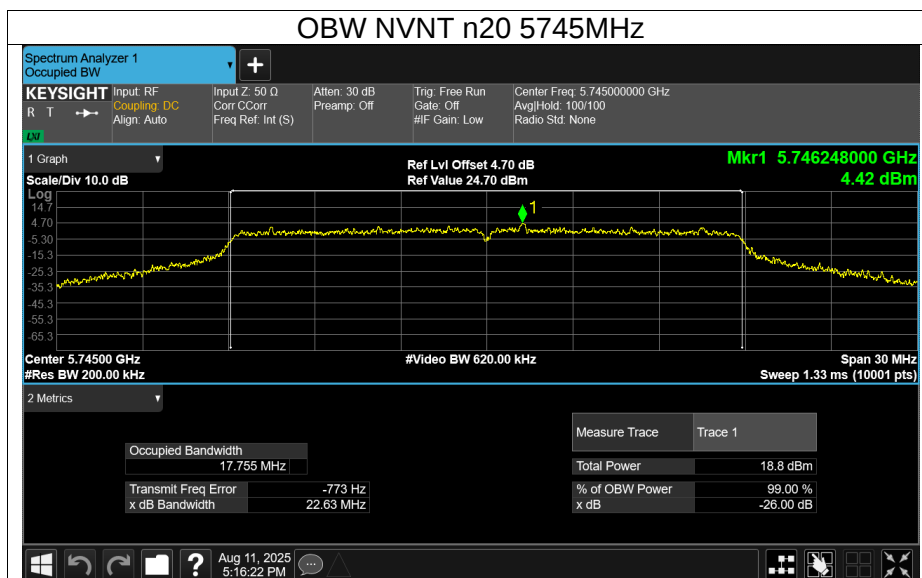
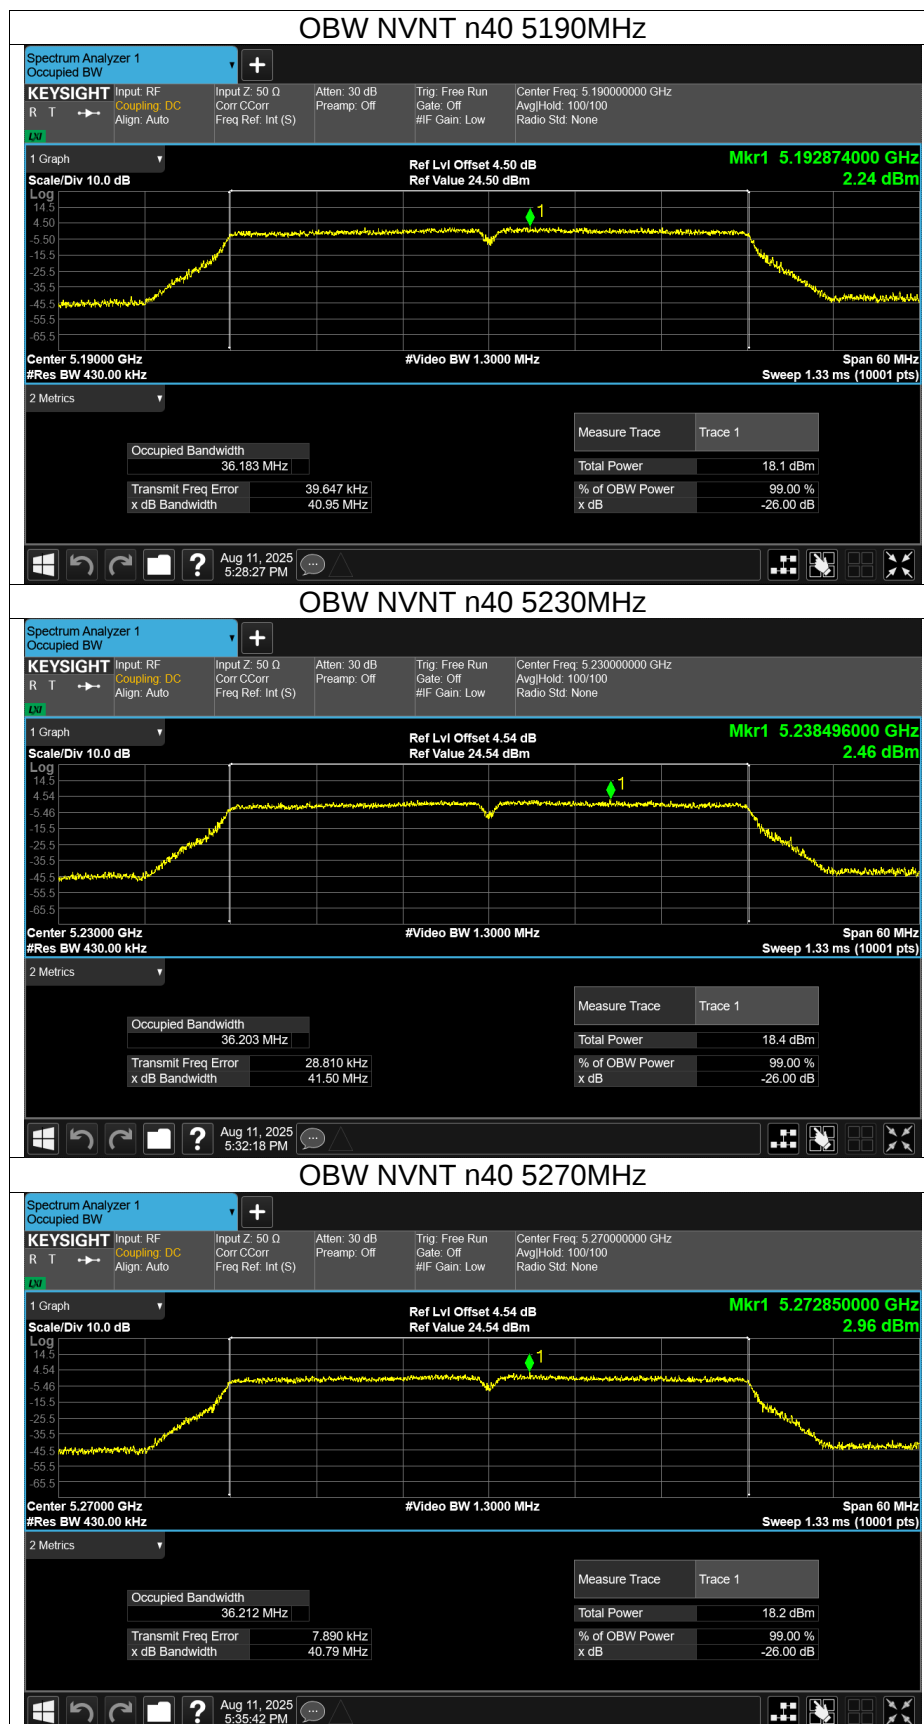
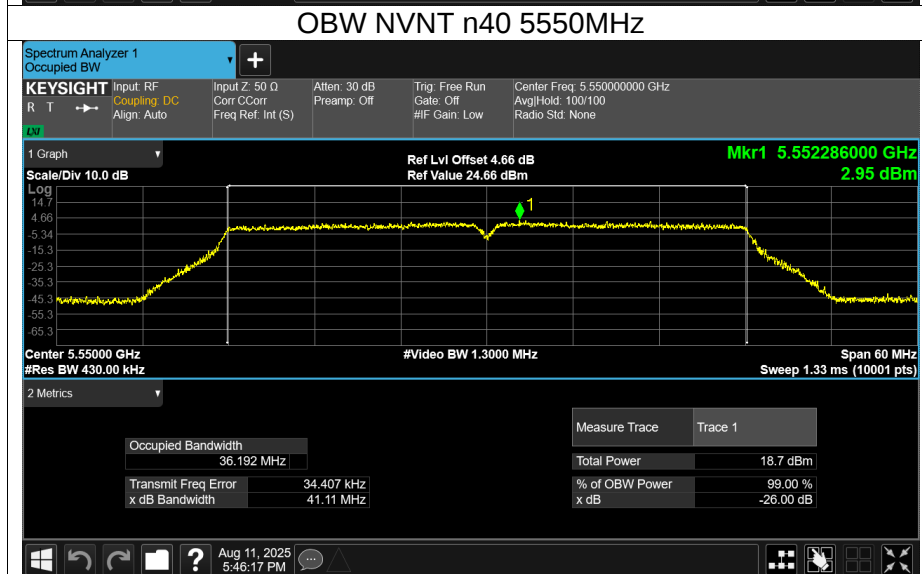




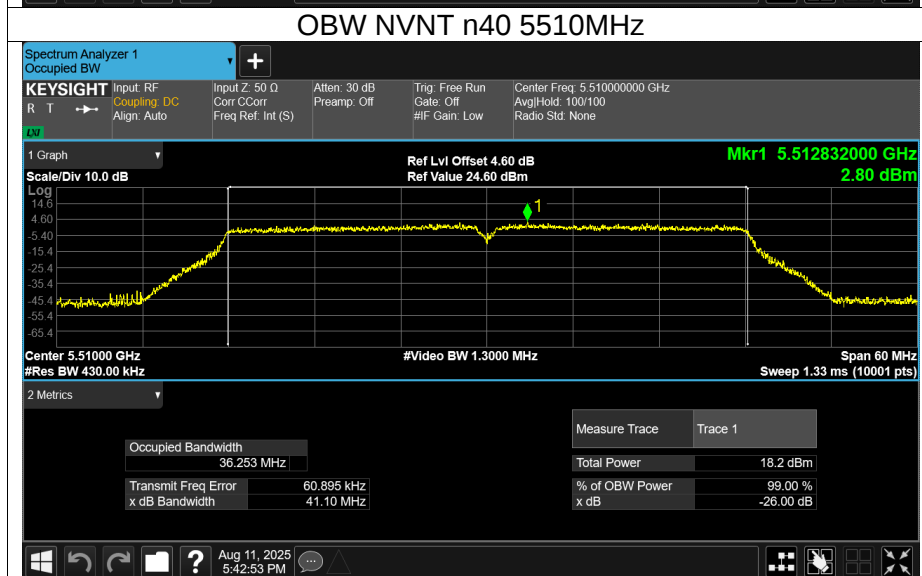




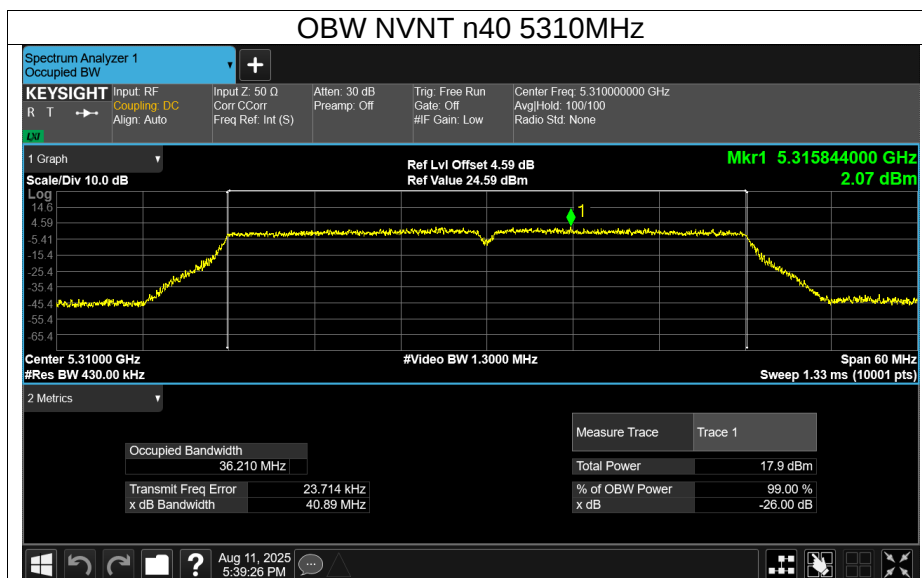




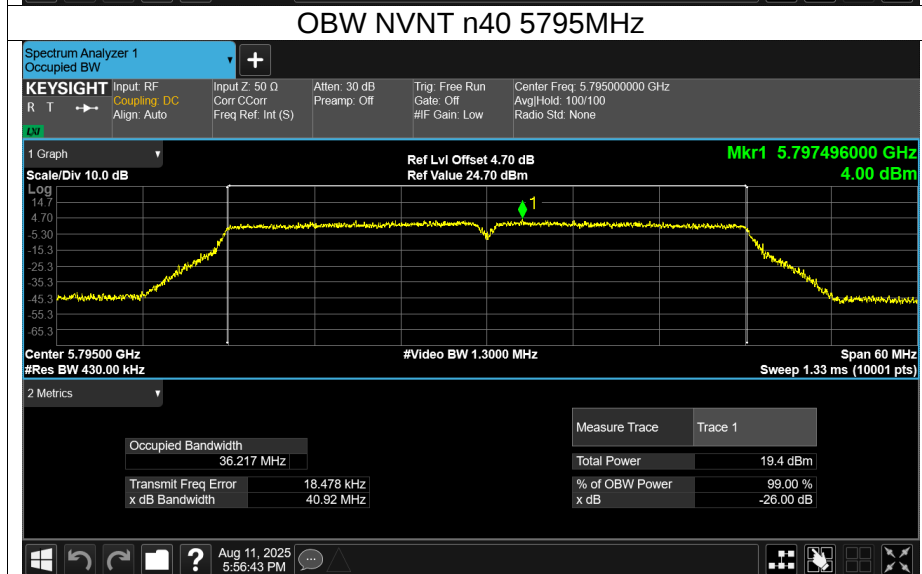




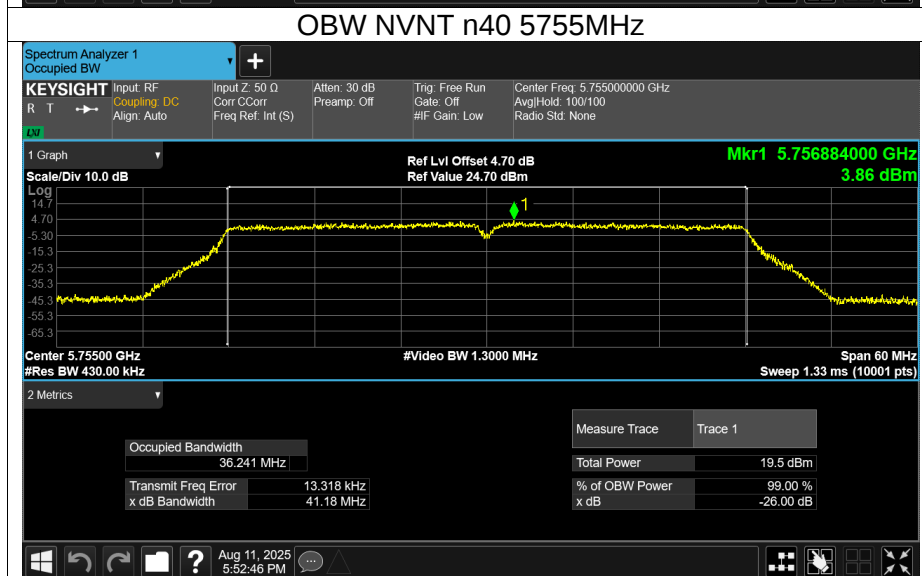


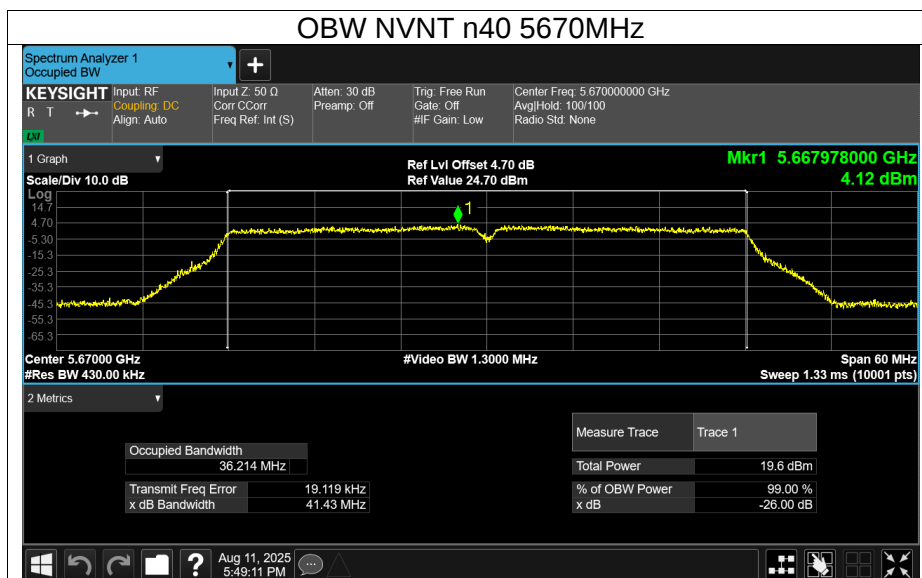


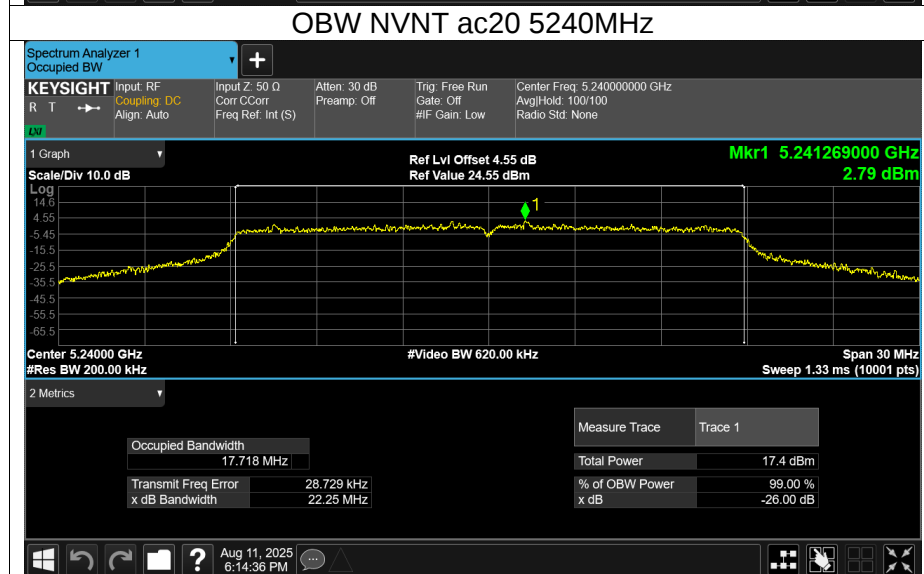
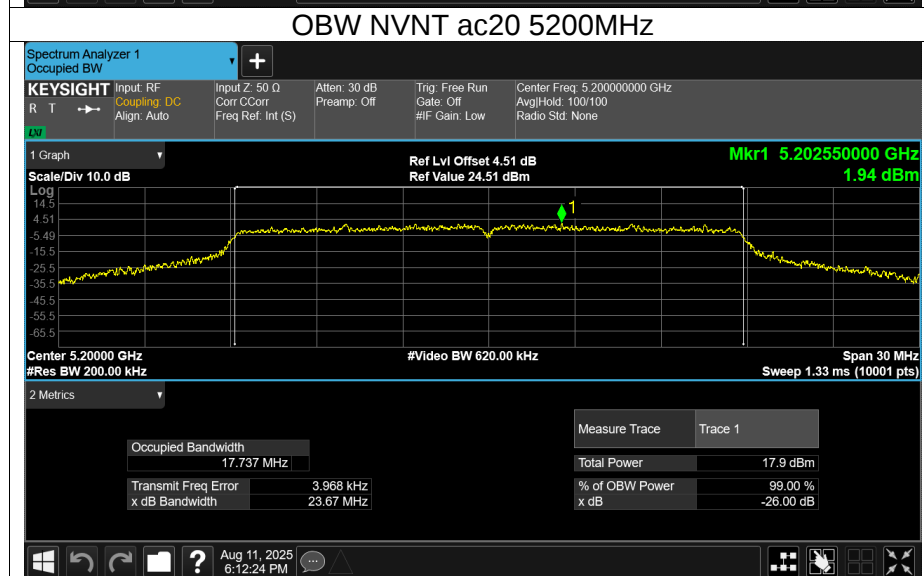
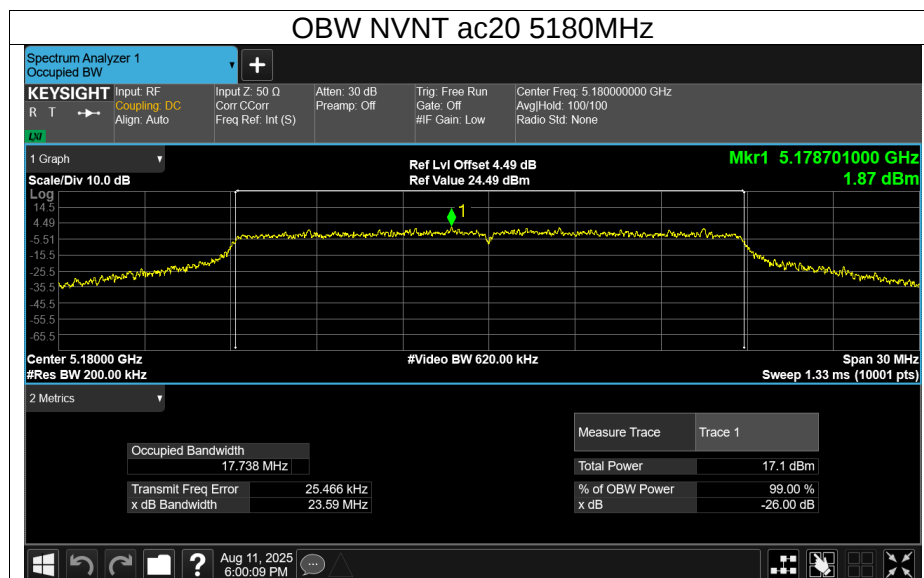


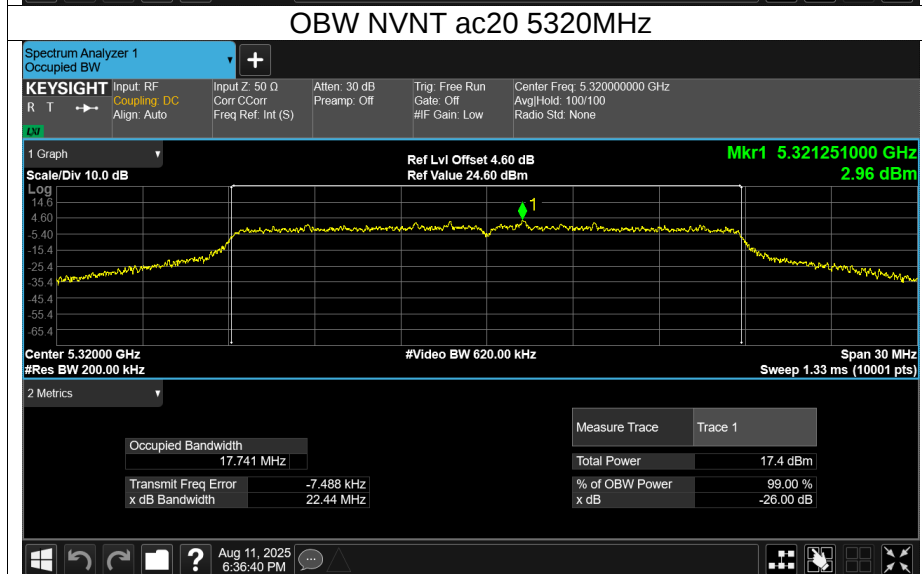
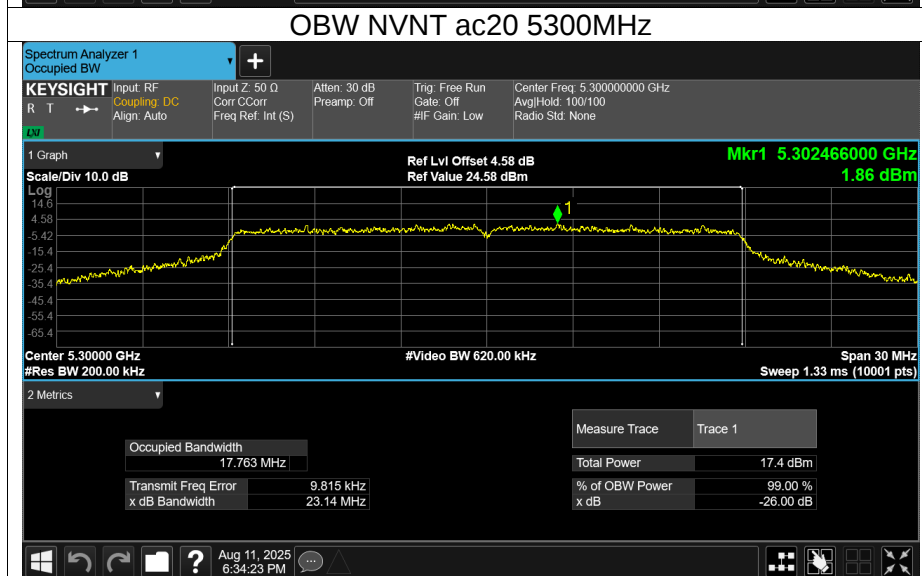
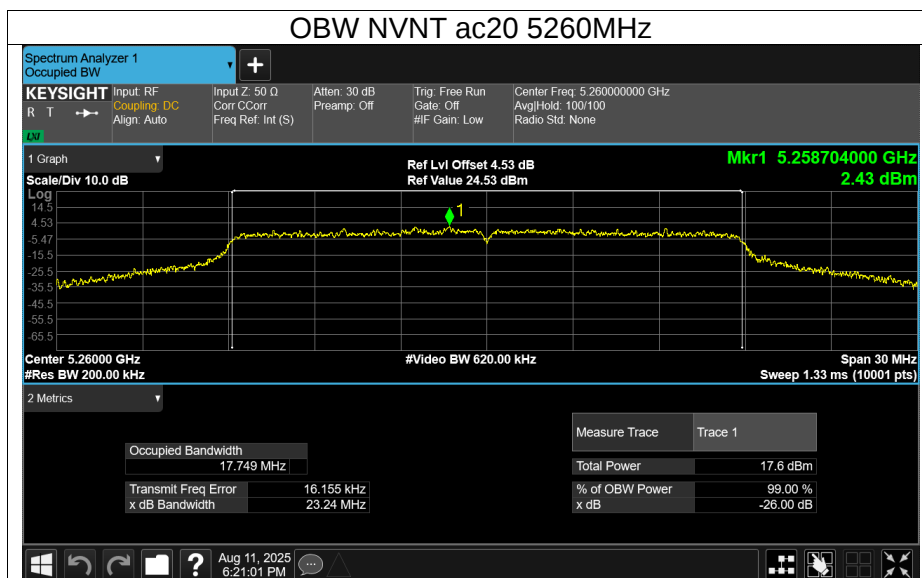


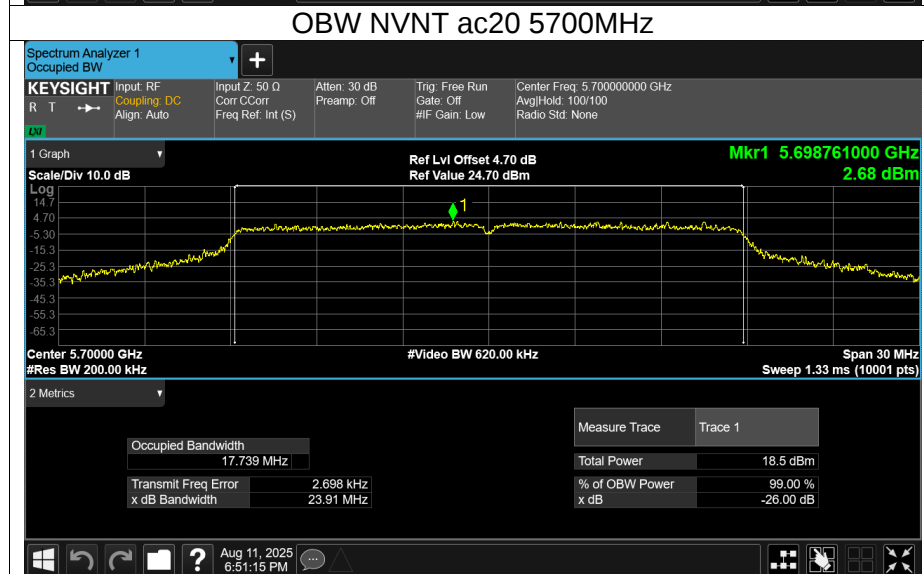
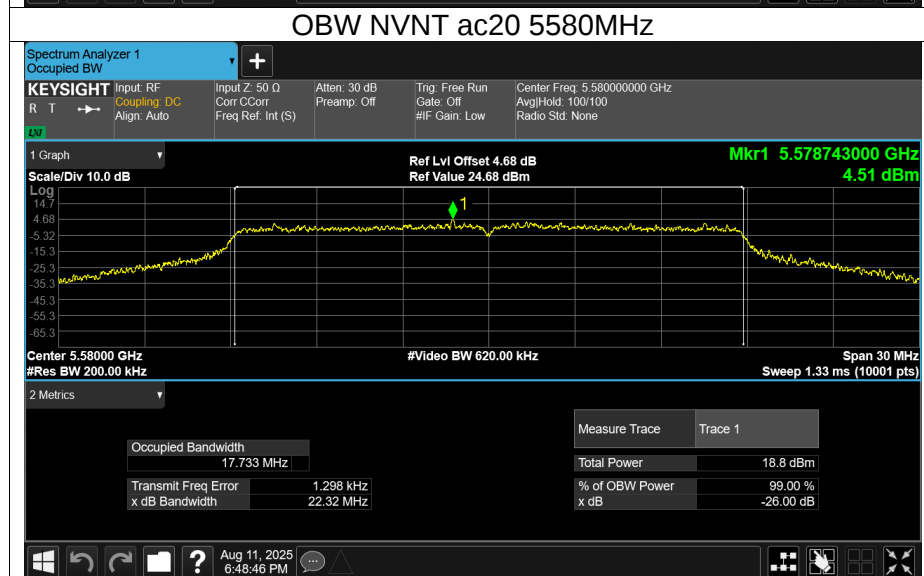
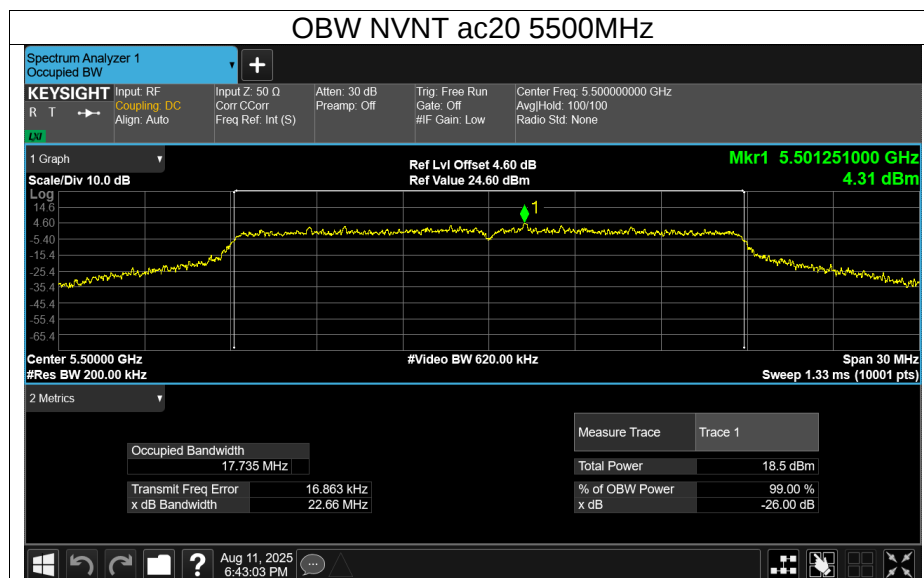


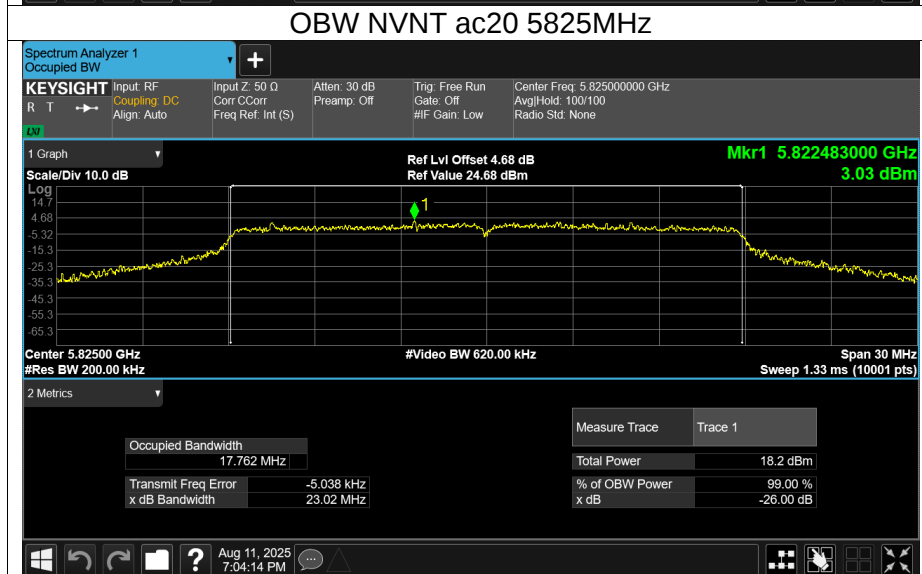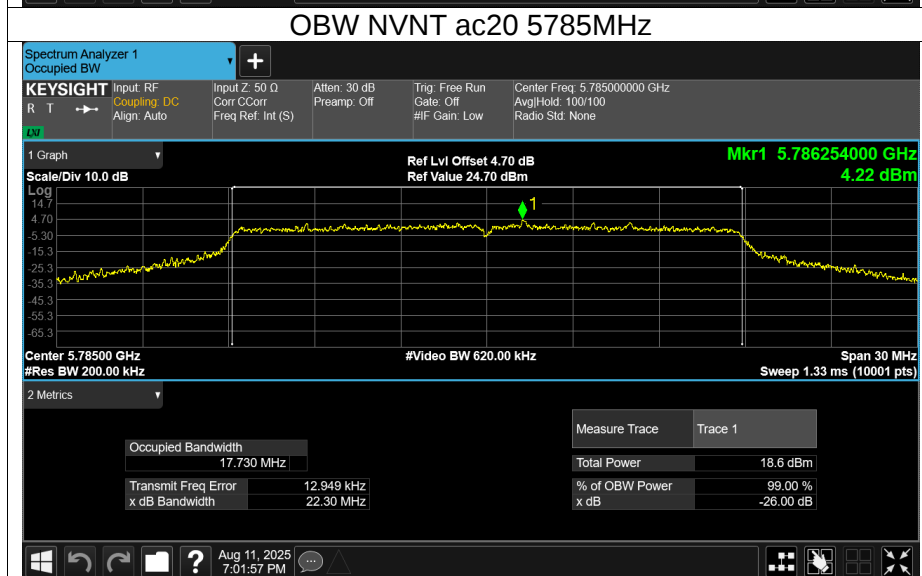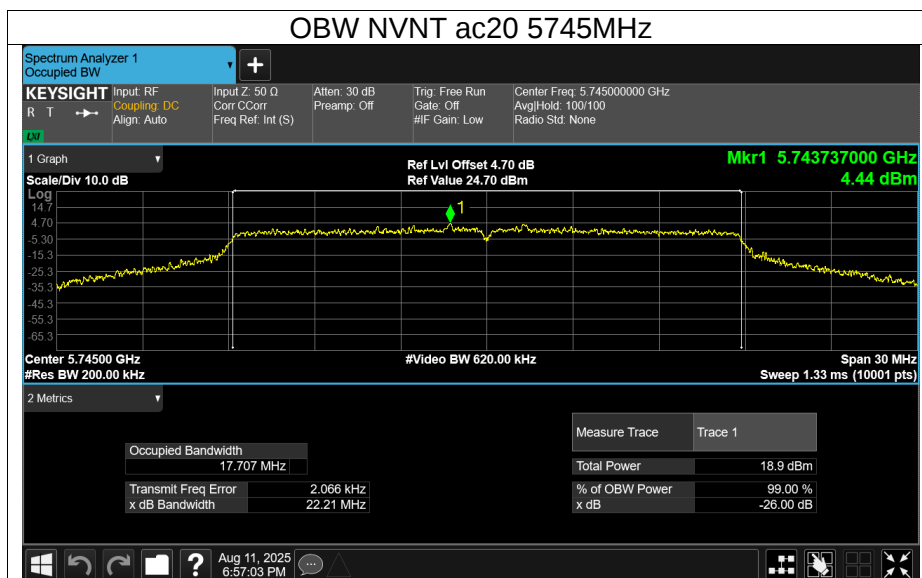

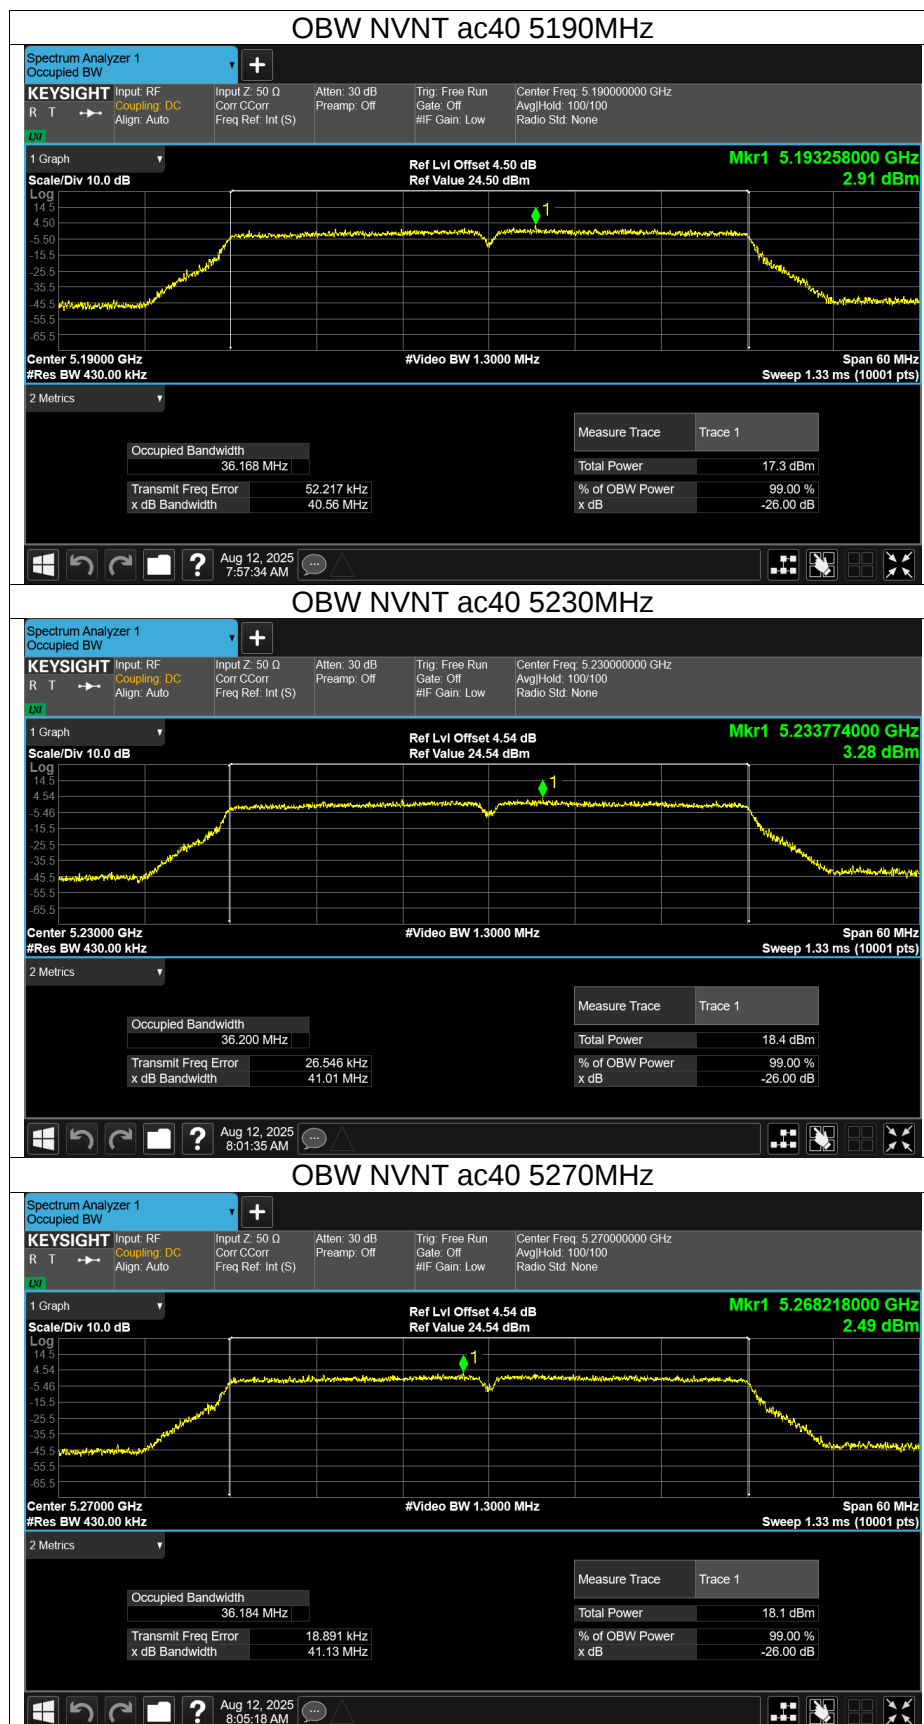

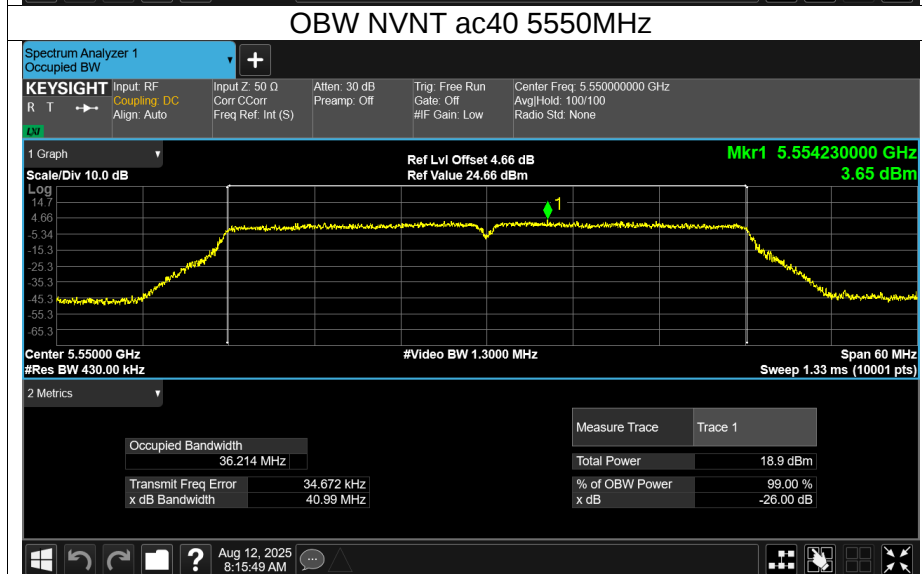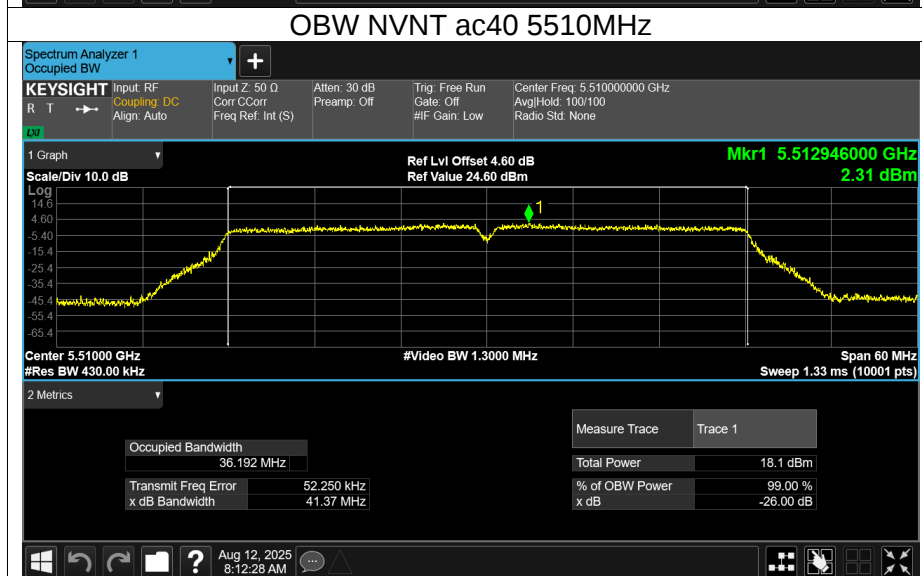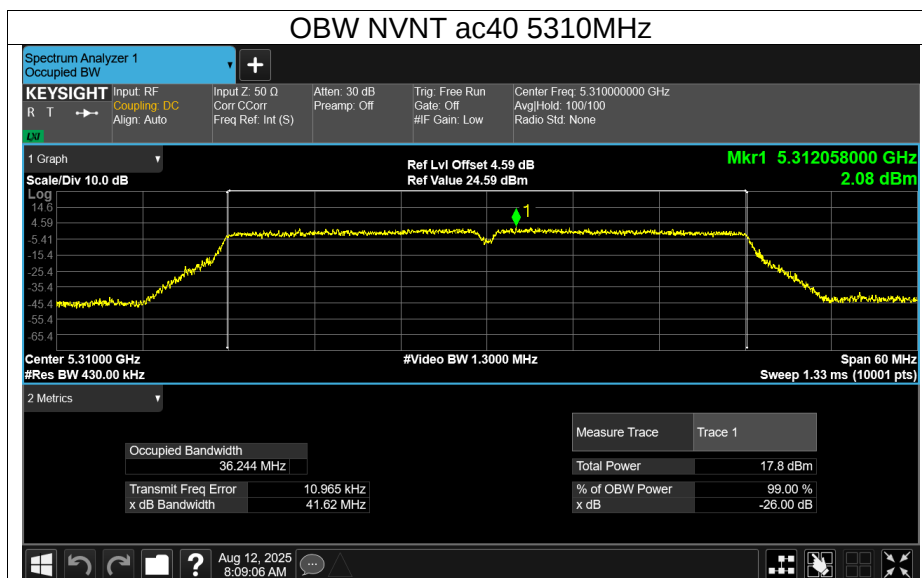

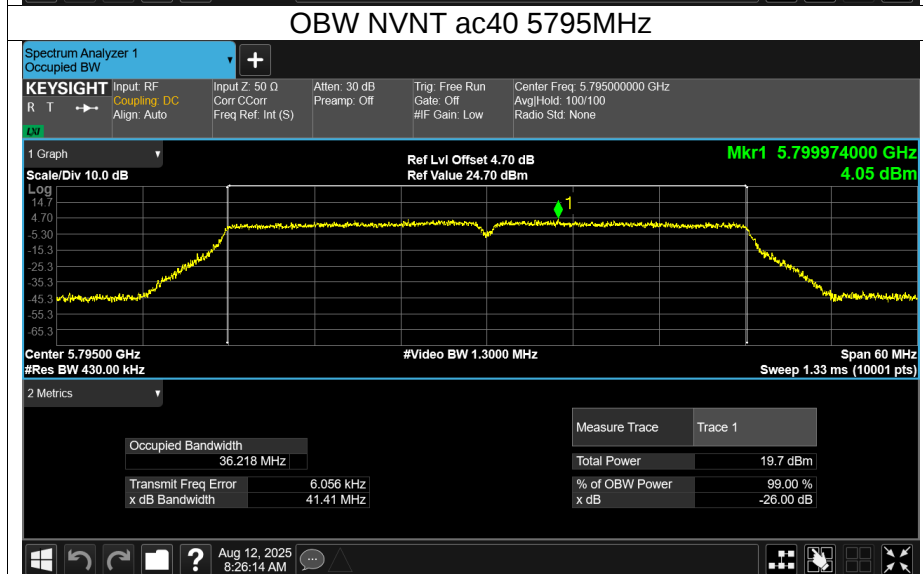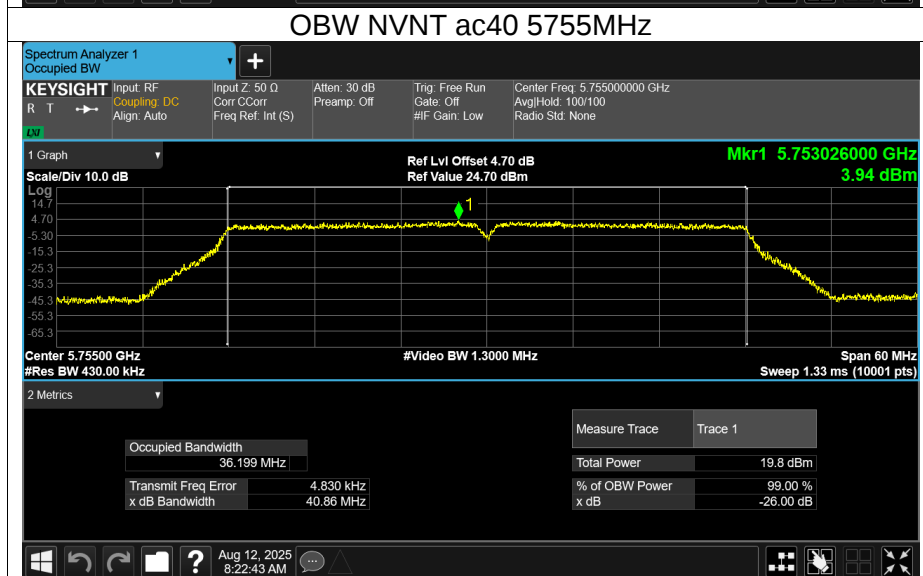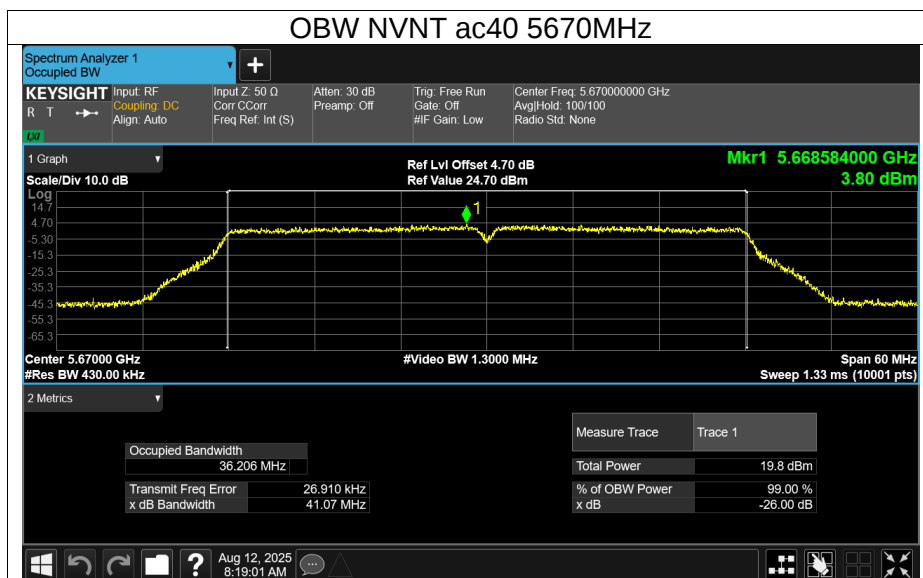

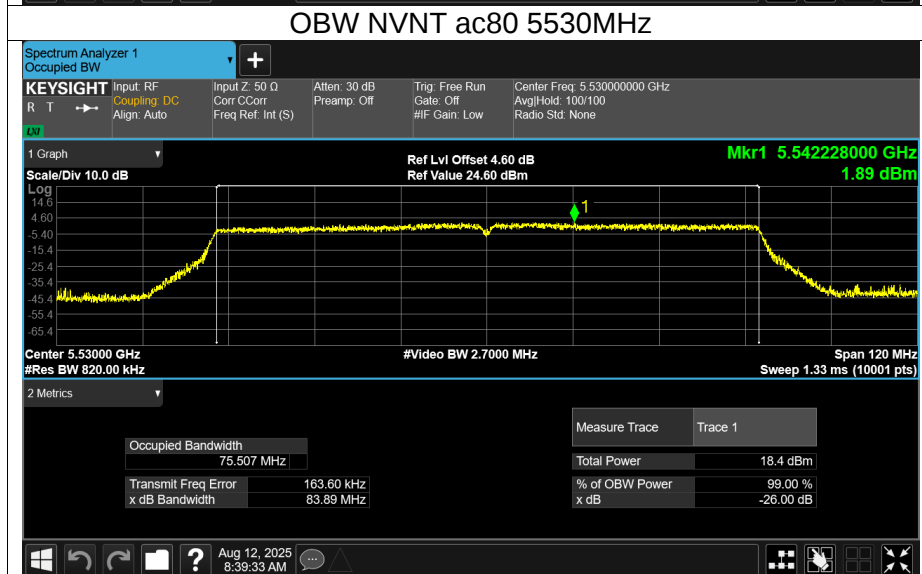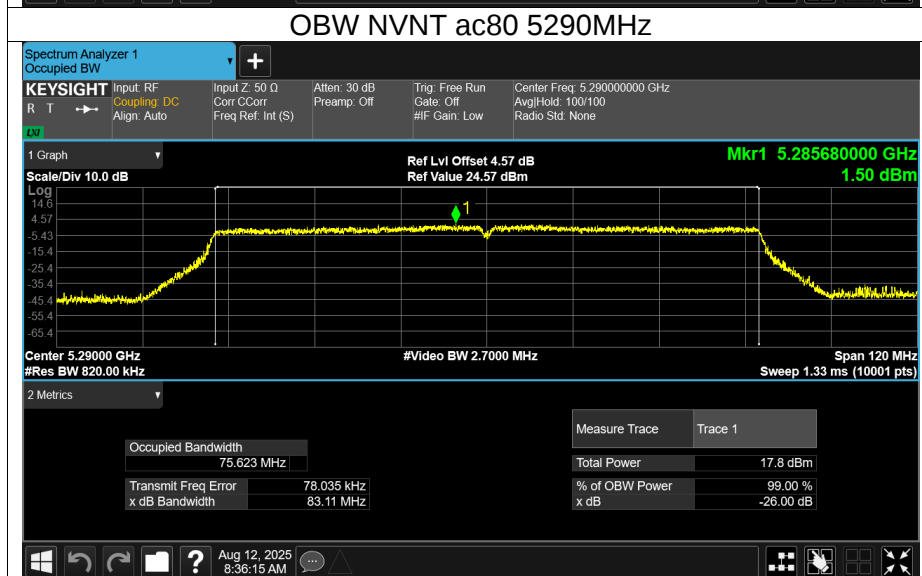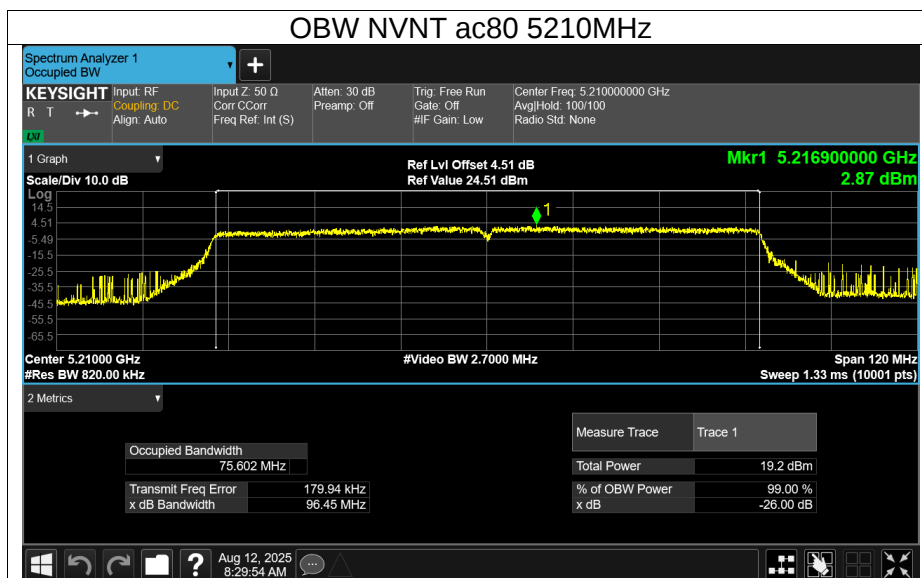





Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	3.78	0	3.78	11	Pass
NVNT	a	5200	3.88	0	3.88	11	Pass
NVNT	a	5240	4.11	0	4.11	11	Pass
NVNT	a	5260	3.76	0	3.76	11	Pass
NVNT	a	5300	3.98	0	3.98	11	Pass
NVNT	a	5320	4.06	0	4.06	11	Pass
NVNT	a	5500	5.11	0	5.11	11	Pass
NVNT	a	5580	5.54	0	5.54	11	Pass
NVNT	a	5700	5.13	0	5.13	11	Pass
NVNT	n20	5180	0.73	0	0.73	11	Pass
NVNT	n20	5200	1.75	0	1.75	11	Pass
NVNT	n20	5240	1.38	0	1.38	11	Pass
NVNT	n20	5260	1.43	0	1.43	11	Pass
NVNT	n20	5300	1.41	0	1.41	11	Pass
NVNT	n20	5320	1.33	0	1.33	11	Pass
NVNT	n20	5500	2.37	0	2.37	11	Pass
NVNT	n20	5580	2.67	0	2.67	11	Pass
NVNT	n20	5700	2.69	0	2.69	11	Pass
NVNT	n40	5190	-0.84	0.16	-0.68	11	Pass
NVNT	n40	5230	-0.63	0.16	-0.47	11	Pass
NVNT	n40	5270	-1.01	0.16	-0.85	11	Pass
NVNT	n40	5310	-1.49	0.16	-1.33	11	Pass
NVNT	n40	5510	-0.77	0.16	-0.61	11	Pass
NVNT	n40	5550	-0.24	0.16	-0.08	11	Pass
NVNT	n40	5670	-2.02	0.16	-1.86	11	Pass
NVNT	ac20	5180	1.13	0	1.13	11	Pass
NVNT	ac20	5200	1.88	0	1.88	11	Pass
NVNT	ac20	5240	1.19	0	1.19	11	Pass
NVNT	ac20	5260	1.25	0	1.25	11	Pass
NVNT	ac20	5300	1.27	0	1.27	11	Pass
NVNT	ac20	5320	1.2	0	1.2	11	Pass
NVNT	ac20	5500	2.62	0	2.62	11	Pass
NVNT	ac20	5580	2.68	0	2.68	11	Pass
NVNT	ac20	5700	2.97	0	2.97	11	Pass
NVNT	ac40	5190	-1.65	0.16	-1.49	11	Pass
NVNT	ac40	5230	-0.82	0.15	-0.67	11	Pass
NVNT	ac40	5270	-1.08	0.15	-0.93	11	Pass
NVNT	ac40	5310	-0.98	0.15	-0.83	11	Pass
NVNT	ac40	5510	-1	0.16	-0.84	11	Pass
NVNT	ac40	5550	-0.35	0.15	-0.2	11	Pass
NVNT	ac40	5670	0.54	0.15	0.69	11	Pass
NVNT	ac80	5210	-3.99	0.33	-3.66	11	Pass
NVNT	ac80	5290	-5.06	0.32	-4.74	11	Pass
NVNT	ac80	5530	-4.98	0.32	-4.66	11	Pass
NVNT	ac80	5610	-2.84	0.33	-2.51	11	Pass

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/510kHz)	Conducted PSD (dBm/500kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	2.51	2.42	0	2.42	30	Pass



NVNT	a	5785	1.94	1.85	0	1.85	30	Pass
NVNT	a	5825	1.87	1.78	0	1.78	30	Pass
NVNT	n20	5745	-0.29	-0.38	0	-0.38	30	Pass
NVNT	n20	5785	-0.5	-0.59	0	-0.59	30	Pass
NVNT	n20	5825	-0.65	-0.74	0	-0.74	30	Pass
NVNT	n40	5755	-2.71	-2.80	0.16	-2.64	30	Pass
NVNT	n40	5795	-2.74	-2.83	0.16	-2.67	30	Pass
NVNT	ac20	5745	-0.18	-0.27	0	-0.27	30	Pass
NVNT	ac20	5785	-0.43	-0.52	0	-0.52	30	Pass
NVNT	ac20	5825	-0.53	-0.62	0	-0.62	30	Pass
NVNT	ac40	5755	-2.43	-2.52	0.15	-2.37	30	Pass
NVNT	ac40	5795	-2.39	-2.48	0.15	-2.33	30	Pass
NVNT	ac80	5775	-5.47	-5.56	0.32	-5.24	30	Pass

