



RF TEST REPORT

Report No.: SET2021-01241

Product: Mobile Data Terminal

FCC ID: 2AC6AC90

Model No.: C90

Applicant: Shenzhen Chainway Information Technology Co.,Ltd.

9F Building2,Daqian Industrial Park,District 67, XingDong

Address: Community,Xin'an street,Bao'an District,Shenzhen,Guangdong,China

Dates of Testing: 01/22/2021 — 01/26/2021

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 39 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product.....: Mobile Data Terminal

Brand Name.....: CHAINWAY

Trade Name.....: CHAINWAY

Applicant.....: Shenzhen Chainway Information Technology Co.,Ltd.

9F Building2,Daqian Industrial Park,District 67, XingDong

Applicant Address.....: Community,Xin'an street,Bao'an District,Shenzhen,
Guangdong,China

Manufacturer.....: Shenzhen Chainway Information Technology Co.,Ltd.

Manufacturer Address....: 9F Building2,Daqian Industrial Park,District 67, XingDong
Community,Xin'an street,Bao'an District,Shenzhen,
Guangdong,China

Test Standards.....:
47 CFR FCC Part 22(H)
47 CFR FCC Part 24(E)

Test Result.....: PASS

Tested by.....: *Vincent*

2021.01.26

Vincent, Test Engineer

Reviewed by.....: *Chris You*

2021.01.26

Chris You, Senior Engineer

Approved by.....: *Shuangwen Zhang*

2021.01.26

Shuangwen Zhang, Manager

Table of Contents

1.	GENERAL INFORMATION	4
1.1	EUT Description	4
1.2	Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	5
1.3	Test Standards and Results	5
1.4	Test Configuration of Equipment under Test.....	6
1.5	Measurement Results Explanation Example	6
1.6	Facilities and Accreditations.....	7
2.	47 CFR PART 2, PART 22H & 24E REQUIREMENTS	8
2.1	Conducted RF Output Power.....	8
2.2	Peak to Average Radio.....	10
2.3	99% Occupied Bandwidth and 26dB Bandwidth Measurement	12
2.4	Frequency Stability.....	17
2.5	Conducted Out of Band Emissions	20
2.6	Band Edge	28
2.7	Transmitter Radiated Power (EIRP/ERP)	31
2.8	Radiated Spurious Emissions	34
3.	LIST OF MEASURING EQUIPMENT	39

Change History		
Issue	Date	Reason for change
1.0	2021.01.26	First edition

1. GENERAL INFORMATION

1.1 EUT Description

EUT Type	Mobile Data Terminal
EUT supports Radios application	CDMA2000 BC0/BC1
Frequency Range	CDMA2000 BC0: Tx: 824.70 – 848.31MHz; Rx: 869.70 – 893.31MHz CDMA2000 BC1: Tx: 1851.25 – 1908.75MHz; Rx: 1931.25 – 1988.75MHz
Maximum Output Power to Antenna	CDMA2000 BC0: 23.51m CDMA2000 BC1: 23.86Bm
Type of Modulation	CDMA2000:QPSK CDMA2000 1x EV-DO:QPSK / 8PSK
Antenna Type	Internal Antenna

1.2 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

System	Type of Modulation	Emission Designator	Frequency Tolerance (ppm)	Maximum ERP/EIRP(W)
CDMA200 BC0	QPSK	1M29F9W	0.006	0.213
CDMA200 BC1	QPSK	1M29F9W	0.004	0.216

1.3 Test Standards and Results

1. 47 CFR Part 2, 22(H) 24(E)
2. ANSI& TIA-603-D-2010
3. FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Limit	Result
	FCC			
1	2.1046	Conducted Output Power	Reporting Only	PASS
2	24.232(d)	Peak to Average Radio	<13dB	PASS
3	2.1049 22.917(b) 24.238(a)	Occupied Bandwidth	Reporting Only	PASS
4	2.1055 22.355 24.235	Frequency Stability	$\leq \pm 2.5\text{ppm}$	PASS
5	2.1051 22.917 24.238(a)	Conducted Out of Band Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS
6	2.1051 22.917	Band Edge	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS

	24.238(a)			
7	22.913 24.232(c)	Effective Radiated Power	<7Watts <2Watts	PASS
8	2.1053 22.917 24.238(a)	Radiated Spurious Emissions	< 43+10log10 (P[Watts])	PASS

1.4 Test Configuration of Equipment under Test

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9GHz for CDMA2000 BC0.
2. 30MHz to 20GHz for CDMA2000 BC1

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
CDMA2000 BC0	1xRTT Link Mode	1xRTT Link Mode
CDMA2000 BC1	1xRTT Link Mode	1xRTT Link Mode

Note: 1.The EUT has two WWAN antennas , upper antenna and primary antenna. The antenna which has the maximum power were used for all tests.

2.The maximum power levels are chosen to test as the worst case configuration as follows:

CDMA2000 BC0, BC1 for QPSK modulation and 1xRTT Link Mode, only these modes were used for all tests.

3.For ERP/EIRP, all the antennas (upper antenna and primary antenna) have been tested, the worst data reported only.

1.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7dB and 10dB attenuator.



Example:

Offset (dB) = RF cable loss(dB) + attenuator factor(dB).
= 7 + 10 = 17 (dB)

1.6 Facilities and Accreditations

1.6.1 Test Facilities

FCC-Registration No.: CN5031

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until June 30th,2021.

ISED Registration: 11185A-1

CAB identifier: CN0064

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until June 30th, 2021

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.6.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS

2.1 Conducted RF Output Power

2.1.1 Definition

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


2.1.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

2.1.4 Test Setup

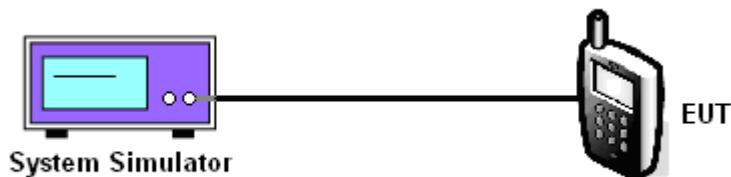

2.1.5 Test Results of Conducted Output Power

Conducted Power (Unit: dBm)			
Band	CDMA BC0		
Channel	1013	384	777
Frequency(MHz)	824.7	836.52	848.31
RC1 + SO55	23.51	22.45	23.17
RC3 + SO55	23.42	22.36	23.08
RC3 + SO32(+ F-SCH)	23.39	22.40	22.78
RC3 + SO32(+SCH)	23.33	22.37	22.77
1xEVDO Rev A RETAP	23.33	22.40	23.16
Band	CDMA BC1		
Channel	25	600	1175
Frequency(MHz)	1851.25	1880.00	1908.75
RC1 + SO55	23.12	23.27	23.86
RC3 + SO55	23.09	23.21	23.79
RC3 + SO32(+ F-SCH)	23.04	23.01	23.71
RC3 + SO32(+SCH)	23.08	23.00	23.46
1xEVDO Rev A RETAP	23.10	23.25	23.62

2.2 Peak to Average Radio

2.2.1 Definition

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


2.2.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3 Test Procedures

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.7.1.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

2.2.4 Test Setup

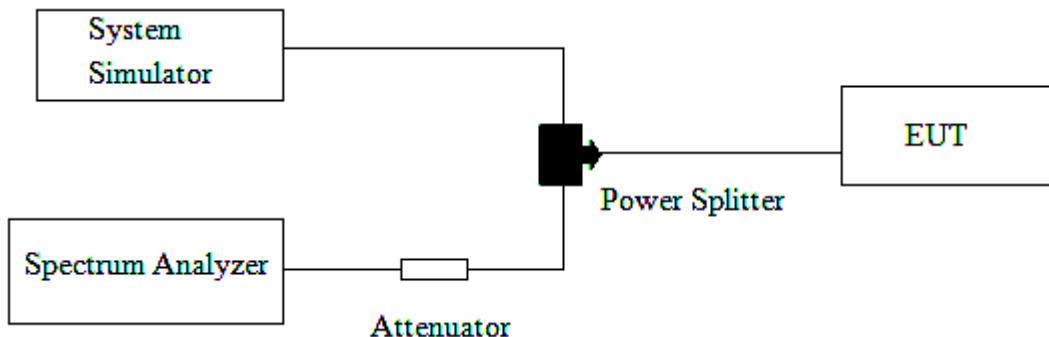

2.2.5 Test Results of Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Peak to Average radio	Limit dB	Verdict
			dB		
RC1 + SO55	25	1851.25	3.09	13	PASS
	600	1880.00	3.10		PASS
	1175	1908.75	3.01		PASS
RC3 + SO55	25	1851.25	2.97	13	PASS
	600	1880.00	2.85		PASS
	1175	1908.75	3.03		PASS
RC3 + SO32(+ F-SCH)	25	1851.25	3.11	13	PASS
	600	1880.00	3.07		PASS
	1175	1908.75	2.96		PASS
RC3 + SO32(+SCH)	25	1851.25	2.89	13	PASS
	600	1880.00	2.98		PASS
	1175	1908.75	3.10		PASS
1xEVDO Rev A	25	1851.25	2.93	13	PASS
	600	1880.00	2.98		PASS
	1175	1908.75	3.11		PASS

2.3 99% Occupied Bandwidth and 26dB Bandwidth Measurement

2.3.1 Definition

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

2.3.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.3.3 Test Procedures


1. The testing follows FCC KDB 971168 v03r01 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.

5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

2.3.4 Test Setup

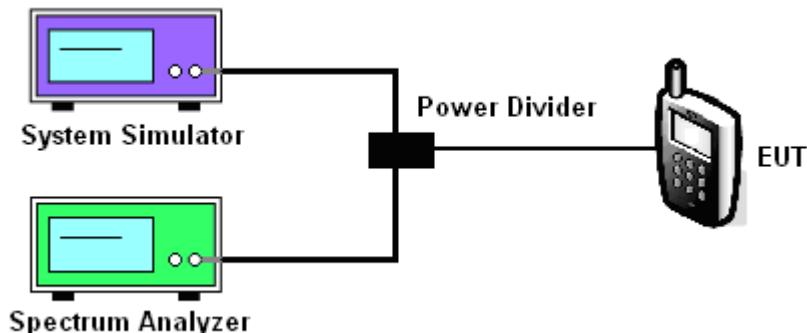


2.3.5 Test Results of 99% Occupied Bandwidth and 26dB Bandwidth


CDMA2000 BC0			
Test Mode	CDMA2000 1xRTT		
Channel	1013	384	777
Frequency(MHz)	824.7	836.52	848.31
99% OBW(MHz)	1.2943	1.281	1.2845
26dB BW(MHz)	1.471	1.437	1.448
CDMA2000 BC1			
Test Mode	CDMA2000 1xRTT		
Channel	25	600	1175
Frequency(MHz)	1851.25	1880.00	1908.75
99% OBW(MHz)	1.2744	1.2788	1.2877
26dB BW(MHz)	1.449	1.440	1.463

2.3.6 Test Results (Plots) of 99% Occupied Bandwidth and 26dB Bandwidth


CDMA BC0:

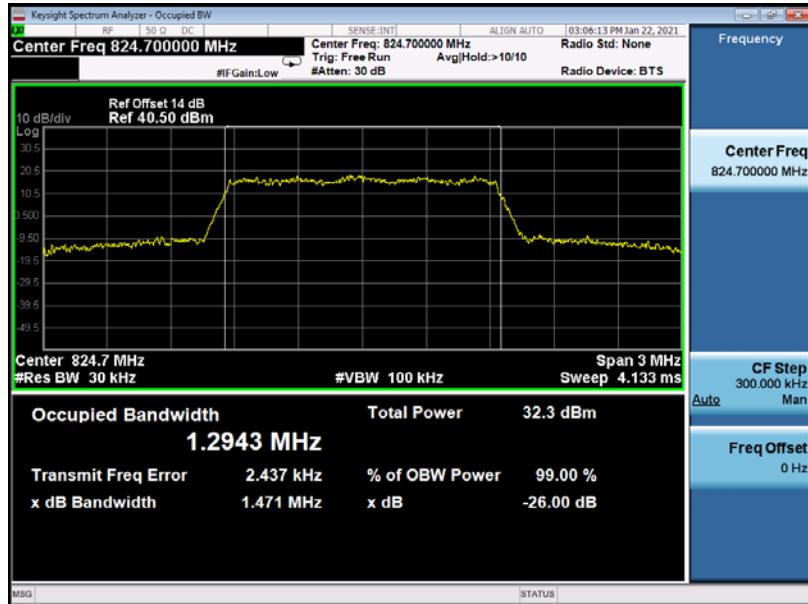

99% & 26dB Occupied Bandwidth Channel 1013

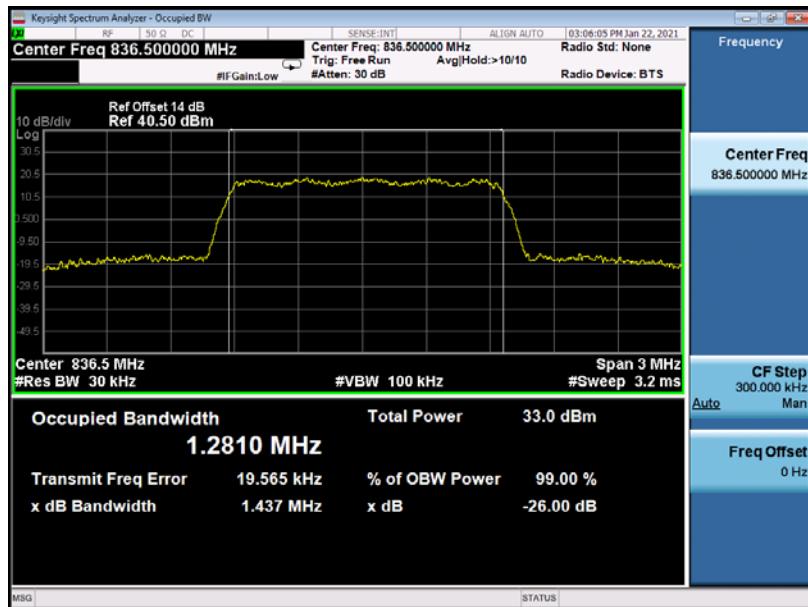

99% & 26dB Occupied Bandwidth Plot on Channel 384

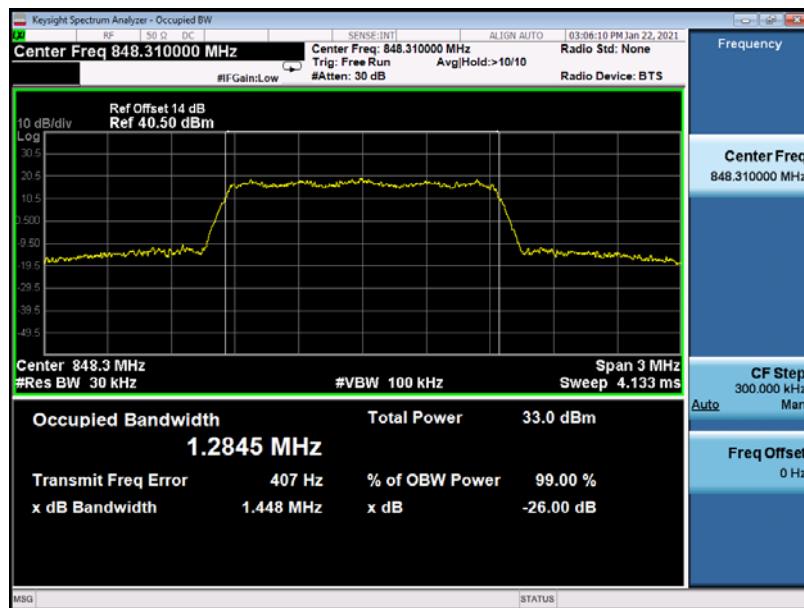


99% & 26dB Occupied Bandwidth Plot on Channel 777


CDMA BC1:



99% & 26dB Occupied Bandwidth Plot on Channel 25

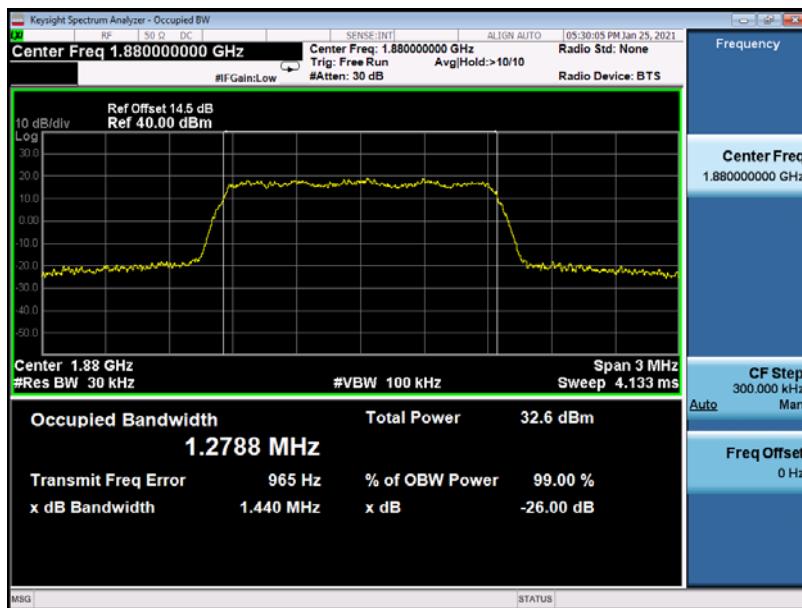

99% & 26dB Occupied Bandwidth Plot on Channel 600

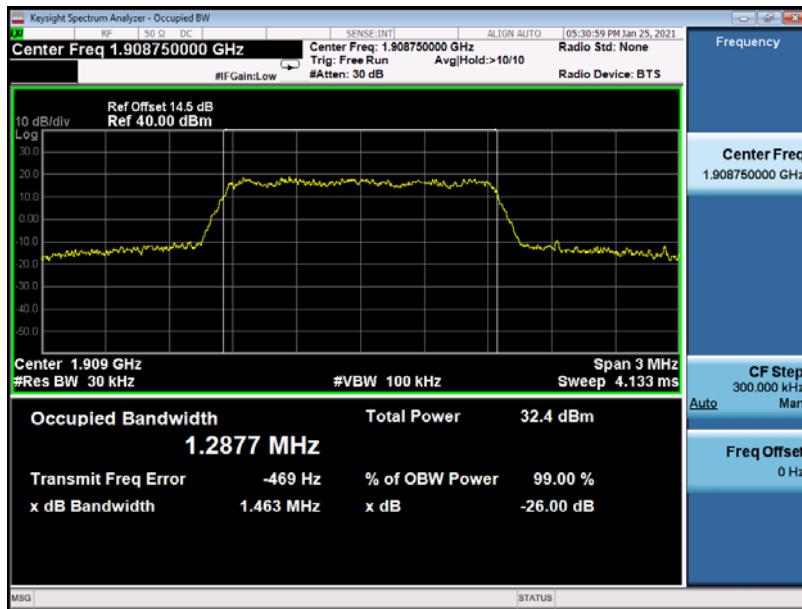

99% & 26dB Occupied Bandwidth Plot on Channel 1175

2.4 Frequency Stability

2.4.1 Requirement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

2.4.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.


2.4.3 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v03r01 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

2.4.4 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v03r01 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^\circ\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

2.4.5 Test Setup

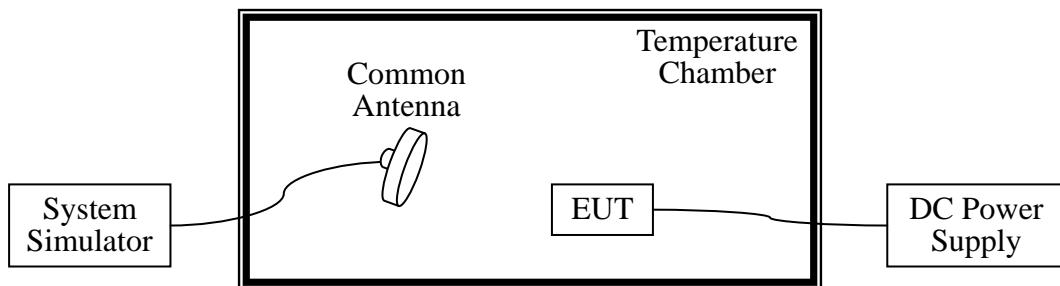

2.4.6 Test Results of Frequency Stability

Band	CDMA2000 BC0 1xRTT_RC3+SO55		Channel	384
Limit(ppm)	2.5		Frequency	836.52MHz
Power (VDC)	Temperature (°C)	Deviation (ppm)		Result
		-30	0.005	
3.85	-20	0.004		PASS
	-10	0.004		
	0	0.006		
	+10	0.004		
	+20	0.006		
	+30	0.006		
	+40	0.005		
	+50	0.003		
4.2	+25	0.002		
3.6	+25	0.005		

Band	CDMA2000 BC1 1xRTT_RC3+SO55	Channel	600
Limit(ppm)	2.5	Frequency	1880.00MHz

Power (VDC)	Temperature (°C)	Deviation (ppm)	Result
3.85	-30	0.002	PASS
	-20	0.004	
	-10	0.001	
	0	0.002	
	+10	0.003	
	+20	0.002	
	+30	0.003	
	+40	0.002	
	+50	0.003	
4.2	+25	0.001	
3.6	+25	0.001	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

2.5 Conducted Out of Band Emissions

2.5.1 Requirement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


2.5.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v03r01 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$
$$= -13 \text{ dBm.}$$


2.5.4 Test Setup

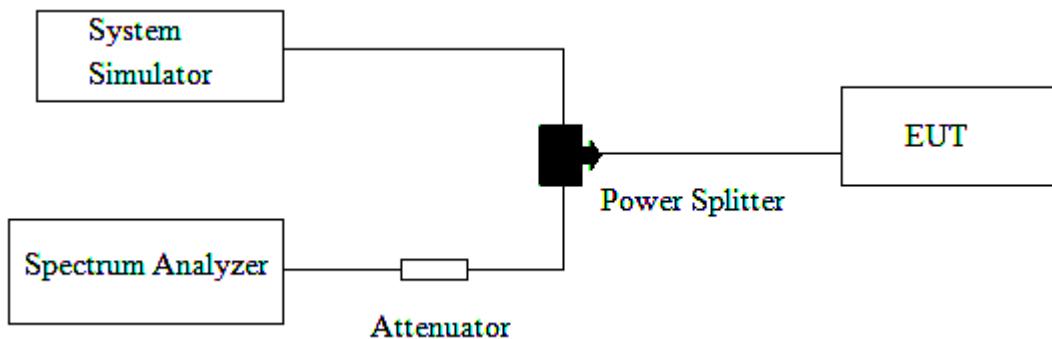


2.5.5 Test Result (Plots) of Conducted Spurious Emission

Note: For 9 KHz to 30MHz: the amplitude of spurious emissions is attenuated by more than 20dB below the permissible value, so we not provide the test result here.

Band	CDMA2000 BC0	Channel	1013
Test Mode	1xRTT_RC3+SO55(QPSK)	Frequency	824.7MHz

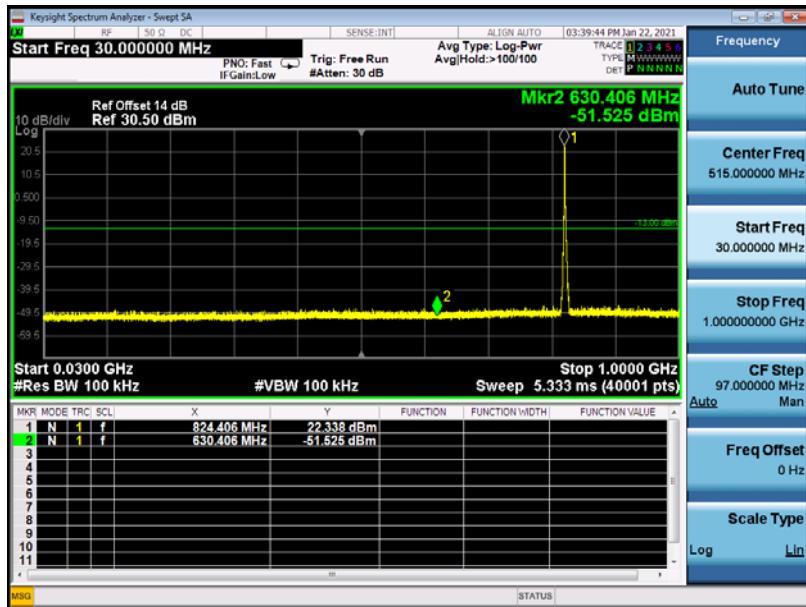


30MHz~1GHz

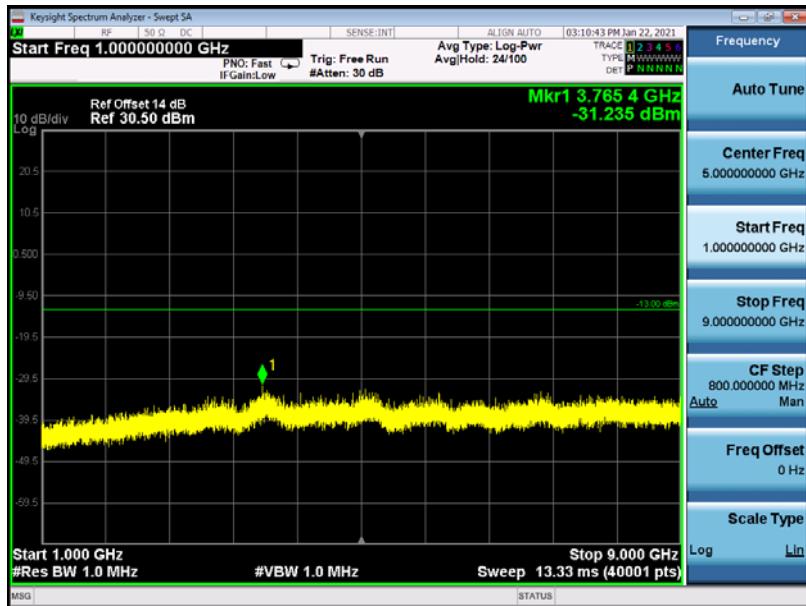


1GHz~9GHz

Band	CDMA2000 BC0	Channel	384
Test Mode	1xRTT_RC3+SO55(QPSK)	Frequency	836.52MHz

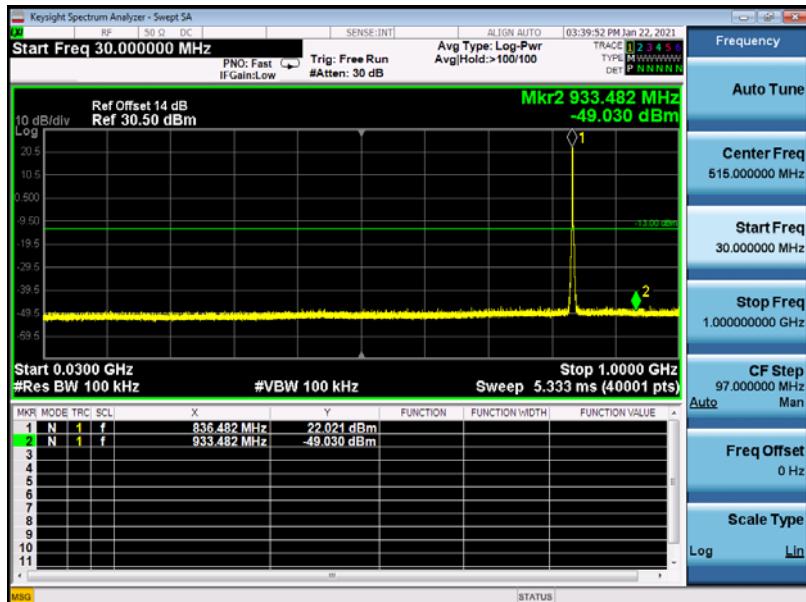


30MHz~1GHz

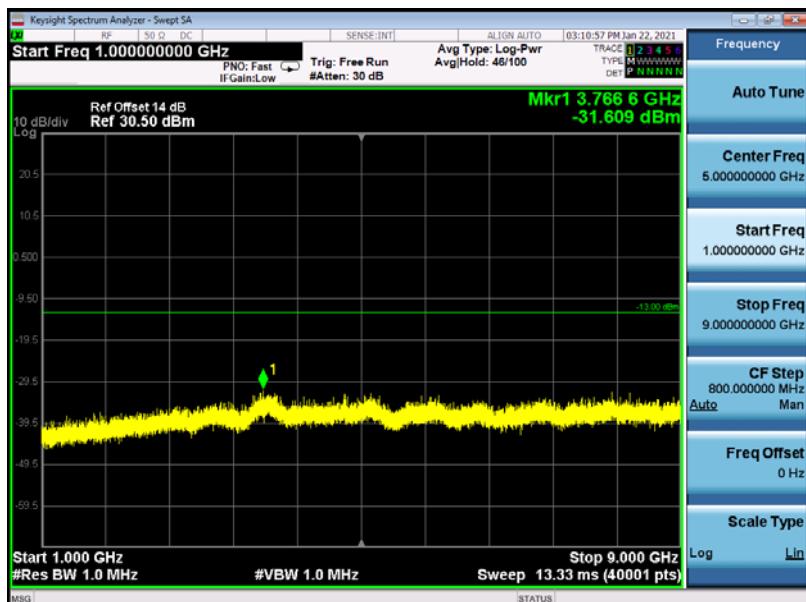

1GHz~9GHz

Band	CDMA2000 BC0	Channel	777
Test Mode	1xRTT_RC3+SO55(QPSK)	Frequency	848.31MHz

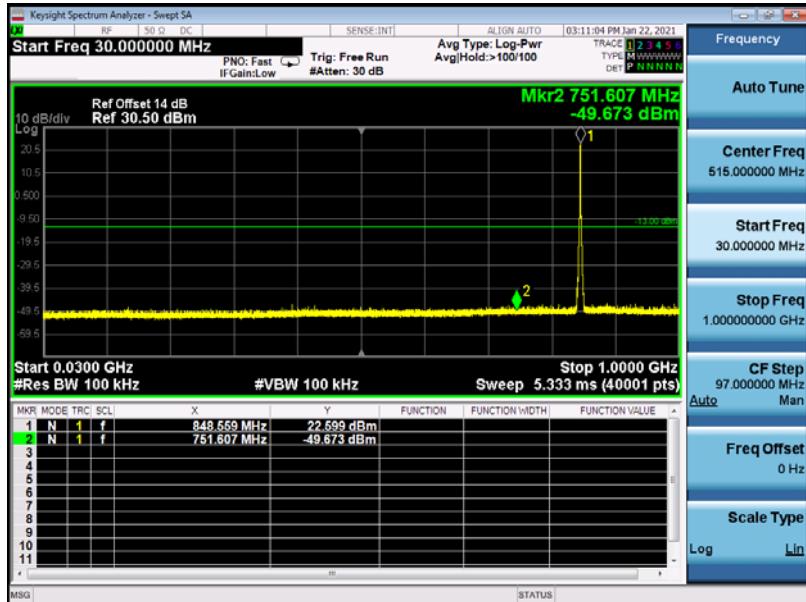


30MHz~1GHz




1GHz~9GHz

Band	CDMA2000 BC1	Channel	25
Test Mode	1xRTT_RC3+SO55(QPSK)	Frequency	1851.25MHz

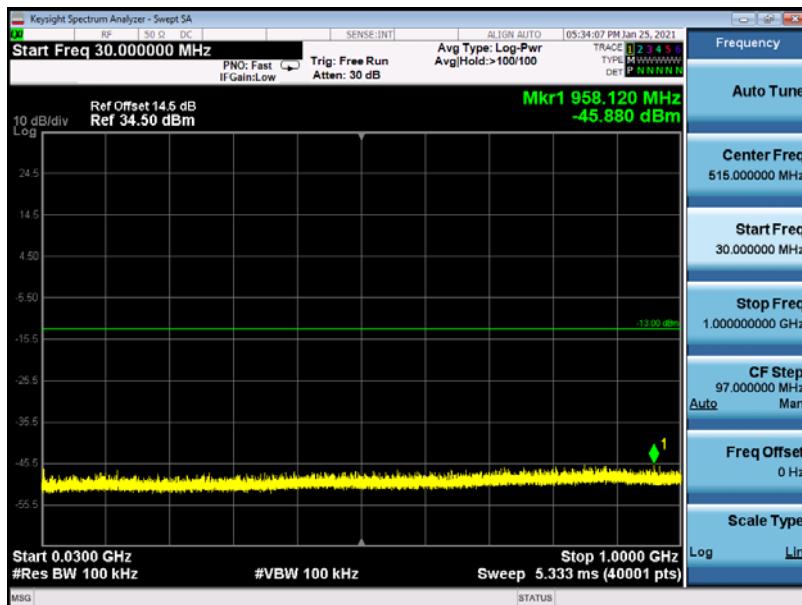


30MHz~1GHz

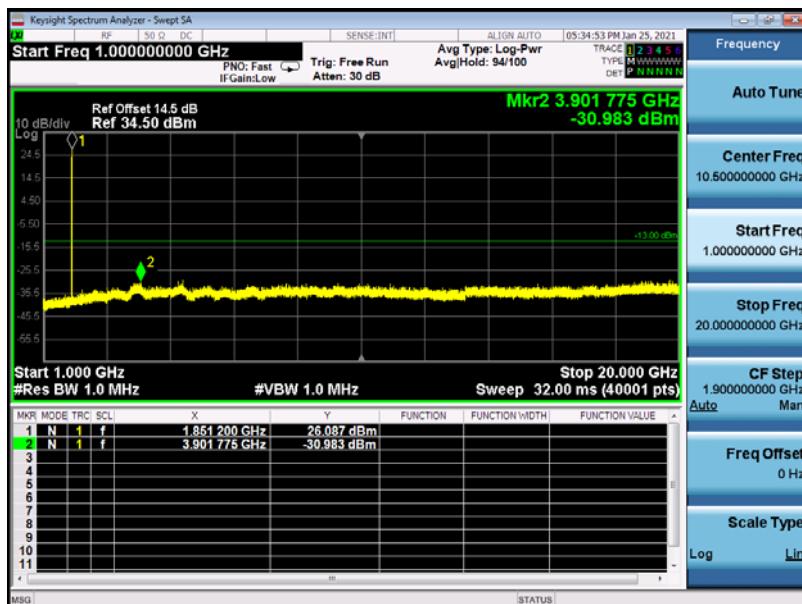


1GHz~20GHz

Band	CDMA2000 BC1	Channel	600
Test Mode	1xRTT_RC3+SO55(QPSK)	Frequency	1880.00MHz

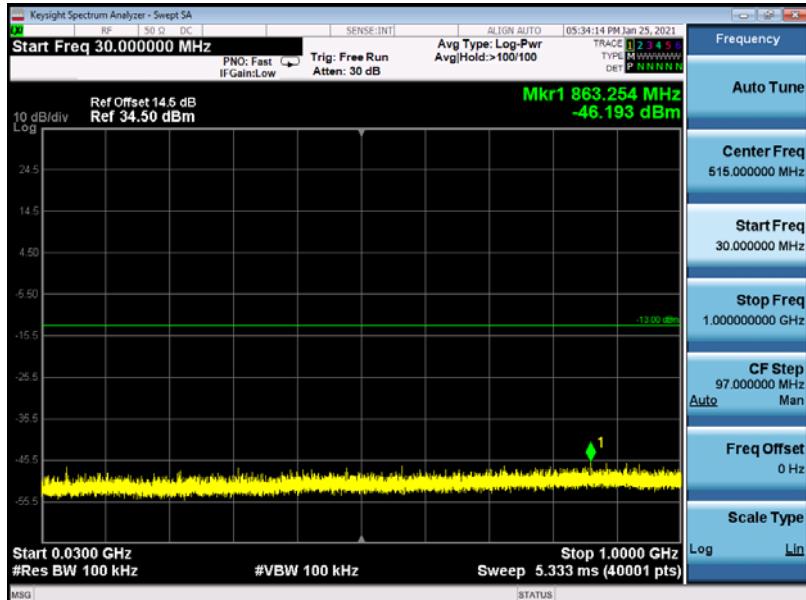


30MHz~1GHz

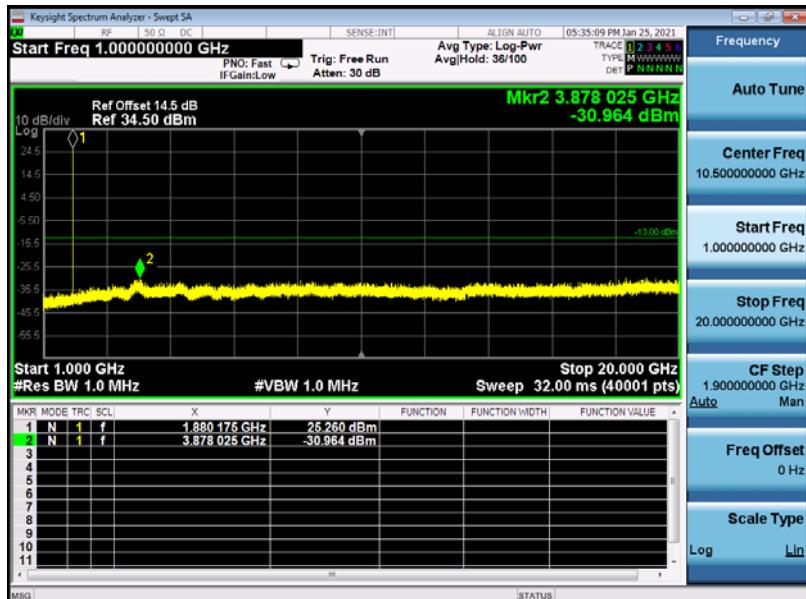


1GHz~20GHz

Band	CDMA2000 BC1	Channel	1175
Test Mode	1xRTT_RC3+SO55(QPSK)	Frequency	1908.75MHz

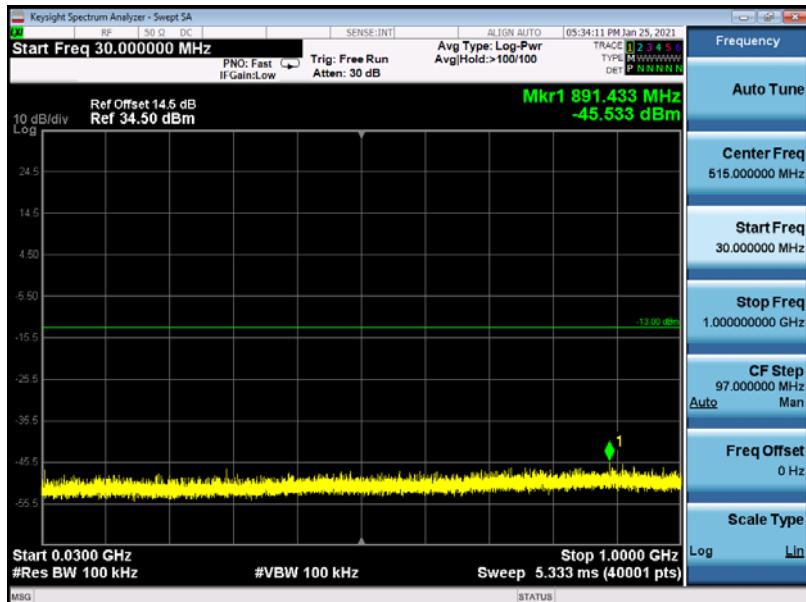

30MHz~1GHz

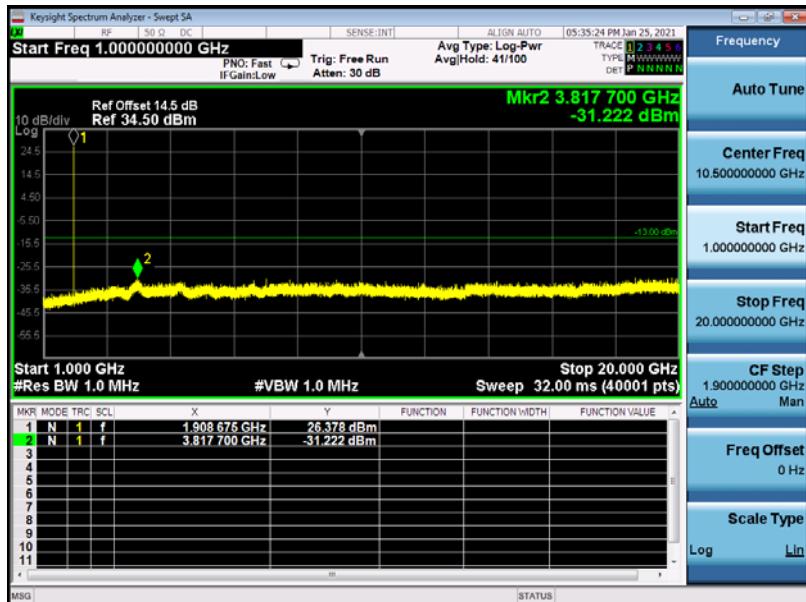

1GHz~20GHz

2.6 Band Edge

2.6.1 Requirement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


2.6.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.6.3 Test Procedures

1. The testing follows FCC KDB 971168 v03r01 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Set RBW=10KHz, VBW=30KHz
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

2.6.4 Test Setup

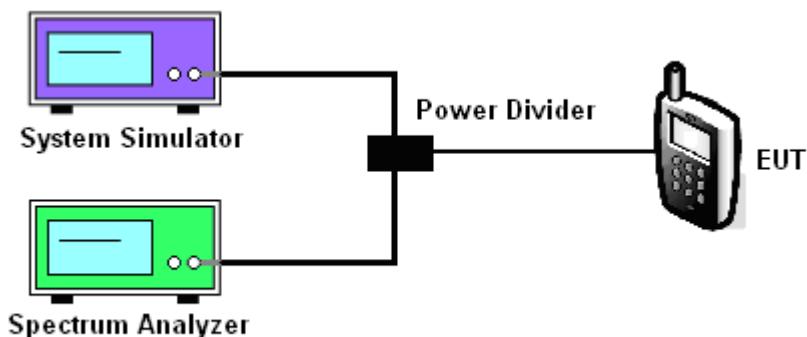


2.6.5 Test Result of Conducted Band Edge


Band	CDMA2000 BC0	Channel	1013
Test Mode	1xRTT_RC3+SO55(QPSK)	Frequency	824.7MHz



Band	CDMA2000 BC0	Channel	777
Test Mode	1xRTT_RC3+SO55(QPSK)	Frequency	848.31MHz

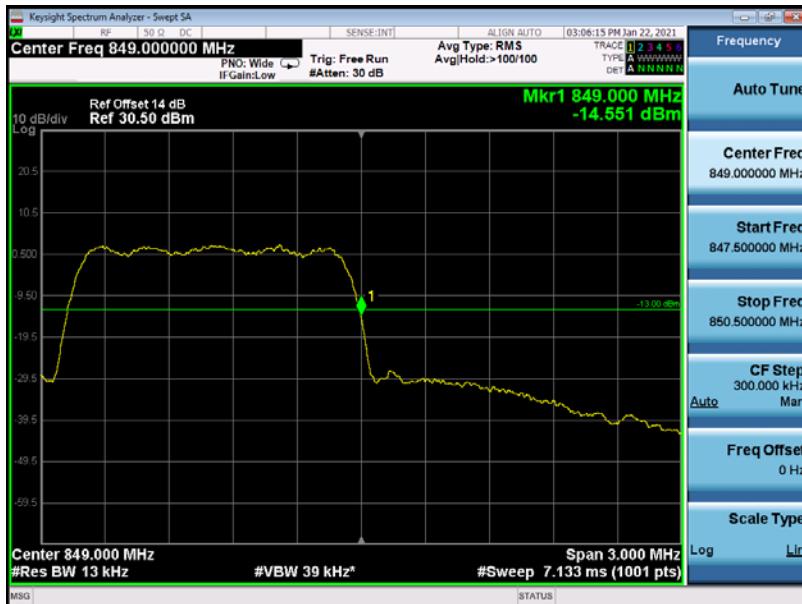

Band	CDMA2000 BC1	Channel	25
Test Mode	1xRTT_RC3+SO55(QPSK)	Frequency	1851.25MHz

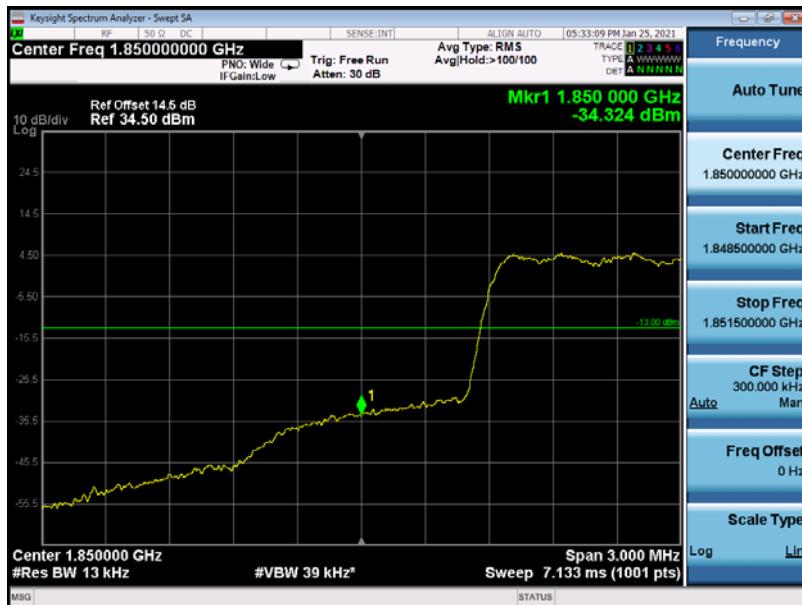

Band	CDMA2000 BC1	Channel	1175
Test Mode	1xRTT_RC3+SO55(QPSK)	Frequency	1908.75MHz



2.7 Transmitter Radiated Power (EIRP/ERP)

2.7.1 Requirement

The substitution method, in ANSI / TIA / EIA-603-E-2016, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

2.7.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3 Test Procedures

1. The EUT was placed on a turntable with 1.5 meter height on a wooden turntable in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer which used a channel power option across EUT's signal bandwidth per section 4.0 of KDB 971168 D01v03r01.
4. The table was rotated 360 degrees and Both Horizontal & Vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.
5. The height of the receiving antenna is adjusted to look for the maximum value.
6. Taking the record of maximum value on spectrum analyzer.
7. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
8. A Broadband antenna (for below 1GHz) and horn antenna (for above 1GHz) was substituted in place of the EUT and was driven by a signal generator.
9. The conducted power at the terminal of the antenna is measured.
10. Repeat step 3 to step 9 to get the maximum ERP/EIRP of the substitution antenna.

$$11. \text{ERP/EIRP} = \text{Ps} + \text{Et} - \text{Es} + \text{Gs} = \text{Ps} + \text{Rt} - \text{Rs} + \text{Gs}$$

Ps (dBm): Input power to substitution antenna.

Gs (dBi or dBd): Substitution antenna Gain.


$$\text{Et} = \text{Rt} + \text{AF} \quad \text{Es} = \text{Rs} + \text{AF}$$

AF (dB/m): Receive antenna factor

Rt: The highest received signal in spectrum analyzer for EUT.

Rs: The highest received signal in spectrum analyzer for substitution antenna.

2.7.4 Test Setup

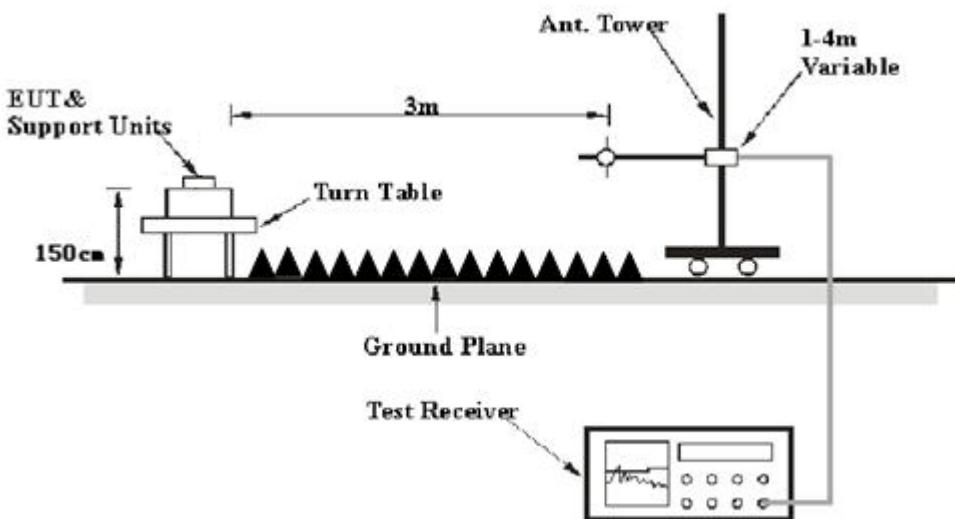

2.7.5 Test Result of Transmitter Radiated Power

Note: The worst case test configuration was found in the vertical positioning where the EUT is laying on its side. The data reported in the tables below were measured in this test setup.

Band	Channel	Frequency (MHz)	Antenna Pol (H/V)	Measured EIRP dBm	Limit dBm	Verdict
CDMA2000 BC0 1xRTT	1013	824.70	V	23.12	38.5	PASS
			H	22.38		
	384	836.52	V	23.29		PASS
			H	22.59		
	777	848.31	V	23.22		PASS
			H	23.00		

Band	Channel	Frequency (MHz)	Antenna Pol (H/V)	Measured EIRP dBm	Limit dBm	Verdict
CDMA2000 BC1 1xRTT	25	1851.25	V	23.18	33	PASS
			H	22.35		
	600	1880.00	V	23.09		PASS
			H	22.92		
	1175	1908.75	V	23.35		PASS
			H	22.33		

2.8 Radiated Spurious Emissions

2.8.1 Requirement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

2.8.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.8.3 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground for below 1GHz, and 1.5meter for above 1GHz.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees and 3-orthogonal axis to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record the maximum spurious emission.
6. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
7. A Broadband antenna (for below 1GHz) and horn antenna (for above 1GHz) was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 3 to step 9 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$\begin{aligned} &= P(W) - [43 + 10\log(P)] \text{ (dB)} \\ &= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} \\ &= -13 \text{ dBm.} \end{aligned}$$


12. The spectrum is measured from 9 KHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. The worst case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
13. For 9KHz to 30MHz: the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
14. All Spurious Emission tests were performed in X, Y, Z axis direction and low, middle, high channel. And only the worst axis test condition was recorded in this test report.

2.8.4 Test Setup

For radiated emissions from 30MHz to 1GHz

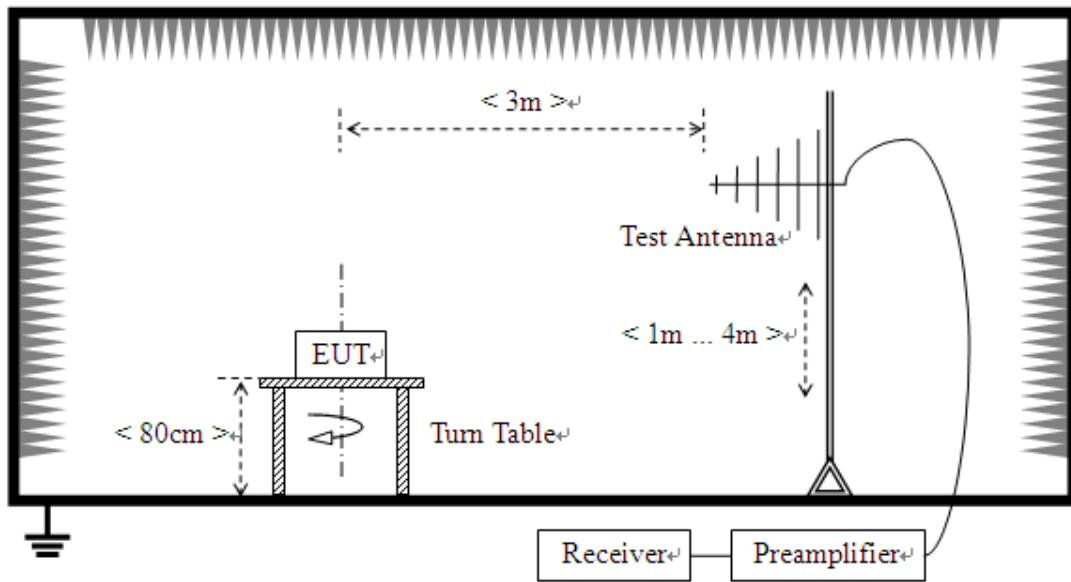

For radiated emissions above 1GHz

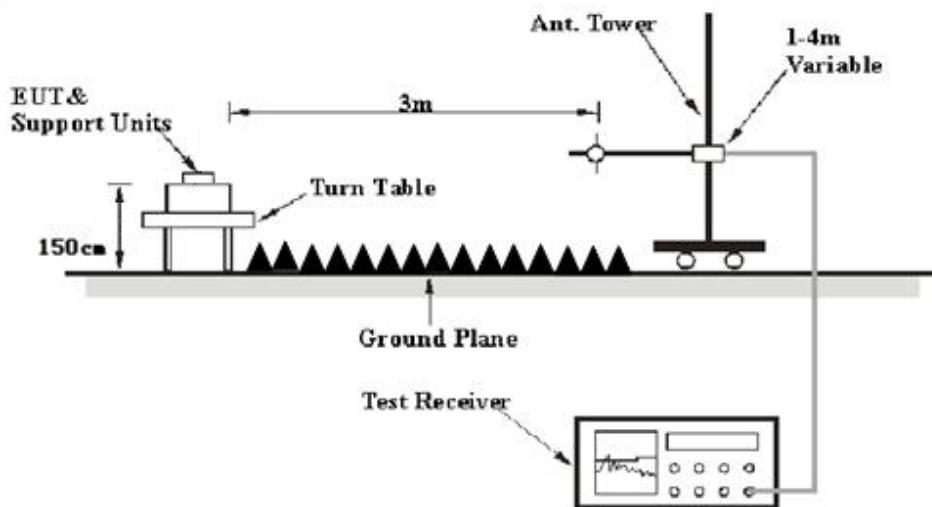

2.8.5 Test Results of Radiated Spurious Emissions

Note: All test modes of the Radiated Spurious Emission (RSE) were tested; only the test worse data in bold of these modes were reported.

CMDA2000 BCO Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	70.7604	-97.61	-78.11	-13.00	65.11	19.50	Horizontal
2	173.146	-105.80	-83.31	-13.00	70.31	22.49	Horizontal
3	353.656	-106.23	-76.77	-13.00	63.77	29.46	Horizontal
4	3037.51	-59.03	-49.88	-13.00	36.88	9.15	Horizontal
5	5648.82	-60.87	-45.38	-13.00	32.38	15.49	Horizontal
6	9708.35	-63.38	-32.00	-13.00	19.00	31.38	Horizontal

Remark: Spurious emission within 30MHz-1GHz were found more than 20dB below limit line.

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	62.0420	-93.86	-73.57	-36.00	37.57	20.29	Vertical
2	520.340	-103.26	-72.34	-36.00	36.34	30.92	Vertical
3	775.705	-104.06	-68.05	-36.00	32.05	36.01	Vertical
4	1202.60	-58.56	-60.06	-30.00	30.06	-1.50	Vertical
5	2148.07	-57.29	-54.45	-30.00	24.45	2.84	Vertical
6	3827.41	-58.63	-49.58	-30.00	19.58	9.05	Vertical

Remark: Spurious emission within 30MHz-1GHz were found more than 20dB below limit line.

Note: Absolute Level=Reading level + Factor

CMDA2000 BC1 Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	70.7604	-97.61	-78.11	-13.00	65.11	19.50	Horizontal
2	173.146	-105.80	-83.31	-13.00	70.31	22.49	Horizontal
3	353.656	-106.23	-76.77	-13.00	63.77	29.46	Horizontal
4	3037.51	-59.03	-49.88	-13.00	36.88	9.15	Horizontal
5	5648.82	-60.87	-45.38	-13.00	32.38	15.49	Horizontal
6	9708.35	-63.38	-32.00	-13.00	19.00	31.38	Horizontal

Remark: Spurious emission within 30MHz-1GHz were found more than 20dB below limit line.

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	70.7604	-98.32	-76.88	-13.00	63.88	21.44	Vertical
2	336.188	-104.14	-77.67	-13.00	64.67	26.47	Vertical
3	1223.11	-57.45	-59.20	-13.00	46.20	-1.75	Vertical
4	3217.60	-59.49	-49.93	-13.00	36.93	9.56	Vertical
5	6084.04	-60.64	-43.15	-13.00	30.15	17.49	Vertical
6	9678.33	-62.57	-32.03	-13.00	19.03	30.54	Vertical

Remark: Spurious emission within 30MHz-1GHz were found more than 20dB below limit line.

Note: Absolute Level=Reading level + Factor

3. LIST OF MEASURING EQUIPMENT

Description	Manufacturer	Model	Serial No.	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESU8	A0805559	2020.04.03	2021.04.02	Radiation
Loop Antenna	Schwarz beck	HFH2-Z2	100047	2019.04.26	2022.04.25	Radiation
Broadband antenna (30MHz~1GHz)	Schwarbeck	BBHA 9120 J	A190503537	2019.01.07	2021.01.06	Radiation
Broadband antenna (30MHz~1GHz)	R&S	HK116	A130701424	2018.01.19	2021.01.18	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100150	2019.04.27	2022.04.26	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100149	2019.04.17	2022.04.16	Radiation
Horn antenna (18GHz~26.5GHz)	AR	AT4510	A0804450	2020.06.19	2023.06.18	Radiation
Horn antenna (18GHz~26.5GHz)	AR	AT4003A	0329293	2020.09.17	2021.09.16	Radiation
Amplifier 30M~1GHz	MILMEGA	80RF1000-1000 4	A140101634	2020.03.24	2021.03.23	Radiation
Amplifier 1G~18GHz	MILMEGA	AS0104R-800/4 00	A160302517	2020.03.24	2021.03.23	Radiation
Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2020.05.18	2021.05.17	Conducted
Test Receiver	R&S	ESIB26	A0304218	2020.04.29	2021.04.28	Conducted
Temperature chamber	XSM	DNF810C	A0501375	2020.05.26	2021.05.25	Conducted
Wideband Radio Communication tester	R&S	CMW500	A130101034	2019.07.30	2021.07.29	Conducted
Power Supply	R&S	WYJ-60100	A141102031	2020.01.16	2023.01.15	Conducted
EMI Test Receiver	R&S	ESU8	A0805559	2020.04.03	2021.04.02	Radiation
Loop Antenna	Schwarz beck	HFH2-Z2	100047	2019.04.26	2022.04.25	Radiation

** END OF REPORT **