



TEST REPORT

No. I14Z49056-EMC01

for

TCL Communication Ltd

**HSUPA/HSDPA/UMTS triband / GSM quadbands/LTE triband mobile
phone**

Model Name: 5042T,5042N

FCC ID: 2ACCJA002

with

Hardware Version: PIO1

Software Version: A1H

Issued Date: 2015-01-16

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No. 525429

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I14Z49056-EMC01	Rev.0	1st edition	2015-01-16

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION.....	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2014-12-20

Testing End Date: 2015-01-09

1.4. Signature



Qu Pengfei

(Prepared this test report)



Sun Xiangqian

(Reviewed this test report)



Lu Bingsong

Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@tcl.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSUPA/HSDPA/UMTS triband/GSM quadbands/LTE tri-band mobile phone
Model Name	5042T, 5042N
FCC ID	2ACCJA002
Extreme vol. Limits	3.4VDC to 4.35VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	014302000100192	PIO1	A1H

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	14TCT-BA-1875
AE2	Battery	/	14TCT-BA-1886
AE3	Battery	/	14TCT-BA-1611
AE4	Battery	/	14TCT-BA-1608
AE5	Battery	/	14TCT-BA-1614
AE6	Battery	/	14TCT-BA-1889
AE7	Battery	/	14TCT-BA-1882
AE8	Travel charger	/	14TCT-CH-2025
AE9	Travel charger	/	14TCT-CH-2021
AE10	USB cable	/	14TCT-DC-0161
AE11	USB cable	/	/

AE1, AE2, AE3, AE4, AE5, AE6, AE7

Model	CAB2000013C2
Manufacturer	SCUD
Capacitance	2000mAh
Nominal voltage	3.8V

AE8, AE9

Model	CBA3000AG0C1
Manufacturer	Tenpao
Length of cable	/

AE10

Model CDA3122005C1
Manufacturer JUWEI
Length of cable 101cm

AE11

Model CDA3122005C2
Manufacturer Shenghua
Length of cable 98cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1 + AE8	Charger
Set.2	EUT1+ AE1 + AE10/AE11	USB

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	10-1-13
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low - Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	Edition 2009

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
Location Column	1/2/3/4	The test is performed in test location 1, 2, 3 or 4 which are described in section 1.1 of this report

Clause	List	Clause in FCC rules	Verdict	Location
1	Radiated Emission	15.109(a)	P	1
2	Conducted Emission	15.107(a)	P	1

7. Test Equipments Utilized

NO.	DESCRIPTION	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESCI	100344	R&S	2015-03-03	1 year
2	Test Receiver	ESCI 7	100948	R&S	2015-07-16	1 year
3	Universal Radio Communication Tester	CMU200	109914	R&S	2015-04-13	1 year
4	Test Receiver	FSV	101047	R&S	2015-06-27	1 year
5	LISN	ESH2-Z5	829991/012	R&S	2015-04-14	1 year
6	EMI Antenna	VULB 9163	9163-234	Schwarzbeck	2016-09-16	3 years
7	EMI Antenna	3115	9906-5827	ETS-Lindgren	2016-11-19	3 years
8	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
9	Monitor	E178FPc	CN-OWR979-64180 -7AJ-D2MS	DELL	N/A	N/A
10	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
11	Keyboard	L100	CN0RH659658907 ATOI40	DELL	N/A	N/A
12	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit (μ V/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): $U = 4.3 \text{ dB}$, $k=2$.

Measurement results for Set.1:

Charging Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
9943.750	35.1	-24.9	38.0	22.000	V
9928.563	35.1	-24.9	38.0	22.000	H
9951.625	35.0	-24.9	38.0	21.900	V
9952.188	35.0	-24.9	38.0	21.900	V
9955.563	35.0	-24.9	38.0	21.900	V
9993.250	35.0	-24.2	38.0	21.200	H

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
8923.375	47.9	-26.6	38.0	36.500	V
9444.250	47.9	-25.6	38.4	35.100	V
8938.563	47.2	-26.7	38.0	35.900	V
9970.188	47.1	-24.2	38.0	33.300	H
9680.500	46.8	-24.5	38.0	33.300	V
9955.563	46.8	-24.9	38.0	33.700	H

Measurement results for Set.2:
USB Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
9962.875	35.2	-24.2	38.0	21.400	H
9952.188	35.1	-24.9	38.0	22.000	V
9978.625	35.1	-24.2	38.0	21.300	H
9941.500	35.0	-24.9	38.0	21.900	H
9989.313	35.0	-24.2	38.0	21.200	V
9980.313	35.0	-24.2	38.0	21.200	H

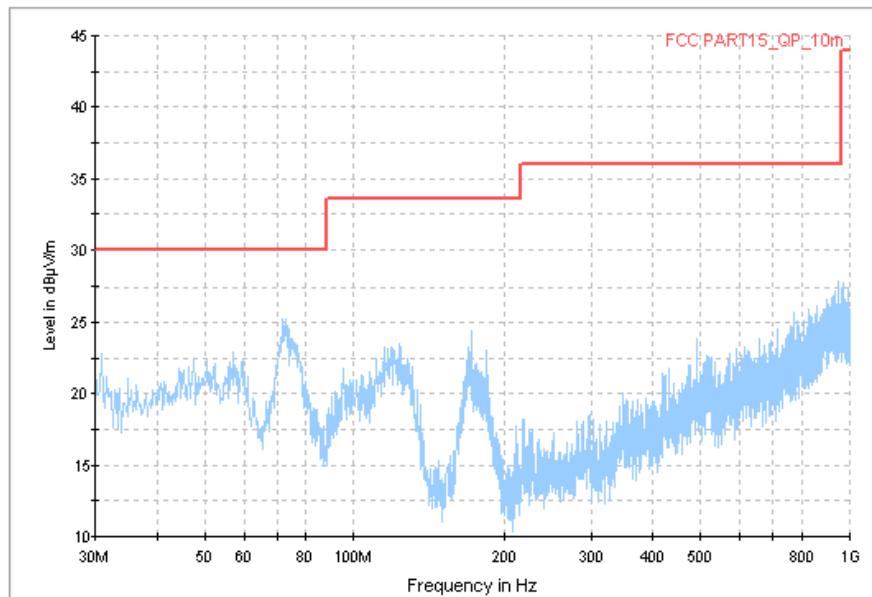
USB Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
1463.500	51.5	-40.0	24.1	67.400	H
1194.625	51.3	-41.2	24.1	68.400	V
1464.625	51.3	-40.0	24.1	67.200	V
1464.063	51.1	-40.0	24.1	67.000	V
1432.000	50.4	-40.4	24.1	66.700	H
1447.750	50.1	-40.2	24.1	66.200	V

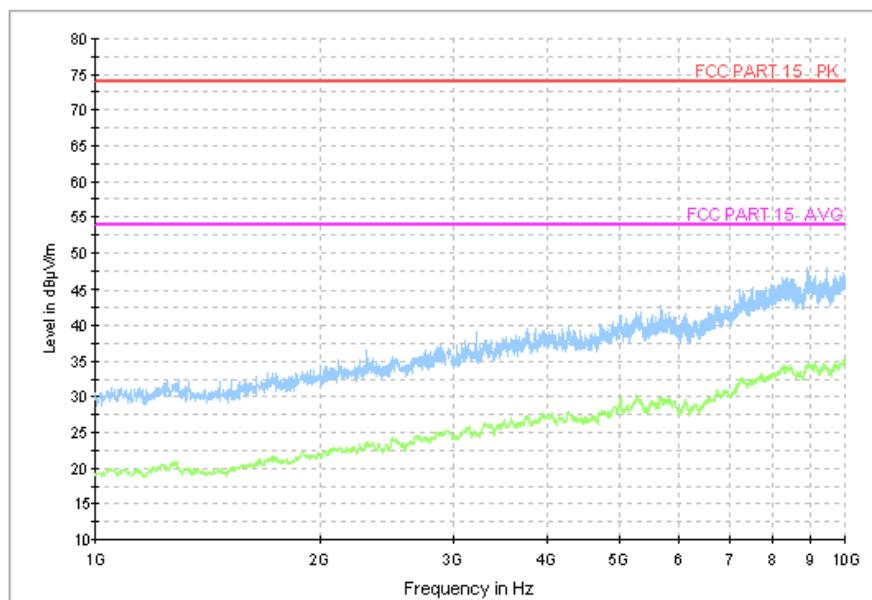
Note: The measurement results of Set.1 and Set.2 showed here are worst cases of the combinations of different USB cables.

Charging Mode, Set.1

Normal RE_30M-1GHz_10m

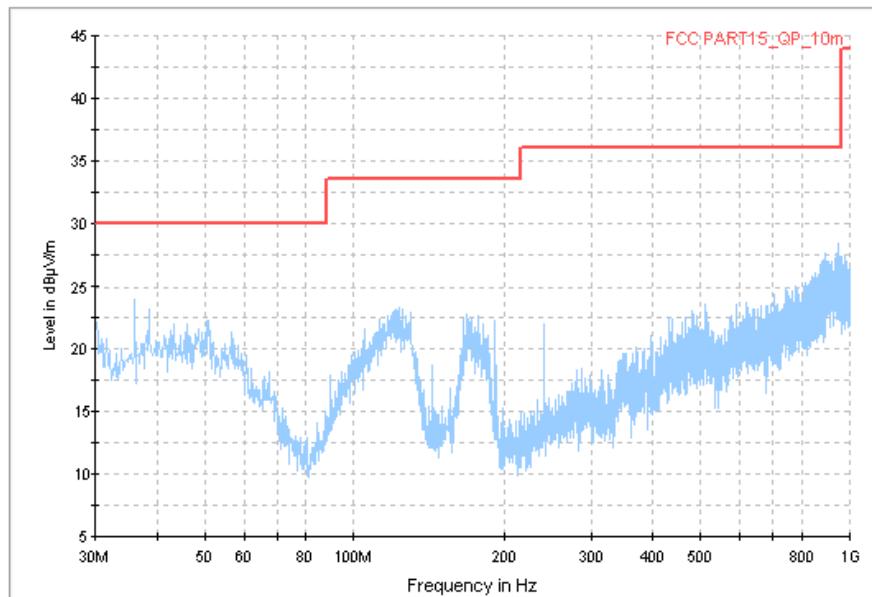
**Fig.1 Radiated Emission from 30MHz to 1GHz**

Normal RE_1G-18GHz_directly

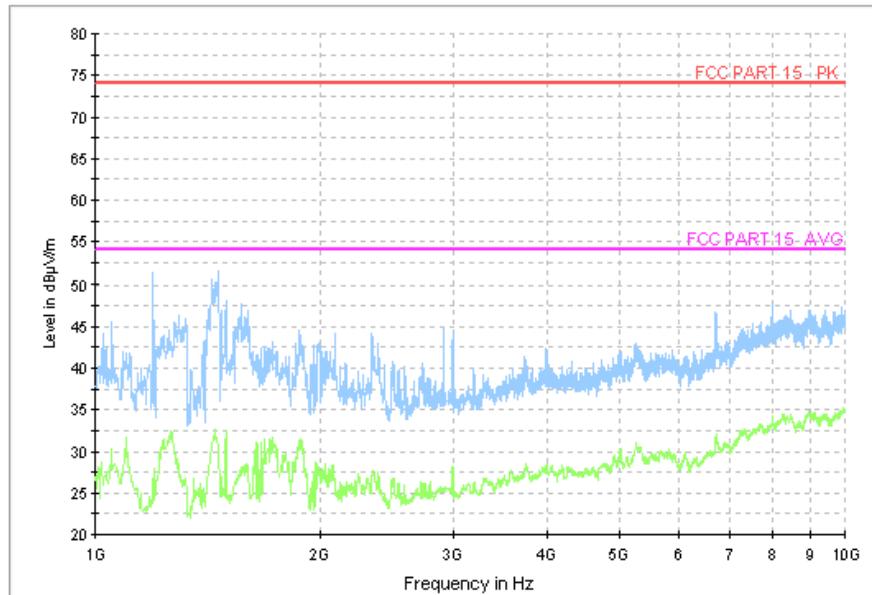
**Fig.2 Radiated Emission from 1GHz to 10GHz**

USB Mode, Set.2

Normal RE_30M-1GHz_10m

**Fig.3 Radiated Emission from 30MHz to 1GHz**

RE_1G-10GHz

**Fig.4 Radiated Emission from 1GHz to 10GHz**

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 7.2.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U = 2.9 \text{ dB}$, $k=2$.

Charging Mode, Set.1

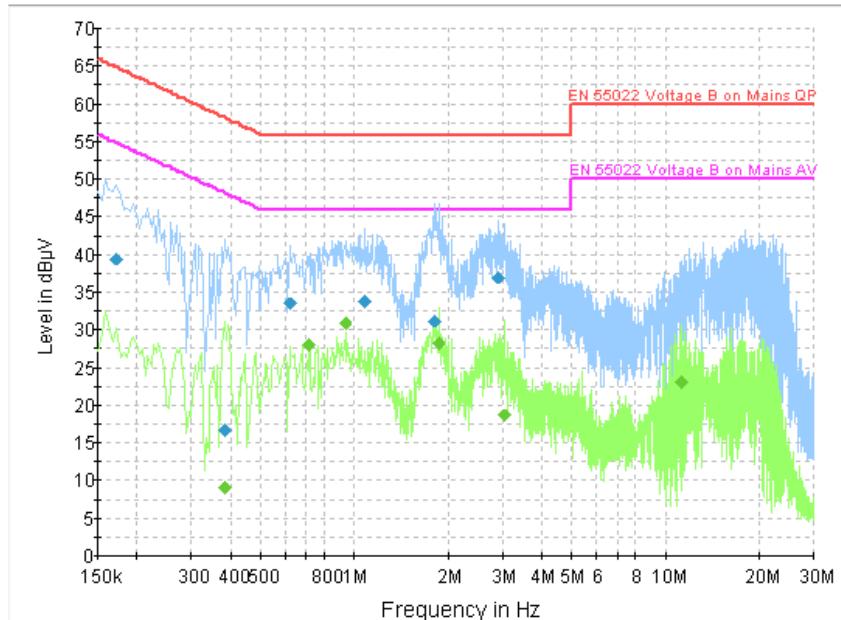


Fig.5 Conducted Emission

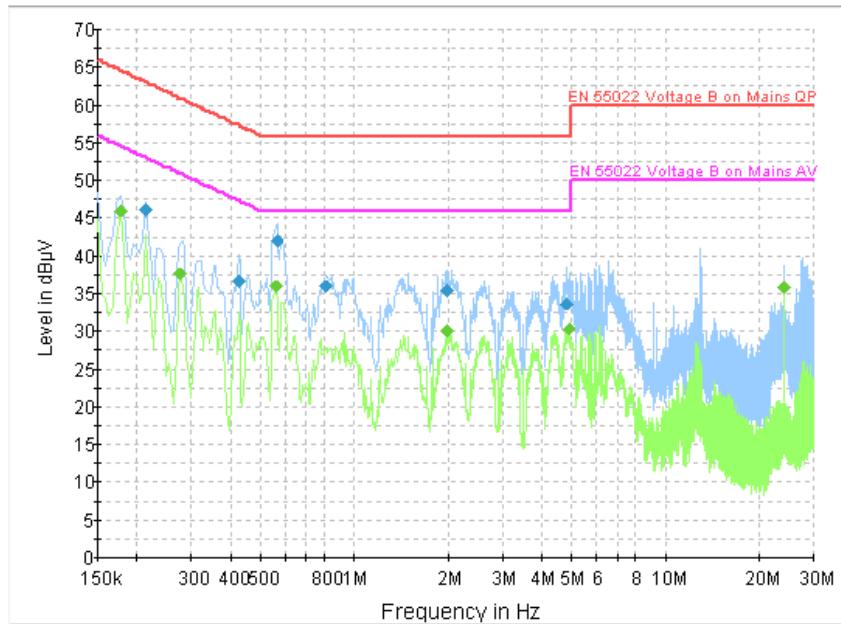
Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.172500	39.5	GND	L1	19.9	25.3	64.8
0.384000	16.8	GND	L1	19.9	41.4	58.2
0.622500	33.4	GND	L1	19.9	22.6	56.0
1.086000	33.8	GND	L1	19.8	22.2	56.0
1.810500	31.2	GND	L1	19.7	24.8	56.0
2.895000	37.0	GND	L1	19.7	19.0	56.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.384000	9.1	GND	L1	19.9	39.1	48.2
0.717000	28.1	GND	N	19.9	17.9	46.0
0.933000	30.9	GND	L1	19.8	15.1	46.0
1.864500	28.2	GND	L1	19.7	17.8	46.0
3.030000	18.6	GND	L1	19.7	27.4	46.0
11.175000	23.2	GND	L1	19.8	26.8	50.0

Note: The measurement results showed here are worst cases of the combinations of different USB cable.

USB Mode, Set.2

Fig.6 Conducted Emission
Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.213000	46.2	GND	N	19.9	16.9	63.1
0.424500	36.6	GND	N	20.0	20.7	57.4
0.564000	42.1	GND	L1	20.0	13.9	56.0
0.807000	35.9	GND	N	19.9	20.1	56.0
1.990500	35.5	GND	N	19.7	20.5	56.0
4.821000	33.7	GND	N	19.7	22.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.177000	46.1	GND	N	19.9	8.6	54.6
0.276000	37.7	GND	N	19.9	13.3	50.9
0.559500	36.0	GND	L1	20.0	10.0	46.0
1.990500	30.0	GND	L1	19.7	16.0	46.0
4.915500	30.4	GND	N	19.7	15.6	46.0
24.058500	35.8	GND	N	19.9	14.2	50.0

Note: The measurement results showed here are worst cases of the combinations of different USB cables.

*****END OF REPORT*****