



# TEST REPORT

No. I15Z41083-EMC01

for

**TCL Communication Ltd.**

**HSUPA/HSDPA/UMTS qudbands/GSM qudbands/LTE Six -band  
mobile phone**

**Model Name: 5065A**

**FCC ID: 2ACCJA004**

**with**

**Hardware Version: PIO**

**Software Version: A5X**

**Issued Date: 2015-06-18**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**FCC 2.948 Listed: No. 525429**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@catr.cn](mailto:ctl_terminals@catr.cn), website: [www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

Report Number	Revision	Description	Issue Date
I15Z41083-EMC01	Rev.0	1st edition	2015-6-18

## **CONTENTS**

1. TEST LABORATORY.....	4
1.1. TESTING LOCATION.....	4
1.2. TESTING ENVIRONMENT .....	4
1.3. PROJECT DATA.....	4
1.4. SIGNATURE .....	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....	6
3.1. ABOUT EUT .....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS .....	7
4. REFERENCE DOCUMENTS .....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT .....	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS .....	12

## 1. Test Laboratory

### 1.1. Testing Location

#### Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

### 1.2. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2015-05-15

Testing End Date: 2015-05-26

### 1.4. Signature




Wang Junqing

(Prepared this test report)



Qu Pengfei

(Reviewed this test report)



Liu Baodian

Deputy Director of the laboratory

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shanghai  
Postal Code: 201203  
Country: China  
Contact Person: Gong Zhizhou  
Contact Email: zhizhou.gong@tcl.com  
Telephone: 0086-21-51798260  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-51798260  
Fax: 0086-21-61460602

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	HSUPA/HSDPA/UMTS qudbands / GSM qudbands/LTE Six -band mobile phone
Model Name	5065A
FCC ID	2ACCJA004
Extreme vol. Limits	3.5VDC to 4.35VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	014354000052055	A5X	PIO

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN	Remarks
AE1	Battery	/	15TCT-BA-0294
AE2	Battery	/	15TCT-BA-0242
AE3	Battery	/	15TCT-BA-0252
AE4	Battery	/	15TCT-BA-0254
AE5	Travel charger	/	15TCT-CH-0280
AE6	Travel charger	/	15TCT-CH-0278
AE7	Travel charger	/	15TCT-CH-0374
AE8	Travel charger	/	15TCT-CH-0377
AE9	USB cable	/	14TCT-DC-0260
AE10	USB cable	/	14TCT-DC-0616
AE11	USB cable	/	15TCT-DC-0004
AE12	USB cable	/	14TCT-DC-0312

#### **AE1**

Model	CAC2000027C2
Manufacturer	SCUD
Capacitance	2000mAh
Nominal voltage	3.8V

#### **AE2, AE3, AE4**

Model	CAB2000031C1
Manufacturer	BYD
Capacitance	2000mAh
Nominal voltage	3.8V

AE5, AE6

Model CBA0067AG0C1  
Manufacturer BYD  
Length of cable /

AE7, AE8

Model CBA0067AG0C4  
Manufacturer Aohai  
Length of cable /

AE9, AE10

Model CDA3122002C1  
Manufacturer JUWEI  
Length of cable 98cm

AE11, AE12

Model CDA3122002C2  
Manufacturer Shenghua  
Length of cable 98cm

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. EUT set-ups**

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT1 +AE1/AE2 +AE5 +AE9/AE11	Charger
Set.2	EUT1 +AE1/AE2 +AE7 +AE9/AE11	Charger
Set.3	EUT1 +AE1/AE2 +AE9/AE11	USB

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	10-1-13
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low - Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	Edition 2009

## **5. LABORATORY ENVIRONMENT**

**Semi-anechoic chamber SAC-1** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz –1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
Location Column	1/2/3/4	The test is performed in test location 1, 2, 3 or 4 which are described in section 1.1 of this report

Clause	List	Clause in FCC rules	Verdict	Location
1	Radiated Emission	15.109(a)	P	1
2	Conducted Emission	15.107(a)	P	1

## 7. Test Equipments Utilized

NO.	DESCRIPTION	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESCI	100344	R&S	2016-03-02	1 year
2	Test Receiver	ESCI 7	100948	R&S	2015-07-16	1 year
3	Universal Radio Communication Tester	CMU200	109914	R&S	2016-03-26	1 year
4	Test Receiver	FSV	101047	R&S	2015-06-27	1 year
5	LISN	ENV216	101200	R&S	2015-07-07	1 year
6	EMI Antenna	VULB 9163	9163-234	Schwarzbeck	2016-09-15	3 years
7	EMI Antenna	3115	6914	ETS-Lindgren	2017-12-15	3 years
8	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
9	Monitor	E178FPc	CN-OWR979-64180-7AJ-D2MS	DELL	N/A	N/A
10	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
11	Keyboard	L100	CN0RH659658907 ATOI40	DELL	N/A	N/A
12	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission (§15.109(a))**

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu$ V/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{RPL}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{RPL} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{PL}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case):  $U = 4.3 \text{ dB}$ ,  $k=2$ .

#### Measurement results for Set.1:

##### Charging Mode/Average detector

Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity
17888.969	46.2	-18.5	45.6	19.100	H
17886.313	46.1	-18.5	45.6	19.000	H
17864.000	46.1	-18.5	45.6	19.000	V
17891.625	46.1	-18.5	45.6	19.000	H
17879.938	46.1	-18.5	45.6	19.000	H
17869.844	46.0	-18.5	45.6	18.900	H

##### Charging Mode/Peak detector

Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity
17875.688	57.6	-18.5	45.6	30.500	H
17878.344	57.4	-18.5	45.6	30.300	H
17960.688	57.1	-17.7	45.6	29.200	V
17878.875	57.0	-18.5	45.6	29.900	H
17951.125	57.0	-17.7	45.6	29.100	H
17898.000	56.9	-18.5	45.6	29.800	H

**Measurement results for Set.2:**
**Charging Mode/Average detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
17908.625	45.8	-18.5	45.6	18.700	H
17861.344	45.8	-18.5	45.6	18.700	H
17903.313	45.8	-18.5	45.6	18.700	V
17899.063	45.8	-18.5	45.6	18.700	H
17894.813	45.8	-18.5	45.6	18.700	H
17883.656	45.8	-18.5	45.6	18.700	H

**Charging Mode/Peak detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
17899.594	58.0	-18.5	45.6	30.900	H
17966.531	57.8	-17.7	45.6	29.900	H
17877.813	57.4	-18.5	45.6	30.300	V
17867.719	57.3	-18.5	45.6	30.200	H
17874.094	57.3	-18.5	45.6	30.200	H
17994.156	57.2	-17.7	45.6	29.300	H

**Measurement results for Set.3:**
**USB Mode/Average detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
4849.933	48.6	-35.1	33.1	50.600	H
4849.367	48.3	-35.1	33.1	50.300	H
15294.733	43.8	-21.6	39.4	26.000	V
17983.000	43.4	-17.7	45.6	15.500	H
17985.833	43.4	-17.7	45.6	15.500	H
17976.767	43.3	-17.7	45.6	15.400	H

**USB Mode/Peak detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
17993.200	55.8	-17.7	45.6	27.900	H
17989.800	55.6	-17.7	45.6	27.700	H
4849.933	55.4	-35.1	33.1	57.400	V
17898.567	55.3	-18.5	45.6	28.200	H
17997.167	55.1	-17.7	45.6	27.200	H
17958.067	55.0	-17.7	45.6	27.100	H

Note: The measurement results of Set.1, Set.2 and Set.3 showed here are worst cases of the combinations of different batteries and different USB cables.

## Charging Mode, Set.1

Normal RE\_30M-1GHz\_10m

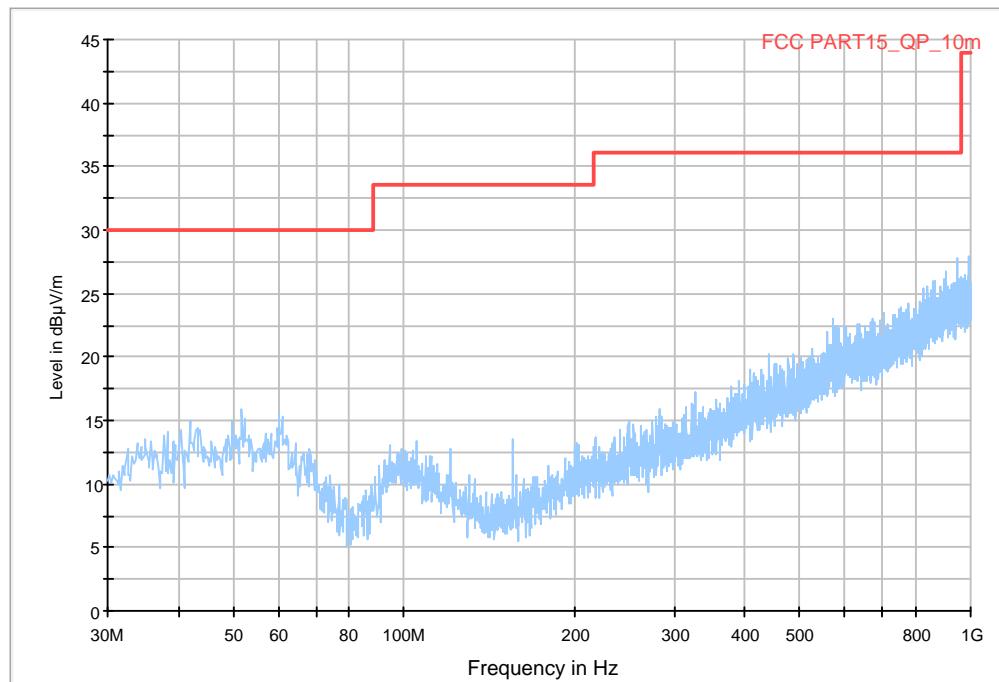


Fig.1 Radiated Emission from 30MHz to 1GHz

Normal RE\_1G-18GHz\_directly

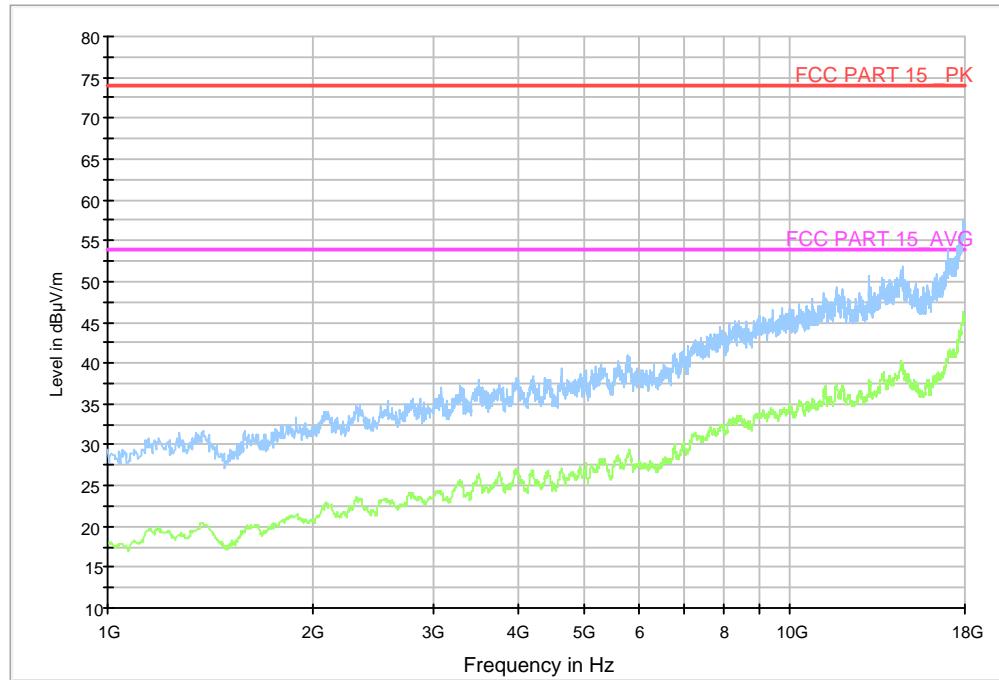


Fig.2 Radiated Emission from 1GHz to 18GHz

## Charging Mode, Set.2

Normal RE\_30M-1GHz\_10m

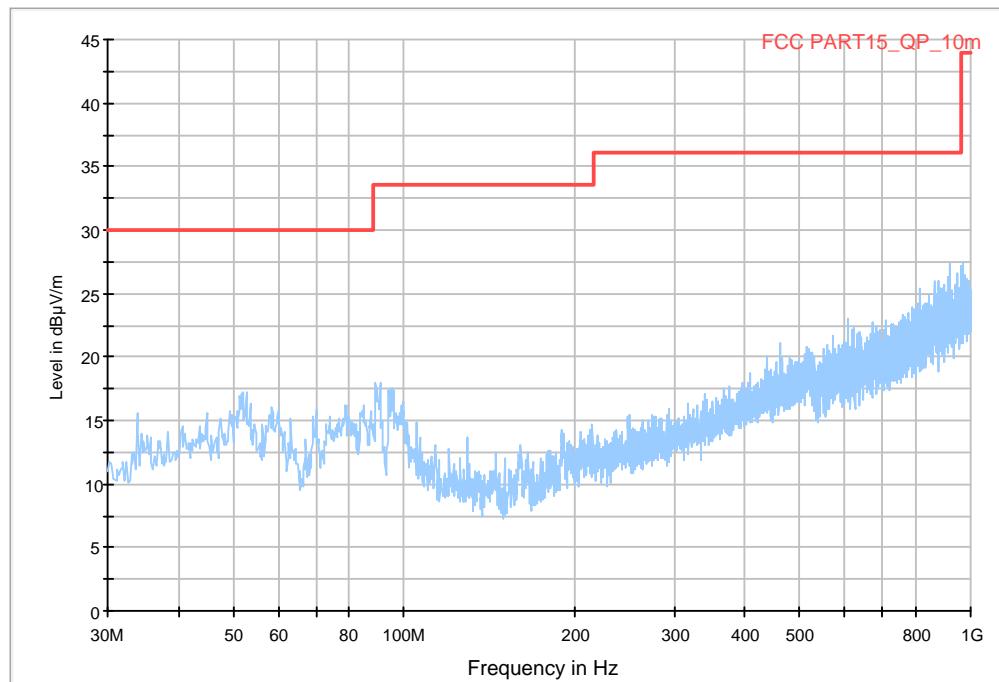


Fig.3 Radiated Emission from 30MHz to 1GHz

Normal RE\_1G-18GHz\_directly

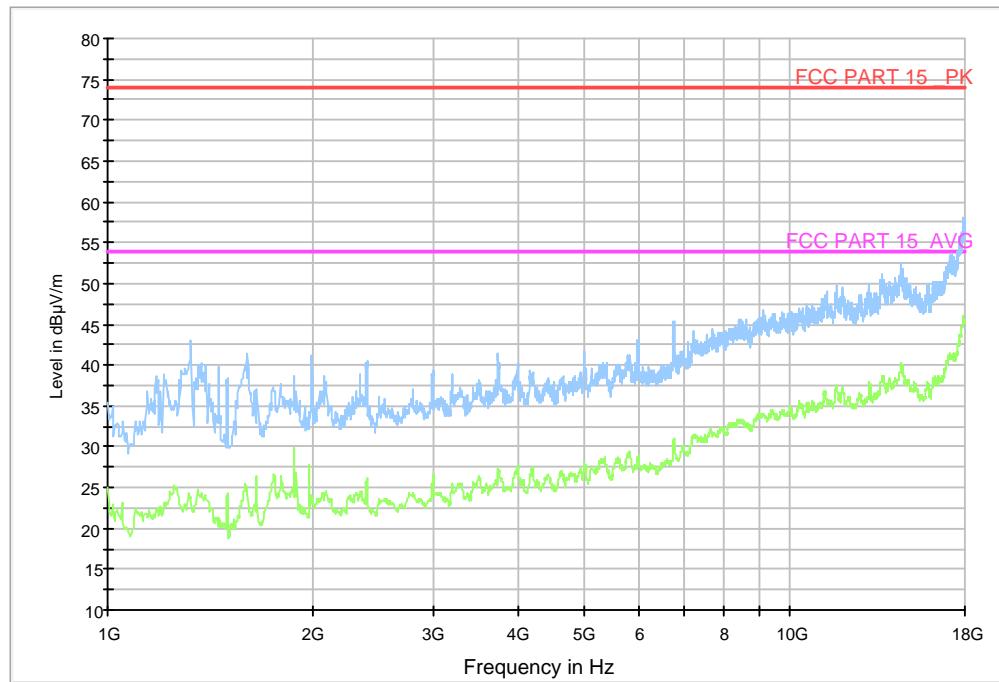
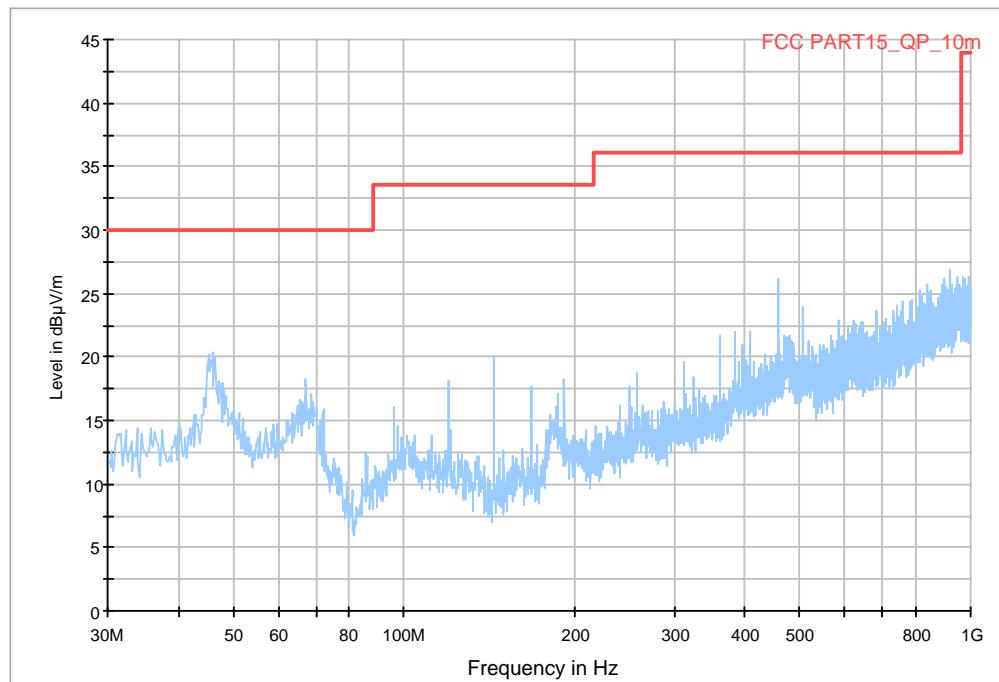



Fig.4 Radiated Emission from 1GHz to 18GHz

**USB Mode, Set.3**

Normal RE\_30M-1GHz\_10m


**Fig.5 Radiated Emission from 30MHz to 1GHz**

Normal RE\_1G-18GHz\_directly

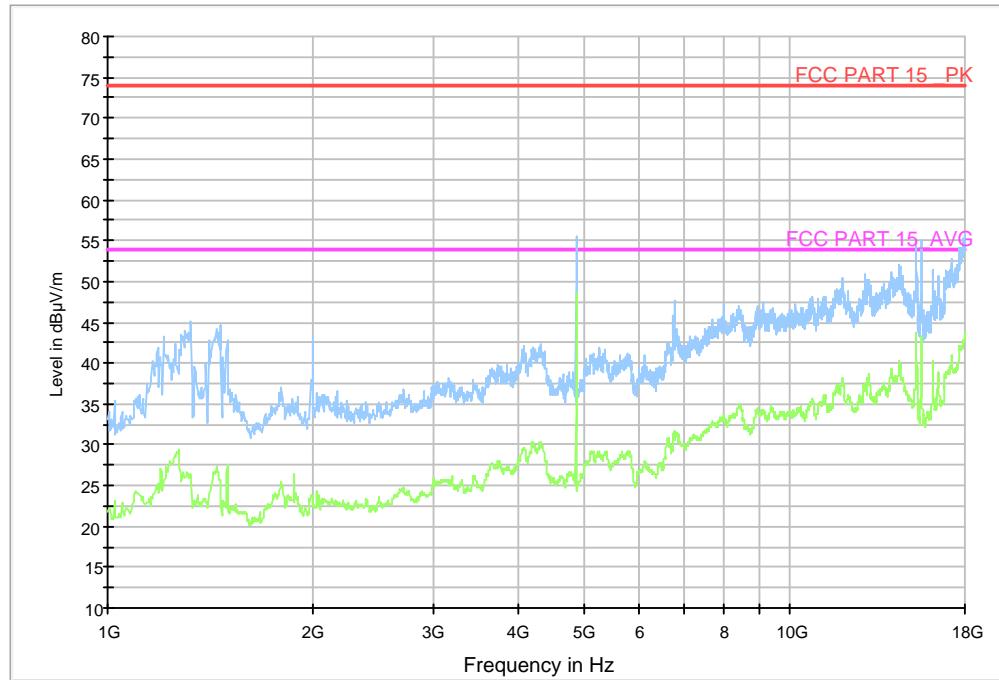
**Fig.6 Radiated Emission from 1GHz to 18GHz**

## A.2 Conducted Emission (§15.107(a))

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 7.2.

### A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode


Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U = 2.9 \text{ dB}$ ,  $k=2$ .

#### Charging Mode, Set.1

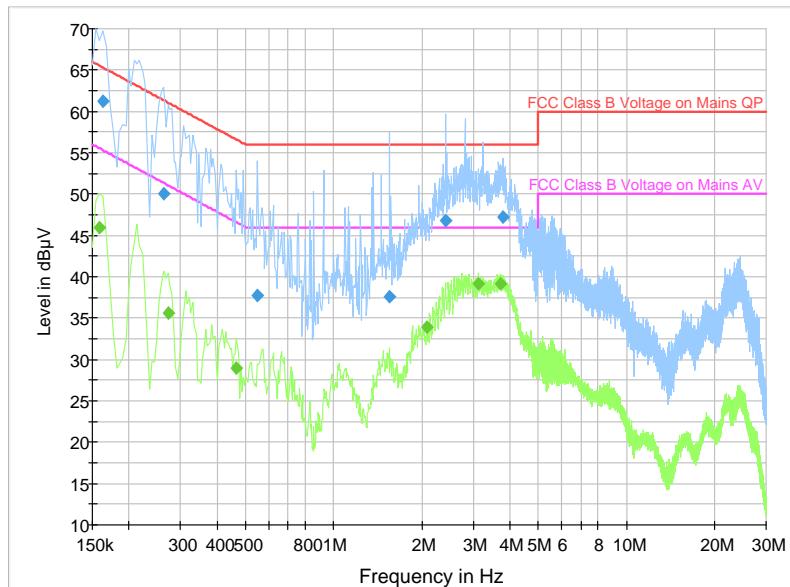

**Fig.7 Conducted Emission**


#### Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.163500	61.3	GND	L1	19.7	4.0	65.3
0.262500	50.1	GND	N	19.7	11.3	61.4
0.550500	37.7	GND	L1	19.8	18.3	56.0
1.554000	37.6	GND	L1	19.7	18.4	56.0
2.409000	46.7	GND	L1	19.6	9.3	56.0
3.790500	47.2	GND	L1	19.7	8.8	56.0

#### Final Result 2

Frequency (MHz)	CAverage (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.159000	46.0	GND	L1	19.7	9.6	55.5
0.271500	35.7	GND	L1	19.8	15.4	51.1
0.465000	29.0	GND	N	19.8	17.6	46.6
2.080500	34.0	GND	N	19.6	12.0	46.0
3.120000	39.1	GND	N	19.6	6.9	46.0
3.732000	39.2	GND	N	19.7	6.8	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and different USB cables.

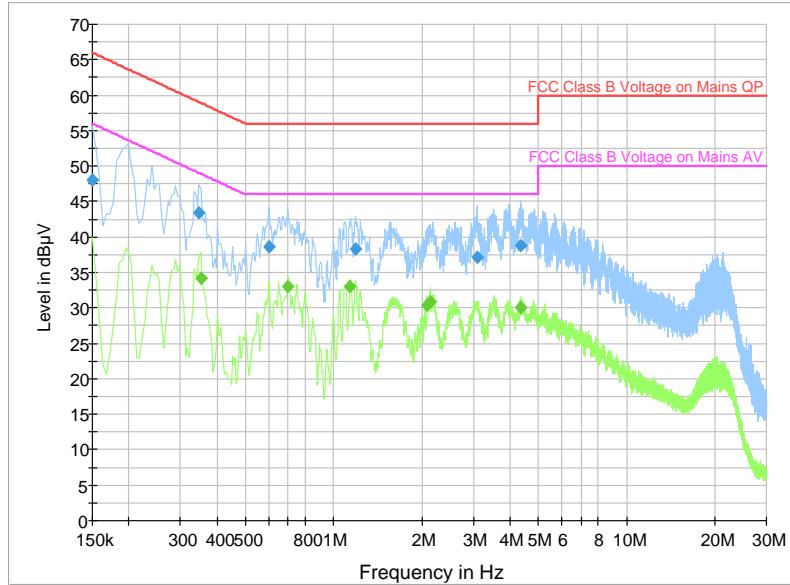
**Charging Mode, Set.2**

**Fig.8 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	48.1	GND	N	20.1	17.9	66.0
0.348000	43.4	GND	N	19.8	15.6	59.0
0.600000	38.6	GND	L1	19.8	17.4	56.0
1.185000	38.3	GND	N	19.7	17.7	56.0
3.079500	37.2	GND	N	19.7	18.8	56.0
4.357500	38.8	GND	N	19.7	17.2	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.352500	34.2	GND	L1	19.8	14.7	48.9
0.699000	33.0	GND	L1	19.8	13.0	46.0
1.140000	33.0	GND	L1	19.6	13.0	46.0
2.089500	30.4	GND	N	19.6	15.6	46.0
2.139000	30.9	GND	L1	19.6	15.1	46.0
4.335000	30.0	GND	L1	19.7	16.0	46.0

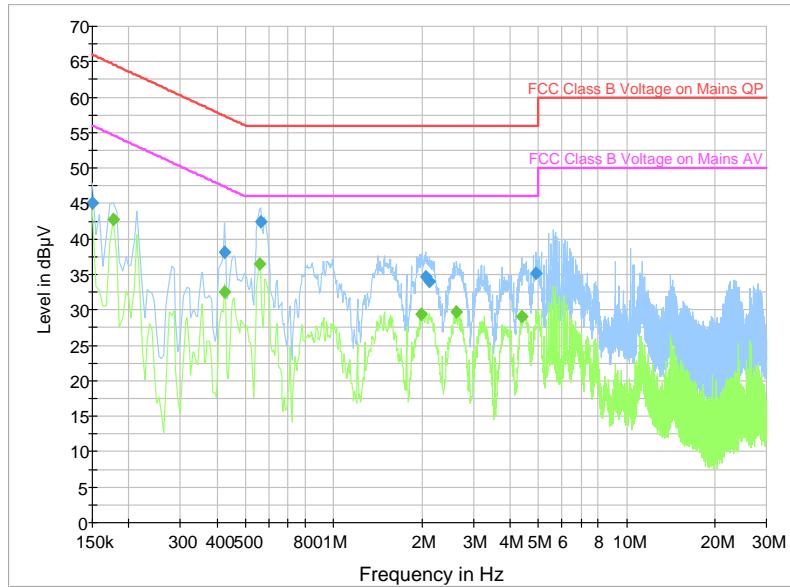Note: The measurement results showed here are worst cases of the combinations of different batteries and different USB cables.

**USB Mode, Set.3**

**Fig.9 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.0	GND	L1	20.1	21.0	66.0
0.424500	38.2	GND	N	19.8	19.2	57.4
0.564000	42.5	GND	L1	19.8	13.5	56.0
2.062500	34.6	GND	L1	19.6	21.4	56.0
2.130000	34.1	GND	L1	19.6	21.9	56.0
4.915500	35.2	GND	L1	19.7	20.8	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.177000	42.8	GND	L1	19.7	11.8	54.6
0.424500	32.5	GND	N	19.8	14.9	47.4
0.559500	36.4	GND	L1	19.8	9.6	46.0
1.990500	29.5	GND	N	19.6	16.5	46.0
2.625000	29.6	GND	N	19.7	16.4	46.0
4.402500	29.1	GND	N	19.7	16.9	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and different USB cables.

**\*\*\*END OF REPORT\*\*\***