



The Photos of SAR test

No. I15Z41083-SEM01

For

TCL Communication Ltd.

**HSUPA/HSDPA/UMTS quadbands / GSM quadbands/LTE Six -band
mobile phone**

Model name: 5065A

With

Hardware Version: PIO

Software Version: A5X

FCC ID: 2ACCJA004

Issued Date: 2015-07-01



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT


No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China 100191

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: ctl_terminals@catr.cn, website: www.chinattl.com




Picture 1: Constituents of the sample

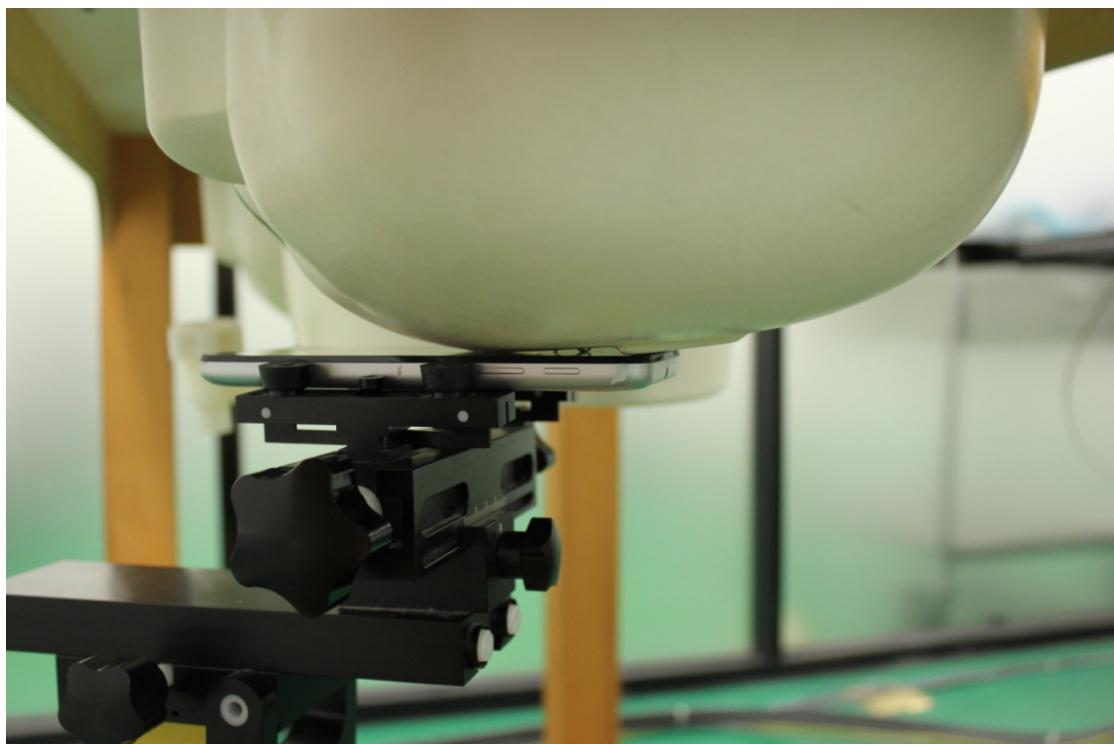

Picture 2: Left Hand Touch Cheek Position

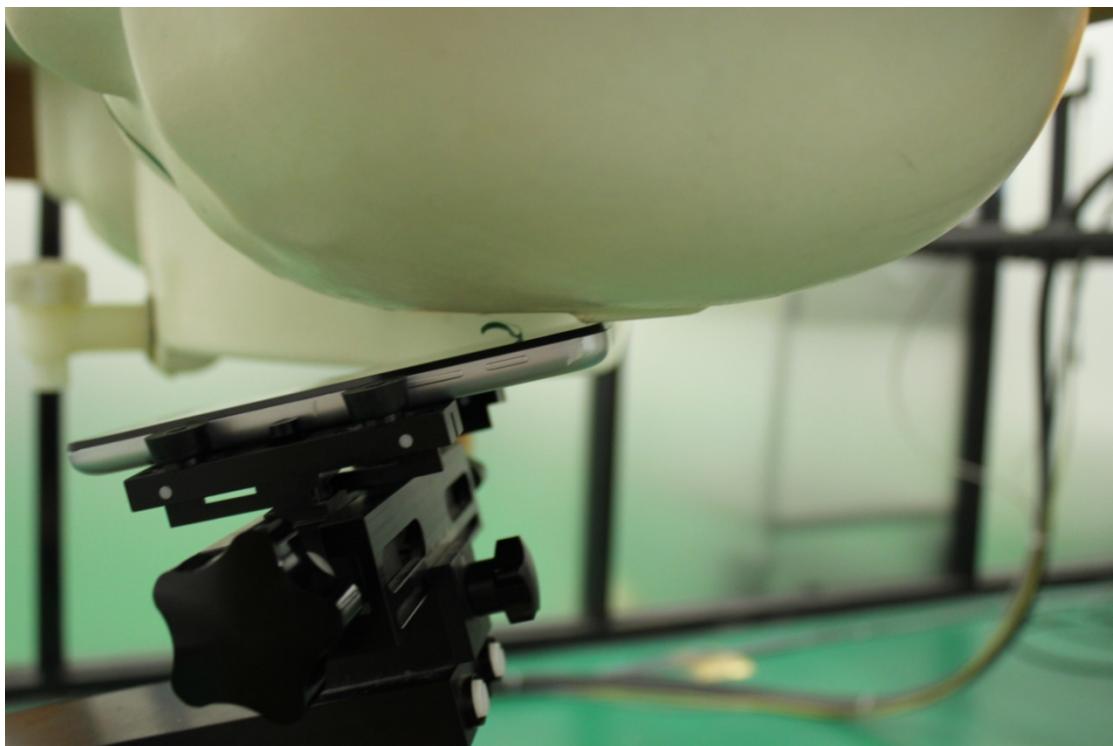

Picture 3: Left Hand Tilt 15° Position

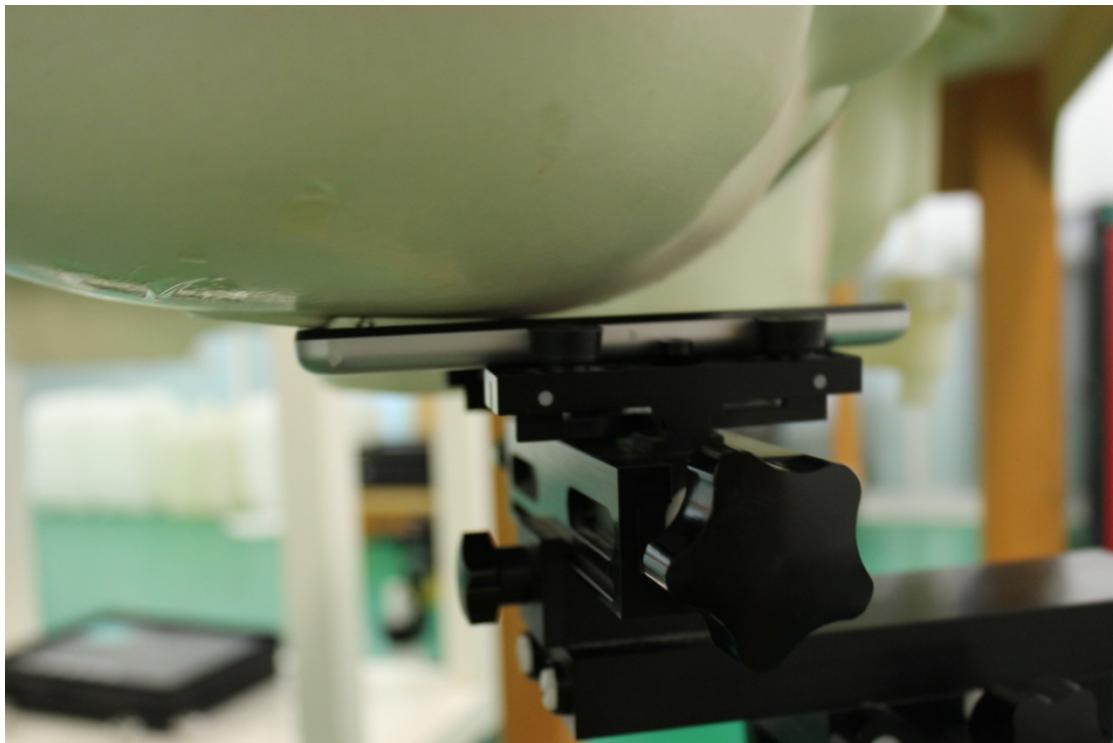


Picture 4: Right Hand Touch Cheek Position




Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:

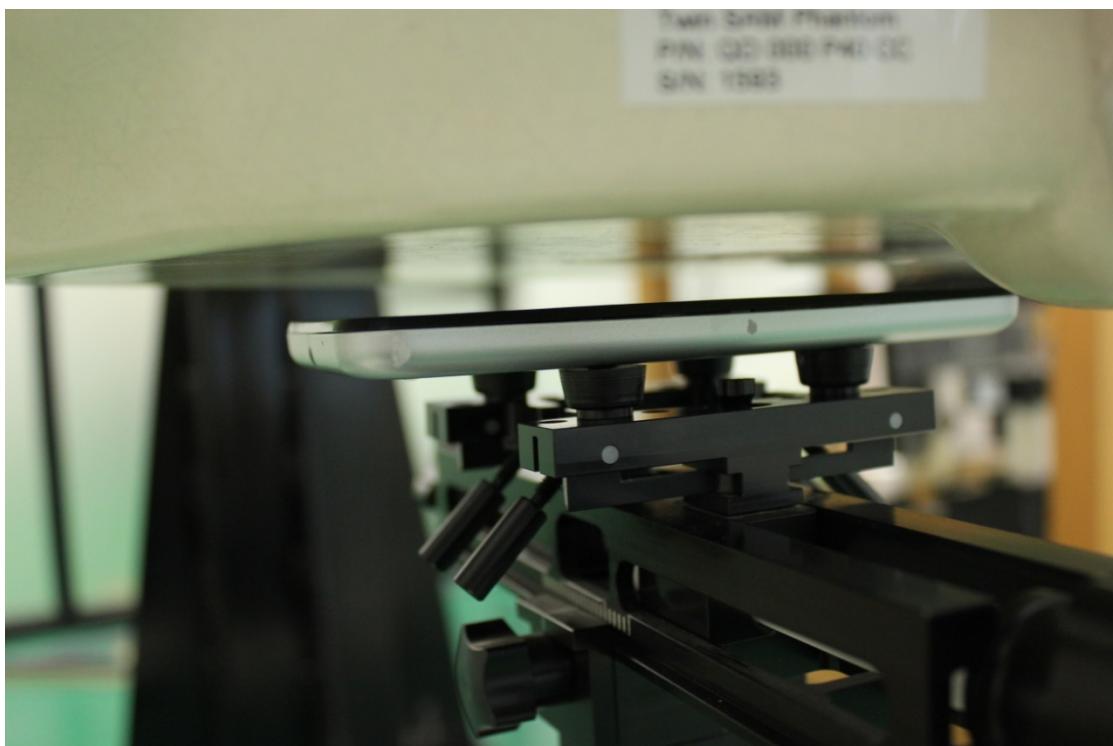


Picture 6: Front

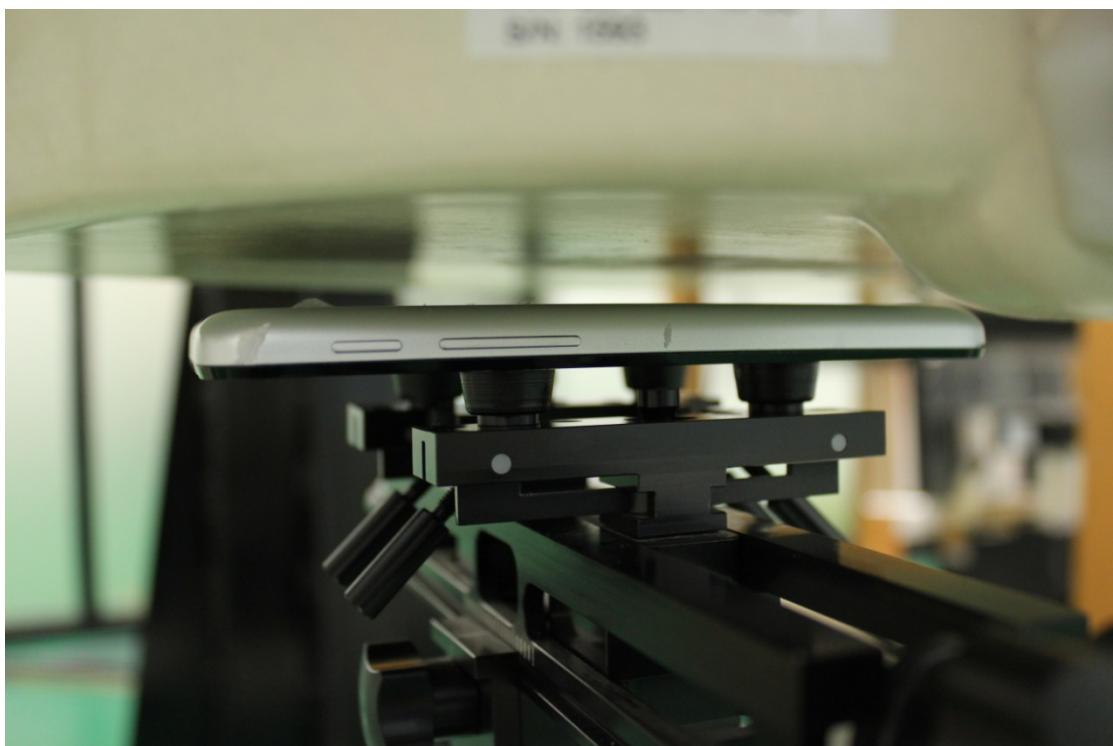

Picture 7: Rear

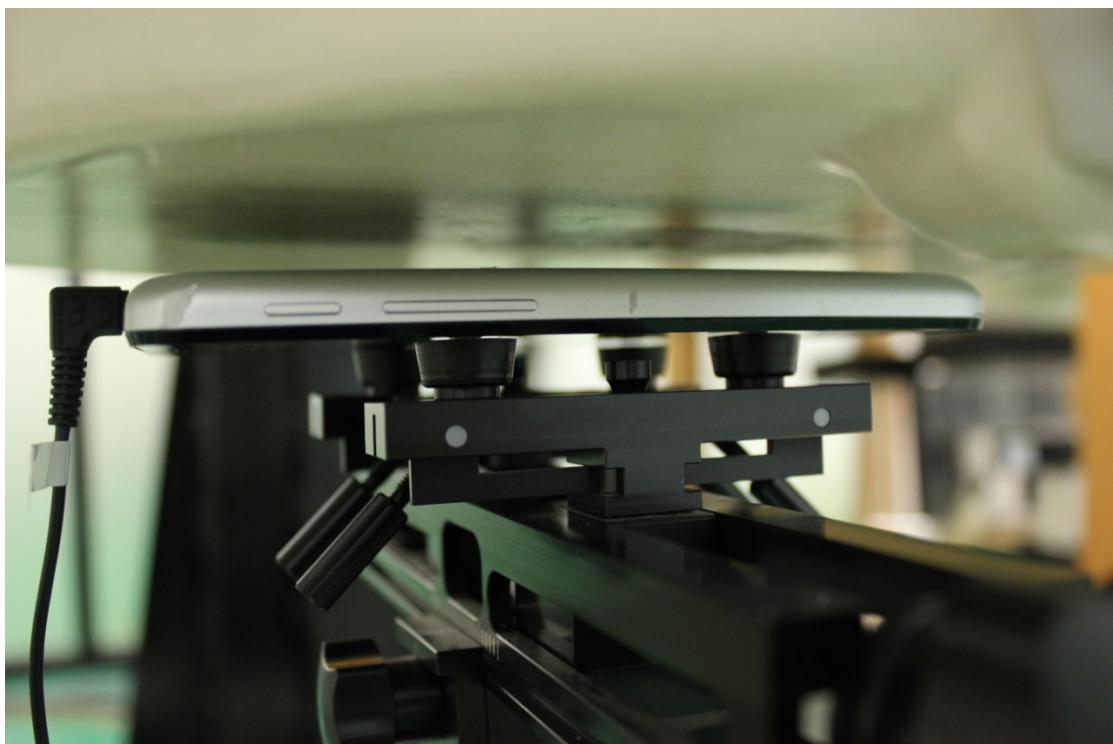

Picture 7-1: Rear with Headset

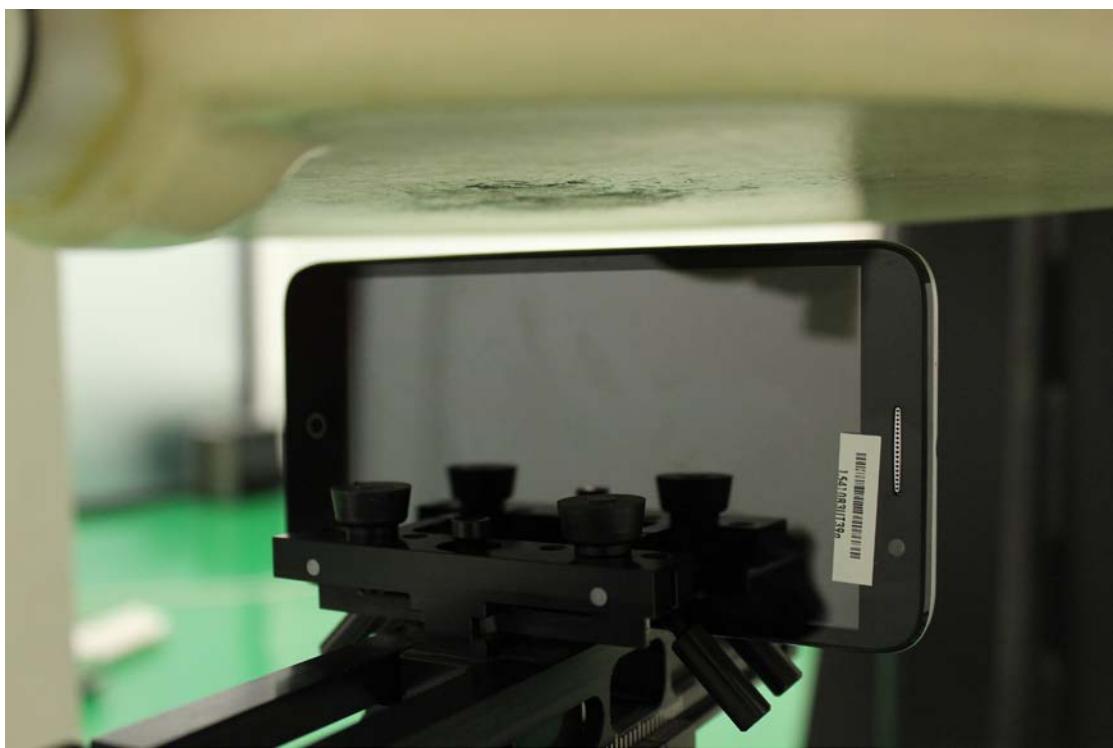

Picture 8: Left Edge



Picture 9: Right Edge



Picture 10: Bottom Edge



Picture 11: Top Edge