



FCC RF Test Report

APPLICANT : TCL Communication Ltd.
EQUIPMENT : GSM Quad-band / UMTS Quad-band / LTE
hepta-band mobile phone
BRAND NAME : alcatel
MODEL NAME : 6055A
MARKETING NAME : IDOL 4
FCC ID : 2ACCJA018
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product testing was completed on Jul. 20, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1. Applicant.....	5
1.2. Manufacturer.....	5
1.3. Product Feature of Equipment Under Test.....	5
1.4. Product Specification subjective to this standard	6
1.5. Modification of EUT	6
1.6. Specification of Accessory.....	7
1.7. Testing Location	8
1.8. Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	9
2.1 Descriptions of Test Mode	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 6dB Bandwidth Measurement	13
3.2 Peak Output Power Measurement	18
3.3 Power Spectral Density Measurement	19
3.4 Conducted Band Edges and Spurious Emission Measurement	28
3.5 Radiated Band Edges and Spurious Emission Measurement	45
3.6 AC Conducted Emission Measurement.....	50
3.7 Antenna Requirements.....	56
4 LIST OF MEASURING EQUIPMENT.....	57
5 UNCERTAINTY OF EVALUATION.....	58
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	
APPENDIX E. PRODUCT EQUALITY DECLARATION	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR670106B	Rev. 01	This report is for 6055A which is the variant product of 6055U. According to the product equality declaration as Appendix E which is provided by applicant, all test cases were leveraged from original Sporton Report Number FR642504B. Based on the original test report, only the AC Conducted Emission was verified for the differences, and verification results are presented in section 3.6.6.	Aug. 09, 2016

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(1)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.55 dB at 58.130 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.36 dB at 1.720 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1. Applicant

TCL Communication Ltd.

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

1.2. Manufacturer

TCL Communication Ltd.

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	GSM Quad-band / UMTS Quad-band / LTE hepta-band mobile phone
Brand Name	alcatel
Model Name	6055A
Marketing Name	IDOL 4
FCC ID	2ACCJA018
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported)/LTE/NFC/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ WLAN 5GHz 802.11a/n HT20/HT40/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR/Bluetooth v4.0 LE/Bluetooth v4.2 LE
IMEI Code	Conducted: 014658000003961 Conduction(6055U): 014658000003722 Conduction(6055A): 014727000002313 Radiation: 014658000006832
HW Version	PIO
SW Version	4D26
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth 4.0 LE: 0.77 dBm (0.00119 W) Bluetooth 4.2 LE: 0.82 dBm (0.00121 W)
Antenna Type/Gain	IFA Antenna with gain -5.00 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Specification of Accessory

Specification of Accessory for 6055U				
AC Adapter	Brand Name	alcatel	Model Name	UC13US
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc, 2000mA		
	P/N	CBA0059AG8C1		
Battery 1	Brand Name	ALCATEL onetouch	Model Name	TLp026EJ
	Power Rating	3.85Vdc, 2610mAh		
Battery 2	Brand Name	ALCATEL onetouch	Model Name	TLp026E2
	Power Rating	3.84Vdc, 2610mAh		
USB Cable	Brand Name	N/A	Model Name	CDA0000049C2
	Signal Line Type	1.0m shielded without core		

Specification of Accessory for 6055A				
AC Adapter 1	Brand Name	alcatel	Model Name	UC13US
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5.0Vdc, 2A		
	Manufacturer	Aohai	P/N	CBA0059AGAC4
AC Adapter 2	Brand Name	alcatel	Model Name	UC13US
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5.0Vdc, 2A		
	Manufacturer	TENPAO	P/N	CBA0059AGAC2 CBA0059AG4C2
Battery	Brand Name	ALCATEL onetouch	Model Name	TLp026E2
	Power Rating	3.84Vdc, 2610mAh		
	Manufacturer	SCUD	P/N	CAC2610002C2
USB Cable 1	Brand Name	N/A	Model Name	CDA0000043C8
	Signal Line Type	1.01m shielded without core		
	Manufacturer	PUAN	P/N	N/A
USB Cable 2	Brand Name	N/A	Model Name	CDA0000043C2
	Signal Line Type	1.00m shielded without core		
	Manufacturer	Shenghua	P/N	N/A



1.7. Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH03-KS	CO01-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		v4.0	v4.2
Ch00	2402MHz	0.77 dBm	0.82 dBm
Ch39	2441MHz	0.69 dBm	0.59 dBm
Ch78	2480MHz	0.54 dBm	0.51 dBm

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 LE/ Bluetooth 4.2 LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission for Model 6055U	Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter) + Earphone + Battery 1
AC Conducted Emission for Model 6055A	Mode 1 GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 1(Charging from Adapter 1) + Earphone + Battery

2.3 Connection Diagram of Test System

<Bluetooth LE Tx Mode>

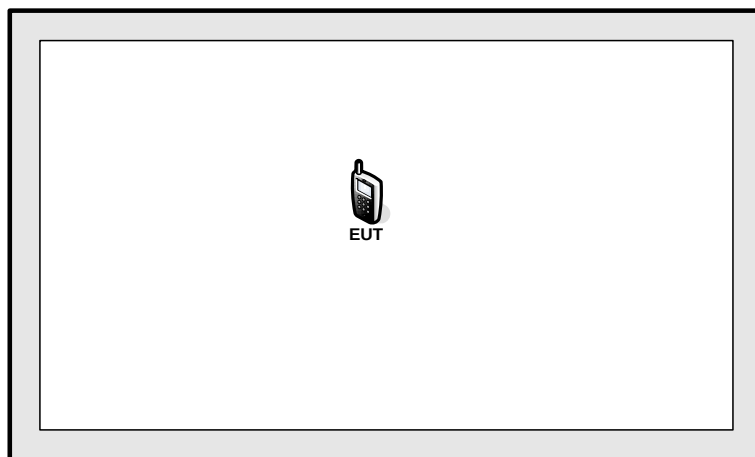

<AC Conducted Emission Mode>

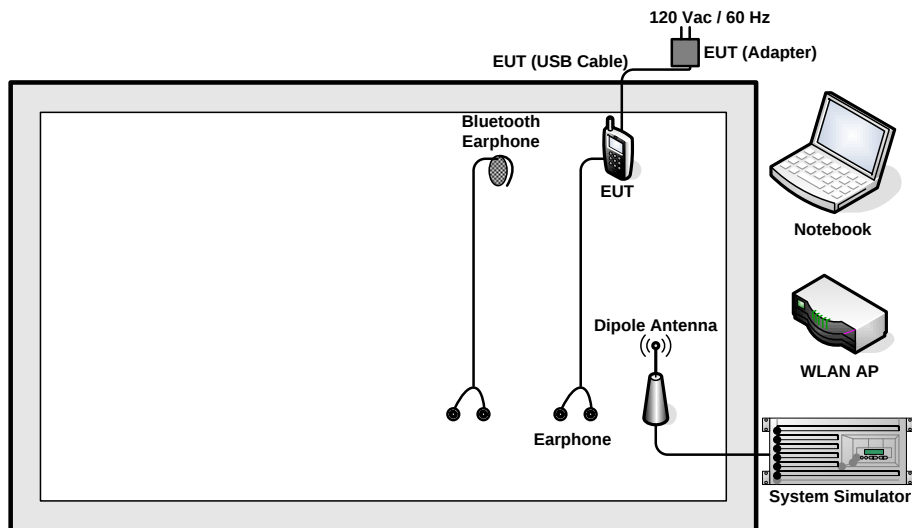

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritus	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	Unshielded, 0.5 m	N/A
5.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.0m	N/A

2.5 EUT Operation Test Setup

For Bluetooth LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

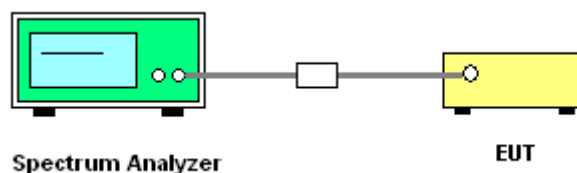




3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.

Bluetooth 4.0 LE

6 dB Bandwidth Plot on Channel 00

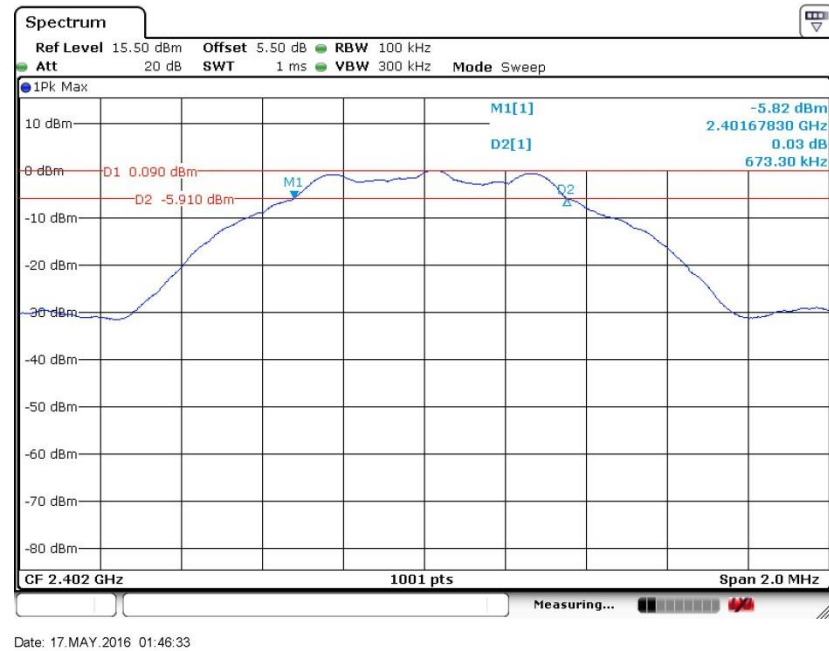


6 dB Bandwidth Plot on Channel 19



Date: 17.MAY.2016 01:51:50

6 dB Bandwidth Plot on Channel 39

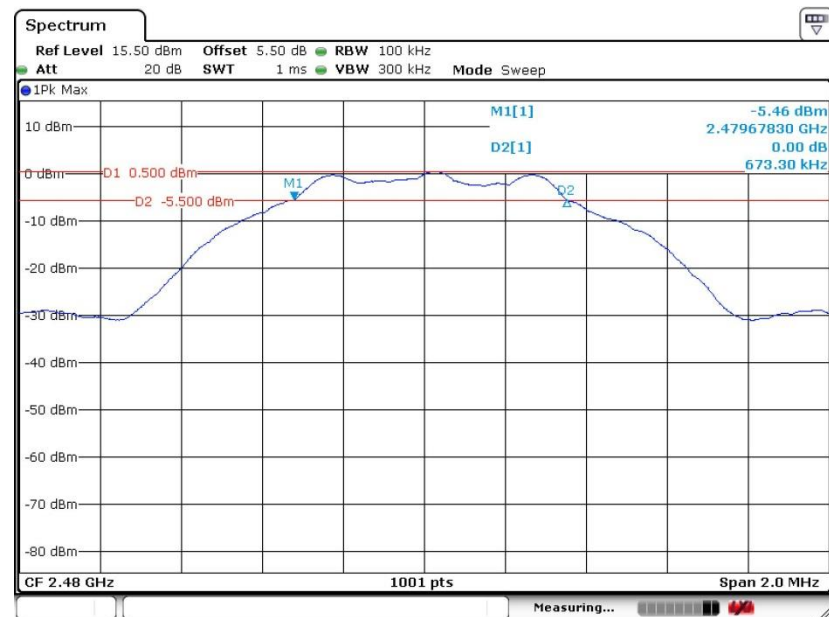


Date: 17.MAY.2016 01:54:04



Bluetooth 4.2 LE


6 dB Bandwidth Plot on Channel 00

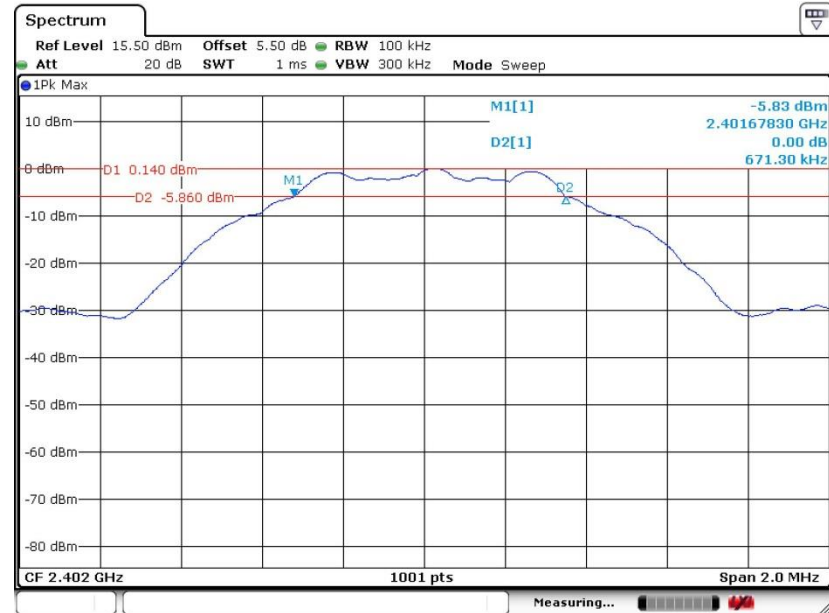

Date: 17.MAY.2016 02:01:02




6 dB Bandwidth Plot on Channel 19

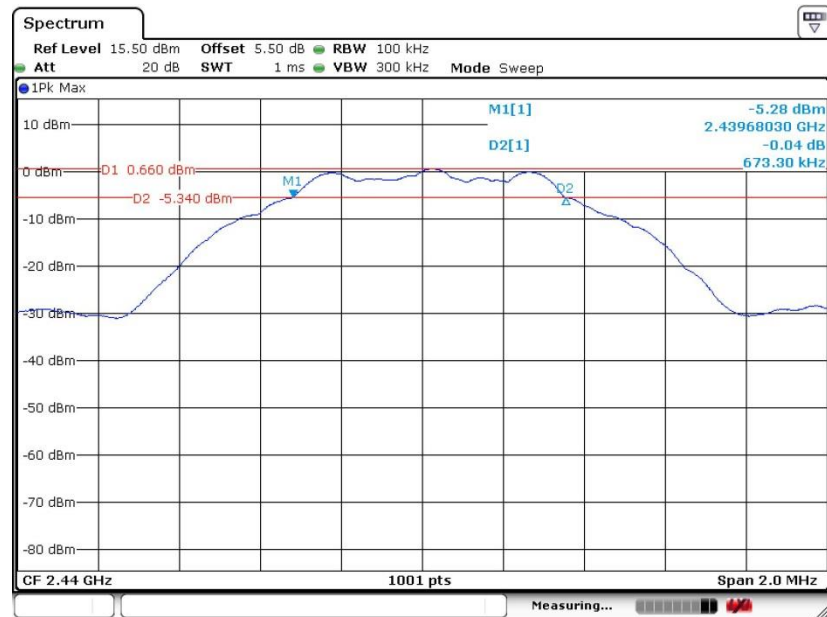

Date: 17.MAY.2016 02:05:21

6 dB Bandwidth Plot on Channel 39

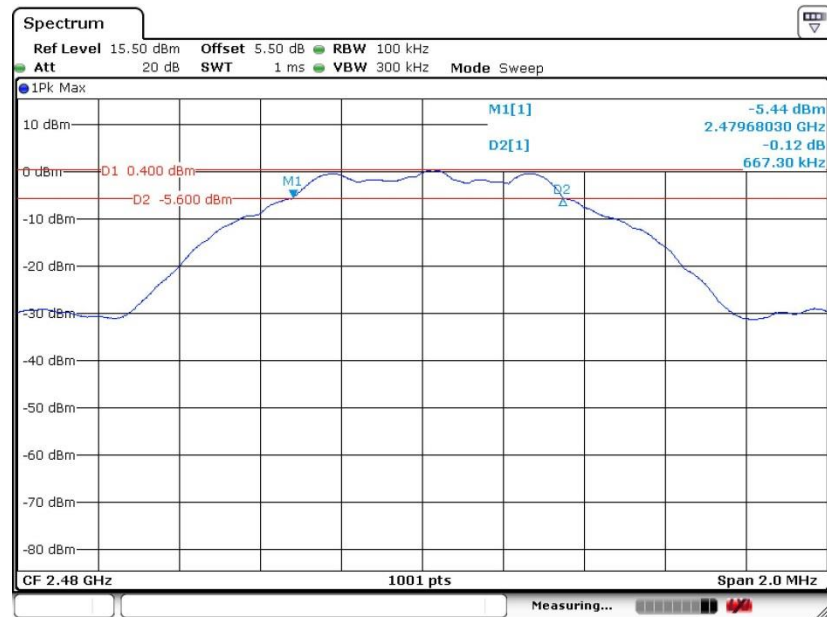

Date: 17.MAY.2016 02:08:52

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

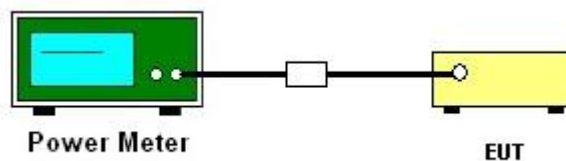

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

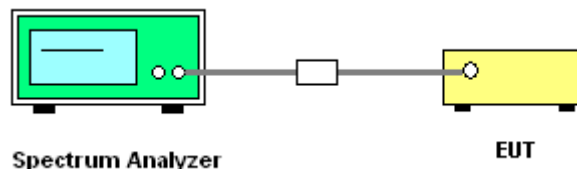




3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)

Bluetooth 4.0 LE


PSD 100kHz Plot on Channel 00

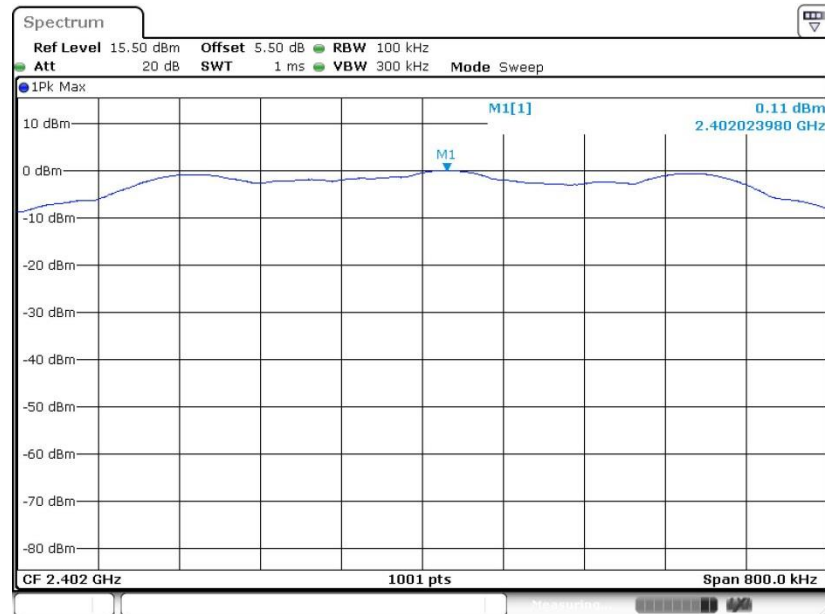

Date: 17.MAY.2016 01:48:41




PSD 100kHz Plot on Channel 19

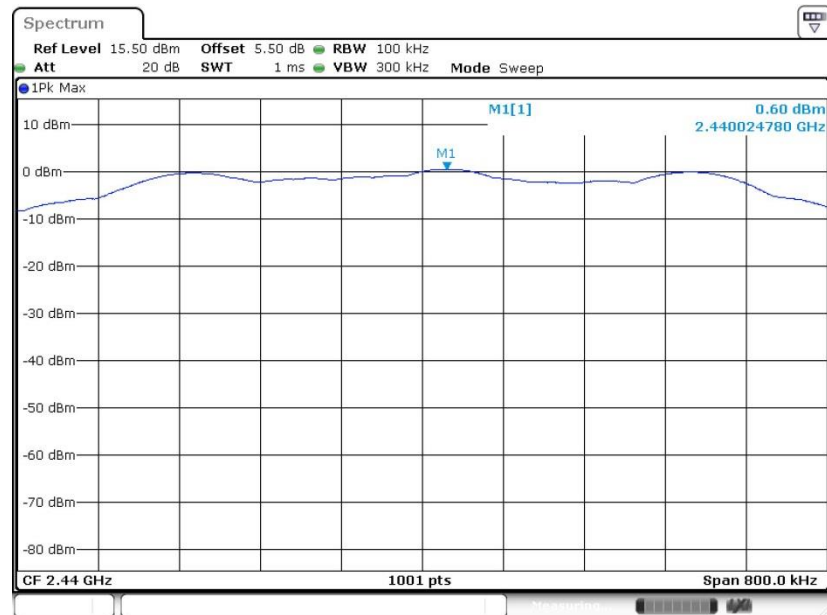

Date: 17.MAY.2016 01:52:28

PSD 100kHz Plot on Channel 39

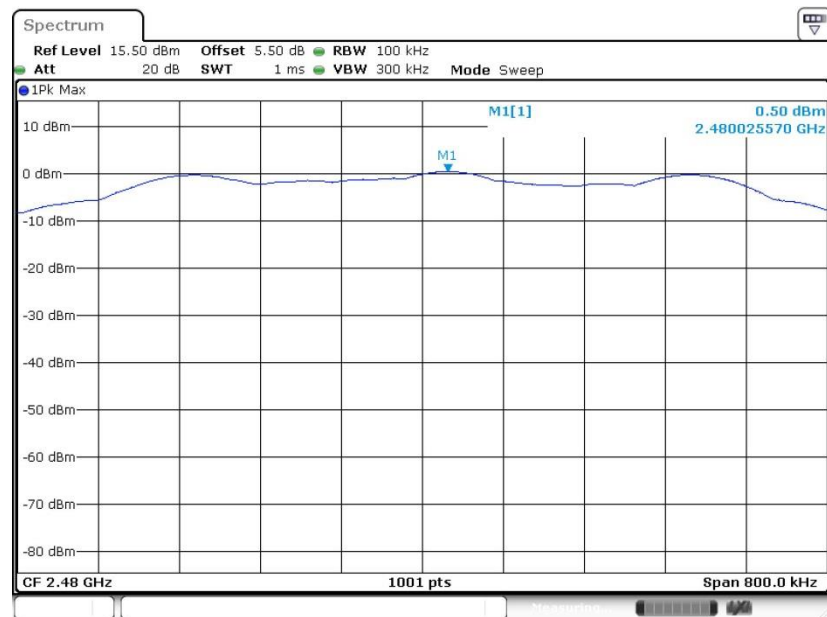


Date: 17.MAY.2016 01:54:46



Bluetooth 4.2 LE


PSD 100kHz Plot on Channel 00

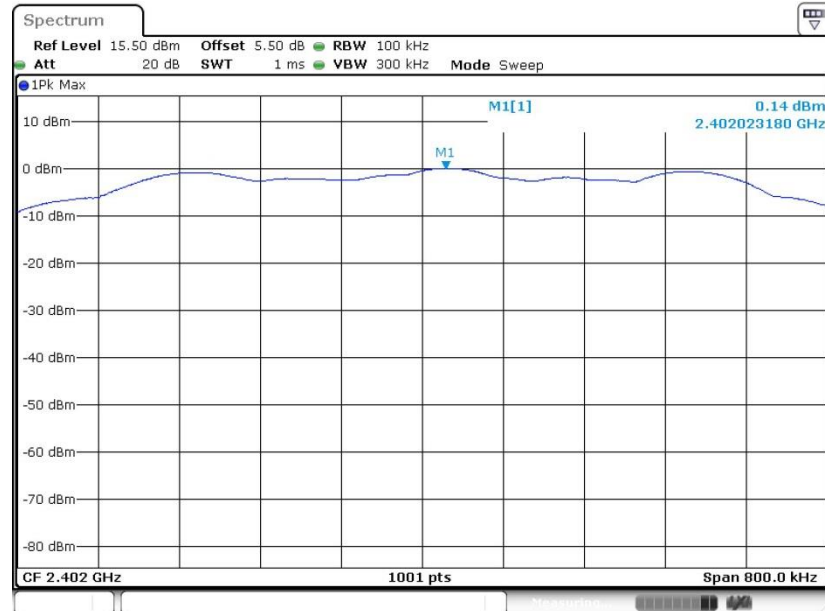

Date: 17.MAY.2016 02:01:51




PSD 100kHz Plot on Channel 19

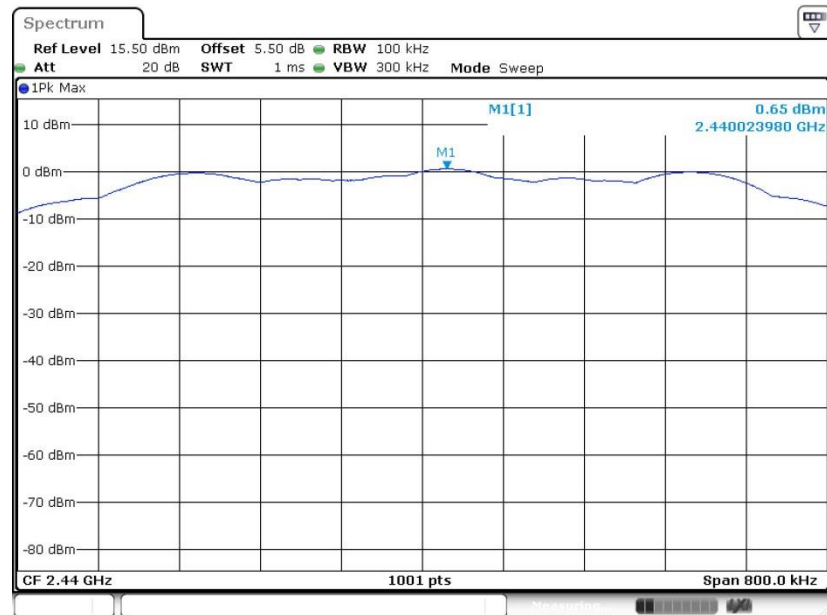

Date: 17.MAY.2016 02:06:20

PSD 100kHz Plot on Channel 39

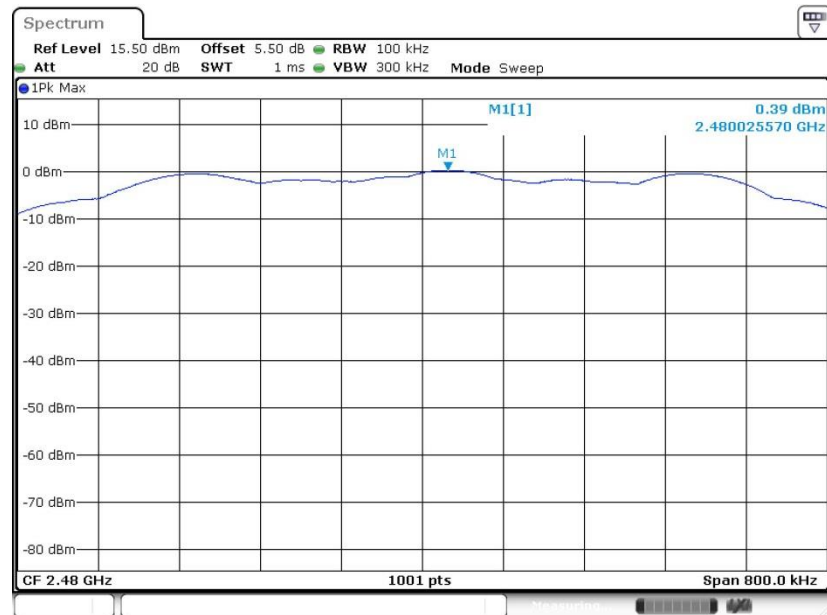


Date: 17.MAY.2016 02:09:36



3.3.7 Test Result of Power Spectral Density (3kHz)

Bluetooth 4.0 LE


PSD 3kHz Plot on Channel 00

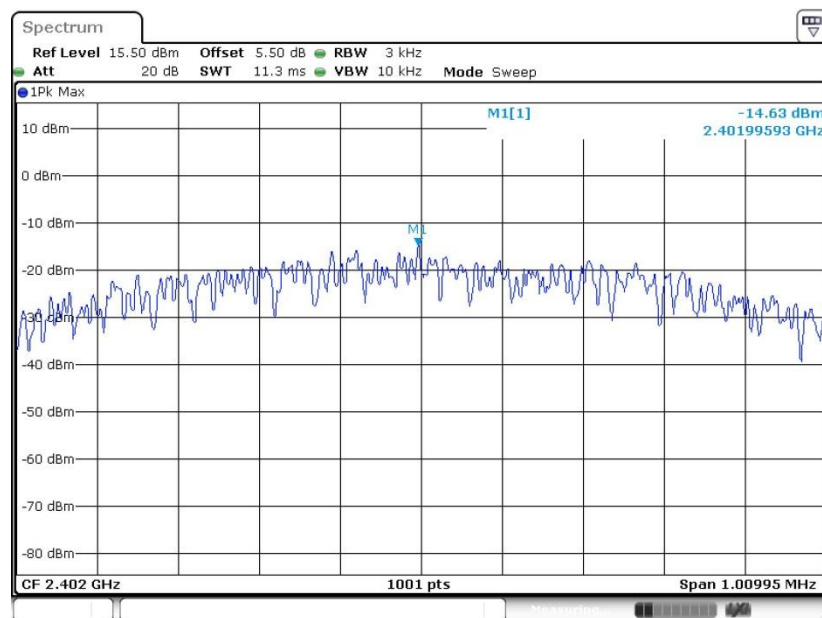

Date: 17.MAY.2016 01:47:16




PSD 3kHz Plot on Channel 19

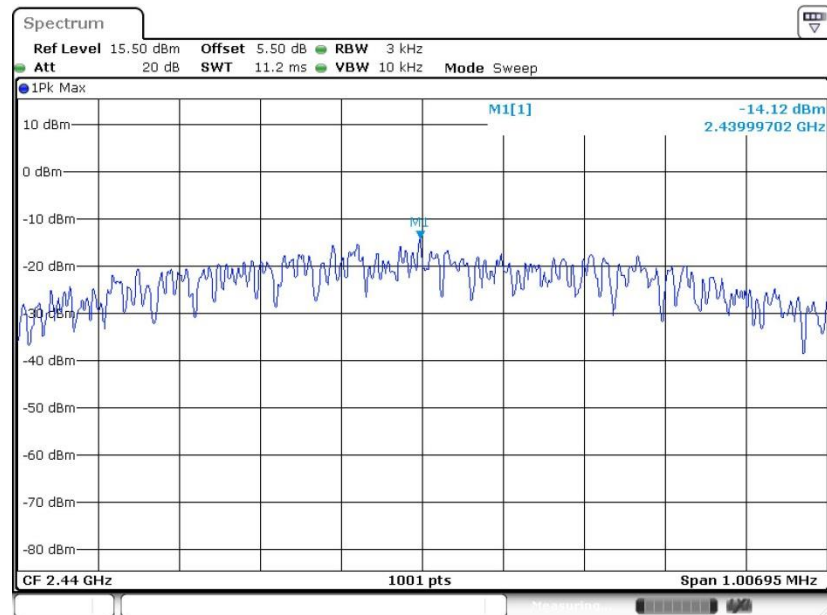

Date: 17.MAY.2016 01:52:14

PSD 3kHz Plot on Channel 39

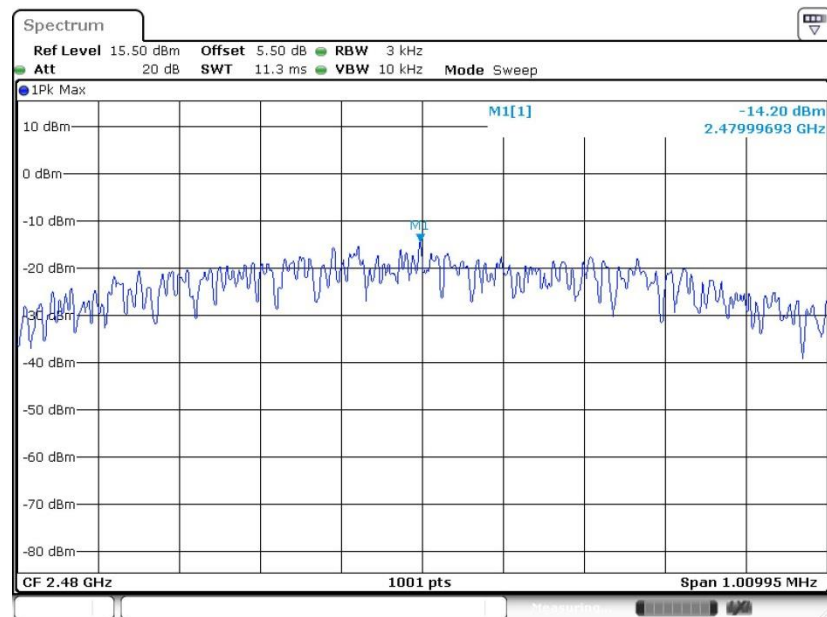


Date: 17.MAY.2016 01:54:31



Bluetooth 4.2 LE


PSD 3kHz Plot on Channel 00

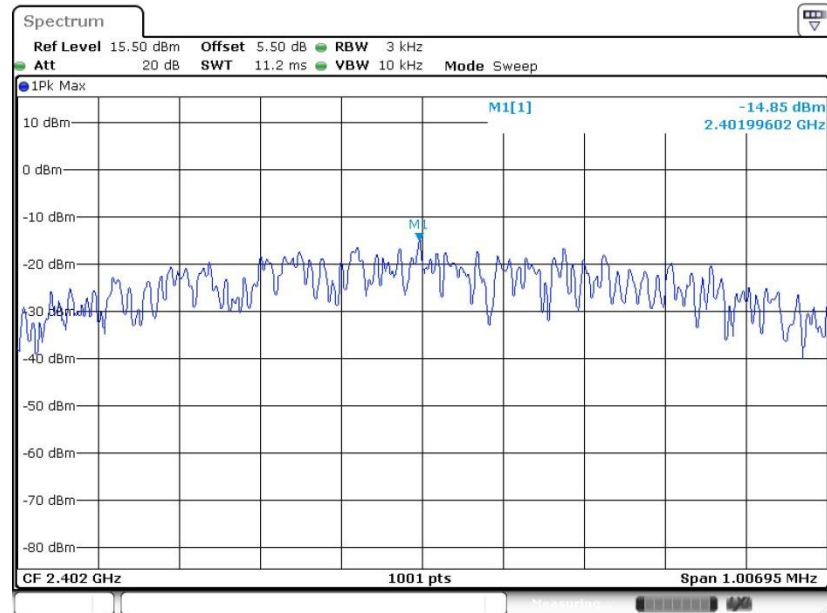

Date: 17.MAY.2016 02:01:37




PSD 3kHz Plot on Channel 19

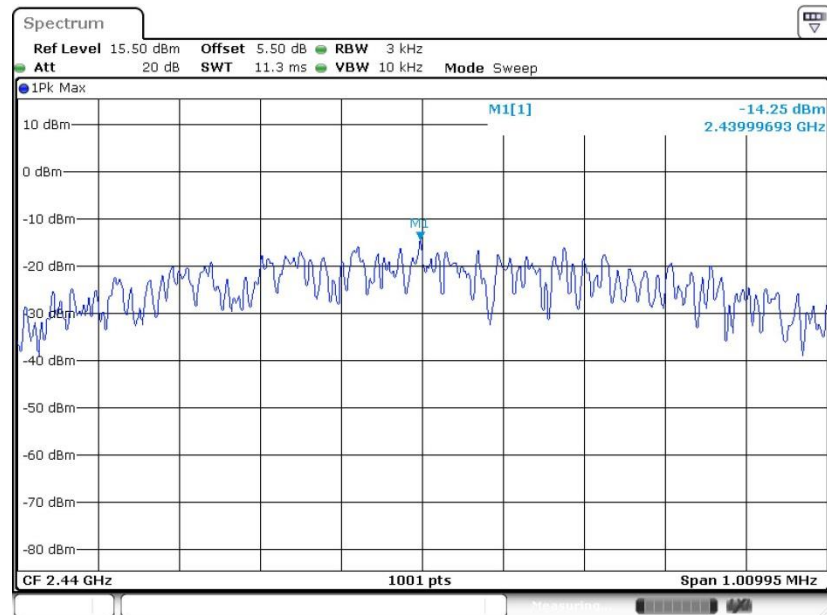

Date: 17.MAY.2016 02:05:58

PSD 3kHz Plot on Channel 39

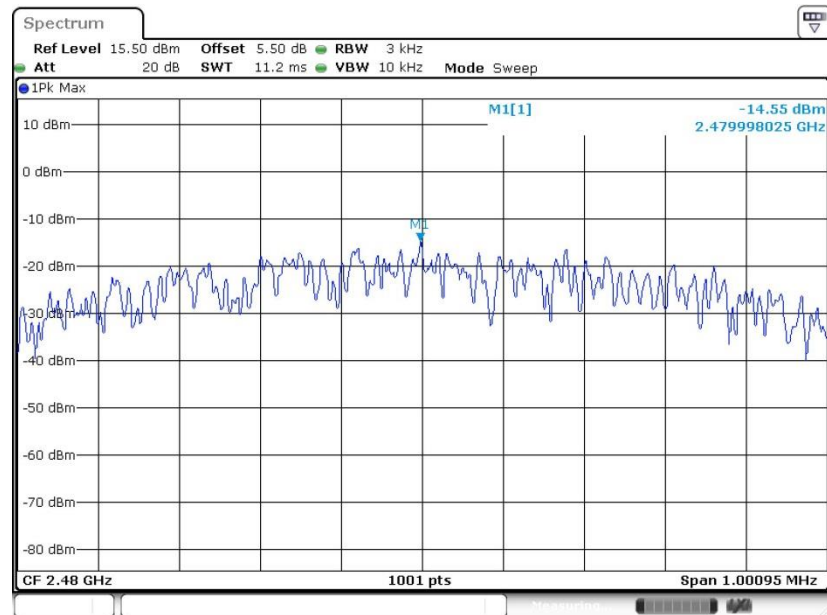

Date: 17.MAY.2016 02:09:20

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

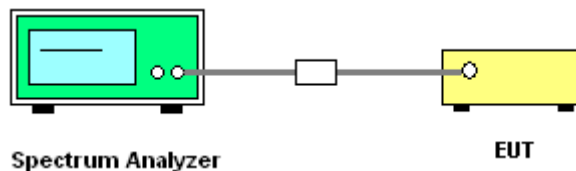




3.4.5 Test Result of Conducted Band Edges Plots

Bluetooth 4.0 LE


Low Band Edge Plot on Channel 00

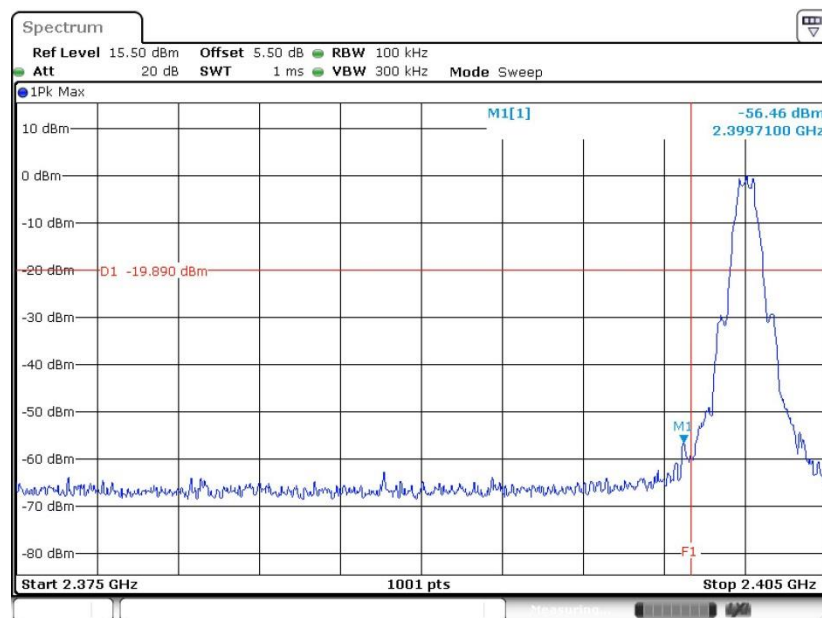

Date: 17.MAY.2016 01:48:53



High Band Edge Plot on Channel 39

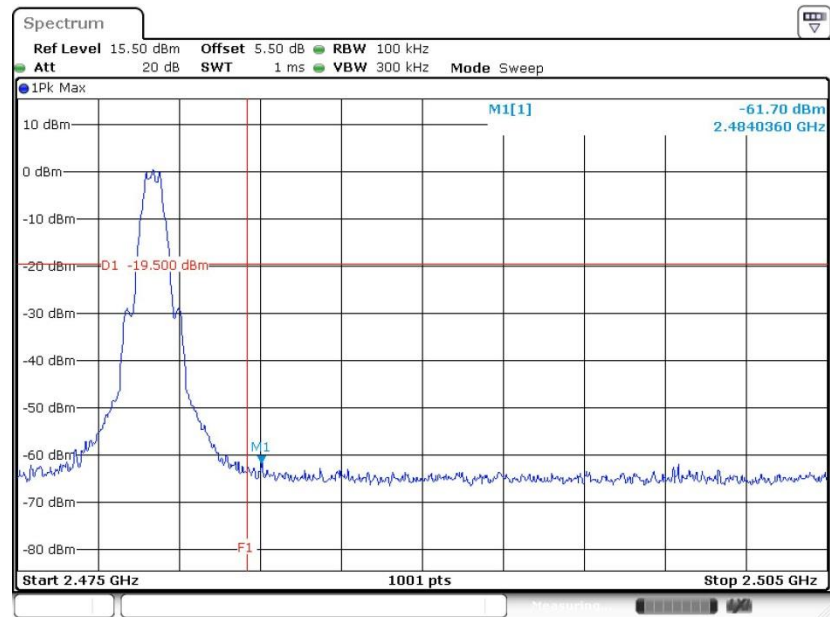


Date: 17.MAY.2016 01:55:40



Bluetooth 4.2 LE


Low Band Edge Plot on Channel 00

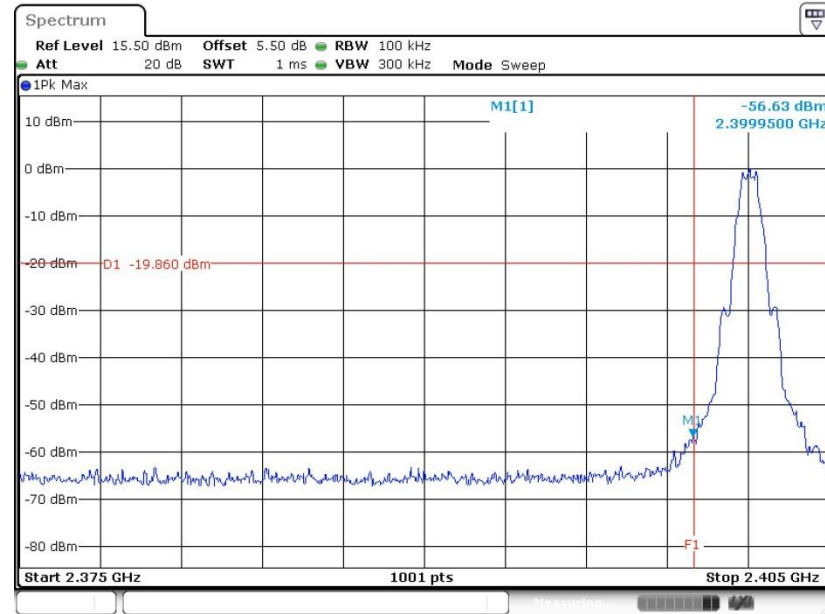

Date: 17.MAY.2016 02:02:40



High Band Edge Plot on Channel 39

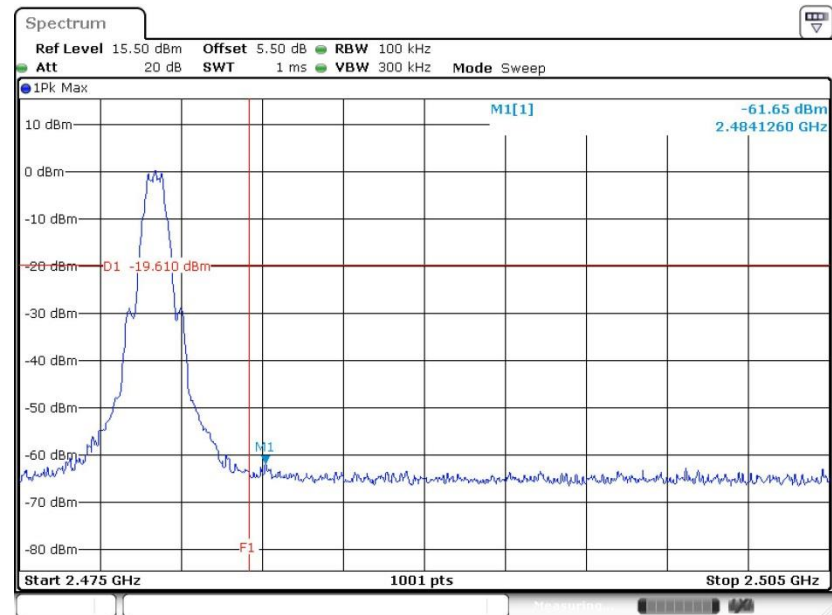

Date: 17.MAY.2016 02:09:52




3.4.6 Test Result of Conducted Spurious Emission Plots

Bluetooth 4.0 LE

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

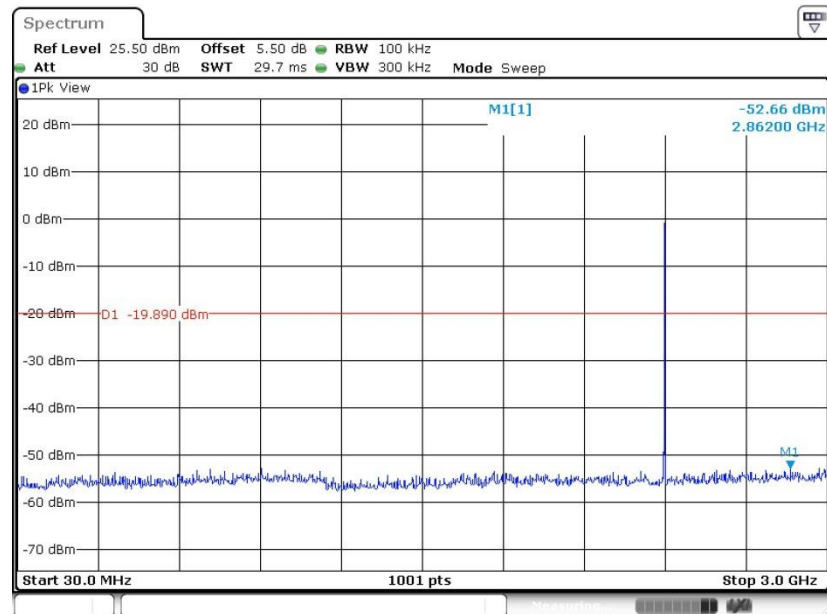

Date: 17.MAY.2016 01:49:03




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

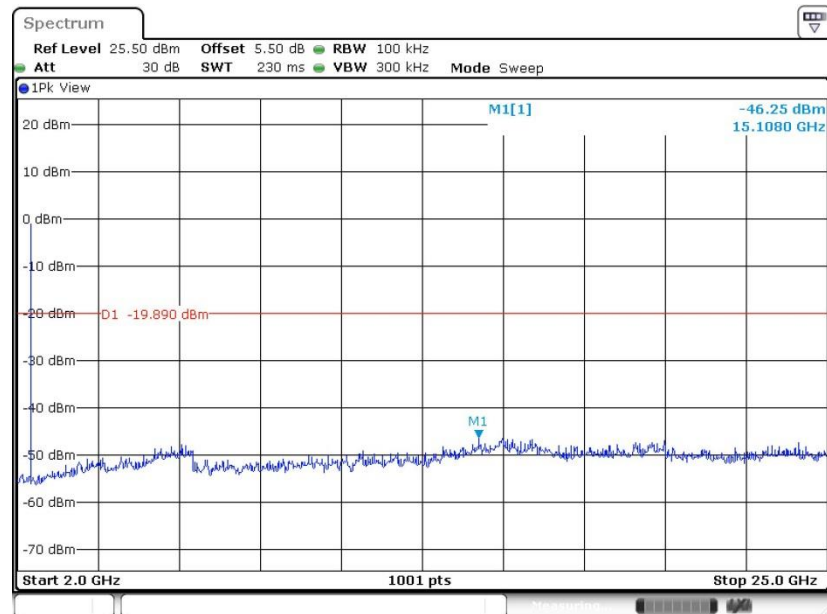

Date: 17.MAY.2016 01:49:12




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

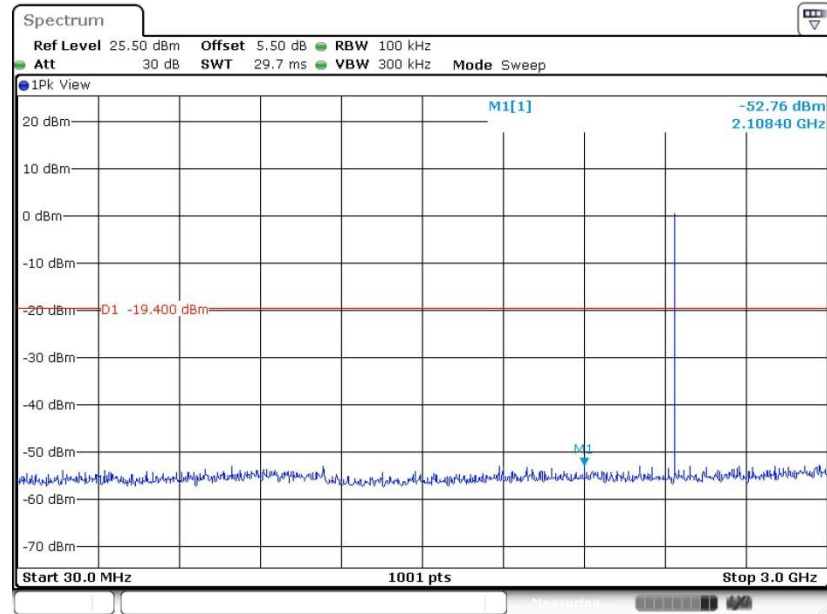

Date: 17.MAY.2016 01:52:38




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

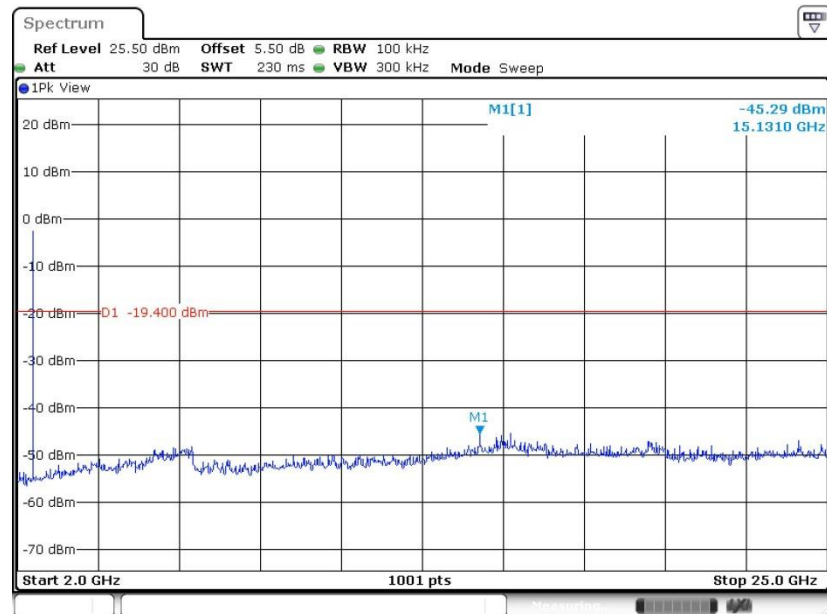

Date: 17.MAY.2016 01:52:46




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

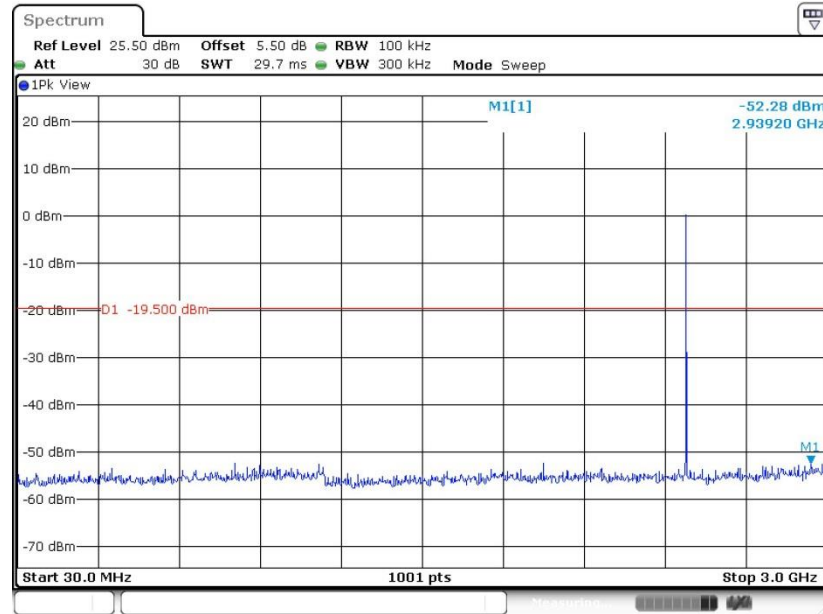

Date: 17.MAY.2016 01:55:51

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

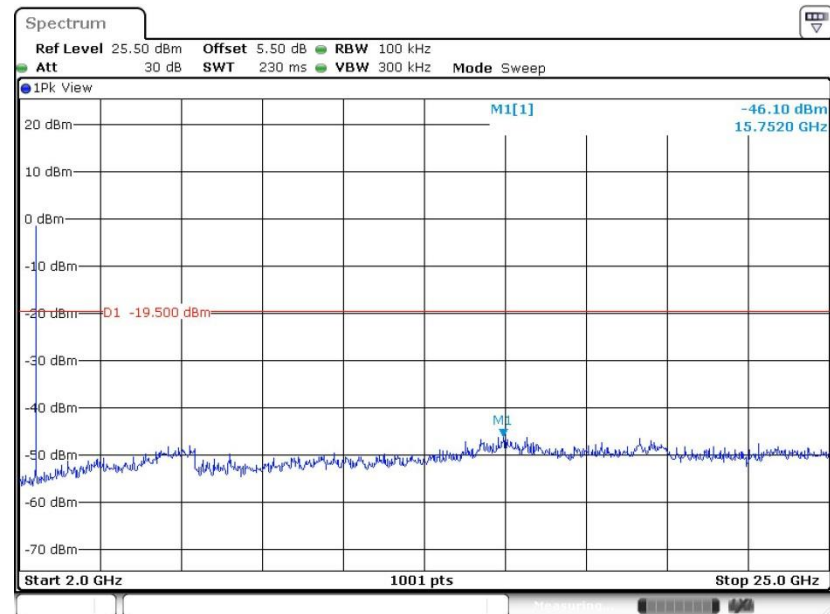


Date: 17.MAY.2016 01:55:59



Bluetooth 4.2 LE


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

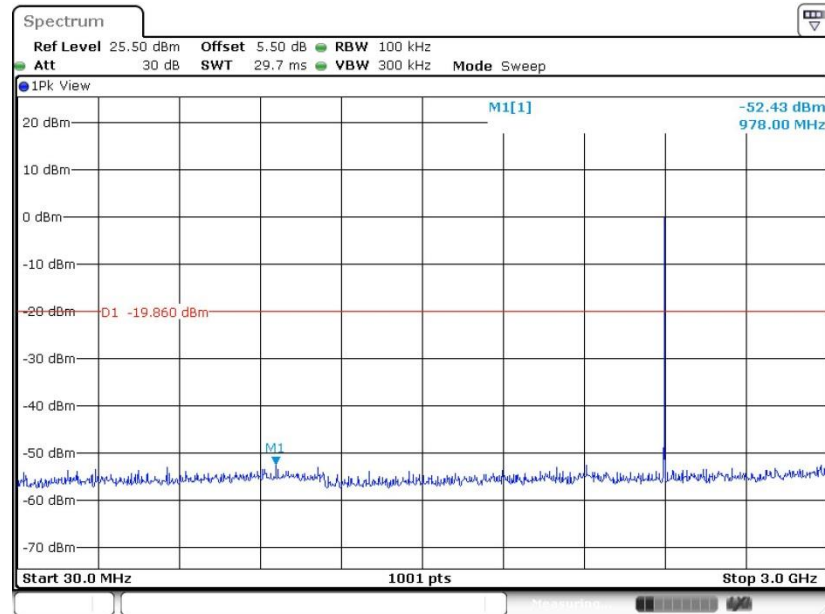

Date: 17.MAY.2016 02:02:53




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

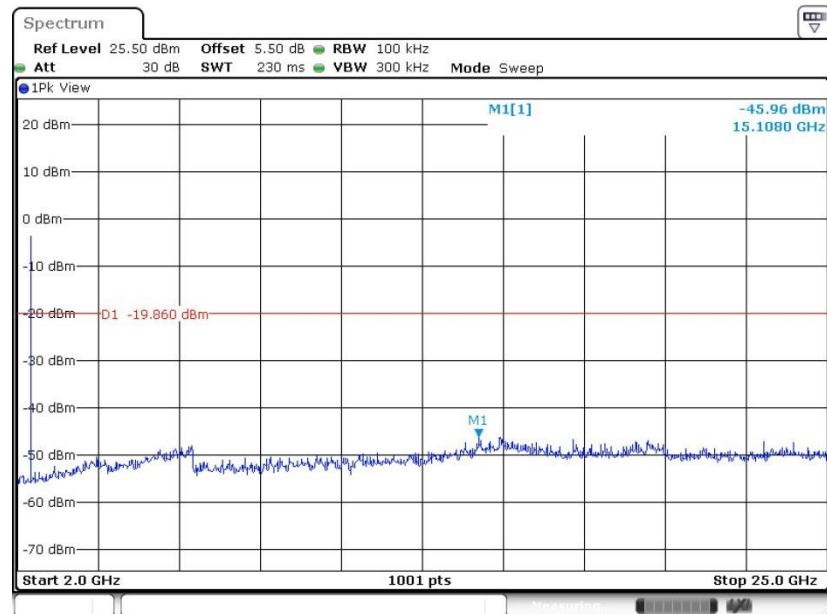

Date: 17.MAY.2016 02:03:01




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

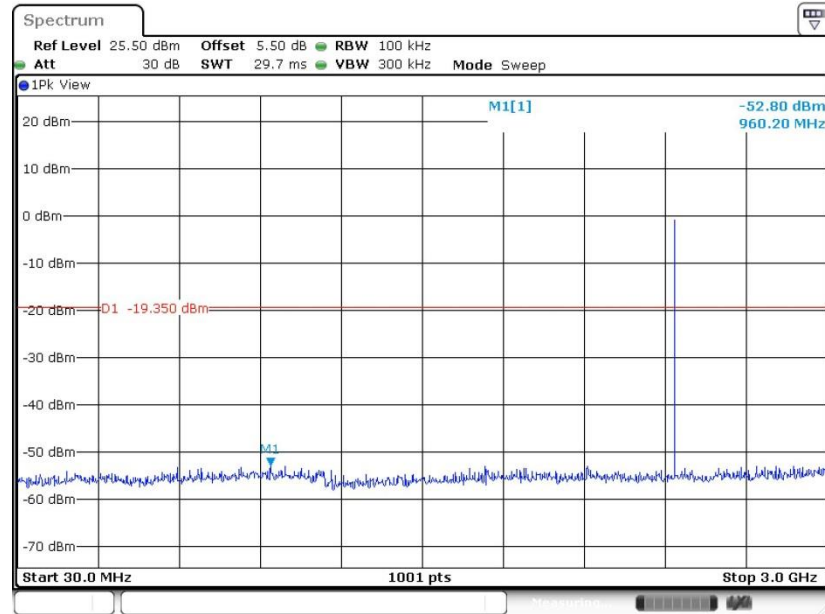

Date: 17.MAY.2016 02:06:34




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

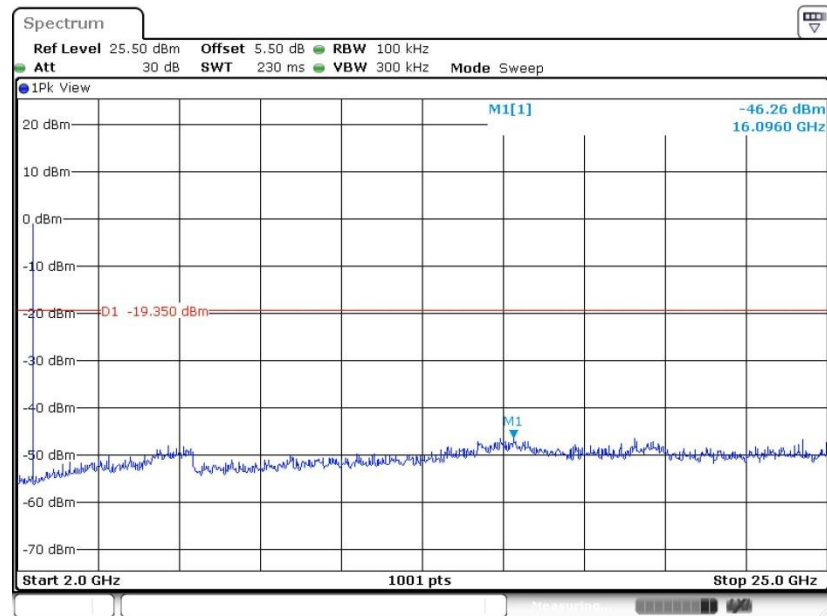

Date: 17.MAY.2016 02:06:43




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

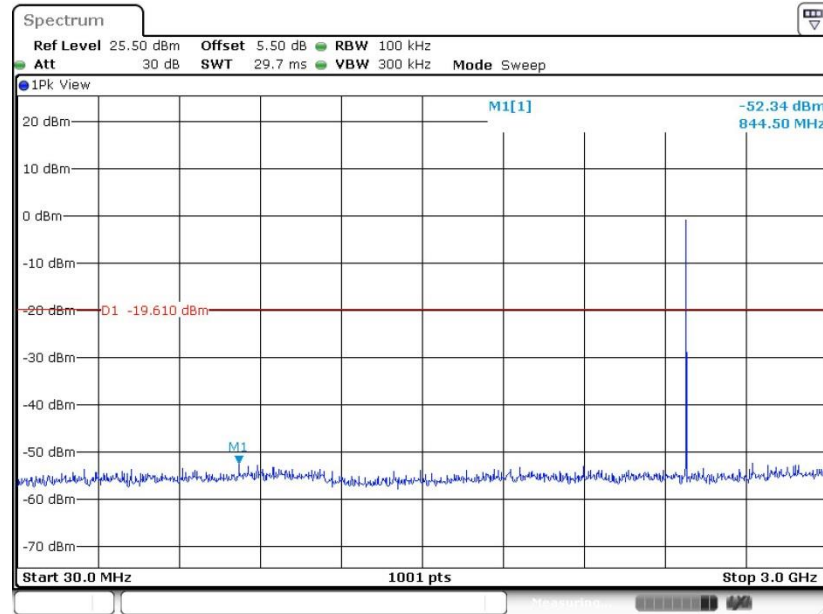

Date: 17.MAY.2016 02:10:05



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

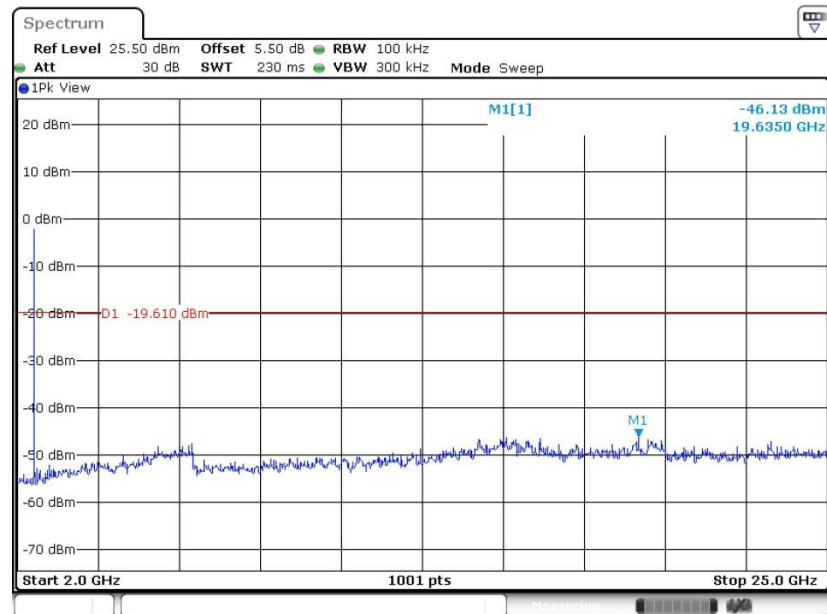

Date: 17.MAY.2016 02:10:14

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

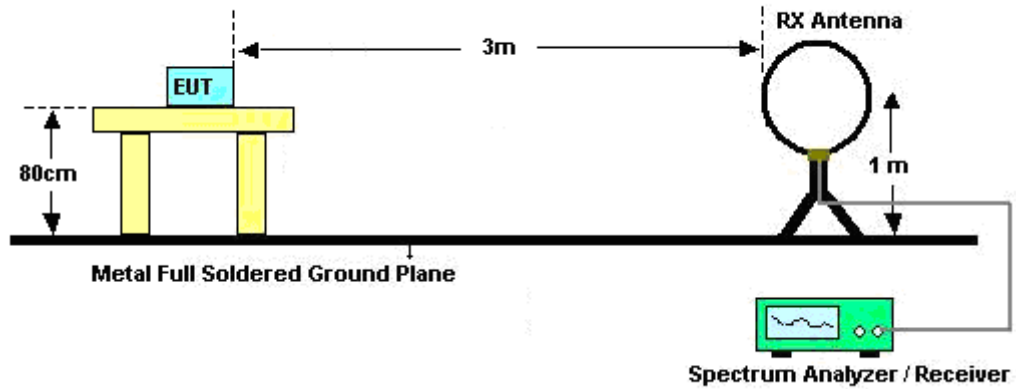

For radiated emissions from 30MHz to 1GHz

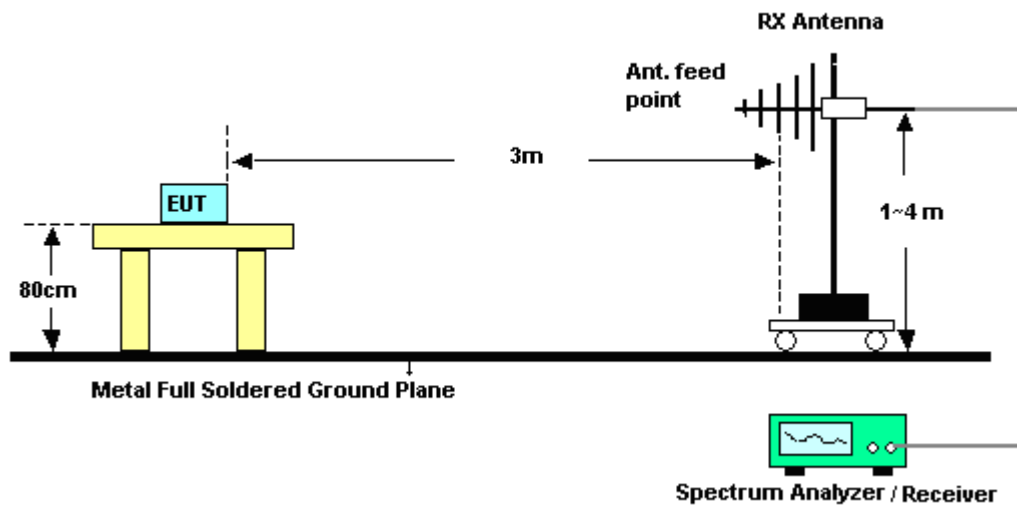

For radiated emissions above 1GHz

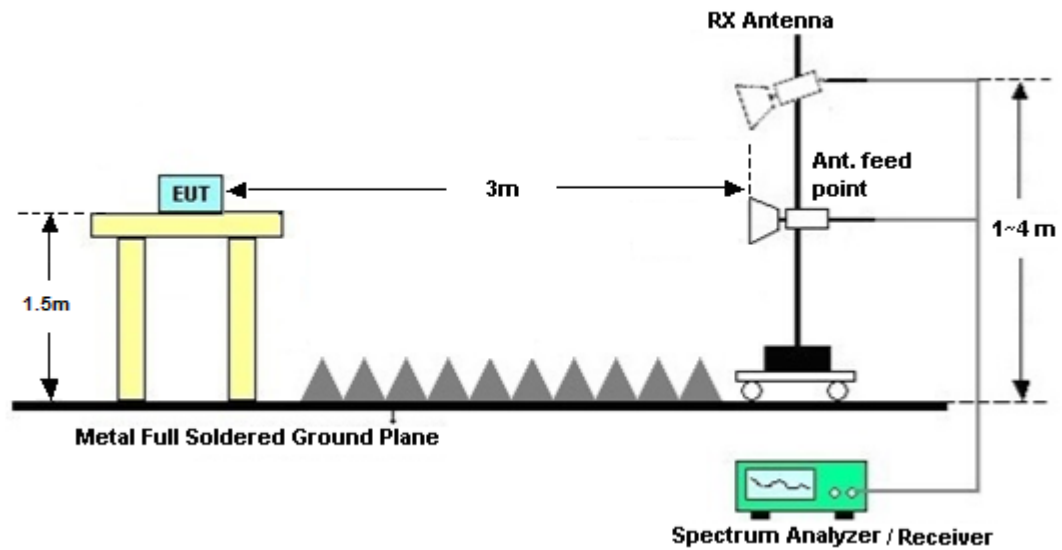

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.6.4 Test Setup

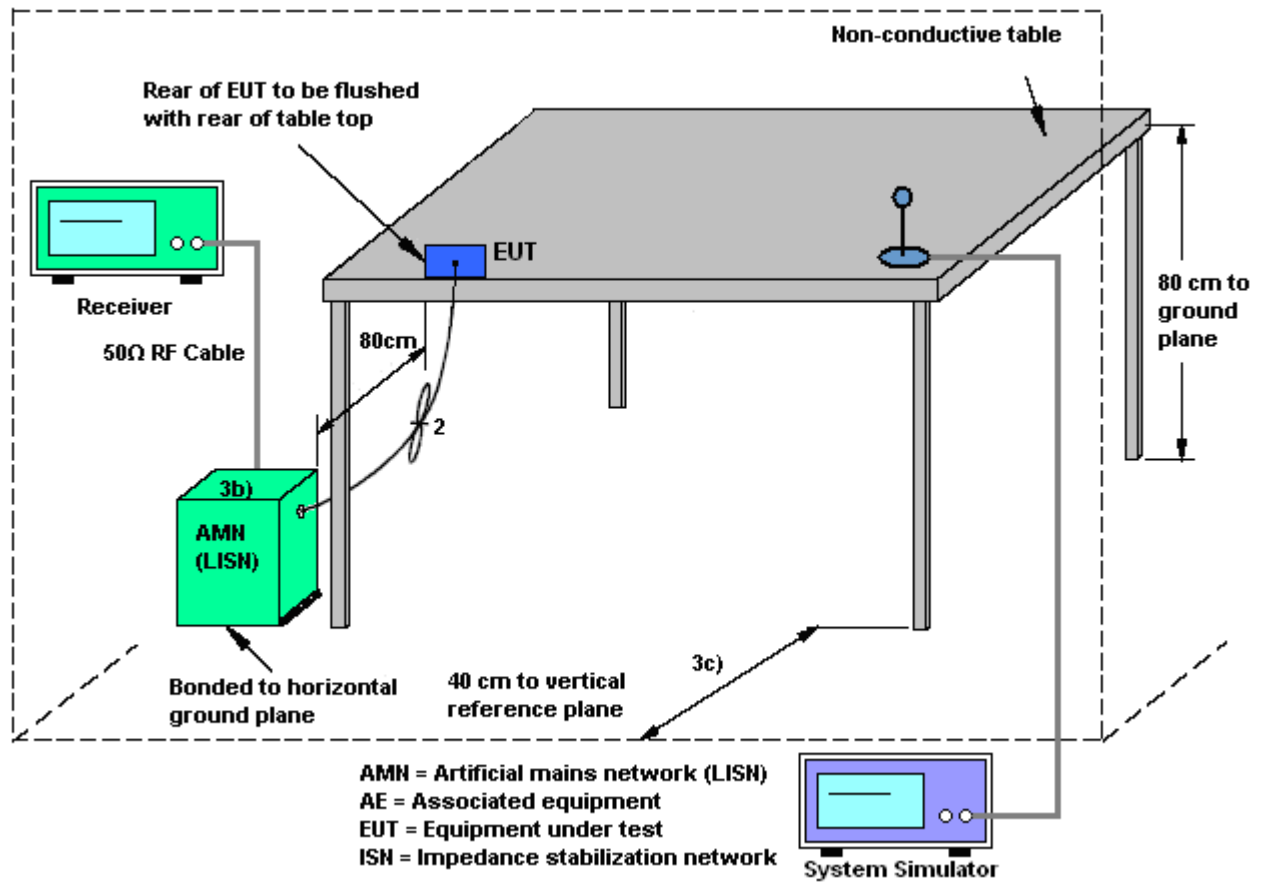



3.6.5 Test Result of AC Conducted Emission for Model 6055U

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter) + Earphone + Battery 1		

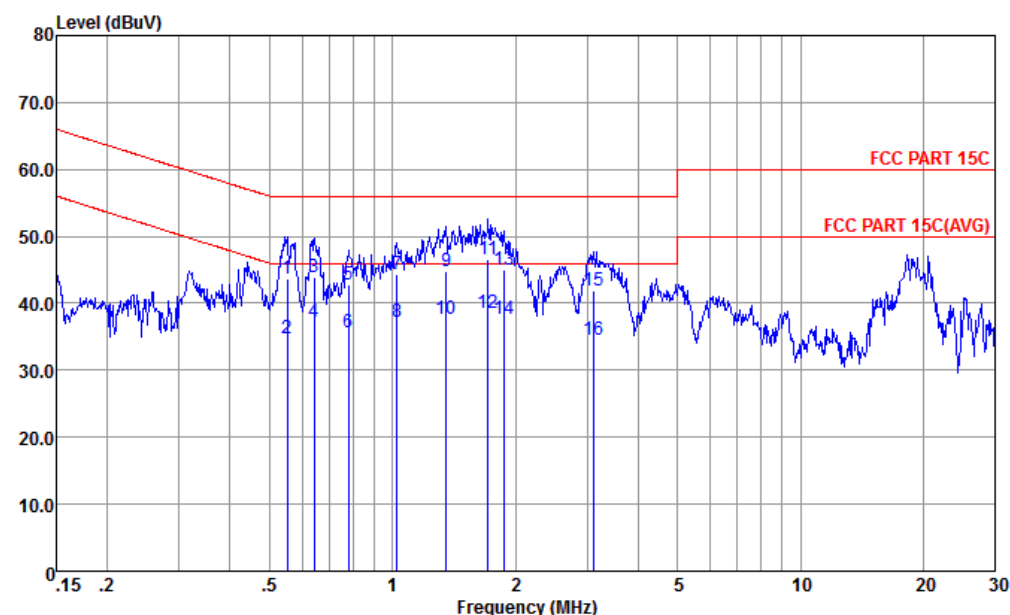


Site : CO01-KS
Condition : FCC PART 15C LISN-L-20151024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.55	43.69	-12.31	56.00	33.30	0.23	10.16	QP
2	0.55	34.79	-11.21	46.00	24.40	0.23	10.16	Average
3	0.64	43.99	-12.01	56.00	33.60	0.24	10.15	QP
4	0.64	37.19	-8.81	46.00	26.80	0.24	10.15	Average
5	0.78	42.69	-13.31	56.00	32.30	0.24	10.15	QP
6	0.78	35.59	-10.41	46.00	25.20	0.24	10.15	Average
7	1.03	44.28	-11.72	56.00	33.89	0.25	10.14	QP
8	1.03	37.18	-8.82	46.00	26.79	0.25	10.14	Average
9	1.35	44.86	-11.14	56.00	34.50	0.22	10.14	QP
10	1.35	37.56	-8.44	46.00	27.20	0.22	10.14	Average
11	1.72	46.54	-9.46	56.00	36.20	0.20	10.14	QP
12 *	1.72	38.64	-7.36	46.00	28.30	0.20	10.14	Average
13	1.88	44.93	-11.07	56.00	34.60	0.19	10.14	QP
14	1.88	37.63	-8.37	46.00	27.30	0.19	10.14	Average
15	3.12	41.94	-14.06	56.00	31.60	0.18	10.16	QP
16	3.12	34.64	-11.36	46.00	24.30	0.18	10.16	Average



Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter) + Earphone + Battery 1		

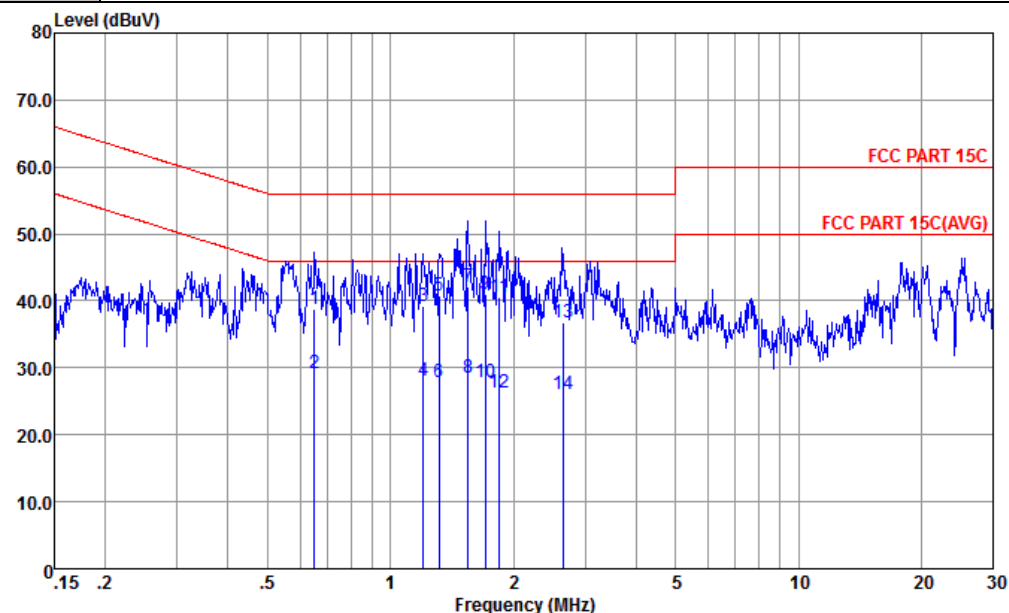


Site : CO01-KS
Condition : FCC PART 15C LISN-N-20151024 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.65	38.79	-17.21	56.00	28.30	0.34	10.15	QP
2	0.65	29.09	-16.91	46.00	18.60	0.34	10.15	Average
3	1.20	39.31	-16.69	56.00	28.80	0.37	10.14	QP
4	1.20	28.11	-17.89	46.00	17.60	0.37	10.14	Average
5	1.32	40.81	-15.19	56.00	30.30	0.37	10.14	QP
6	1.32	27.81	-18.19	46.00	17.30	0.37	10.14	Average
7 *	1.55	42.12	-13.88	56.00	31.60	0.38	10.14	QP
8	1.55	28.62	-17.38	46.00	18.10	0.38	10.14	Average
9	1.71	41.02	-14.98	56.00	30.50	0.38	10.14	QP
10	1.71	27.82	-18.18	46.00	17.30	0.38	10.14	Average
11	1.85	40.62	-15.38	56.00	30.10	0.38	10.14	QP
12	1.85	26.32	-19.68	46.00	15.80	0.38	10.14	Average
13	2.65	36.82	-19.18	56.00	26.30	0.37	10.15	QP
14	2.65	26.12	-19.88	46.00	15.60	0.37	10.15	Average



3.6.6 Test Result of AC Conducted Emission for Model 6055A

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 1(Charging from Adapter 1) + Earphone + Battery		

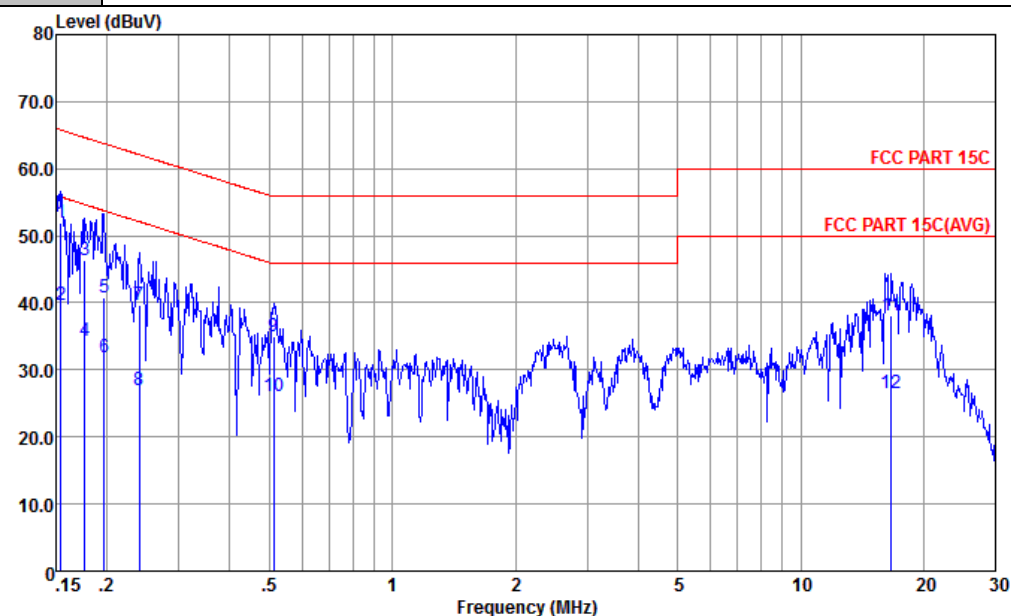


Site : CO01-KS
Condition : FCC PART 15C LISN-L-20151024 LINE

: 014727000002313 #6

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV		dBuV	dBuV	dB	dB	
1 *	0.15	51.81	-13.97	65.78	41.20	0.50	10.11	QP
2	0.15	39.71	-16.07	55.78	29.10	0.50	10.11	Average
3	0.18	46.27	-18.37	64.64	35.80	0.35	10.12	QP
4	0.18	34.37	-20.27	54.64	23.90	0.35	10.12	Average
5	0.20	40.87	-22.89	63.76	30.50	0.24	10.13	QP
6	0.20	31.97	-21.79	53.76	21.60	0.24	10.13	Average
7	0.24	39.56	-22.52	62.08	29.20	0.22	10.14	QP
8	0.24	26.96	-25.12	52.08	16.60	0.22	10.14	Average
9	0.51	34.89	-21.11	56.00	24.50	0.23	10.16	QP
10	0.51	25.99	-20.01	46.00	15.60	0.23	10.16	Average
11	16.66	38.00	-22.00	60.00	27.30	0.26	10.44	QP
12	16.66	26.60	-23.40	50.00	15.90	0.26	10.44	Average



Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 1(Charging from Adapter 1) + Earphone + Battery		

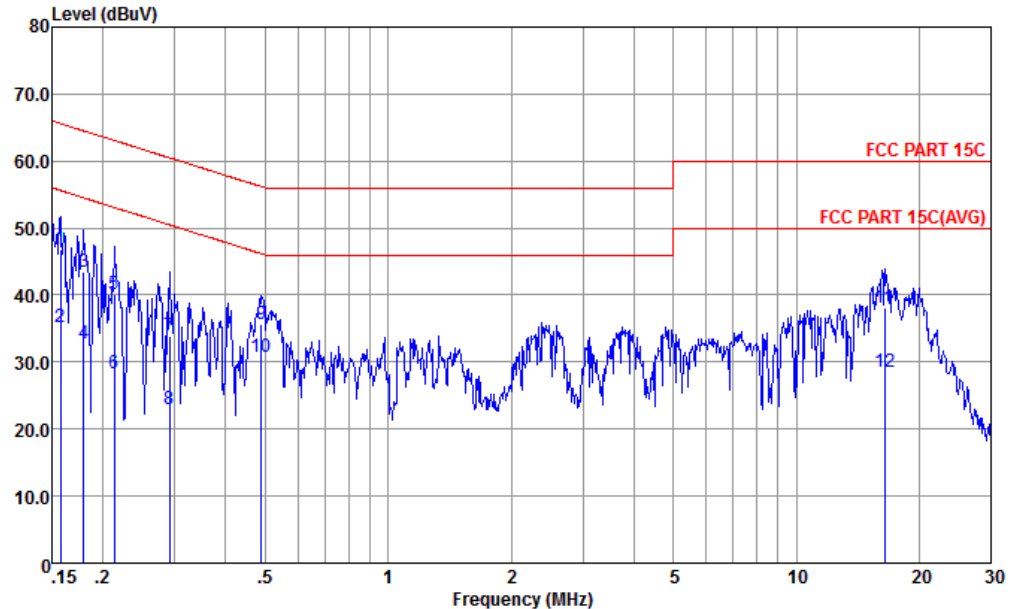

Site : CO01-KS
Condition : FCC PART 15C LISN-N-20151024 NEUTRAL

: 014727000002313 #6

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	46.71	-18.89	65.60	36.30	0.30	10.11	QP
2	0.16	35.31	-20.29	55.60	24.90	0.30	10.11	Average
3	0.18	43.53	-20.97	64.50	33.10	0.31	10.12	QP
4	0.18	32.73	-21.77	54.50	22.30	0.31	10.12	Average
5	0.21	40.04	-23.06	63.10	29.60	0.31	10.13	QP
6	0.21	28.24	-24.86	53.10	17.80	0.31	10.13	Average
7	0.29	33.76	-26.74	60.50	23.30	0.31	10.15	QP
8	0.29	22.96	-27.54	50.50	12.50	0.31	10.15	Average
9	0.49	35.68	-20.51	56.19	25.20	0.32	10.16	QP
10 *	0.49	30.78	-15.41	46.19	20.30	0.32	10.16	Average
11	16.49	37.99	-22.01	60.00	27.30	0.26	10.43	QP
12	16.49	28.59	-21.41	50.00	17.90	0.26	10.43	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Sep. 10, 2015	Apr. 22, 2016~ May 17, 2016	Sep. 09, 2016	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	Apr. 22, 2016~ May 17, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Apr. 22, 2016~ May 17, 2016	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 10, 2015	Apr. 22, 2016~ May 23, 2016	Sep. 09, 2016	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150 244	10Hz~44GHz	Apr. 22, 2016	Apr. 22, 2016~ May 23, 2016	Apr. 21, 2017	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 07, 2015	Apr. 22, 2016~ May 23, 2016	Nov. 06, 2016	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	25MHz~2GHz	Mar. 12, 2016	Apr. 22, 2016~ May 23, 2016	Mar. 11, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-13 56	1GHz~18GHz	Apr. 16, 2016	Apr. 22, 2016~ May 23, 2016	Apr 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18Ghz~40Ghz	Oct. 10, 2015	Apr. 22, 2016~ May 23, 2016	Oct. 09, 2016	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz~3000M Hz	Aug. 10, 2015	Apr. 22, 2016~ May 23, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A023 70	1GHz~26.5GHz	Oct. 24, 2015	Apr. 22, 2016~ May 23, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Apr. 22, 2016~ May 23, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 22, 2016~ May 23, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 22, 2016~ May 23, 2016	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2015	Apr. 25, 2016	May 03, 2016	Conduction (CO01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 29, 2016	Jul. 20, 2016	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Apr. 25, 2016~ Jul. 20, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Apr. 25, 2016~ Jul. 20, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Apr. 25, 2016~ Jul. 20, 2016	Oct. 23, 2016	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Issac Song	Temperature:	24~25	°C
Test Date:	2016/4/22~2016/5/17	Relative Humidity:	49~51	%

TEST RESULTS DATA**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.05	0.67	0.50	Pass
BLE	1Mbps	1	19	2440	1.05	0.67	0.50	Pass
BLE	1Mbps	1	39	2480	1.05	0.67	0.50	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.77	30.00	-5.00	-4.23	36.00	Pass
BLE	1Mbps	1	19	2440	0.69	30.00	-5.00	-4.31	36.00	Pass
BLE	1Mbps	1	39	2480	0.54	30.00	-5.00	-4.46	36.00	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.04	0.56
BLE	1Mbps	1	19	2440	2.04	0.48
BLE	1Mbps	1	39	2480	2.04	0.25

TEST RESULTS DATA**Peak Power Density**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	0.11	-14.63	-5.00	8.00	Pass
BLE	1Mbps	1	19	2440	0.60	-14.12	-5.00	8.00	Pass
BLE	1Mbps	1	39	2480	0.50	-14.20	-5.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.05	0.67	0.50	Pass
BLE	1Mbps	1	19	2440	1.05	0.67	0.50	Pass
BLE	1Mbps	1	39	2480	1.05	0.67	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.82	30.00	-5.00	-4.18	36.00	Pass
BLE	1Mbps	1	19	2440	0.59	30.00	-5.00	-4.41	36.00	Pass
BLE	1Mbps	1	39	2480	0.51	30.00	-5.00	-4.49	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	3.26	0.74
BLE	1Mbps	1	19	2440	3.26	0.58
BLE	1Mbps	1	39	2480	3.26	0.52

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	0.14	-14.85	-5.00	8.00	Pass
BLE	1Mbps	1	19	2440	0.65	-14.25	-5.00	8.00	Pass
BLE	1Mbps	1	39	2480	0.39	-14.55	-5.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

BLE v4.0 (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2346.63	52.02	-21.98	74	56.65	26.86	5.52	37.01	169	211	P	H
		2387.67	41.01	-12.99	54	45.44	27	5.59	37.02	169	211	A	H
	*	2402.254	86.35	-	-	90.78	27	5.59	37.02	169	211	P	H
	*	2402.087	85.82	-	-	90.25	27	5.59	37.02	169	211	A	H
		2335.56	51.46	-22.54	74	56.09	26.86	5.52	37.01	297	245	P	V
		2359.32	41.07	-12.93	54	45.64	26.91	5.54	37.02	297	245	A	V
	*	2402.338	85.21	-	-	89.64	27	5.59	37.02	297	245	P	V
	*	2402.087	84.46	-	-	88.89	27	5.59	37.02	297	245	A	V
BLE CH 19 2440MHz	*	2439.83	88.31	-	-	92.24	27.39	5.65	36.97	115	216	P	H
	*	2440.08	87.96	-	-	91.89	27.39	5.65	36.97	115	216	A	H
	*	2440.331	86.75	-	-	90.68	27.39	5.65	36.97	218	244	P	V
	*	2440.08	86.52	-	-	90.45	27.39	5.65	36.97	218	244	A	V
BLE CH 39 2480MHz	*	2479.826	89.37	-	-	92.98	27.64	5.69	36.94	112	217	P	H
	*	2480.076	88.98	-	-	92.59	27.64	5.69	36.94	112	217	A	H
		2496.64	52.28	-21.72	74	55.73	27.77	5.71	36.93	112	217	P	H
		2490.56	42.33	-11.67	54	45.78	27.77	5.71	36.93	112	217	A	H
	*	2479.826	88.17	-	-	91.78	27.64	5.69	36.94	226	241	P	V
	*	2480.076	87.84	-	-	91.45	27.64	5.69	36.94	226	241	A	V
		2489.68	52.67	-21.33	74	56.12	27.77	5.71	36.93	226	241	P	V
		2499.4	42.24	-11.76	54	45.69	27.77	5.71	36.93	226	241	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

BLE v4.0 (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		4803	39.03	-34.97	74	60.57	31.48	9.1	62.12	100	360	P	H
		4803	36.53	-37.47	74	58.07	31.48	9.1	62.12	100	0	P	V
BLE CH 19 2440MHz		4881	37.56	-36.44	74	58.8	31.59	9.2	62.03	100	360	P	H
		7320	39.68	-34.32	74	53.45	34.08	11.3	59.15	100	0	P	H
		4881	36.77	-37.23	74	58.01	31.59	9.2	62.03	100	0	P	V
		7320	39.22	-34.78	74	52.99	34.08	11.3	59.15	100	360	P	V
BLE CH 39 2480MHz		4959	37.59	-36.41	74	58.47	31.72	9.32	61.92	100	360	P	H
		7440	40.5	-33.5	74	54.06	34.44	11.3	59.3	100	0	P	H
		4959	36.31	-37.69	74	57.19	31.72	9.32	61.92	100	0	P	V
		7440	41.61	-32.39	74	55.17	34.44	11.3	59.3	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz

2.4GHz BLE v4.0 (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		36.79	22.86	-17.14	40	38.21	16.42	0.73	32.5	100	36	P	H
		58.13	22.76	-17.24	40	47.27	7.12	0.91	32.54	-	-	P	H
		77.53	15.11	-24.89	40	37.37	9.2	1.07	32.53	-	-	P	H
		124.09	12.04	-31.46	43.5	29.69	13.44	1.34	32.43	-	-	P	H
		323.91	19.77	-26.23	46	34.47	15.33	2.21	32.24	-	-	P	H
		848.68	23.66	-22.34	46	29.33	22.29	3.71	31.67	-	-	P	H
		30.97	31.37	-8.63	40	44.83	18.46	0.66	32.58	-	-	P	V
		36.79	29.35	-10.65	40	44.7	16.42	0.73	32.5	-	-	P	V
	!	57.16	34.35	-5.65	40	58.73	7.28	0.9	32.56	100	59	P	V
		269.59	17.57	-28.43	46	33.98	13.87	1.89	32.17	-	-	P	V
		323.91	21.36	-24.64	46	36.06	15.33	2.21	32.24	-	-	P	V
		980.6	25.08	-28.92	54	28.81	23.72	4.06	31.51	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



15C 2.4GHz 2400~2483.5MHz

BLE v4.2 (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2370.48	51.24	-22.76	74	55.74	26.95	5.57	37.02	378	136	P	H
		2360.85	42.66	-11.34	54	47.23	26.91	5.54	37.02	378	136	A	H
	*	2402.338	85.04	-	-	89.47	27	5.59	37.02	378	136	P	H
	*	2402.087	84.81	-	-	89.24	27	5.59	37.02	378	136	A	H
		2351.94	51.13	-22.87	74	55.7	26.91	5.54	37.02	107	231	P	V
		2381.19	42.66	-11.34	54	47.16	26.95	5.57	37.02	107	231	A	V
	*	2402.087	87.86	-	-	92.29	27	5.59	37.02	107	231	P	V
	*	2402.087	87.66	-	-	92.09	27	5.59	37.02	107	231	A	V
BLE CH 19 2440MHz	*	2439.997	85.78	-	-	89.71	27.39	5.65	36.97	294	134	P	H
	*	2439.997	85.57	-	-	89.5	27.39	5.65	36.97	294	134	A	H
	*	2440.08	88.9	-	-	92.83	27.39	5.65	36.97	127	231	P	V
	*	2439.997	88.71	-	-	92.64	27.39	5.65	36.97	127	231	A	V
BLE CH 39 2480MHz	*	2479.826	83.86	-	-	87.47	27.64	5.69	36.94	400	115	P	H
	*	2479.993	83.34	-	-	86.95	27.64	5.69	36.94	400	115	A	H
		2493.68	52.15	-21.85	74	55.6	27.77	5.71	36.93	400	115	P	H
		2492.76	43.67	-10.33	54	47.12	27.77	5.71	36.93	400	115	A	H
	*	2479.826	89.22	-	-	92.83	27.64	5.69	36.94	123	232	P	V
	*	2479.993	88.99	-	-	92.6	27.64	5.69	36.94	123	232	A	V
		2498.04	52.29	-21.71	74	55.74	27.77	5.71	36.93	123	232	P	V
		2486.8	43.46	-10.54	54	47.07	27.64	5.69	36.94	123	232	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

BLE v4.2 (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		4803	37.75	-36.25	74	59.29	31.48	9.1	62.12	100	360	P	H
		4803	36.32	-37.68	74	57.86	31.48	9.1	62.12	100	0	P	V
BLE CH 19 2440MHz		4881	36.04	-37.96	74	57.28	31.59	9.2	62.03	100	360	P	H
		7320	40.87	-33.13	74	54.64	34.08	11.3	59.15	100	0	P	H
		4881	36.83	-37.17	74	58.07	31.59	9.2	62.03	100	0	P	V
		7320	40.16	-33.84	74	53.93	34.08	11.3	59.15	100	360	P	V
BLE CH 39 2480MHz		4959	35.25	-38.75	74	56.13	31.72	9.32	61.92	100	360	P	H
		7440	40.27	-33.73	74	53.83	34.44	11.3	59.3	100	0	P	H
		4959	36.13	-37.87	74	57.01	31.72	9.32	61.92	100	0	P	V
		7440	40.11	-33.89	74	53.67	34.44	11.3	59.3	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz

2.4GHz BLE v4.2 (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30.97	20.97	-19.03	40	34.43	18.46	0.66	32.58	-	-	P	H
		58.13	24.1	-15.9	40	48.61	7.12	0.91	32.54	100	45	P	H
		323.91	20.1	-25.9	46	34.8	15.33	2.21	32.24	-	-	P	H
		667.29	21.07	-24.93	46	29.8	19.81	3.26	31.8	-	-	P	H
		796.3	23.81	-22.19	46	30.22	21.63	3.58	31.62	-	-	P	H
		942.77	25.37	-20.63	46	29.31	23.49	3.96	31.39	-	-	P	H
		36.79	27.77	-12.23	40	43.12	16.42	0.73	32.5	-	-	P	V
		49.4	27.44	-12.56	40	49.23	9.88	0.84	32.51	-	-	P	V
	!	58.13	34.45	-5.55	40	58.96	7.12	0.91	32.54	100	26	P	V
		252.13	19.62	-26.38	46	37.04	13.27	1.75	32.44	-	-	P	V
		323.91	20.58	-25.42	46	35.28	15.33	2.21	32.24	-	-	P	V
		954.41	24.95	-21.05	46	28.71	23.62	3.99	31.37	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth v4.0 LE	62.50	0.39	2.56	3kHz
Bluetooth v4.2 LE	47.22	0.30	3.33	10kHz


Bluetooth 4.0 LE

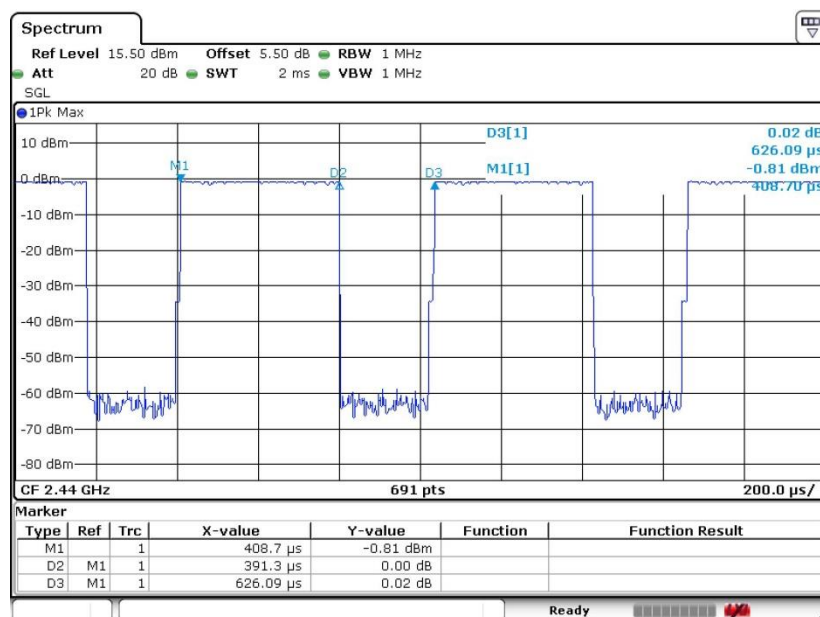

Date: 22.APR.2016 20:48:58



Bluetooth 4.2 LE

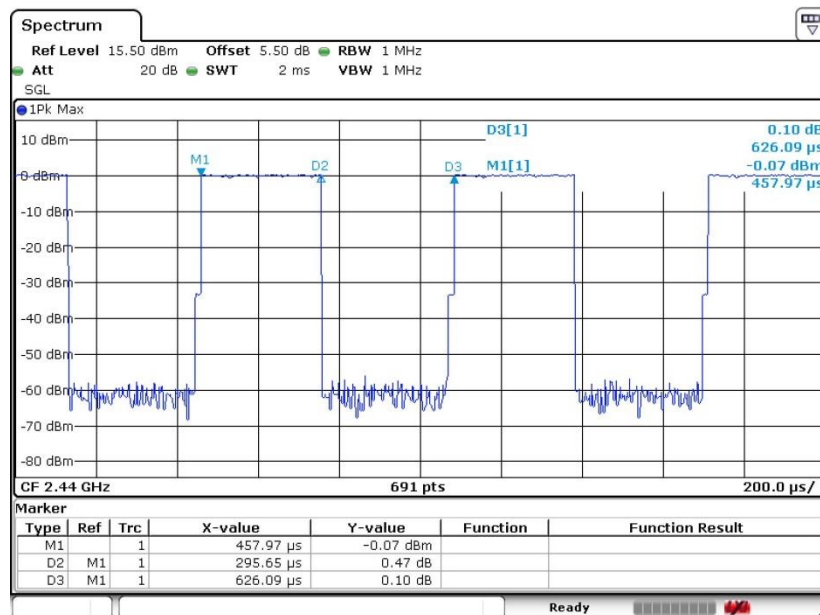

Date: 22.APR.2016 21:09:59



Appendix E. Product Equality Declaration



5F, C building, No. 232, Liang Jing Road
ZhangJiang High-Tech Park, Pudong Area
Shanghai, P.R. China. 201203
TEL: +86(0)21 61460666
FAX: +86(0)21 61460602

Declaration of changes from Initial to Variant

General: 6055A is a variant product of 6055U

● SOFTWARE MODIFICATIONS:

- Protocol Stack changes: No
- MMS/STK/USAT/USIM changes: No
- DM/SUPL/VT/FUMO/SWP/HCI: Yes (6055A does not support DM/FUMO)
- Other changes detailed:
 1. Enable FDD band17
 2. Add UICC base NFC

● HARDWARE MODIFICATIONS:

- Band changes: No
- PCB Layout changes: No
- Main RF components changes:

	Antenna	AP	Modem	Transceiver	Power Amplifier	Rx SAW Filter	ASM
GSM850	No	No	No	No	No	No	No
GSM900	No	No	No	No	No	No	No
GSM1800	No	No	No	No	No	No	No
GSM1900	No	No	No	No	No	No	No

	Antenna	AP	Modem	Transceiver	Power Amplifier	Tx SAW Filter	Duplexer	ASM
UMTS band X	No	No	No	No	No	No	No	No

	Antenna	AP	Modem	Transceiver	Power Amplifier	Tx SAW Filter	Rx SAW Filter	Duplexer	ASM
LTE Band x	No	No	No	No	No	No	No	No	No
LTE Band x	No	No	No	No	No	No	No	No	No

	Antenna	AP	Modem	Transceiver	Power Amplifier	Balun	Band pass filter	Diplexer
Bluetooth	No	No	No	No	No	No	No	No

Wi-Fi	No	No	No	No	No	No	No	No
-------	----	----	----	----	----	----	----	----

- FM changes: No
- LCD/ Speaker/ Camera/ Vibrator changes: No (indicated the changed items if yes)
- Other changes detailed:
Reduce 2db power in band 7.

● **MECHANICAL MODIFICATIONS:**

- Use new metal front/back cover or keypad: No
- Mechanical shell changes:
Whole size of EUT: No
Distance of Ear reference point to bottom of handset: No
Other trinkets to change the surface of handset: No
- Other changes detailed:
1. Different logo on backcover.

APPROVED BY:

Project Manager: *Freda*

Signature: *8.10.*

Date: