



BUREAU  
VERITAS

Test Report No.: FV141120N008



Test Lab  
Cert 2951.01

## EMC TEST REPORT

Applicant:	TCL Communication Ltd.
Address:	5F, C-Tower, No.232, Liangjing Road, Zhangjiang High-tech Park, Pudong, Shanghai, China

Manufacturer or Supplier	TCL Mobile Communication Co. Ltd. Huizhou
Address	70 Huifeng 4rd, ZhongKai High-Technology Development District, Huizhou, Guangdong, PRC. 516006
Product	Mobile Hotspot Folio
FCC ID	2ACCJB005
Brand Name	ALCATEL ONETOUCH
Model	Y860OA
Additional Model &Model Difference	N/A
Date of tests	Nov. 20, 2014~ Dec. 01, 2014

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

FCC Part 15, Subpart B, Class B

**CONCLUSION:** The submitted sample was found to COMPLY with the test requirement

Tested by Jeffery Lee Project Engineer / EMC Department	Approved by Sam Tung Supervisor / EMC Department

Date: Dec. 01, 2014

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel.: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



## Table of Contents

RELEASE CONTROL RECORD.....	3
1 GENERAL INFORMATION .....	4
1.1 GENERAL DESCRIPTION OF EUT .....	4
1.2 SUMMARY OF TEST RESULTS.....	5
1.3 MEASUREMENT UNCERTAINTY .....	5
1.4 DESCRIPTION OF TEST MODES .....	6
1.5 DESCRIPTION OF SUPPORT UNITS.....	7
1.6 CONFIGURATION OF SYSTEM UNDER TEST .....	8
2 EMISSION TEST.....	9
2.1 CONDUCTED EMISSION MEASUREMENT .....	9
2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	9
2.1.2 TEST INSTRUMENTS .....	9
2.1.3 TEST PROCEDURES.....	10
2.1.4 DEVIATION FROM TEST STANDARD .....	10
2.1.5 TEST SETUP .....	11
2.1.6 EUT OPERATING CONDITIONS.....	11
2.1.7 TEST RESULTS.....	12
2.2 RADIATED EMISSION MEASUREMENT .....	14
2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	14
2.2.2 TEST INSTRUMENTS .....	15
2.2.3 TEST PROCEDURE .....	16
2.2.4 DEVIATION FROM TEST STANDARD .....	16
2.2.5 TEST SETUP .....	17
2.2.6 EUT OPERATING CONDITIONS.....	17
2.2.7 TEST RESULTS .....	18
3 PHOTOGRAPHS OF THE TEST CONFIGURATION.....	21
4 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	24



Test Report No.: FV141120N008

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FV141120N008	Original release	Dec. 01, 2014



BUREAU  
VERITAS

Test Report No.: FV141120N008

## 1 GENERAL INFORMATION

### 1.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mobile Hotspot Folio	
MODEL NO.	Y860OA	
NOMINAL VOLTAGE	3.8Vdc (Li-ion)	
BATTERY	Brand Name:	Alcatel Onetouch
MODULATION TYPE	Model Name:	TLp046A2
	Power Rating:	DC 3.8V, 4600mAh, Li-ion
	WLAN	64QAM, 16QAM, QPSK, BPSK for OFDM
OPERATING FREQUENCY	WCDMA	BPSK/QPSK
	LTE	QPSK/16QAM
OPERATING FREQUENCY	WLAN	5.725~5.850GHz for 11a/n(HT20)
	WCDMA	1852.4MHz ~ 1907.6MHz (FOR WCDMA 850) 826.4MHz ~ 846.6MHz (FOR WCDMA 1900)
	LTE	1850MHz ~ 1910MHz (FOR LTE Band2) 1710MHz ~ 1755MHz (FOR LTE Band4) 824MHz ~ 849MHz (FOR LTE Band5) 2500MHz ~ 2570MHz (FOR LTE Band7) 704MHz ~ 716MHz (FOR LTE Band17)
HW Version	05	
SW Version	Y860OA_00_03.10_03_20141114	
I/O PORTS	Refer to user's manual	
CABLE	USB cable: Shielded, Detachable, 1.0m	
ACCESSORY DEVICES	Refer to note as below	

#### NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



## 1.2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart B			
Standard Section	Test Item	Result	Remark
FCC Part 15, Subpart B, Class B	Conducted Test	PASS	Meets limits minimum passing margin is - 19.31 dB at 0.40391 MHz
	Radiated Emission Test (30MHz ~ 1GHz)	PASS	Meets Class B Limit Minimum passing margin is - 3.11dB at 195.870 MHz
	Radiated Emission Test (Above 1GHz)	PASS	Meets Class B Limit Minimum passing margin is -15.60dB at 14319.13MHz

## 1.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz ~ 30MHz	+/-2.66dB
Radiated emissions	30MHz ~ 1GHz	+/-4.10dB
	1GHz ~ 18GHz	+/-4.58dB



BUREAU  
VERITAS

Test Report No.: FV141120N008

## 1.4 DESCRIPTION OF TEST MODES

Test Mode	Test Condition
<b>Radiated emission test</b>	
1	LTE B2 Idle+USB Link+ USB cable +Wifi Idle(5G) +SD card
2	LTE B4 Idle+USB Link+ USB cable +Wifi Idle(5G) +SD card
3	LTE B5 Idle+USB Link+ USB cable +Wifi Idle(5G) +SD card
4	LTE B17 Idle+USB Link+ USB cable +Wifi Idle(5G) +SD card
5	LTE B7 Idle+USB Link+ USB cable +Wifi Idle(5G) +SD card
6	WCDMA Band II Idle +USB Link+ USB cable +Wifi Idle(5G) +SD card
7	WCDMA Band V Idle +USB Link+ USB cable +Wifi Idle(5G) +SD card
<b>Conducted emission test</b>	
1	LTE B2 Idle+USB Link+ USB cable +Wifi Idle(5G) +SD card
2	LTE B4 Idle+USB Link+ USB cable +Wifi Idle(5G) +SD card
3	LTE B5 Idle+USB Link+ USB cable +Wifi Idle(5G) +SD card
4	LTE B17 Idle+USB Link+ USB cable +Wifi Idle(5G) +SD card
5	LTE B7 Idle+USB Link+ USB cable +Wifi Idle(5G) +SD card
6	WCDMA Band II Idle +USB Link+ USB cable +Wifi Idle(5G) +SD card
7	WCDMA Band V Idle +USB Link+ USB cable +Wifi Idle(5G) +SD card

### NOTE:

1. For conducted emission test, test mode 1 was the worst case and only this mode was presented in this report.
2. For radiated emission test, test mode 2 was the worst case and only this mode was presented in this report.



BUREAU  
VERITAS

Test Report No.: FV141120N008

## 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### FOR EMISSION TESTS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Universal Radio Communication Tester	R&S	CMU200	123259	N/A
2	Notebook	DELL	E6420	9H12FS1	N/A
3	Mouse	DELL	M056UOA	01688082	N/A
4	Printer	HP	hp LaserJet 1300	CNSJF75989	N/A
5	Earphone	Minami	ME-816B5-E	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	DC Line: Unshielded, Undetachable, 2.0m
3	USB Line: Unshielded, Undetachable 1.8m;
4	USB Line: Shielded, Detachable 1.5m;
5	Earphone line: Shielded, Detachable, 1.2m

### NOTE:



1. All power cords of the above support units are non shielded (1.8m).
2. Items 3-4 acted as communication partners.



BUREAU  
VERITAS

Test Report No.: FV141120N008

## 1.6 CONFIGURATION OF SYSTEM UNDER TEST

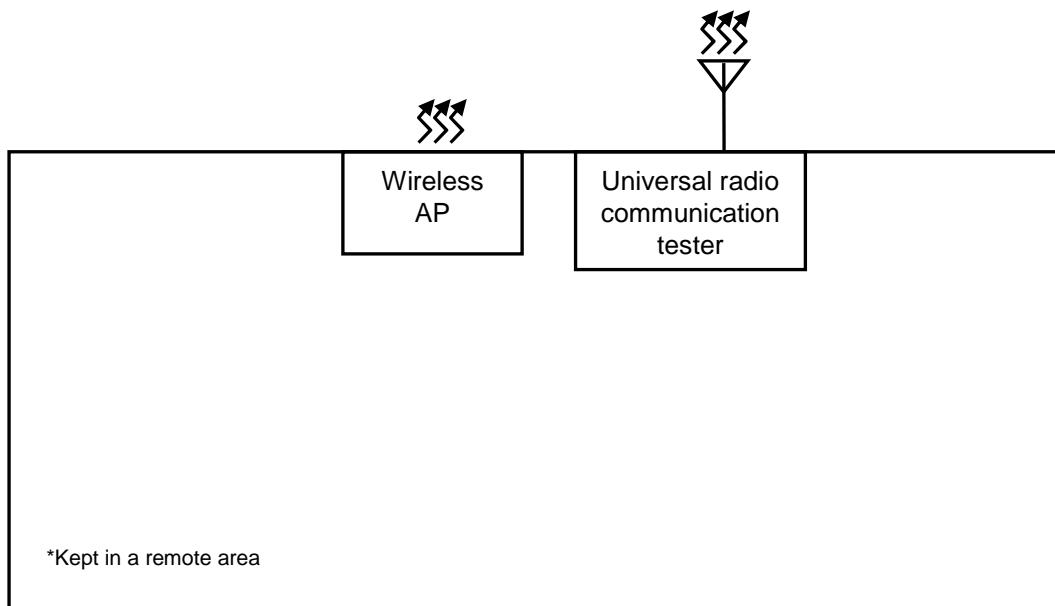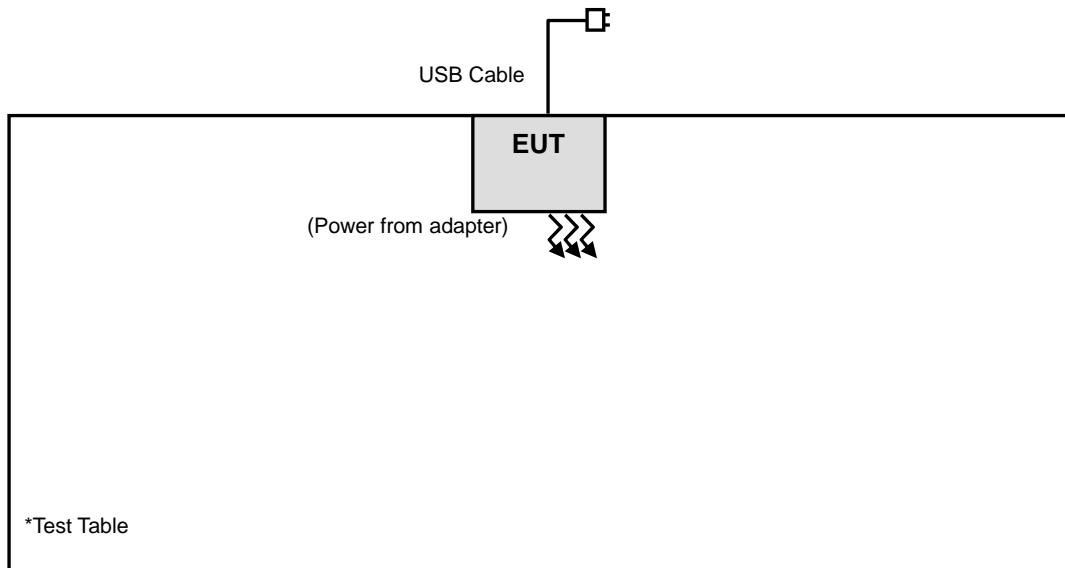



BUREAU  
VERITAS

Test Report No.: FV141120N008

## 2 EMISSION TEST

### 2.1 CONDUCTED EMISSION MEASUREMENT

#### 2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 2.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCS30	100340	May 17,14	May 16,15
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	May 13,14	May 12,15
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	May 13,14	May 12,15
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRT/CHINA and NIM/CHINA.

2. The test was performed in Dongguan Shielded Room 553.



### 2.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

### 2.1.4 DEVIATION FROM TEST STANDARD


No deviation.



BUREAU  
VERITAS

Test Report No.: FV141120N008

## 2.1.5 TEST SETUP

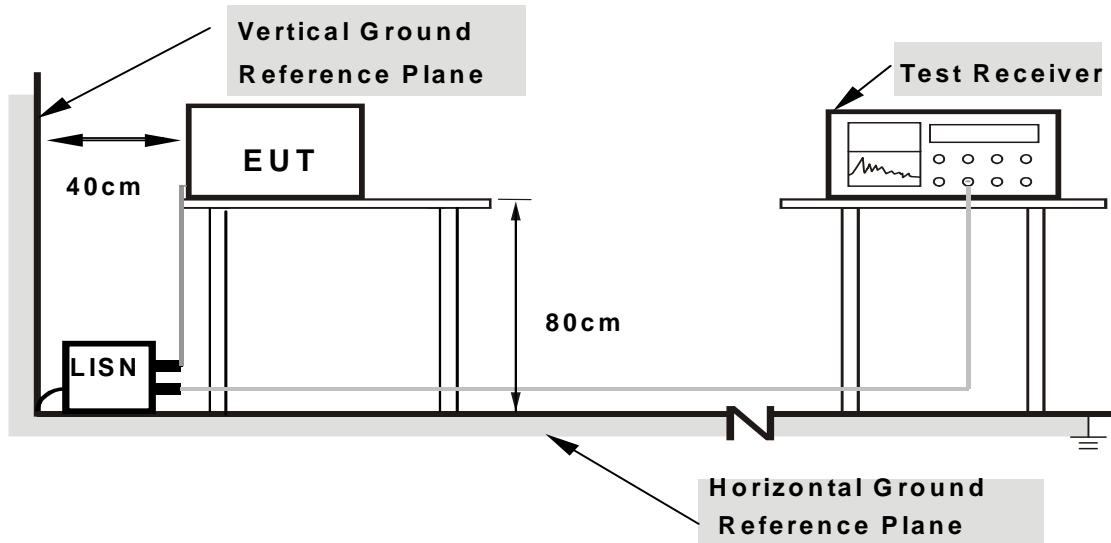

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 2.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the use type described in the manufacturer's specifications or the user's manual.



BUREAU  
VERITAS


Test Report No.: FV141120N008

## 2.1.7 TEST RESULTS

TEST VOLTAGE	AC 120 Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 50RH	PHASE	Line (L)
TESTED BY	Cheng Zhong		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.84	29.74	6.55	40.58	17.39	66.00	56.00	-25.42	-38.61
2	0.16172	10.80	27.52	10.59	38.32	21.39	65.38	55.38	-27.06	-33.99
3	0.17344	10.75	25.87	8.64	36.62	19.39	64.79	54.79	-28.17	-35.40
4	0.18906	10.69	24.46	4.71	35.15	15.40	64.08	54.08	-28.93	-38.68
5	0.20469	10.65	22.44	8.74	33.09	19.39	63.42	53.42	-30.33	-34.03
6	2.54297	10.03	22.79	15.40	32.82	25.43	56.00	46.00	-23.18	-20.57

**REMARKS:** The emission levels of other frequencies were very low against the limit.

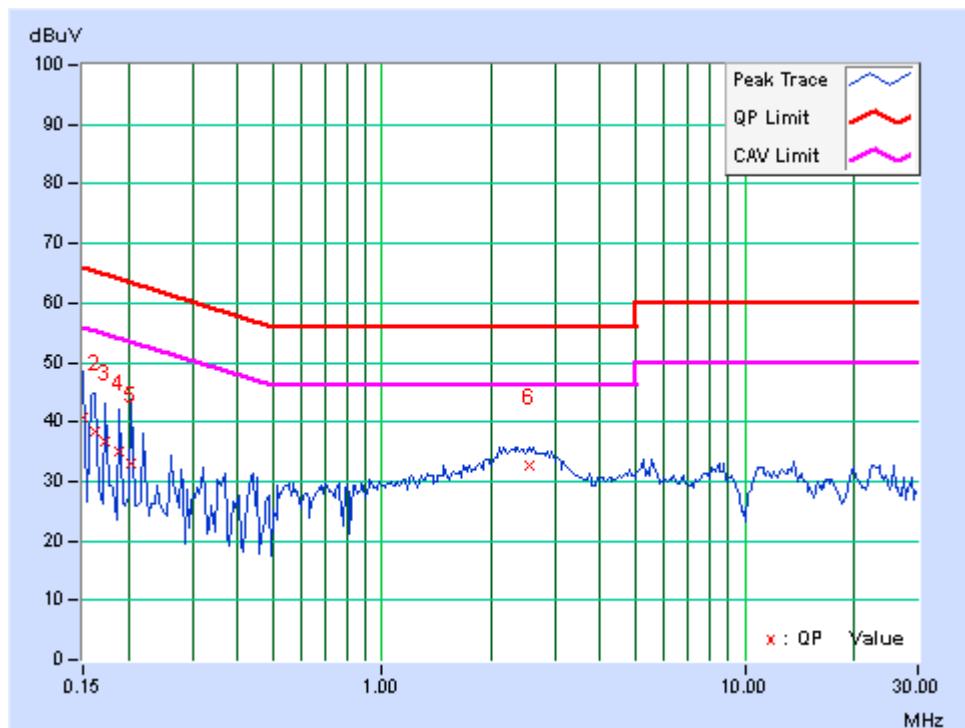




BUREAU  
VERITAS

Test Report No.: FV141120N008

TEST VOLTAGE	AC 120 Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 50RH	PHASE	Neutral(N)
TESTED BY	Cheng Zhong		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.63	29.27	4.03	39.90	14.66	65.79	55.79	-25.88	-41.12
2	0.16562	10.61	27.78	4.81	38.39	15.42	65.18	55.18	-26.79	-39.76
3	0.18125	10.58	25.72	5.06	36.30	15.64	64.43	54.43	-28.12	-38.78
4	0.19297	10.56	24.06	6.19	34.62	16.75	63.91	53.91	-29.29	-37.16
5	0.25156	10.54	21.04	9.74	31.58	20.28	61.71	51.71	-30.12	-31.42
6	<b>0.40391</b>	<b>10.59</b>	<b>22.20</b>	<b>17.87</b>	<b>32.79</b>	<b>28.46</b>	<b>57.77</b>	<b>47.77</b>	<b>-24.98</b>	<b>-19.31</b>

**REMARKS:** The emission levels of other frequencies were very low against the limit.

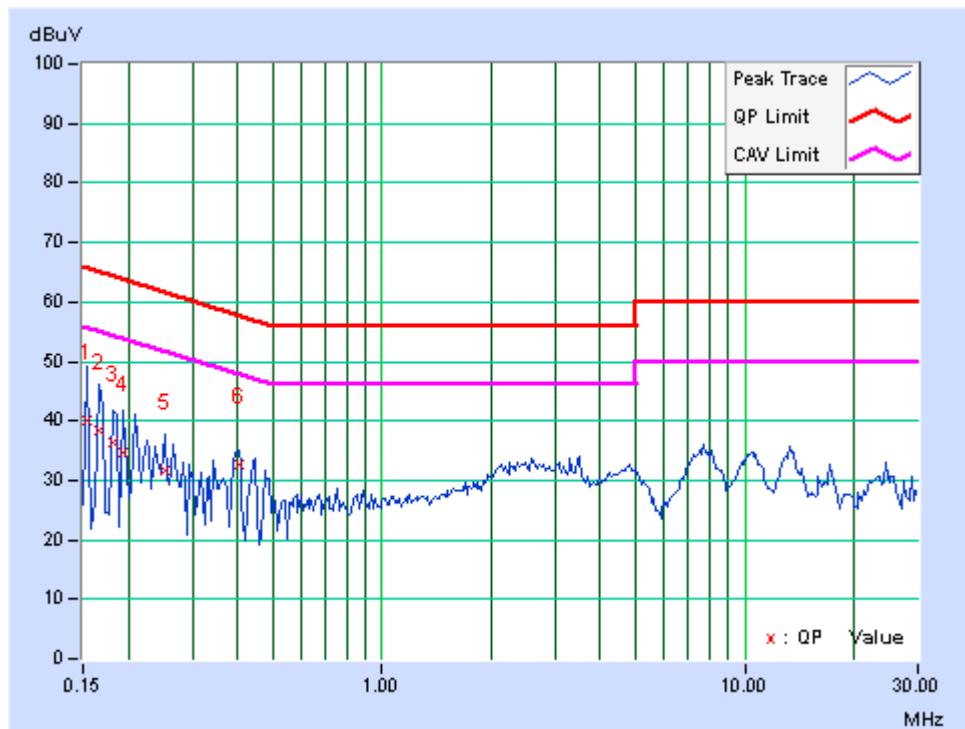



BUREAU  
VERITAS

Test Report No.: FV141120N008

## 2.2 RADIATED EMISSION MEASUREMENT

### 2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

#### TEST STANDARD: FCC Part 15, Subpart B (Section: 15.109)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B/ ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	39	29.5		
88-216	43.5	33.1	40	30
216-230				
230-960	46.4	35.6		
960-1000	49.5	43.5	47	37
1000-3000	Avg: 49.5	Avg: 43.5	Not defined	Not defined
3000+	Peak: 69.5	Peak: 63.5	Not defined	Not defined

Radiated Emissions Limits at 3 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	49.5	40		
88-216	54	43.5	50.5	40.5
216-230				
230-960	56.9	46		
960-1000	60	54	57.5	47.5
1000-3000			Avg: 56 Peak: 76	Avg: 50 Peak: 70
3000+	Avg: 60 Peak: 80	Avg: 54 Peak: 74	Avg: 60 Peak: 80	Avg: 54 Peak: 74

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. QP detector shall be applied if not specified.



BUREAU  
VERITAS

Test Report No.: FV141120N008

## 2.2.2 TEST INSTRUMENTS

### For frequency below 1G

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	100962	Mar. 06,14	Mar. 05,15
EMI Test Receiver	Rohde&Schwarz	ESCI	101418	Mar. 28,14	Mar. 27,15
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Dec. 03, 13	Dec. 02, 14
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-555	Dec. 03, 13	Dec. 02, 14
Signal Amplifier	Agilent	8447D	2944A10488	Jun. 25,14	Jun. 24,15
Signal Amplifier	Agilent	8447D	2944A11174	Jun. 25,14	Jun. 24,15
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8 .8m	NSEMC006	May 15, 14	May 14, 15
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

### Frequency range above 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	ETS-Lindgren	3117	00085519	Feb. 02,13	Feb. 01,15
Horn Antenna	SCHWARZBEC K	BBHA 9170	BBHA9170242	Feb. 13,14	Feb. 12,17
Spectrum Analyzer (9KHz-25GHz)	Agilent	E7405A	MY45118807	May 13,14	May 12,15
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101003	Apr. 09, 14	Apr. 08, 15
Pre-Amplifier (100MHz-26.5GHz)	EMCI	EMC 012645	980077	Jun. 16,14	Jun. 15,15
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,14	Nov. 03,15
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

**NOTE:**

1. The test was performed in 10m Chamber.
2. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The FCC Site Registration No. is 502831.



## 2.2.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2009 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters (below 1GHz) and 3 meters (above 1GHz) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

### NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
4. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
5. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
6. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier)
7. Margin value = Emission level – Limit value.


## 2.2.4 DEVIATION FROM TEST STANDARD

No deviation.




## 2.2.5 TEST SETUP

<Frequency Range below 1GHz>

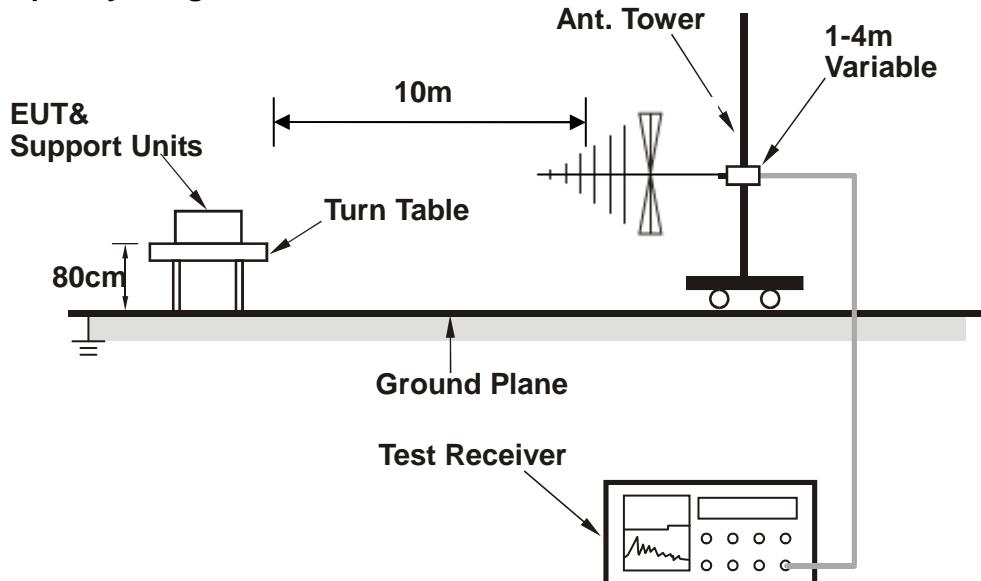

<Frequency Range above 1GHz>

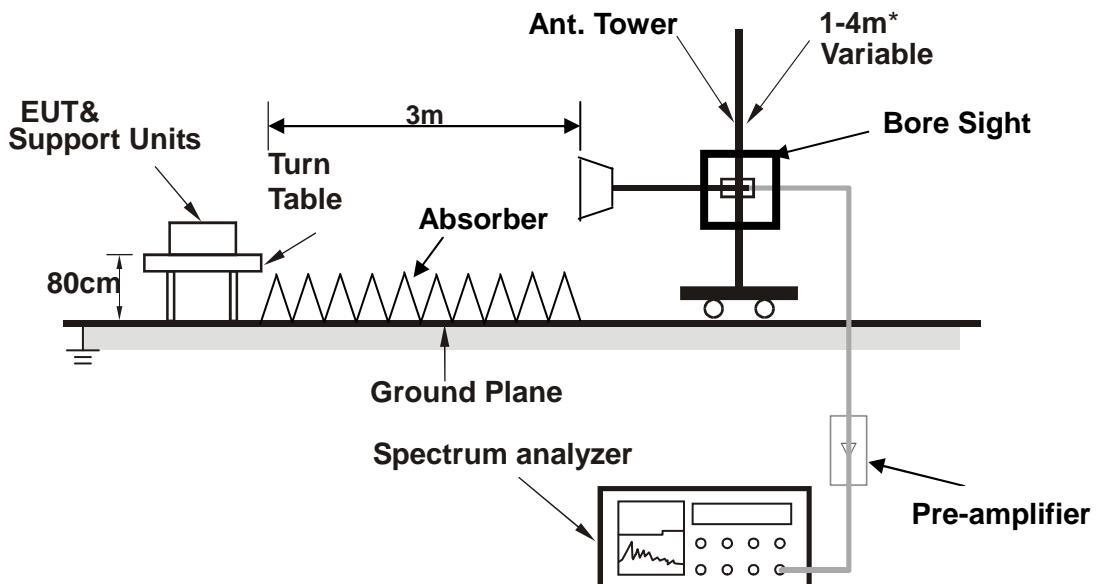

\* : depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

## 2.2.6 EUT OPERATING CONDITIONS

Same as item 2.1.6.



BUREAU  
VERITAS

Test Report No.: FV141120N008


## 2.2.7 TEST RESULTS

TEST VOLTAGE	DC 5V from PC	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	17deg. C, 54 %RH	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak , 120 kHz
TESTED BY	Kery He		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	66.618	-15.93	41.46	25.53	30.00	-4.47	400	236
2	<b>195.870</b>	<b>-16.36</b>	<b>43.25</b>	<b>26.89</b>	<b>30.00</b>	<b>-3.11</b>	<b>400</b>	<b>133</b>
3	239.884	-14.84	46.72	31.88	37.00	-5.12	200	180
4	314.331	-12.02	33.90	21.88	37.00	-15.12	400	213
5	345.007	-11.51	35.18	23.67	37.00	-13.33	200	43
6	674.808	-4.12	32.09	27.97	37.00	-9.03	400	70

**REMARKS:**

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30MHz to 1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

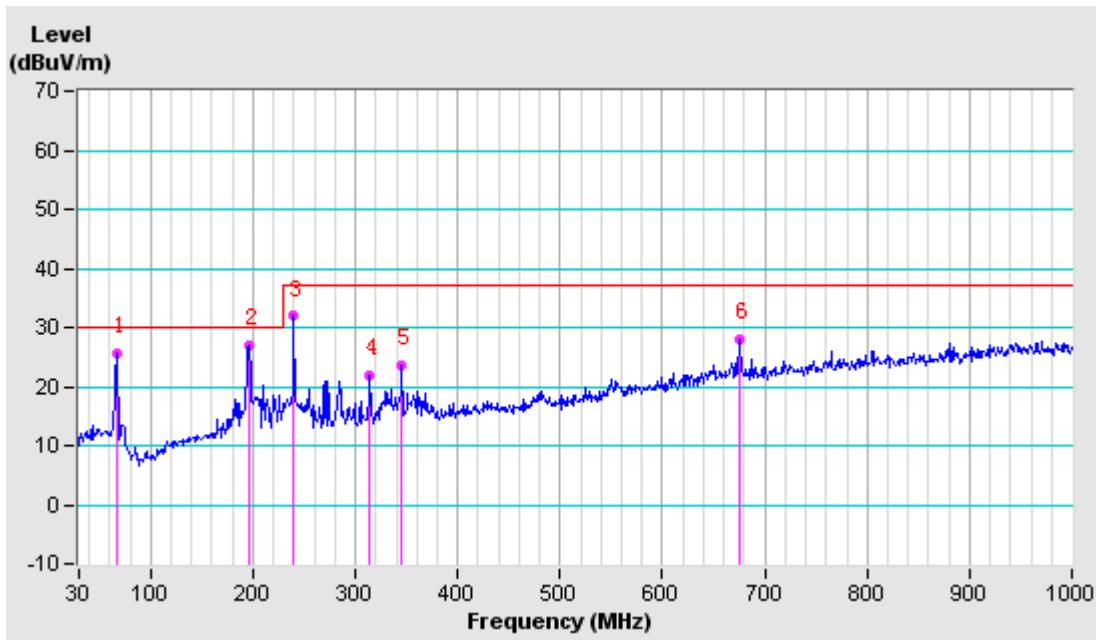



BUREAU  
VERITAS


Test Report No.: FV141120N008

TEST VOLTAGE	DC 5V from PC	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	17deg. C, 54 %RH	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak , 120 kHz
TESTED BY	Kery He		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	66.618	-14.78	35.99	21.21	30.00	-8.79	300	201
2	165.679	-12.19	29.84	17.65	30.00	-12.35	100	23
3	196.120	-14.82	41.22	26.40	30.00	-3.60	100	110
4	240.002	-12.24	44.64	32.40	37.00	-4.60	100	54
5	534.764	-4.97	27.36	22.39	37.00	-14.61	100	336
6	674.322	-0.92	28.97	28.05	37.00	-8.95	300	178

**REMARKS:**

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30MHz to 1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

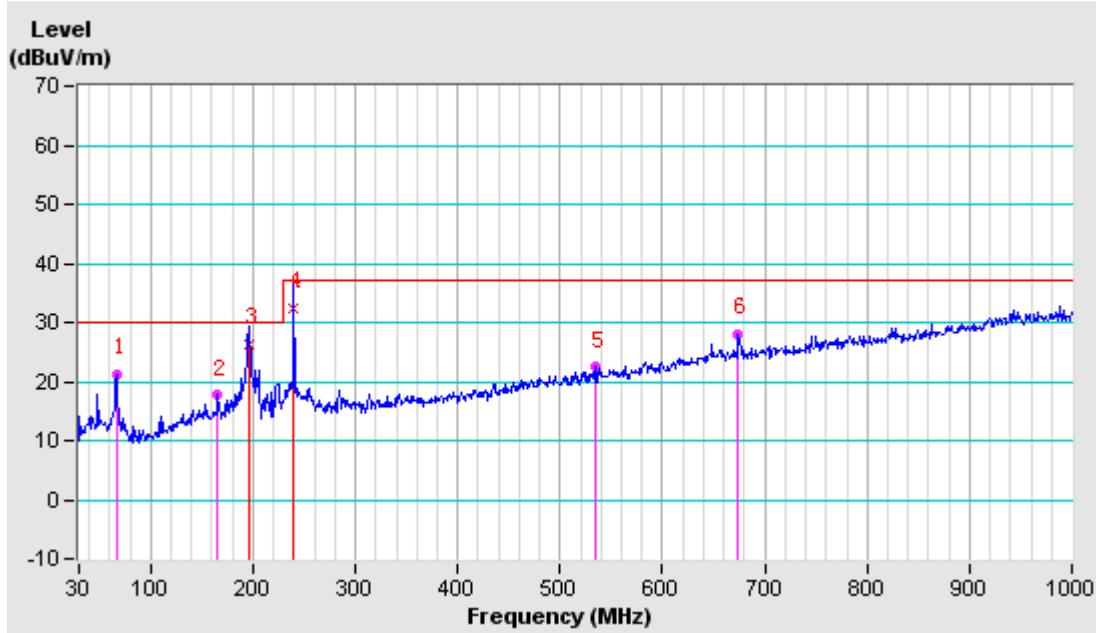

BUREAU  
VERITAS

Test Report No.: FV141120N008

TEST VOLTAGE	DC 5V from PC	FREQUENCY RANGE	1-6 GHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 58% RH	DETECTOR FUNCTION & BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Kery He		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	2810.90PK	-6.27	57.33	51.06	70	-18.94	100	131
2	2810.90AV	-6.27	42.47	36.20	50	-13.80	100	131
3	8684.62PK	3.51	50.57	54.08	74	-19.92	100	99
4	8684.62AV	3.51	32.60	36.11	54	-52.66	100	99
5	11170.19PK	6.19	49.29	55.48	74	-18.52	100	87
6	11170.19AV	6.19	31.95	38.14	54	-15.86	100	87

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	4383.75PK	-3.23	56.66	53.43	74	-20.57	100	124
2	4383.75AV	-3.23	40.53	37.30	54	-16.70	100	124
3	10245.42PK	5.43	51.83	57.26	74	-16.74	100	20
4	10245.42AV	5.43	32.87	38.30	54	-15.70	100	20
5	14319.13PK	8.95	46.13	55.08	74	-18.92	100	21
6	14319.13AV	<b>8.95</b>	<b>29.45</b>	<b>38.40</b>	<b>54</b>	-15.60	<b>100</b>	<b>21</b>

**REMARKS:**

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 1GHz to 6GHz.
4. Only emissions significantly above equipment noise floor are reported.



BUREAU  
VERITAS

Test Report No.: FV141120N008

### 3 PHOTOGRAPHS OF THE TEST CONFIGURATION



Conducted Emission Test





**BUREAU  
VERITAS** Test Report No.: FV141120N008

### Radiated Emission Test (Frequency range 30MHz~1GHz)

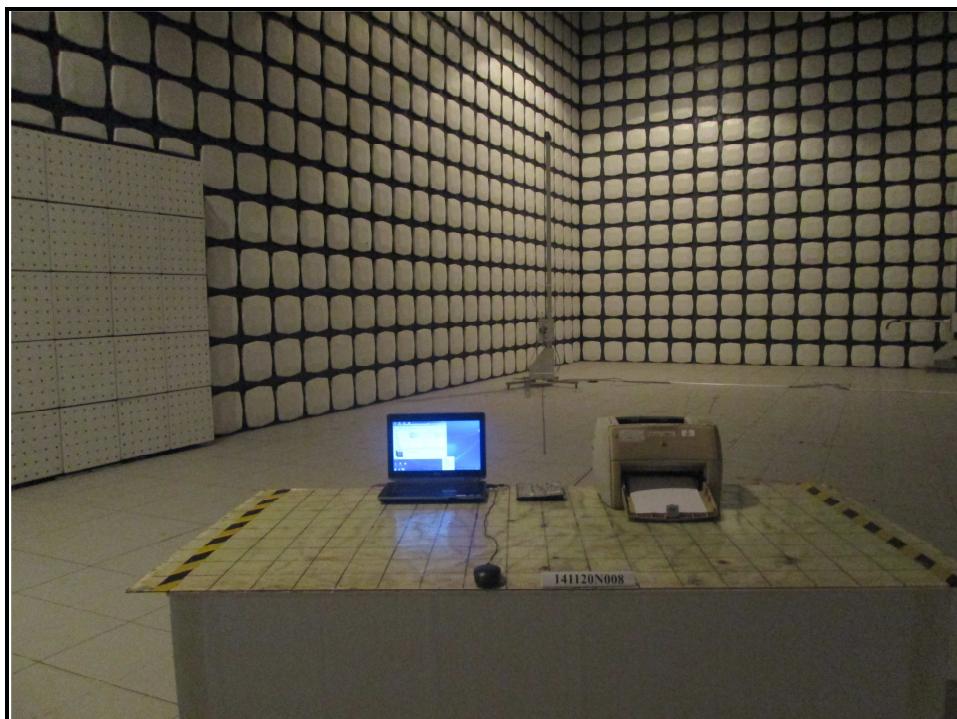
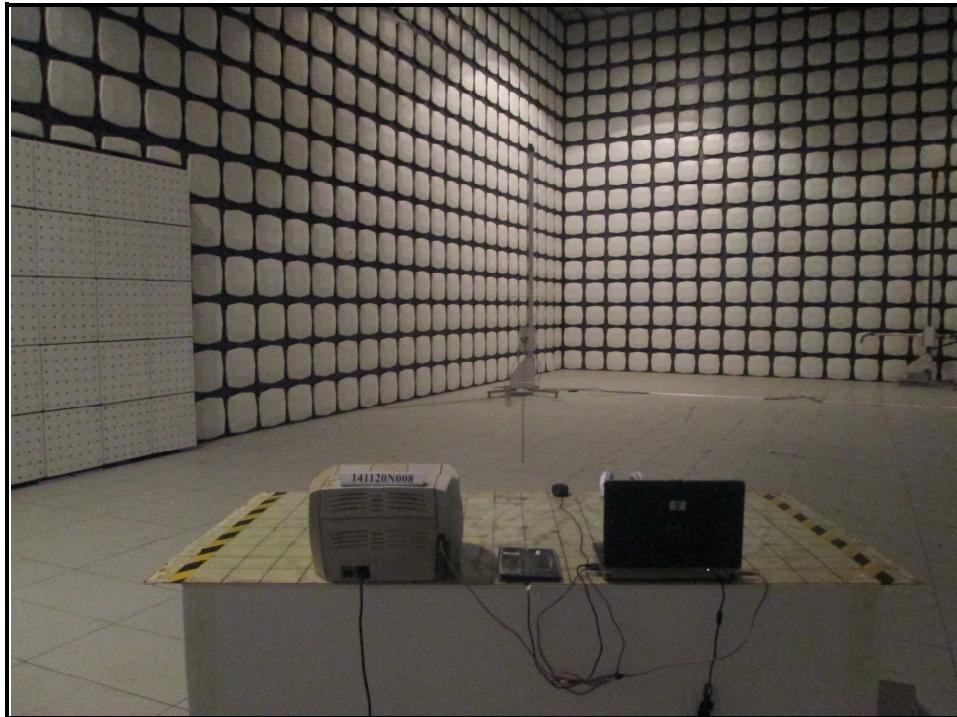




BUREAU  
VERITAS

Test Report No.: FV141120N008

Radiated Emission Test (Frequency range above 1GHz)

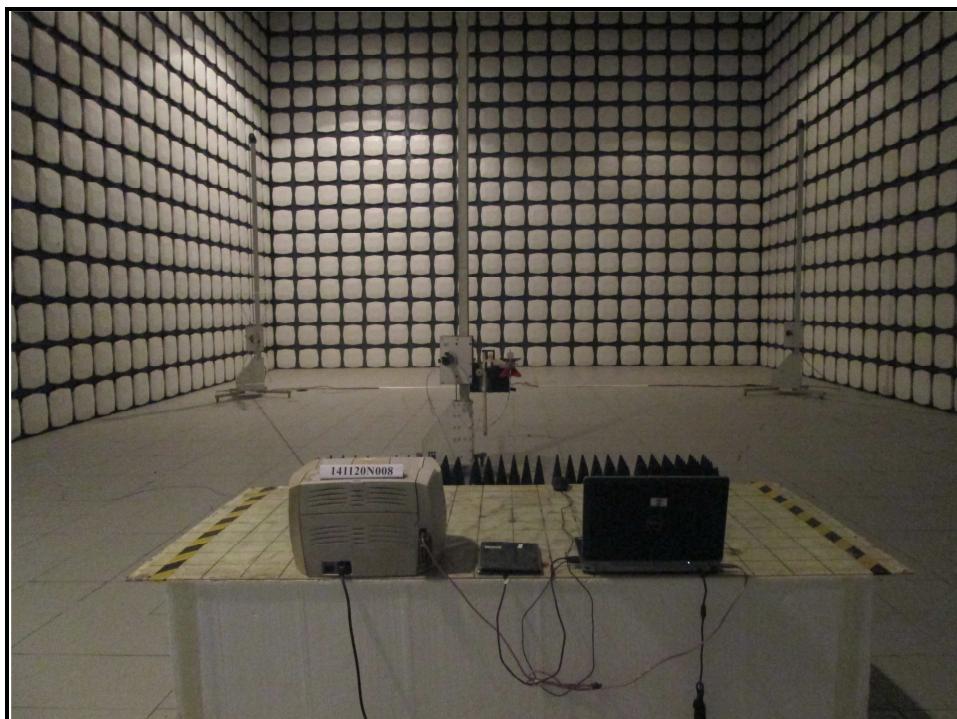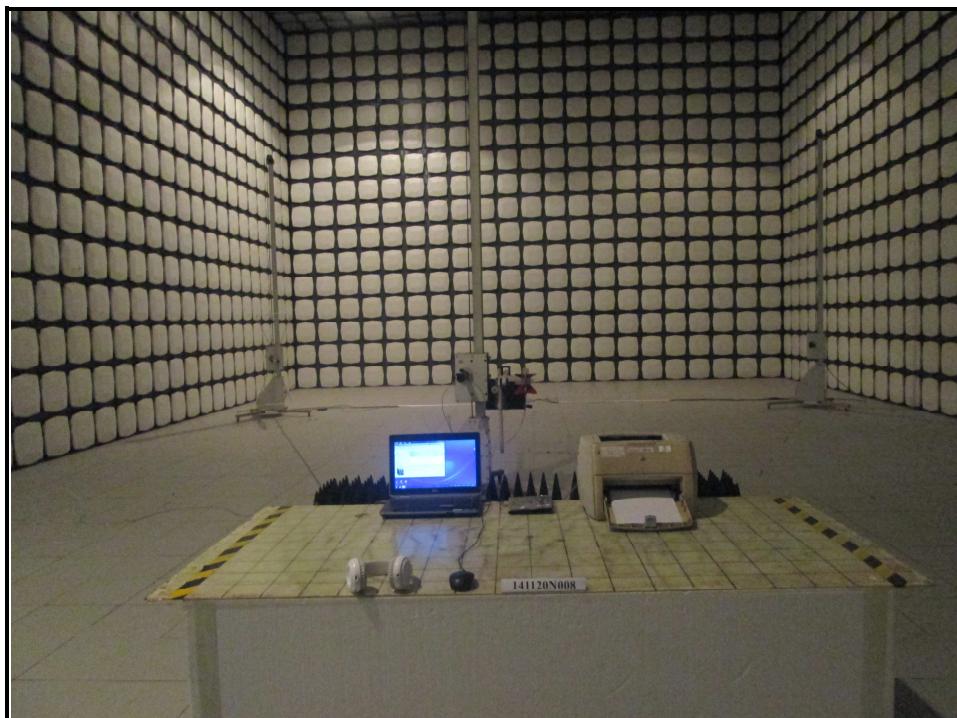

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel.: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS** Test Report No.: FV141120N008

## **4 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications were made to the EUT by the lab during the test.

**---END---**