



REPORT No.: SZ15080041W03

FCC RF TEST REPORT

APPLICANT : TCL Communication Ltd.
PRODUCT NAME : Tablet PC
MODEL NAME : 8080
TRADE NAME : ONETOUCH PIXI 3 (10)
BRAND NAME : ALCATEL ONETOUCH
FCC ID : 2ACCJB024
STANDARD(S) : 47 CFR Part 15 Subpart C
ISSUE DATE : 2015-8-20



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1 IDENTIFICATION OF ALL USED EUTS	5
1.3 AC ADAPTER DESCRIPTION	6
1.4 TEST STANDARDS AND RESULTS	6
1.4.1 TEST ENVIRONMENT CONDITIONS	7
2. 47 CFR PART 15C REQUIREMENTS	8
2.1 ANTENNA REQUIREMENT	8
2.1.1 APPLICABLE STANDARD	8
2.1.2 RESULT: COMPLIANT	8
2.2 PEAK OUTPUT POWER	8
2.2.1 REQUIREMENT	8
2.2.2 TEST DESCRIPTION	8
2.2.3 TEST RESULT	9
2.3 6DB BANDWIDTH	11
2.3.1 REQUIREMENT	11
2.3.2 TEST DESCRIPTION	11
2.3.3 TEST RESULT	11
2.4 CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE	14
2.4.1 REQUIREMENT	14
2.4.2 TEST DESCRIPTION	14
2.4.3 TEST RESULT	14
2.5 POWER SPECTRAL DENSITY (PSD)	18
2.5.1 REQUIREMENT	18
2.5.2 TEST DESCRIPTION	18
2.5.3 TEST RESULT	18
2.6 RESTRICTED FREQUENCY BANDS	21
2.6.1 REQUIREMENT	21
2.6.2 TEST DESCRIPTION	21



2.6.3	TEST RESULT.....	22
2.7	CONDUCTED EMISSION.....	25
2.7.1	REQUIREMENT.....	25
2.7.2	TEST DESCRIPTION	25
2.7.3	TEST RESULT.....	26
2.8	RADIATED EMISSION	29
2.8.1	REQUIREMENT.....	29
2.8.2	TEST DESCRIPTION	30
2.8.3	TEST RESULT.....	32
2.9	RF EXPOSURE EVALUATION	39
2.9.1	REQUIREMENT.....	39
2.9.2	RESULT.....	39
<u>ANNEX A PHOTOS OF EUT TEST SETUP</u>		<u>40</u>
<u>ANNEX B PHOTOS OF THE EUT</u>		<u>43</u>
<u>ANNEX C GENERAL INFORMATION</u>		<u>52</u>

Change History		
Issue	Date	Reason for change
1.0	2015-8-18	First edition
2.0	2015-8-20	Update the setup for radiation above 1GHz test



REPORT No.: SZ15080041W03

TEST REPORT DECLARATION

Applicant	TCL Communication Ltd.
Applicant Address	5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China
Manufacturer	TCL Communication Ltd.
Manufacturer Address	5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China
Product Name	Tablet PC
Model Name	8080
Brand Name	ALCATEL ONETOUCH
HW Version	V04
SW Version	5E21
Test Standards	47 CFR Part 15 Subpart C
Test Date	2015-7-9 to 2015-8-14
Test Result	PASS

Tested by : Zou Jian
Zou Jian(Test Engineer)

Reviewed by : Qiu Xiaojun
Qiu Xiaojun(RF Manager)

Approved by : Zeng Dexin
Zeng Dexin(Chief Engineer)



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	TCL Communication Ltd.
Address:	5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China

1.2 Equipment under Test (EUT) Description

Brand Name:	ALCATEL ONETOUCH	
Trade Name:	ONETOUCH PIXI 3 (10)	
Model Name:	8080	
Frequency Range:	The frequency range used is 2402MHz - 2480MHz (40 channels, at intervals of 2MHz);	
Modulation Type:	GFSK	
Antenna Type:	monopole	
Antenna Gain:	2.01dBi	
USB Cable:	Length:	80cm
	Type:	Shielded cable

NOTE:

The EUT is a Tablet PC, it contain Bluetooth 4.0 LE Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth 4.0 LE is $F(\text{MHz})=2402+2*n$ ($0 \leq n \leq 39$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

A RF cable was used by the EUT conducted output port to connect the spectrum analyzer, and the RF cable was provided by client. The offset level would set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer.

1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	V04	5E21



1.3 AC Adapter Description

AC adapter 1	
Brand Name:	ALCATEL onetouch
Model No.:	UC13 US
Rated Input:	~ 100-240V, 50/60Hz, 350mA
Rated Output:	= 5V, 2000mA
Manufacturer:	AOHAI
AC adapter 2	
Brand Name:	ALCATEL onetouch
Model No.:	UC13US
Rated Input:	~ 100-240V, 50/60Hz, 500mA
Rated Output:	= 5V, 2000mA
Manufacturer:	BYD
Note: The AC Adapter is equipped with a USB port which can be connected to the Micro-B port of the EUT by a USB cable.	

1.4 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-13 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.203	Antenna Requirement	N.A	<u>PASS</u>
2	15.247(b)	Peak Output Power	July 16, 2015	<u>PASS</u>
3	15.247(a)	Bandwidth	July 16, 2015	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	July 16, 2015	<u>PASS</u>
5	15.247(d)	Restricted Frequency Bands	July 10, 2015	<u>PASS</u>
6	15.207	Conducted Emission	August 12, 2015	<u>PASS</u>
7	15.209 ,15.247(d)	Radiated Emission	August 14, 2015	<u>PASS</u>
8	15.247(e)	Power spectral density (PSD)	July 16, 2015	<u>PASS</u>
9	15.247(i),1.1307& 2.1093	RF exposure evaluation	N.A	<u>PASS</u>

The tests of Conducted Emission and Radiated Emission were performed according to the method



REPORT No.: SZ15080041W03

of measurements prescribed in ANSI C63.10: 2013 and ANSI C63.4: 2009.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 v03r03 (09/06/2015).

1.4.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2 Peak Output Power


2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2 Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:

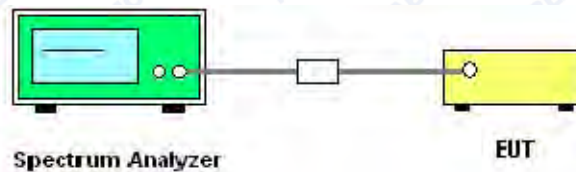

The EUT (Equipment under the test) which is powered by the Battery is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please reference ANNEX A (1.4).




2.2.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Refer to Plot	Limit		Verdict
		dBm	W		dBm	W	
0	2402	-3.721	0.000425	Plot A	30	1	PASS
19	2440	-3.364	0.000461	Plot B			PASS
39	2480	-3.453	0.000452	Plot C			PASS


B. Test Plots:

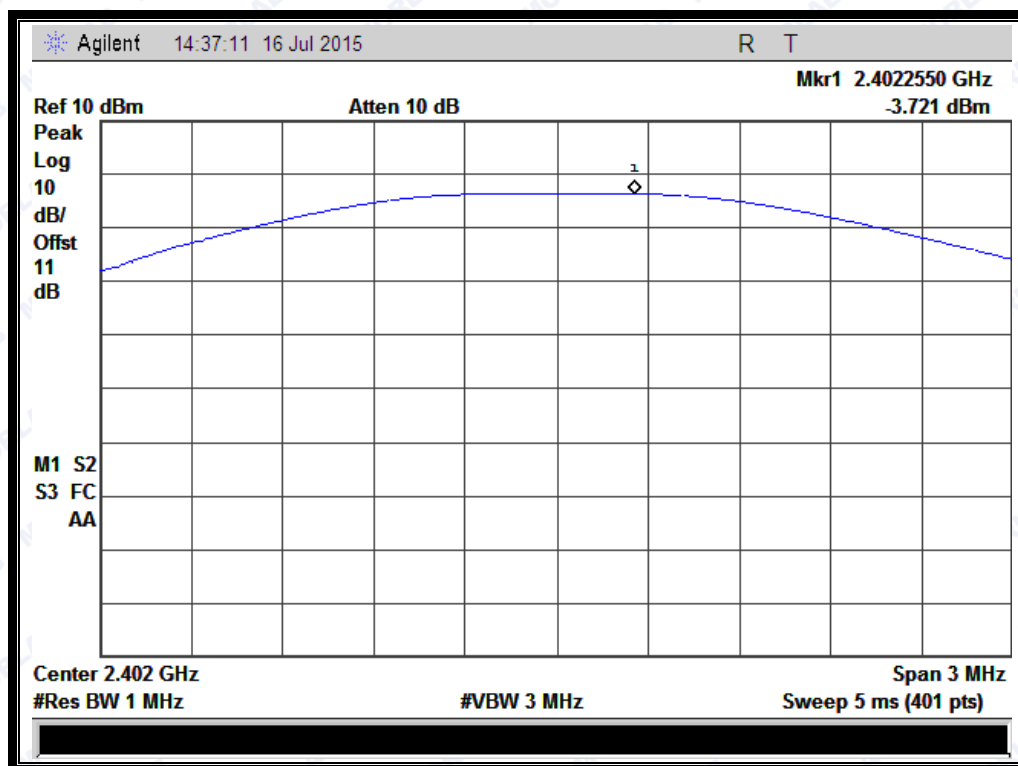


(Plot A: Channel 0: 2402MHz)



REPORT No.: SZ15080041W03

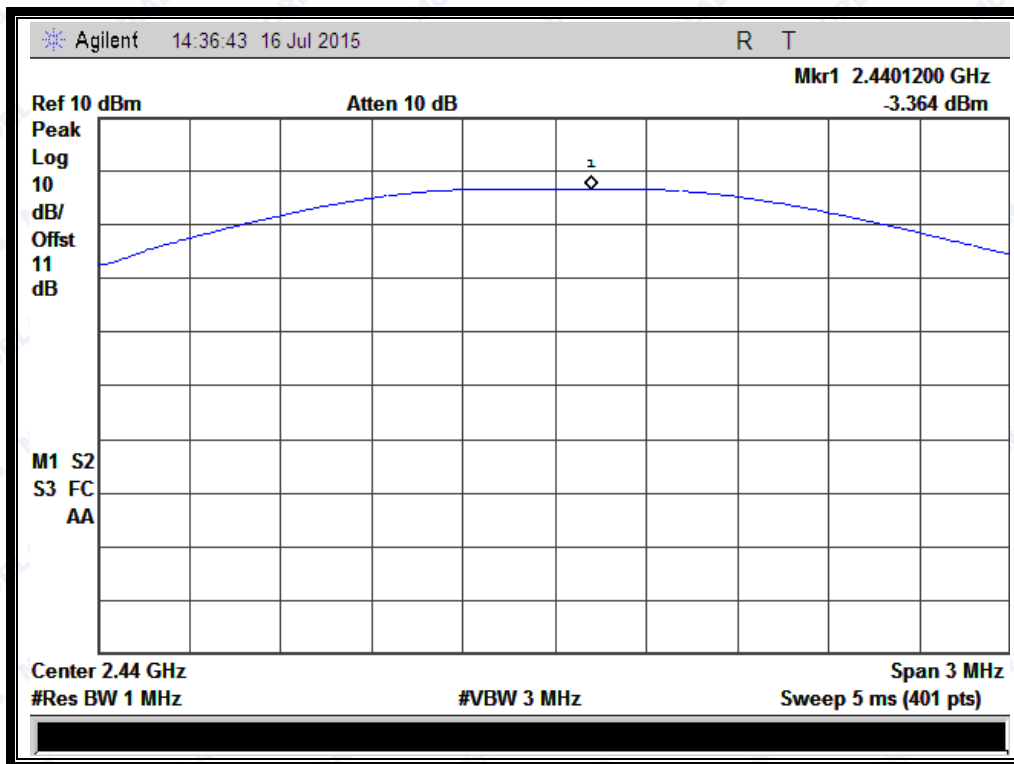

(Plot B: Channel 19: 2440MHz)

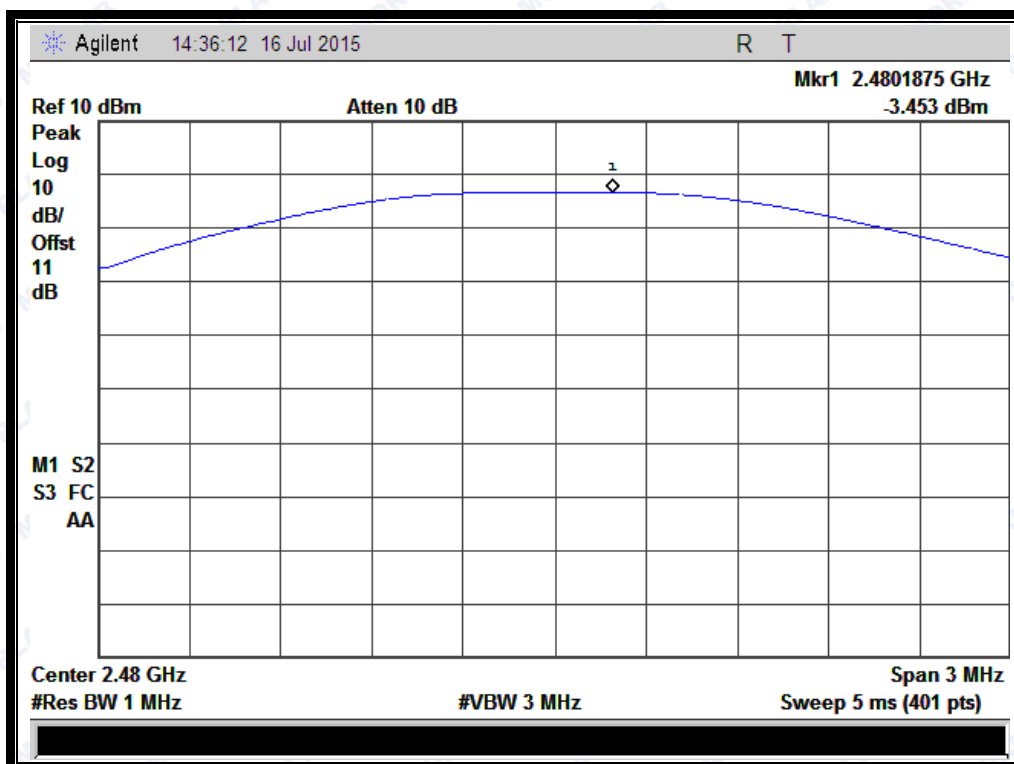

(Plot C: Channel 39: 2480MHz)


2.3 6dB Bandwidth

2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Description

A. Test Set:

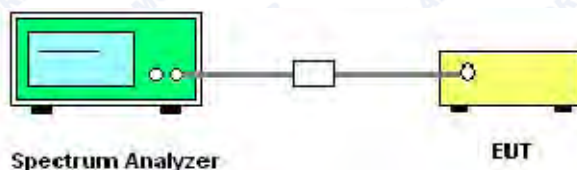

The EUT which is powered by the battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the module.


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
0	2402	0.7368	Plot A	≥500	PASS
19	2440	0.7339	Plot B	≥500	PASS
39	2480	0.7279	Plot C	≥500	PASS


B. Test Plots:



REPORT No.: SZ15080041W03

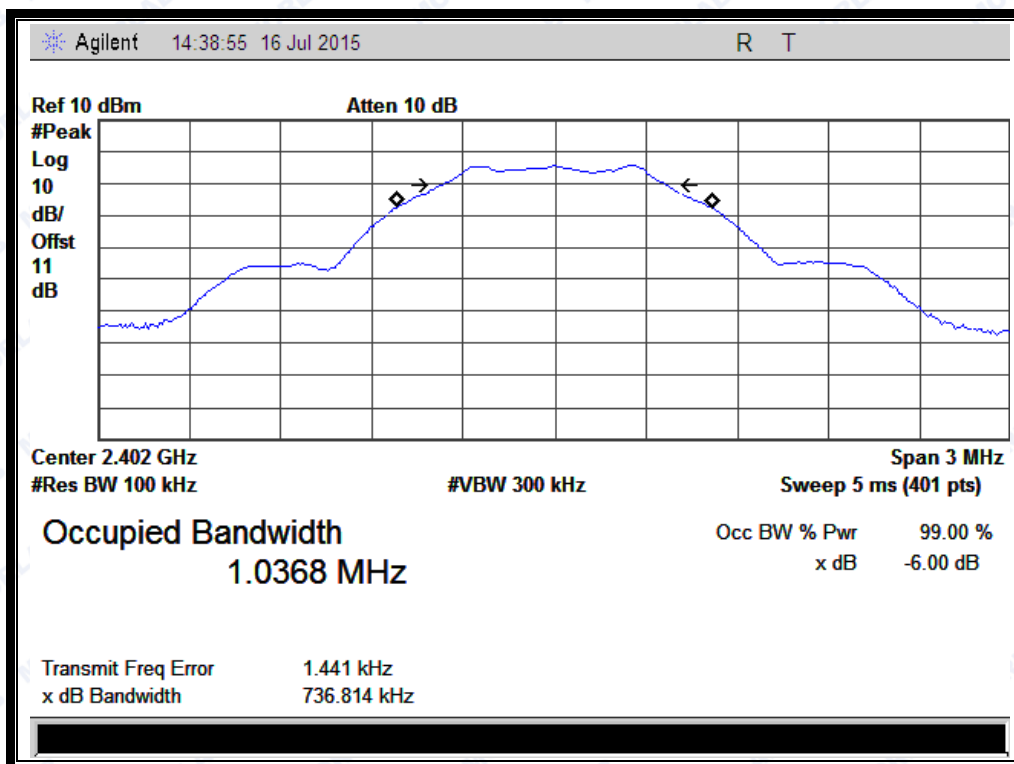


(Plot A: Channel 0: 2402MHz)

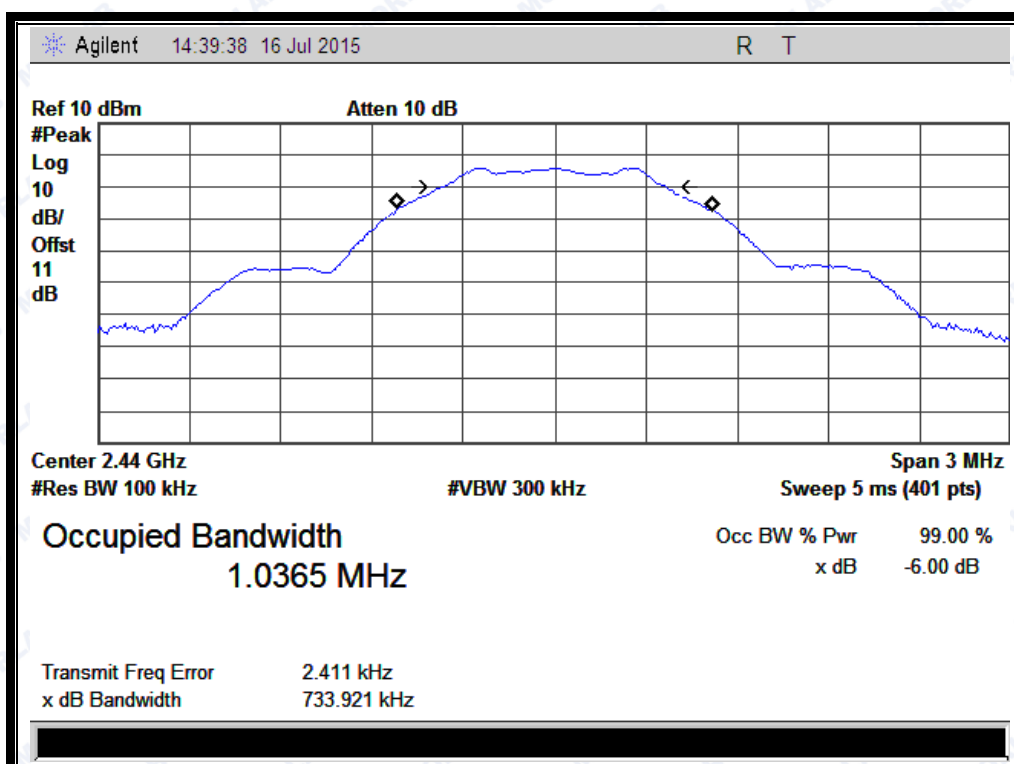

(Plot B: Channel 19: 2440 MHz)



REPORT No.: SZ15080041W03

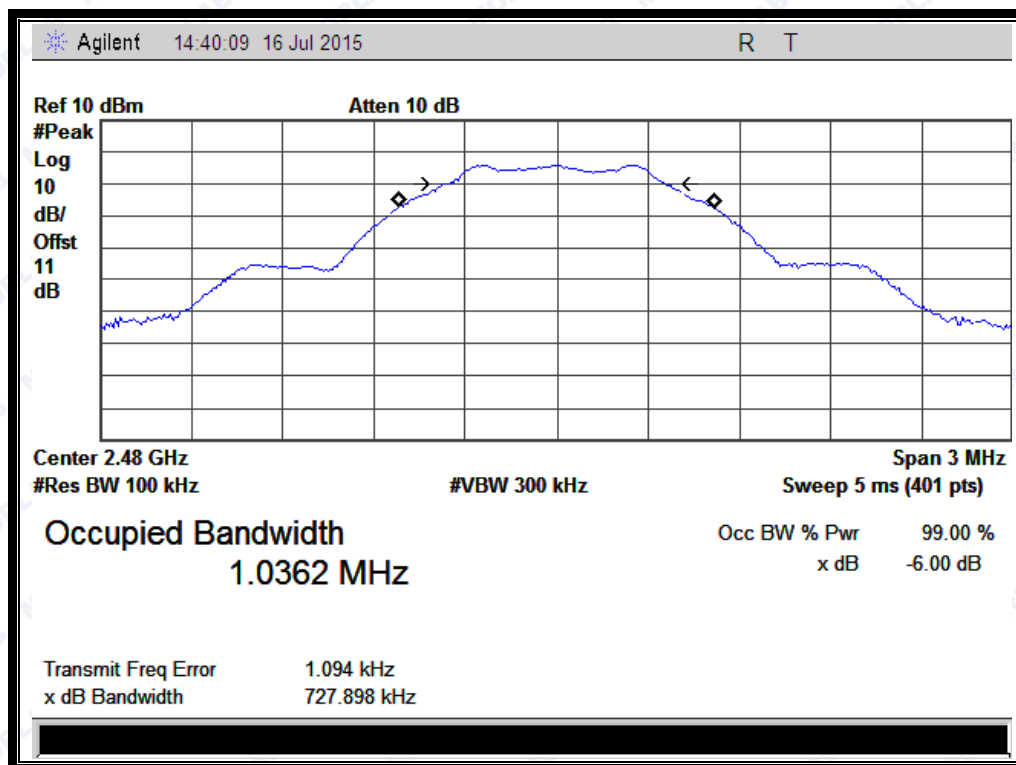

(Plot C: Channel 39: 2480MHz)

2.4 Conducted Spurious Emissions and Band Edge

2.4.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2 Test Description

A. Test Set:



The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A (1.4).

2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-51.75	Plot A.1	-4.878	-24.878	PASS
19	2440	-51.69	Plot B.1	-5.239	-25.239	PASS
39	2480	-51.08	Plot C.1	-4.195	-24.195	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.



REPORT No.: SZ15080041W03

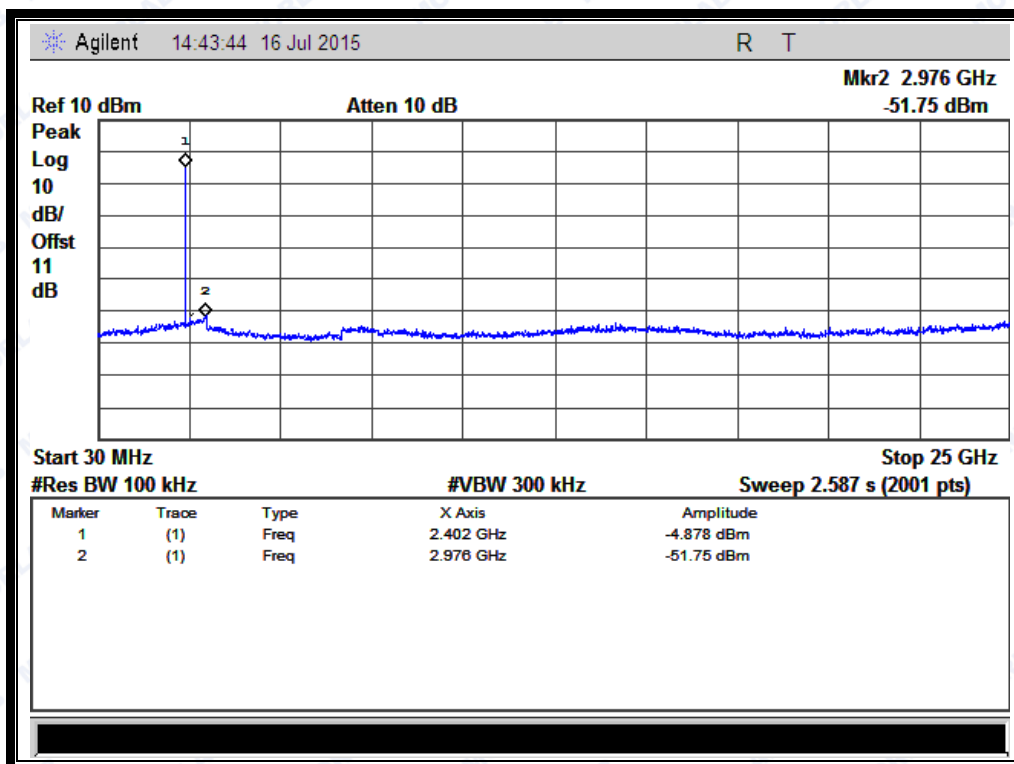


(Plot A.1: Channel = 0, 30MHz to 25GHz)

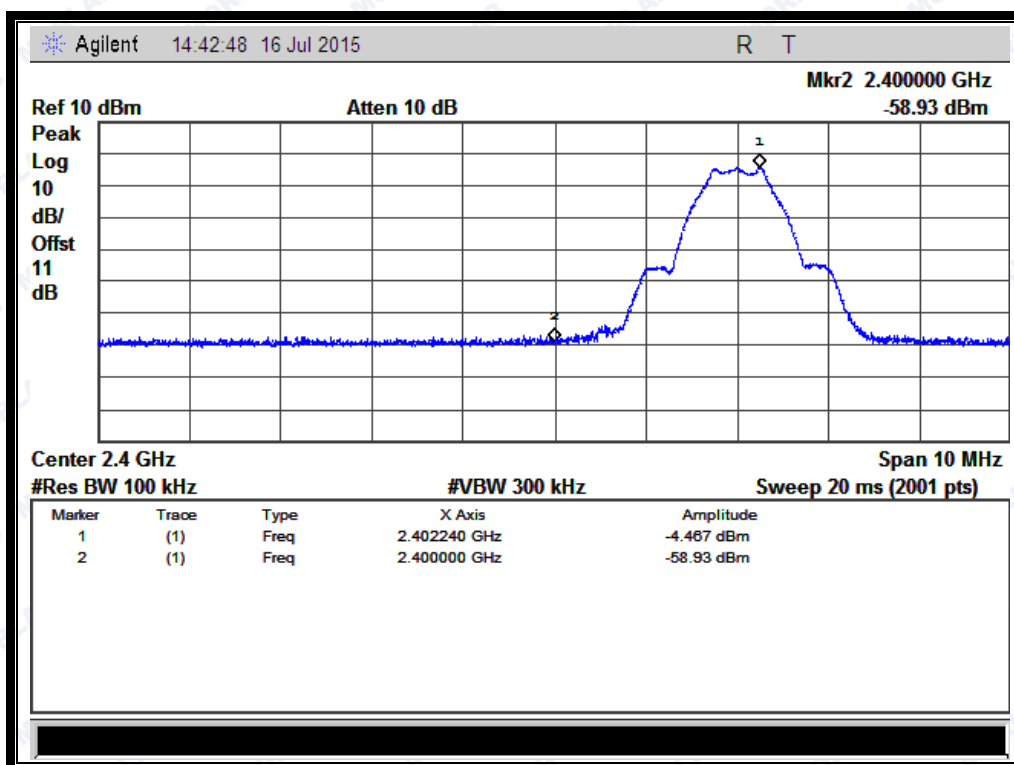


(Band Edge@ Channel = 0)



REPORT No.: SZ15080041W03

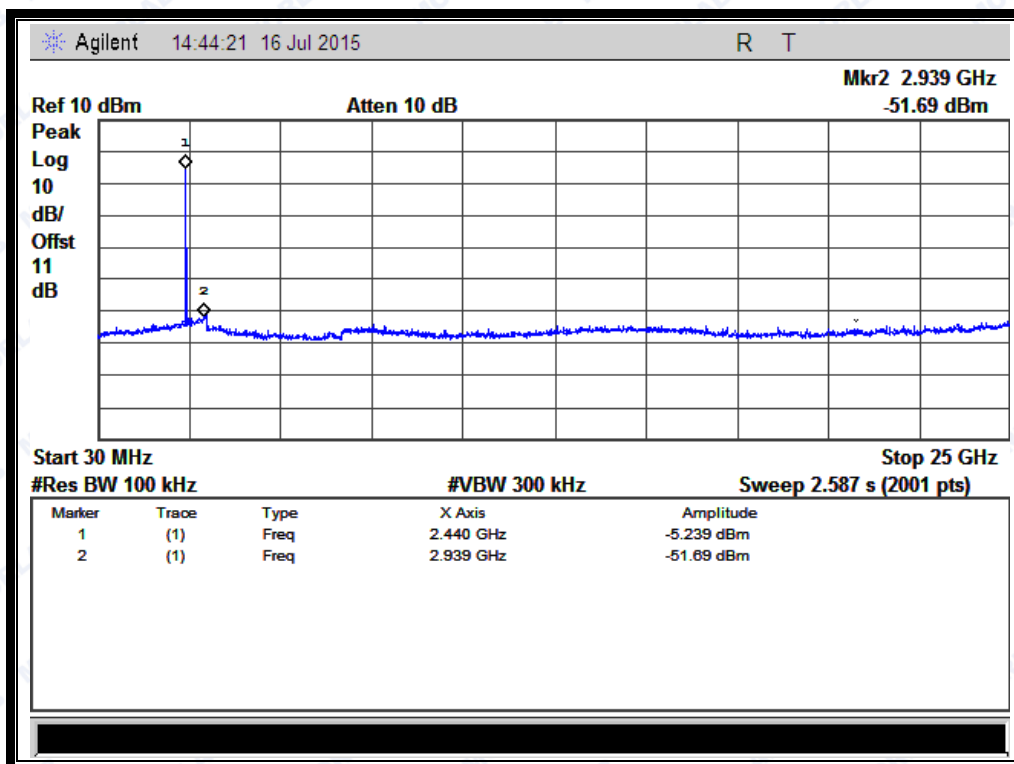


(Plot B.1: Channel = 19, 30MHz to 25GHz)

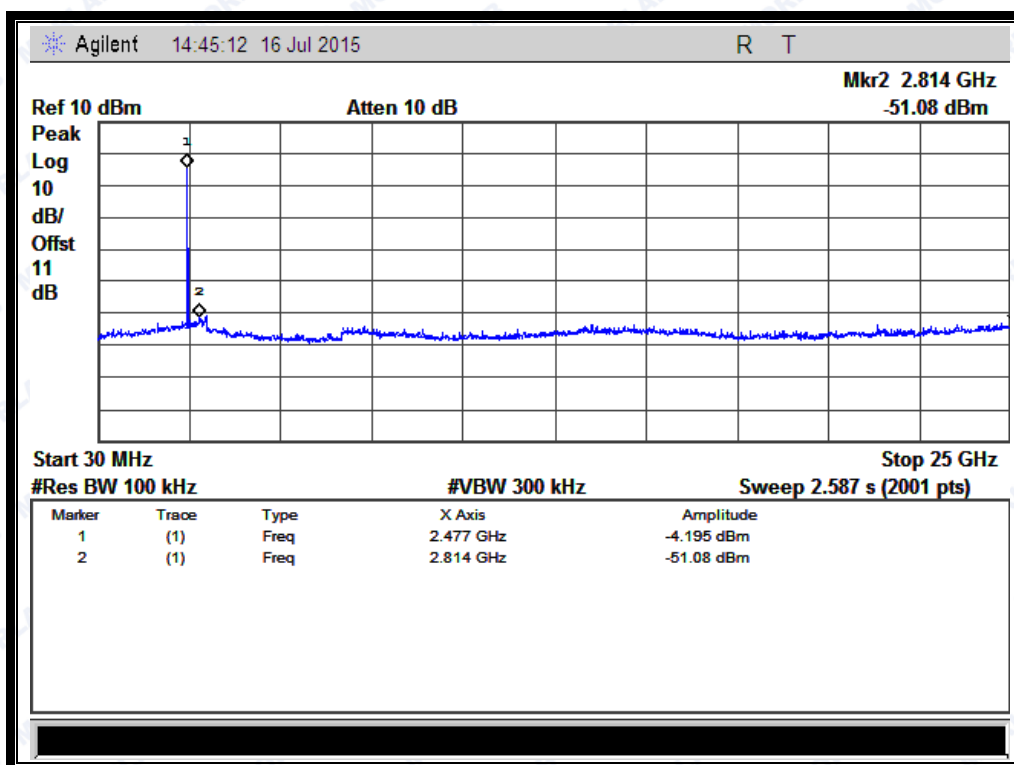

(Plot C.1: Channel = 39, 30MHz to 25GHz)



REPORT No.: SZ15080041W03

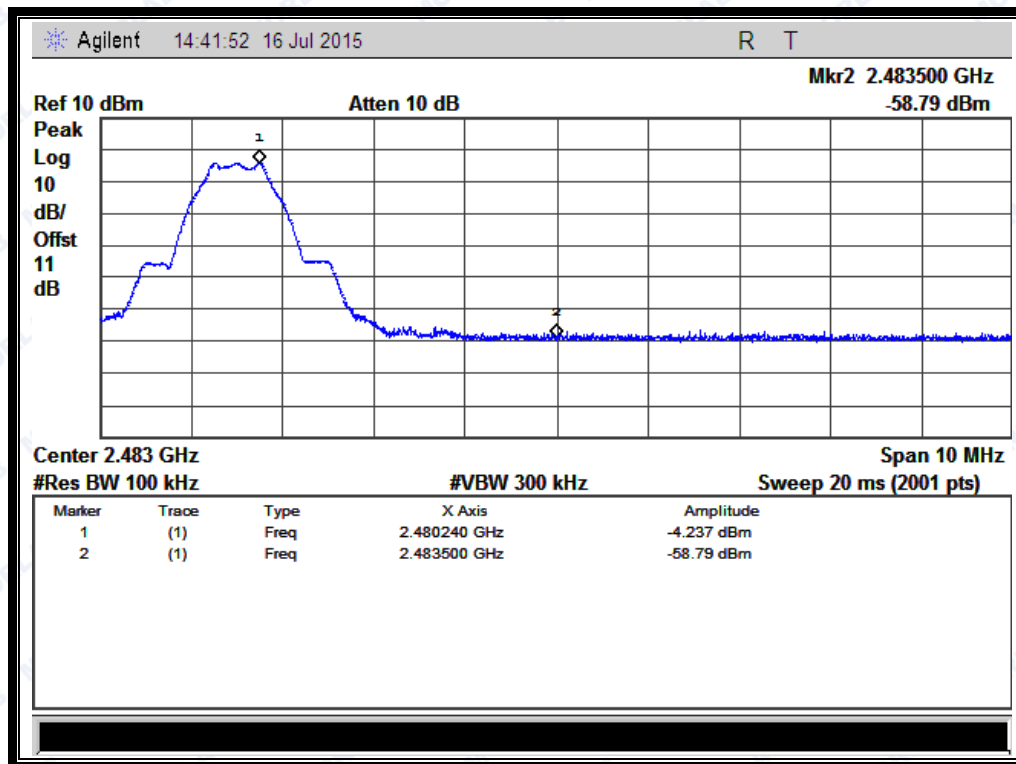

(Band Edge@ Channel = 39)


2.5 Power spectral density (PSD)

2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2 Test Description

A. Test Set:

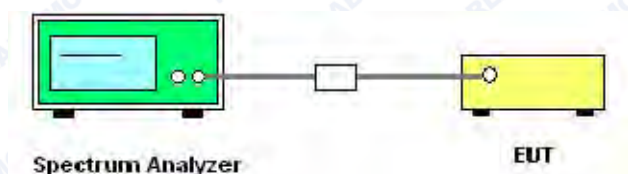

The EUT which is powered by the battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please reference ANNEX A (1.4).

2.5.3 Test Result

The lowest, middle and highest channels are tested.


A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
0	2402	-18.36	Plot A	8	PASS
19	2440	-17.99	Plot B	8	PASS
39	2480	-18.16	Plot C	8	PASS
Measurement uncertainty: ± 1.3 dB					


B. Test Plots:



REPORT No.: SZ15080041W03

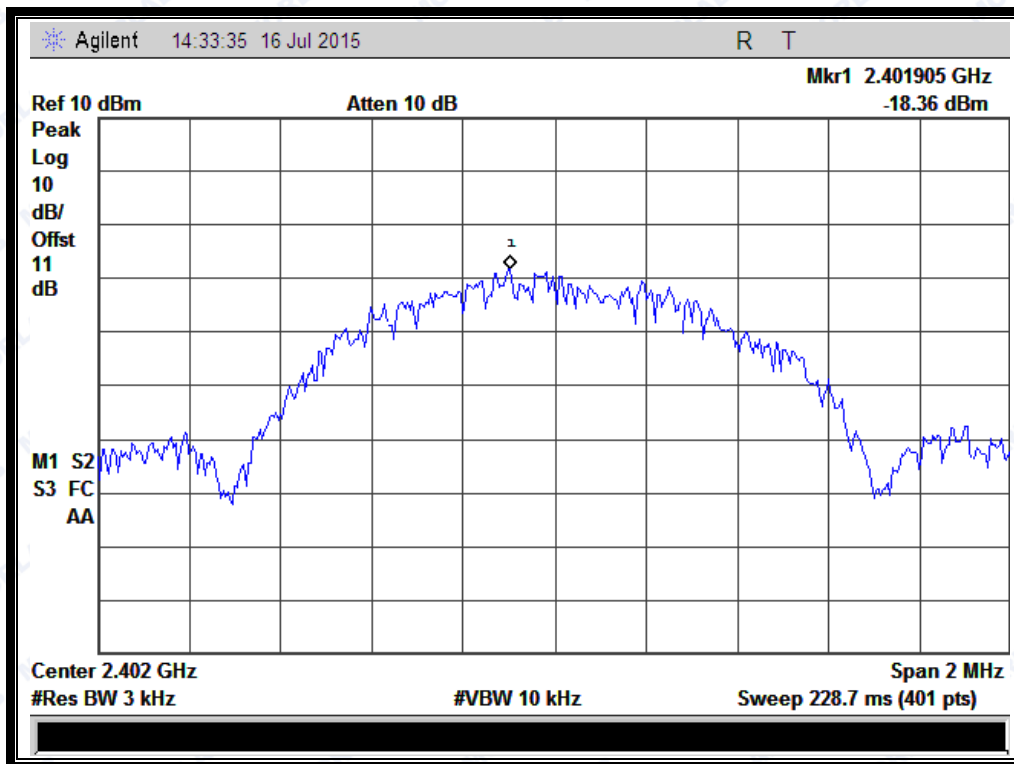


(Plot A: Channel = 0)

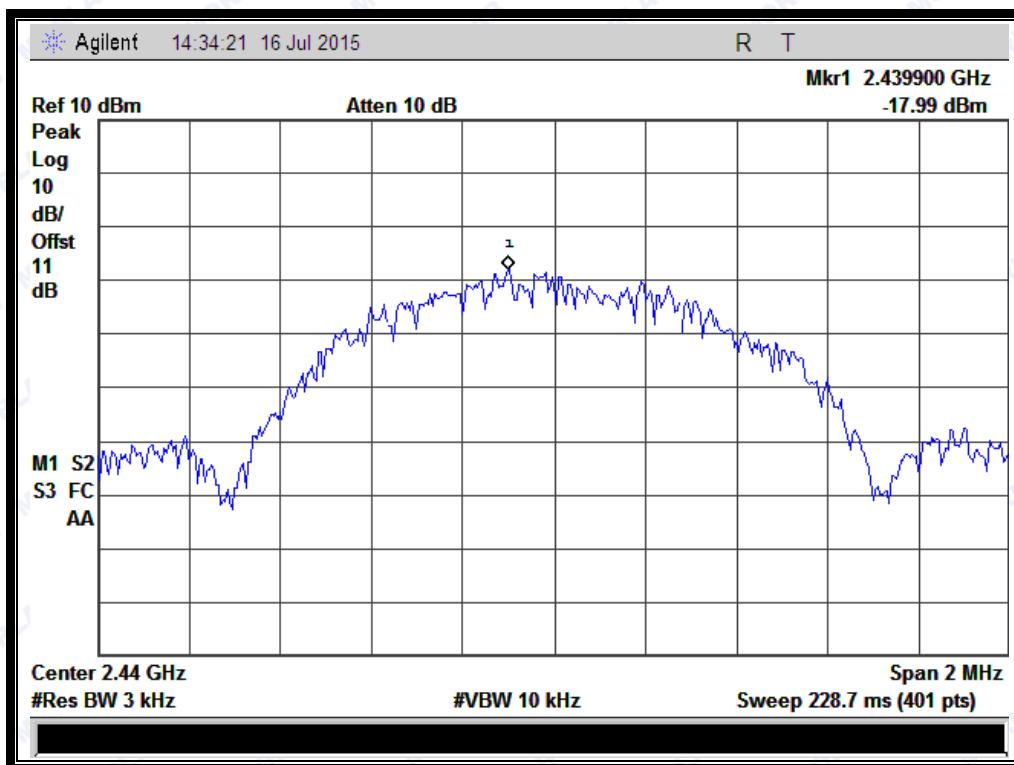

(Plot B: Channel = 19)



REPORT No.: SZ15080041W03

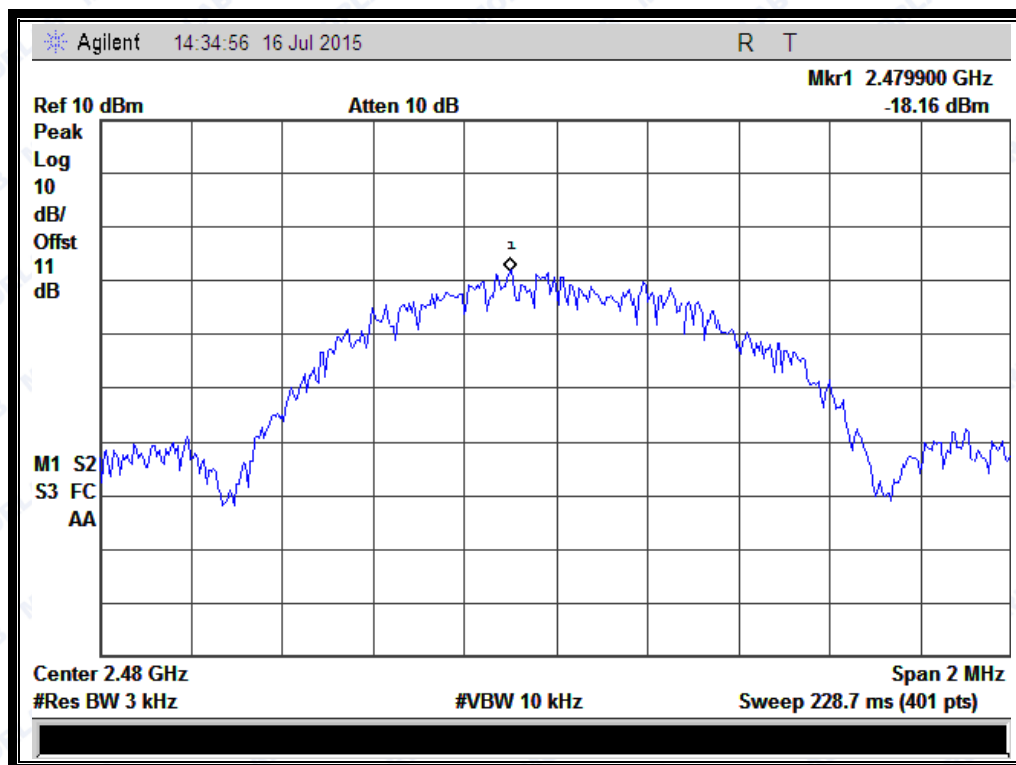

(Plot C: Channel = 39)


2.6 Restricted Frequency Bands

2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2 Test Description

A. Test Setup

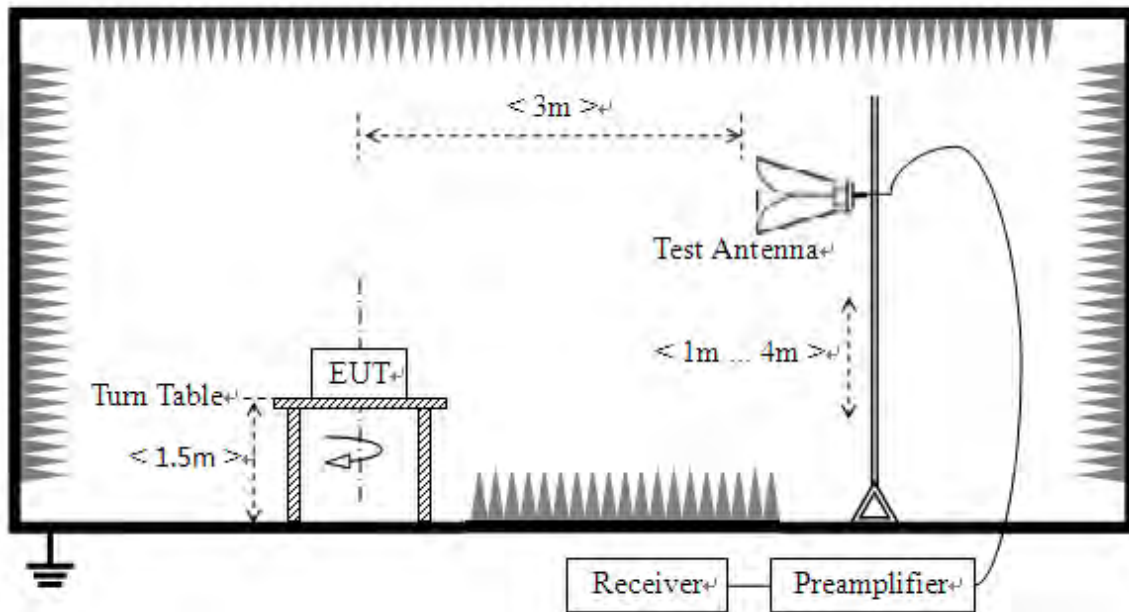

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Please reference ANNEX A(1.4).



2.6.3 Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2386.58	PK	45.41	-33.63	32.56	44.34	74	Pass
0	2362.14	AV	32.87	-33.63	32.56	31.80	54	Pass
39	2487.68	PK	48.99	-33.18	32.5	48.31	74	Pass
39	2493.40	AV	32.91	-33.18	32.5	32.23	54	Pass


B. Test Plots:



REPORT No.: SZ15080041W03

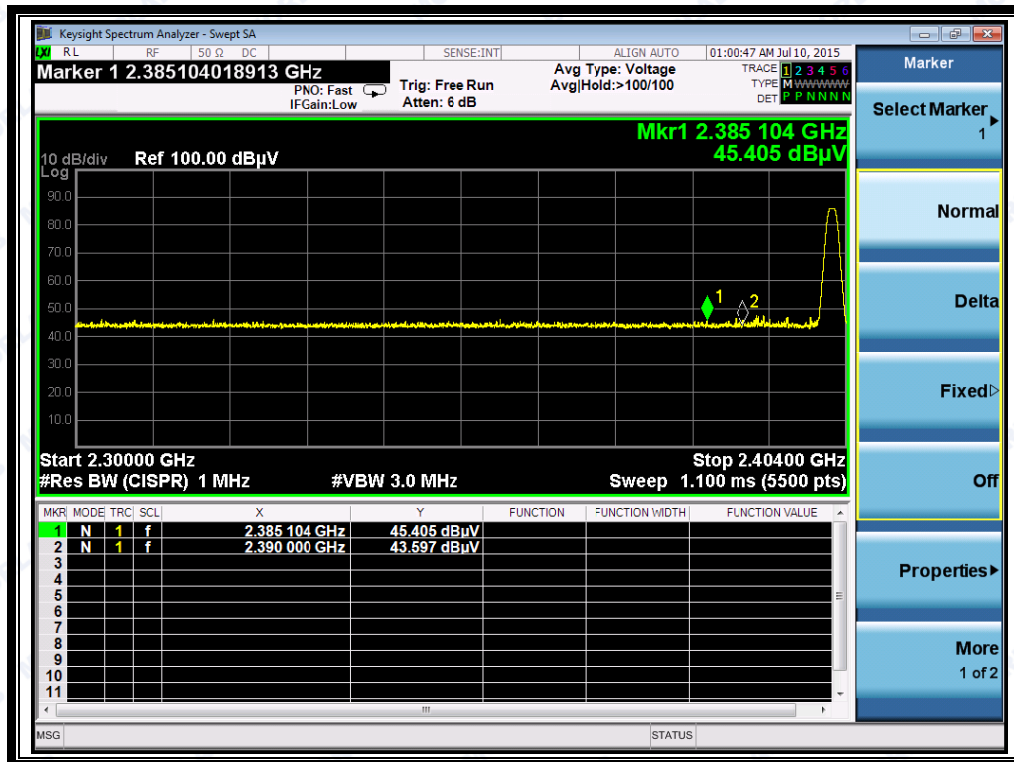


(Plot A1: Channel = 0 PEAK)

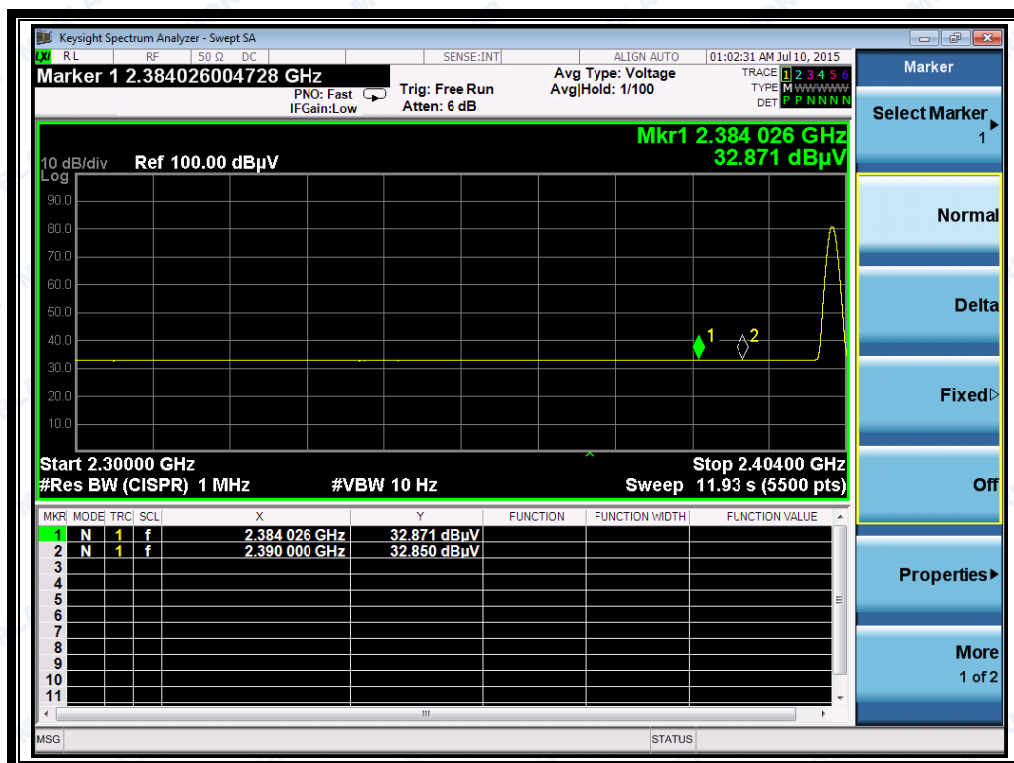


(Plot A2: Channel = 0 AVG)



REPORT No.: SZ15080041W03

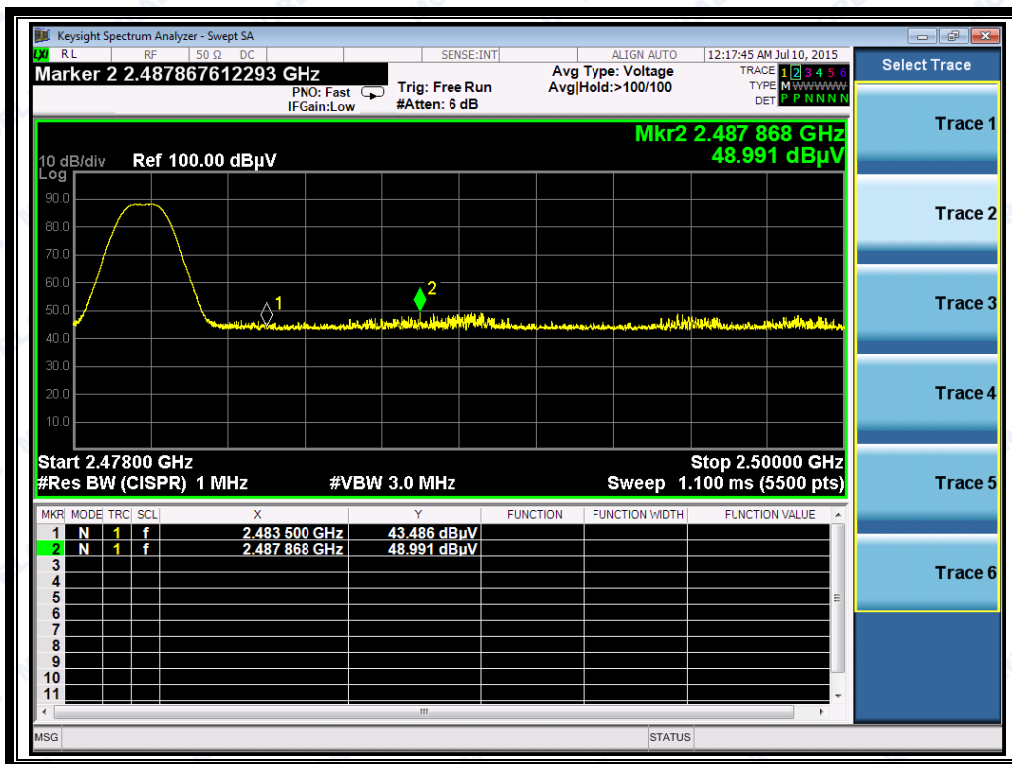

(Plot B1: Channel = 39 PEAK)

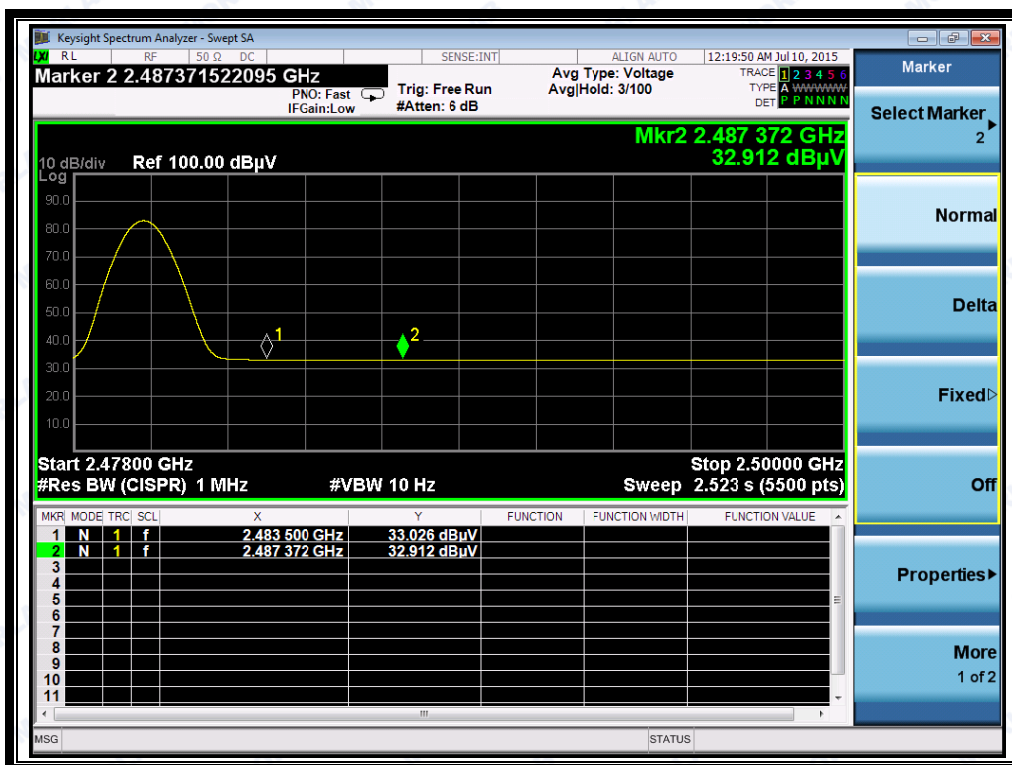

(Plot B2: Channel = 39 AVG)

2.7 Conducted Emission

2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5 - 30		60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2 Test Description

A. Test Setup:

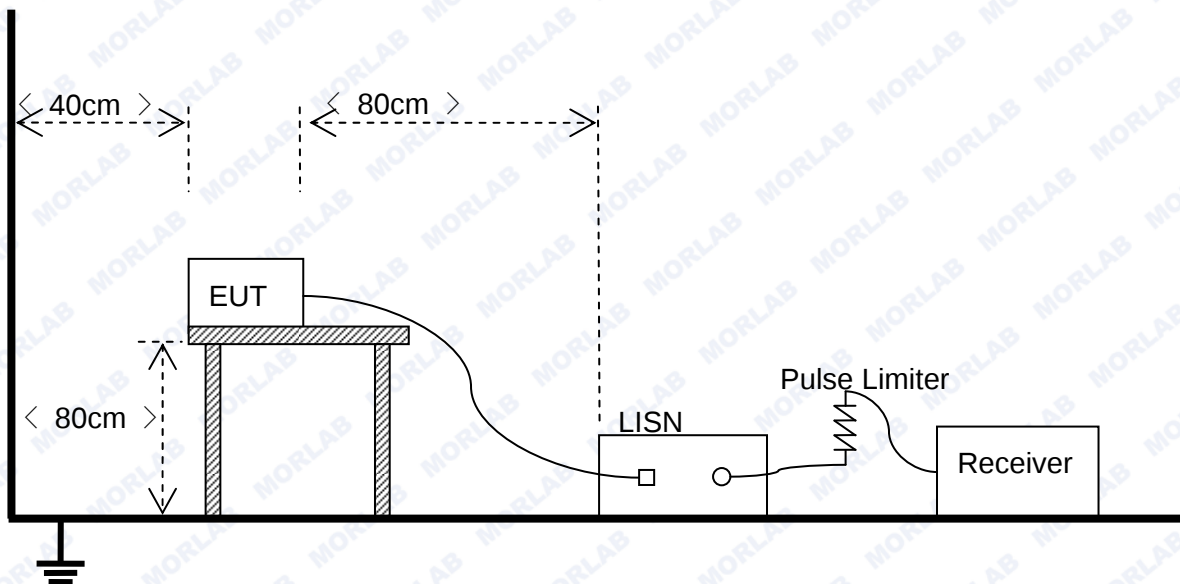

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

**B. Equipments List:**


Please reference ANNEX A(1.4).

2.7.3 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:


The EUT configuration of the emission tests is EUT + Link.

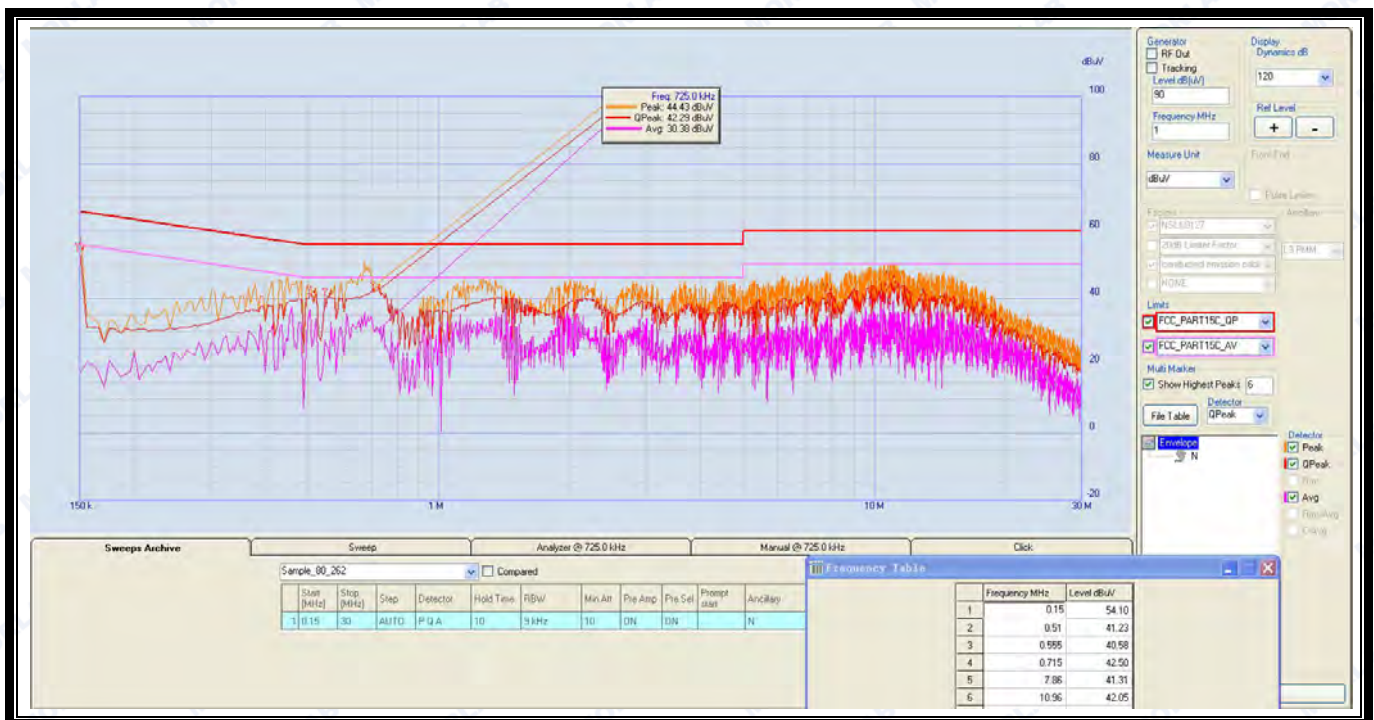B. Test Plots:


(Plot A: L Phase) AC adapter 1 made by AOHA1



REPORT No.: SZ15080041W03

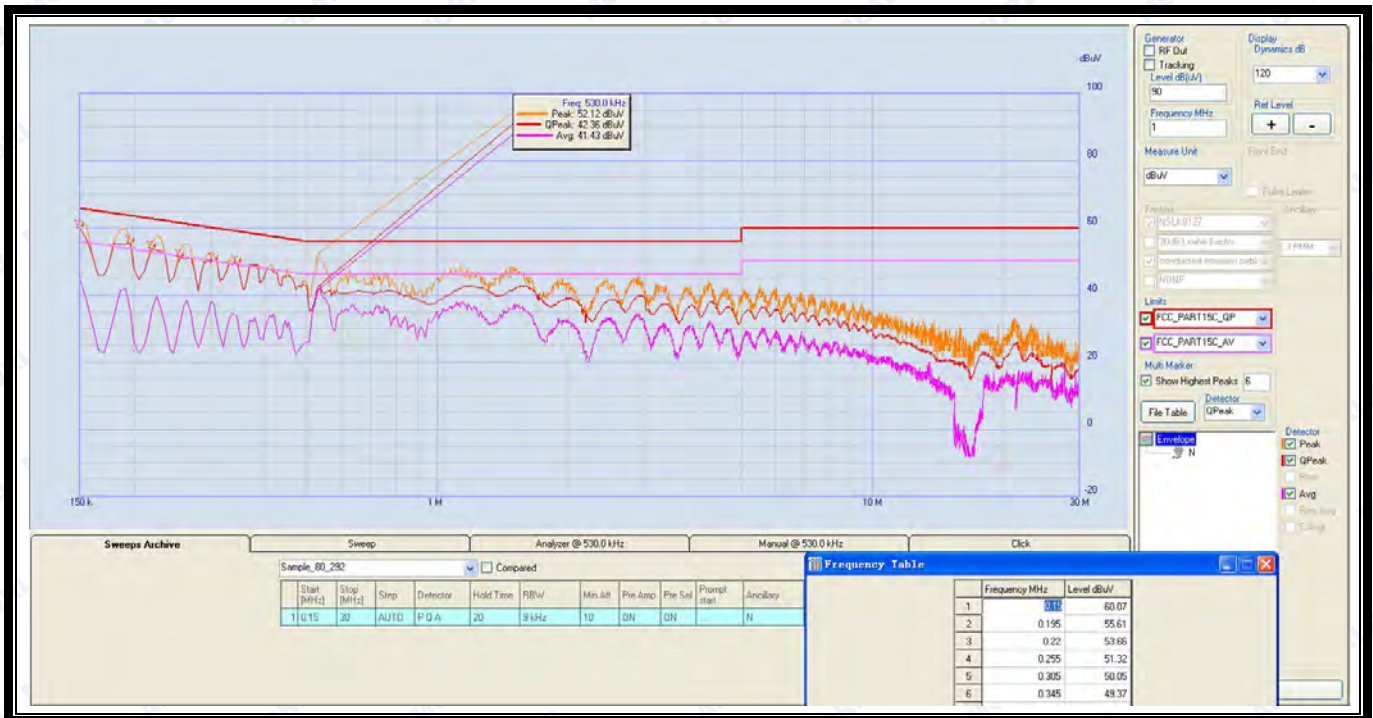


(Plot B: L Phase) AC adapter 2 made by BYD

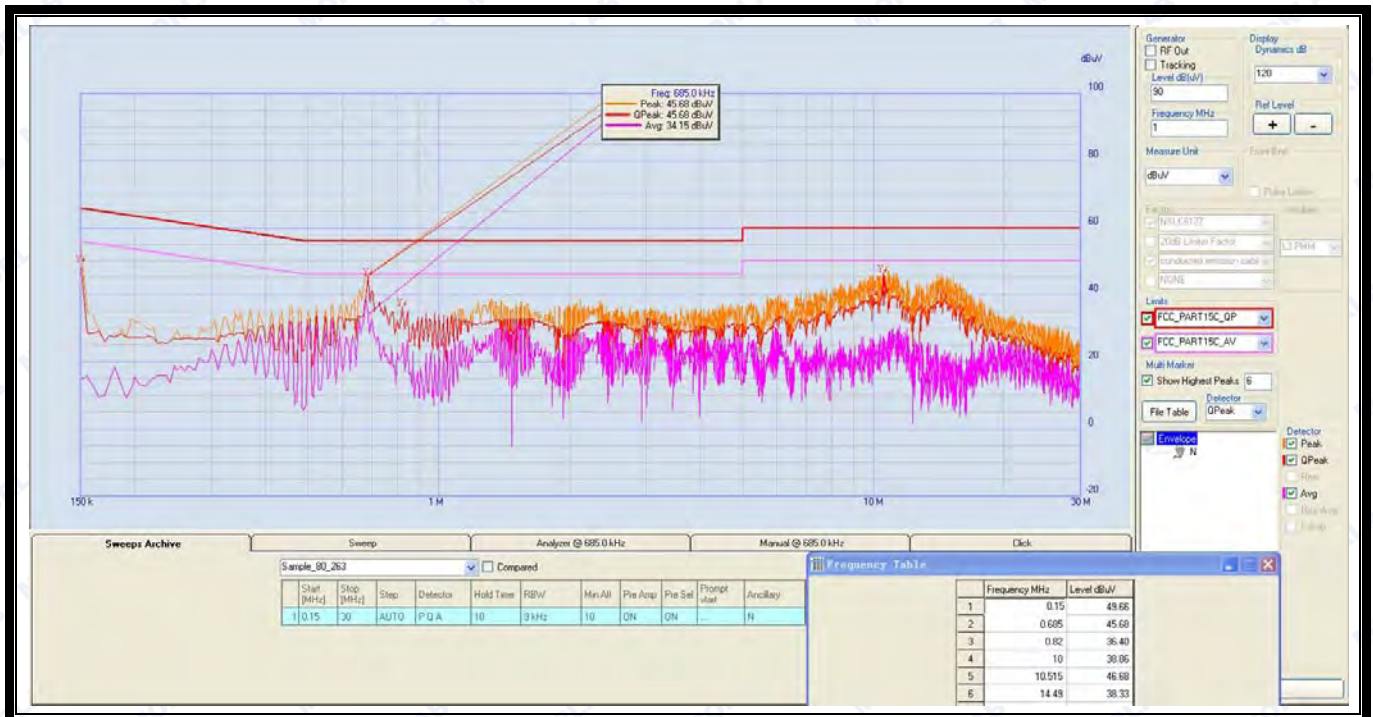

(Plot C: N Phase) AC adapter 1 made by AOHA



REPORT No.: SZ15080041W03

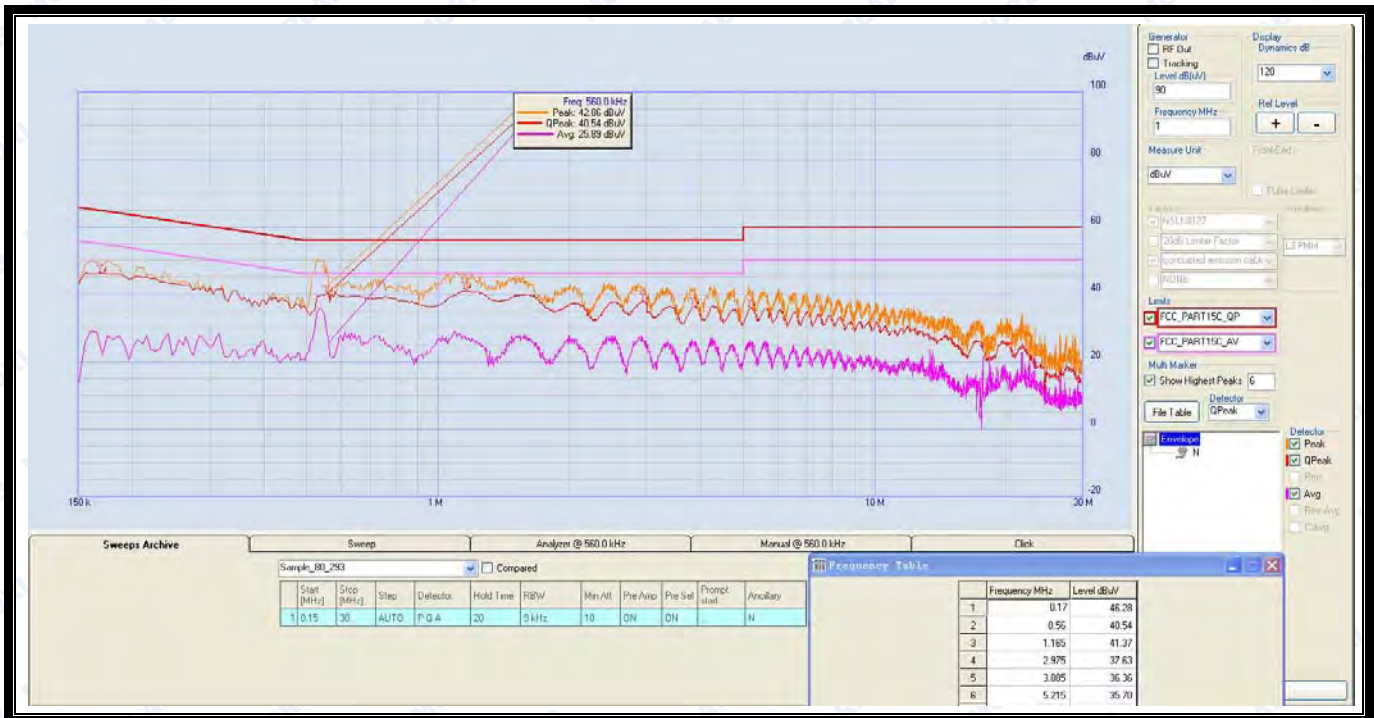

(Plot D: N Phase) AC adapter 2 made by BYD



2.8 Radiated Emission

2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

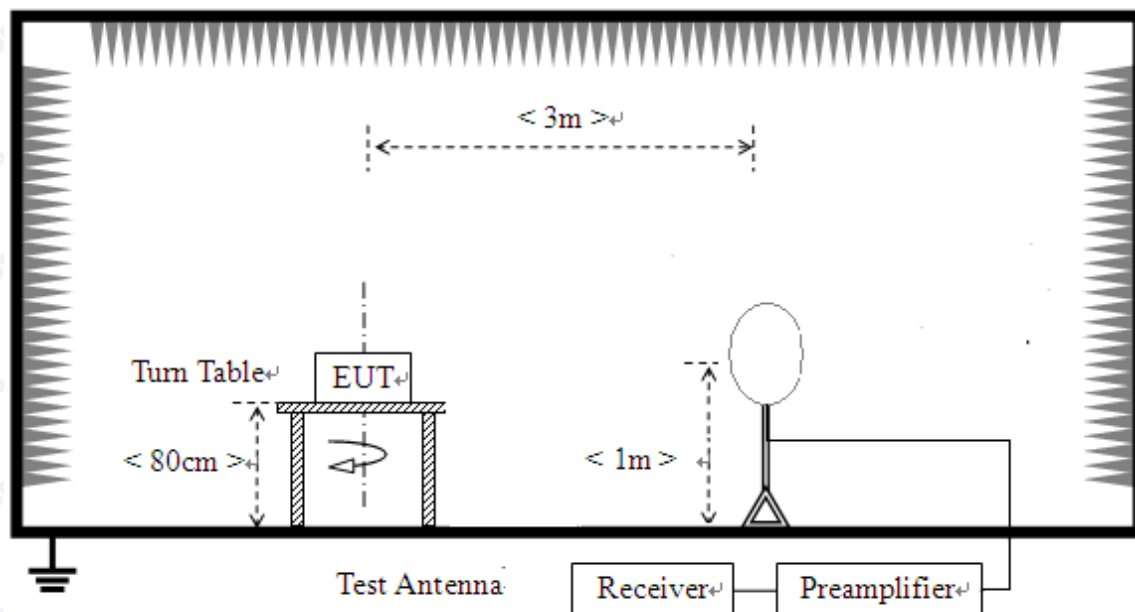

- 2) For radiated emissions from 30MHz to 1GHz

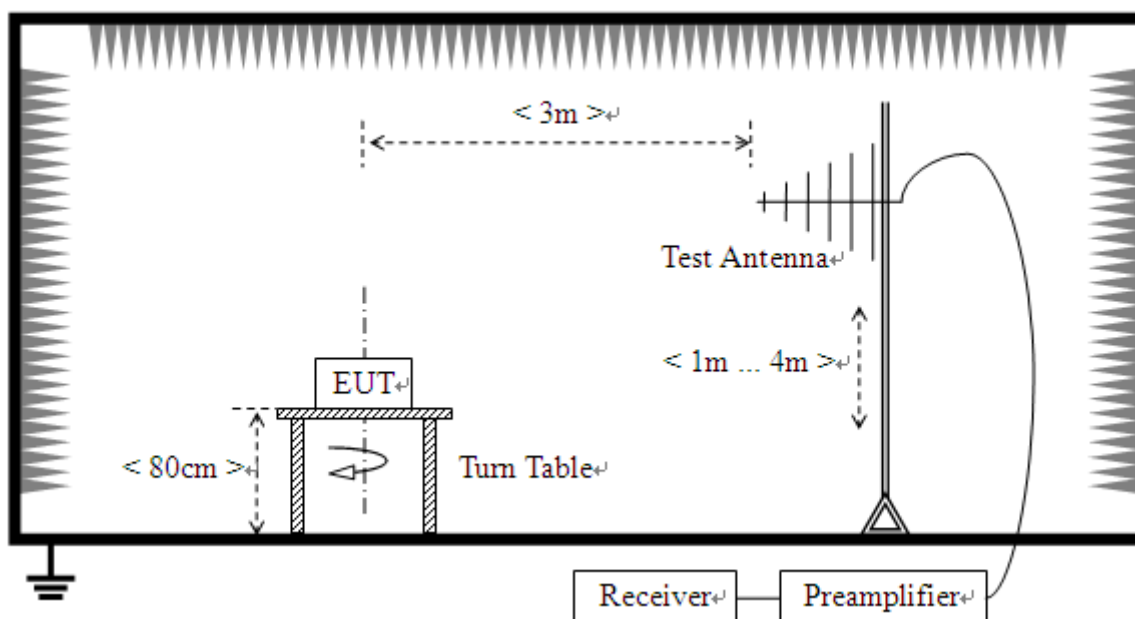

3) For radiated emissions above 1GHz

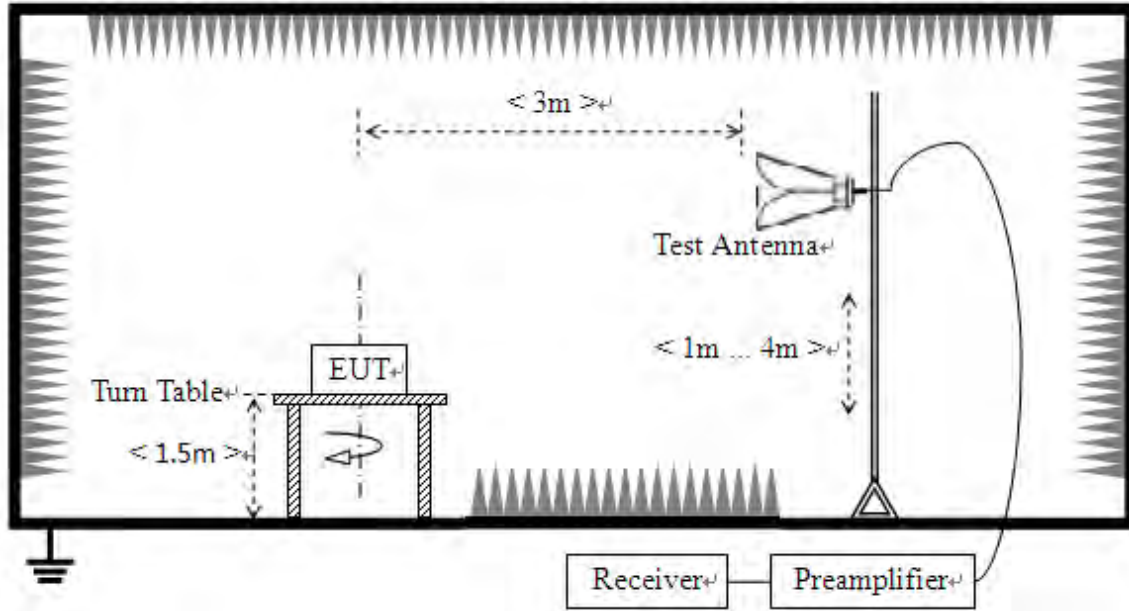

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.4).



2.8.3 Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

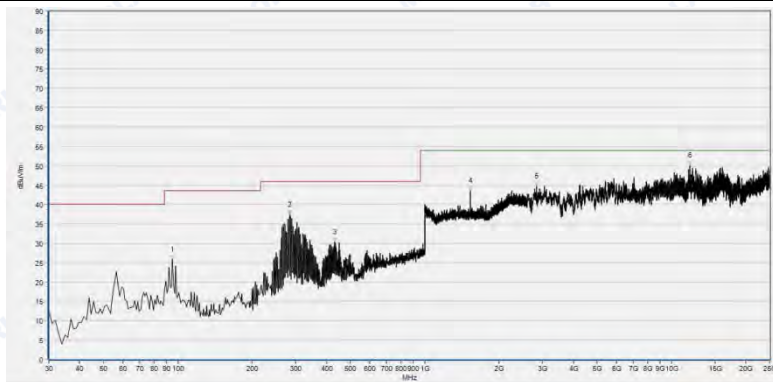**2.8.3.1 Test with AC adapter 1 made by AOHA1****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
94.990	25.73	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
283.170	37.31	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
431.580	30.29	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
1532.053	43.51	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
2832.188	44.80	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
11854.919	50.14	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
53.280	34.58	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
92.080	30.69	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
327.790	31.57	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2257.463	43.73	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
6974.905	46.70	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12156.356	49.87	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080041W03

Plot for Channel = 19



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
90.140	20.28	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
221.090	30.23	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
332.640	38.39	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2921.804	46.09	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
5671.395	48.70	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
12282.633	50.40	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
54.250	30.52	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
87.230	28.06	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
284.140	31.78	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2954.392	44.51	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5732.497	46.81	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
18836.843	50.05	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080041W03

Plot for Channel = 39



Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
84.320	28.27	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
215.270	28.28	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
332.640	35.86	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2247.859	44.10	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5699.909	47.17	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
10958.756	48.87	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
54.250	29.21	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
87.230	30.84	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
166.770	23.15	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2343.898	43.52	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4543.044	46.25	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12144.135	50.06	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



2.8.3.2 Test with AC adapter 2 made by BYD


B. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0



Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
189.080	28.34	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
420.910	25.68	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
3369.885	44.96	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
5691.762	47.08	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
9948.536	47.86	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
15761.375	48.92	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

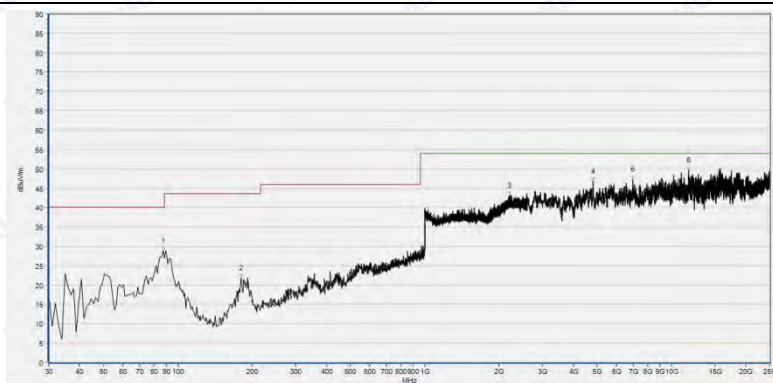

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
87.230	28.77	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
180.350	21.71	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2200.480	43.03	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4807.820	46.70	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
6978.978	47.32	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
11716.421	49.68	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 19



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
184.230	26.01	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
526.640	25.49	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2428.411	44.33	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
5724.350	46.86	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
8905.728	48.28	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
15594.363	49.56	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
89.170	32.22	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
346.220	26.09	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2295.238	43.56	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5687.689	47.15	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
10384.397	48.38	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
18849.063	49.80	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ15080041W03

Plot for Channel = 39



Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
183.260	26.25	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
334.580	28.67	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2767.012	44.90	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
4722.277	46.17	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
9060.520	48.08	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15614.730	50.23	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
87.230	28.20	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
337.490	23.68	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2260.664	43.25	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5671.395	47.38	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
8469.867	48.43	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15024.077	49.95	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



2.9 RF exposure evaluation

2.9.1 Requirement

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of Commission's guideline.

2.9.2 Result

Please refer to SAR report.




REPORT No.: SZ15080041W03

ANNEX A PHOTOS OF EUT TEST SETUP

1. Conducted measurement Setup



2. Radiated Measurement Setup

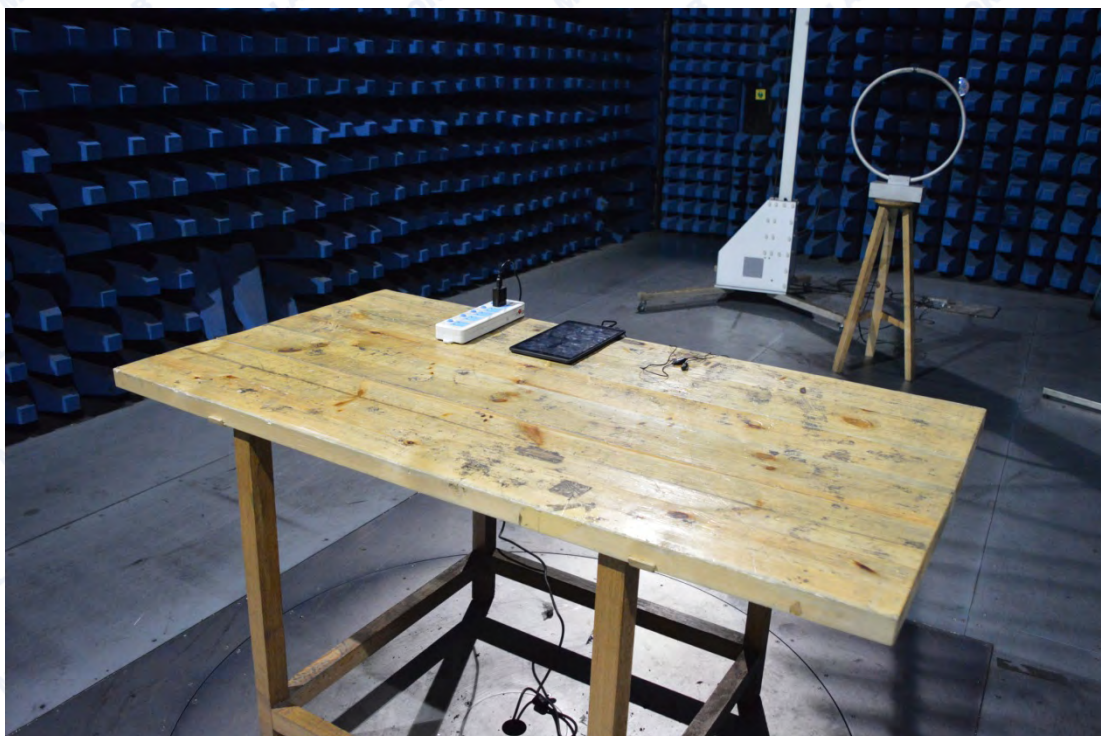




REPORT No.: SZ15080041W03





REPORT No.: SZ15080041W03

3. Conducted Emission Measurement Setup

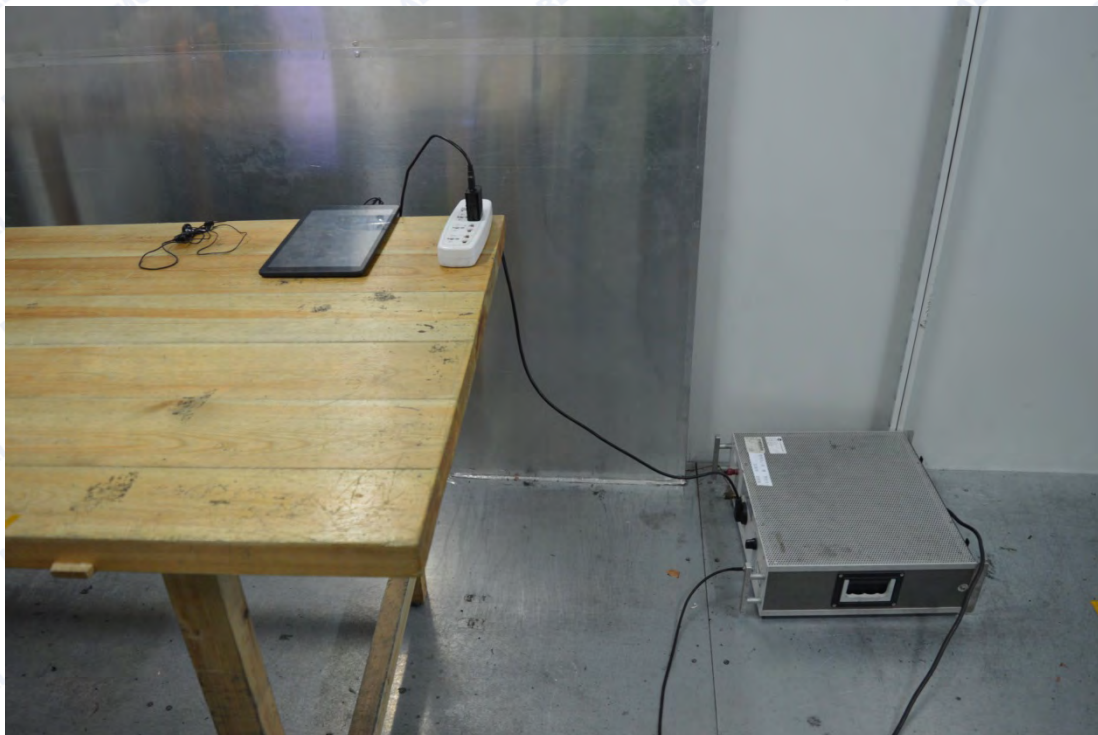



REPORT No.: SZ15080041W03

ANNEX B PHOTOS OF THE EUT

A. External Photos

1. EUT front view



2. EUT rear view



3. EUT left side view



4. EUT right side view



5. EUT top view



6. EUT bottom view





REPORT No.: SZ15080041W03

7. Accessories





REPORT No.: SZ15080041W03


B. Internal Photos

1. EUT uncover view






REPORT No.: SZ15080041W03

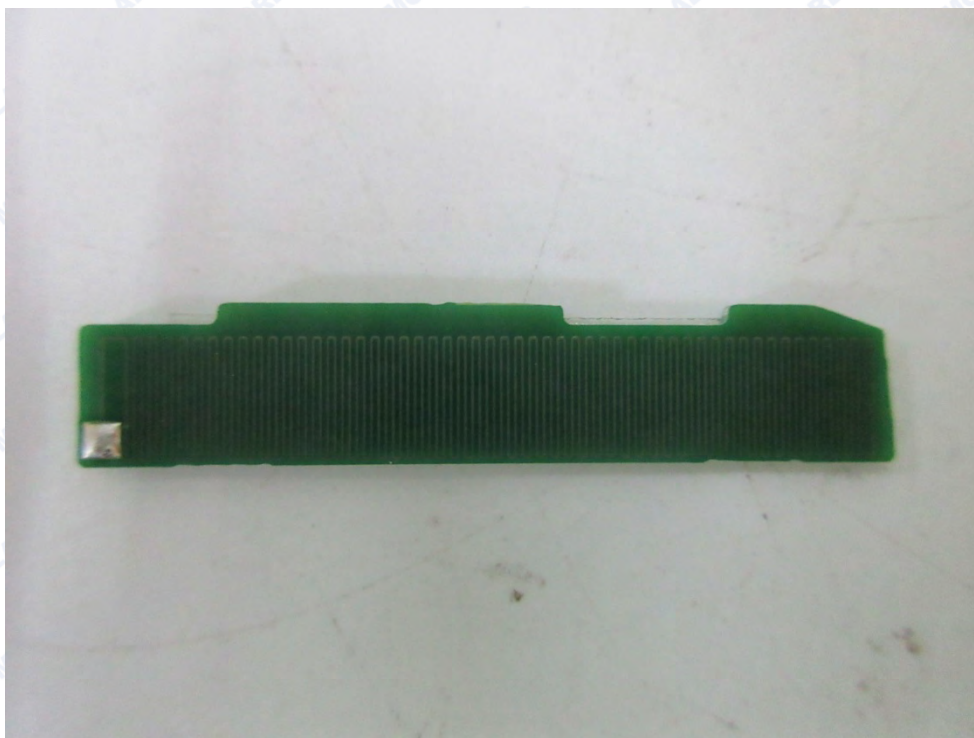


2. Mainboard front view

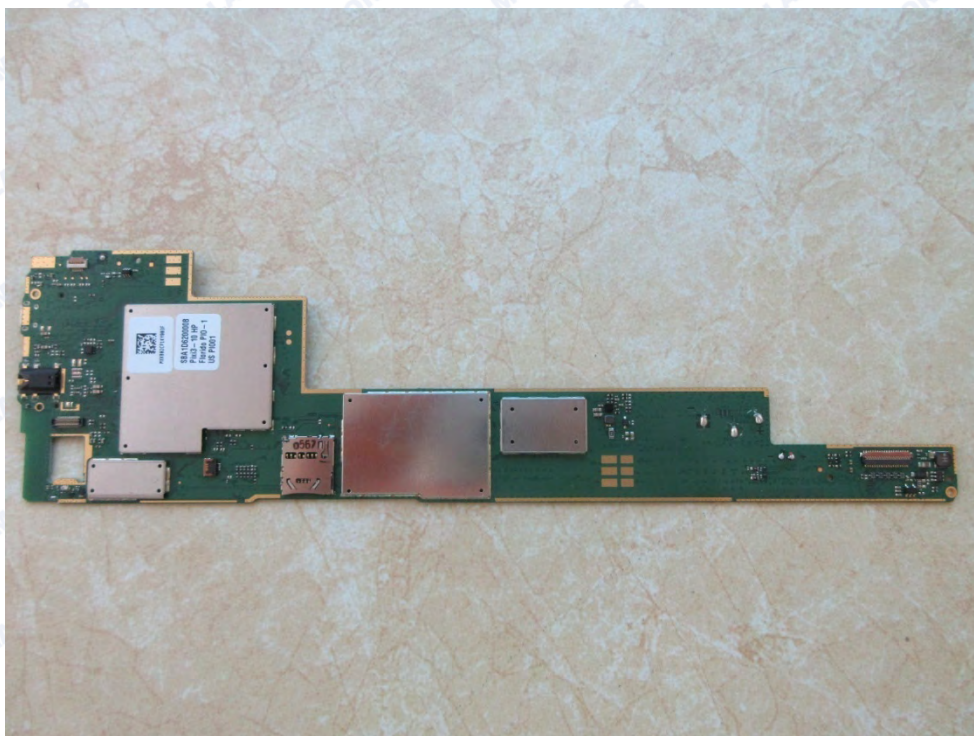




REPORT No.: SZ15080041W03

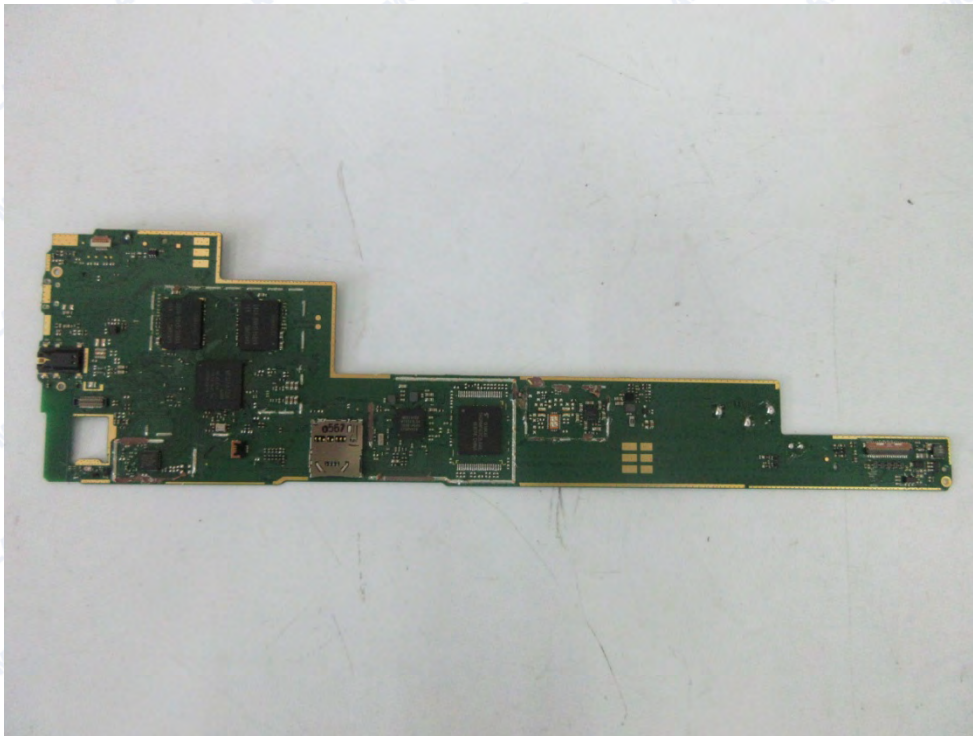


3. Mainboard rear view

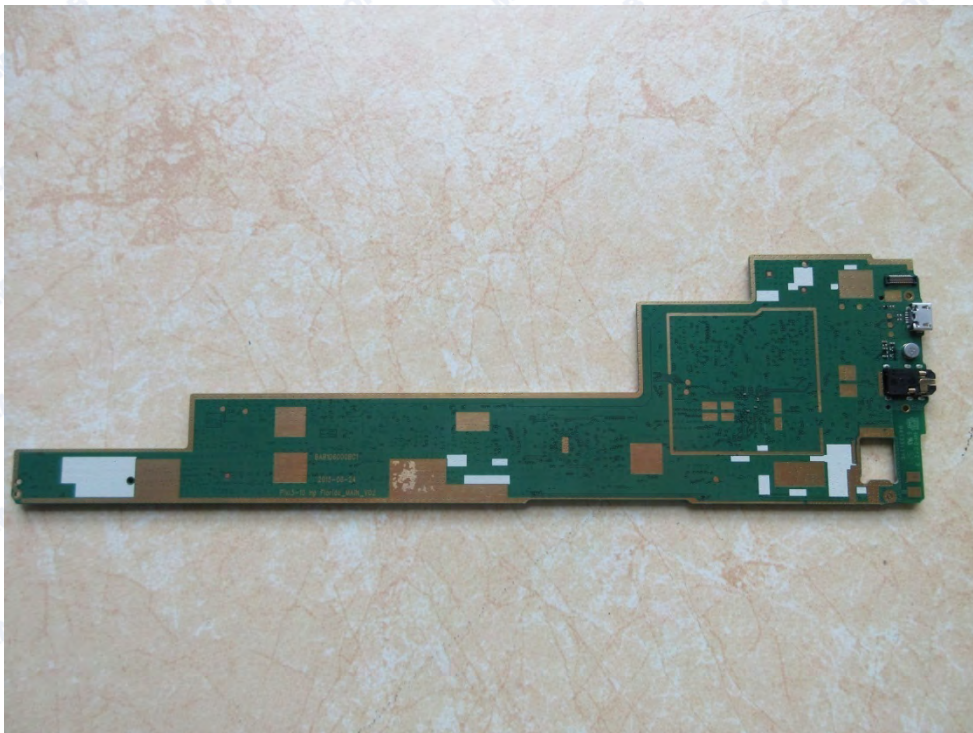




REPORT No.: SZ15080041W03

4. CPU chip view

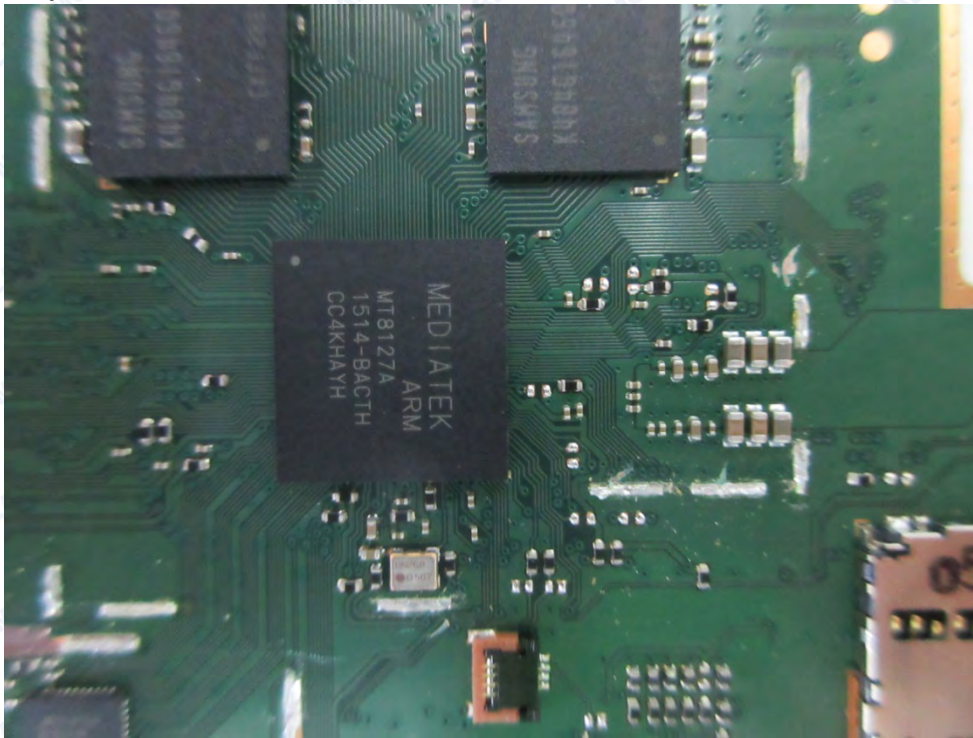


5. BT/WIFI chip view

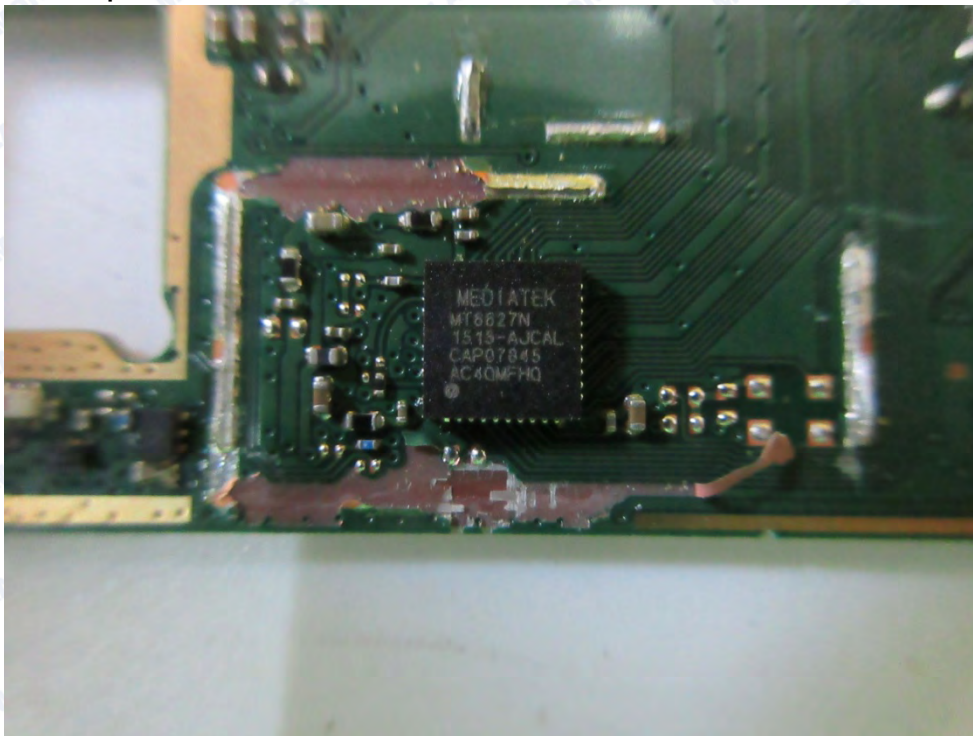



REPORT No.: SZ15080041W03

6. BT/WIFI antenna view

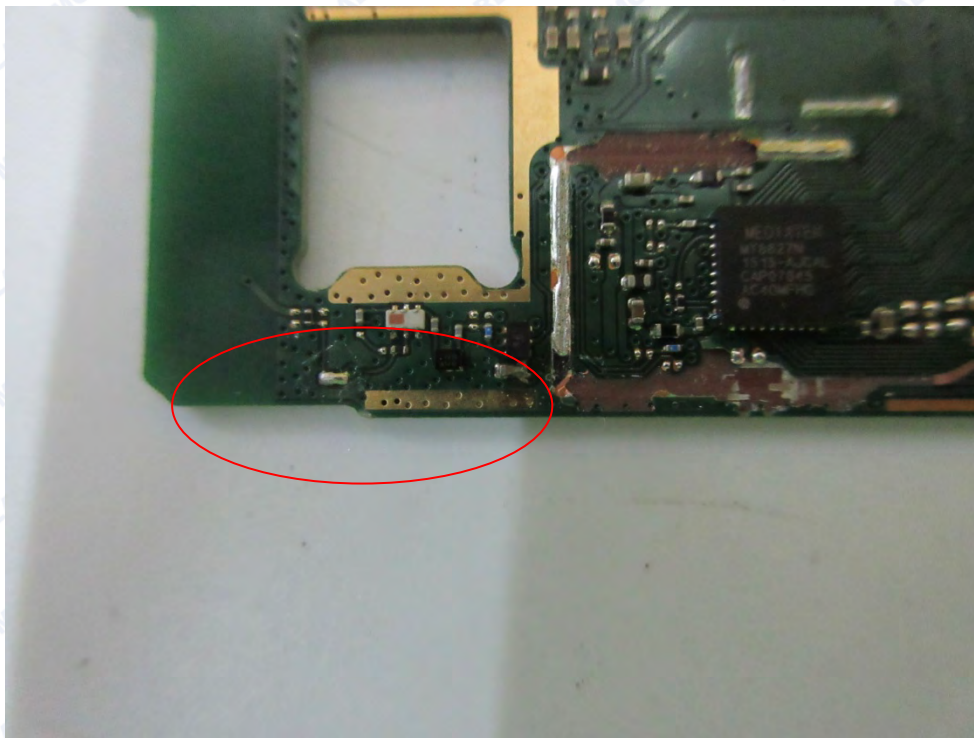



ANNEX C GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2013, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.



REPORT No.: SZ15080041W03

1.4 Test Equipments Utilized

1.4.1 Conducted Test Equipments

Conducted Test Equipment

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2015.02.26	2016.02.25
2	Power Splitter	NW521	1506A	Weinschel	2015.02.26	2016.02.25
3	Attenuator 1	(n.a.)	10dB	Resnet	2015.02.26	2016.02.25
4	Attenuator 2	(n.a.)	3dB	Resnet	2015.02.26	2016.02.25
5	USB Wideband Power Sensor	MY52280010	U2021XA	Agilent	2015.02.26	2016.02.25
6	EXA Signal Analyzer	MY51440152	N9010A	Agilent	2015.02.26	2016.02.25
7	RF cable	CB01	RF01	Morlab	N/A	N/A
8	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
9	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.4.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2015.02.26	2016.02.25
2	LISN	812744	NSLK 8127	Schwarzbeck	2015.02.26	2016.02.25
3	Service Supplier	100448	CMU200	R&S	2015.02.26	2016.02.25
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2015.02.26	2016.02.25
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A



REPORT No.: SZ15080041W03

1.4.3 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	Receiver	US44210471	E7405A	Agilent	2015.02.26	2016.02.25
2	Test Antenna - Bi-Log	9163-274	9m*6m*6m	Albatross	2015.02.26	2016.02.25
3	Test Antenna - Horn	9120D-963	VULB 9163	Schwarzbeck	2015.02.26	2016.02.25
4	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2015.02.26	2016.02.25
5	Test Antenna - Loop	1519-022	HL050S7	R&S	2015.02.26	2016.02.25
6	Reject Filter	(n.a.)	BRM50702	Micro-Tronics	2015.02.26	2016.02.25
7	Coaxial cable (N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable (N male)	CB03	EMC03	Morlab	N/A	N/A

1.4.4 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2015.02.26	2016.02.25

1.4.5 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2015.02.26	2016.02.25

1.4.6 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Albatross	2015.02.26	2016.02.25

***** END OF REPORT *****