



# FCC RF Test Report

**APPLICANT** : TCL Communication Ltd.  
**EQUIPMENT** : GSM Quad Band / UMTS Mobile Phone  
**MODEL NAME** : 5022E  
**FCC ID** : 2ACCJB031  
**STANDARD** : FCC 47 CFR Part 2, 22(H), 24(E)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Sep. 24, 2015 and testing was completed on Nov. 09, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Andy Yeh / Manager

Approved by: Jones Tsai / Manager



***SPORTON INTERNATIONAL (SHENZHEN) INC.***  
***1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,***  
***Nanshan District, Shenzhen, Guangdong, P. R. China***



## TABLE OF CONTENTS

<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer .....	5
1.3 Product Feature of Equipment Under Test .....	5
1.4 Product Specification subjective to this standard.....	6
1.5 Specification of Accessory .....	6
1.6 Modification of EUT .....	7
1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....	7
1.8 Testing Location .....	7
1.9 Applicable Standards .....	8
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>9</b>
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System .....	10
2.3 Support Unit used in test configuration .....	11
2.4 Measurement Results Explanation Example .....	11
<b>3 CONDUCTED TEST RESULT.....</b>	<b>12</b>
3.1 Measuring Instruments.....	12
3.2 Test Setup .....	12
3.3 Test Result of Conducted Test.....	12
3.4 Conducted Output Power .....	13
3.5 Peak-to-Average Ratio .....	14
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	15
3.7 Conducted Band Edge .....	16
3.8 Conducted Spurious Emission .....	17
3.9 Frequency Stability.....	18
<b>4 RADIATED TEST ITEMS .....</b>	<b>19</b>
4.1 Measuring Instruments.....	19
4.2 Test Setup .....	19
4.3 Test Result of Radiated Test.....	19
4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement .....	20
4.5 Field Strength of Spurious Radiation Measurement .....	22
<b>5 LIST OF MEASURING EQUIPMENT .....</b>	<b>23</b>
<b>6 UNCERTAINTY OF EVALUATION .....</b>	<b>24</b>

### APPENDIX A. TEST RESULTS OF CONDUCTED TEST

### APPENDIX B. TEST RESULTS OF RADIATED TEST

### APPENDIX C. TEST SETUP PHOTOGRAPHS

### APPENDIX D. PRODUCT EQUALITY DECLARATION



## REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
	§2.1055 §24.235		Within Authorized Band		
4.4	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
4.5	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 22.50 dB at 7520.000 MHz



## 1 General Description

### 1.1 Applicant

**TCL Communication Ltd.**

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China

### 1.2 Manufacturer

**TCL Communication Ltd.**

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China

### 1.3 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	GSM Quad Band / UMTS Mobile Phone
<b>Model Name</b>	5022E
<b>FCC ID</b>	2ACCJB031
<b>EUT supports Radios application</b>	GSM/GPRS/EGPRS(Downlink Only)/WCDMA/HSPA/HSPA+(16QAM uplink is not supported)/WLAN 2.4GHz 802.11b/g/n HT20/Bluetooth v2.1 + EDR/Bluetooth v4.0 LE
<b>IMEI Code</b>	Radiation: 014463000000160/014463000000178 Conducted:014462000002028/014462000002036 ERP&EIRP: N/A
<b>HW Version</b>	PIO
<b>SW Version</b>	V1.0
<b>EUT Stage</b>	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx Frequency</b>	<b>GSM/GPRS:</b> 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz <b>WCDMA:</b> Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz
<b>Rx Frequency</b>	<b>GSM/GPRS:</b> 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz <b>WCDMA:</b> Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz
<b>Maximum Output Power to Antenna</b>	<b>GSM/GPRS:</b> 850: 32.92 dBm 1900: 29.93 dBm <b>WCDMA:</b> Band V: 23.36 dBm Band II: 22.27 dBm
<b>Antenna Type</b>	PIFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK(Downlink Only) WCDMA : QPSK (Uplink) HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM(16QAM uplink is not supported)

## 1.5 Specification of Accessory

Specification of Accessory				
<b>AC Adapter</b>	<b>Brand Name</b>	TENPAO	<b>Model Name</b>	UC11US
	<b>Power Rating</b>	I/P: 100-240Vac, 200mA, O/P: 5Vdc, 1000mA		
	<b>P/N</b>	CBA0057AG0C2		
<b>Battery</b>	<b>Brand Name</b>	BYD	<b>Model Name</b>	TLi020F1
	<b>Power Rating</b>	3.8V, 2000mAh		
	<b>P/N</b>	CAB2000010C1		
<b>USB Cable</b>	<b>Brand Name</b>	JUWEI	<b>Model Name</b>	CDA3122002C1
	<b>Signal Line Type</b>	1.0meter,shielded cable, without ferrite core		
<b>Earphone</b>	<b>Brand Name</b>	JUWEI	<b>Model Name</b>	CCB3160A11C1
	<b>Signal Line Type</b>	1.2meter,non-shielded cable, without ferrite core		



## 1.6 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GSM	GMSK	1.5885	0.0323	245KGXW
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.0843	0.0074	4M15F9W
Part 24	GSM1900 GSM	GMSK	1.4997	0.0239	244KGXW
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.2443	0.0043	4M16F9W

## 1.8 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	<b>Sporton Site No.</b> TH01-SZ	

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	<b>Sporton Site No.</b> 03CH01-SZ	<b>FCC Registration No.</b> 831040



## 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.


All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:


Test Modes		
Band	Radiated TCs	Conducted TCs
<b>GSM 850</b>	■ GSM Link	■ GSM Link
<b>GSM 1900</b>	■ GSM Link	■ GSM Link
<b>WCDMA Band V</b>	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
<b>WCDMA Band II</b>	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

## 2.2 Connection Diagram of Test System

For 22H

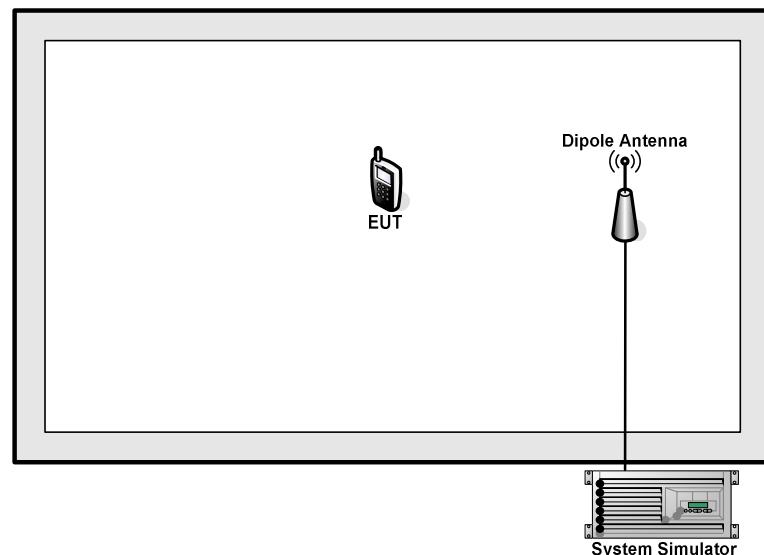

For 24E

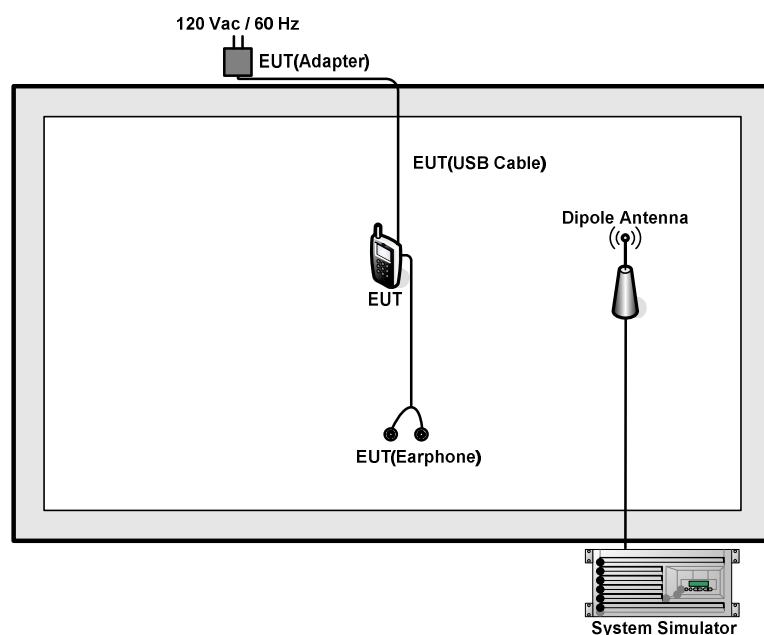



## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.5 + 10 = 14.5 \text{ (dB)} \end{aligned}$$

### 3 Conducted Test Result

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power



##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

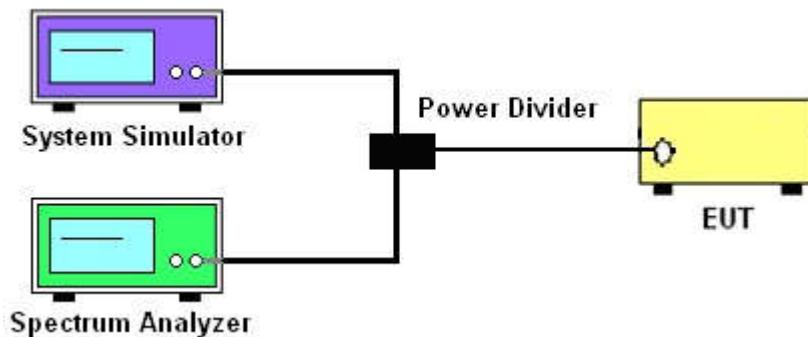

##### 3.2.3 Frequency Stability

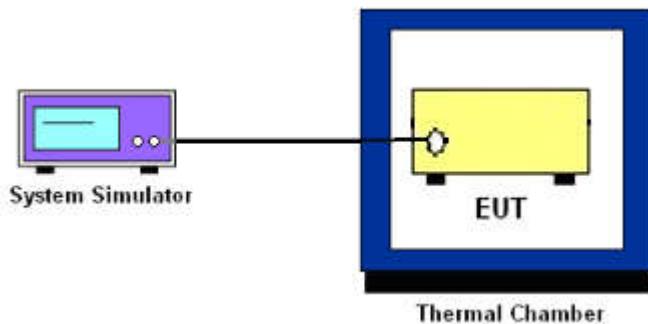

#### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



## 3.4 Conducted Output Power

### 3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### 3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



### 3.5 Peak-to-Average Ratio

#### 3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. For GSM/EGPRS operating modes:
  - a. Set EUT in maximum power output.
  - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
  - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
  - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
4. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



## 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

### 3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.7 Conducted Band Edge

### 3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### 3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$  dBm.



## 3.8 Conducted Spurious Emission

### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$  dBm.



## 3.9 Frequency Stability

### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^\circ\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^\circ\text{C}$  steps up to  $50^\circ\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^\circ\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

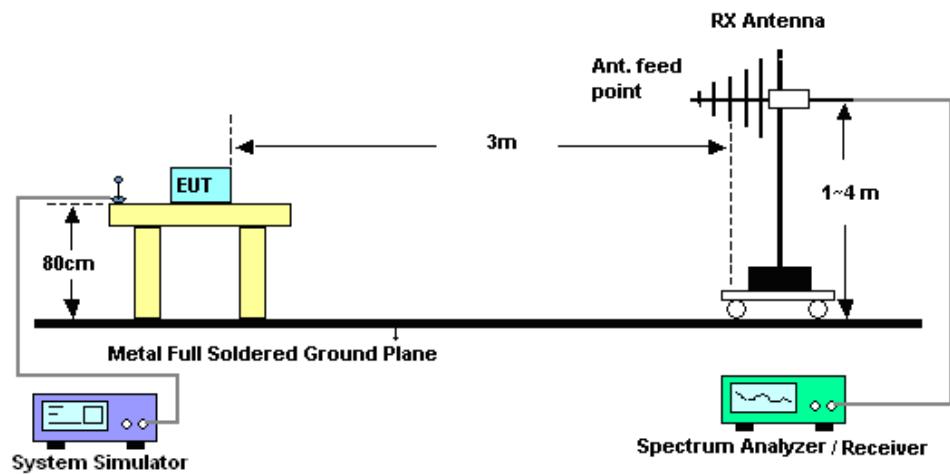

#### 4.2.2 For radiated test above 1GHz

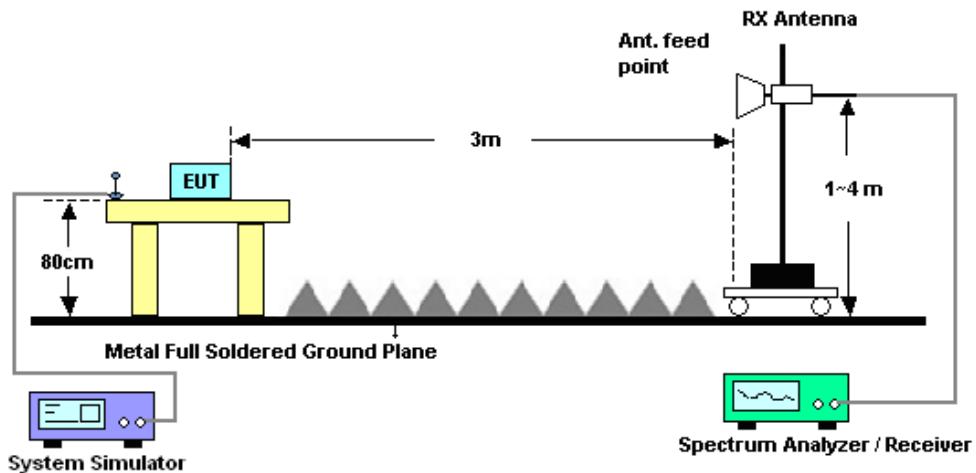

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## 4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

### 4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

### 4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$ . Take the record of the output power at substitution antenna.



	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100



## 4.5 Field Strength of Spurious Radiation Measurement

### 4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13 \text{ dBm.}$



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 05, 2015	Oct. 14, 2015~Oct. 15, 2015	May 04, 2016	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Aug. 07, 2015	Oct. 14, 2015~Oct. 15, 2015	Aug. 06, 2016	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2015	Nov. 09, 2015	May 25, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz;Max 30dBm	Jun. 07, 2015	Nov. 09, 2015	Jun. 06, 2016	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz-2GHz	Oct. 17, 2015	Nov. 09, 2015	Oct. 16, 2016	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Jan. 20, 2015	Nov. 09, 2015	Jan. 19, 2016	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Aug.19, 2015	Nov. 09, 2015	Aug. 18, 2016	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz ~3000MHz / 30 dB	Jan. 28, 2015	Nov. 09, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 28, 2015	Nov. 09, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	NCR	Nov. 09, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Nov. 09, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Nov. 09, 2015	NCR	Radiation (03CH01-SZ)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8dB
---	-------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

#### SIM1 Card

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.87	32.82	32.92	29.93	29.63	29.61
GRPS class 8	32.86	32.78	32.89	29.92	29.62	29.59
GRPS class 10	32.09	32.01	32.13	29.22	28.90	28.90
GRPS class 11	30.28	30.22	30.13	27.44	27.13	27.18
GRPS class 12	29.37	29.34	29.46	26.27	26.01	26.06

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
AMR 12.2K	22.35	22.27	22.26	22.25	22.18	22.20
RMC 12.2K	23.36	23.29	23.28	22.27	22.20	22.21
HSDPA Subtest-1	20.13	20.02	20.10	18.84	18.86	18.96
HSDPA Subtest-2	20.11	20.00	20.04	18.75	18.79	18.89
HSDPA Subtest-3	20.17	20.09	20.10	18.78	18.85	18.89
HSDPA Subtest-4	20.13	20.01	20.07	18.75	18.82	18.85
HSUPA Subtest-1	20.12	20.01	20.06	18.78	18.80	18.88
HSUPA Subtest-2	20.11	20.04	20.00	18.68	18.73	18.75
HSUPA Subtest-3	21.11	20.95	20.99	19.67	19.73	19.76
HSUPA Subtest-4	19.63	19.48	19.54	18.18	18.22	18.31
HSUPA Subtest-5	22.10	22.00	22.00	20.60	20.70	20.80



## SIM 2 Card:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	<b>824.2</b>	<b>836.4</b>	<b>848.8</b>	<b>1850.2</b>	<b>1880.0</b>	<b>1909.8</b>
GSM	32.84	32.77	<b>32.91</b>	<b>29.63</b>	29.23	29.41
GPRS class 8	32.70	32.72	32.83	29.63	29.28	29.41
GPRS class 10	31.99	31.95	32.08	28.97	28.55	28.73
GPRS class 11	30.20	30.16	30.29	27.23	26.79	27.03
GPRS class 12	29.17	29.26	29.42	26.11	25.92	26.05

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	<b>826.4</b>	<b>836.4</b>	<b>846.6</b>	<b>1852.4</b>	<b>1880</b>	<b>1907.6</b>
AMR 12.2K	23.33	23.24	23.27	22.17	22.03	21.94
RMC 12.2K	<b>23.36</b>	23.25	23.26	<b>22.20</b>	22.04	22.03
HSDPA Subtest-1	19.97	19.96	20.04	18.68	18.80	18.90
HSDPA Subtest-2	20.01	19.94	19.99	18.65	18.73	18.84
HSDPA Subtest-3	20.09	20.03	20.26	18.49	18.51	18.71
HSDPA Subtest-4	19.93	19.93	20.03	18.50	18.47	18.68
HSUPA Subtest-1	20.06	19.98	20.00	18.72	18.77	18.82
HSUPA Subtest-2	20.05	19.88	19.95	18.62	18.57	18.70
HSUPA Subtest-3	21.05	20.85	21.15	19.61	19.63	19.92
HSUPA Subtest-4	19.57	19.40	19.50	18.12	18.14	18.27
HSUPA Subtest-5	22.02	21.94	22.16	20.52	20.64	20.96



## GSM


### Peak-to-Average Ratio

Mode	GSM		Limit: 13dB
Mod.	GSM850	GSM1900	Result
Lowest CH	0.3	0.29	PASS
Middle CH	0.3	0.29	
Highest CH	0.3	0.29	




**26dB Bandwidth**

Mode	GSM	
	GSM850	GSM1900
Lowest CH	0.314	0.316
Middle CH	0.316	0.316
Highest CH	0.317	0.315

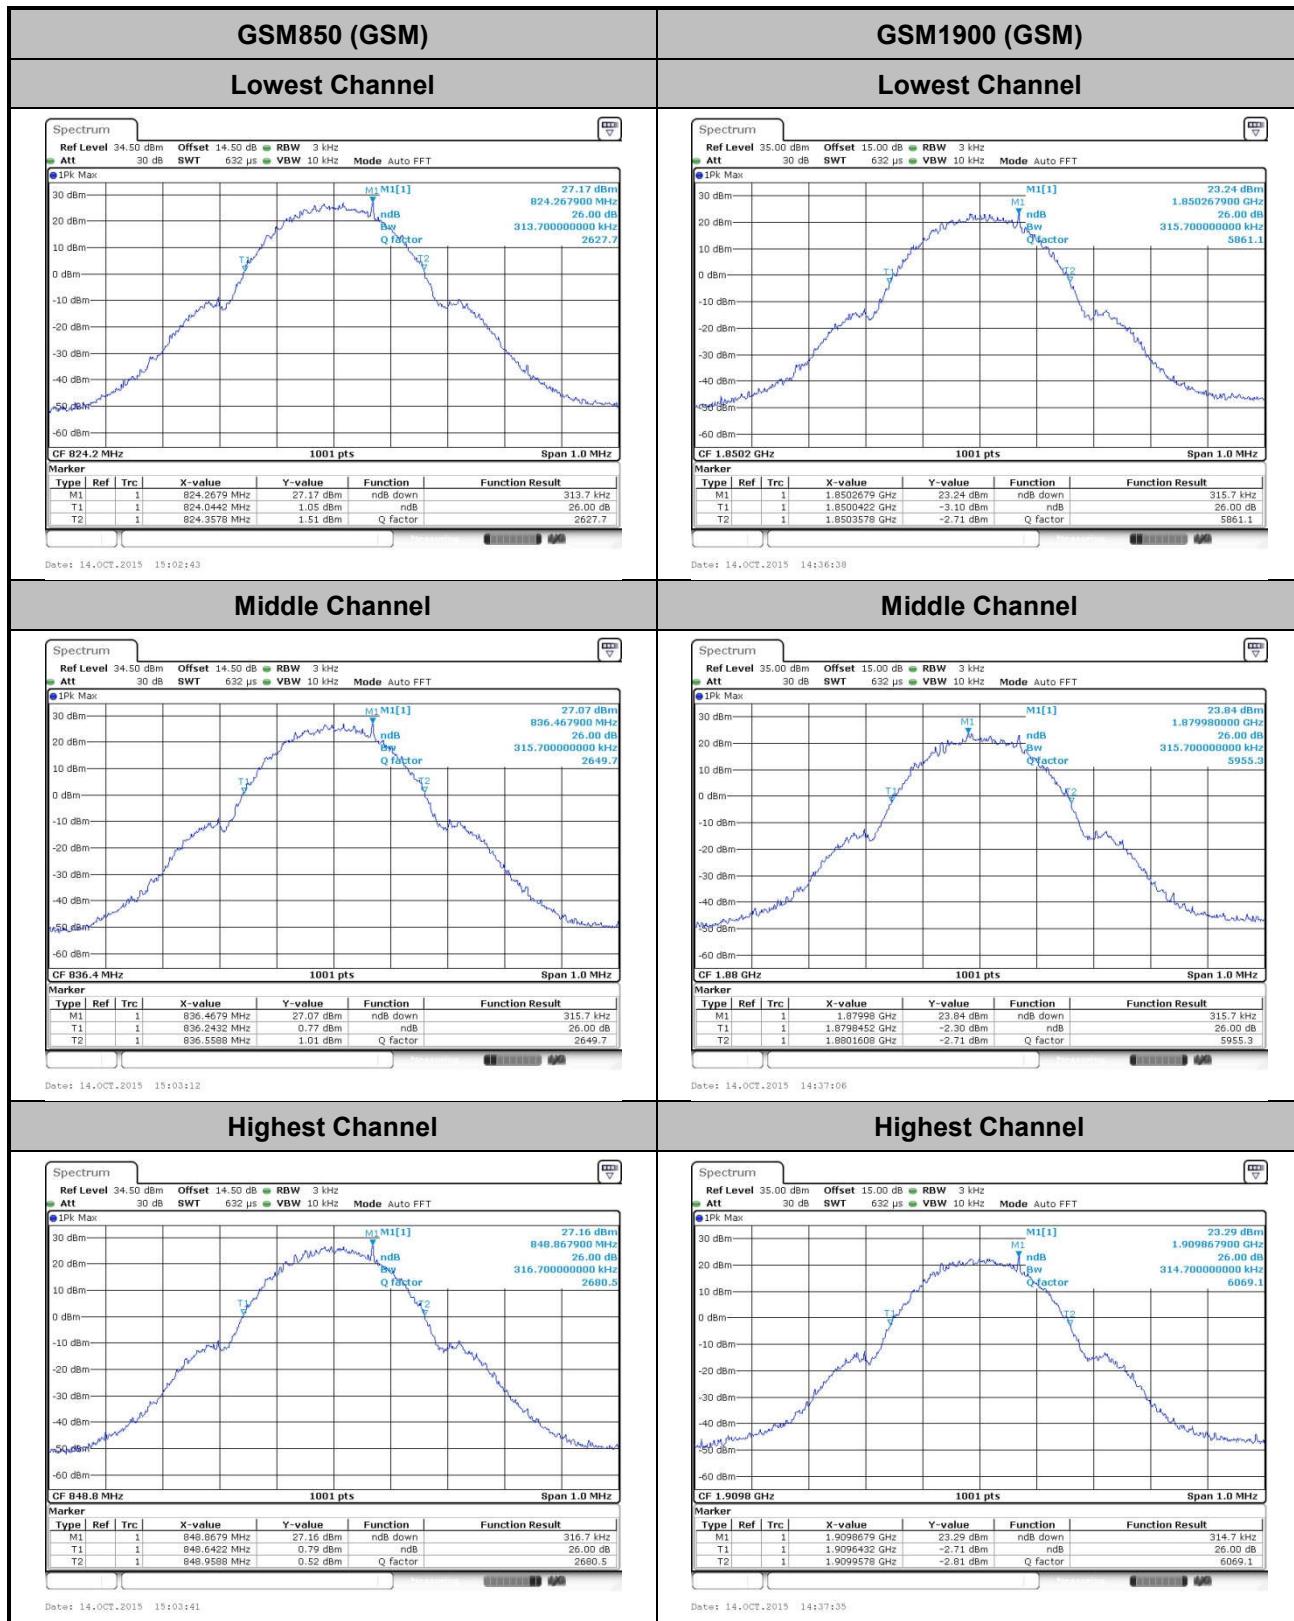

**Occupied Bandwidth**

Mode	GSM	
	GSM850	GSM1900
Mod.		
Lowest CH	0.245	0.244
Middle CH	0.243	0.243
Highest CH	0.242	0.244

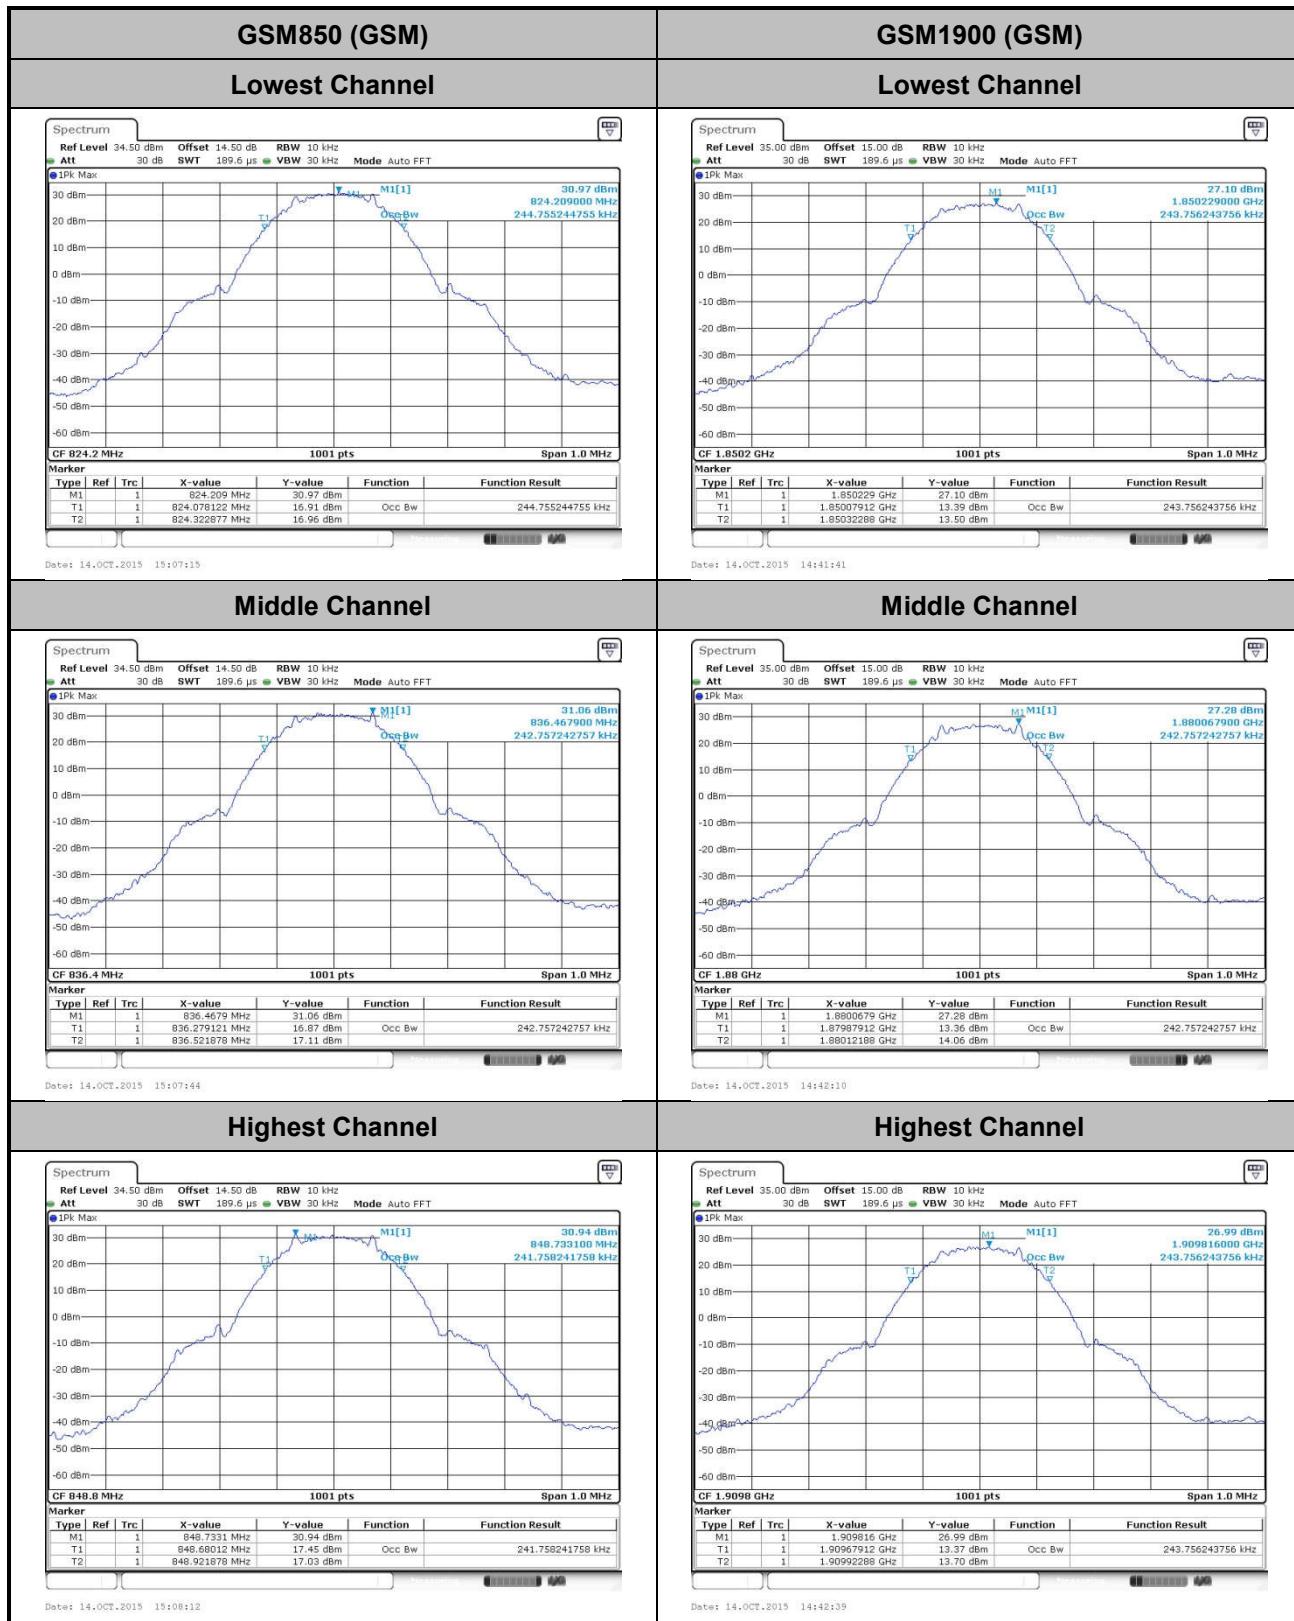





## Conducted Band Edge

### GSM850 (GSM)

#### Lowest Band Edge

#### Highest Band Edge

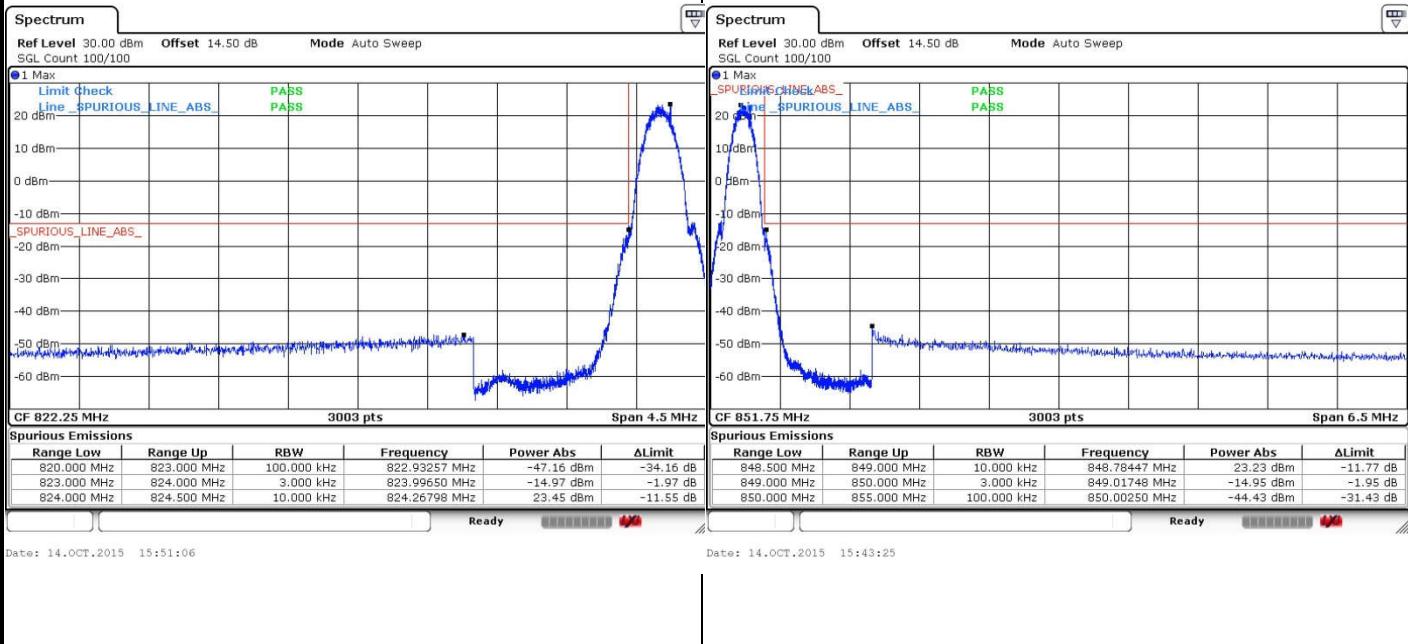

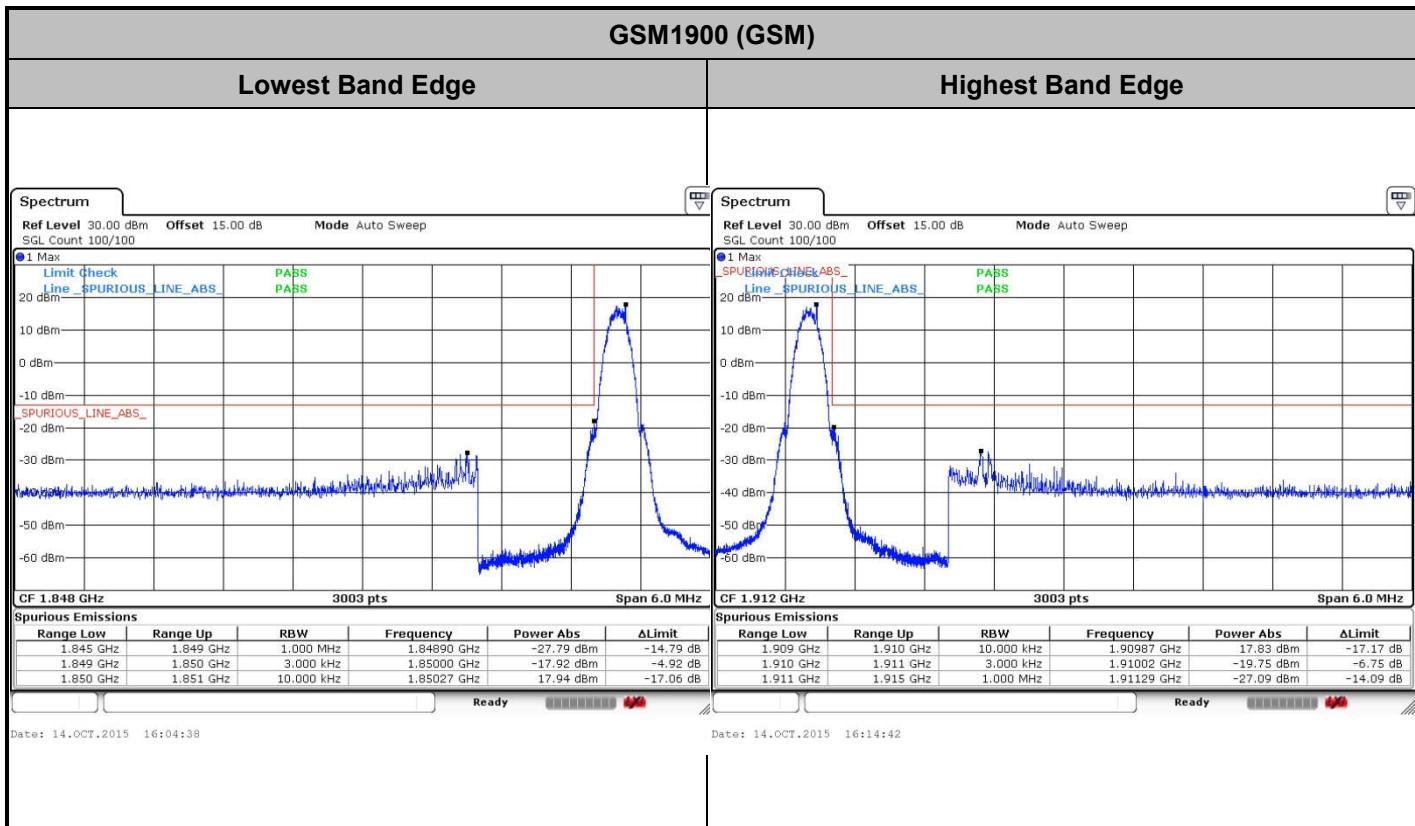


Date: 14.OCT.2015 16:04:38

Date: 14.OCT.2015 16:14:42



## Conducted Spurious Emission

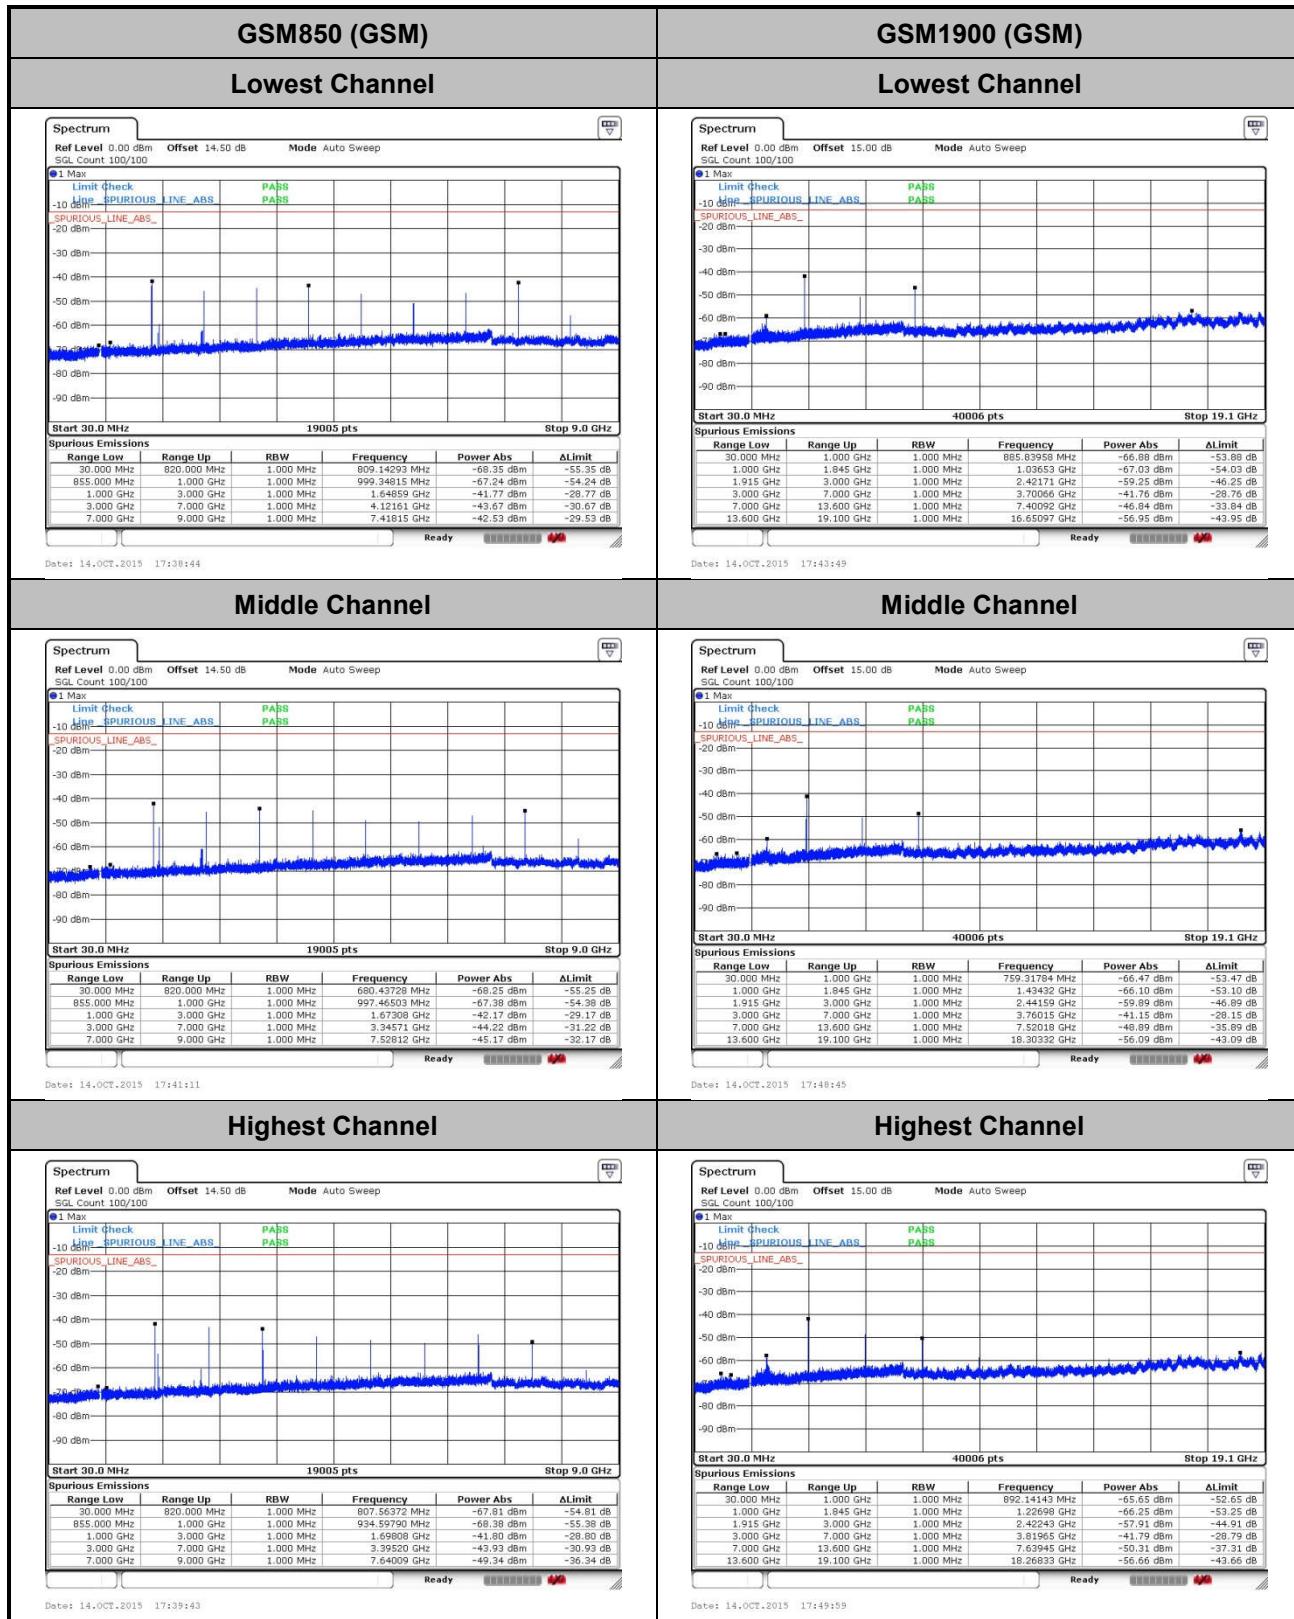



## Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0036	PASS
40	Normal Voltage	0.0048	
30	Normal Voltage	0.0024	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0024	
0	Normal Voltage	0.0287	
-10	Normal Voltage	0.0299	
-20	Normal Voltage	0.0323	
-30	Normal Voltage	0.0311	
20	Maximum Voltage	0.0036	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0024	

**Note:** Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage = 4.2 V

Test Conditions	Middle Channel	GSM1900 (GSM)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0179	PASS
40	Normal Voltage	0.0120	
30	Normal Voltage	0.0036	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0072	
0	Normal Voltage	0.0108	
-10	Normal Voltage	0.0155	
-20	Normal Voltage	0.0179	
-30	Normal Voltage	0.0239	
20	Maximum Voltage	0.0060	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0096	

**Note:**


1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage = 4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## WCDMA


### Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.13	2.87	PASS
Middle CH	3.13	2.90	
Highest CH	3.10	2.78	

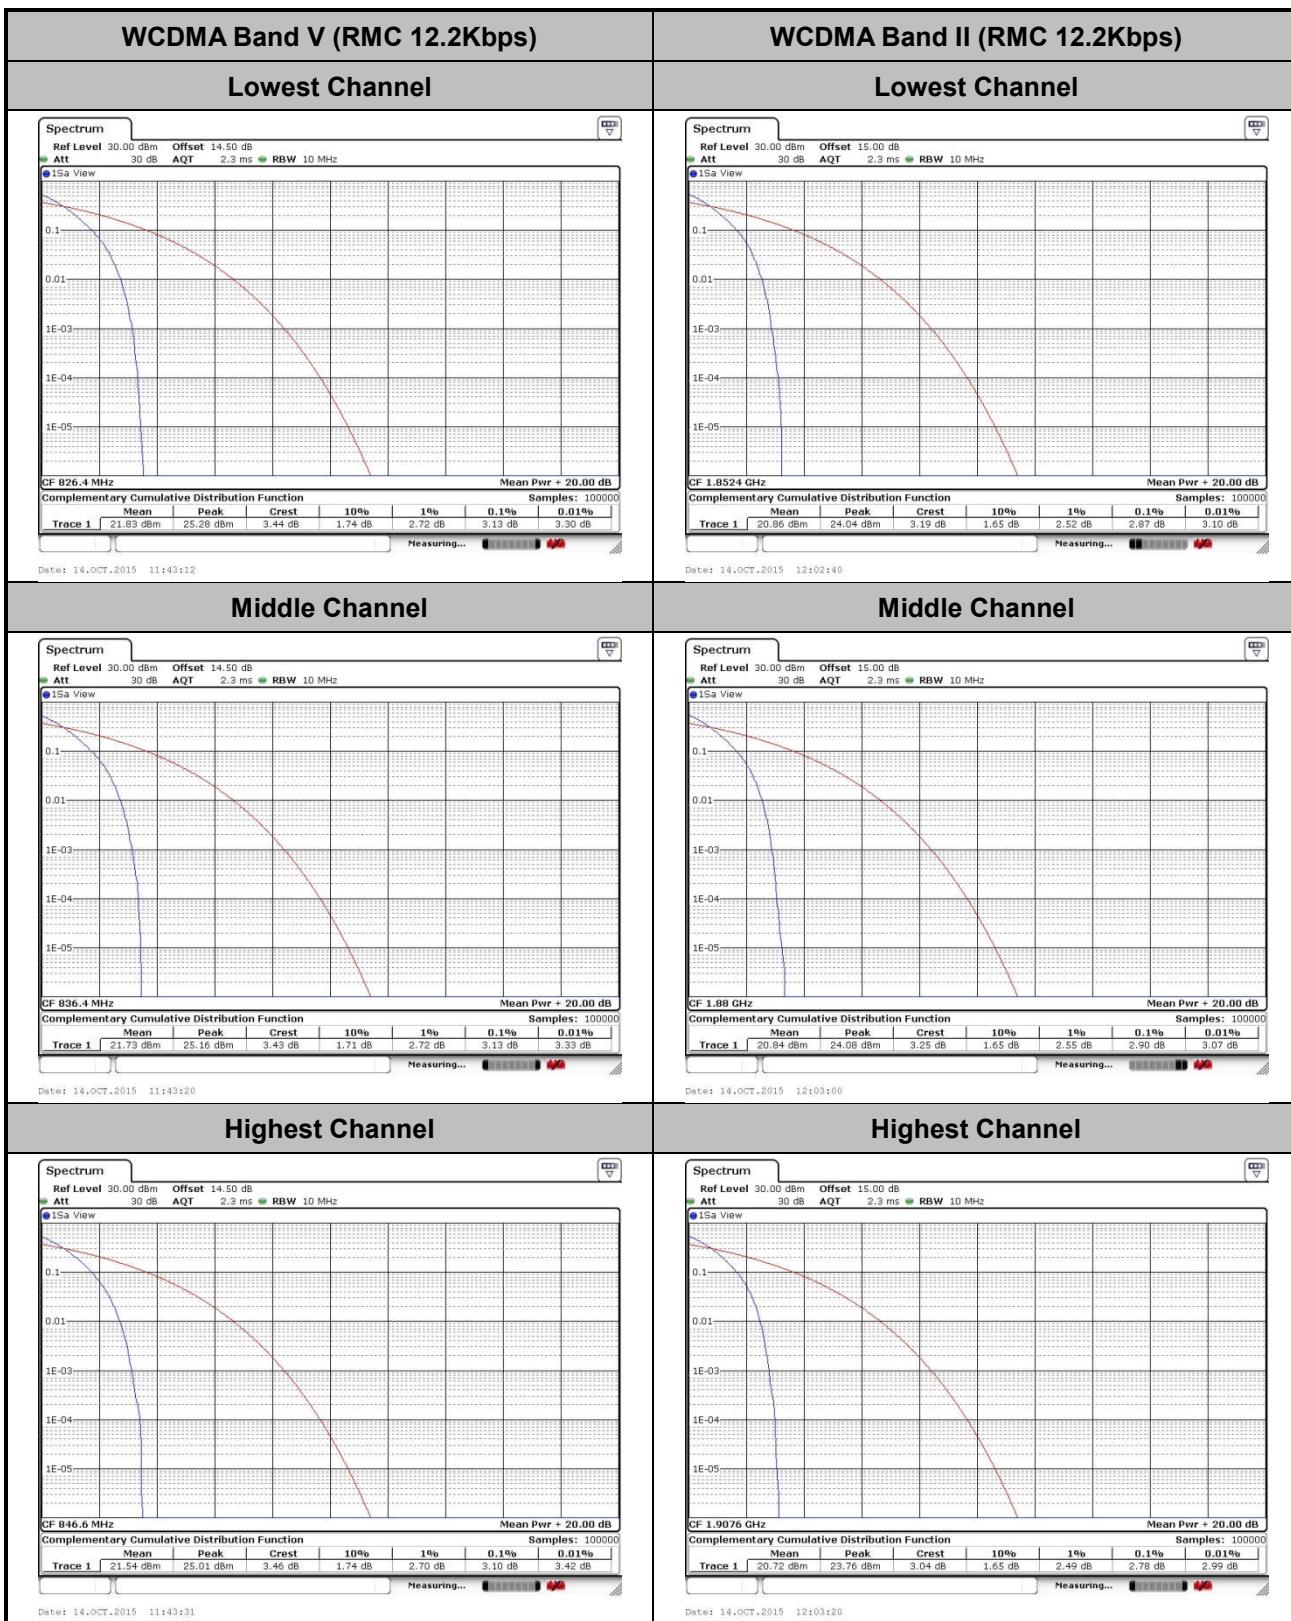

**26dB Bandwidth**


Mode	WCDMA Band V	WCDMA Band II
Mod.	<b>RMC 12.2Kbps</b>	<b>RMC 12.2Kbps</b>
Lowest CH	4.68	4.70
Middle CH	4.68	4.70
Highest CH	4.68	4.71

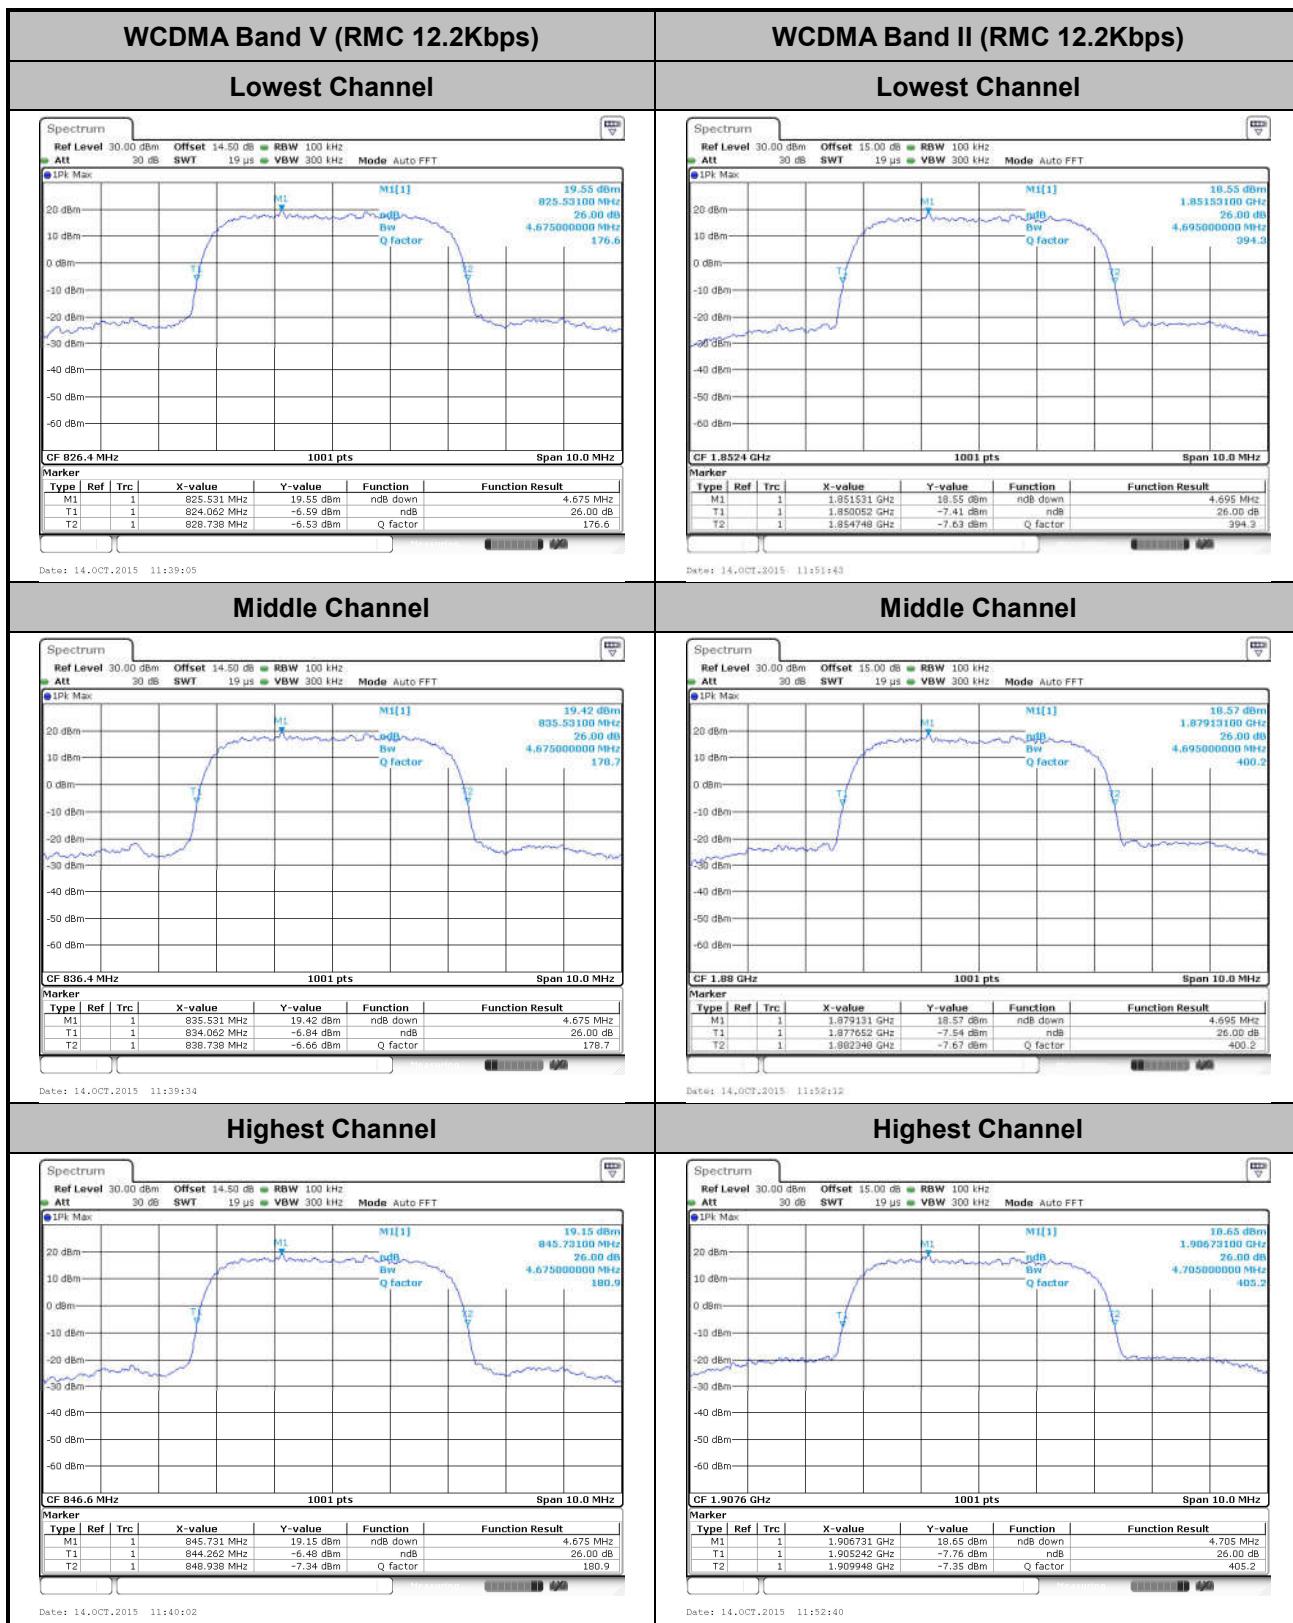




## Occupied Bandwidth


Mode	WCDMA Band V	WCDMA Band II
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.15	4.16
Middle CH	4.14	4.15
Highest CH	4.14	4.16

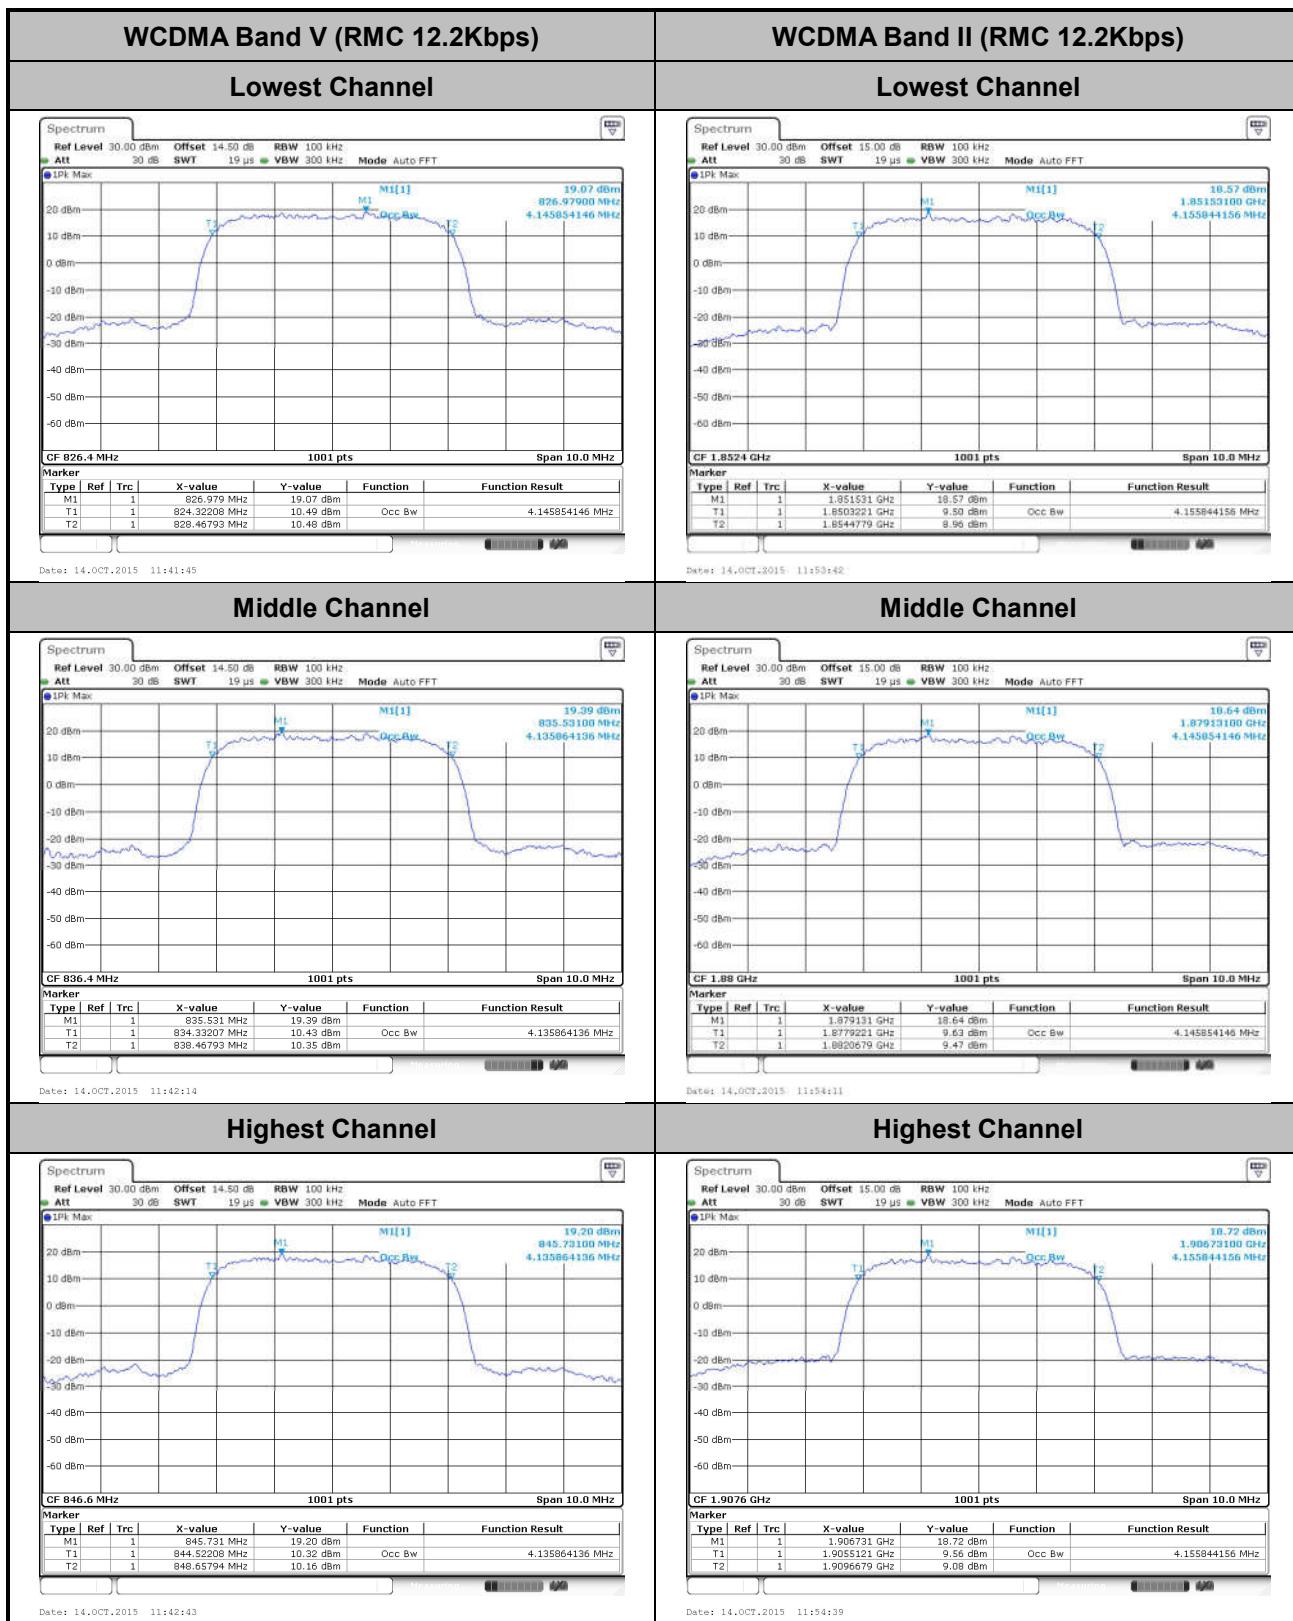




## Conducted Band Edge

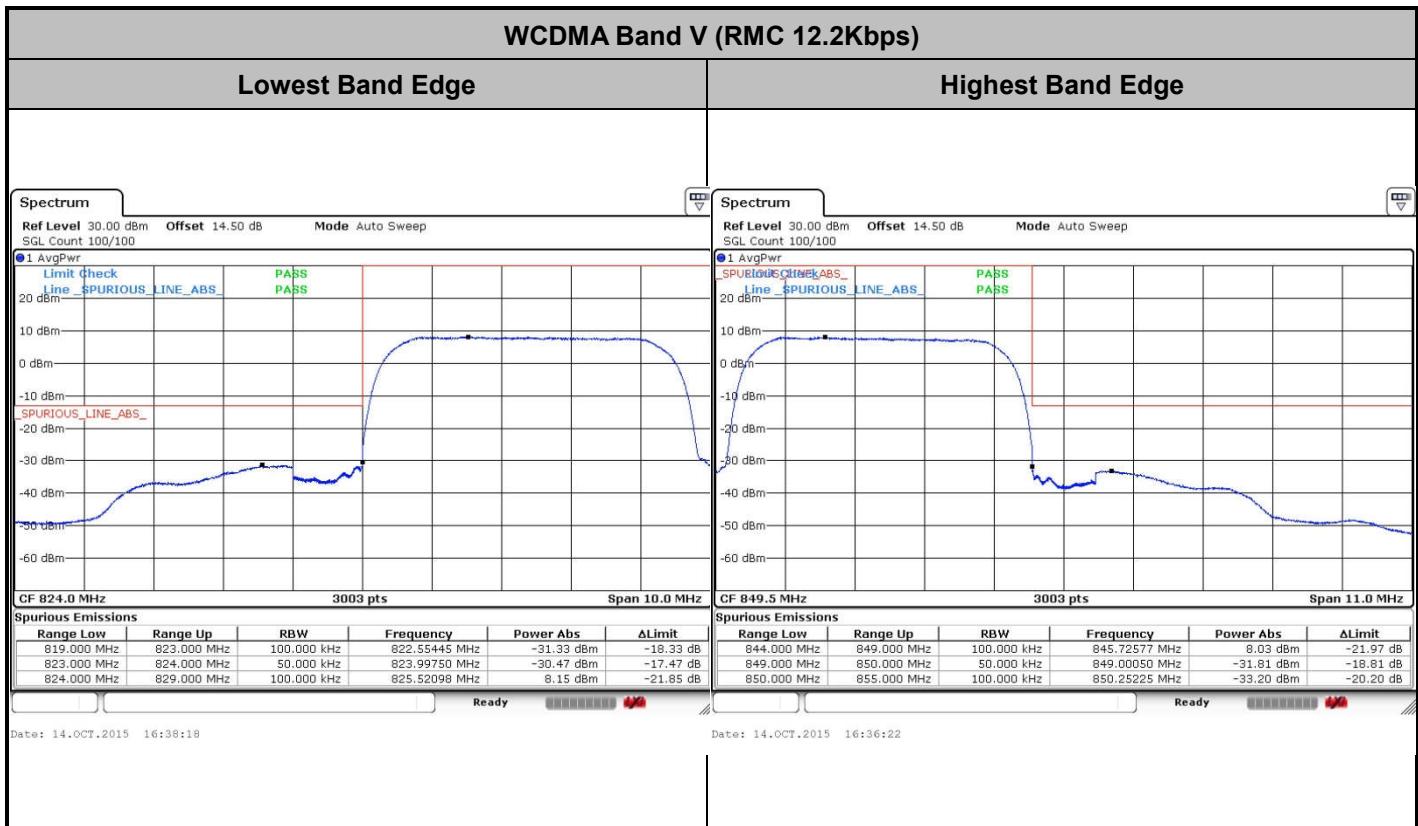

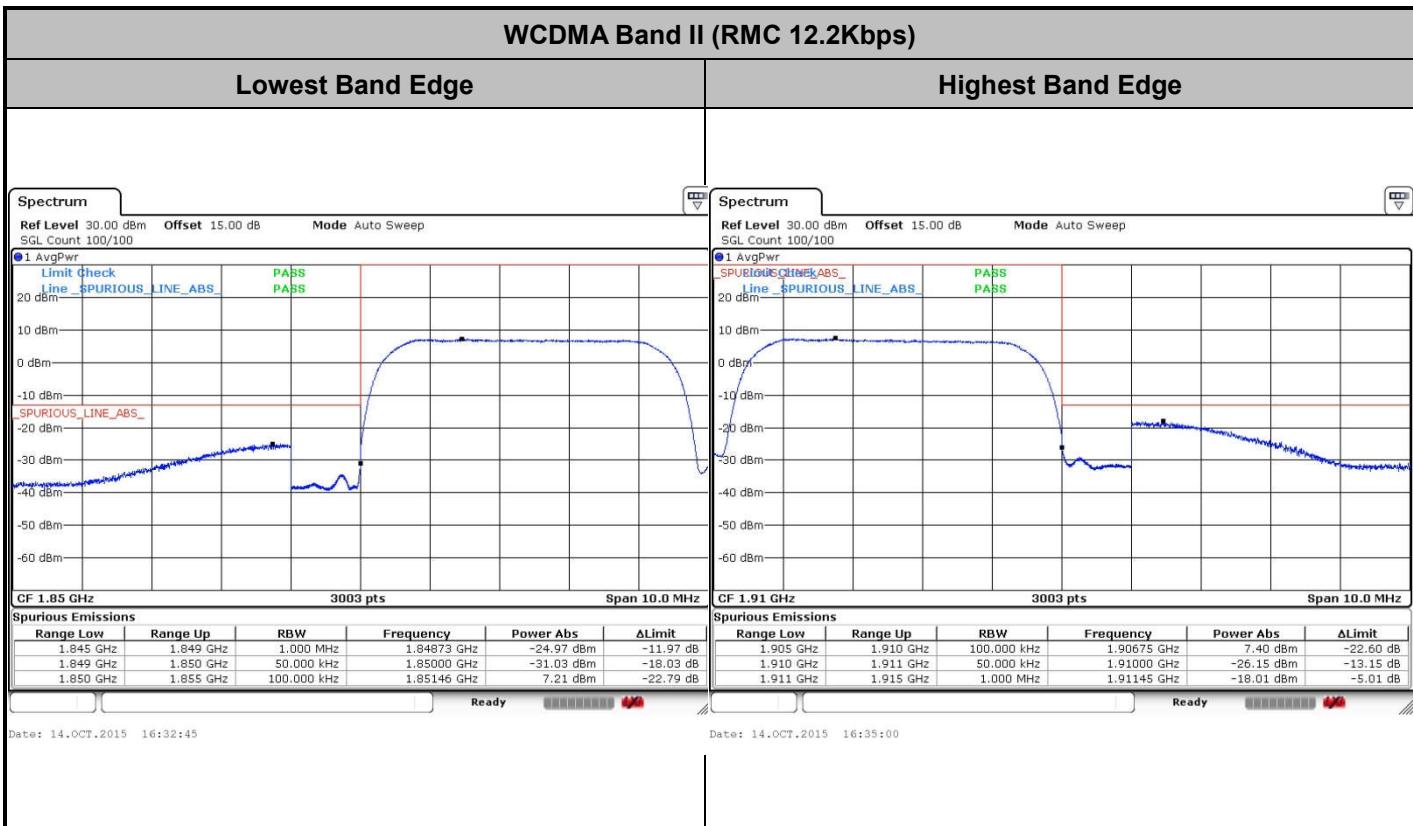



## Conducted Spurious Emission

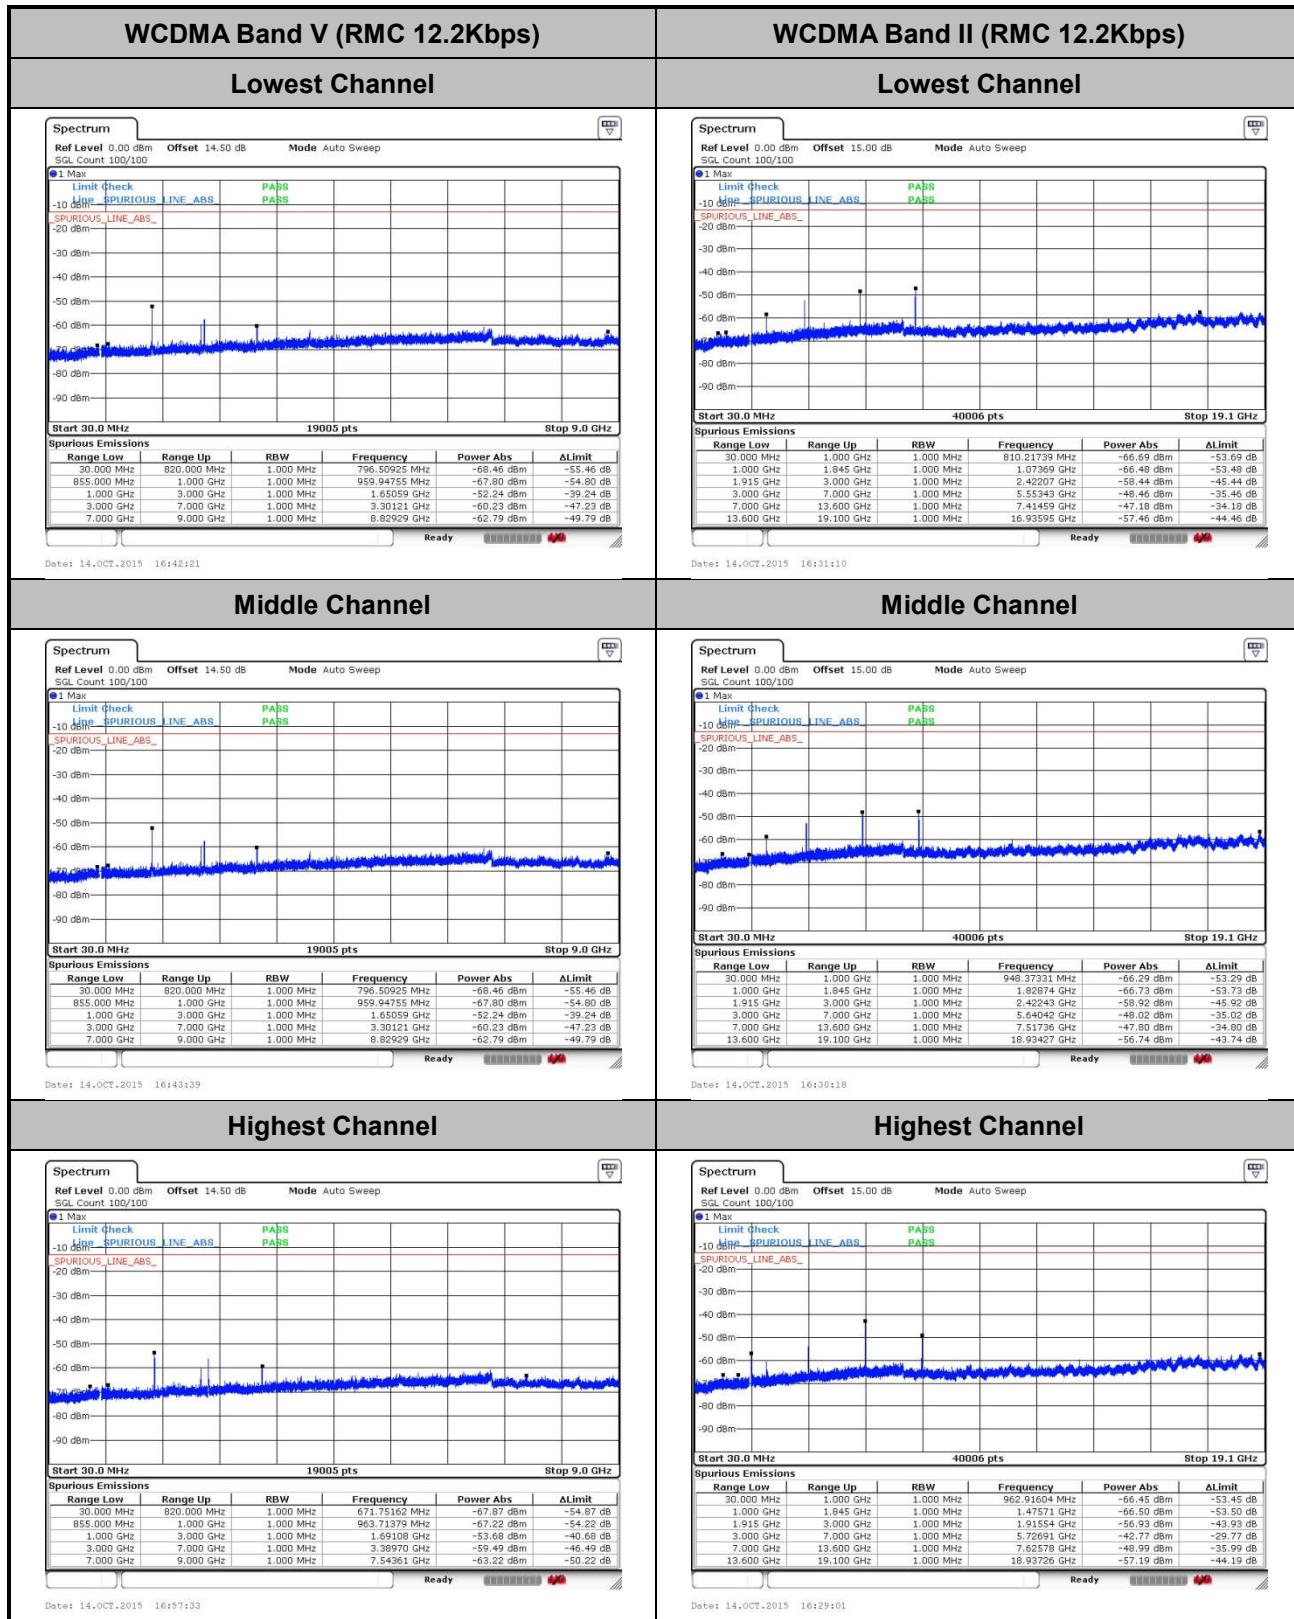



## Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0032	PASS
40	Normal Voltage	0.0021	
30	Normal Voltage	0.0011	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0011	
0	Normal Voltage	0.0059	
-10	Normal Voltage	0.0069	
-20	Normal Voltage	0.0074	
-30	Normal Voltage	0.0074	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0016	

**Note:** Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage = 4.2 V

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0021	PASS
40	Normal Voltage	0.0005	
30	Normal Voltage	0.0011	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0005	
0	Normal Voltage	0.0016	
-10	Normal Voltage	0.0043	
-20	Normal Voltage	0.0032	
-30	Normal Voltage	0.0027	
20	Maximum Voltage	0.0005	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0005	

**Note:**

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage = 4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## Appendix B. Test Results of Radiated Test

### ERP/EIRP

Channel	Mode	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	GSM850 GSM	29.61	0.9141	32.01	1.5885
Middle		29.30	0.8511	31.74	1.4928
Highest		29.09	0.8110	31.55	1.4289
Lowest	WCDMA Band V RMC 12.2Kbps	14.73	0.0297	18.89	0.0774
Middle		15.75	0.0376	19.26	0.0843
Highest		16.67	0.0465	18.83	0.0764
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GSM	29.69	0.9311	31.76	1.4997
Middle		29.05	0.8035	31.55	1.4289
Highest		29.75	0.9441	31.62	1.4521
Lowest	WCDMA Band II RMC 12.2Kbps	20.65	0.1161	23.88	0.2443
Middle		21.33	0.1358	21.81	0.1517
Highest		21.13	0.1297	22.06	0.1607
Limit	EIRP < 2W	Result		PASS	



## Radiated Spurious Emission

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-43.16	-13	-30.16	-46.54	-49.85	0.56	9.40	H
	2510	-57.23	-13	-44.23	-61.13	-64.93	0.75	10.60	H
	3346	-51.12	-13	-38.12	-60.42	-60.72	0.85	12.60	H
	1672	-52.02	-13	-39.02	-55.26	-58.71	0.56	9.40	V
	2510	-60.14	-13	-47.14	-64.52	-67.84	0.75	10.60	V
	3346	-57.05	-13	-44.05	-63.91	-66.65	0.85	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-44.92	-13	-31.92	-48.02	-51.61	0.56	9.40	H
	2510	-59.11	-13	-46.11	-63.01	-66.81	0.75	10.60	H
	3346	-56.53	-13	-43.53	-65.83	-66.13	0.85	12.60	H
	1672	-48.14	-13	-35.14	-52.34	-54.83	0.56	9.40	V
	2510	-59.93	-13	-46.93	-64.31	-67.63	0.75	10.60	V
	3346	-58.91	-13	-45.91	-65.77	-68.51	0.85	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-53.30	-13	-40.30	-64.55	-65.03	0.87	12.60	H
	5640	-43.86	-13	-30.86	-59.74	-55.89	1.07	13.10	H
	7520	-35.50	-13	-22.50	-55.44	-45.11	1.69	11.30	H
	9400	-37.61	-13	-24.61	-61.04	-47.68	1.83	11.90	H
	3760	-51.49	-13	-38.49	-63.96	-63.22	0.87	12.6	V
	5640	-44.58	-13	-31.58	-60.9	-56.61	1.07	13.1	V
	7520	-38.37	-13	-25.37	-56.99	-47.98	1.69	11.3	V
	9400	-38.06	-13	-25.06	-60.87	-48.13	1.83	11.9	V

WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-54.31	-13	-41.31	-65.56	-66.04	0.87	12.60	H
	5640	-51.62	-13	-38.62	-67.50	-63.65	1.07	13.10	H
	7520	-49.45	-13	-36.45	-67.77	-59.06	1.69	11.30	H
	3760	-53.80	-13	-40.80	-66.27	-65.53	0.87	12.6	V
	5640	-51.55	-13	-38.55	-67.87	-63.58	1.07	13.1	V
	7520	-49.42	-13	-36.42	-67.64	-59.03	1.69	11.3	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



## **Appendix D. product equality declaration**



5F, C building, No. 232, Liang Jing Road  
ZhangJiang High-Tech Park, Pudong Area  
Shanghai, P.R. China. 201203  
TEL: +86(0)21 61460666  
FAX: +86(0)21 61460602

## Declaration of changes from Initial to Variant

**General: 5022E is a variant product of 5022N**

## ● **SOFTWARE MODIFICATIONS:**

- Protocol Stack changes: No
- MMS/STK/USAT/USIM changes: No
- DM/SUPL/VT/FUMO/SWP/HCI: No (indicated the changed items if yes)
- Other changes detailed: **Bluetooth Version change to 4.0 from 4.1 by software.**

## ● **HARDWARE MODIFICATIONS:**

- Band changes: Yes
  - 5022N(GSM 850/900/1800/1900 UMTS 850/1700/1900)
  - 5022E(GSM 850/900/1800/1900 UMTS 850/900/1900/2100)
- PCB Layout changes: No
- Main RF components changes:

	Antenna	AP	Modem	Transceiver	Power Amplifier	Rx SAW Filter	ASM
<b>GSM850</b>	YES	No	No	No	NO	NO	NO
<b>GSM900</b>	YES	No	No	No	NO	NO	NO
<b>GSM1800</b>	YES	No	No	No	NO	NO	NO
<b>GSM1900</b>	YES	No	No	No	NO	NO	NO

	Antenna	AP	Modem	Transceiver	Power Amplifier	Tx SAW Filter	Rx SAW Filter	Duplexer	ASM
UMTS2100	YES	no	No	No	Yes	Yes	NO	Yes	Yes
UMTS1900	YES	No	No	No	no	no	No	no	no
UMTS1700	no	NA	NA	NA	NA	NA	NA	NA	NA
UMTS900	YES	No	No	No	Yes	Yes	no	Yes	Yes
UMTS850	YES	No	No	No	No	No	no	No	No

Band x								
--------	--	--	--	--	--	--	--	--

	Antenna	AP	Modem	Transceiver	Power Amplifier	Balun	Band pass filter	Diplexer
Bluetooth	YES	No	No	No	No	No	No	No
Wi-Fi	YES	No	No	No	No	No	No	No

- FM changes: No
- LCD/ Speaker/ Camera/ Vibrator changes: (indicated the changed items if yes) No
- Other changes detailed: Yes,  
5022E is SW 10M pixel(8MP) and SW 8M pixel(5MP), 5022N is 8M pixel and 5M pixel.


- **MECHANICAL MODIFICATIONS:**

- Use new metal front/back cover or keypad: No
- Mechanical shell changes:  
Whole size of EUT: No  
Distance of Ear reference point to bottom of handset: No  
Other trinkets to change the surface of handset: No
- Other changes detailed:

Accessories	5022N		5022E	
	P/N	Model Name	P/N	Model Name
Battery	CAB2000013C2	TLi020F2	CAB2000010C1	TLi020F1
Headset	-	CCB0005A10C1	-	CCB3160A11C1

**APPROVED BY:**

Project Manager: Tiffany Tang

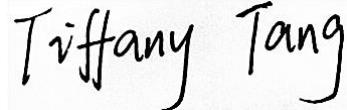

Signature:

Date:2015-11-10