



FCC RF Test Report

APPLICANT : TCL Communication Ltd.
EQUIPMENT : GSM Quad Band / UMTS Mobile Phone
MODEL NAME : 5022E
FCC ID : 2ACCJB031
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Sep. 24, 2015 and testing was completed on Nov. 09, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Andy Yeh / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.
1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China



TABLE OF CONTENTS

1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification subjective to this standard	6
1.5 Specification of Accessory.....	6
1.6 Modification of EUT	7
1.7 Testing Location	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Descriptions of Test Mode	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 6dB and 99% Bandwidth Measurement	13
3.2 Peak Output Power Measurement	18
3.3 Power Spectral Density Measurement	20
3.4 Conducted Band Edges and Spurious Emission Measurement	26
3.5 Radiated Band Edges and Spurious Emission Measurement	35
3.6 AC Conducted Emission Measurement.....	40
3.7 Antenna Requirements	45
4 LIST OF MEASURING EQUIPMENT.....	46
5 UNCERTAINTY OF EVALUATION.....	47

APPENDIX A. RADIATED TEST RESULTS**APPENDIX B. SETUP PHOTOGRAPHS****APPENDIX C. PRODUCT EQUALITY DECLARATION**



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(1)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 17.73 dB at 912.700 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.55 dB at 0.400 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China

1.2 Manufacturer

TCL Communication Ltd.

5F, C-Tower, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, 201203, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GSM Quad Band / UMTS Mobile Phone
Model Name	5022E
FCC ID	2ACCJB031
EUT supports Radios application	GSM/GPRS/EGPRS(Downlink Only)/ WCDMA/HSPA/HSPA+(16QAM uplink is not supported) WLAN2.4GHz 802.11b/g/n HT20 Bluetooth v2.1 + EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 014462000002184/014462000002192 Conduction: 014462000002143/014462000002150 Radiated: 014462000002226/014462000002234
HW Version	PIO
SW Version	V1.0
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	-2.24 dBm (0.0006 W)
99% Occupied Bandwidth	1.02MHz
Antenna Type/Gain	PIFA Antenna with gain -2.56 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter	Brand Name	ALCATEL onetouch	Model Name	UC11US
	Power Rating	Input: 100-240V ~ 50/60Hz 0.2A	Output: 5.0V-1A	
	P/N	CBA0057AG0C2		
Battery	Brand Name	BYD	Model Name	TLi020F1
	Power Rating	3.8V, 2000mAh		
	P/N	CAB2000010C1		
USB Cable	Brand Name	JUWEI	Model Name	CDA3122002C1
	Signal Line Type	1.0meter,shielded cable, without ferrite core		
Earphone	Brand Name	JUWEI	Model Name	CCB3160A11C1
	Signal Line Type	1.2meter,non-shielded cable, without ferrite core		



1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	CO01-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH02-SZ	566869

Note: The test site complies with ANSI C63.4 2009 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	-2.24 dBm
Ch19	2440MHz	-2.55 dBm
Ch39	2480MHz	-2.57 dBm

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Z plane as worst plane) from all possible combinations.

- b. AC power line Conducted Emission was tested under maximum output power.



2.2 Test Mode


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)


Remark: For Radiated TCs, The tests were performance with Adapter, Earphone, and USB Cable.

2.3 Connection Diagram of Test System

<Bluetooth v4.0 LE Tx Mode>

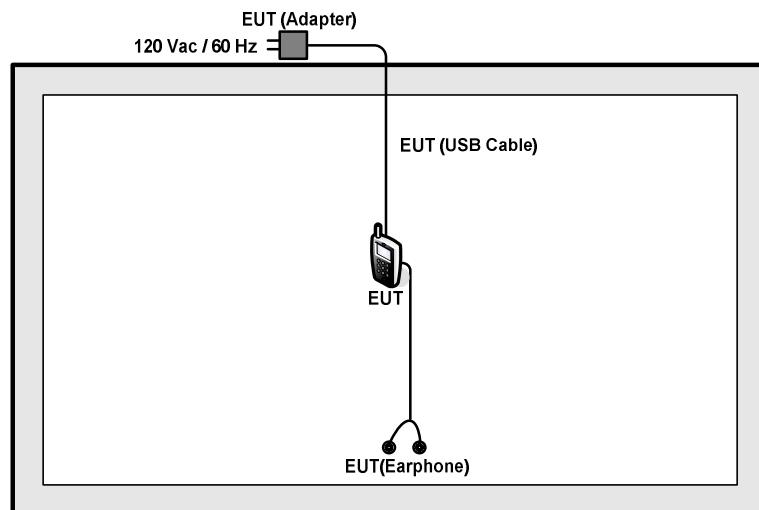

<AC Conducted Emission Mode>

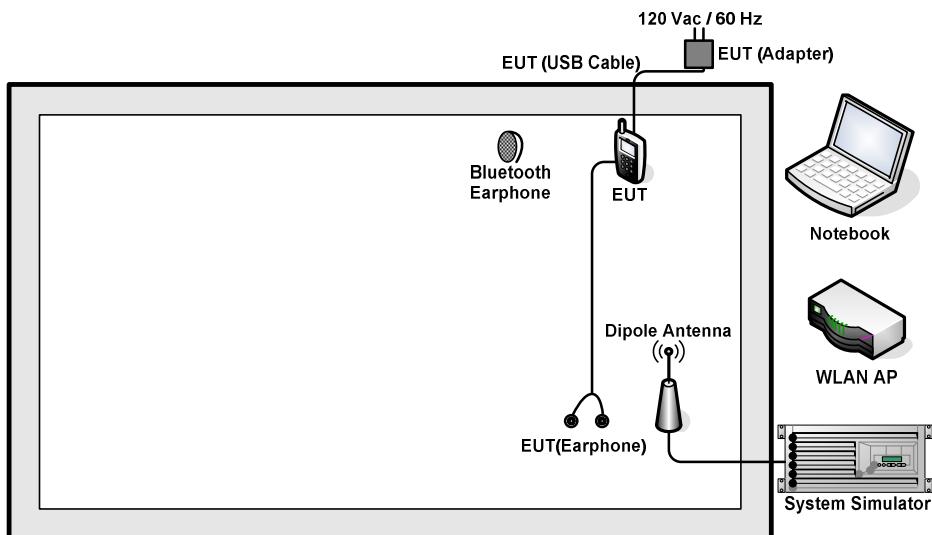



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m with Core
3.	Notebook	Lenovo	E540	FCC Doc	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-108	PYAH-107W	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth v4.0 LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 5.0 + 10 = 15.0 \text{ (dB)}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

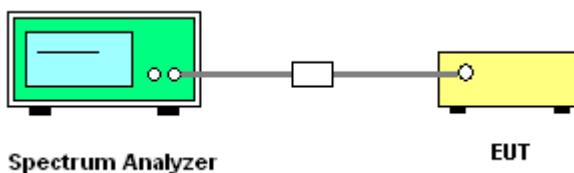




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Bluetooth v4.0 LE	Temperature :	24~26°C
Test Engineer :	Mygai Mo	Relative Humidity :	50~53%


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
00	2402	0.707	0.5	Pass
19	2440	0.705	0.5	Pass
39	2480	0.705	0.5	Pass

6 dB Bandwidth Plot on Channel 00

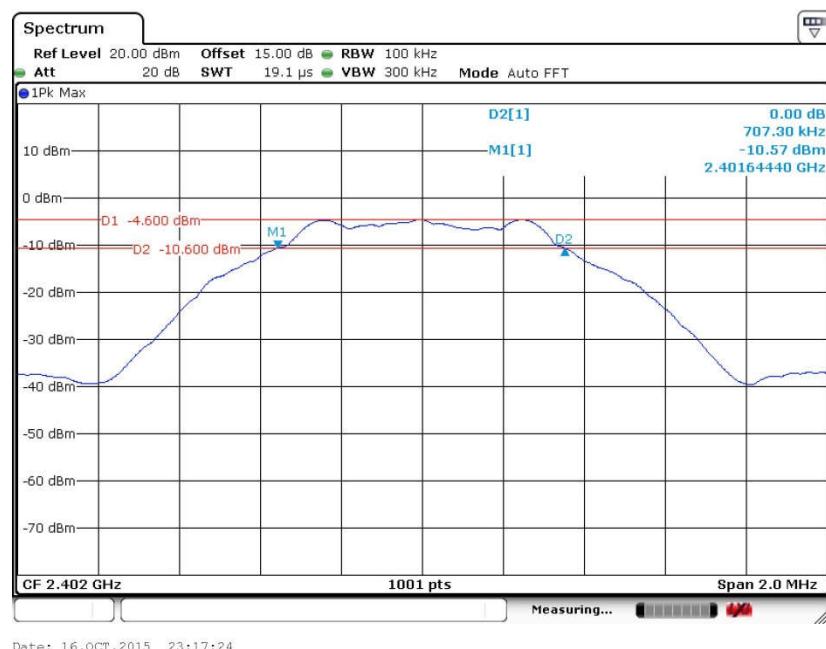




6 dB Bandwidth Plot on Channel 19

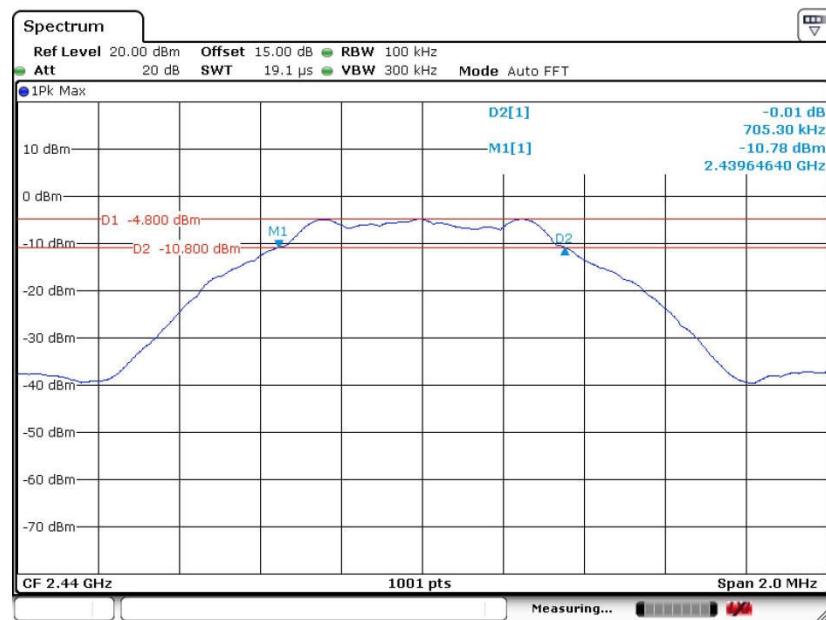

Date: 16.OCT.2015 23:20:45

6 dB Bandwidth Plot on Channel 39

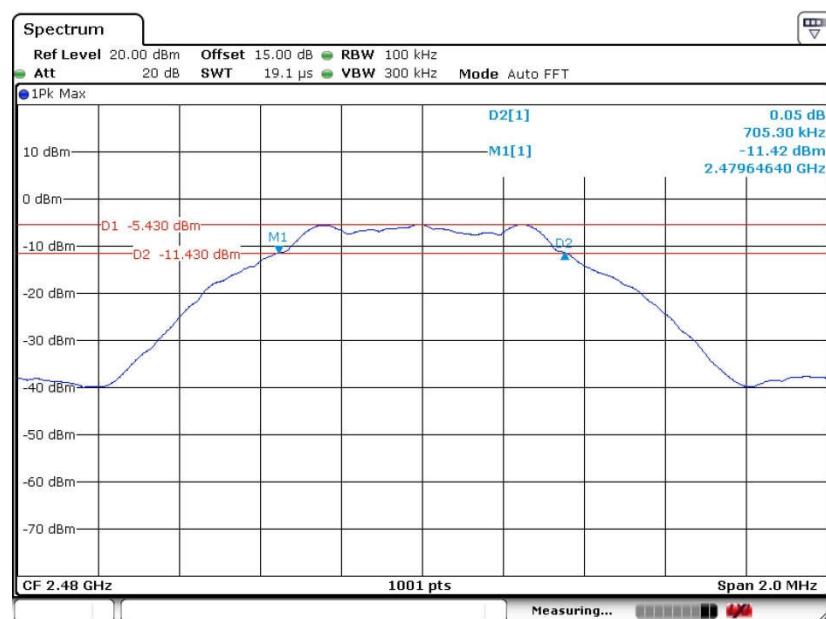

Date: 16.OCT.2015 23:23:08




3.1.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Bluetooth v4.0 LE	Temperature :	24~26°C
Test Engineer :	Mygai Mo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.02
19	2440	1.02
39	2480	1.02


99% Bandwidth Plot on Channel 00

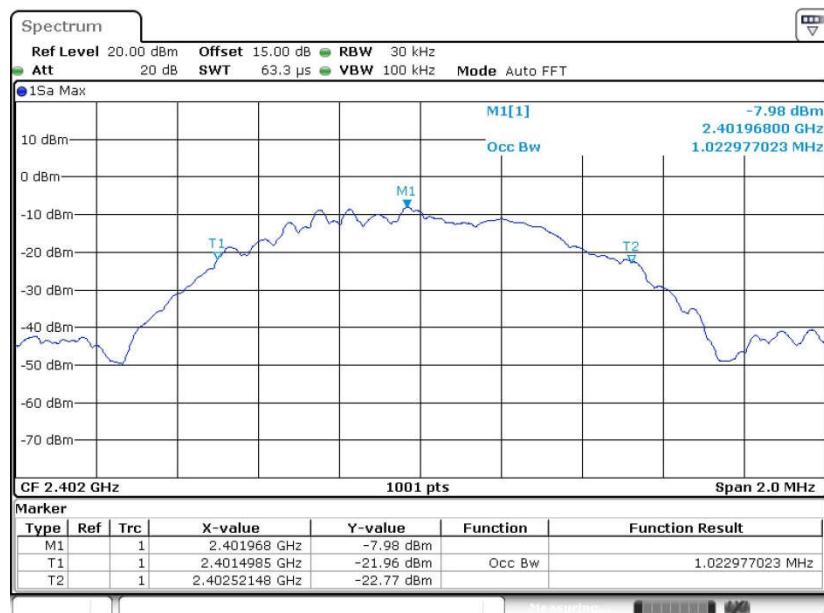


Date: 16.OCT.2015 23:19:06



99% Occupied Bandwidth Plot on Channel 19

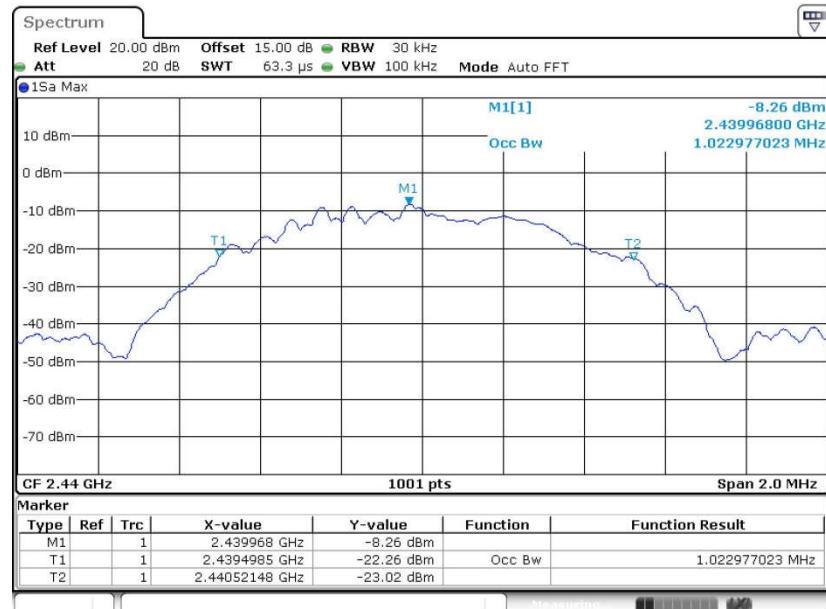

99% Occupied Bandwidth Plot on Channel 39

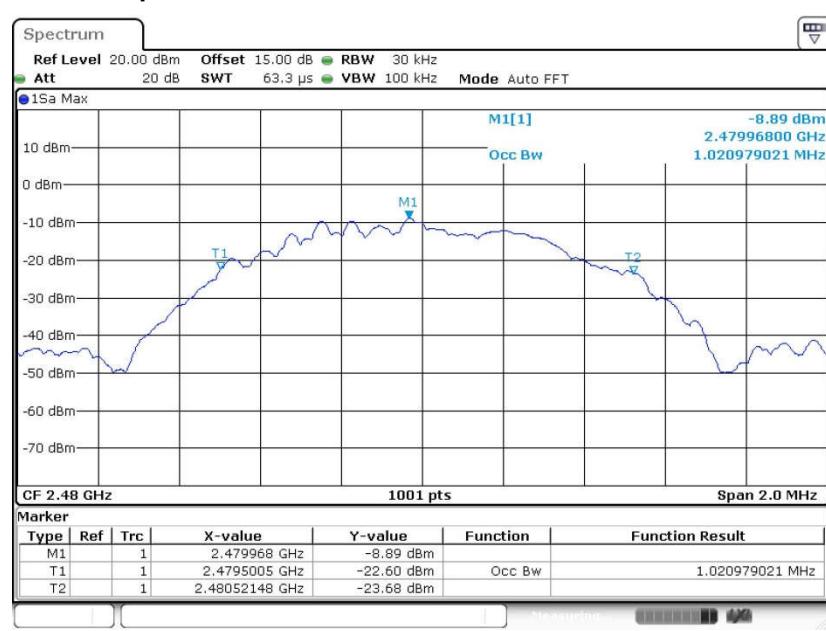

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

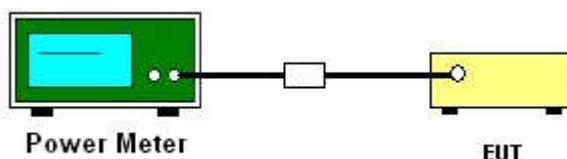



3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth v4.0 LE	Temperature :	24~26°C
Test Engineer :	Mygai Mo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	-2.24	30.00	Pass
19	2440	-2.55	30.00	Pass
39	2480	-2.57	30.00	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

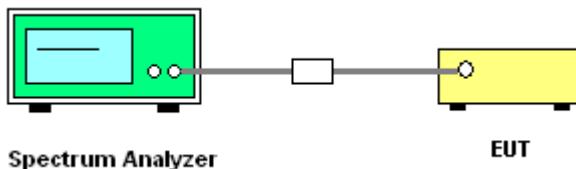



3.3.5 Test Result of Power Spectral Density

Test Mode :	Bluetooth v4.0 LE	Temperature :	24~26°C
Test Engineer :	Mygai Mo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Power Density		Max. Limits (dBm/3kHz)	Pass/Fail
		PSD/100kHz (dBm)	PSD/3kHz (dBm)		
00	2402	-4.53	-19.40	8	Pass
19	2440	-4.80	-19.68	8	Pass
39	2480	-5.41	-20.31	8	Pass


Note:

1. *Measured power density (dBm) has offset with cable loss.*
2. *The Measured power density (dBm)/ 100kHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.*




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

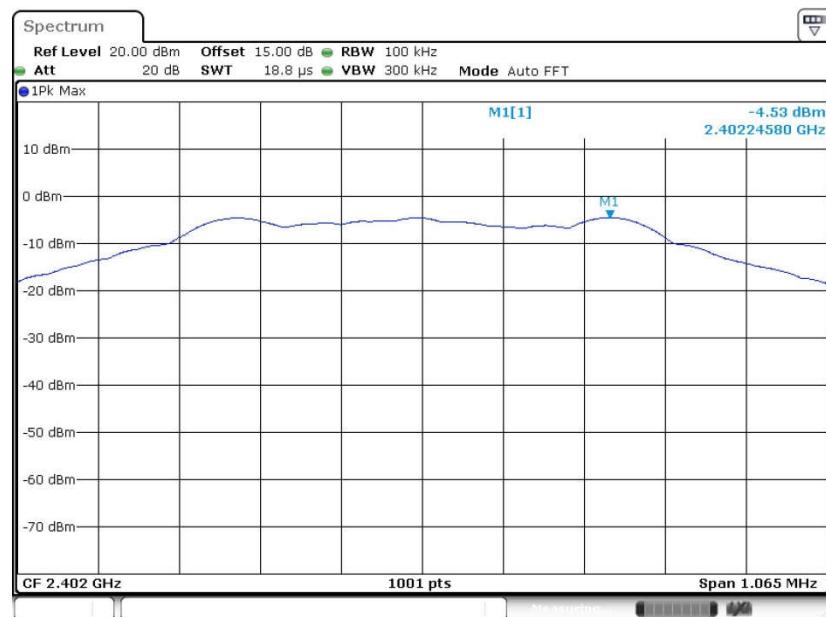




PSD 100kHz Plot on Channel 19

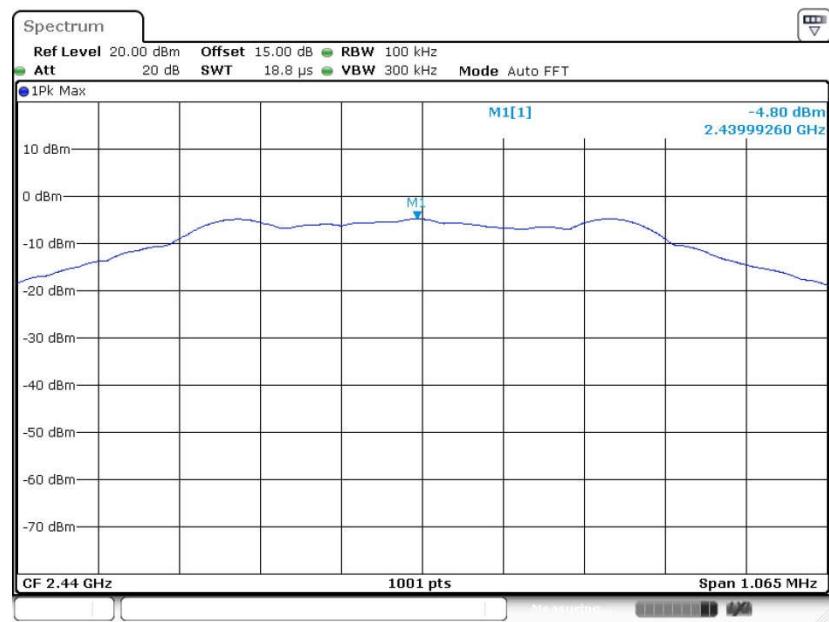


PSD 100kHz Plot on Channel 39

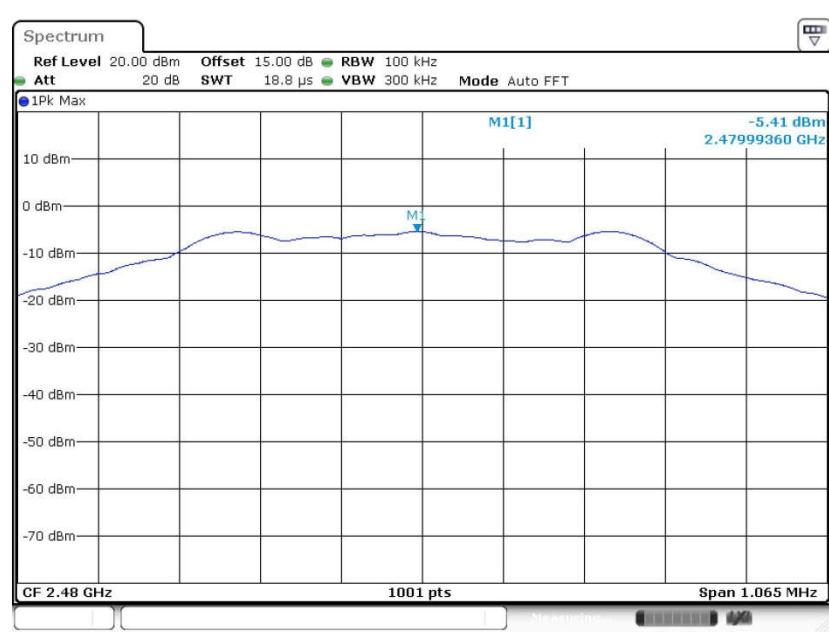




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 00

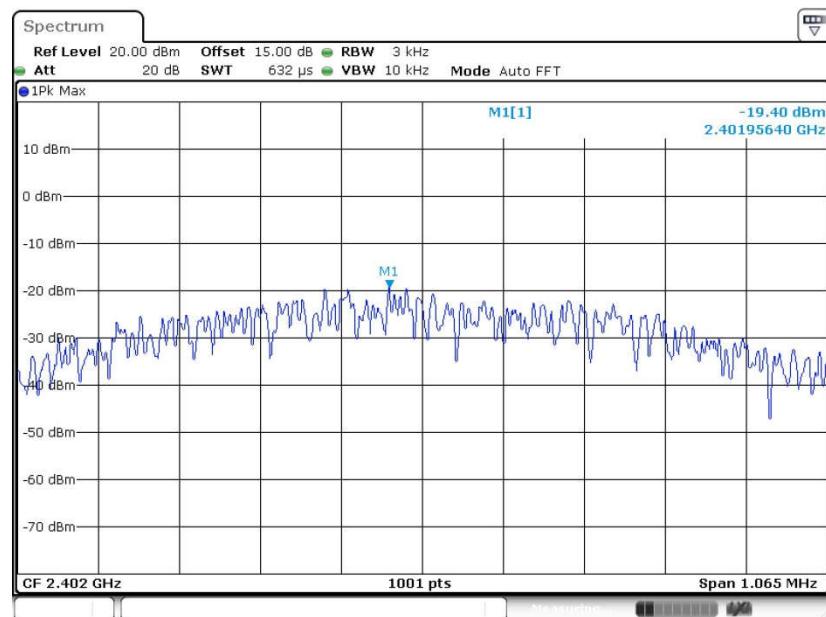




PSD 3kHz Plot on Channel 19

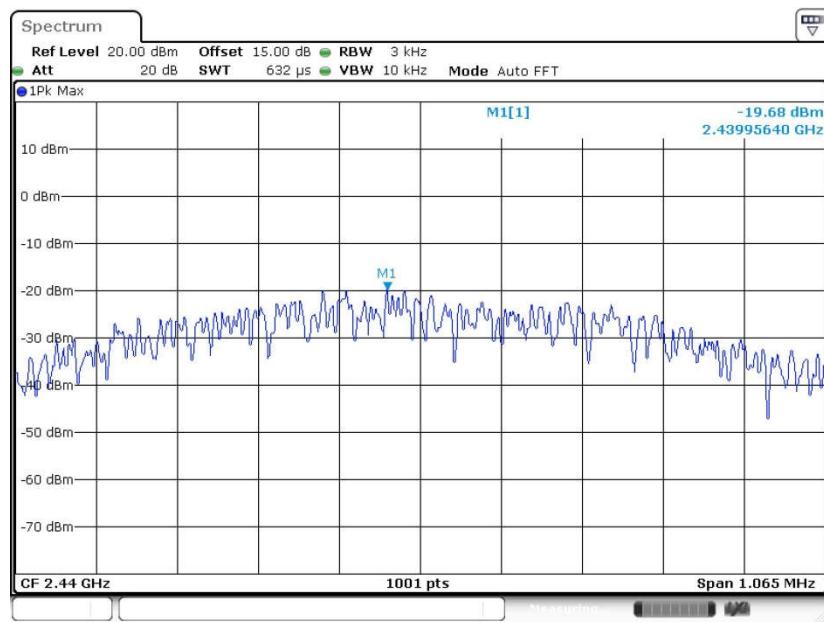

PSD 3kHz Plot on Channel 39

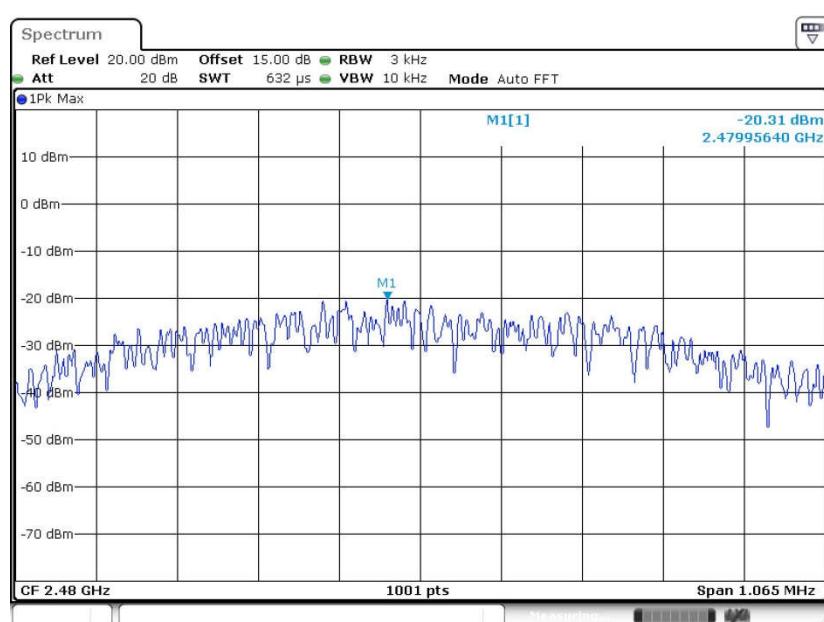



3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

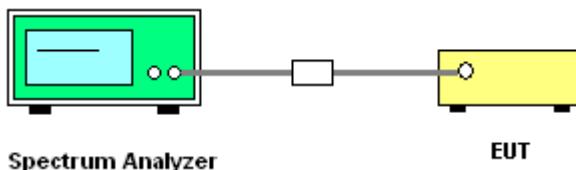




3.4.5 Test Result of Conducted Band Edges


Test Mode :	Bluetooth v4.0 LE	Temperature :	24~26°C
Test Channel :	00 and 39	Relative Humidity :	50~53%
		Test Engineer :	Mygai Mo

Low Band Edge Plot on Channel 00

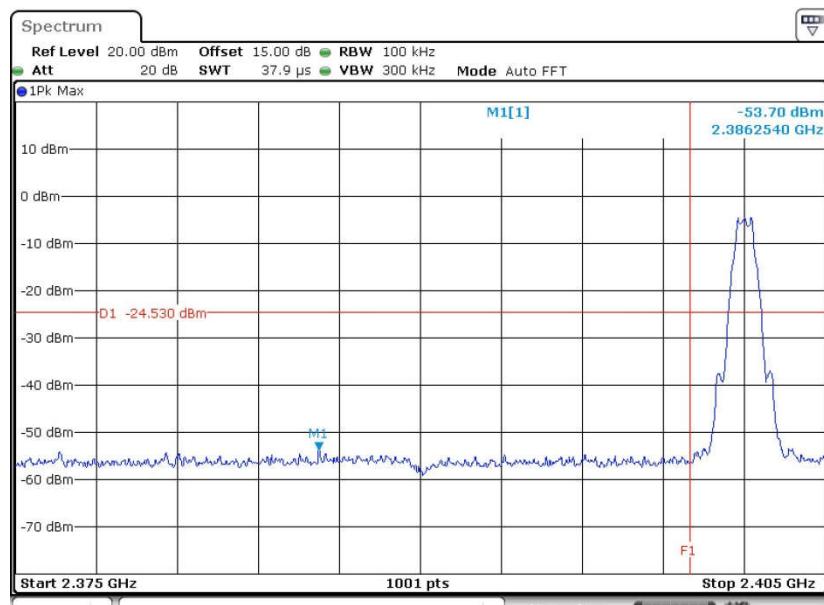



High Band Edge Plot on Channel 39

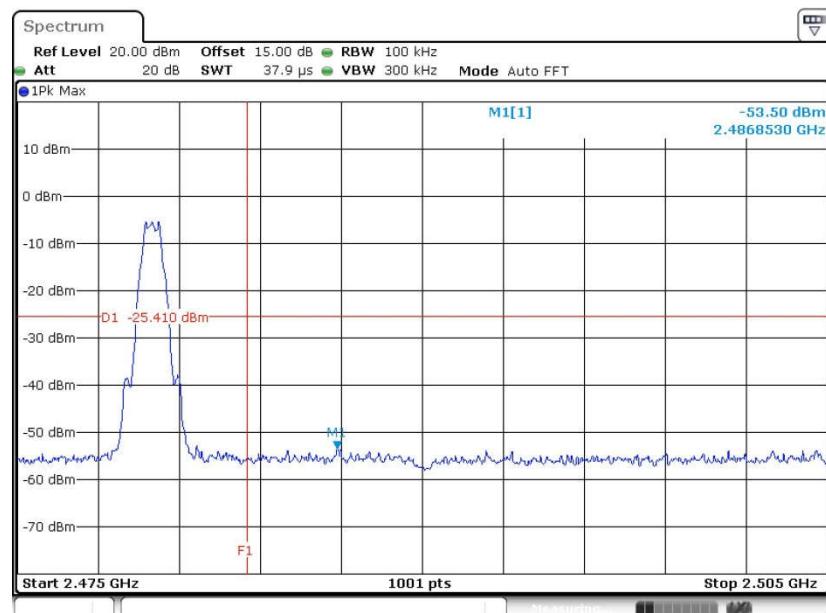




3.4.6 Test Result of Conducted Spurious Emission

Test Mode :	Bluetooth v4.0 LE	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Mygai Mo

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

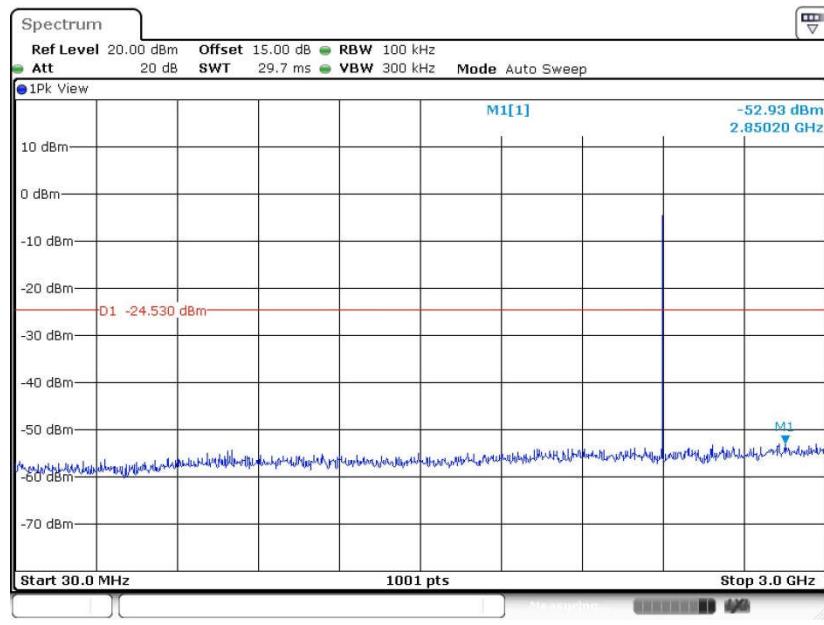




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

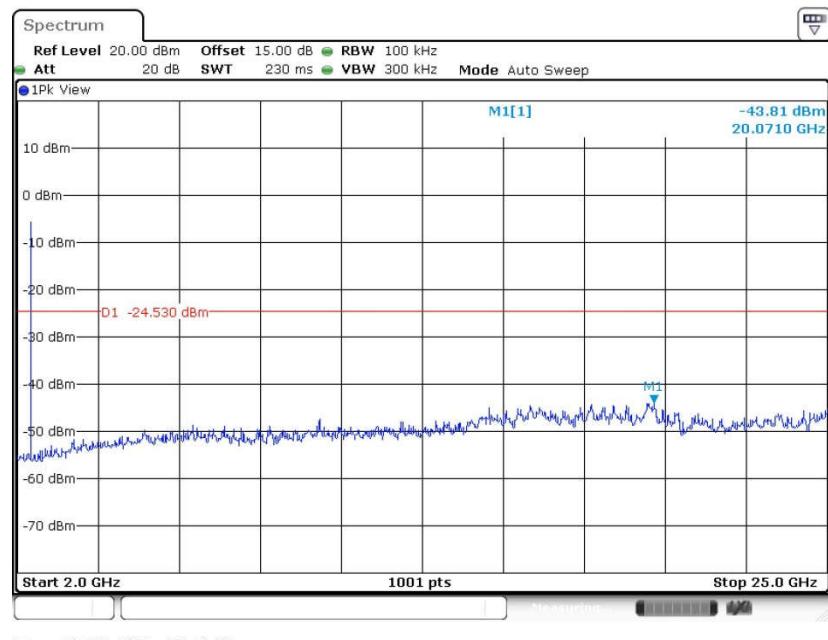



Test Mode :	Bluetooth v4.0 LE	Temperature :	24~26°C
Test Channel :	19	Relative Humidity :	50~53%
		Test Engineer :	Mygai Mo

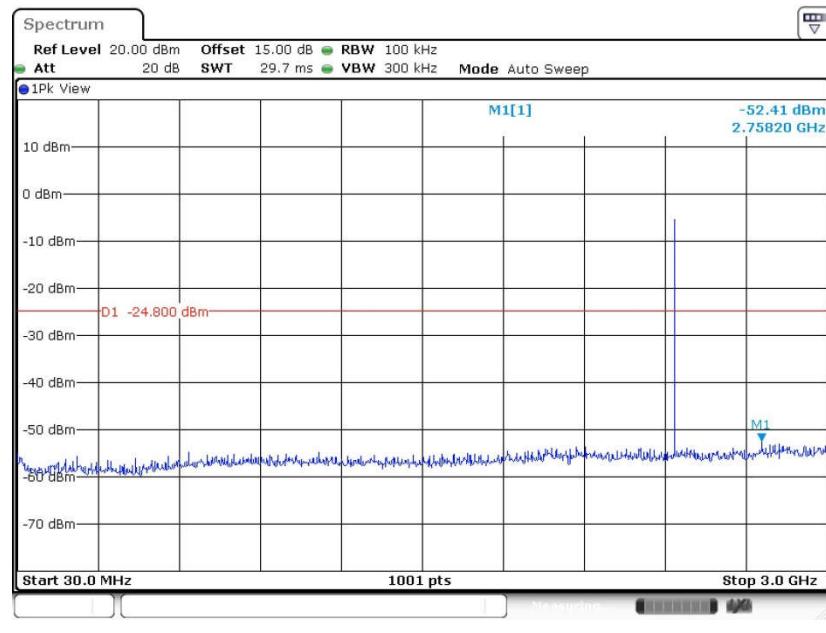
Conducted Spurious Emission Plot on Bluetooth LE 1Mbps**GFSK Channel 19**

Date: 16.OCT.2015 23:21:42




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

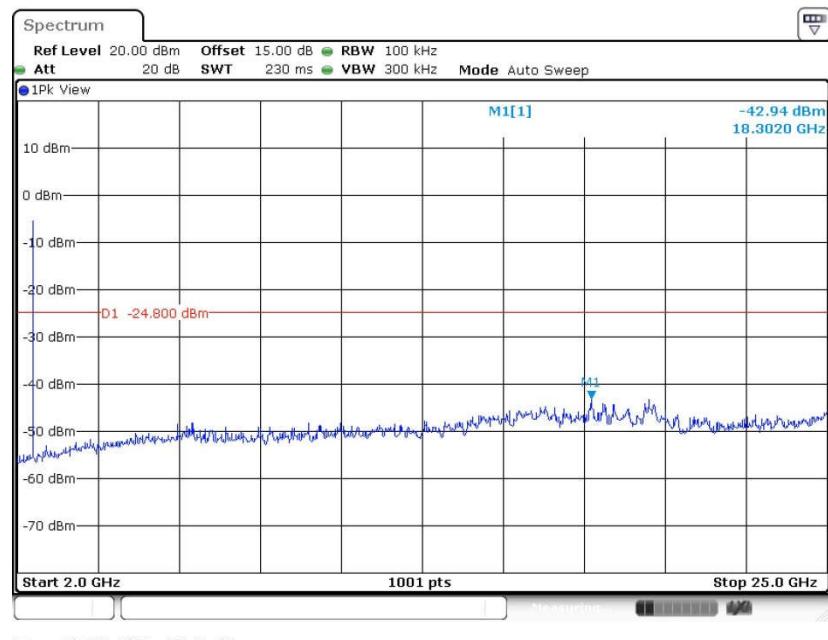




Test Mode :	Bluetooth v4.0 LE	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Mygai Mo

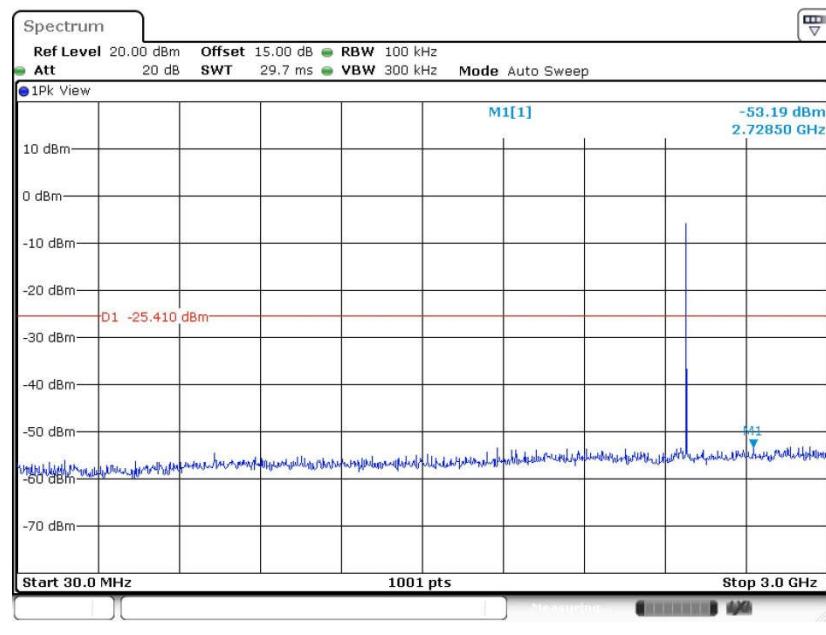Conducted Spurious Emission Plot on Bluetooth LE 1Mbps**GFSK Channel 39**



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

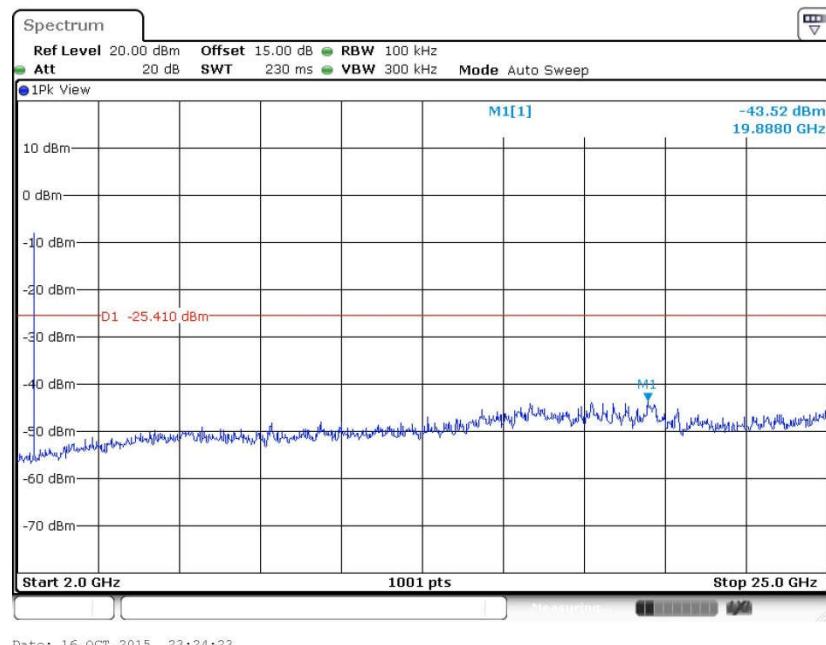



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth v4.0 LE	59.75	0.38	2.63	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

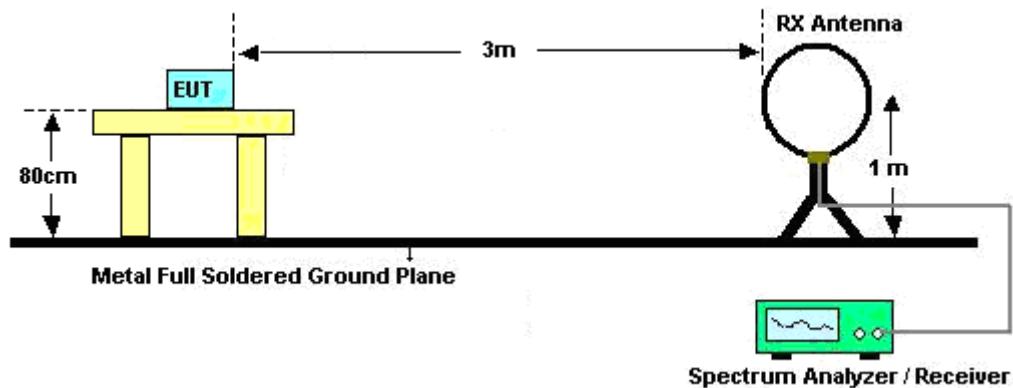

For radiated emissions from 30MHz to 1GHz

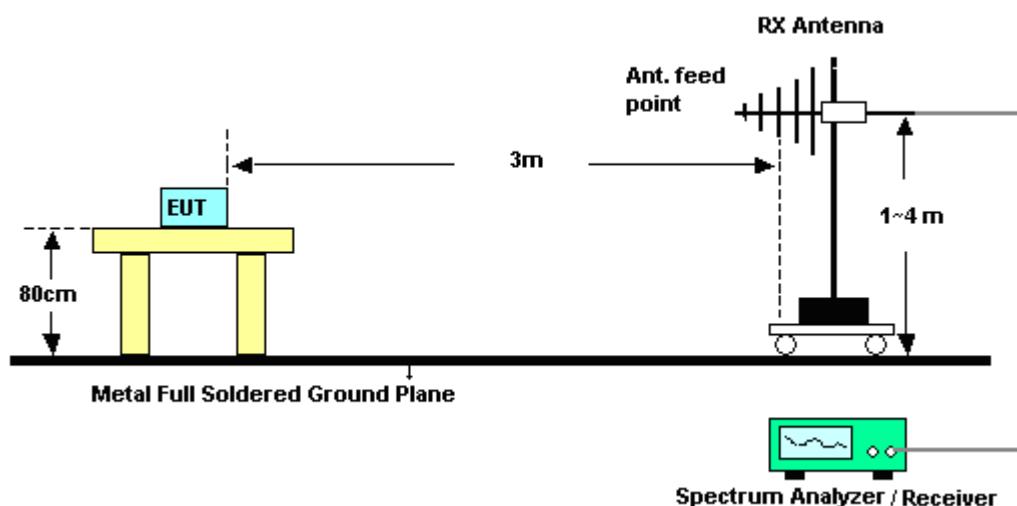

For radiated emissions above 1GHz

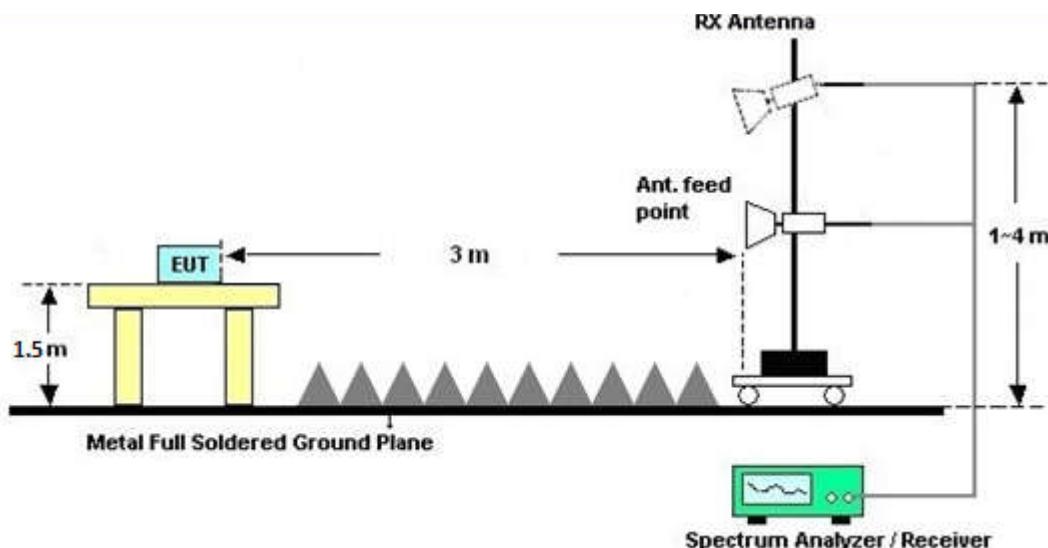

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

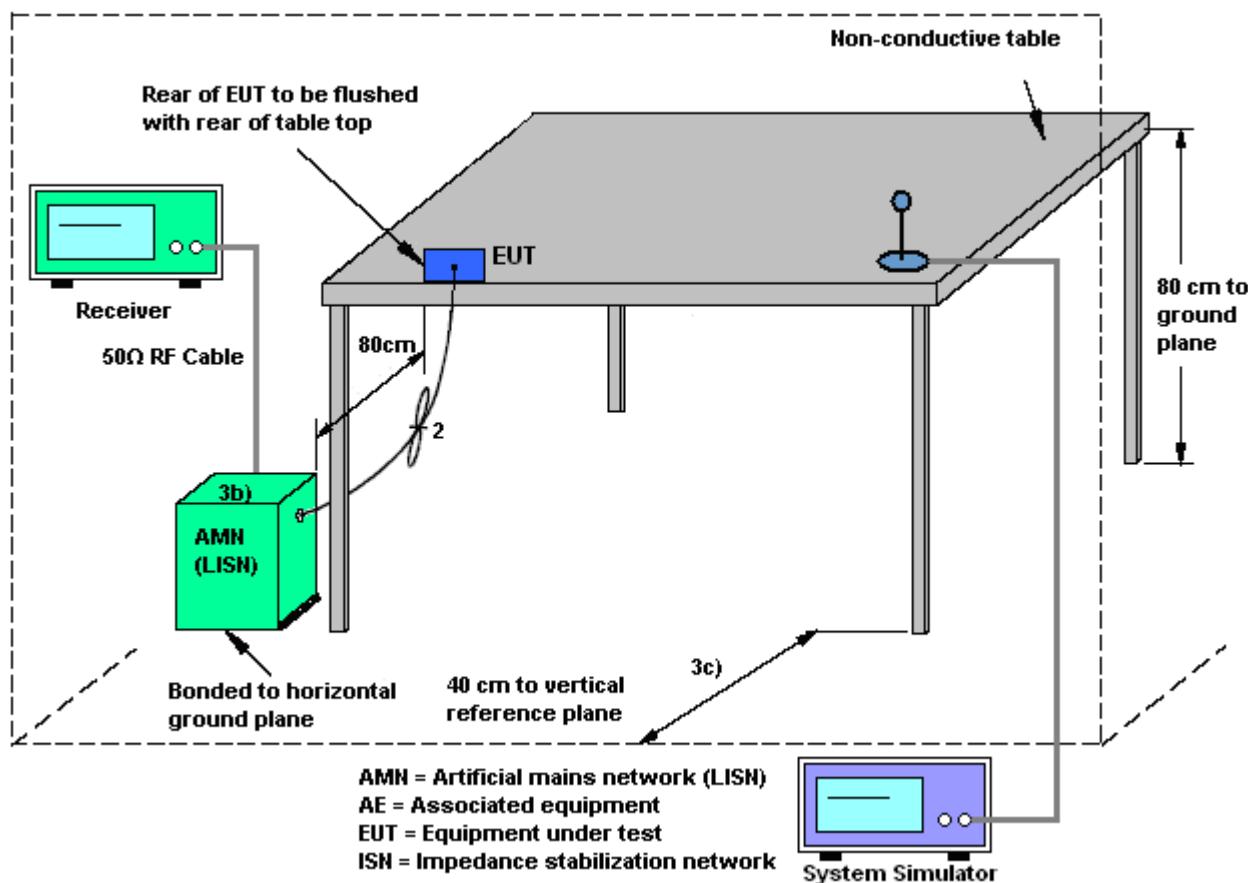




3.6.5 Test Result of AC Conducted Emission

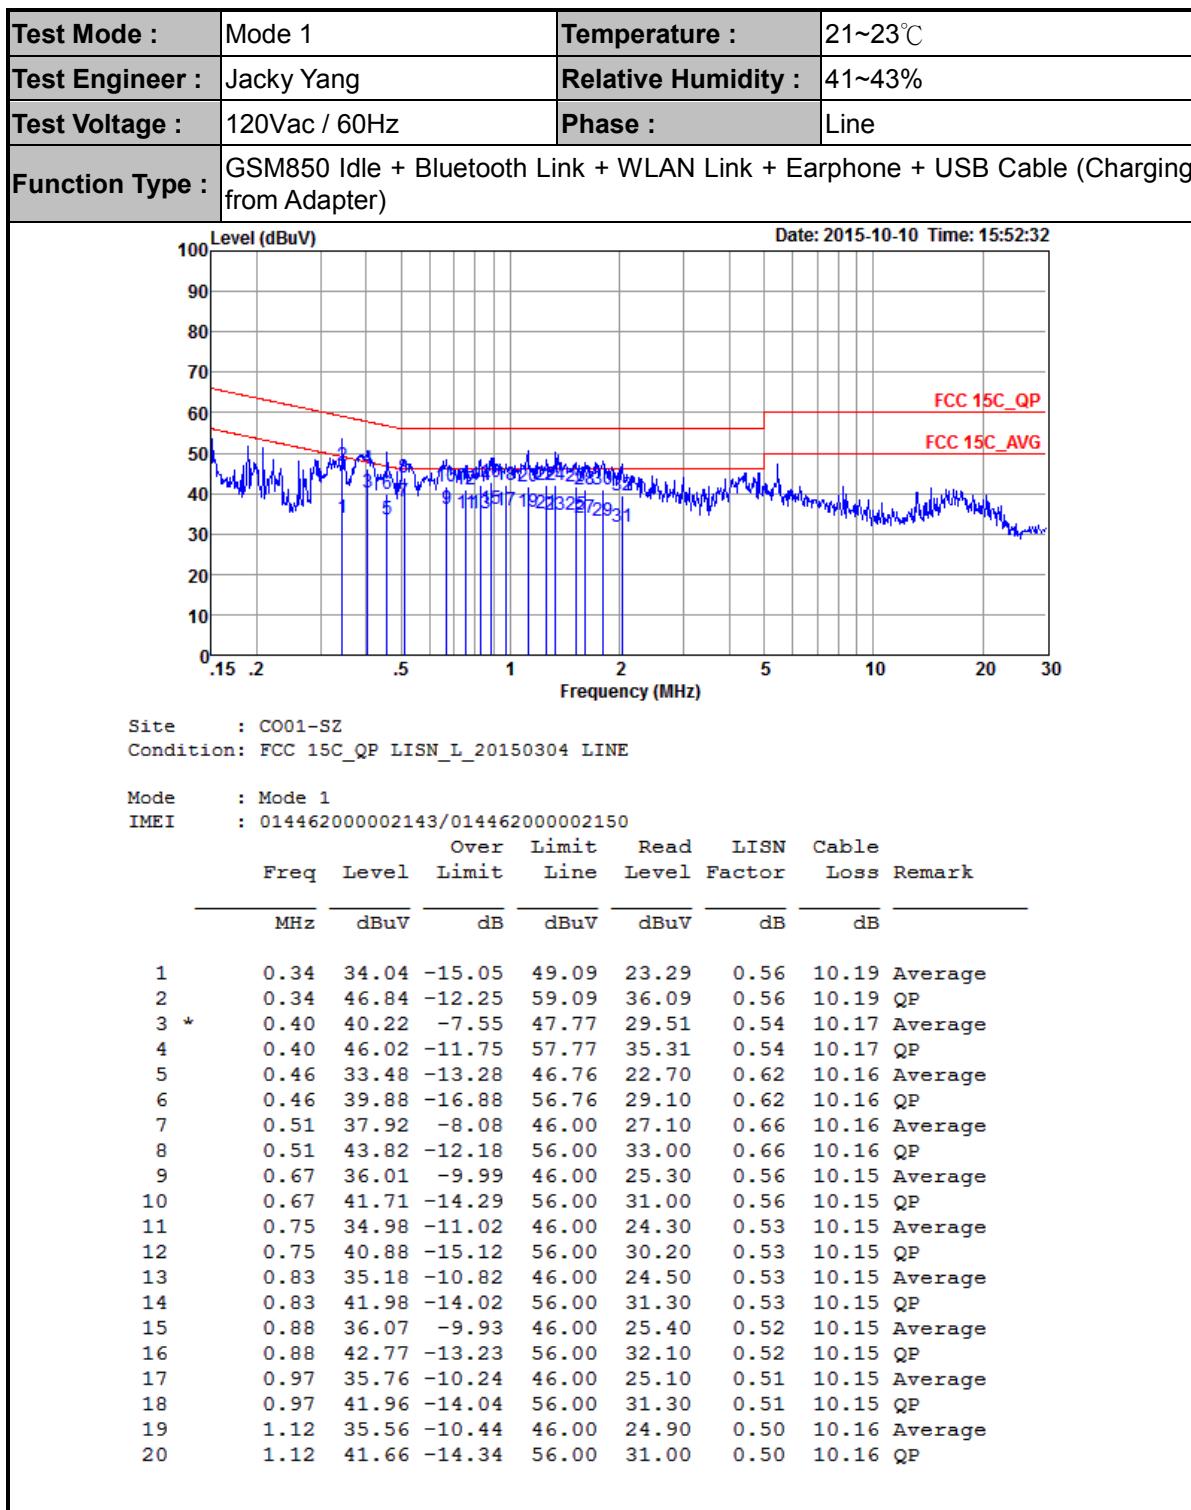



Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Jacky Yang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

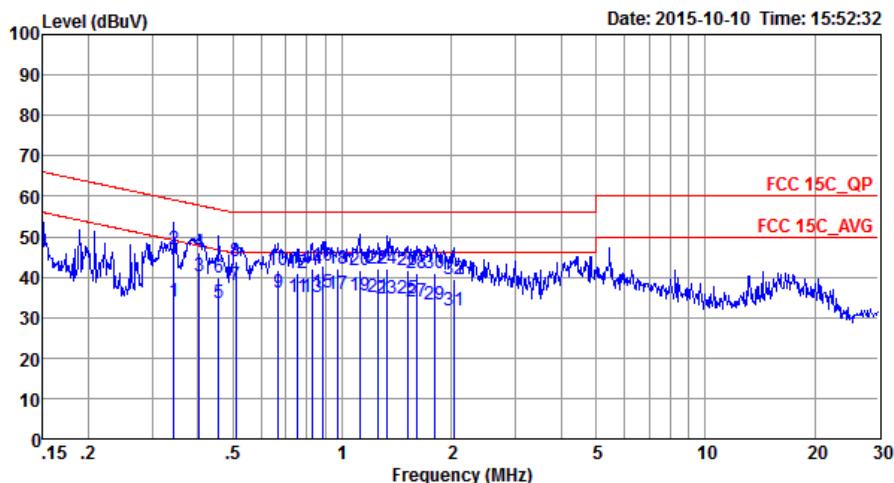

Site : C001-SZ
Condition: FCC 15C_QP LISN_L_20150304 LINE

Mode : Mode 1
IMEI : 014462000002143/014462000002150

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	Level	Factor	dBuV	dB	

MHz	dBuV		dB	dBuV	dBuV	dB	dB
21	1.26	35.16	-10.84	46.00	24.51	0.49	10.16 Average
22	1.26	42.06	-13.94	56.00	31.41	0.49	10.16 QP
23	1.33	34.86	-11.14	46.00	24.20	0.49	10.17 Average
24	1.33	42.06	-13.94	56.00	31.40	0.49	10.17 QP
25	1.51	34.75	-11.25	46.00	24.10	0.48	10.17 Average
26	1.51	41.85	-14.15	56.00	31.20	0.48	10.17 QP
27	1.61	33.85	-12.15	46.00	23.19	0.48	10.18 Average
28	1.61	41.05	-14.95	56.00	30.39	0.48	10.18 QP
29	1.80	33.05	-12.95	46.00	22.40	0.47	10.18 Average
30	1.80	40.85	-15.15	56.00	30.20	0.47	10.18 QP
31	2.03	31.75	-14.25	46.00	21.10	0.46	10.19 Average
32	2.03	39.35	-16.65	56.00	28.70	0.46	10.19 QP



Test Mode :	Mode 1	Temperature :	21~23°C																																																																																																																																																																																																																
Test Engineer :	Jacky Yang	Relative Humidity :	41~43%																																																																																																																																																																																																																
Test Voltage :	120Vac / 60Hz	Phase :	Neutral																																																																																																																																																																																																																
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)																																																																																																																																																																																																																		
<p>Date: 2015-10-10 Time: 15:46:05</p>																																																																																																																																																																																																																			
<p>Site : C001-SZ Condition: FCC 15C_QP LISN_N_20150304 NEUTRAL</p> <p>Mode : Mode 1 IMEI : 014462000002143/014462000002150</p> <table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Over Limit</th> <th>Read Line</th> <th>LISN Level</th> <th>Cable Factor</th> <th>Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>1.23</td><td>25.92</td><td>-20.08</td><td>46.00</td><td>15.20</td><td>0.56</td><td>10.16 Average</td></tr> <tr><td>2</td><td>1.23</td><td>39.12</td><td>-16.88</td><td>56.00</td><td>28.40</td><td>0.56</td><td>10.16 QP</td></tr> <tr><td>3</td><td>1.30</td><td>26.03</td><td>-19.97</td><td>46.00</td><td>15.31</td><td>0.56</td><td>10.16 Average</td></tr> <tr><td>4</td><td>1.30</td><td>38.53</td><td>-17.47</td><td>56.00</td><td>27.81</td><td>0.56</td><td>10.16 QP</td></tr> <tr><td>5</td><td>1.37</td><td>26.43</td><td>-19.57</td><td>46.00</td><td>15.70</td><td>0.56</td><td>10.17 Average</td></tr> <tr><td>6</td><td>1.37</td><td>38.13</td><td>-17.87</td><td>56.00</td><td>27.40</td><td>0.56</td><td>10.17 QP</td></tr> <tr><td>7</td><td>1.51</td><td>27.84</td><td>-18.16</td><td>46.00</td><td>17.10</td><td>0.57</td><td>10.17 Average</td></tr> <tr><td>8</td><td>1.51</td><td>40.34</td><td>-15.66</td><td>56.00</td><td>29.60</td><td>0.57</td><td>10.17 QP</td></tr> <tr><td>9</td><td>1.65</td><td>28.45</td><td>-17.55</td><td>46.00</td><td>17.70</td><td>0.57</td><td>10.18 Average</td></tr> <tr><td>10</td><td>1.65</td><td>40.25</td><td>-15.75</td><td>56.00</td><td>29.50</td><td>0.57</td><td>10.18 QP</td></tr> <tr><td>11</td><td>1.92</td><td>29.26</td><td>-16.74</td><td>46.00</td><td>18.50</td><td>0.57</td><td>10.19 Average</td></tr> <tr><td>12</td><td>1.92</td><td>40.66</td><td>-15.34</td><td>56.00</td><td>29.90</td><td>0.57</td><td>10.19 QP</td></tr> <tr><td>13</td><td>2.04</td><td>29.06</td><td>-16.94</td><td>46.00</td><td>18.30</td><td>0.57</td><td>10.19 Average</td></tr> <tr><td>14</td><td>2.04</td><td>40.16</td><td>-15.84</td><td>56.00</td><td>29.40</td><td>0.57</td><td>10.19 QP</td></tr> <tr><td>15</td><td>2.40</td><td>28.78</td><td>-17.22</td><td>46.00</td><td>17.99</td><td>0.59</td><td>10.20 Average</td></tr> <tr><td>16</td><td>2.40</td><td>41.38</td><td>-14.62</td><td>56.00</td><td>30.59</td><td>0.59</td><td>10.20 QP</td></tr> <tr><td>17</td><td>3.80</td><td>32.15</td><td>-13.85</td><td>46.00</td><td>21.30</td><td>0.63</td><td>10.22 Average</td></tr> <tr><td>18</td><td>3.80</td><td>40.65</td><td>-15.35</td><td>56.00</td><td>29.80</td><td>0.63</td><td>10.22 QP</td></tr> <tr><td>19</td><td>4.03</td><td>33.36</td><td>-12.64</td><td>46.00</td><td>22.50</td><td>0.63</td><td>10.23 Average</td></tr> <tr><td>20</td><td>4.03</td><td>41.36</td><td>-14.64</td><td>56.00</td><td>30.50</td><td>0.63</td><td>10.23 QP</td></tr> <tr><td>21 *</td><td>4.34</td><td>33.77</td><td>-12.23</td><td>46.00</td><td>22.90</td><td>0.64</td><td>10.23 Average</td></tr> <tr><td>22</td><td>4.34</td><td>41.47</td><td>-14.53</td><td>56.00</td><td>30.60</td><td>0.64</td><td>10.23 QP</td></tr> <tr><td>23</td><td>4.80</td><td>32.49</td><td>-13.51</td><td>46.00</td><td>21.60</td><td>0.65</td><td>10.24 Average</td></tr> <tr><td>24</td><td>4.80</td><td>40.29</td><td>-15.71</td><td>56.00</td><td>29.40</td><td>0.65</td><td>10.24 QP</td></tr> </tbody> </table>					Freq	Over Limit	Read Line	LISN Level	Cable Factor	Loss	Remark		MHz	dBuV	dB	dBuV	dB	dB		1	1.23	25.92	-20.08	46.00	15.20	0.56	10.16 Average	2	1.23	39.12	-16.88	56.00	28.40	0.56	10.16 QP	3	1.30	26.03	-19.97	46.00	15.31	0.56	10.16 Average	4	1.30	38.53	-17.47	56.00	27.81	0.56	10.16 QP	5	1.37	26.43	-19.57	46.00	15.70	0.56	10.17 Average	6	1.37	38.13	-17.87	56.00	27.40	0.56	10.17 QP	7	1.51	27.84	-18.16	46.00	17.10	0.57	10.17 Average	8	1.51	40.34	-15.66	56.00	29.60	0.57	10.17 QP	9	1.65	28.45	-17.55	46.00	17.70	0.57	10.18 Average	10	1.65	40.25	-15.75	56.00	29.50	0.57	10.18 QP	11	1.92	29.26	-16.74	46.00	18.50	0.57	10.19 Average	12	1.92	40.66	-15.34	56.00	29.90	0.57	10.19 QP	13	2.04	29.06	-16.94	46.00	18.30	0.57	10.19 Average	14	2.04	40.16	-15.84	56.00	29.40	0.57	10.19 QP	15	2.40	28.78	-17.22	46.00	17.99	0.59	10.20 Average	16	2.40	41.38	-14.62	56.00	30.59	0.59	10.20 QP	17	3.80	32.15	-13.85	46.00	21.30	0.63	10.22 Average	18	3.80	40.65	-15.35	56.00	29.80	0.63	10.22 QP	19	4.03	33.36	-12.64	46.00	22.50	0.63	10.23 Average	20	4.03	41.36	-14.64	56.00	30.50	0.63	10.23 QP	21 *	4.34	33.77	-12.23	46.00	22.90	0.64	10.23 Average	22	4.34	41.47	-14.53	56.00	30.60	0.64	10.23 QP	23	4.80	32.49	-13.51	46.00	21.60	0.65	10.24 Average	24	4.80	40.29	-15.71	56.00	29.40	0.65	10.24 QP
	Freq	Over Limit	Read Line	LISN Level	Cable Factor	Loss	Remark																																																																																																																																																																																																												
	MHz	dBuV	dB	dBuV	dB	dB																																																																																																																																																																																																													
1	1.23	25.92	-20.08	46.00	15.20	0.56	10.16 Average																																																																																																																																																																																																												
2	1.23	39.12	-16.88	56.00	28.40	0.56	10.16 QP																																																																																																																																																																																																												
3	1.30	26.03	-19.97	46.00	15.31	0.56	10.16 Average																																																																																																																																																																																																												
4	1.30	38.53	-17.47	56.00	27.81	0.56	10.16 QP																																																																																																																																																																																																												
5	1.37	26.43	-19.57	46.00	15.70	0.56	10.17 Average																																																																																																																																																																																																												
6	1.37	38.13	-17.87	56.00	27.40	0.56	10.17 QP																																																																																																																																																																																																												
7	1.51	27.84	-18.16	46.00	17.10	0.57	10.17 Average																																																																																																																																																																																																												
8	1.51	40.34	-15.66	56.00	29.60	0.57	10.17 QP																																																																																																																																																																																																												
9	1.65	28.45	-17.55	46.00	17.70	0.57	10.18 Average																																																																																																																																																																																																												
10	1.65	40.25	-15.75	56.00	29.50	0.57	10.18 QP																																																																																																																																																																																																												
11	1.92	29.26	-16.74	46.00	18.50	0.57	10.19 Average																																																																																																																																																																																																												
12	1.92	40.66	-15.34	56.00	29.90	0.57	10.19 QP																																																																																																																																																																																																												
13	2.04	29.06	-16.94	46.00	18.30	0.57	10.19 Average																																																																																																																																																																																																												
14	2.04	40.16	-15.84	56.00	29.40	0.57	10.19 QP																																																																																																																																																																																																												
15	2.40	28.78	-17.22	46.00	17.99	0.59	10.20 Average																																																																																																																																																																																																												
16	2.40	41.38	-14.62	56.00	30.59	0.59	10.20 QP																																																																																																																																																																																																												
17	3.80	32.15	-13.85	46.00	21.30	0.63	10.22 Average																																																																																																																																																																																																												
18	3.80	40.65	-15.35	56.00	29.80	0.63	10.22 QP																																																																																																																																																																																																												
19	4.03	33.36	-12.64	46.00	22.50	0.63	10.23 Average																																																																																																																																																																																																												
20	4.03	41.36	-14.64	56.00	30.50	0.63	10.23 QP																																																																																																																																																																																																												
21 *	4.34	33.77	-12.23	46.00	22.90	0.64	10.23 Average																																																																																																																																																																																																												
22	4.34	41.47	-14.53	56.00	30.60	0.64	10.23 QP																																																																																																																																																																																																												
23	4.80	32.49	-13.51	46.00	21.60	0.65	10.24 Average																																																																																																																																																																																																												
24	4.80	40.29	-15.71	56.00	29.40	0.65	10.24 QP																																																																																																																																																																																																												



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 05, 2015	Oct. 16, 2015	May 04, 2016	Conducted (TH01-SZ)
Pulse Power Senor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 28, 2015	Oct. 16, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 28, 2015	Oct. 16, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz; Max 30dBm	Oct. 20, 2015	Nov. 09, 2015	Oct. 19, 2016	Radiation (03CH02-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz; Max 30dBm	Oct. 20, 2015	Nov. 09, 2015	Oct. 19, 2016	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-ZZ	100354	9kHz~30MHz	May 06, 2015	Nov. 09, 2015	May 05, 2016	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	May 06, 2015	Nov. 09, 2015	May 05, 2016	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Jan. 20, 2015	Nov. 09, 2015	Jan. 19, 2016	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Aug. 17, 2015	Nov. 09, 2015	Aug. 16, 2016	Radiation (03CH02-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz ~3000MHz / 30 dB	Jan. 28, 2015	Nov. 09, 2015	Jan. 27, 2016	Radiation (03CH02-SZ)
Amplifier	Agilent	8449B	3008A01023	1GHz~26.5GHz	Oct. 20, 2015	Nov. 09, 2015	Oct. 19, 2016	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Nov. 09, 2015	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Nov. 09, 2015	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Nov. 09, 2015	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESCI7	100724	9kHz~3GHz;	Jan. 28, 2015	Oct. 10, 2015	Jan. 27, 2016	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	103892	9kHz~30MHz	Feb. 02, 2015	Oct. 10, 2015	Feb. 01, 2016	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	AN3016	16850	9kHz~30MHz	Feb. 02, 2015	Oct. 10, 2015	Feb. 01, 2016	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Aug. 07, 2015	Oct. 10, 2015	Aug. 06, 2016	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct. 14, 2014	Oct. 10, 2015	Oct. 13, 2015	Conduction (CO01-SZ)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.3dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
--	-------



Appendix A. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
												Limit	Line
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2376.24	41.64	-32.36	74	42.34	27.19	9.32	37.21	150	328	P	H
		2364.27	29.29	-24.71	54	30.15	27.13	9.2	37.19	150	328	A	H
	*	2402	83.88	-	-	84.54	27.25	9.32	37.23	150	328	P	H
	*	2402	83.2	-	-	83.86	27.25	9.32	37.23	150	328	A	H
		2358.42	41.3	-32.7	74	42.16	27.13	9.2	37.19	150	279	P	V
		2386.32	29.39	-24.61	54	30.05	27.25	9.32	37.23	150	279	A	V
	*	2402	85.8	-	-	86.46	27.25	9.32	37.23	150	279	P	V
	*	2402	85.05	-	-	85.71	27.25	9.32	37.23	150	279	A	V
BLE CH 19 2440MHz		2371.29	41.4	-32.6	74	42.1	27.19	9.32	37.21	150	300	P	H
		2370.48	29.2	-24.8	54	29.9	27.19	9.32	37.21	150	300	A	H
	*	2440	86.57	-	-	86.99	27.42	9.43	37.27	150	300	P	H
	*	2440	85.92	-	-	86.34	27.42	9.43	37.27	150	300	A	H
		2494.28	42.84	-31.16	74	42.9	27.6	9.66	37.32	150	300	P	H
		2497.76	29.95	-24.05	54	30.01	27.6	9.66	37.32	150	300	A	H
		2321.16	42.17	-31.83	74	43.23	27.01	9.09	37.16	150	240	P	V
		2388.48	29.23	-24.77	54	29.89	27.25	9.32	37.23	150	240	A	V
	*	2440	84.54	-	-	84.96	27.42	9.43	37.27	150	240	P	V
	*	2440	83.86	-	-	84.28	27.42	9.43	37.27	150	240	A	V
		2498.48	42.08	-31.92	74	42.14	27.6	9.66	37.32	150	240	P	V
		2485.64	29.93	-24.07	54	30.14	27.54	9.55	37.3	150	240	A	V



BLE CH 39 2480MHz	*	2480	82.7	-	-	82.91	27.54	9.55	37.3	150	222	P	H
	*	2480	82.03	-	-	82.24	27.54	9.55	37.3	150	222	A	H
		2486.08	42.23	-31.77	74	42.44	27.54	9.55	37.3	150	222	P	H
		2495.92	29.85	-24.15	54	29.91	27.6	9.66	37.32	150	222	A	H
	*	2480	84.96	-	-	85.17	27.54	9.55	37.3	150	240	P	V
	*	2480	84.2	-	-	84.41	27.54	9.55	37.3	150	240	A	V
		2494.04	42.37	-31.63	74	42.43	27.6	9.66	37.32	150	240	P	V
		2499.64	29.92	-24.08	54	29.98	27.6	9.66	37.32	150	240	A	V
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



15C 2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		4804	40.97	-33.03	74	53.12	31.22	13.27	56.64	150	360	P	H
		4804	39.68	-34.32	74	51.83	31.22	13.27	56.64	150	360	P	V
BLE CH 19 2440MHz		4880	39.78	-34.22	74	51.85	31.36	13.48	56.91	150	360	P	H
		7320	46.75	-27.25	74	52.04	35.98	16.59	57.86	150	360	P	H
		4880	40.18	-33.82	74	52.25	31.36	13.48	56.91	150	360	P	V
		7320	46.72	-27.28	74	52.01	35.98	16.59	57.86	150	360	P	V
BLE CH 39 2480MHz		4960	40.37	-33.63	74	51.4	31.53	13.69	56.25	150	360	P	H
		7440	45.59	-28.41	74	50.51	36.16	16.7	57.78	150	360	P	H
		4960	40.81	-33.19	74	51.84	31.53	13.69	56.25	150	360	P	V
		7440	47.11	-26.89	74	52.03	36.16	16.7	57.78	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		179.38	15.95	-27.55	43.5	32.48	11.33	2.58	30.44	-	-	P	H
		250.19	26.57	-19.43	46	41.76	12.1	3.06	30.35	-	-	P	H
		375.32	20.73	-25.27	46	31.72	15.5	3.67	30.16	-	-	P	H
		545.07	22.52	-23.48	46	29.36	18.6	4.42	29.86	-	-	P	H
		691.54	25.18	-20.82	46	30	19.83	5.01	29.66	-	-	P	H
		887.48	28.08	-17.92	46	29.96	21.8	5.58	29.26	164	138	P	H
		148.34	13.89	-29.61	43.5	29.89	12.14	2.33	30.47	-	-	P	V
		279.29	16.36	-29.64	46	29.83	13.78	3.06	30.31	-	-	P	V
		461.65	19.46	-26.54	46	28.03	17.39	4.05	30.01	-	-	P	V
		637.22	22.44	-23.56	46	27.98	19.5	4.69	29.73	-	-	P	V
		752.65	24.76	-21.24	46	28.83	20.33	5.13	29.53	-	-	P	V
		912.7	28.27	-17.73	46	29.93	21.8	5.76	29.22	155	216	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

**A calculation example for radiated spurious emission is shown as below:**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

$$1. \text{ Level(dB μ V/m)} =$$

$$= \text{Antenna Factor(dB/m)} + \text{Cable Loss(dB)} + \text{Read Level(dB μ V)} - \text{Preamp Factor(dB)}$$

$$2. \text{ Over Limit(dB)} = \text{Level(dB μ V/m)} - \text{Limit Line(dB μ V/m)}$$

For Peak Limit @ 2390MHz:

$$1. \text{ Level(dB μ V/m)}$$

$$= \text{Antenna Factor(dB/m)} + \text{Cable Loss(dB)} + \text{Read Level(dB μ V)} - \text{Preamp Factor(dB)}$$

$$= 32.22(\text{dB/m}) + 4.58(\text{dB}) + 54.51(\text{dB μ V}) - 35.86 (\text{dB})$$

$$= 55.45 (\text{dB μ V/m})$$

$$2. \text{ Over Limit(dB)}$$

$$= \text{Level(dB μ V/m)} - \text{Limit Line(dB μ V/m)}$$

$$= 55.45(\text{dB μ V/m}) - 74(\text{dB μ V/m})$$

$$= -18.55(\text{dB})$$

For Average Limit @ 2390MHz:

$$1. \text{ Level(dB μ V/m)}$$

$$= \text{Antenna Factor(dB/m)} + \text{Cable Loss(dB)} + \text{Read Level(dB μ V)} - \text{Preamp Factor(dB)}$$

$$= 32.22(\text{dB/m}) + 4.58(\text{dB}) + 42.6(\text{dB μ V}) - 35.86 (\text{dB})$$

$$= 43.54 (\text{dB μ V/m})$$

$$2. \text{ Over Limit(dB)}$$

$$= \text{Level(dB μ V/m)} - \text{Limit Line(dB μ V/m)}$$

$$= 43.54(\text{dB μ V/m}) - 54(\text{dB μ V/m})$$

$$= -10.46(\text{dB})$$

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. product equality declaration



5F, C building, No. 232, Liang Jing Road
ZhangJiang High-Tech Park, Pudong Area
Shanghai, P.R. China. 201203
TEL: +86(0)21 61460666
FAX: +86(0)21 61460602

Declaration of changes from Initial to Variant

General: 5022E is a variant product of 5022N

● **SOFTWARE MODIFICATIONS:**

- Protocol Stack changes: No
- MMS/STK/USAT/USIM changes: No
- DM/SUPL/VT/FUMO/SWP/HCI: No (indicated the changed items if yes)
- Other changes detailed: **Bluetooth Version change to 4.0 from 4.1 by software.**

● **HARDWARE MODIFICATIONS:**

- Band changes: Yes
 - 5022N(GSM 850/900/1800/1900 UMTS 850/1700/1900)
 - 5022E(GSM 850/900/1800/1900 UMTS 850/900/1900/2100)
- PCB Layout changes: No
- Main RF components changes:

	Antenna	AP	Modem	Transceiver	Power Amplifier	Rx SAW Filter	ASM
GSM850	YES	No	No	No	NO	NO	NO
GSM900	YES	No	No	No	NO	NO	NO
GSM1800	YES	No	No	No	NO	NO	NO
GSM1900	YES	No	No	No	NO	NO	NO

	Antenna	AP	Modem	Transceiver	Power Amplifier	Tx SAW Filter	Rx SAW Filter	Duplexer	ASM
UMTS2100	YES	no	No	No	Yes	Yes	NO	Yes	Yes
UMTS1900	YES	No	No	No	no	no	No	no	no
UMTS1700	no	NA	NA	NA	NA	NA	NA	NA	NA
UMTS900	YES	No	No	No	Yes	Yes	no	Yes	Yes
UMTS850	YES	No	No	No	No	No	no	No	No

Band x								
--------	--	--	--	--	--	--	--	--

	Antenna	AP	Modem	Transceiver	Power Amplifier	Balun	Band pass filter	Diplexer
Bluetooth	YES	No	No	No	No	No	No	No
Wi-Fi	YES	No	No	No	No	No	No	No

- FM changes: No
- LCD/ Speaker/ Camera/ Vibrator changes: (indicated the changed items if yes) No
- Other changes detailed: Yes,
5022E is SW 10M pixel(8MP) and SW 8M pixel(5MP), 5022N is 8M pixel and 5M pixel.


- **MECHANICAL MODIFICATIONS:**

- Use new metal front/back cover or keypad: No
- Mechanical shell changes:
Whole size of EUT: No
Distance of Ear reference point to bottom of handset: No
Other trinkets to change the surface of handset: No
- Other changes detailed:

Accessories	5022N		5022E	
	P/N	Model Name	P/N	Model Name
Battery	CAB2000013C2	TLi020F2	CAB2000010C1	TLi020F1
Headset	-	CCB0005A10C1	-	CCB3160A11C1

APPROVED BY:

Project Manager: Tiffany Tang



Signature:

Date:2015-11-10