



TEST REPORT

No. I16Z40549-EMC01

for

TCL Communication Ltd

CDMA/LTE/GSM/UMTS mobile phone

Model Name: 5027B

FCC ID: 2ACCJB053

with

Hardware Version: VC

Software Version: 5027BAS8

Issued Date: 2016-04-06

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No.525429

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I16Z40549-EMC01	Rev.0	1 st edition	2016-04-06

CONTENTS

1. TEST LABORATORY.....	4
1.1. TESTING LOCATION.....	4
1.2. TESTING ENVIRONMENT.....	4
1.3. PROJECT DATA.....	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China
100191

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2016-03-25
Testing End Date: 2016-04-02

1.4. Signature




Zhang Hui

(Prepared this test report)



Qu Pengfei

(Reviewed this test report)



Liu Baodian

Deputy Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: P. R. China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@tcl.com
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: P. R. China
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	CDMA/LTE/GSM/UMTS mobile phone
Model Name	5027B
FCC ID	2ACCJB053
Extreme vol. Limits	3.6VDC to 4.4VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT3	357907070001438	VC	5027BAS8

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	16TCT-BA-0359
AE2	Battery	/	16TCT-BA-0360
AE3	Battery	/	16TCT-BA-0354
AE4	USB Cable	/	16TCT-DC-0207
AE5	USB Cable	/	16TCT-DC-0209
AE6	USB Cable	/	16TCT-DC-0210
AE7	Travel charger	/	16TCT-CH-0444
AE8	Travel charger	/	16TCT-CH-0436
AE9	Travel charger	/	16TCT-CH-0448

AE1,AE2,AE3

Model	CAB1780002C1
Manufacturer	BYD
Capacitance	1780mAh
Nominal voltage	3.8V

AE4,AE5,AE6

Model	CDA3122005C1
Manufacturer	/
Length of cable	101cm

AE7,AE8,AE9

Model	CBA0058AG0C2
Manufacturer	TEN PAO
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT3 + AE1 + AE3 + AE5	Charging mode
Set.2	EUT3 + AE1 + AE3 + AE7	USB mode

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	10-1-14
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low - Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	Edition 2014

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz – 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:				
Verdict Column	P	Pass		
	NA	Not applicable		
	F	Fail		
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report		

Items	Test Name	Clause in FCC rules	Clause in IC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	Section 5	B.1	P	A
2	Conducted Emission	15.107(a)	Section 5	B.2	P	A

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTUR E	CAL DUE DATE	CALIBRATI ON INTERVAL
1	Test Receiver	ESU26	100235	R&S	2017-03-02	1 year
2	Universal Radio Communication Tester	CMW500	143008	R&S	2016-12-09	1 year
3	LISN	ENV216	101200	R&S	2016-07-07	1 year
4	EMI Antenna	VULB 9163	9163-301	Schwarzbeck	2017-12-16	3 years
5	EMI Antenna	3115	6914	ETS-Lindgren	2016-12-15	3 years
6	Test Receiver	ESCI7	100948	R&S	2016-07-07	1 year
7	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
9	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A	N/A
10	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit (μ V/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{RPL} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{RPL} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): $U = 4.3 \text{ dB}$, $k=2$.

Measurement results for Set.1:

Charging Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17967.700	51.1	-17.7	45.6	23.200	HORIZONTAL
17846.150	50.8	-18.5	45.6	23.700	VERTICAL
17943.050	50.7	-17.7	45.6	22.800	VERTICAL
17954.100	50.7	-17.7	45.6	22.800	HORIZONTAL
17989.800	50.5	-17.7	45.6	22.600	HORIZONTAL
17937.950	50.5	-17.7	45.6	22.600	HORIZONTAL

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17915.000	62.2	-17.7	45.6	34.300	VERTICAL
17832.550	62.1	-18.5	45.6	35.000	HORIZONTAL
17986.400	61.7	-17.7	45.6	33.800	VERTICAL
17950.700	61.3	-17.7	45.6	33.400	HORIZONTAL
17853.800	61.2	-18.5	45.6	34.100	HORIZONTAL
17995.750	61.1	-17.7	45.6	33.200	VERTICAL

Measurement results for Set.2:
USB Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{mea} (dB μ V)	Polarity
17988.100	51.0	-17.7	45.6	23.100	HORIZONTAL
17961.750	50.9	-17.7	45.6	23.000	HORIZONTAL
17912.450	50.7	-18.5	45.6	23.600	VERTICAL
17996.600	50.6	-17.7	45.6	22.700	HORIZONTAL
17928.600	50.5	-17.7	45.6	22.600	VERTICAL
17923.500	50.5	-17.7	45.6	22.600	HORIZONTAL

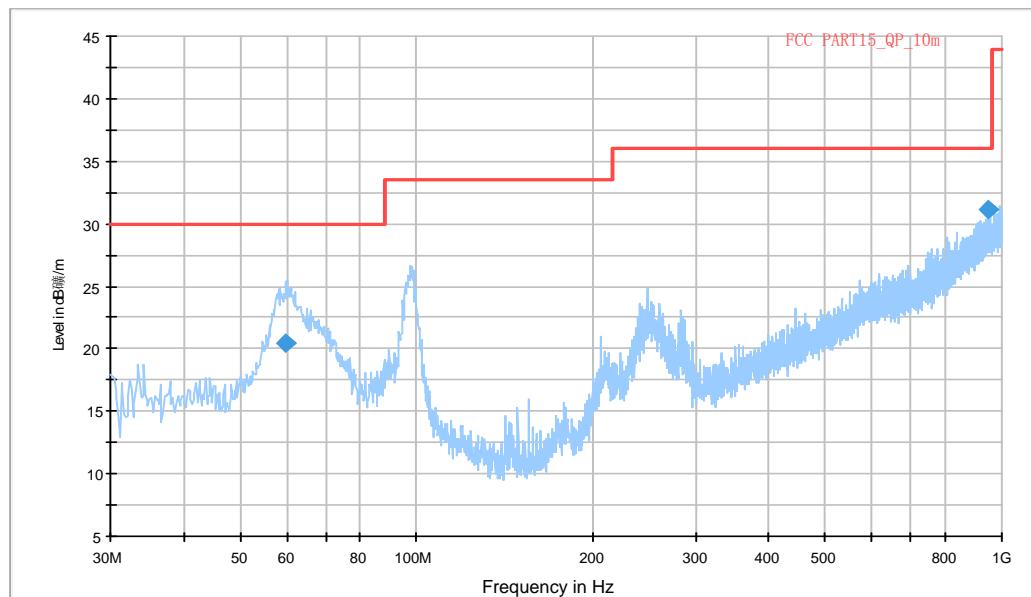
USB Mode/ Peak detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{mea} (dB μ V)	Polarity
17784.950	61.4	-18.5	45.6	34.300	HORIZONTAL
17870.800	61.4	-18.5	45.6	34.300	HORIZONTAL
17950.700	61.4	-17.7	45.6	33.500	VERTICAL
17923.500	61.2	-17.7	45.6	33.300	HORIZONTAL
17903.950	61.1	-18.5	45.6	34.000	HORIZONTAL
17909.050	61.1	-18.5	45.6	34.000	VERTICAL

Note: The measurement results of Set.1 and Set.2 showed here are worst cases of the combinations of different batteries and USB cables.

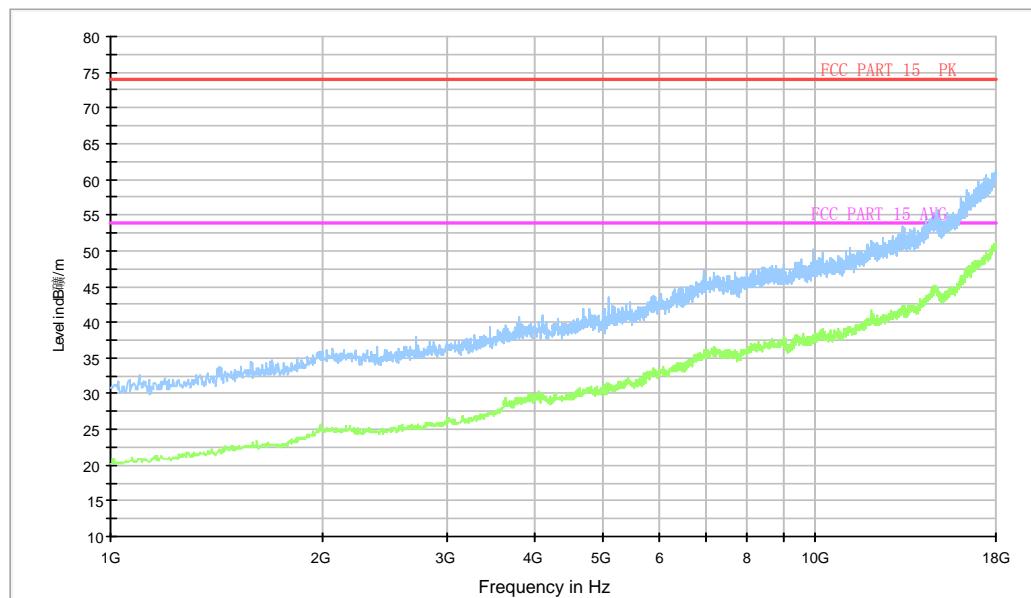
Charging Mode, Set.1

Normal RE_30M-1GHz_10m


Figure A.1 Radiated Emission from 30MHz to 1GHz
Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
59.770000	20.4	105.0	V	61.0	-12.1	9.6	30.0
947.403000	31.2	107.0	V	60.0	2.9	4.8	36.0

Normal RE_1G-18GHz


Figure A.2 Radiated Emission from 1GHz to 18GHz

USB Mode, Set.2

Normal RE_30M-1GHz_10m

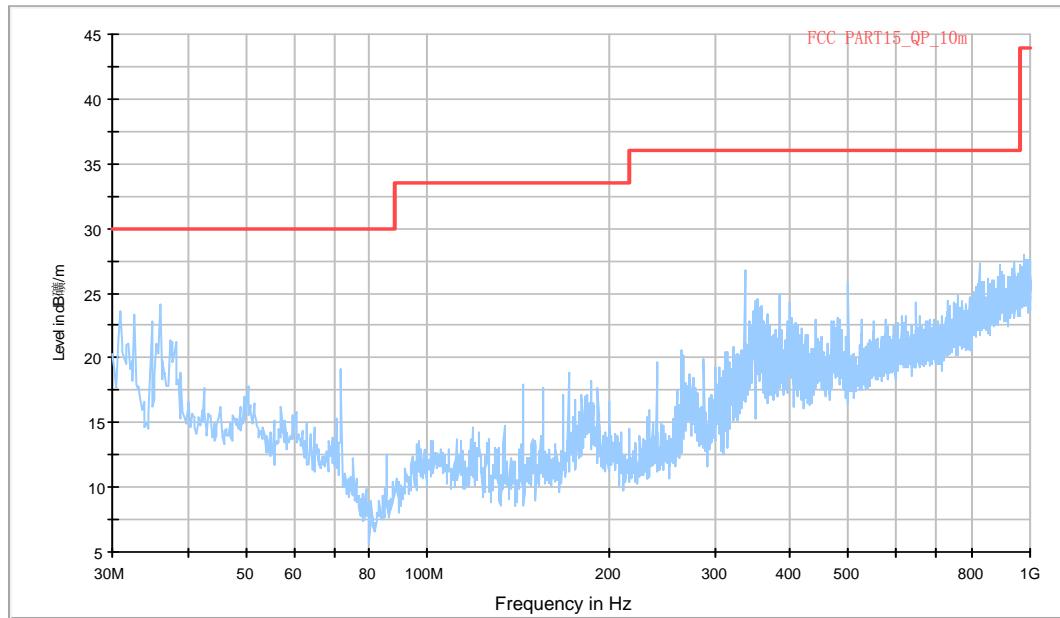


Figure A.3 Radiated Emission from 30MHz to 1GHz

Normal RE_1G-18GHz

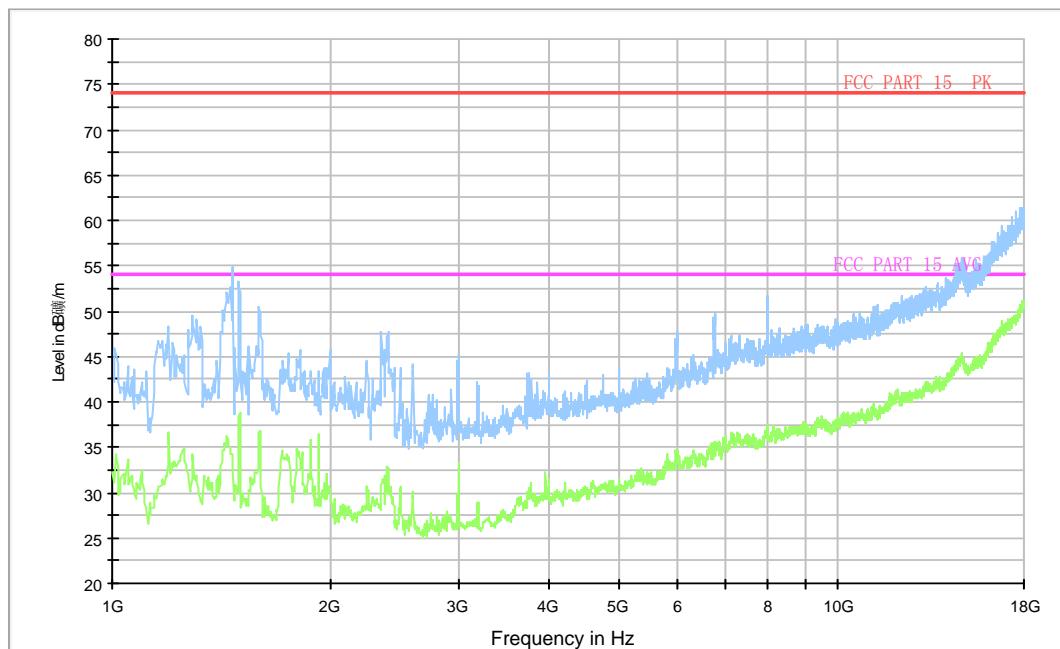


Figure A.4 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U = 2.9 \text{ dB}$, $k=2$.

Charging Mode, Set.1

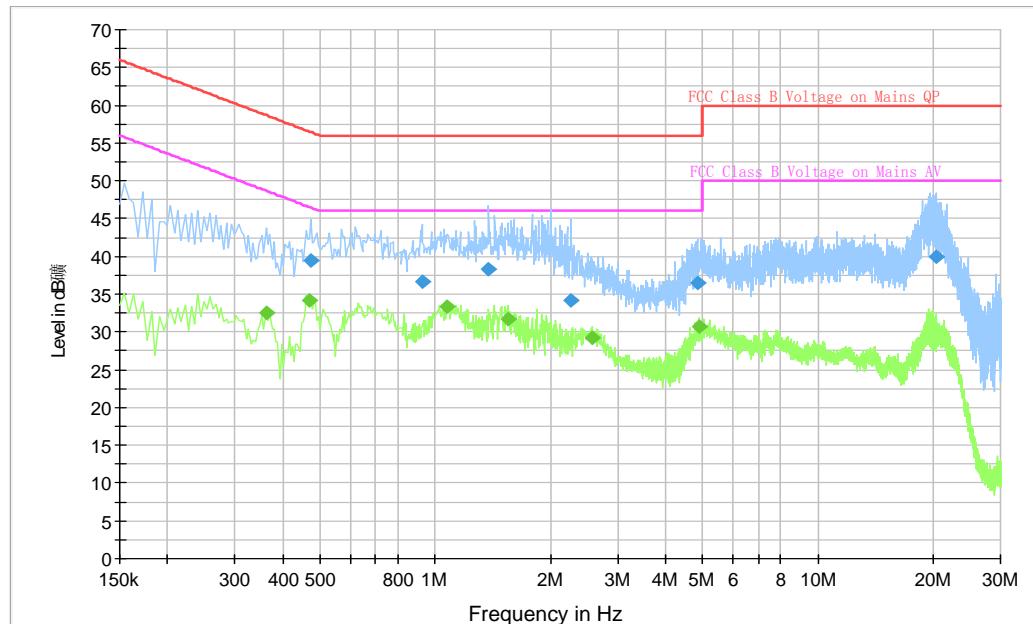


Figure A.5 Conducted Emission

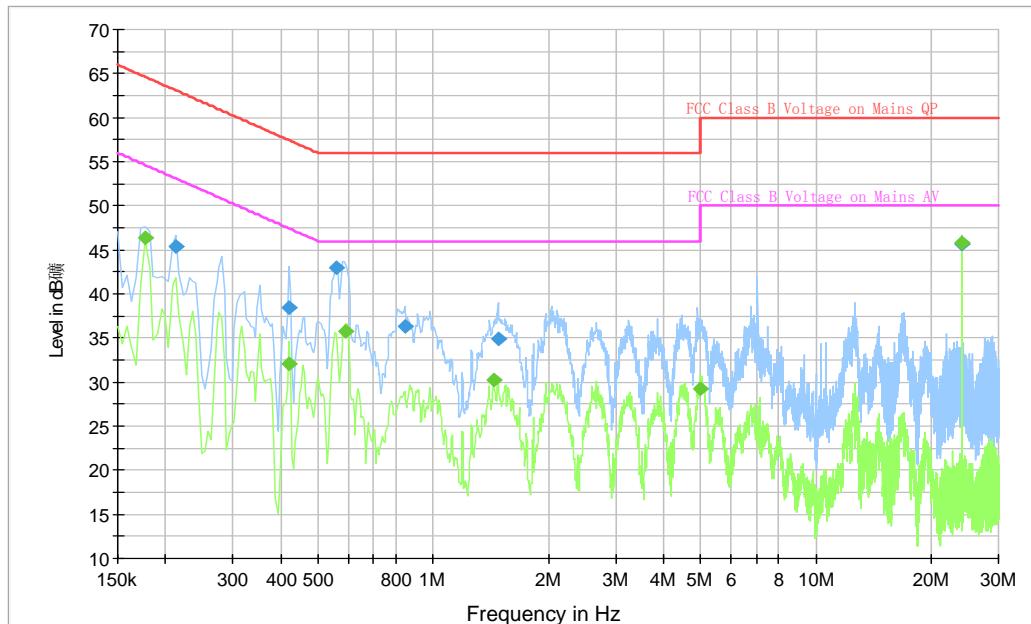
Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.474000	39.4	2000.0	9.000	On	L1	19.9	17.1	56.4
0.924000	36.7	2000.0	9.000	On	N	19.8	19.3	56.0
1.383000	38.2	2000.0	9.000	On	N	19.7	17.8	56.0
2.260500	34.2	2000.0	9.000	On	N	19.3	21.8	56.0
4.834500	36.4	2000.0	9.000	On	L1	19.6	19.6	56.0
20.301000	40.0	2000.0	9.000	On	L1	19.9	20.0	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.361500	32.5	2000.0	9.000	On	L1	19.8	16.2	48.7
0.469500	34.3	2000.0	9.000	On	L1	19.9	12.3	46.5
1.077000	33.3	2000.0	9.000	On	L1	19.7	12.7	46.0
1.545000	31.7	2000.0	9.000	On	L1	19.7	14.3	46.0
2.575500	29.2	2000.0	9.000	On	L1	19.0	16.8	46.0
4.893000	30.6	2000.0	9.000	On	L1	19.6	15.4	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

USB Mode, Set.2

Figure A.6 Conducted Emission
Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.213000	45.4	2000.0	9.000	On	N	19.8	17.7	63.1
0.420000	38.5	2000.0	9.000	On	L1	19.9	19.0	57.4
0.559500	43.0	2000.0	9.000	On	N	19.9	13.0	56.0
0.843000	36.3	2000.0	9.000	On	N	19.8	19.7	56.0
1.477500	35.0	2000.0	9.000	On	N	19.7	21.0	56.0
23.977500	45.7	2000.0	9.000	On	N	20.1	14.3	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.177000	46.4	2000.0	9.000	On	N	19.8	8.2	54.6
0.420000	32.0	2000.0	9.000	On	L1	19.9	15.4	47.4
0.591000	35.8	2000.0	9.000	On	L1	19.8	10.2	46.0
1.441500	30.2	2000.0	9.000	On	N	19.7	15.8	46.0
4.996500	29.3	2000.0	9.000	On	L1	19.6	16.7	46.0
23.977500	45.8	2000.0	9.000	On	N	20.1	4.2	50.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

*****END OF REPORT*****