



The Photos of SAR test

No. I16Z40549-SEM03

For

TCL Communication Ltd.

CDMA/LTE/GSM/UMTS mobile phone

Model Name: 5027B

With

Hardware Version: VC

Software Version: 5027BAS8

FCC ID: 2ACCJB053

Issued Date: 2016-04-13



Note:


The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:


CTT, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT
No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China 100191
Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504
Email: ctl_terminals@catr.cn, website: www.chinatl.com




Picture 1: Constituents of the sample

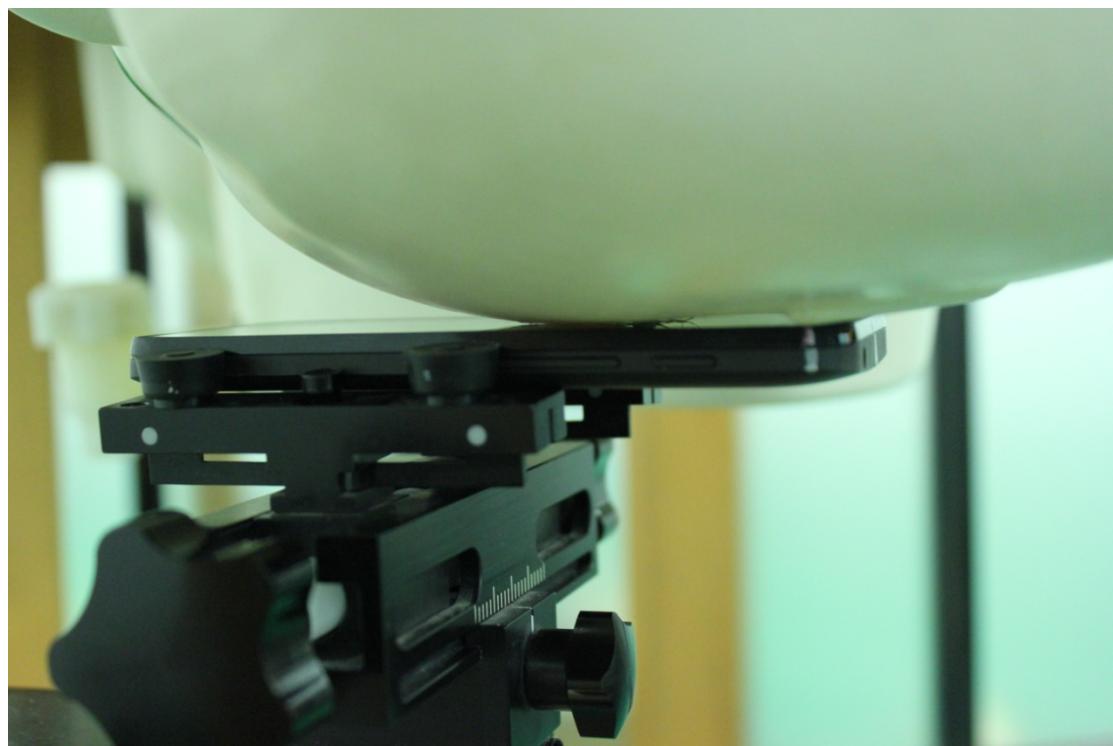


Picture 2: Left Hand Touch Cheek Position

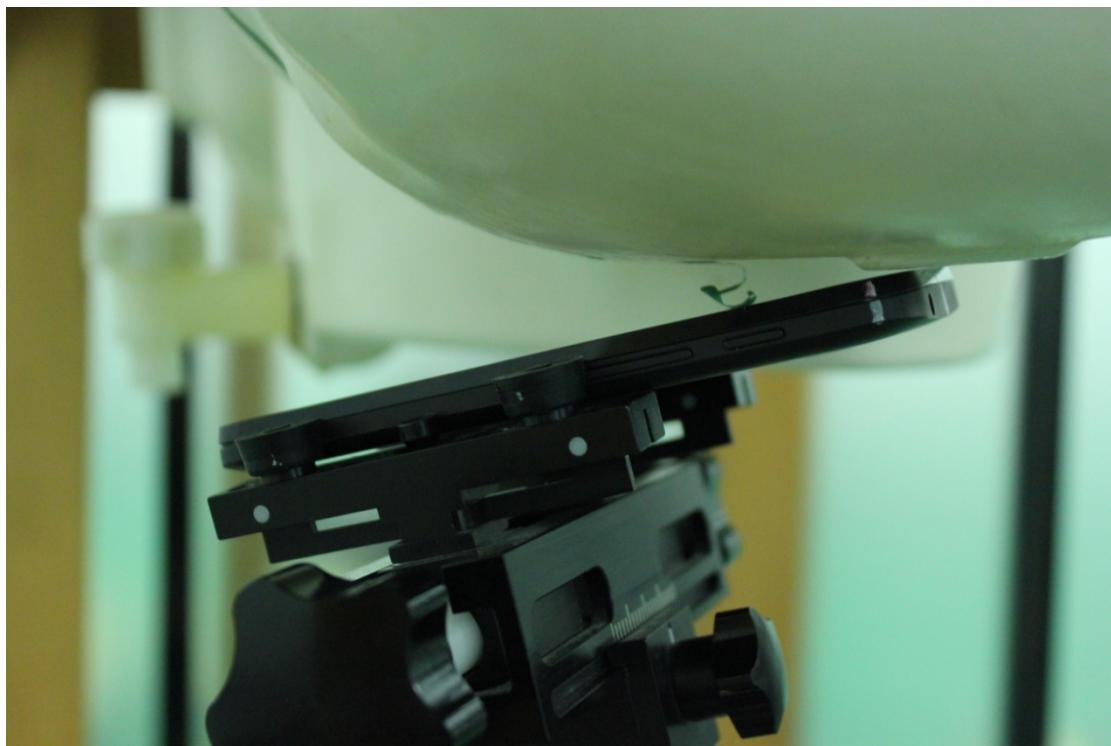

Picture 3: Left Hand Tilt 15° Position

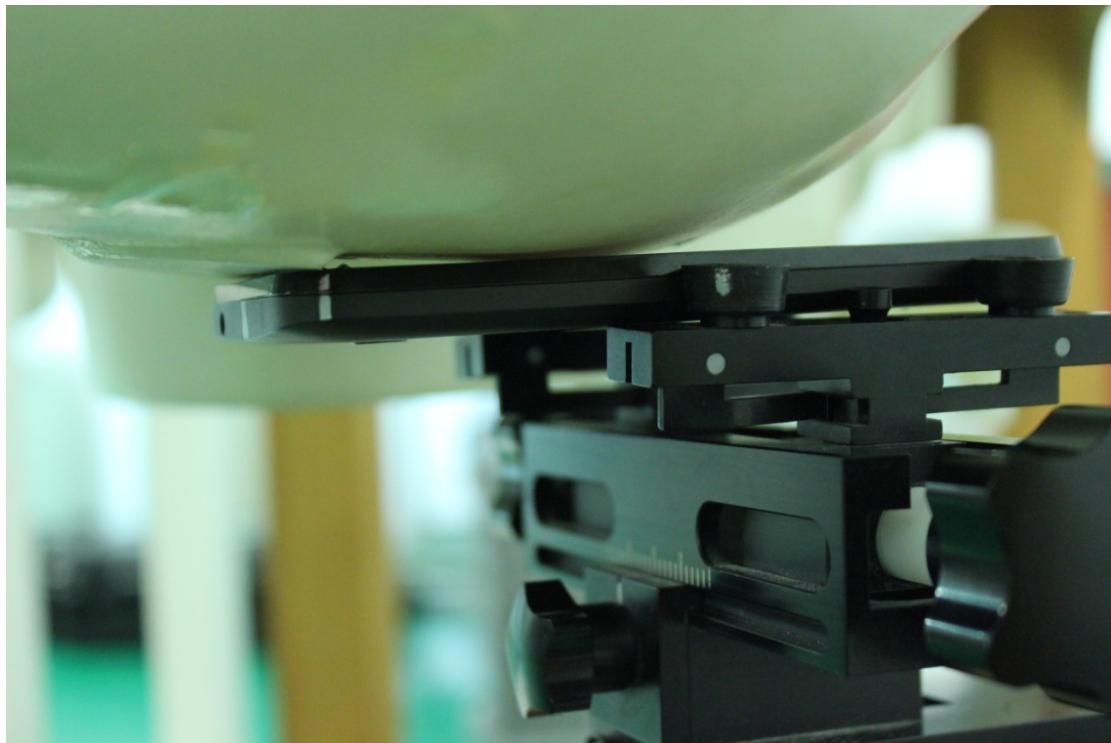

Picture 4: Right Hand Touch Cheek Position

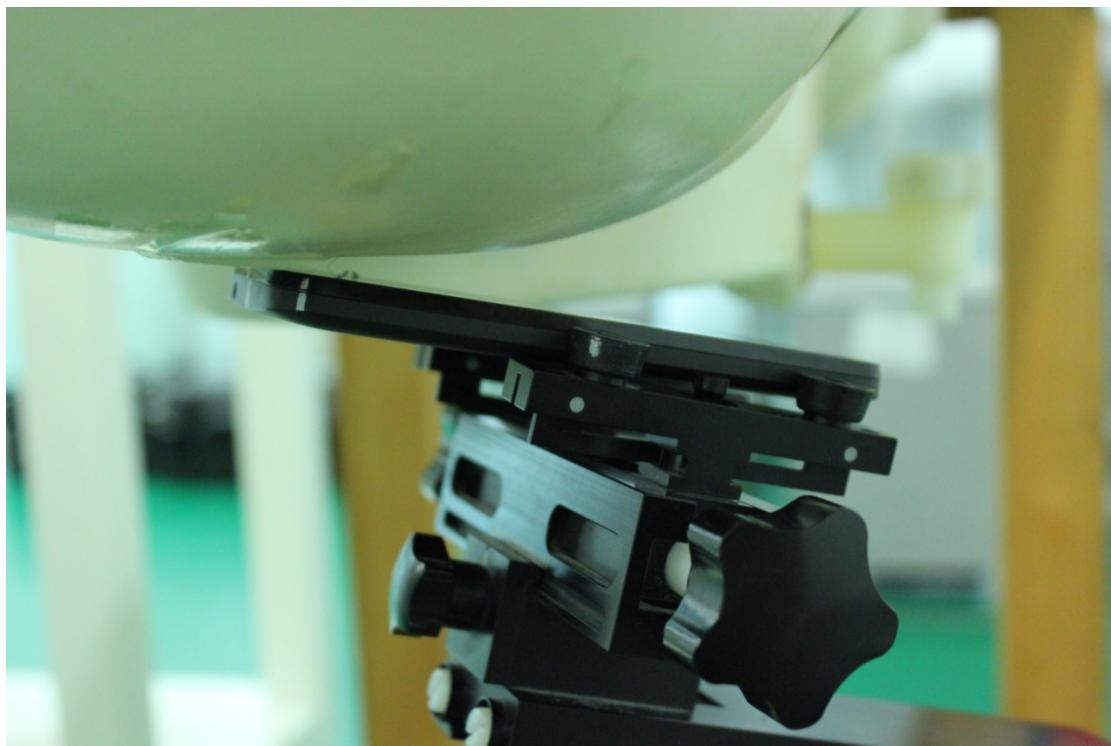


Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance = 10mm or 15mm between the EUT and the phantom bottom:



Picture 6: Front – 10mm

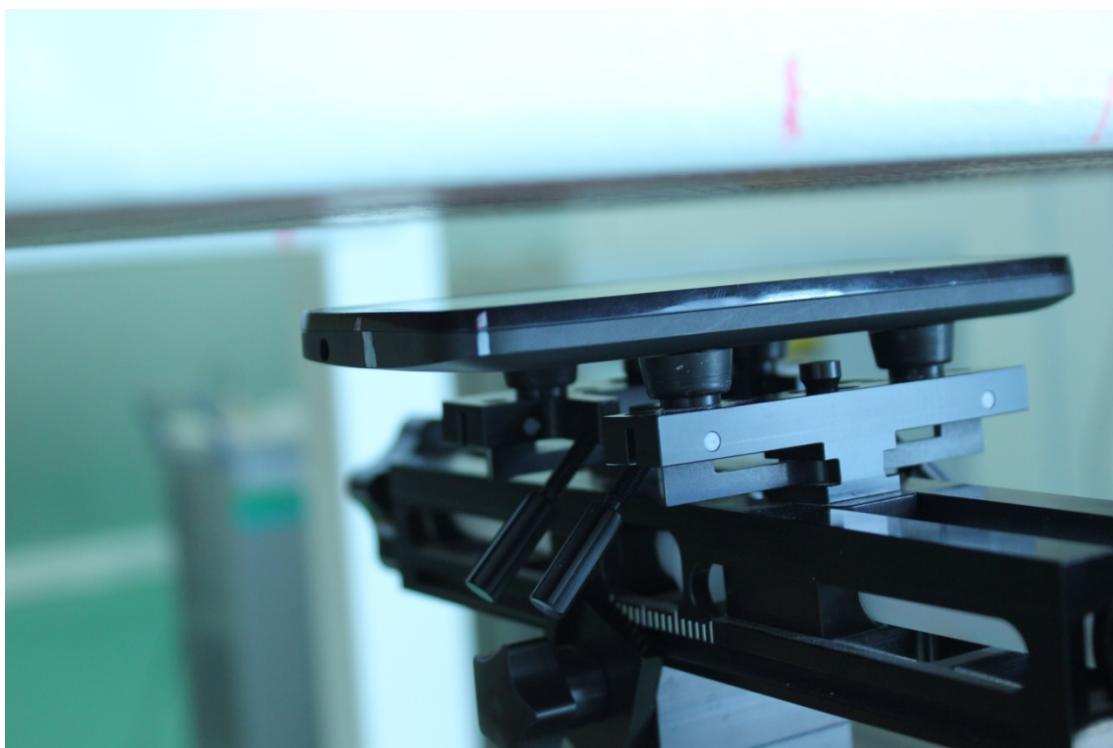

Picture 6-1: Front – 15mm

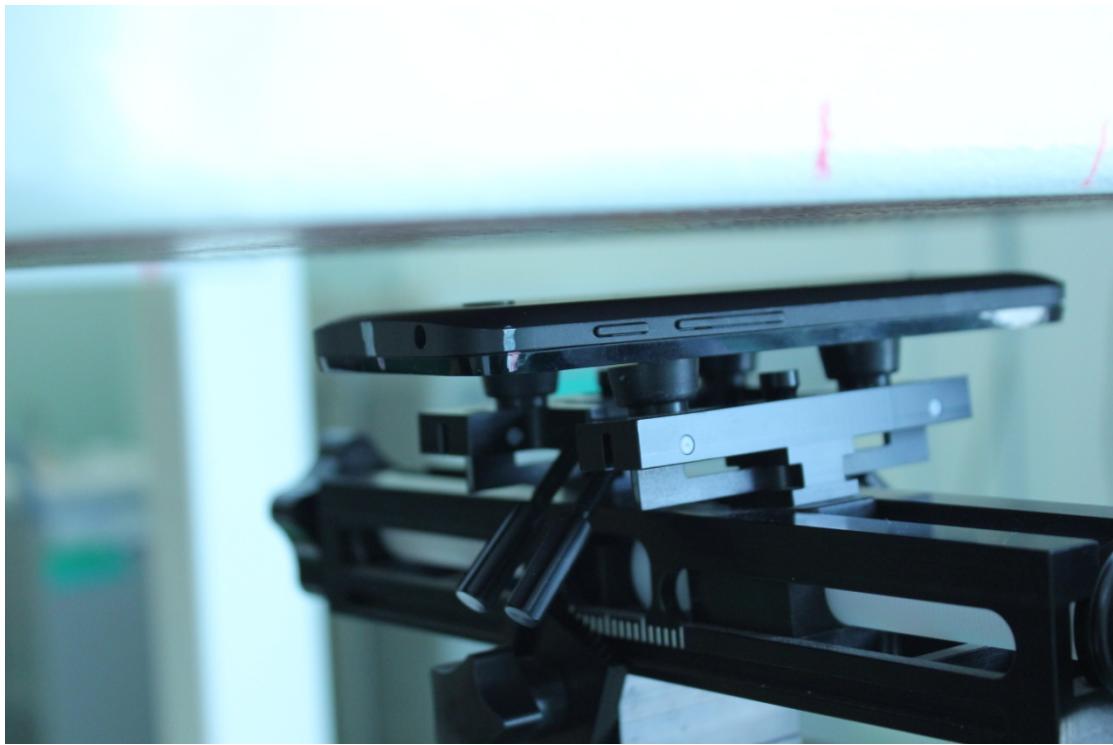

Picture 7: Rear – 10mm




Picture 7-1: Rear – 15mm



Picture 8: Left Side – 10mm



Picture 8-1: Left Side – 15mm

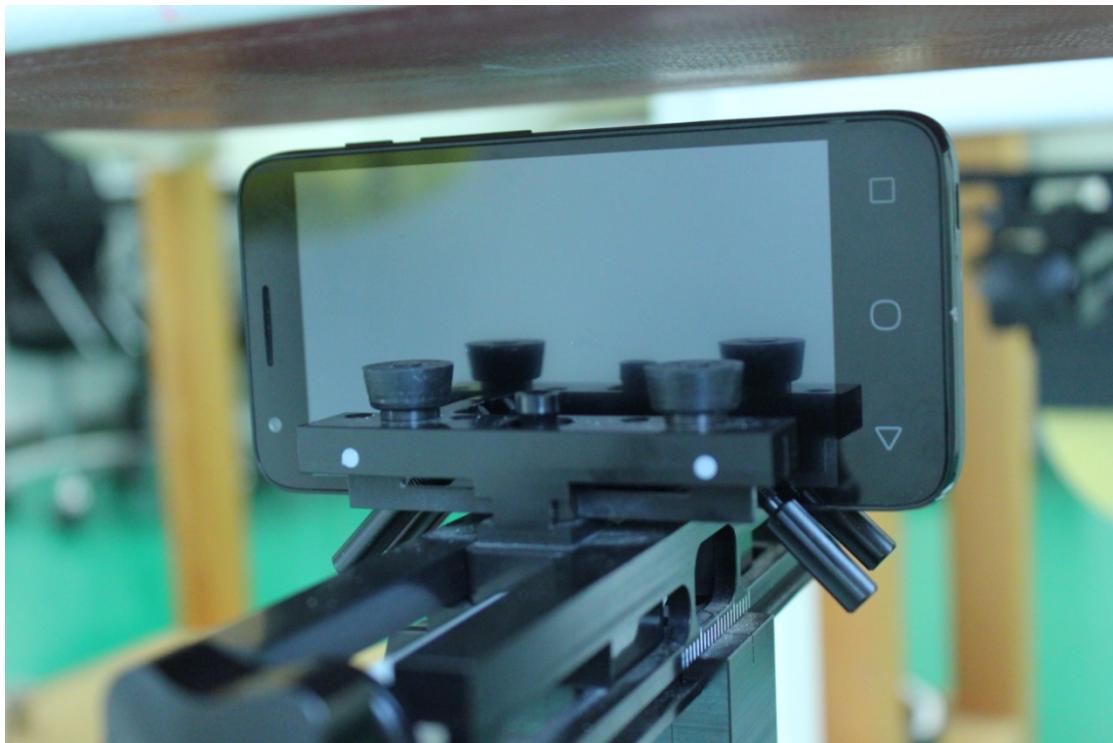

Picture 9: Right Side – 10mm



Picture 9-1: Right Side – 15mm



Picture 10: Bottom Side – 10mm



Picture 10-1: Bottom Side – 15mm



Picture 11: Top Side