



TEST REPORT

No. I17Z60125-EMC01

for

TCL Communication Ltd.

GSM Quad band/UMTS 3 Band/LTE 4 Band Mobile phone

Model Name: 5046G

FCC ID: 2ACCJB075

with

Hardware Version: PIO

Software Version: vJ5H

Issued Date: 2017-02-24

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No. 525429

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT
No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17Z60125-EMC01	Rev.0	1st edition	2017-02-24

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
TEST SOFTWARE UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12

1. Test Laboratory

1.1. Testing Location

CTTL (BDA District)

Address: No. 18 Jia Kangding Street, BDA District, Beijing, P. R. China
100191

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2017-02-15

Testing End Date: 2017-02-24

1.4. Signature




Zhang Hui

(Prepared this test report)



Qu Pengfei

(Reviewed this test report)



Liu Baodian

Deputy Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@tcl.com
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM Quad band/UMTS 3 Band/LTE 4 Band Mobile phone
Model Name	5046G
FCC ID	2ACCJB075
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.85VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT3	014915000100332	PIO	vJ5H

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	USB Cable	/	16TCT-DC-0551
AE3	USB Cable	/	16TCT-DC-0556
AE4	Travel charger	/	16TCT-CH-1619
AE5	Travel charger	/	16TCT-CH-1612

AE1,

Model	CAC2400006CJ
Manufacturer	Coslight
Capacitance	2400mAh
Nominal voltage	3.85V

AE2, AE3

Model	CDA3122005C1
Manufacturer	JUWEI
Length of cable	/

AE4, AE5

Model	CBA0058AGAC2
Manufacturer	TENPAO
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT3 + AE1 + AE2 + AE4	Charging mode
Set.2	EUT3 + AE1 + AE2	USB mode

Note: GSM Quad band/UMTS 3 Band/LTE 4 Band Mobile phone manufactured by TCL Communication Ltd. is a variant model based on A576BL for conformance test. According to the declaration of changes, the following items are tested on Set.1 and Set.2.

Mode or Feature	EUT set-up No	Test Item
GSM 1900 IDLE and Camera working	Set.1	Radiated Emission
USB mode	Set.2	Radiated Emission

Other results are inherited from the initial model. The report number of initial model is I16Z42066-EMC01.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2015
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low - Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods used have no deviation with standards above.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-2 (10.0m x 6.7m x 6.15m) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:			
Verdict Column	P	Pass	
	NA	Not applicable	
	F	Fail	
Location Column	1	The test is performed in test location 1 which are described in section 1.1 of this report	

Clause	List	Clause in FCC rules	Verdict	Location
1	Radiated Emission	15.109(a)	P	1
2	Conducted Emission	15.107(a)	P	1

7. Test Equipments Utilized

NO.	DESCRIPTION	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100376	R&S	2017-10-31	1 year
2	Test Receiver	ESCI	100766	R&S	2017-03-30	1 year
3	Universal Radio Communication Tester	CMW500	127406	R&S	2018-01-26	1 year
4	AMN	ESH2-Z5	829991/012	R&S	2017-04-11	1 year
5	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2017-11-24	3 years
6	EMI Antenna	3117	00139065	ETS	2017-09-21	3 years

Test Software Utilized

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01	R&S
Conducted Emission	EMC32 V8.52.0	R&S

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 - 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit (μ V/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{RPL} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{RPL} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case):

30MHz-1GHz: $U = 4.86 \text{ dB}$, $k=2$,

1GHz-18GHz: $U = 5.26 \text{ dB}$, $k=2$

Measurement results for Set.1:

Charging Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17981.300	45.2	-17.7	45.6	17.300	H
17890.350	45.1	-18.5	45.6	18.000	H
17996.600	45.0	-17.7	45.6	17.100	V
17889.500	44.7	-18.5	45.6	17.600	H
17967.700	44.7	-17.7	45.6	16.800	H
17917.550	44.7	-17.7	45.6	16.800	H

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17994.900	54.8	-17.7	45.6	26.900	H
17865.700	54.8	-18.5	45.6	27.700	H
17889.500	54.8	-18.5	45.6	27.700	V
17881.850	54.8	-18.5	45.6	27.700	H
17863.150	54.7	-18.5	45.6	27.600	H
17906.500	54.6	-18.5	45.6	27.500	H

Measurement results for Set.2:

USB Mode/Average detector

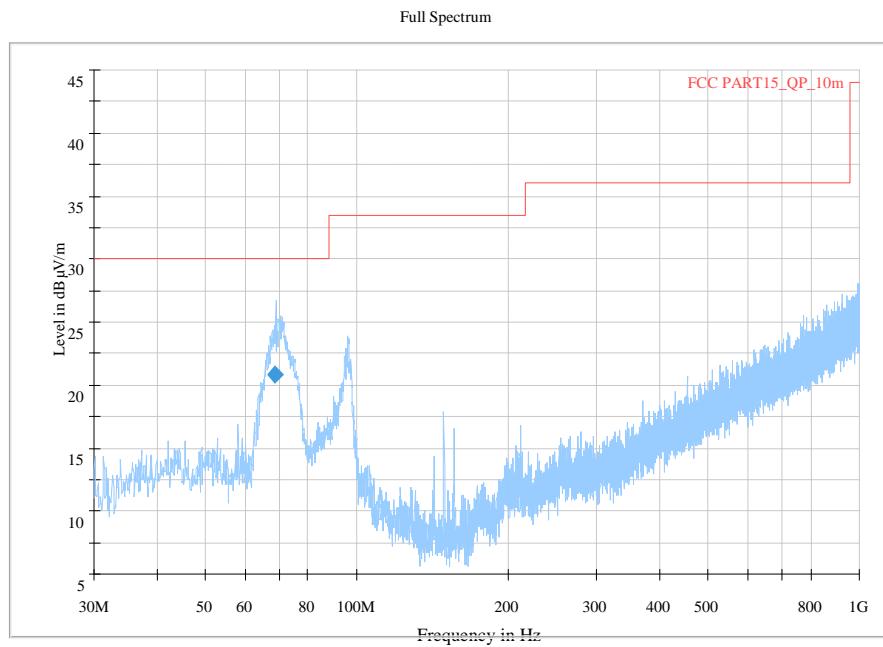
Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17867.400	45.4	-18.5	45.6	18.300	H
17870.800	45.1	-18.5	45.6	18.000	H
17893.750	45.1	-18.5	45.6	18.000	V
17873.350	45.0	-18.5	45.6	17.900	H
17877.600	44.9	-18.5	45.6	17.800	H
17912.450	44.9	-18.5	45.6	17.800	H

USB Mode/Peak detector

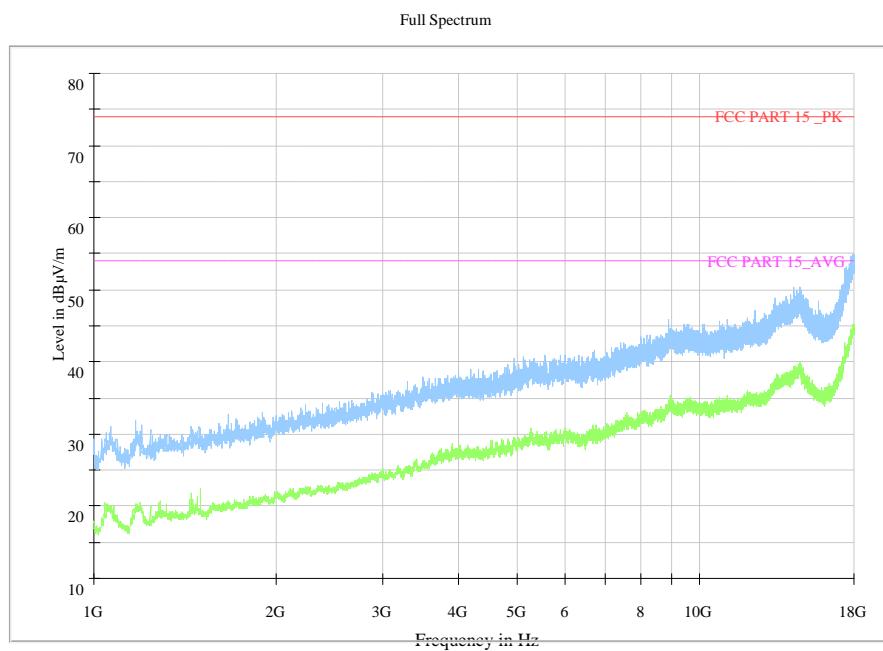
Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17894.600	55.7	-18.5	45.6	28.600	H
17943.900	55.2	-17.7	45.6	27.300	H
17877.600	55.1	-18.5	45.6	28.000	V
17934.550	54.8	-17.7	45.6	26.900	H
17961.750	54.8	-17.7	45.6	26.900	H
17988.100	54.7	-17.7	45.6	26.800	H

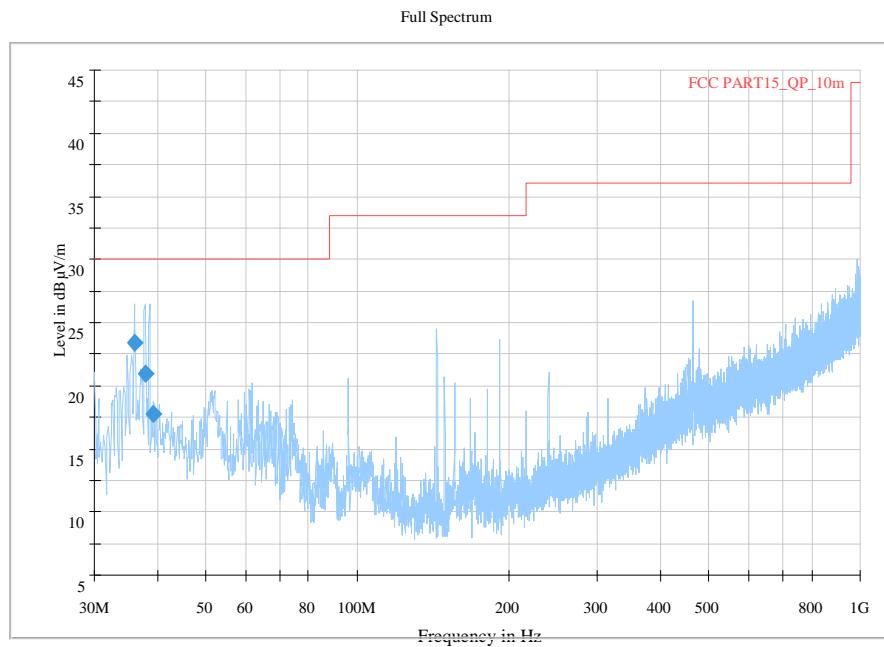
Sample calculation: Average detector , 17894.600MHz

$$\text{Result} = P_{Mea} + A_{RPI} = P_{Mea}(28.600 \text{ dBuV}) + G_A (45.6 \text{ dB/m}) + G_{PL} (-18.5 \text{ dB}) = 55.7 \text{ dBuV/m}$$

Charging Mode, Set.1

Fig.1 Radiated Emission from 30MHz to 1GHz
Final_Result

Frequency (MHz)	QuasiPeak (dB μ /m)	Limit (dB μ /m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
68.514000	20.87	30.00	9.13	1000.0	120.000	216.0	V	-30.0


Fig.2 Radiated Emission from 1GHz to 18GHz

USB Mode, Set.2

Fig.3 Radiated Emission from 30MHz to 1GHz
Final_Result

Frequency (MHz)	QuasiPeak (dB _礦 /m)	Limit (dB _礦 /m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
36.074000	23.43	30.00	6.57	1000.0	120.000	325.0	V	241.0
37.917000	20.94	30.00	9.06	1000.0	120.000	108.0	V	183.0
39.233000	17.81	30.00	12.19	1000.0	120.000	108.0	V	120.0

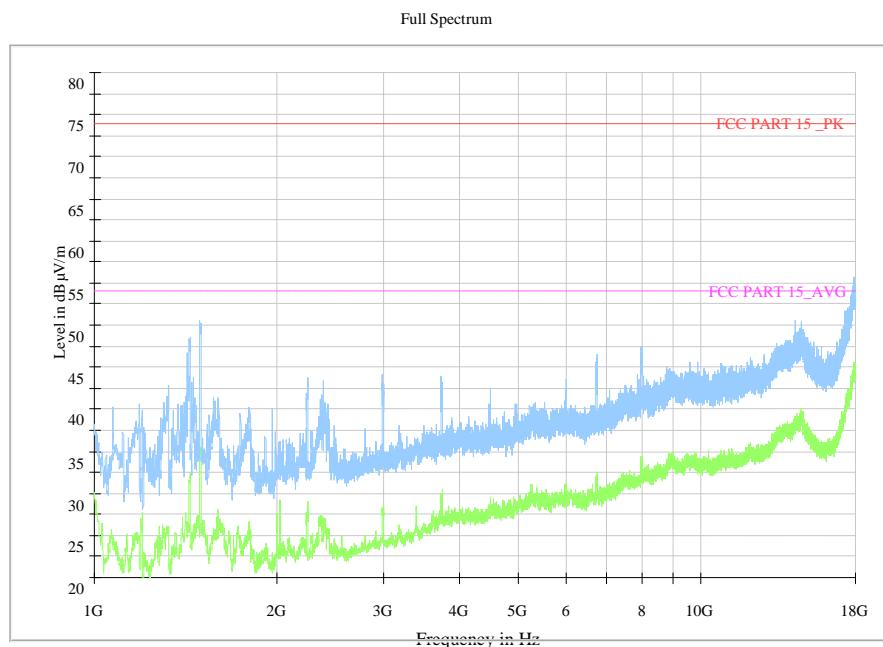


Fig.4 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2014, section 7.2.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 3.38 \text{ dB}$, $k=2$.

Charging Mode, Set.1

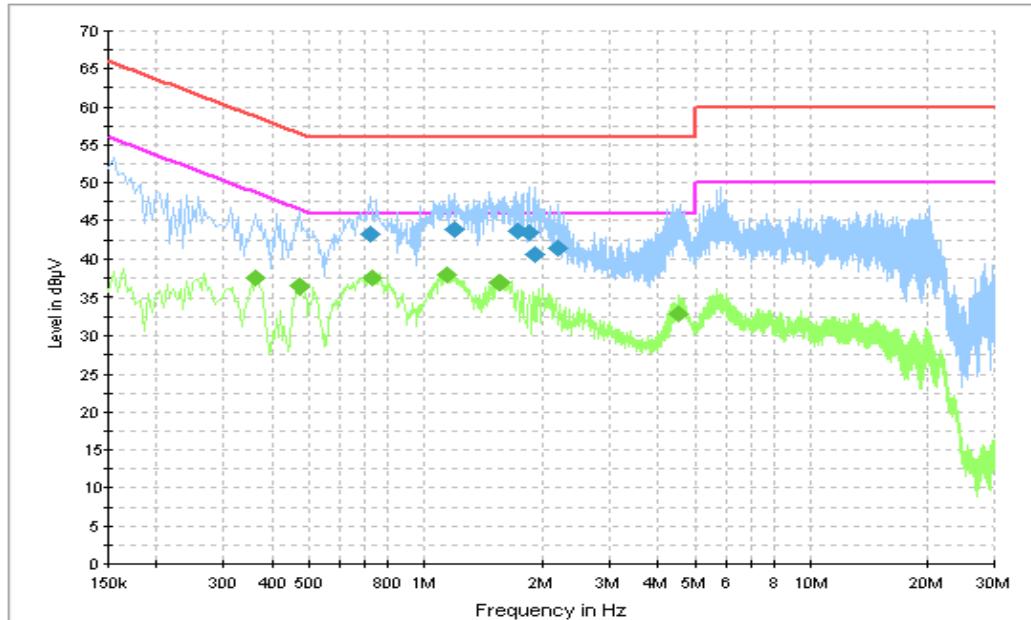


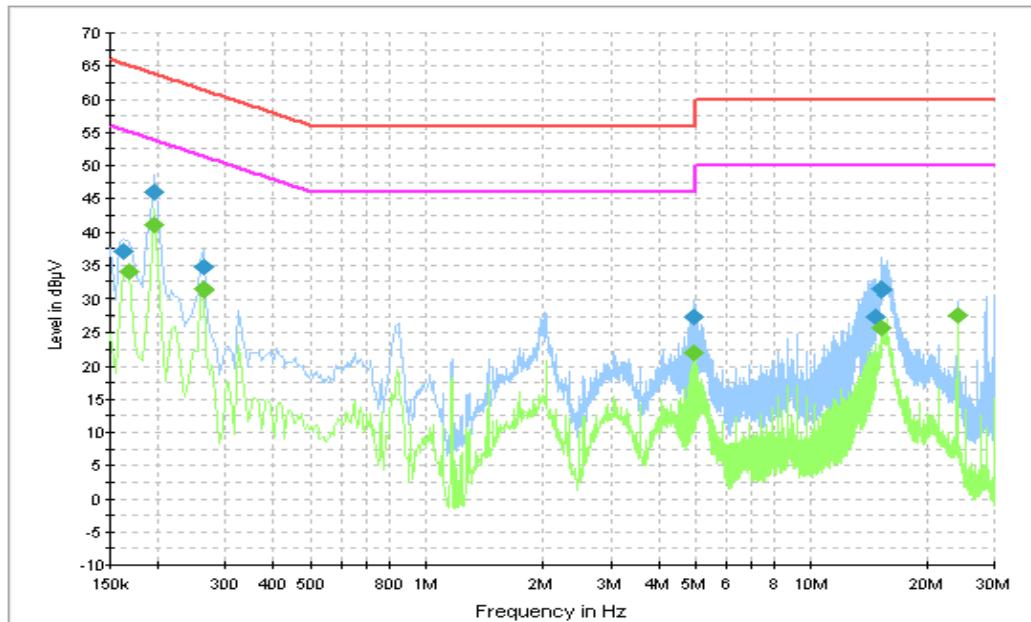
Fig.5 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.721500	43.2	GND	N	10.4	12.8	56.0
1.189500	43.8	GND	N	10.4	12.2	56.0
1.729500	43.7	GND	L1	10.3	12.3	56.0
1.846500	43.4	GND	L1	10.4	12.6	56.0
1.909500	40.5	GND	L1	10.4	15.5	56.0
2.202000	41.4	GND	L1	10.4	14.6	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.361500	37.5	GND	N	10.4	11.2	48.7
0.474000	36.4	GND	N	10.4	10.0	46.4
0.730500	37.4	GND	N	10.4	8.6	46.0
1.144500	37.8	GND	N	10.4	8.2	46.0
1.549500	36.8	GND	N	10.4	9.2	46.0
4.506000	32.9	GND	L1	10.5	13.1	46.0

USB Mode, Set.2

Fig.6 Conducted Emission
Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.163500	37.1	GND	N	10.3	28.2	65.3
0.195000	45.9	GND	N	10.3	17.9	63.8
0.262500	34.7	GND	L1	10.3	26.7	61.4
4.947000	27.4	GND	L1	10.5	28.6	56.0
14.784000	27.3	GND	N	10.9	32.7	60.0
15.288000	31.3	GND	L1	11.0	28.7	60.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.168000	34.1	GND	L1	10.3	21.0	55.1
0.195000	41.2	GND	N	10.3	12.7	53.8
0.262500	31.5	GND	L1	10.3	19.8	51.4
4.947000	22.0	GND	L1	10.5	24.0	46.0
15.292500	25.9	GND	L1	11.0	24.1	50.0
24.036000	27.6	GND	L1	11.3	22.4	50.0

*****END OF REPORT*****