



# TEST REPORT

## No. I16Z42206-EMC01

for

**TCL Communication Ltd.**

**LTE/UMTS/GSM smart phone**

**Model Name: 4055A**

**FCC ID: 2ACCJB082**

**with**

**Hardware Version: PIO**

**Software Version: V1.0**

**Issued Date: 2016-12-06**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**FCC 2.948 Listed: No. 525429**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@catr.cn](mailto:ctl_terminals@catr.cn), website: [www.chinattl.com](http://www.chinattl.com)



2016-12-06

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I16Z42206-EMC01	Rev.0	1st edition	2016-12-06

## **CONTENTS**

<b>1. TEST LABORATORY.....</b>	<b>4</b>
<b>1.1. TESTING LOCATION.....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT.....</b>	<b>4</b>
<b>1.3. PROJECT DATA.....</b>	<b>4</b>
<b>1.4. SIGNATURE .....</b>	<b>4</b>
<b>2. CLIENT INFORMATION.....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT .....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. EUT SET-UPS .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>7</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>10</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>11</b>

## 1. Test Laboratory

### 1.1. Testing Location

CTTL(BDA District)

Address: No. 18 Jia Kangding Street, BDA District, Beijing, P. R. China  
100191

### 1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2016-11-23

Testing End Date: 2016-12-02

### 1.4. Signature




Zhang Hui

(Prepared this test report)



Qu Pengfei

(Reviewed this test report)



Liu Baodian

Deputy Director of the laboratory

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shanghai  
Postal Code: 201203  
Country: China  
Contact Person: Gong Zhizhou  
Contact Email: zhizhou.gong@tcl.com  
Telephone: 0086-21-31363544  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-31363544  
Fax: 0086-21-61460602

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	LTE/UMTS/GSM smart phone
Model Name	4055A
FCC ID	2ACCJB082
Extreme vol. Limits	3.6VDC to 4.35VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT3	353631080001279	PIO	V1.0

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN	Remarks
AE1	Battery	/	16TCT-BA-1231
AE2	Battery	/	16TCT-BA-1239
AE3	Battery	/	16TCT-BA-1228
AE4	Battery	/	16TCT-BA-1230
AE5	Battery	/	/
AE6	USB Cable	/	16TCT-DC-0507
AE7	USB Cable	/	16TCT-DC-0512
AE8	Travel charger	/	16TCT-CH-1382
AE9	Travel charger	/	16TCT-CH-1381
AE10	Travel charger	/	16TCT-CH-1394
AE11	Travel charger	/	16TCT-CH-1393

AE1,AE2

Model	CAB1630001C1
Manufacturer	BYD
Capacitance	1630mAh
Nominal voltage	3.85V

AE3,AE4,AE5

Model	CAB1630003C7
Manufacturer	VEKEN
Capacitance	1630mAh
Nominal voltage	3.85V

AE6,AE7

Model	CDA3122005C1
Manufacturer	JUWEI
Length of cable	101cm

AE8,AE9

Model	CBA0066AGAC5
Manufacturer	PUAN
Length of cable	118cm

AE10,AE11

Model	CBA0066AGAC1
Manufacturer	BYD
Length of cable	122cm

\*AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.

### 3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT3 + AE1 + AE8	Charging mode
Set.2	EUT3 + AE1 + AE10	Charging mode
Set.3	EUT3 + AE1 + AE6	USB mode

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2015
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low - Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods used have no deviation with standards above.

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-2** (10.0m x 6.7m x 6.15m) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3 m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:			
Verdict Column	P	Pass	
	NA	Not applicable	
	F	Fail	
Location Column	1	The test is performed in test location 1 which are described in section 1.1 of this report	

Clause	List	Clause in FCC rules	Verdict	Location
1	Radiated Emission	15.109(a)	P	1
2	Conducted Emission	15.107(a)	P	1

## 7. Test Equipments Utilized

NO.	DESCRIPTION	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100376	R&S	2017-10-31	1 year
2	Test Receiver	ESCI	100766	R&S	2017-03-30	1 year
3	Universal Radio Communication Tester	CMW500	127406	R&S	2017-01-27	1 year
4	AMN	ESH2-Z5	829991/012	R&S	2017-04-11	1 year
5	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2017-11-24	3 years
6	EMI Antenna	3117	00139065	ETS	2017-09-21	3 years

## Test Software Utilized

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01	R&S
Conducted Emission	EMC32 V8.52.0	R&S

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission (§15.109(a))**

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 - 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu$ V/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{RPL}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{RPL} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{PL}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case):

30MHz-1GHz:  $U = 4.86 \text{ dB}$ ,  $k=2$ ,

1GHz-18GHz:  $U = 5.26 \text{ dB}$ ,  $k=2$

### Measurement results for Set.1:

#### Charging Mode/Average detector

Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity
17650.500	48.0	-13.1	41.1	19.979	V
17633.250	48.0	-13.0	41.1	19.913	V
17636.250	47.9	-13.0	41.1	19.867	V
17640.000	47.9	-13.0	41.1	19.870	V
17589.750	47.9	-13.5	41.1	20.256	H
17296.500	47.9	-14.0	41.2	20.686	H

#### Charging Mode/Peak detector

Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity
17525.250	60.1	-14.2	41.2	33.14	H
17755.500	60.1	-13.3	41.0	32.40	H
17201.250	60.0	-14.5	41.2	33.30	H
17637.000	59.9	-13.0	41.1	31.85	V
17676.000	59.7	-13.1	41.1	31.79	H
17735.250	59.5	-13.3	41.0	31.74	V

### Measurement results for Set.2:

#### Charging Mode/Average detector

Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity
17291.250	48.1	-14.0	41.2	20.85	H
17611.500	48.0	-13.2	41.1	20.17	V
17654.250	47.9	-13.1	41.1	19.84	V
17634.750	47.8	-13.0	41.1	19.75	V
17709.000	47.8	-13.2	41.0	20.00	H
17632.500	47.8	-13.0	41.1	19.70	H

**Charging Mode/Peak detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
17582.250	60.5	-13.6	41.1	32.88	H
17657.250	60.0	-13.1	41.1	31.97	V
17928.000	59.9	-13.6	40.9	32.62	V
17342.250	59.8	-14.3	41.2	32.81	H
17245.500	59.7	-14.2	41.2	32.69	H
17684.250	59.7	-13.1	41.1	31.76	V

**Measurement results for Set.3:**
**USB Mode/Average detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
17289.000	47.9	-13.9	41.2	20.67	H
17280.000	47.9	-14.0	41.2	20.68	V
17670.750	47.9	-13.1	41.1	19.93	V
17631.750	47.9	-13.0	41.1	19.80	H
17650.500	47.9	-13.1	41.1	19.84	V
17648.250	47.9	-13.0	41.1	19.83	H

**USB Mode/Peak detector**


Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
17640.750	60.5	-13.0	41.1	32.43	V
17238.750	60.1	-14.2	41.2	33.14	H
17854.500	60.0	-13.5	40.9	32.55	H
17709.750	60.0	-13.2	41.0	32.13	H
17374.500	59.9	-14.4	41.2	33.13	V
17697.750	59.6	-13.2	41.0	31.72	H

**Sample calculation: Average detector , 17289MHz**


$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}}(20.67 \text{ dBuV}) + G_A (41.2 \text{ dB/m}) + G_{\text{PL}} (-13.9 \text{ dB}) = 47.9 \text{ dBuV/m}$$

**Charging Mode, Set.1**

15B RE 30MHz-1GHz

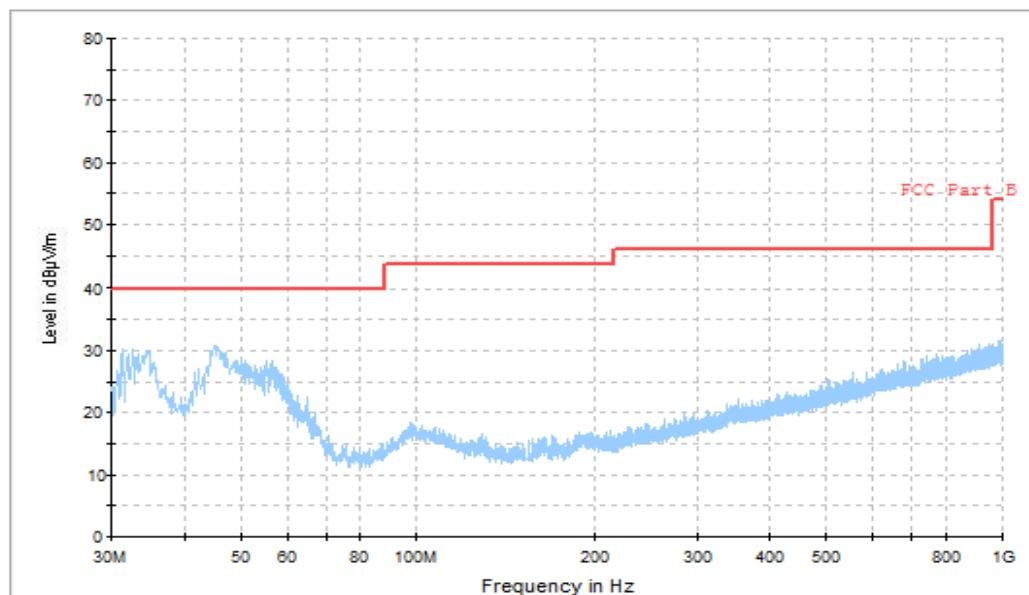**Fig.1 Radiated Emission from 30MHz to 1GHz**

15B RE - 1GHz-3GHz

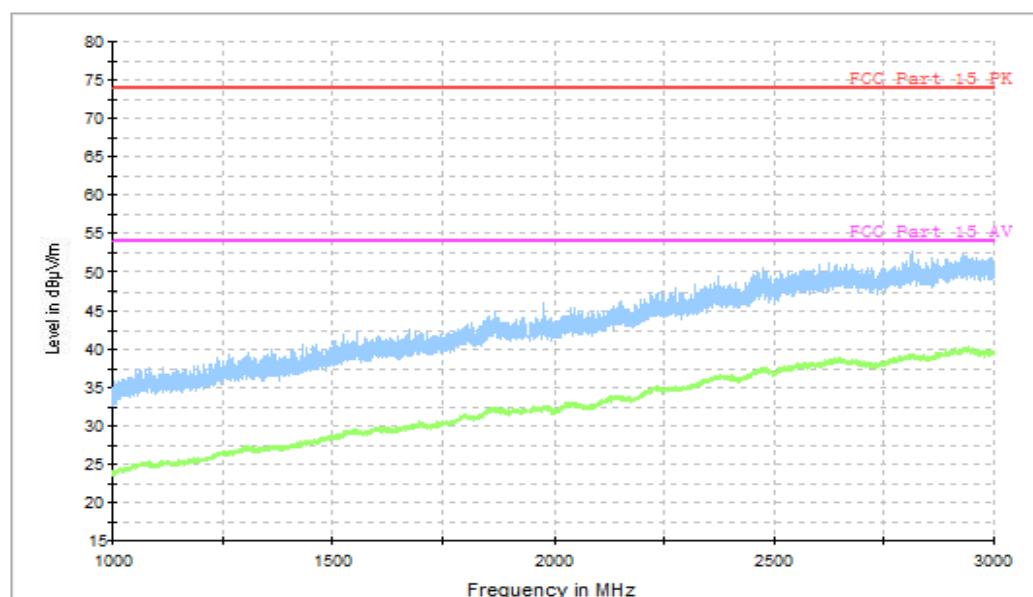**Fig.2 Radiated Emission from 1GHz to 3GHz**

15b RE - 3GHz-18GHz

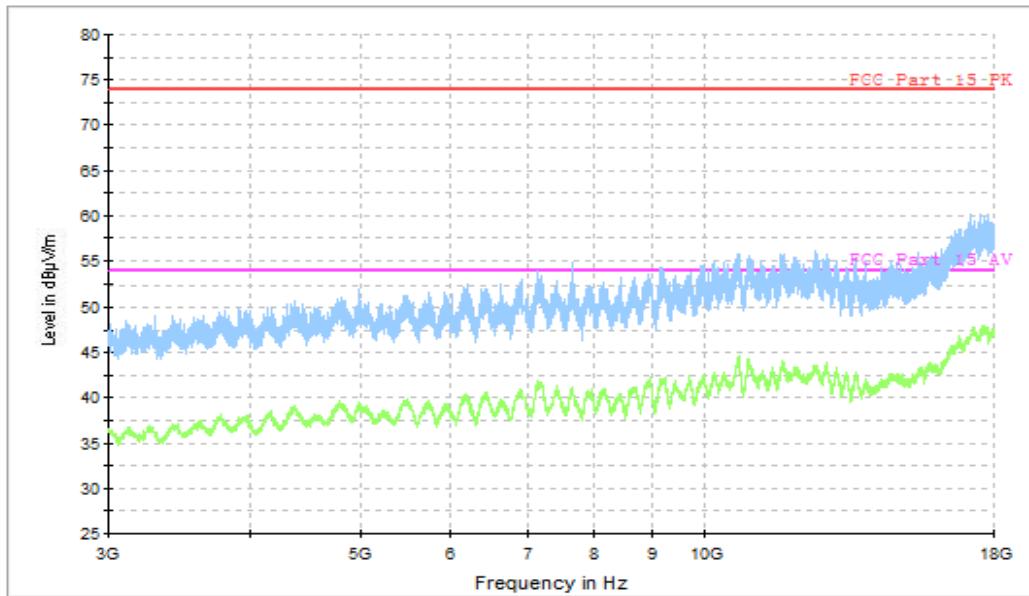


Fig.3 Radiated Emission from 3GHz to 18GHz

Charging Mode, Set.2

15B RE 30MHz-1GHz



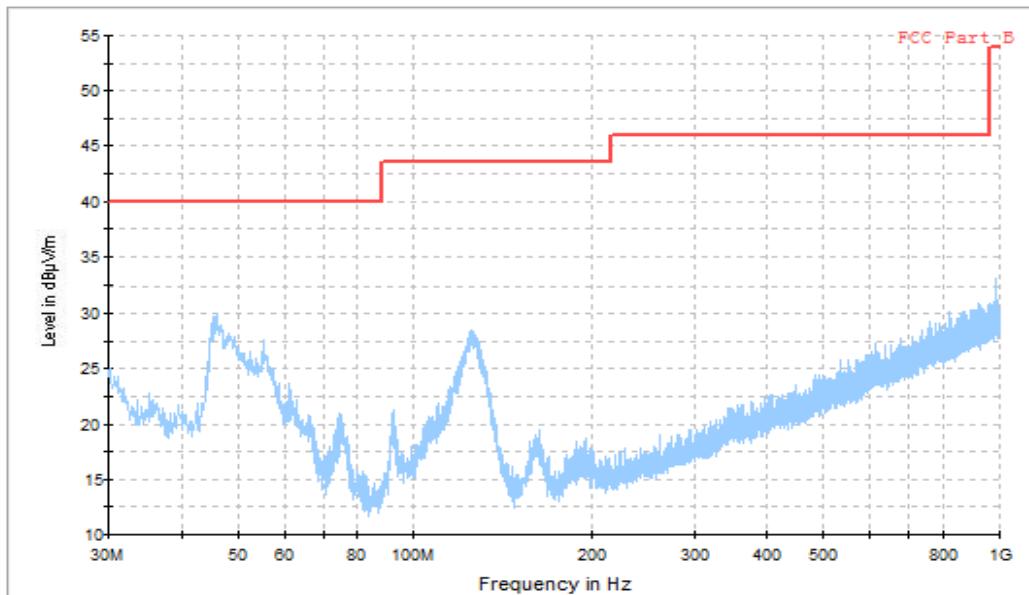




Fig.4 Radiated Emission from 30MHz to 1GHz

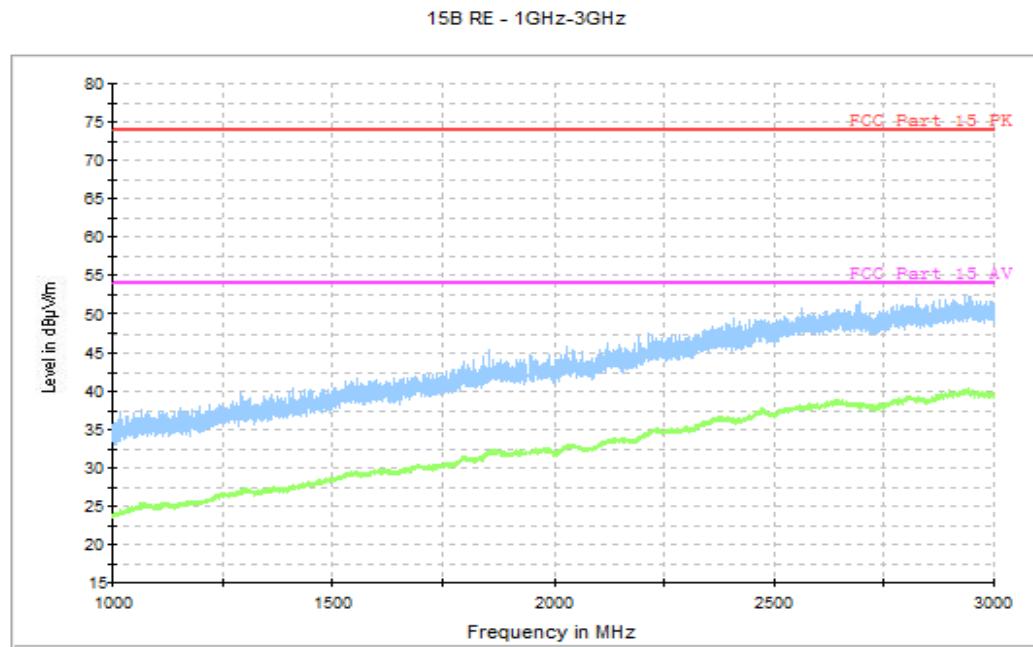


**Fig.5 Radiated Emission from 1GHz to 3GHz**

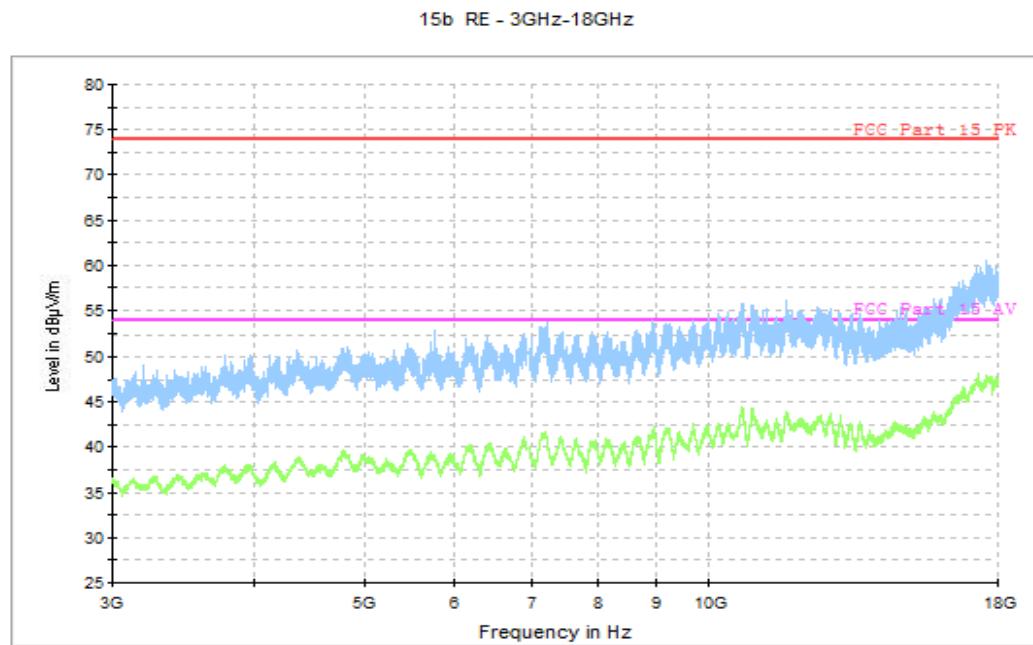

**Fig.6 Radiated Emission from 3GHz to 18GHz**

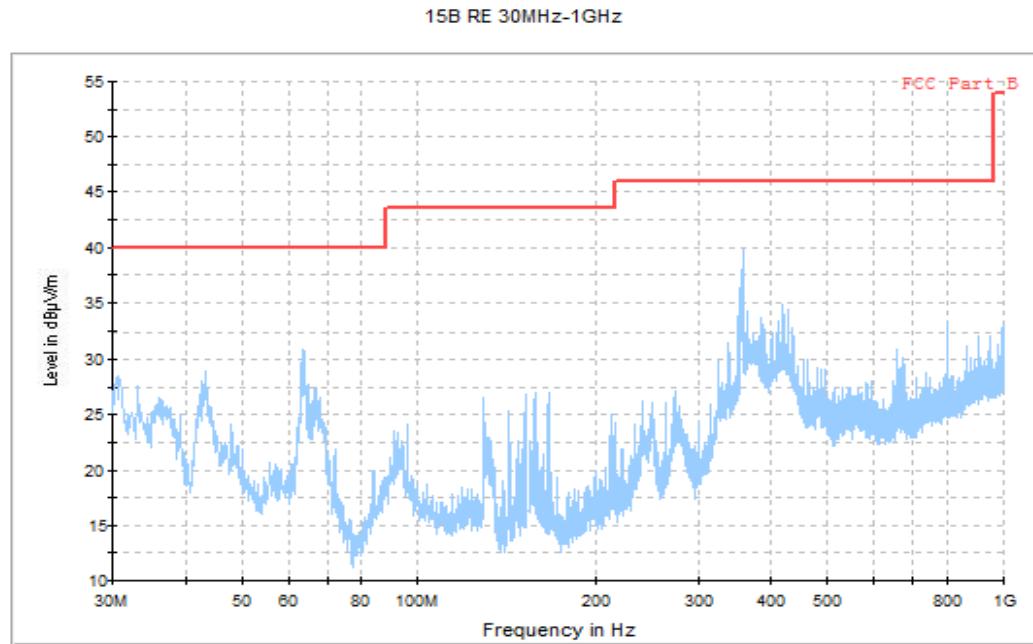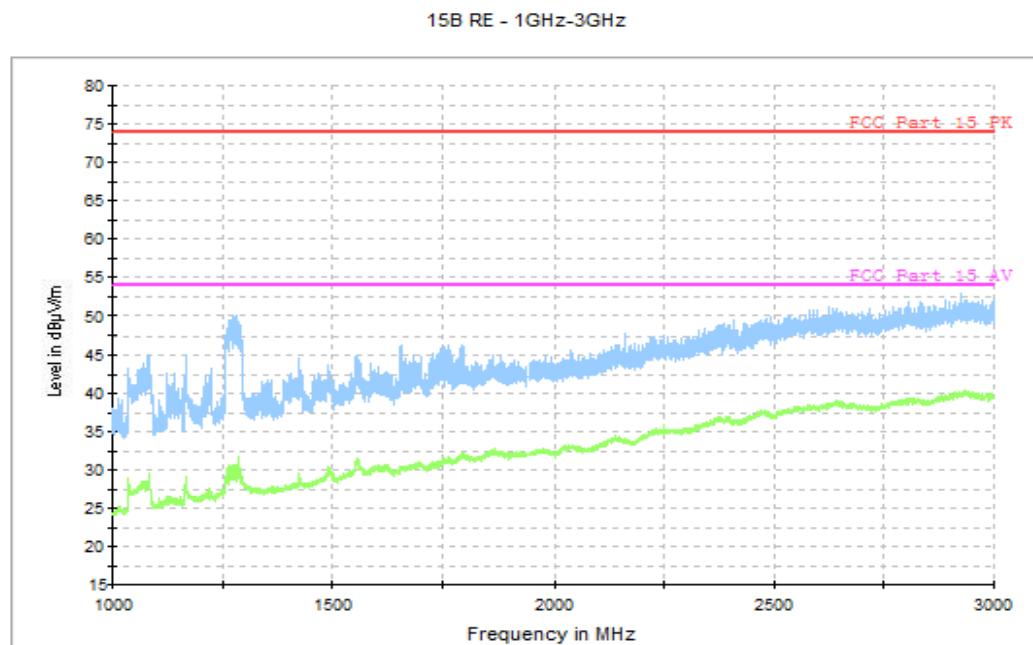**USB Mode, Set.3****Fig.7 Radiated Emission from 30MHz to 1GHz****Fig.8 Radiated Emission from 1GHz to 3GHz**

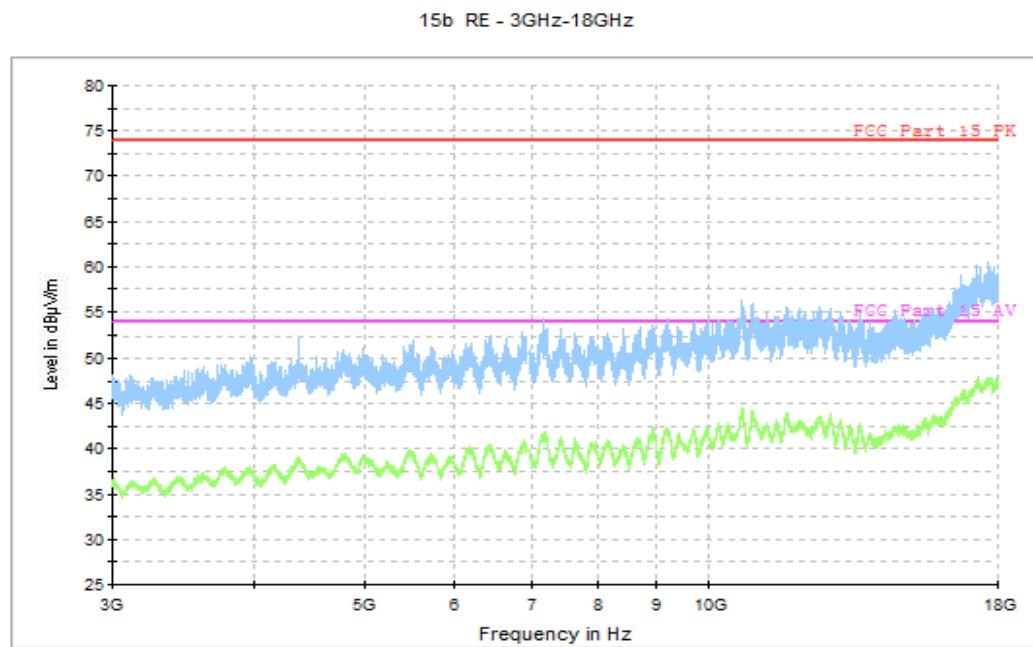

**Fig.9 Radiated Emission from 3GHz to 18GHz**

## A.2 Conducted Emission (§15.107(a))

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2014, section 7.2.

### A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U = 3.38 \text{ dB}$ ,  $k=2$ .

#### Charging Mode, Set.1

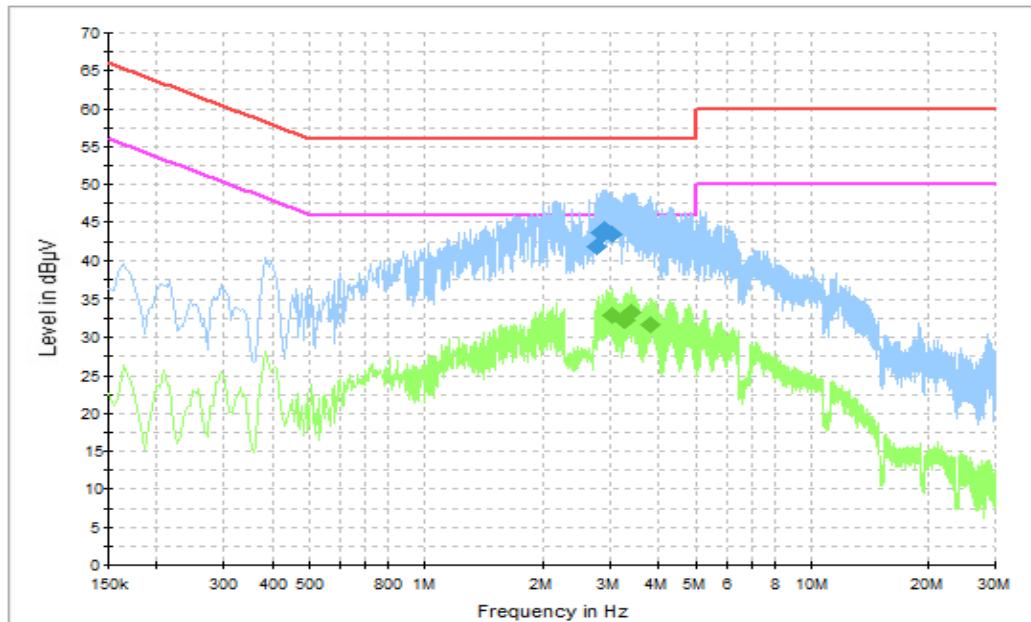


Fig.10 Conducted Emission

#### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.773500	41.9	GND	L1	10.4	14.1	56.0
2.836500	43.7	GND	L1	10.4	12.3	56.0
2.863500	43.4	GND	L1	10.4	12.6	56.0
2.904000	44.0	GND	L1	10.4	12.0	56.0
2.931000	43.9	GND	L1	10.4	12.1	56.0
3.021000	43.5	GND	L1	10.4	12.5	56.0

#### Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.021000	33.0	GND	L1	10.4	13.0	46.0
3.255000	32.3	GND	L1	10.4	13.7	46.0
3.264000	32.4	GND	L1	10.4	13.6	46.0
3.322500	32.9	GND	L1	10.4	13.1	46.0
3.399000	33.3	GND	L1	10.4	12.7	46.0
3.822000	31.6	GND	L1	10.4	14.4	46.0

## Charging Mode, Set.2

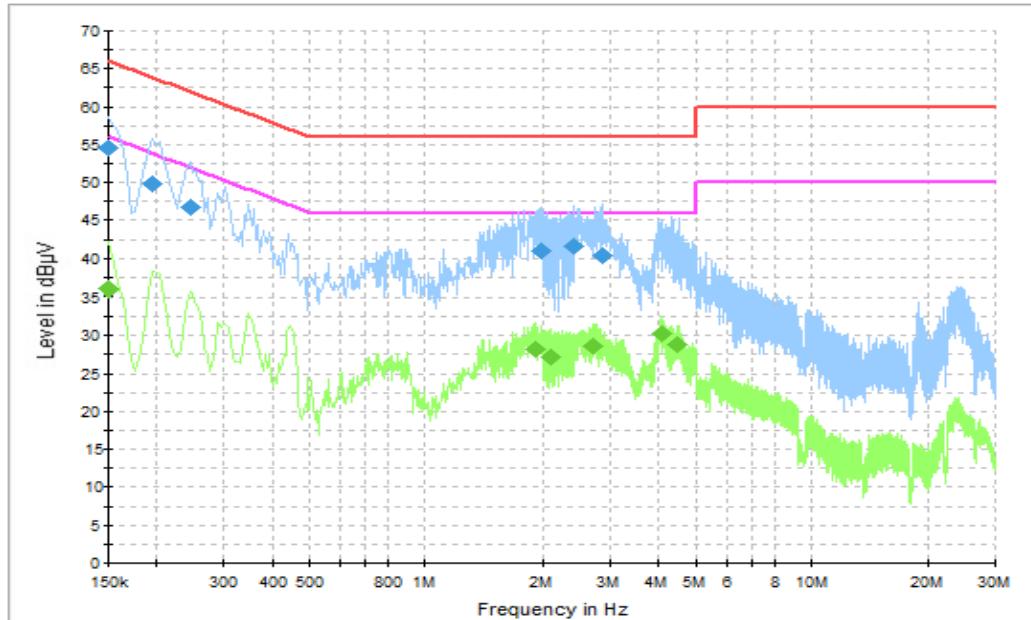



Fig.11 Conducted Emission

## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	54.6	GND	L1	10.3	11.4	66.0
0.195000	49.9	GND	L1	10.3	13.9	63.8
0.244500	46.8	GND	L1	10.3	15.2	61.9
1.986000	40.9	GND	L1	10.4	15.1	56.0
2.418000	41.6	GND	L1	10.4	14.4	56.0
2.859000	40.5	GND	L1	10.4	15.5	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	35.9	GND	L1	10.3	20.1	56.0
1.918500	28.2	GND	L1	10.4	17.8	46.0
2.094000	27.1	GND	L1	10.4	18.9	46.0
2.710500	28.6	GND	L1	10.4	17.4	46.0
4.069500	30.3	GND	L1	10.5	15.7	46.0
4.479000	28.9	GND	L1	10.5	17.1	46.0

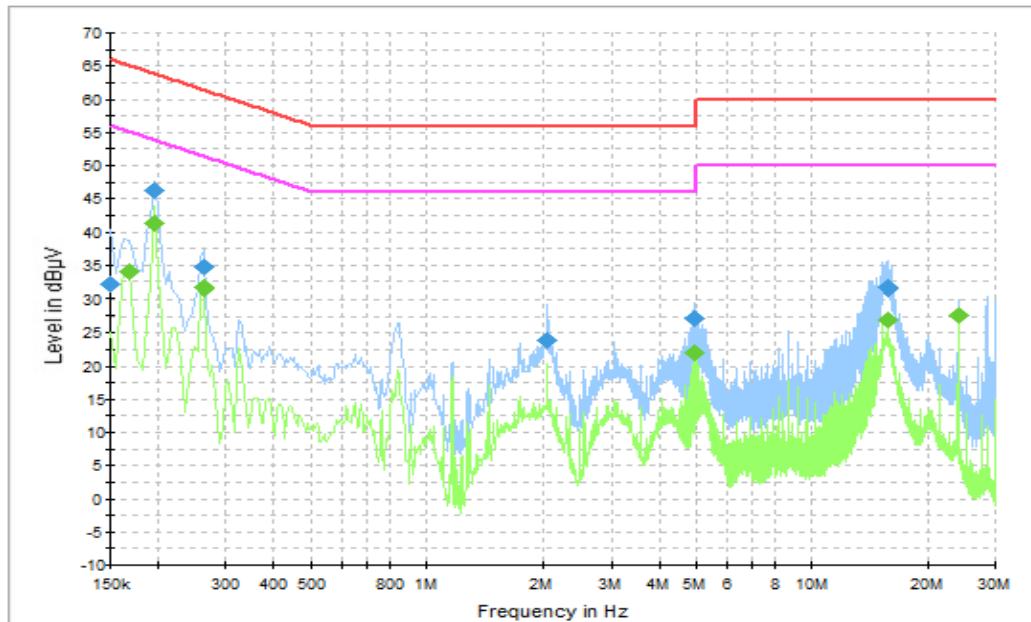**USB Mode, Set.3**

**Fig.12 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	32.1	GND	L1	10.3	33.9	66.0
0.195000	46.3	GND	L1	10.3	17.5	63.8
0.262500	34.7	GND	L1	10.3	26.6	61.4
2.035500	23.9	GND	L1	10.4	32.1	56.0
4.947000	27.3	GND	L1	10.5	28.7	56.0
15.783000	31.6	GND	L1	11.0	28.4	60.0

**Final Result 2**

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.168000	34.1	GND	L1	10.3	20.9	55.1
0.195000	41.4	GND	L1	10.3	12.4	53.8
0.262500	31.6	GND	L1	10.3	19.8	51.4
4.947000	21.9	GND	L1	10.5	24.1	46.0
15.783000	26.9	GND	L1	11.0	23.1	50.0
24.036000	27.7	GND	L1	11.3	22.3	50.0

\*\*\*END OF REPORT\*\*\*