



# TEST REPORT

## No. I17Z60667-EMC01

for

**UMTS/GSM Smart Phone**

**Model Name: 5011A**

**FCC ID: 2ACCJB091**

with

**Hardware Version: PIO**

**Software Version: V1.0**

**Issued Date: 2017-06-13**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**FCC 2.948 Listed: No.525429**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@catr.cn](mailto:ctl_terminals@catr.cn), website: [www.chinattl.com](http://www.chinattl.com)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I17Z60667-EMC01	Rev.0	1 <sup>st</sup> edition	2017-06-02
I17Z60667-EMC01	Rev.1	Delete the description of charger CAB2500008C1 on page 6	2017-06-13

## **CONTENTS**

1. TEST LABORATORY .....	4
1.1. TESTING LOCATION .....	4
1.2. TESTING ENVIRONMENT .....	4
1.3. PROJECT DATA .....	4
1.4. SIGNATURE .....	4
2. CLIENT INFORMATION .....	5
2.1. APPLICANT INFORMATION .....	5
2.2. MANUFACTURER INFORMATION .....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....	6
3.1. ABOUT EUT .....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	6
3.4. EUT SET-UPS .....	7
4. REFERENCE DOCUMENTS .....	7
4.1. REFERENCE DOCUMENTS FOR TESTING .....	7
5. LABORATORY ENVIRONMENT .....	8
6. SUMMARY OF TEST RESULTS .....	9
7. TEST EQUIPMENTS UTILIZED .....	10
ANNEX A: MEASUREMENT RESULTS .....	11

## 1. Test Laboratory

### 1.1. Testing Location

Location YZ: CTTL(kangding Road)

Address: No. A18, Kangding Road, Yizhuang, Beijing,  
P. R. China 100176

### 1.2. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2017-05-25


Testing End Date: 2017-05-27

### 1.4. Signature




Wang Junqing

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Liu Baodian

Deputy Director of the laboratory

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: P. R. China  
Contact Person: Gong Zhizhou  
Contact Email zhizhou.gong@tcl.com  
Telephone: 0086-21-31363544  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: P. R. China  
Contact Person: Gong Zhizhou  
Contact Email zhizhou.gong@tcl.com  
Telephone: 0086-21-31363544  
Fax: 0086-21-61460602

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	UMTS/GSM Smart Phone
Model Name	5011A
FCC ID	2ACCJB091
Extreme vol. Limits	3.6VDC to 4.35VDC (nominal: 3.85VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	358269080006488	PIO	V1.0

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE3	Charger	/	/
AE4	Charger	/	/
AE11	USB Cable	/	/
AE12	USB Cable	/	/
AE1	Model	CAB2500006C7	
	Manufacturer	VEKEN	
	Capacitance	2550 mAh	
	Nominal voltage	3.85 V	
AE3	Model	CBA0058AGAC4	
	Manufacturer	AOHAI	
	Length of cable	/	
AE4	Model	CBA0058AGAC2	
	Manufacturer	tenpao	
	Length of cable	/	
AE11	Model	CDA3122005C8	
	Manufacturer	PUAN	
	Length of cable	95cm	
AE12	Model	CDA3122005C2	
	Manufacturer	SHENGHUA	
	Length of cable	95cm	

\*AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.

### **3.4. EUT set-ups**

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT1+ AE3+ AE11/AE12	Charger
Set.3	EUT1+ AE4+ AE11/AE12	Charger
Set.5	EUT1+ AE11/AE12	USB

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2015 Edition
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:				
Verdict Column	P	Pass		
	NA	Not applicable		
	F	Fail		
Location Column	YZ	The test is performed in test location YZ which is described in section 1.1 of this report		

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	YZ
2	Conducted Emission	15.107(a)	B.2	P	YZ

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100376	R&S	2017-11-30	1 year
2	Test Receiver	ESCI 7	100948	R&S	2017-07-05	1 year
3	Universal Radio Communication Tester	CMW500	127406	R&S	2018-02-19	1 year
4	Universal Radio Communication Tester	CMW500	155415	R&S	2018-02-15	1 year
5	LISN	ESH2-Z5	829991/012	R&S	2018-05-10	1 year
6	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2017-11-24	3 years
7	EMI Antenna	3117	00139065	ETS-Lindgren	2017-09-21	3 years
8	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
9	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
10	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A	N/A
11	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01	R&S
Conducted Emission	EMC32 V8.52.0	R&S

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a).

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (charging mode of MS) at distances of 3 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu$ V/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{RPL}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{RPL} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{PL}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 4.86dB, 1GHz-18GHz: 5.26dB,  $k=2$ .

### Measurement results for Set.1:

#### Charging Mode/Average detector

Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity
17806.500	41.14	-23.0	41.0	23.22	V
17804.250	41.13	-23.1	41.0	23.26	H
17802.000	41.04	-23.1	41.0	23.20	V
17808.750	40.98	-23.0	41.0	23.03	H
17803.500	40.93	-23.1	41.0	23.06	H
17813.250	40.91	-23.0	40.9	23.01	V

#### Charging Mode/Peak detector

Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dB $\mu$ V)	Polarity
17810.250	52.2	-23.0	41.0	34.28	H
17816.250	52.2	-23.1	40.9	34.36	H
17796.750	52.2	-23.2	41.0	34.40	H
17819.250	52.1	-23.1	40.9	34.27	V
17882.250	52.0	-24.0	40.9	35.09	V
17784.750	52.0	-23.4	41.0	34.42	V

Sample calculation: Peak detector, 17882.250MHz

$$\text{Result} = P_{\text{Mea}} (35.09 \text{dB}\mu\text{V}) + G_A (40.9 \text{dB/m}) + G_{PL} (-24.0 \text{ dB}) = 52.0 \text{dB}\mu\text{V/m}$$

**Measurement results for Set.3:**
**Charging Mode/Average detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
17810.250	41.17	-23.0	41.0	23.23	H
17809.500	41.12	-23.0	41.0	23.17	H
17811.000	41.07	-23.0	41.0	23.13	V
17802.000	40.92	-23.1	41.0	23.08	V
17807.250	40.92	-23.0	41.0	22.99	V
17804.250	40.88	-23.1	41.0	23.00	H

**Charging Mode/Peak detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
17740.500	52.3	-24.1	41.0	35.42	H
17811.750	52.3	-23.0	41.0	34.35	H
17813.250	52.0	-23.0	40.9	34.11	V
17814.000	51.9	-23.1	40.9	33.96	H
17815.500	51.9	-23.1	40.9	33.98	H
17890.500	51.8	-24.1	40.9	35.04	V

Sample calculation: Peak detector, 17890.500MHz

$$\text{Result} = P_{\text{Mea}} (35.04 \text{dB}\mu\text{V}) + G_A (40.9 \text{dB/m}) + G_{\text{PL}} (-24.1 \text{ dB}) = 51.8 \text{dB}\mu\text{V/m}$$

**Measurement results for Set.5:**
**USB Mode/Average detector**



Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
5875.250	34.91	-32.2	35.1	31.98	V
5997.750	32.89	-31.6	35.3	29.15	H
17811.000	40.83	-23.0	41.0	22.90	V
17805.750	40.68	-23.1	41.0	22.78	H
17808.750	40.67	-23.0	41.0	22.72	V
17819.250	40.64	-23.1	40.9	22.82	V


**USB Mode/Peak detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dB $\mu$ V)	Polarity
5874.475	44.1	-32.2	35.1	41.21	H
5991.752	46.3	-31.5	35.3	42.55	V
17847.000	52.1	-23.5	40.9	34.64	V
17875.500	52.0	-23.9	40.9	34.98	H
17797.500	52.0	-23.2	41.0	34.19	V
17790.750	51.9	-23.3	41.0	34.25	V

Sample calculation: Peak detector, 17847.000MHz

 Result =P<sub>Mea</sub> (34.64dB $\mu$ V)+ G<sub>A</sub> (40.9dB/m)+ G<sub>PL</sub>(-23.5 dB) =52.1dB $\mu$ V/m

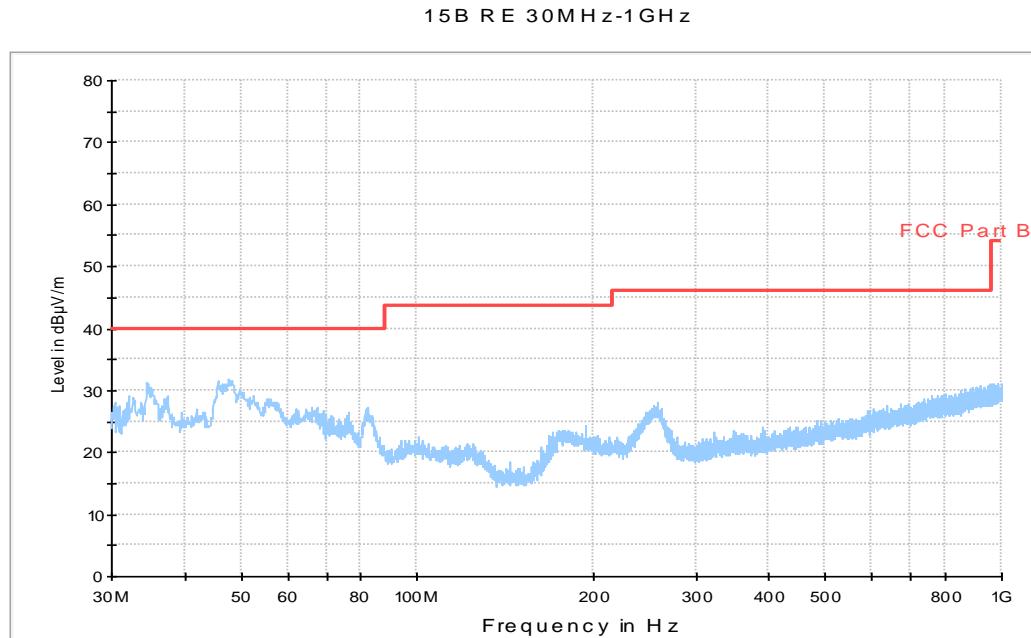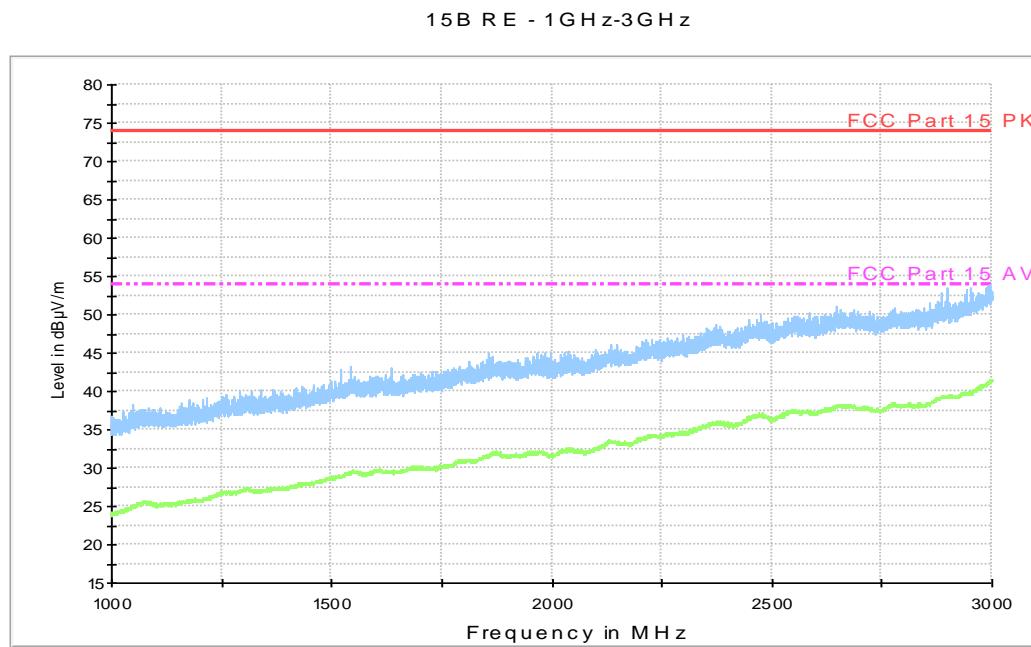**Charging Mode, Set.1****Figure A.1 Radiated Emission from 30MHz to 1GHz****Figure A.2 Radiated Emission from 1GHz to 3GHz**

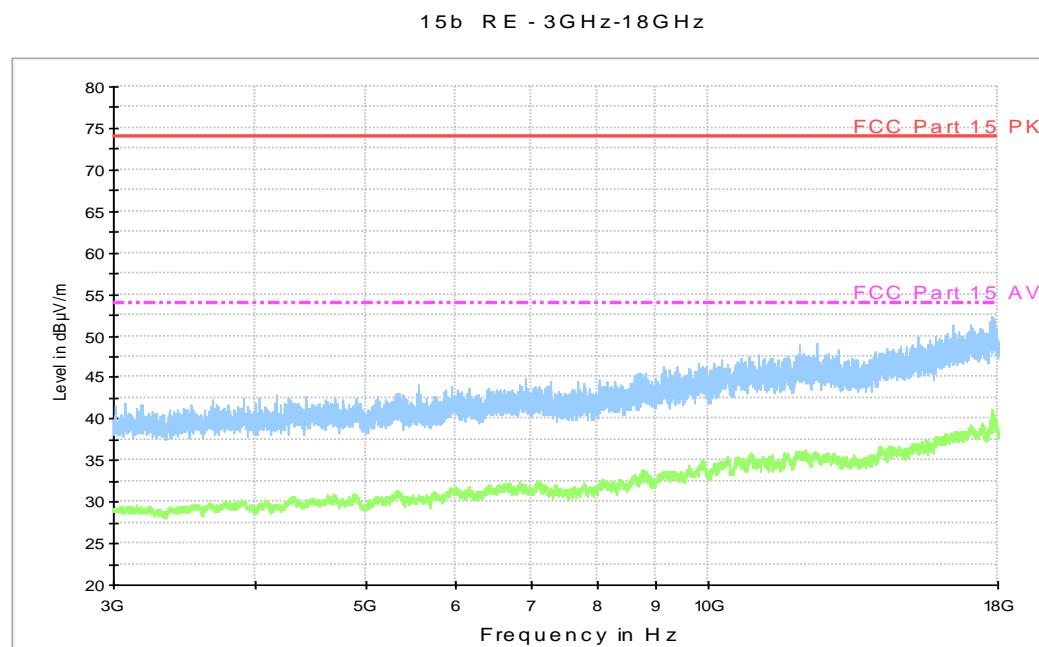

**Figure A.3 Radiated Emission from 3GHz to 18GHz**

## Charging Mode, Set.3

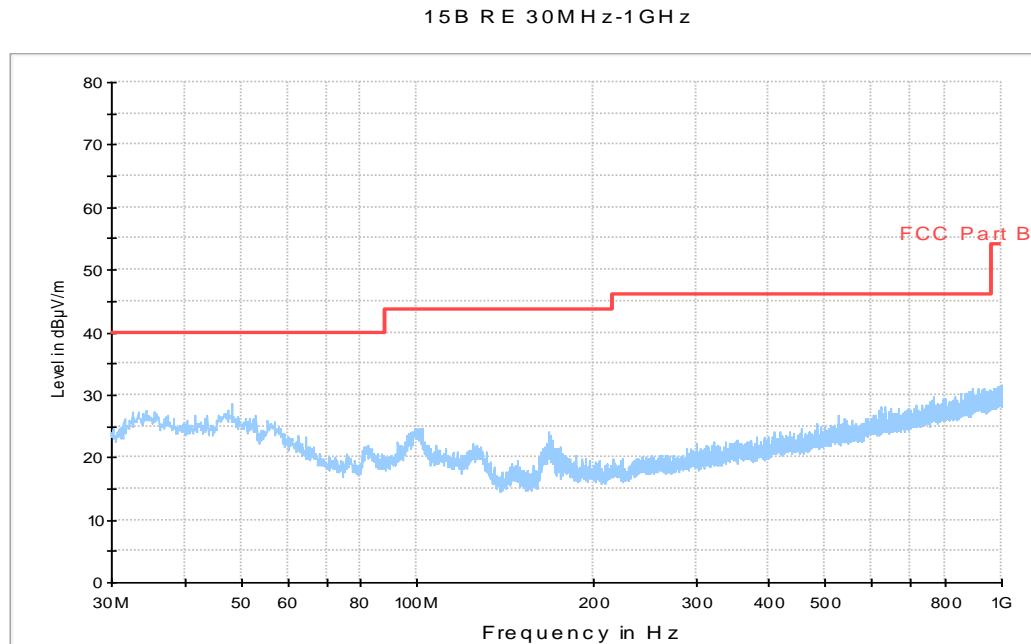


Figure A.4 Radiated Emission from 30MHz to 1GHz



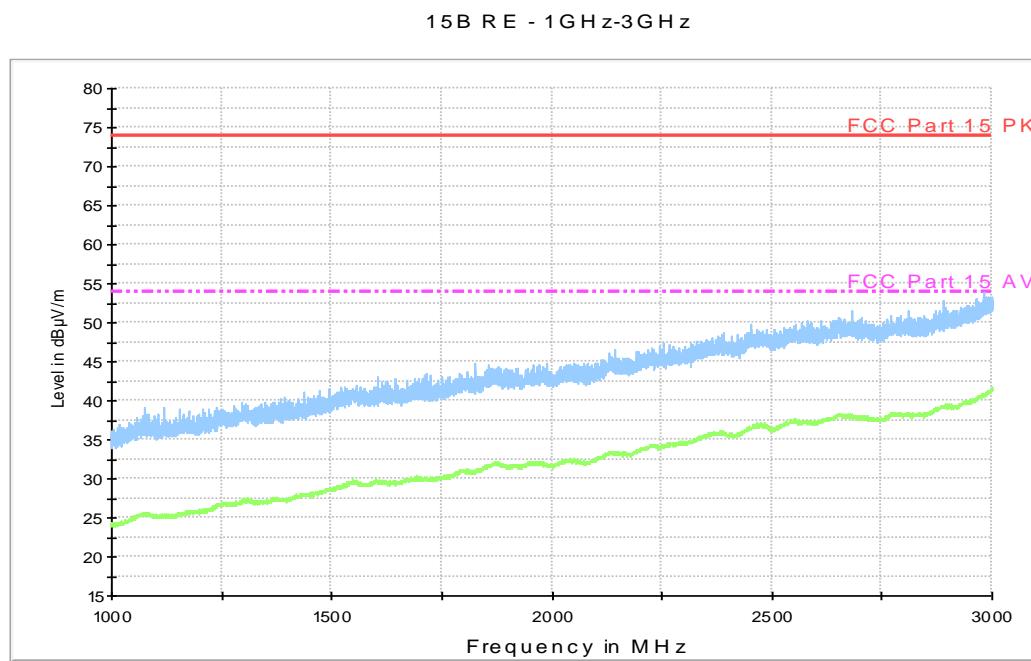



Figure A.5 Radiated Emission from 1GHz to 3GHz

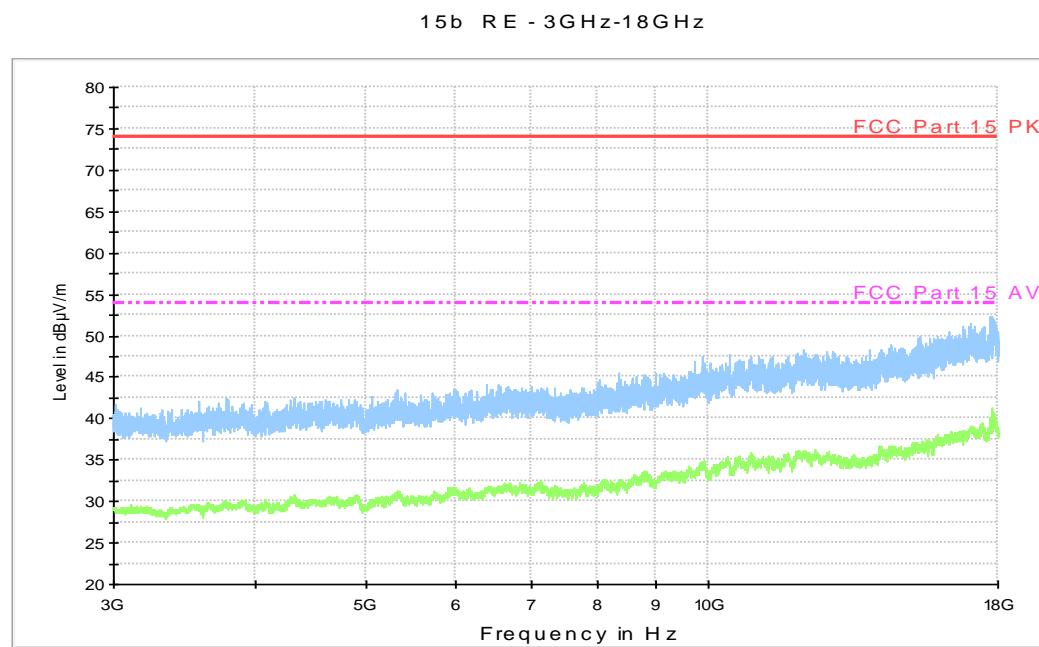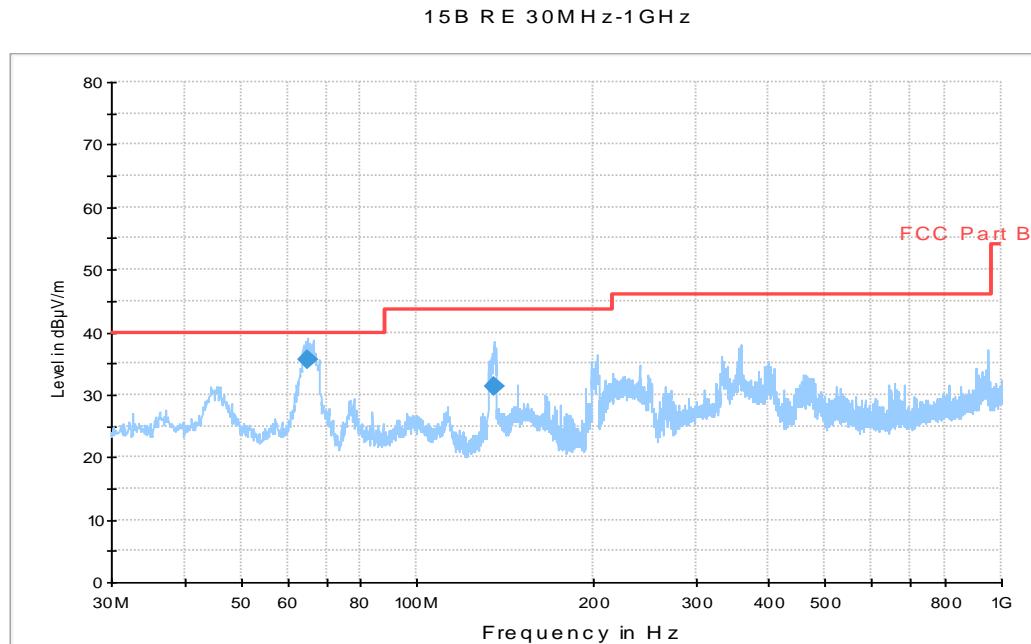


**Figure A.6 Radiated Emission from 3GHz to 18GHz**

**USB Mode, Set.5**

**Figure A.7 Radiated Emission from 30MHz to 1GHz**
**Final Result 1**

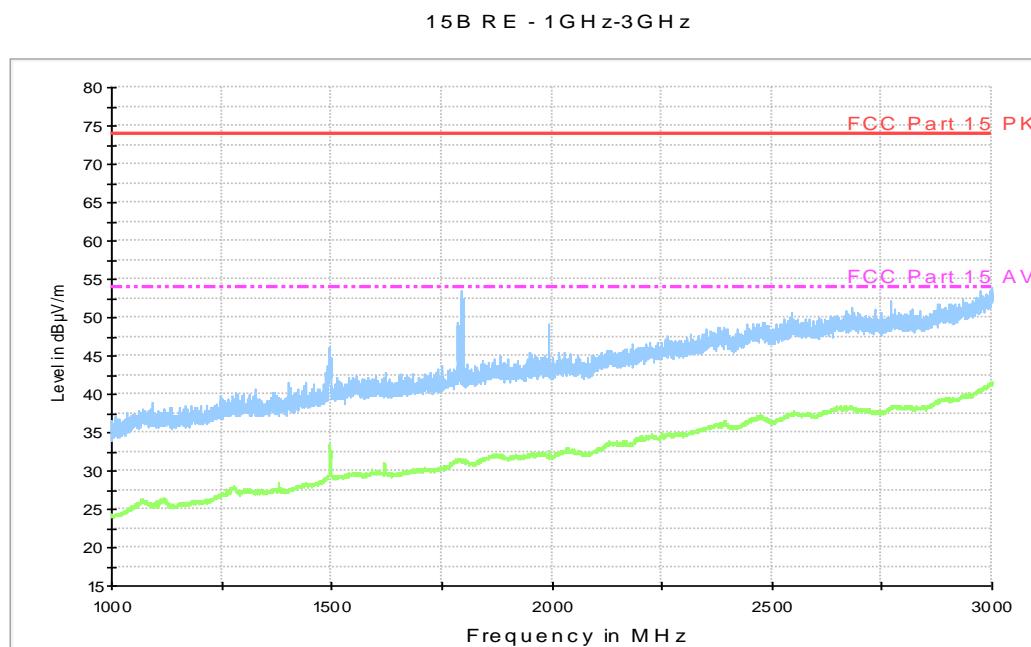Frequency	QuasiPeak	Height	Polarization	Azimuth	Corr.	Margin	Limit
65.114000	35.7	100.0	V	287.0	-20.5	4.3	40.0
135.342000	31.2	120.0	V	189.0	-20.7	12.3	43.5

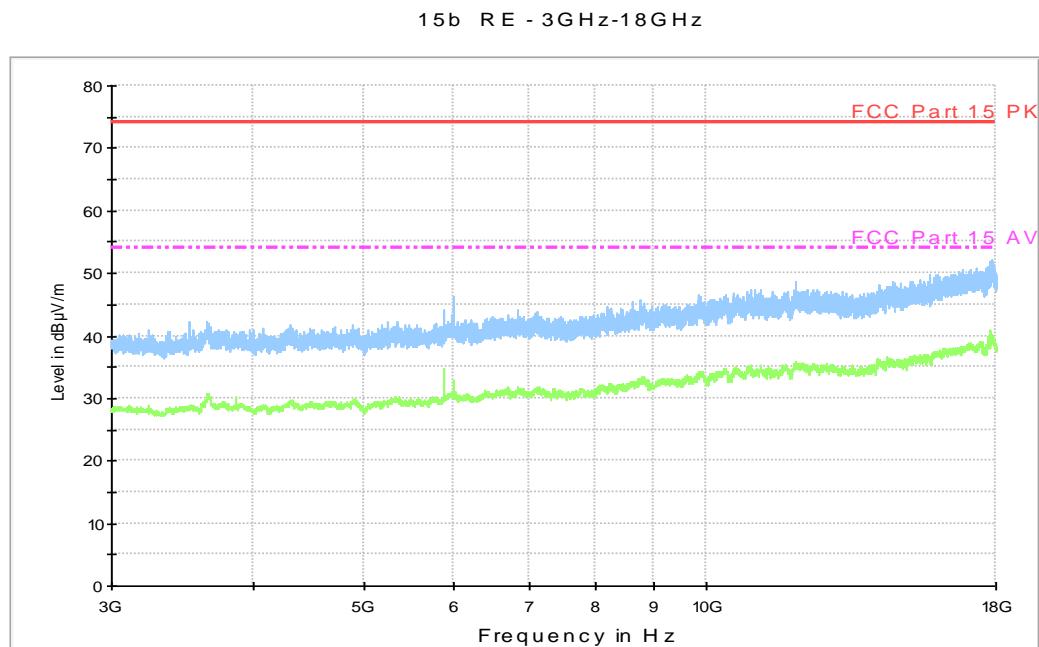
**Figure A.8 Radiated Emission from 1GHz to 3GHz**



**Figure A.9 Radiated Emission from 3GHz to 18GHz**

## A.2 Conducted Emission

### Reference

FCC: CFR Part 15.107(a).

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

### A.2.2 EUT Operating Mode

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U = 3.38\text{dB}$ ,  $k=2$ .

#### Charging Mode, Set.1

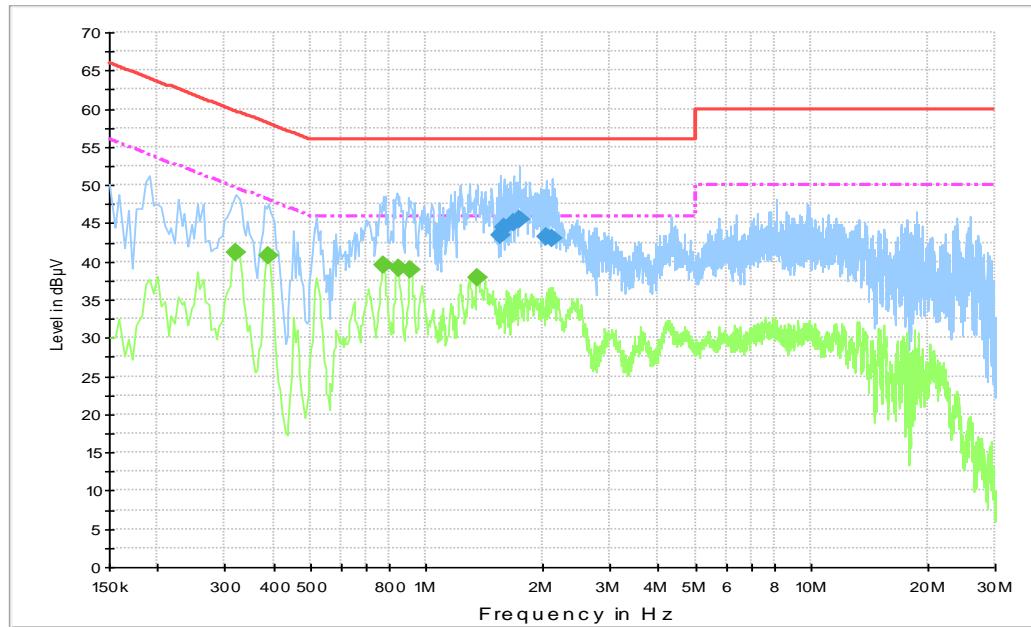


Figure A.10 Conducted Emission


#### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.554000	43.4	2000.0	9.000	On	L1	10.2	12.6	56.0
1.585500	44.6	2000.0	9.000	On	L1	10.2	11.4	56.0
1.680000	45.2	2000.0	9.000	On	L1	10.2	10.8	56.0
1.743000	45.6	2000.0	9.000	On	L1	10.2	10.4	56.0
2.040000	43.2	2000.0	9.000	On	L1	10.3	12.8	56.0
2.125500	43.1	2000.0	9.000	On	L1	10.3	12.9	56.0

#### Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.321000	41.2	2000.0	9.000	On	N	10.3	8.5	49.7
0.388500	40.7	2000.0	9.000	On	N	10.3	7.4	48.1
0.771000	39.6	2000.0	9.000	On	N	10.3	6.4	46.0
0.843000	39.2	2000.0	9.000	On	N	10.3	6.8	46.0
0.906000	38.9	2000.0	9.000	On	N	10.3	7.1	46.0
1.356000	37.9	2000.0	9.000	On	N	10.3	8.1	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

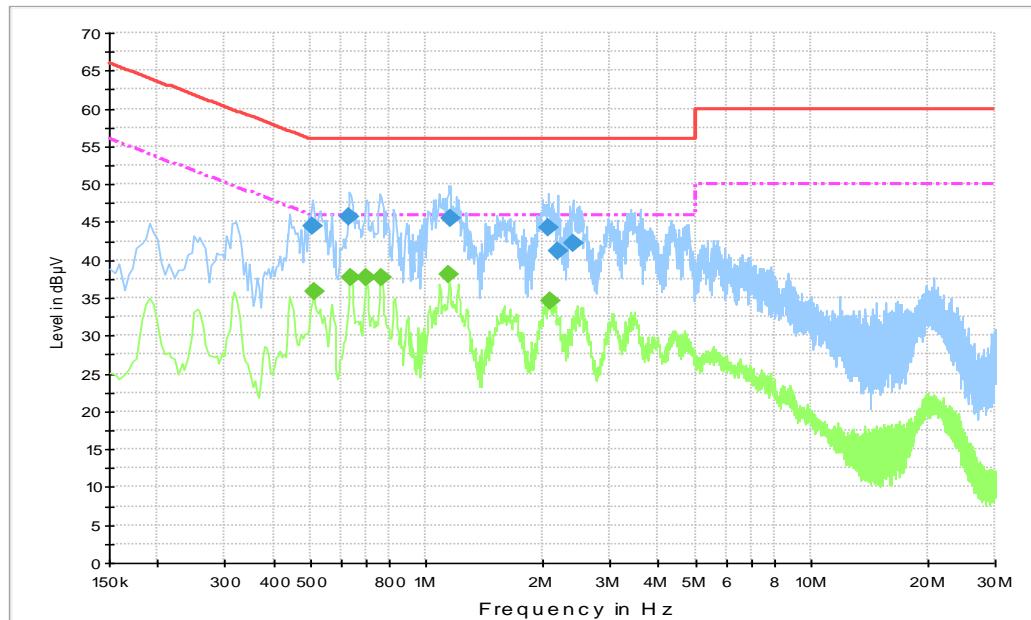
**Charging Mode, Set.3**

**Figure A.10 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.505500	44.4	2000.0	9.000	On	L1	10.2	11.6	56.0
0.631500	45.6	2000.0	9.000	On	L1	10.2	10.4	56.0
1.149000	45.5	2000.0	9.000	On	L1	10.2	10.5	56.0
2.067000	44.2	2000.0	9.000	On	L1	10.3	11.8	56.0
2.197500	41.2	2000.0	9.000	On	L1	10.3	14.8	56.0
2.395500	42.3	2000.0	9.000	On	L1	10.3	13.7	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.510000	35.8	2000.0	9.000	On	N	10.3	10.2	46.0
0.636000	37.8	2000.0	9.000	On	N	10.3	8.2	46.0
0.699000	37.7	2000.0	9.000	On	N	10.3	8.3	46.0
0.766500	37.7	2000.0	9.000	On	N	10.3	8.3	46.0
1.144500	38.0	2000.0	9.000	On	N	10.3	8.0	46.0
2.089500	34.5	2000.0	9.000	On	N	10.4	11.5	46.0

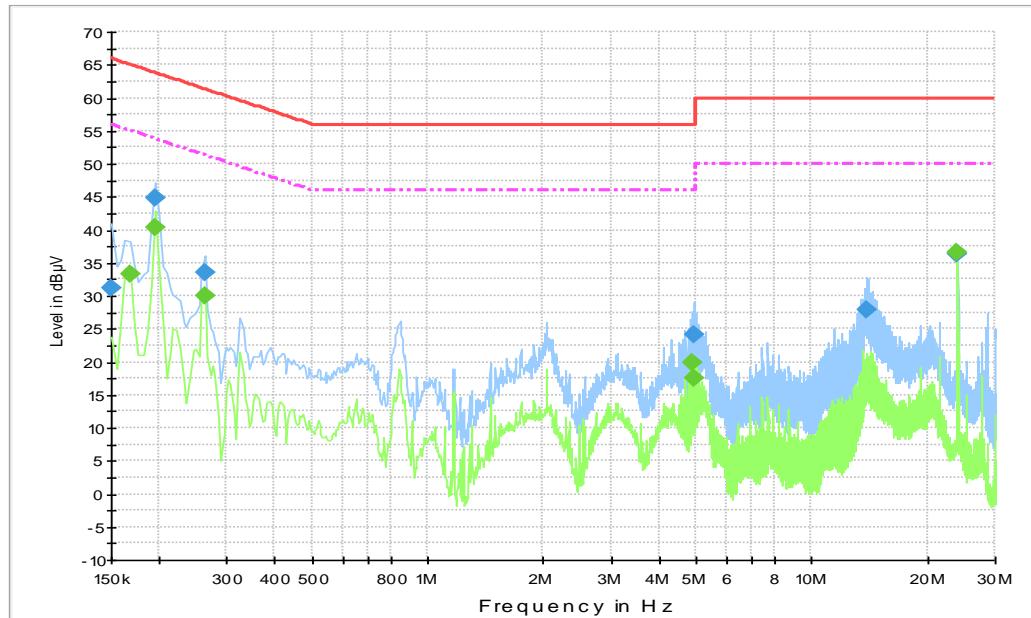Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

**USB Mode, Set.5**

**Figure A.11 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	31.3	2000.0	9.000	On	L1	10.2	34.7	66.0
0.195000	44.8	2000.0	9.000	On	N	10.3	19.0	63.8
0.262500	33.4	2000.0	9.000	On	L1	10.2	27.9	61.4
4.947000	24.1	2000.0	9.000	On	L1	10.4	31.9	56.0
13.857000	27.8	2000.0	9.000	On	N	10.8	32.2	60.0
23.968500	36.4	2000.0	9.000	On	L1	11.3	23.6	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.168000	33.3	2000.0	9.000	On	L1	10.2	21.8	55.1
0.195000	40.3	2000.0	9.000	On	L1	10.2	13.5	53.8
0.262500	30.0	2000.0	9.000	On	L1	10.2	21.3	51.4
4.879500	20.0	2000.0	9.000	On	L1	10.4	26.0	46.0
4.947000	17.4	2000.0	9.000	On	L1	10.4	28.6	46.0
23.968500	36.5	2000.0	9.000	On	L1	11.3	13.5	50.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

**\*\*\*END OF REPORT\*\*\***