



# TEST REPORT

No. I22N01844-BT

**TCL Communication Ltd.**

**Mobile Phone**

**Model Name: T506A**

**with**

**Hardware Version: V01**

**Software Version: vVJ52**

**FCC ID: 2ACCJB186**

**Issued Date: 2022-09-09**

**Designation Number: CN1210**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

**Shenzhen Academy of Information and Communications Technology**

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001

Email: [yewu@caict.ac.cn](mailto:yewu@caict.ac.cn), website: [www.csxit.com](http://www.csxit.com)

## **CONTENTS**

<b>1. SUMMARY OF TEST REPORT.....</b>	<b>3</b>
1.1. TEST ITEMS.....	3
1.2. TEST STANDARDS .....	3
1.3. TEST RESULT .....	3
1.4. TESTING LOCATION .....	3
1.5. PROJECT DATA .....	3
1.6. SIGNATURE .....	3
<b>2. CLIENT INFORMATION.....</b>	<b>4</b>
2.1. APPLICANT INFORMATION .....	4
2.2. MANUFACTURER INFORMATION .....	4
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
3.1. ABOUT EUT .....	5
3.2. INTERNAL IDENTIFICATION OF EUT .....	5
3.3. INTERNAL IDENTIFICATION OF AE.....	5
3.4. GENERAL DESCRIPTION.....	6
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
<b>5. TEST RESULTS .....</b>	<b>8</b>
5.1. TESTING ENVIRONMENT.....	8
5.2. TEST RESULTS .....	8
5.3. STATEMENTS.....	8
<b>6. TEST EQUIPMENTS UTILIZED .....</b>	<b>9</b>
<b>7. LABORATORY ENVIRONMENT.....</b>	<b>10</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
<b>ANNEX A: DETAILED TEST RESULTS.....</b>	<b>12</b>
A.0 ANTENNA REQUIREMENT .....	12
A.1 MAXIMUM PEAK OUTPUT POWER .....	13
A.2 BAND EDGES COMPLIANCE .....	14
A.3 CONDUCTED EMISSION.....	21
A.4 RADIATED EMISSION.....	32
A.5 20dB BANDWIDTH.....	45
A.6 TIME OF OCCUPANCY (DWELL TIME) .....	50
A.7 NUMBER OF HOPPING CHANNELS.....	54
A.8 CARRIER FREQUENCY SEPARATION .....	58
A.9 AC POWER LINE CONDUCTED EMISSION .....	60



## **1. Summary of Test Report**

### **1.1. Test Items**

Description	Mobile Phone
Model Name	T506A
Code Name	T506A1
Applicant's name	TCL Communication Ltd.
Manufacturer's Name	TCL Communication Ltd.

### **1.2. Test Standards**

FCC Part15-2019; ANSI C63.10-2013

### **1.3. Test Result**

**Pass**

Please refer to 5.2 Test Results.

### **1.4. Testing Location**

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

### **1.5. Project data**

Testing Start Date: 2022-08-09  
Testing End Date: 2022-09-05

### **1.6. Signature**

---

Lin Kanfeng  
(Prepared this test report)

---

An Ran  
(Reviewed this test report)

---

Zhang Bojun  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact Person: Annie Jiang  
E-Mail: nianxiang.jiang@tcl.com  
Telephone: +86 755 3661 1621  
FAX: +86 755 3661 2000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact Person: Annie Jiang  
E-Mail: nianxiang.jiang@tcl.com  
Telephone: +86 755 3661 1621  
FAX: +86 755 3661 2000-81722



### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Mobile Phone
Model Name	T506A
Frequency Band	2400MHz~2483.5MHz
Equipment type	Bluetooth® BR/EDR
Type of Modulation	GFSK/π /4 DQPSK/8DPSK
Number of Channels	79
Antenna Type	Integrated
Antenna Gain	-1.21 dBi
Power Supply	3.85V DC by Battery
FCC ID	2ACCJB186
Condition of EUT as received	No abnormality in appearance

#### **3.2. Internal Identification of EUT**

EUT ID*	IMEI	HW Version	SW Version	Receive Date
UT01aa	350634890001540	V01	vVJ52	2022-08-09
UT18aa	353380540006466	V01	vVJ52	2022-08-16

\*EUT ID: is used to identify the test sample in the lab internally.

\*UT01aa is used for Conduction test; UT18aa is used for Radiation test and AC Power line Conducted Emission test.

#### **3.3. Internal Identification of AE**

AE ID*	Description	SN
AE1	Battery	/
AE2	Battery	/
AE3	Charger	/
AE4	Charger	/
AE1		
	Model	TLp048A8
	Manufacturer	Dongguan Ganfeng Electronics co., LTD
	Capacity	5000mAh
	Nominal Voltage	3.85V
AE2		
	Model	TLp048A7
	Manufacturer	VEKEN
	Capacity	5000mAh
	Nominal Voltage	3.85V
AE3		
	Model	UT-681A-5200ZCY



No. I22N01844-BT

Manufacturer	Shenzhen Baijunda Electronic Co., Ltd
AE4	
Model	UC13US
Manufacturer	Puan

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. General Description**

The Equipment under Test (EUT) is a model of Mobile Phone with integrated antenna and battery. It consists of normal options: Lithium Battery and Charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the client.



## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz	2019
ANSI C63.10	American National Standard of Procedures for Compliance 2013 Testing of Unlicensed Wireless Devices	

## 5. Test Results

### 5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

### 5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Peak Output Power	15.247 (b)	P
2	Band Edges Compliance	15.247 (d)	P
3	Conducted Spurious Emission	15.247 (d)	P
4	Radiated Spurious Emission	15.247, 15.205, 15.209	P
5	Occupied 20dB bandwidth	15.247 (a)	I
6	Time of Occupancy (Dwell Time)	15.247 (a)	P
7	Number of Hopping Channel	15.247 (a)	P
8	Carrier Frequency Separation	15.247 (a)	P
9	AC Power line Conducted Emission	15.107, 15.207	P

See **ANNEX A** for details.

### 5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacturer as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

Disclaimer:

A. After confirmation with the customer, the sample information provided by the customer may affect the validity of the measurement results in this report, and the impact and consequences arising therefrom shall be borne by the customer.

B. The samples in this report are provided by the customer, and the test results are only applicable to the samples received.

According to the customer's description, T506A (Code Name: T506A1) is a variant product of T506A (Code Name: T506A). All results were from the initial model. The initial model report number is I22N01585-BT.

## 6. Test Equipments Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2022-12-29	1 year
2	Bluetooth Tester	CBT32	100584	Rohde & Schwarz	2022-12-29	1 year
3	Power Sensor	U2021XA	MY55430013	Keysight	2022-12-29	1 year
4	Data Acquisiton	U2531A	TW55443507	Keysight	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due Date	Calibration Period
1	LISN	ENV216	102067	R&S	2023-07-14	1 year
2	Test Receiver	ESCI	100702	R&S	2023-01-12	1 year
3	Loop Antenna	HLA6120	35779	TESEQ	2025-04-24	3 year
4	BiLog Antenna	3142E	0224831	ETS-Lindgren	2024-05-27	3 year
5	Horn Antenna	3117	00066577	ETS-Lindgren	2025-04-01	3 year
6	Test Receiver	ESR7	101676	R&S	2022-11-24	1 year
7	Spectrum Analyzer	FSV40	101192	R&S	2023-01-12	1 year
8	Chamber	FACT3-2.0	1285	ETS-Lindgren	2023-05-29	2 year
9	Antenna	QSH-SL-1 8-26-S-20	17013	Q-par	2023-01-06	3 year
10	Antenna	QSH-SL-1 8-40-K-SG	15979	Q-par	2023-01-06	3 year

### Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1
2	EMC32	Rohde & Schwarz	10.50.40

EUT is engineering software provided by the customer to control the transmitting signal.

The EUT was programmed to be in continuously transmitting mode.

### Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

## **7. Laboratory Environment**

### **Semi-anechoic chamber**

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz > 60 dB; 1MHz-18000MHz > 90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3 m distance, from 30 to 1000 MHz

### **Shielded room**

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz > 60 dB; 1MHz-18000MHz > 90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

### **Fully-anechoic chamber**

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz > 60 dB; 1MHz-18000MHz > 90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

## **8. Measurement Uncertainty**

<b>Test Name</b>	<b>Uncertainty (<i>k</i>=2)</b>	
1. RF Output Power - Conducted	1.32dB	
2. Time of Occupancy - Conducted	0.58ms	
3. Occupied channel bandwidth - Conducted	4.56kHz	
4. Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f < 1\text{GHz}$	1.41dB
	$1\text{GHz} \leq f < 7\text{GHz}$	1.92dB
	$7\text{GHz} \leq f < 13\text{GHz}$	2.31dB
	$13\text{GHz} \leq f \leq 26\text{GHz}$	2.61dB
5. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f < 30\text{MHz}$	1.79dB
	$30\text{MHz} \leq f < 1\text{GHz}$	4.86dB
	$1\text{GHz} \leq f < 18\text{GHz}$	4.50dB
	$18\text{GHz} \leq f \leq 40\text{GHz}$	2.90dB
6. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	2.62dB

## **ANNEX A: Detailed Test Results**

### **A.0 Antenna requirement**

#### **Measurement Limit:**

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Conclusion: The Directional gains of antenna used for transmitting is -1.21 dBi. The RF transmitter uses an integrate antenna without connector.



## A.1 Maximum Peak Output Power

**Method of Measurement: See ANSI C63.10-clause 7.8.5.**

A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

**Measurement Limit:**

Standard	Limit (dBm)	E.I.R.P Limit (dBm)
FCC CRF Part 15.247 (b)	< 30	< 36

**Measurement Results:**

**Conducted transmitter power**

Mode	Peak Conducted Output Power (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	10.08	9.91	10.03
$\pi/4$ DQPSK	9.74	9.09	9.37
8DPSK	9.74	9.07	9.36

**E.I.R.P**

Mode	Peak Conducted Output Power (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	8.87	8.70	8.82
$\pi/4$ DQPSK	8.53	7.88	8.16
8DPSK	8.53	7.86	8.15

Note: E.I.R.P value = Conducted values (with conducted samples) + Antenna Gain.

**Conclusion: Pass**

## A.2 Band Edges Compliance

### Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

### Measurement Result:

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	ON	Fig.1	P
	78	ON	Fig.2	P
$\pi/4$ DQPSK	0	ON	Fig.3	P
	78	ON	Fig.4	P
8DPSK	0	ON	Fig.5	P
	78	ON	Fig.6	P

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	OFF	Fig.7	P
	78	OFF	Fig.8	P
$\pi/4$ DQPSK	0	OFF	Fig.9	P
	78	OFF	Fig.10	P
8DPSK	0	OFF	Fig.11	P
	78	OFF	Fig.12	P

See below for test graphs.

Conclusion: Pass

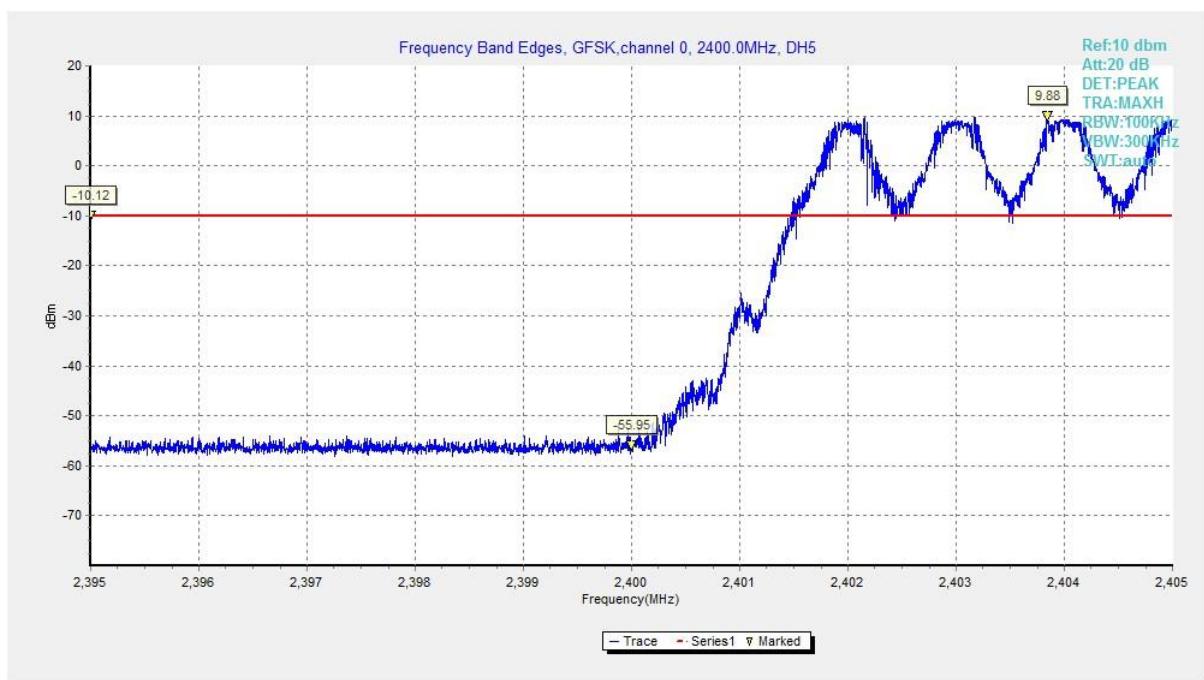


Fig. 1 Band Edges (GFSK, Ch 0, Hopping ON)

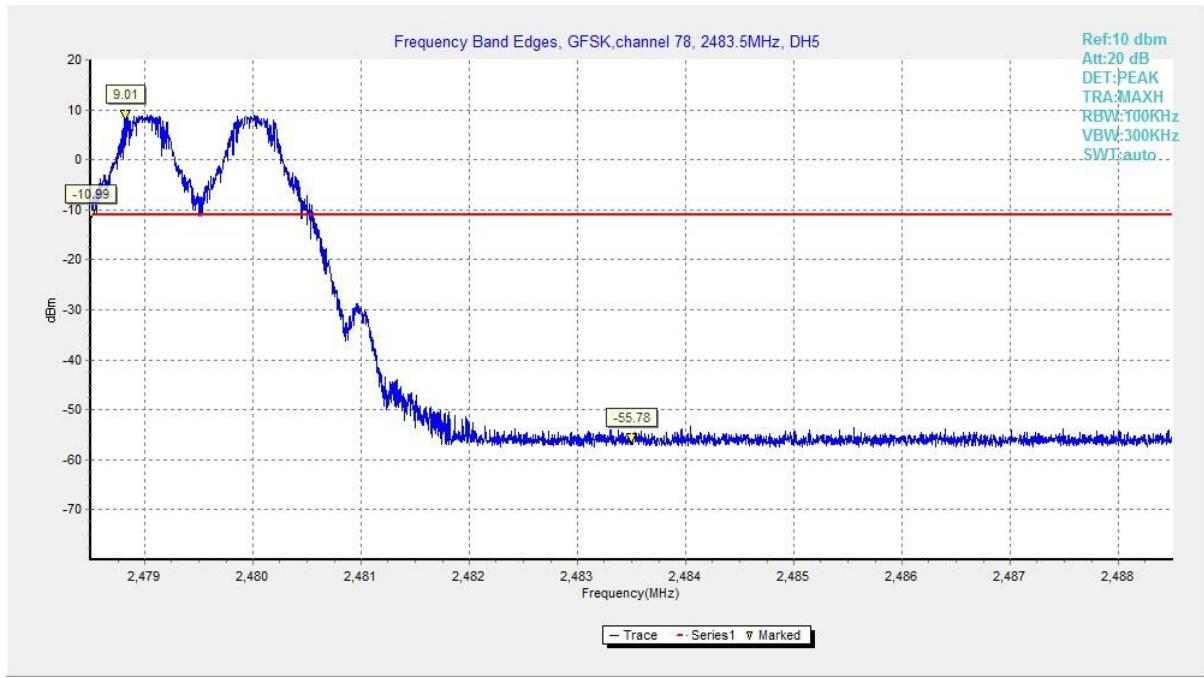


Fig. 2 Band Edges (GFSK, Ch 78, Hopping ON)

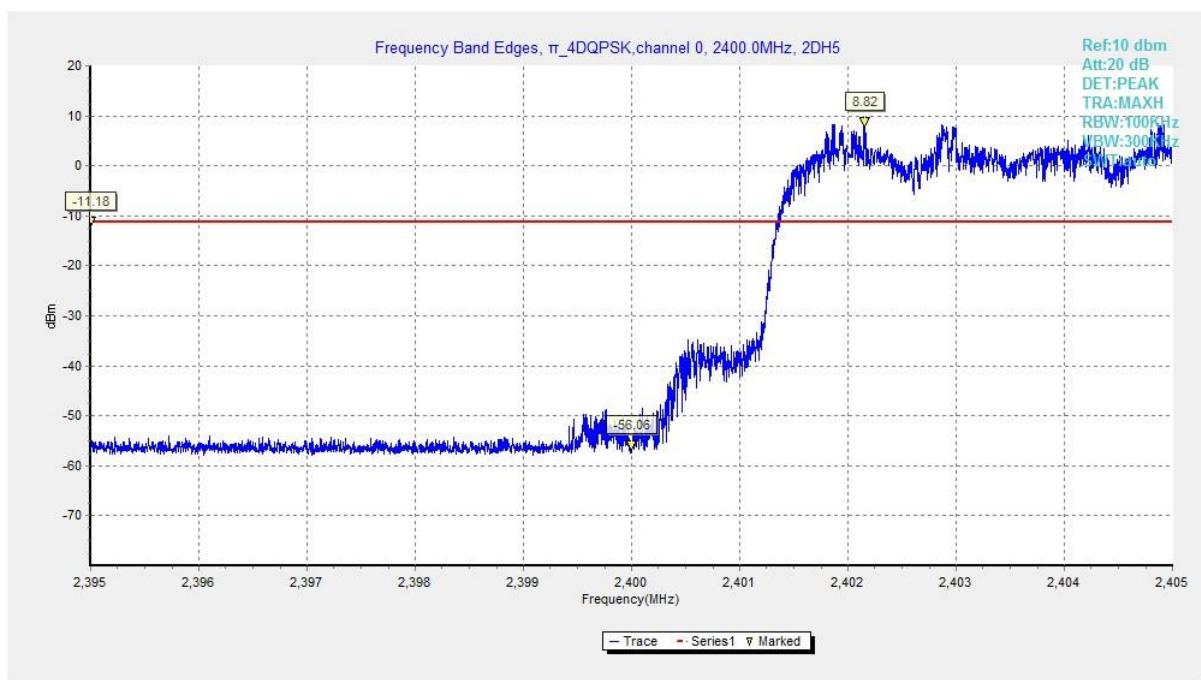


Fig. 3 Band Edges ( $\pi/4$  DQPSK, Ch 0, Hopping ON)



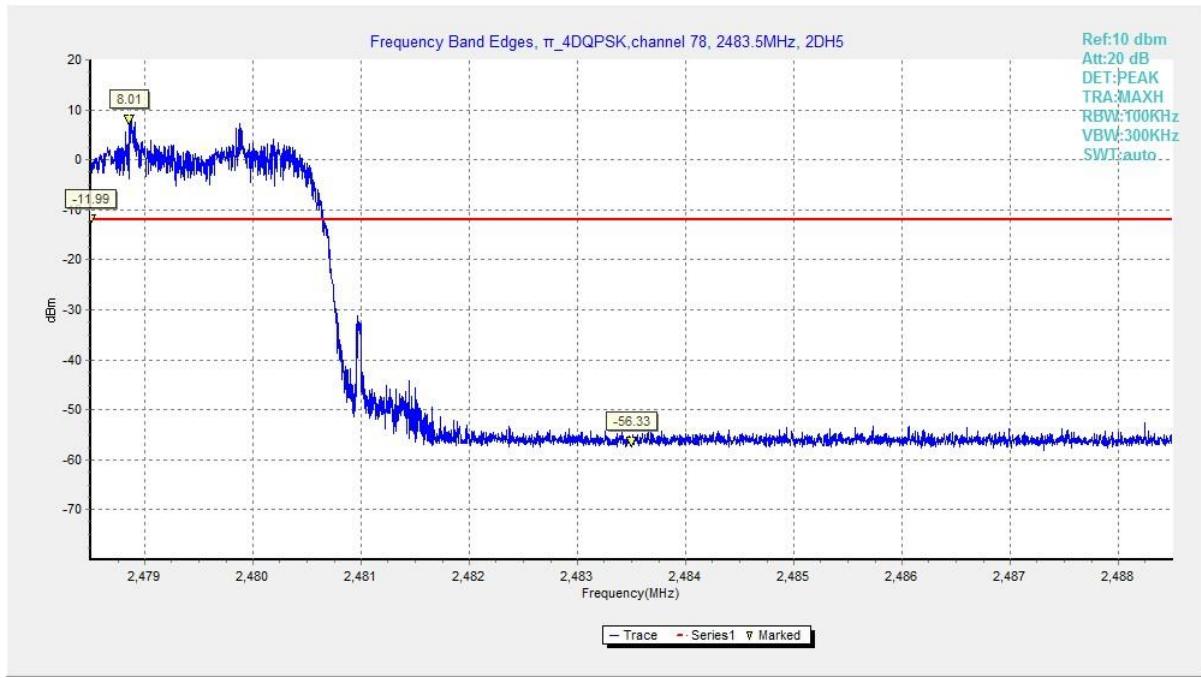


Fig. 4 Band Edges ( $\pi/4$  DQPSK, Ch 78, Hopping ON)

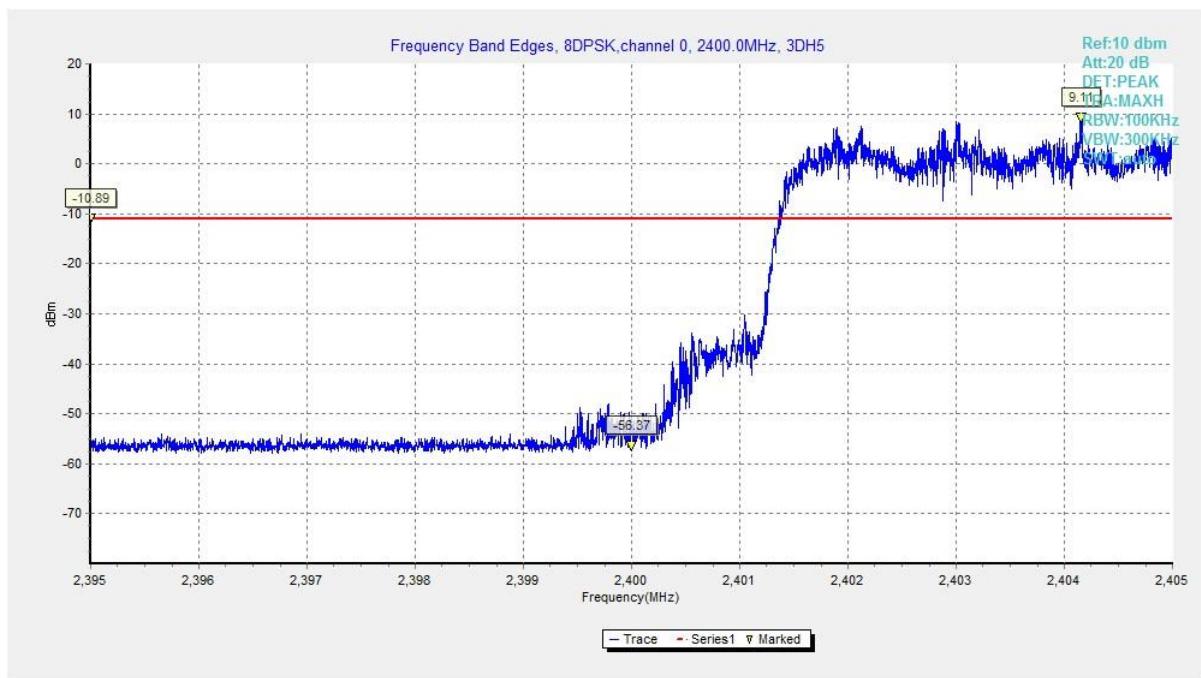

**Fig. 5 Band Edges (8DPSK, Ch 0, Hopping ON)**

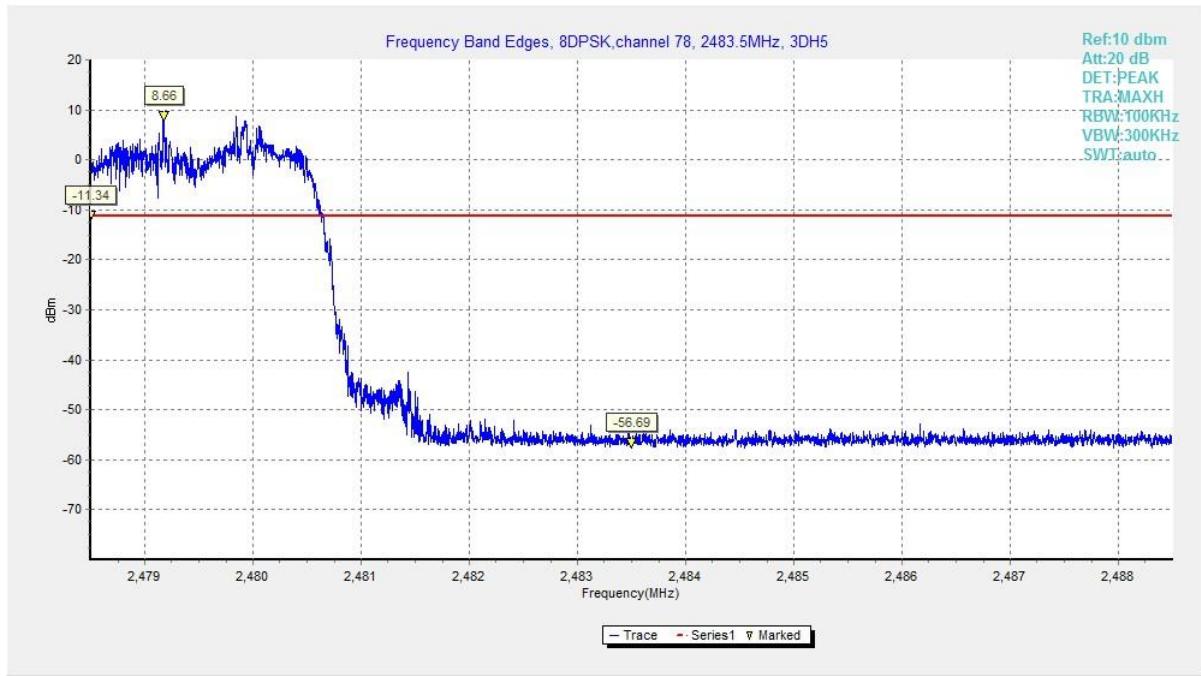

**Fig. 6 Band Edges (8DPSK, Ch 78, Hopping ON)**

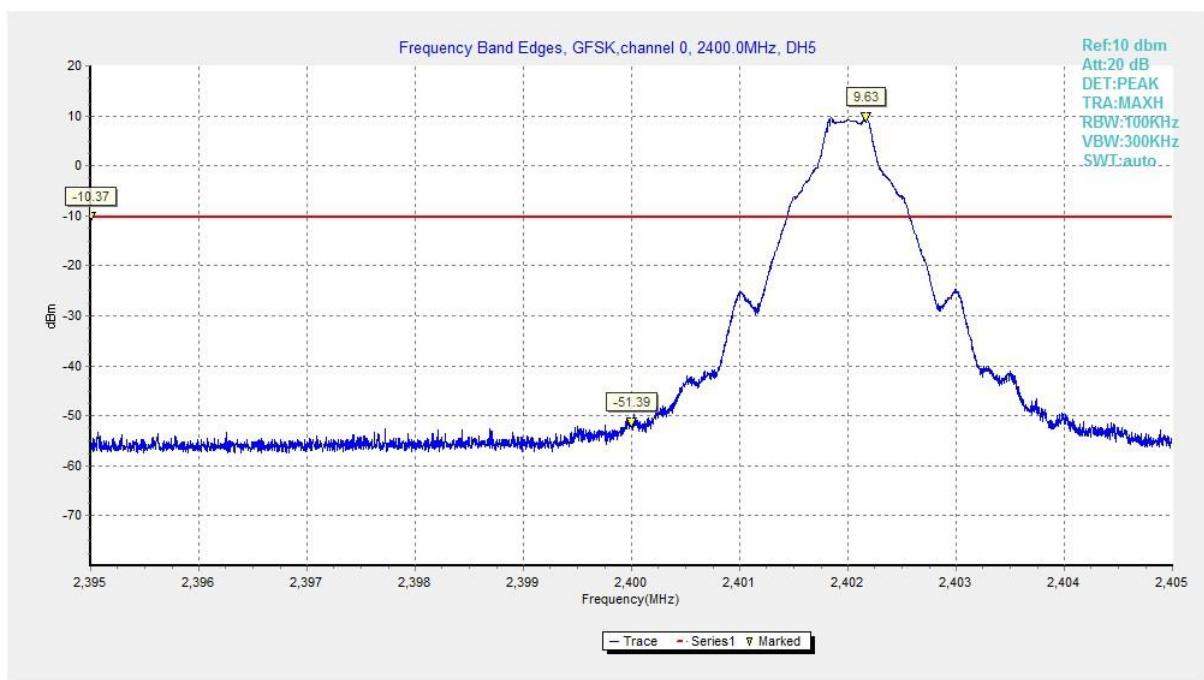


Fig. 7 Band Edges (GFSK, Ch 0, Hopping OFF)

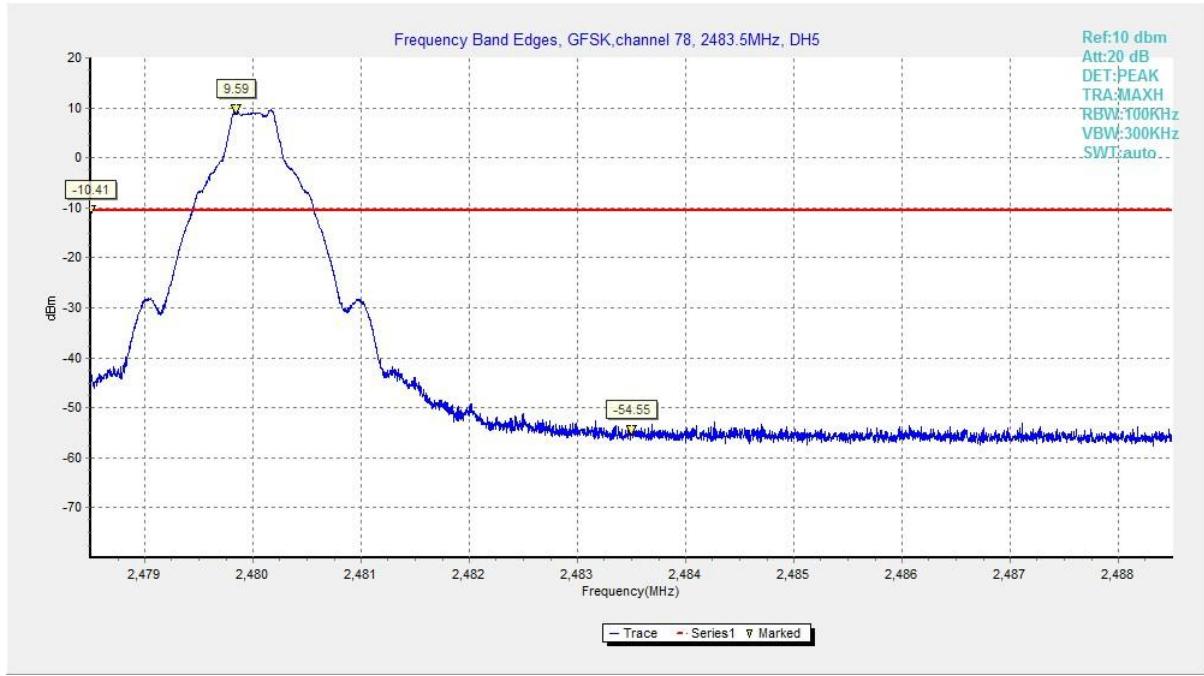


Fig. 8 Band Edges (GFSK, Ch 78, Hopping OFF)

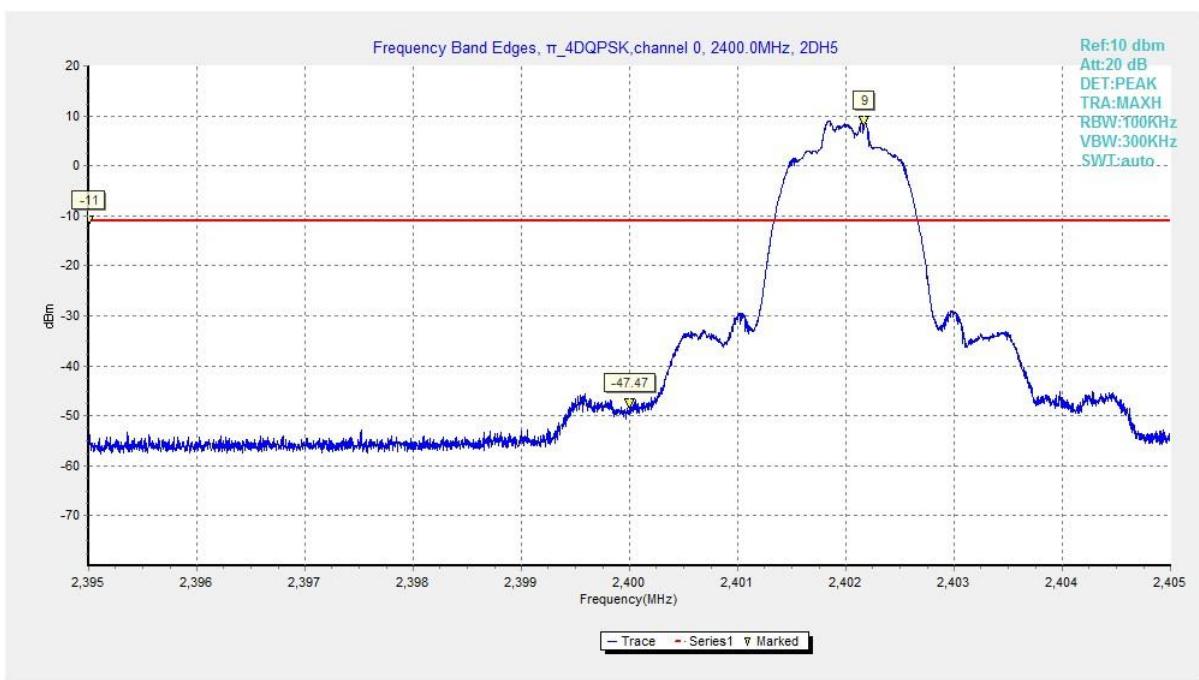


Fig. 9 Band Edges ( $\pi/4$  DQPSK, Ch 0, Hopping OFF)

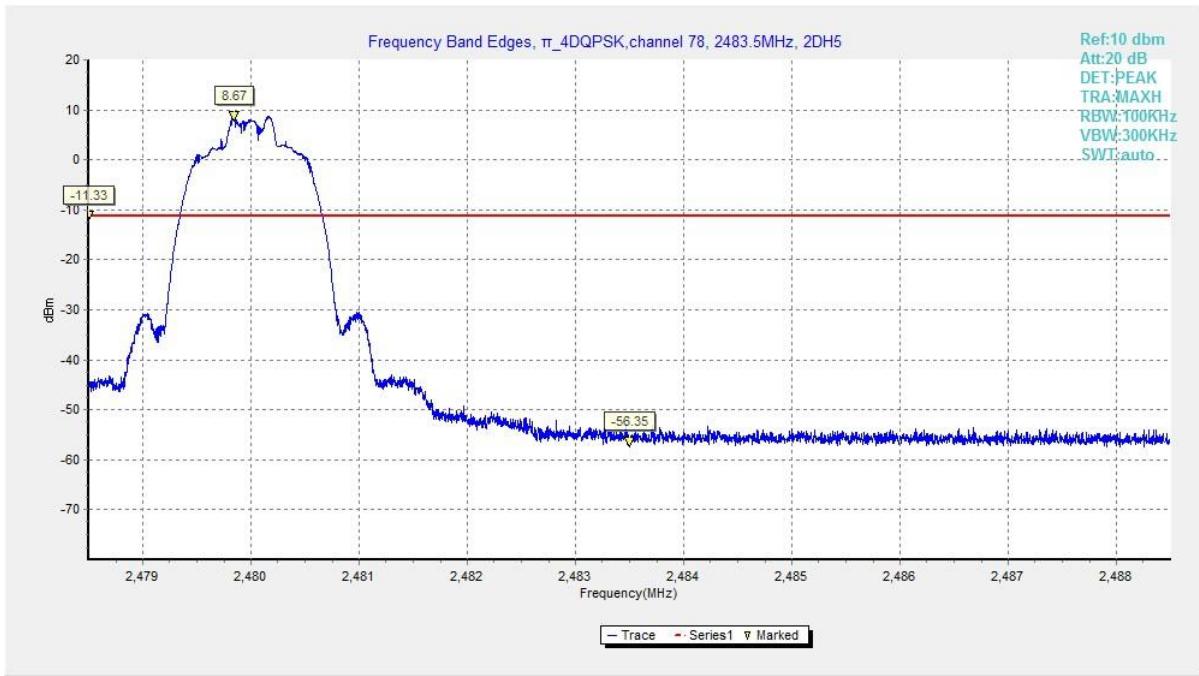


Fig. 10 Band Edges ( $\pi/4$  DQPSK, Ch 78, Hopping OFF)

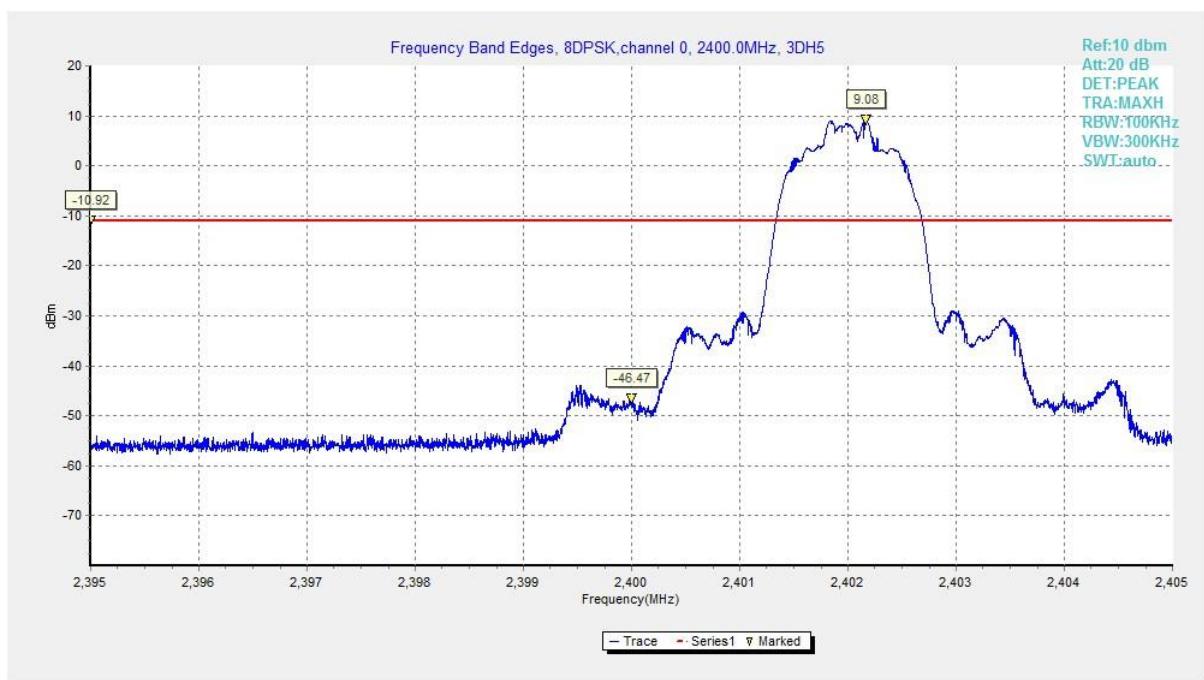


Fig. 11 Band Edges (8DPSK, Ch 0, Hopping OFF)

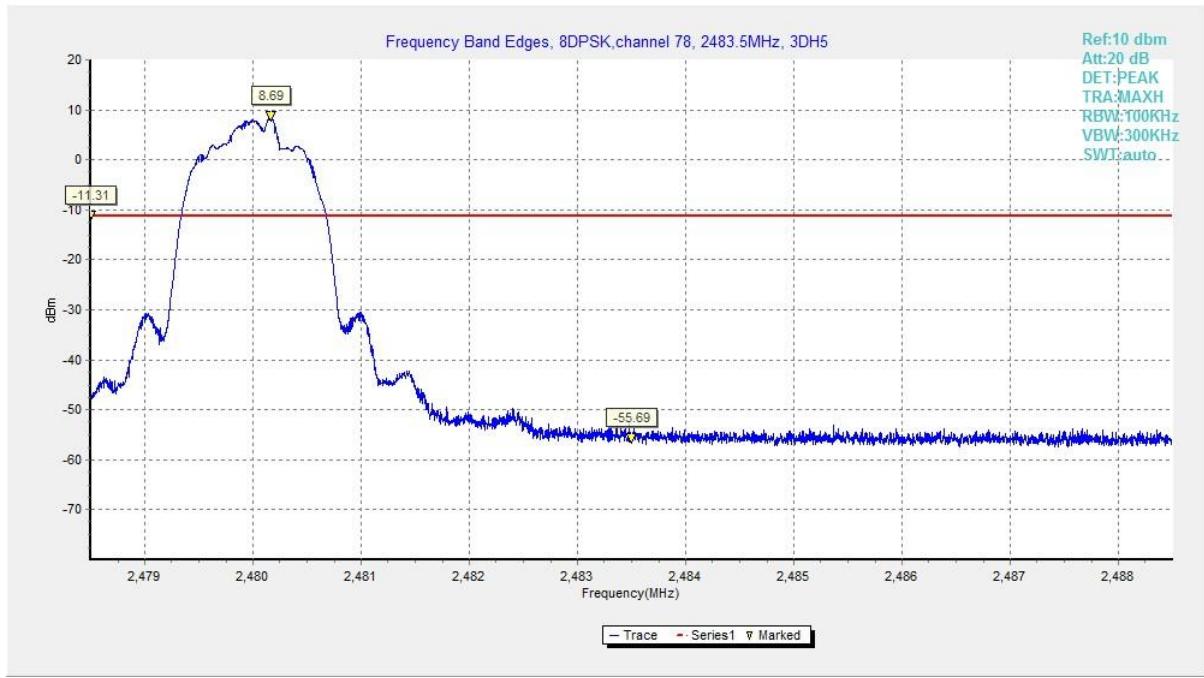


Fig. 12 Band Edges (8DPSK, Ch 78, Hopping OFF)

### A.3 Conducted Emission

#### Measurement Limit:


Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

#### Measurement Results:


MODE	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	1GHz-3GHz	Fig.13	P
		3GHz-10GHz	Fig.14	P
	39	1GHz-3GHz	Fig.15	P
		3GHz-10GHz	Fig.16	P
	78	1GHz-3GHz	Fig.17	P
		3GHz-10GHz	Fig.18	P
$\pi/4$ DQPSK	0	1GHz-3GHz	Fig.19	P
		3GHz-10GHz	Fig.20	P
	39	1GHz-3GHz	Fig.21	P
		3GHz-10GHz	Fig.22	P
	78	1GHz-3GHz	Fig.23	P
		3GHz-10GHz	Fig.24	P
8DPSK	0	1GHz-3GHz	Fig.25	P
		3GHz-10GHz	Fig.26	P
	39	1GHz-3GHz	Fig.27	P
		3GHz-10GHz	Fig.28	P
	78	1GHz-3GHz	Fig.29	P
		3GHz-10GHz	Fig.30	P
/	All channels	30 MHz-1GHz	Fig.31	P
		10GHz-26GHz	Fig.32	P

See below for test graphs.

Conclusion: Pass

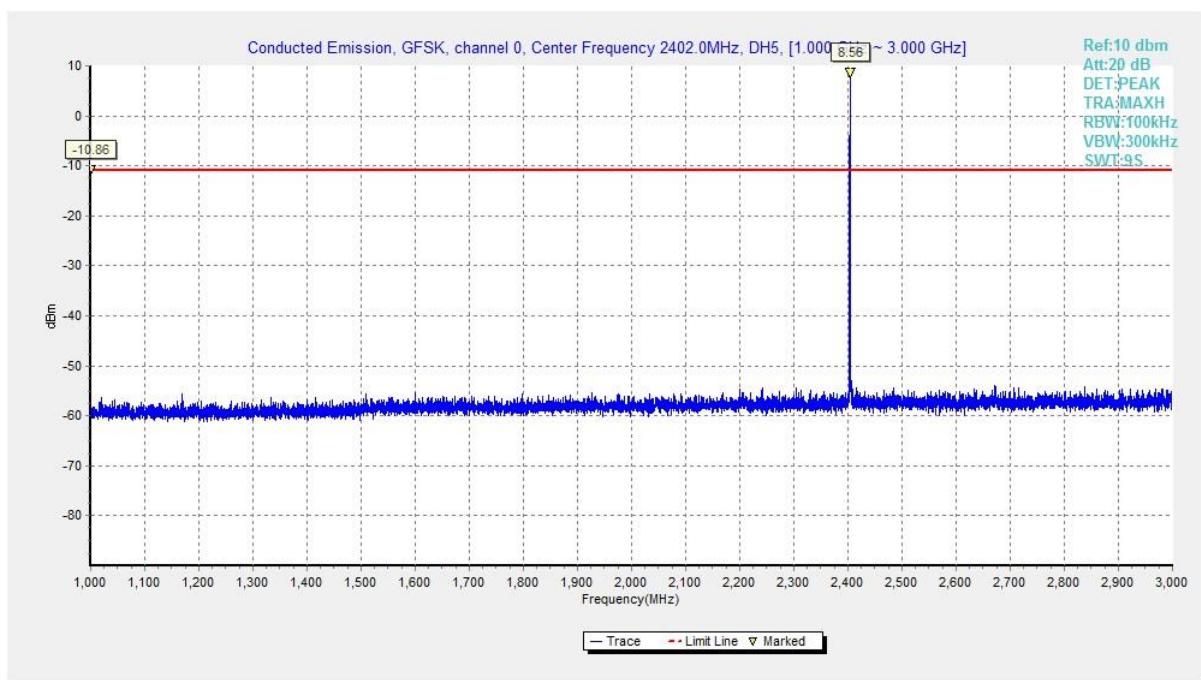

**Fig. 13 Conducted Spurious Emission (GFSK, Ch0, 1GHz-3GHz)**

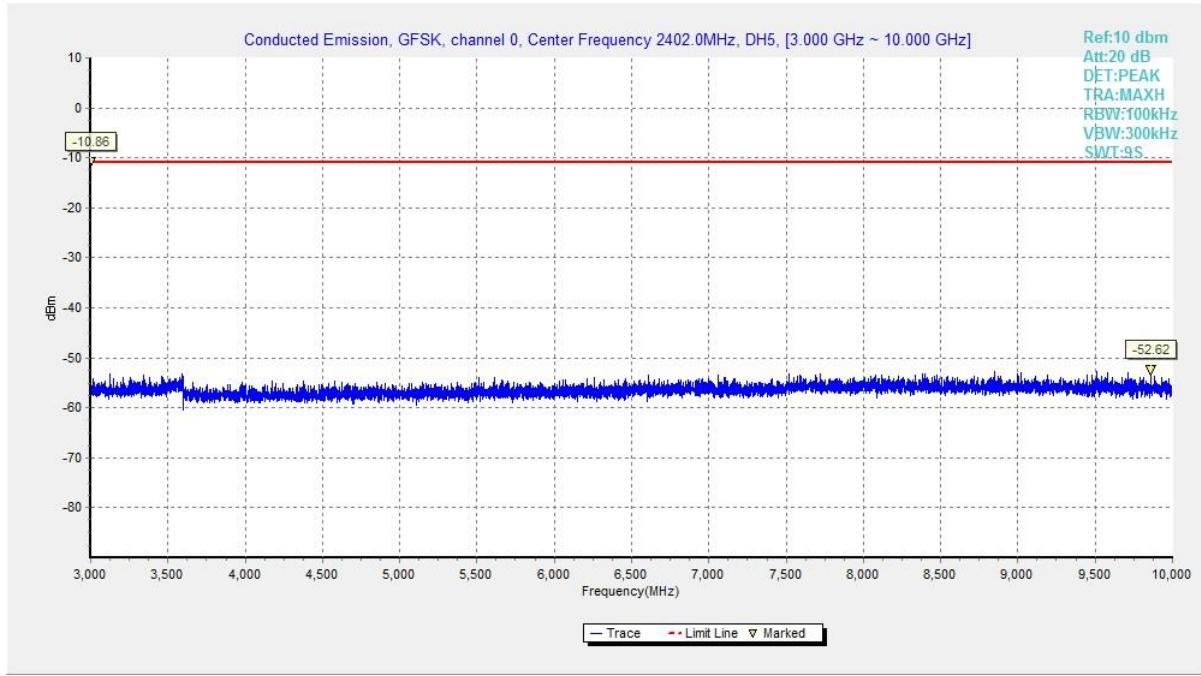

**Fig. 14 Conducted Spurious Emission (GFSK, Ch0, 3GHz-10GHz)**

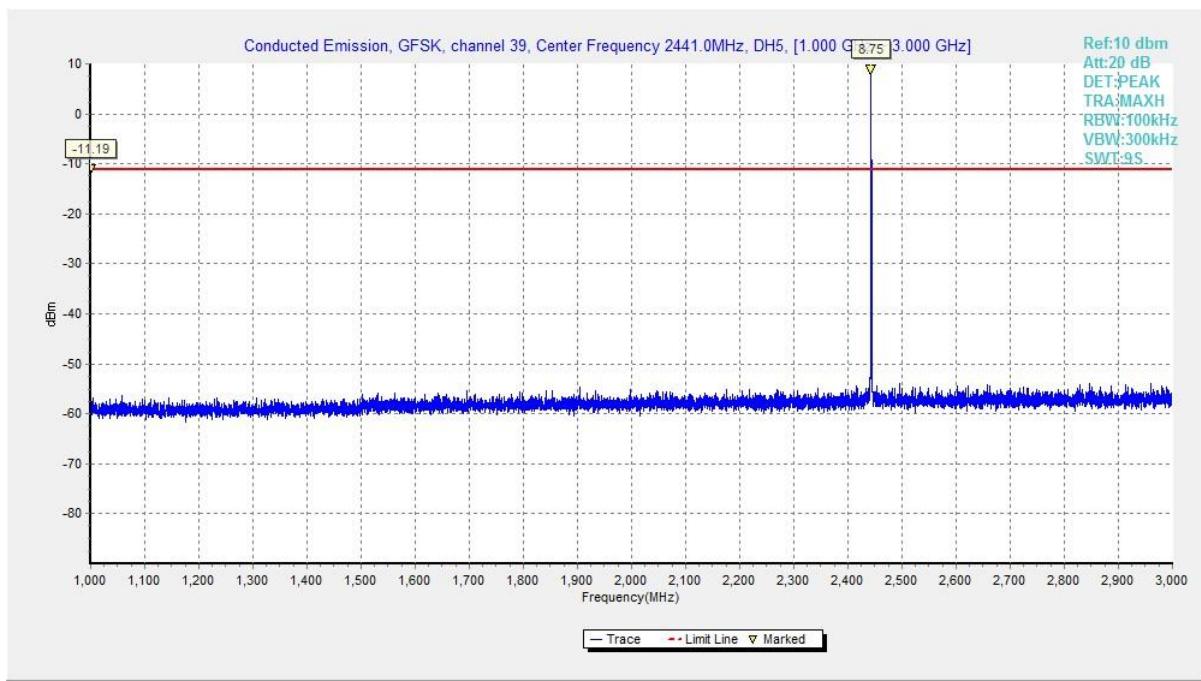


Fig. 15 Conducted Spurious Emission (GFSK, Ch39, 1GHz-3GHz)

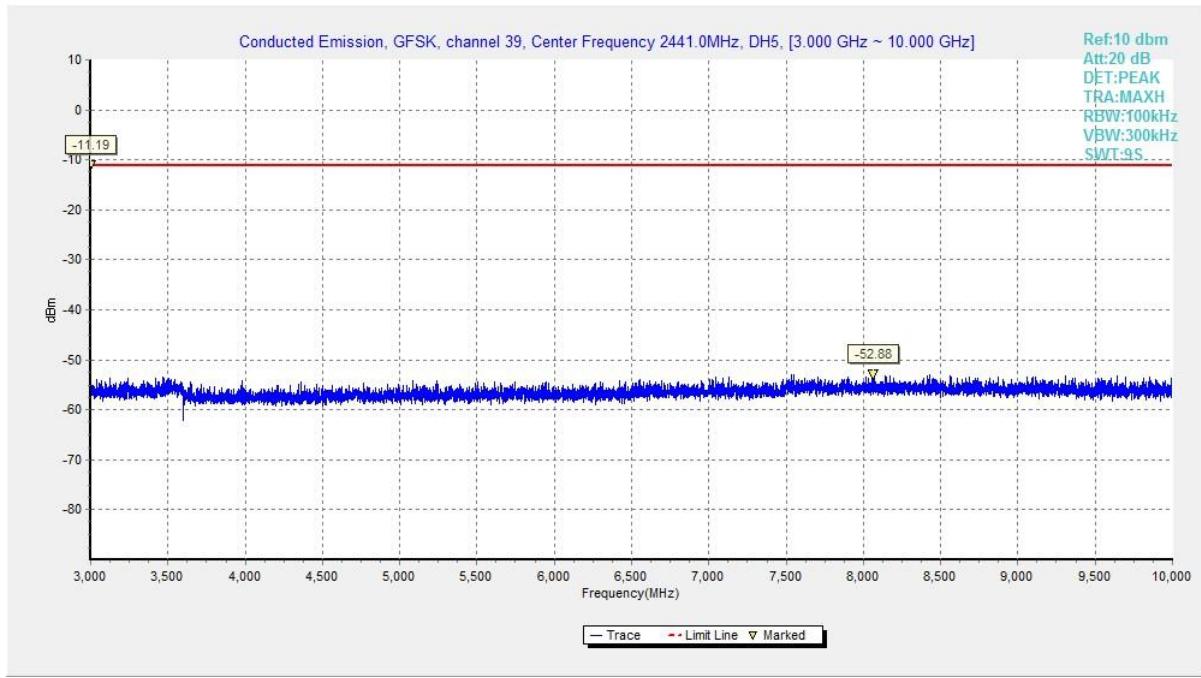


Fig. 16 Conducted Spurious Emission (GFSK, Ch39, 3GHz-10GHz)

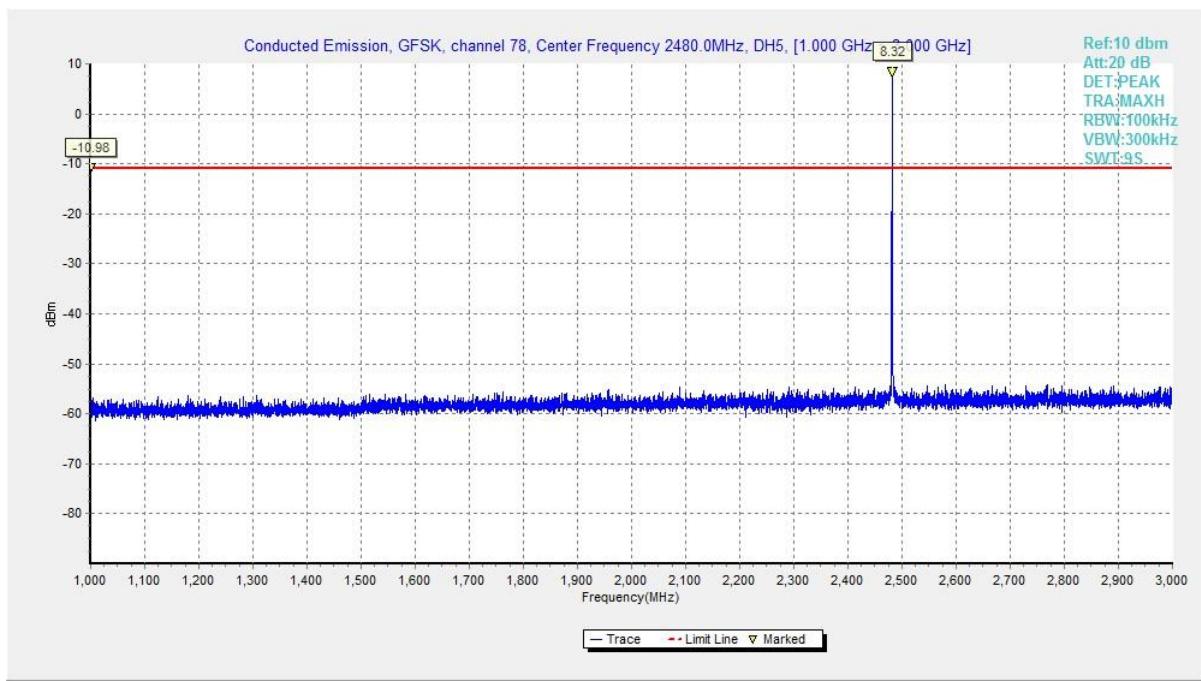


Fig. 17 Conducted Spurious Emission (GFSK, Ch78, 1GHz-3GHz)



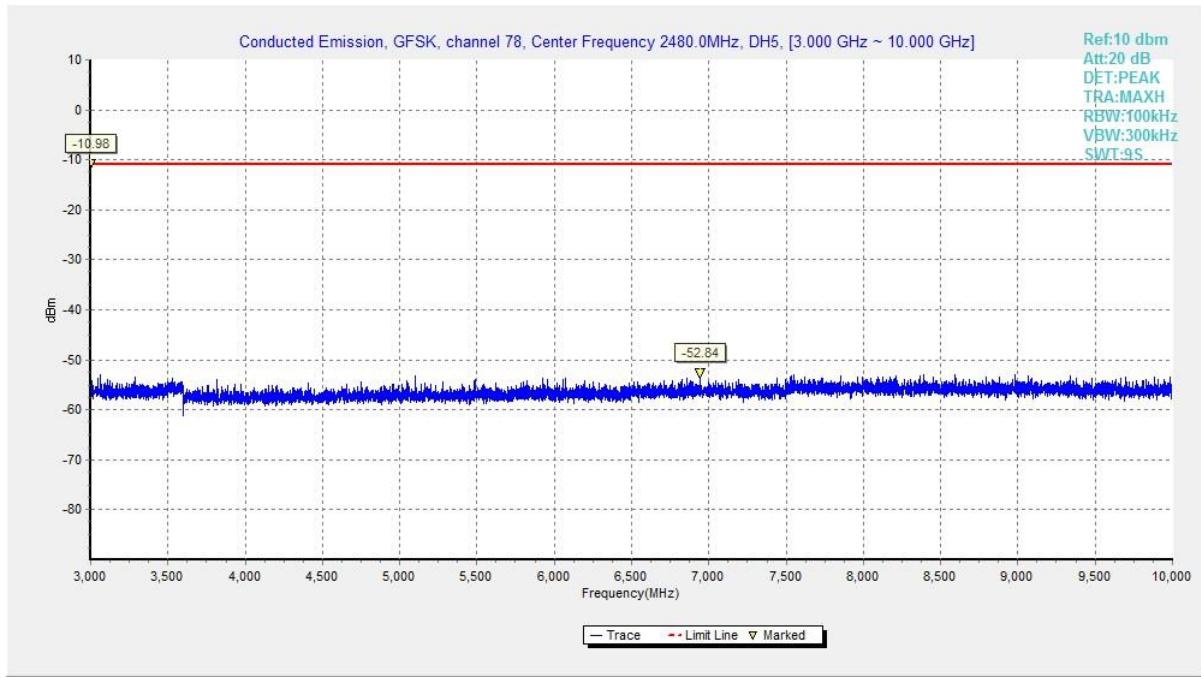



Fig. 18 Conducted Spurious Emission (GFSK, Ch78, 3GHz-10GHz)

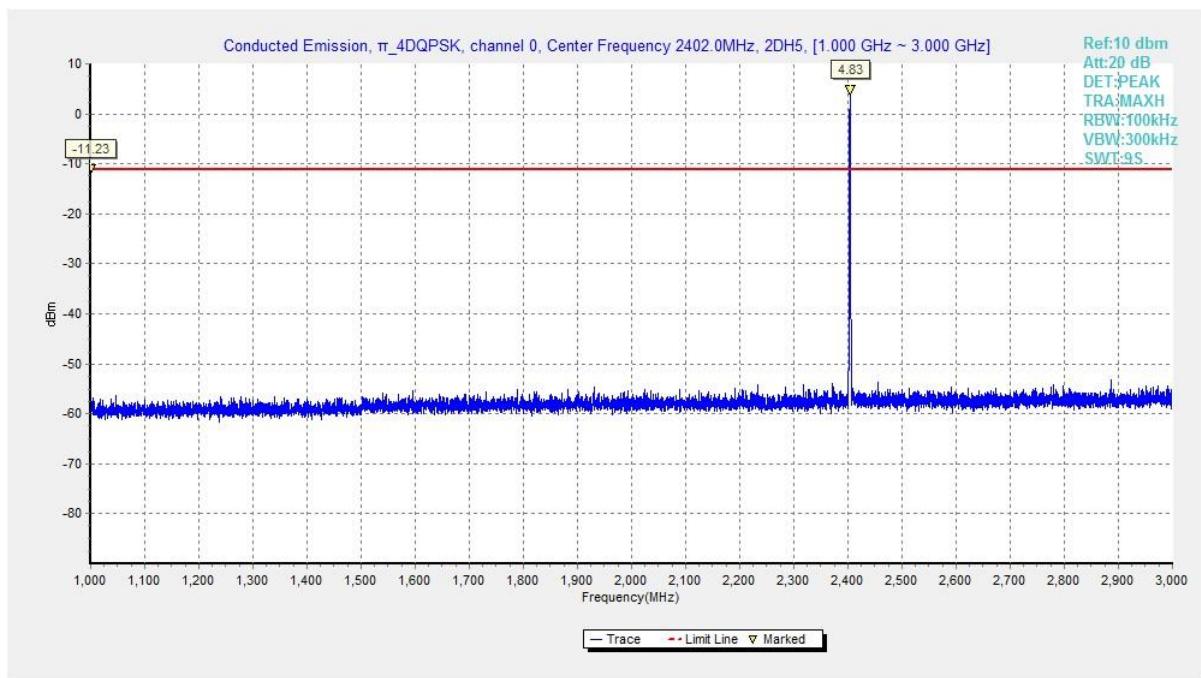


**Fig. 19 Conducted Spurious Emission ( $\pi/4$  DQPSK, Ch0, 1GHz-3GHz)**

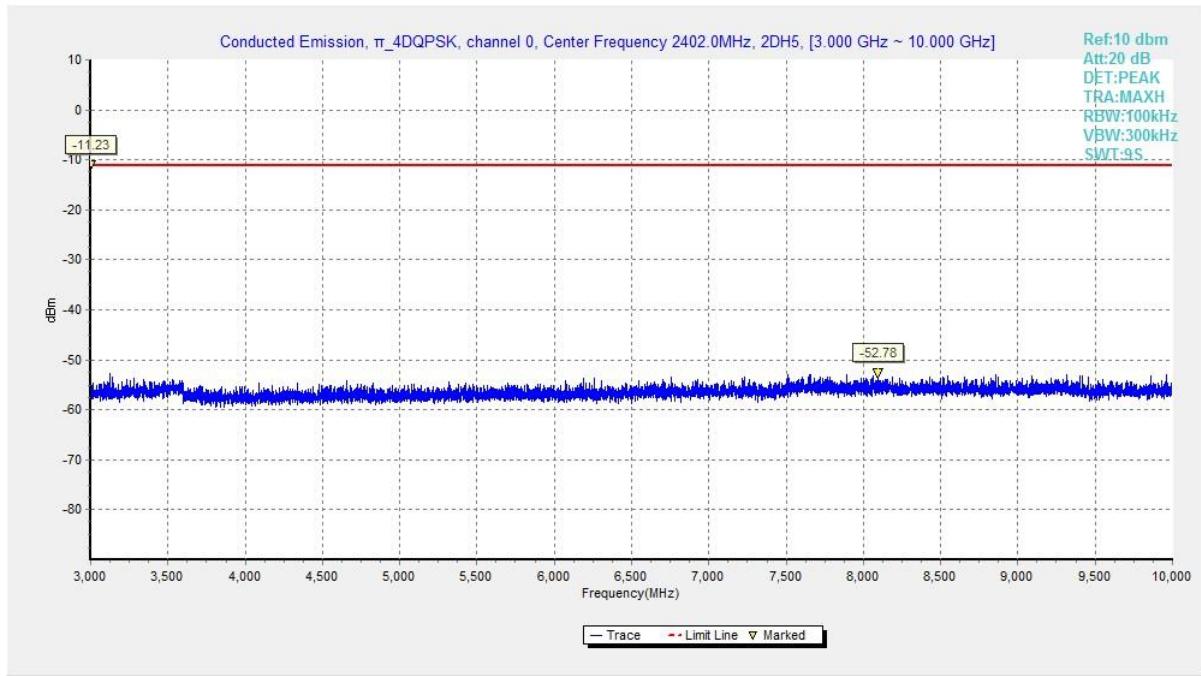


**Fig. 20 Conducted Spurious Emission ( $\pi/4$  DQPSK, Ch0, 3GHz-10GHz)**

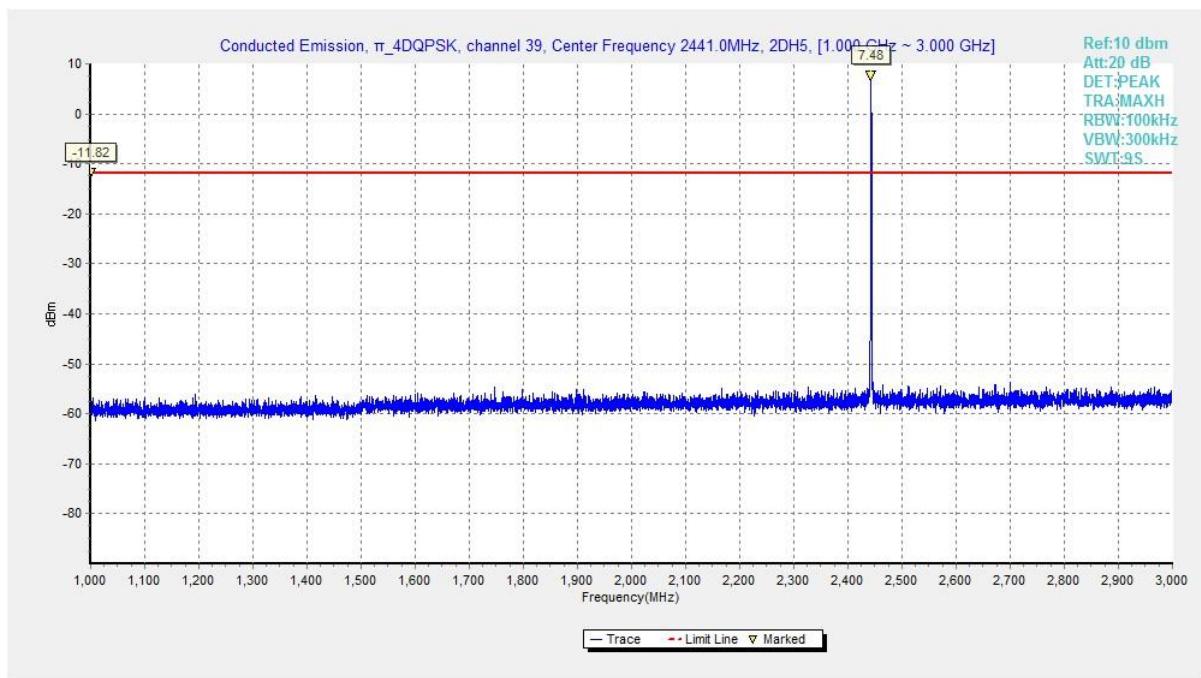


**Fig. 21 Conducted Spurious Emission ( $\pi/4$  DQPSK, Ch39, 1GHz-3GHz)**

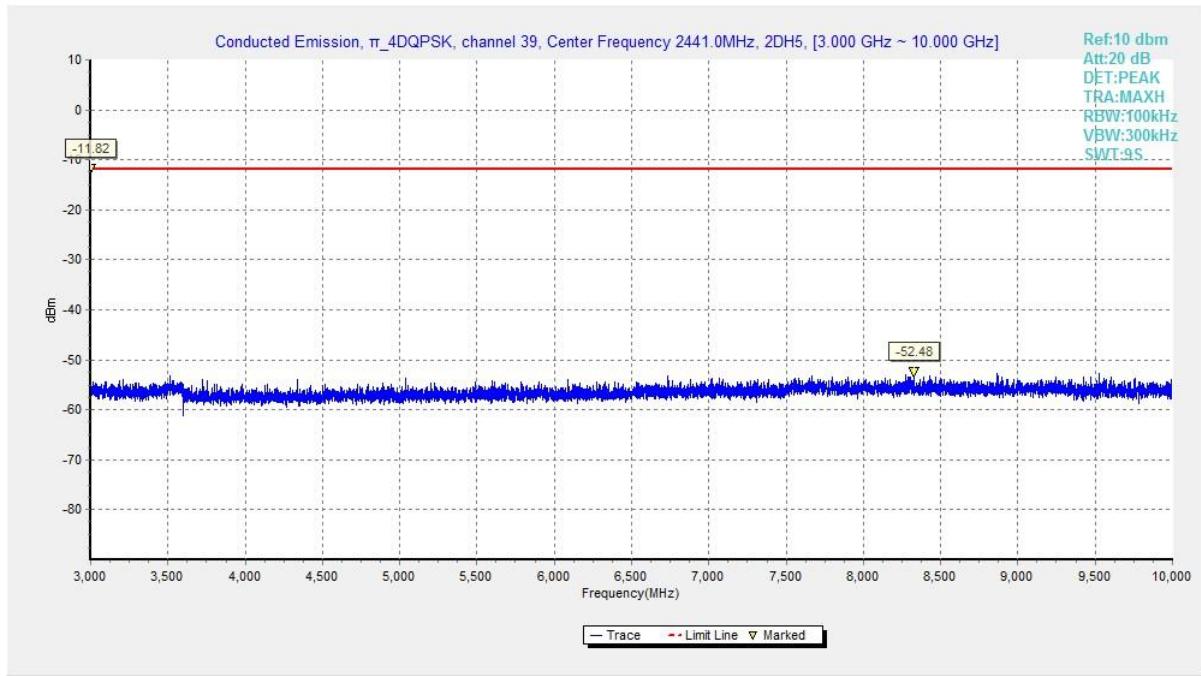

**Fig. 22 Conducted Spurious Emission ( $\pi/4$  DQPSK, Ch39, 3GHz-10GHz)**

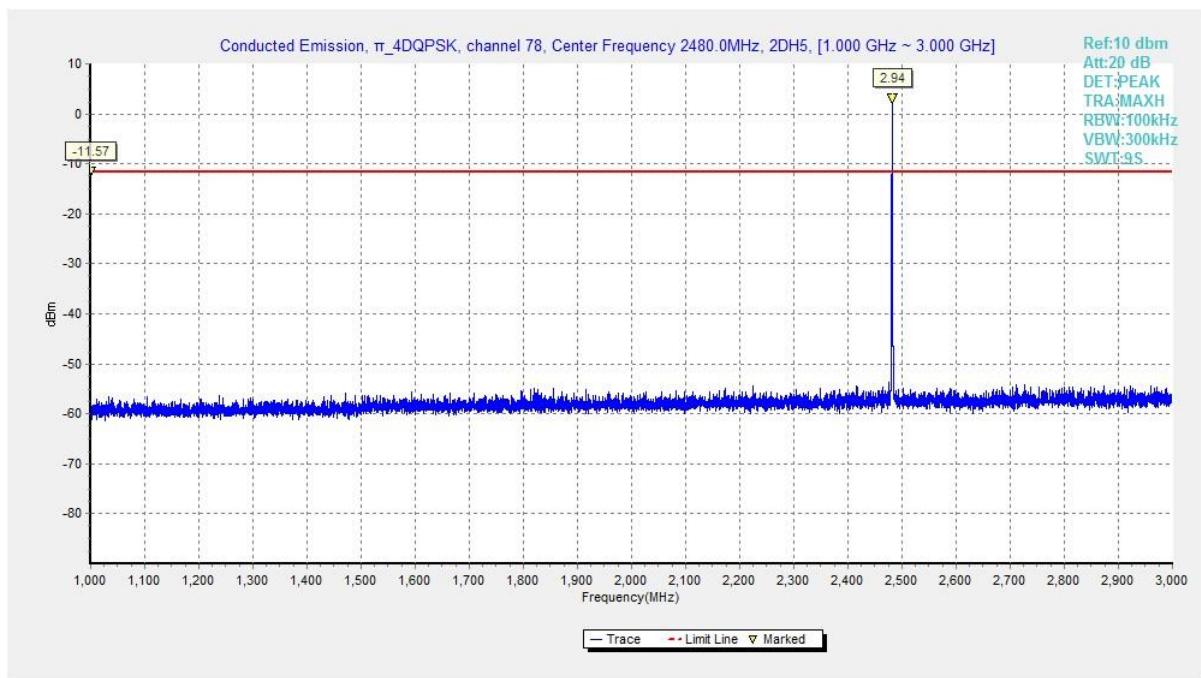

**Fig. 23 Conducted Spurious Emission ( $\pi$  /4 DQPSK, Ch78, 1GHz-3GHz)**

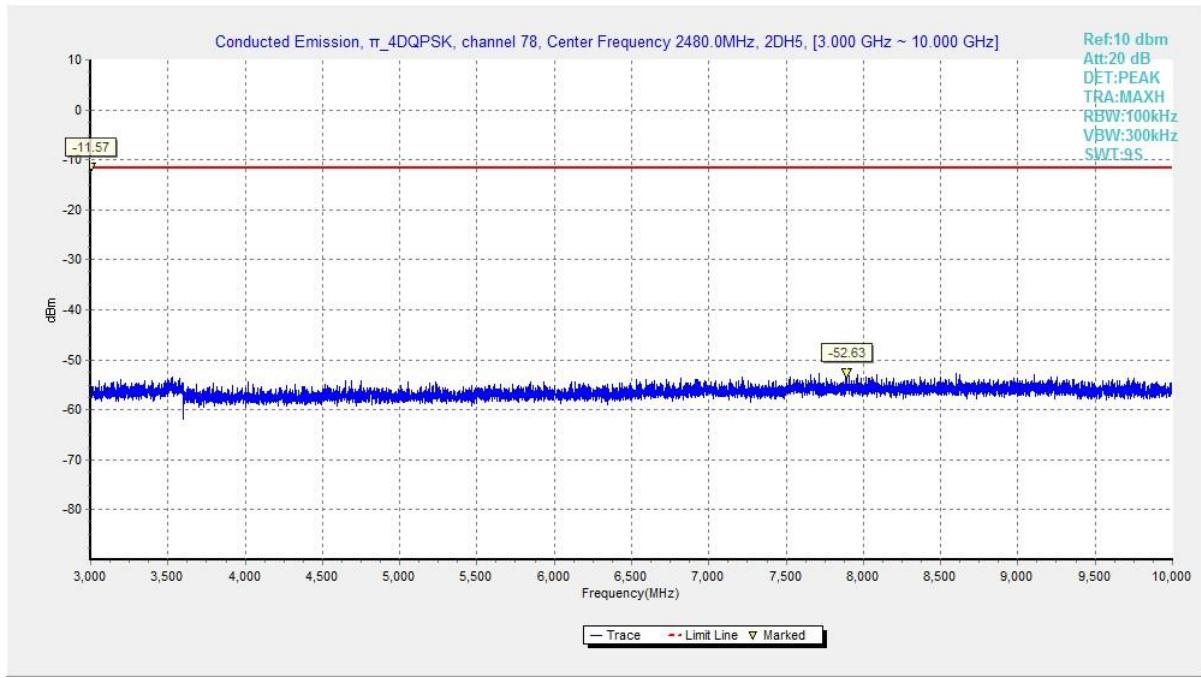

**Fig. 24 Conducted Spurious Emission ( $\pi$  /4 DQPSK, Ch78, 3GHz-10GHz)**

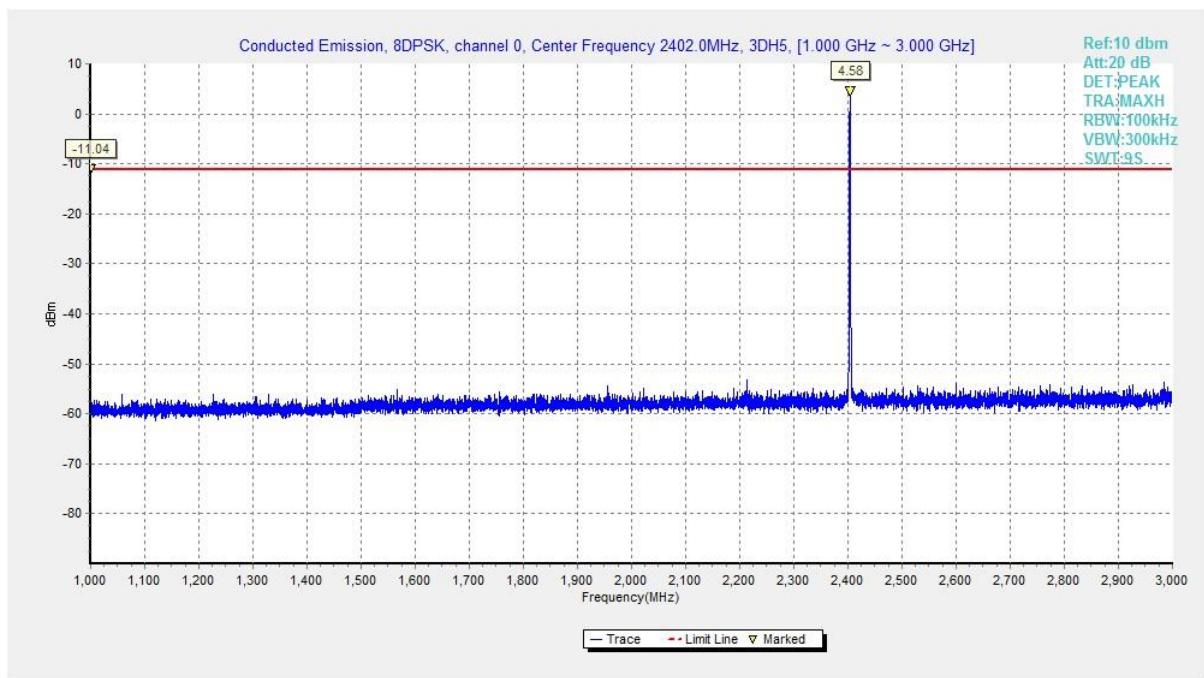


Fig. 25 Conducted Spurious Emission (8DPSK, Ch0, 1GHz-3GHz)

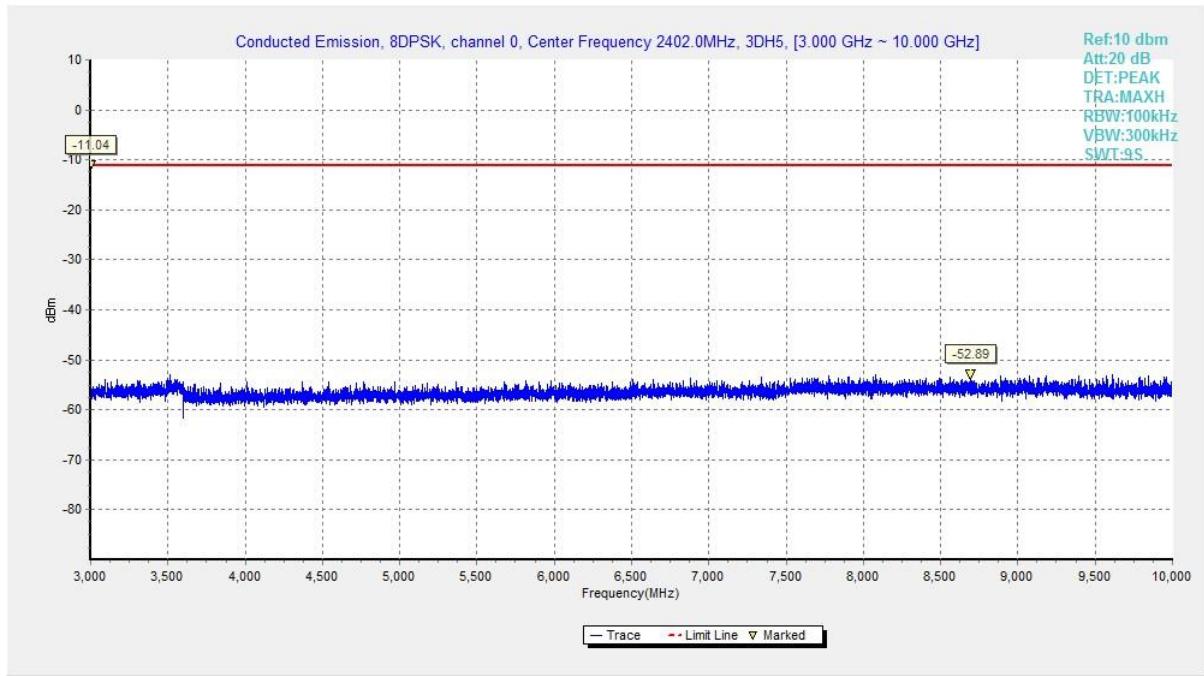


Fig. 26 Conducted Spurious Emission (8DPSK, Ch0, 3GHz-10GHz)

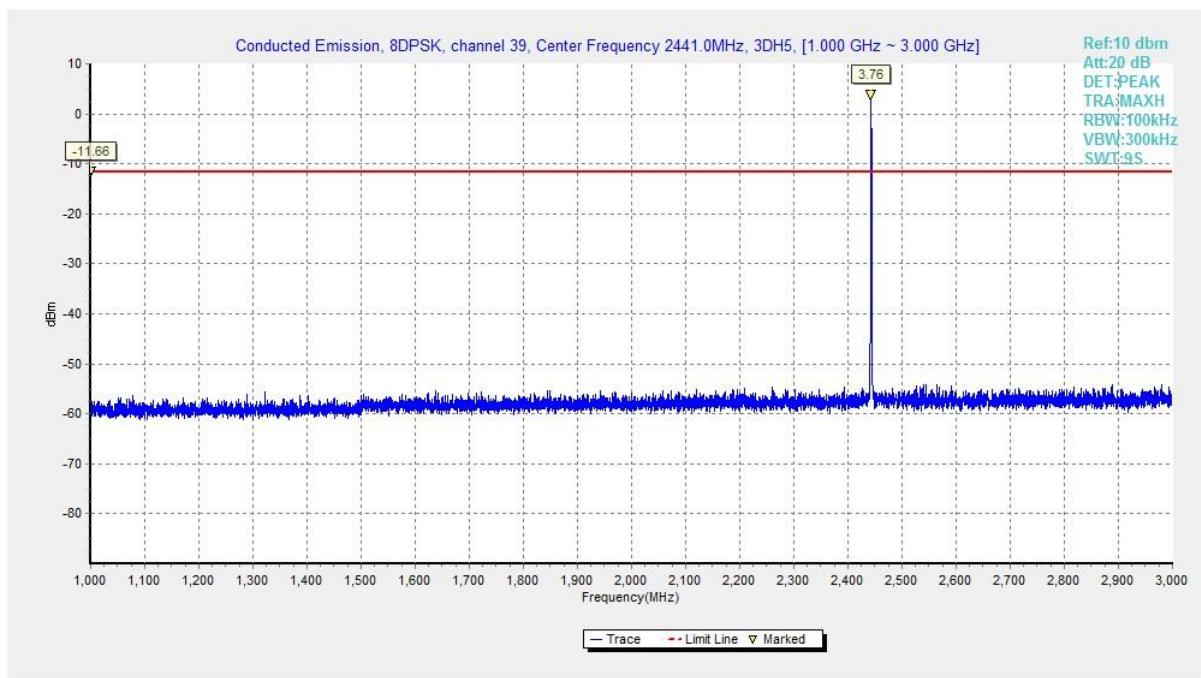


Fig. 27 Conducted Spurious Emission (8DPSK, Ch39, 1GHz-3GHz)

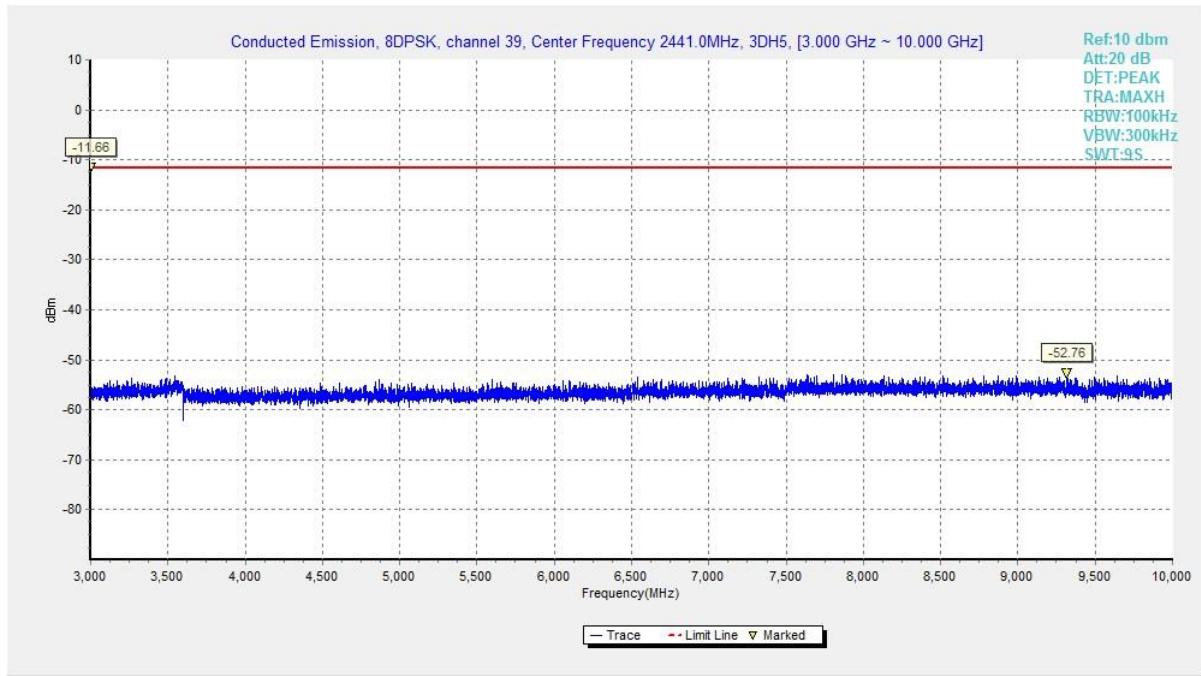


Fig. 28 Conducted Spurious Emission (8DPSK, Ch39, 3GHz-10GHz)

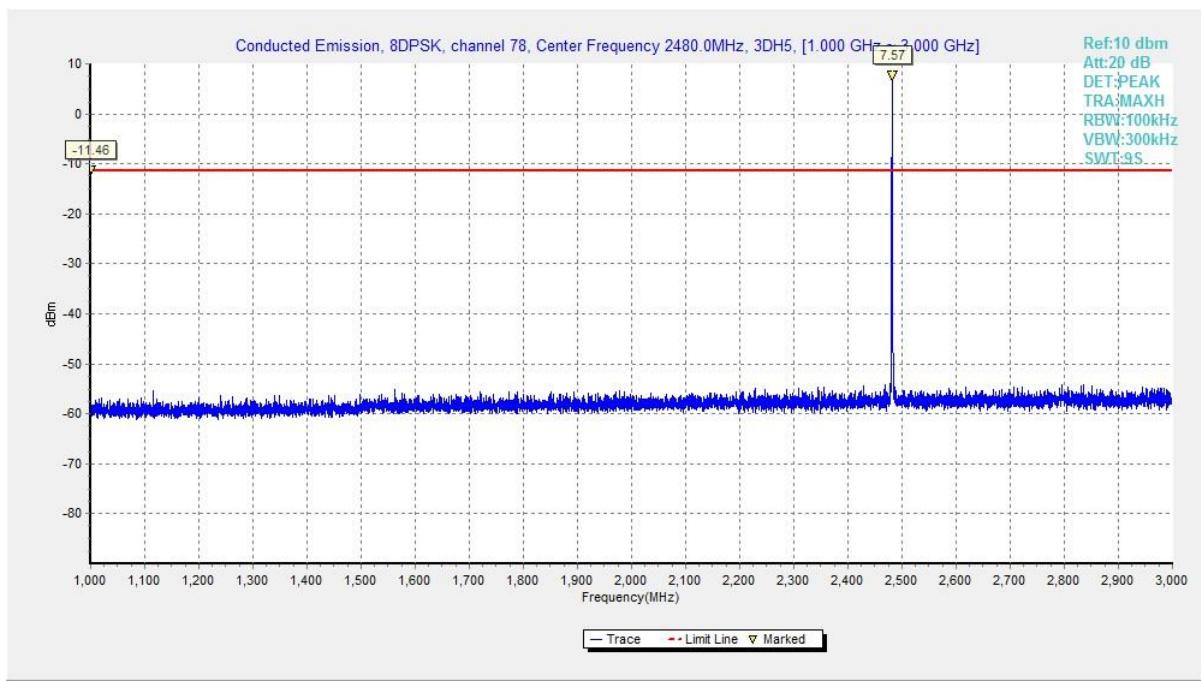


Fig. 29 Conducted Spurious Emission (8DPSK, Ch78, 1GHz-3GHz)



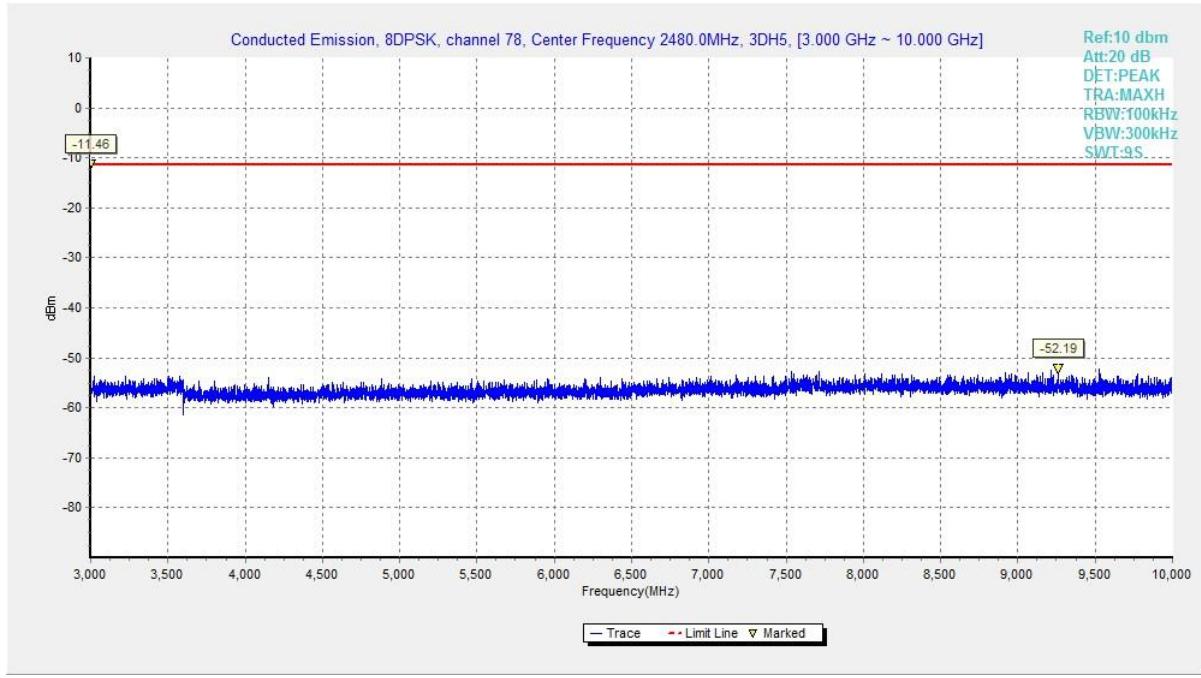


Fig. 30 Conducted Spurious Emission (8DPSK, Ch78, 3GHz-10GHz)

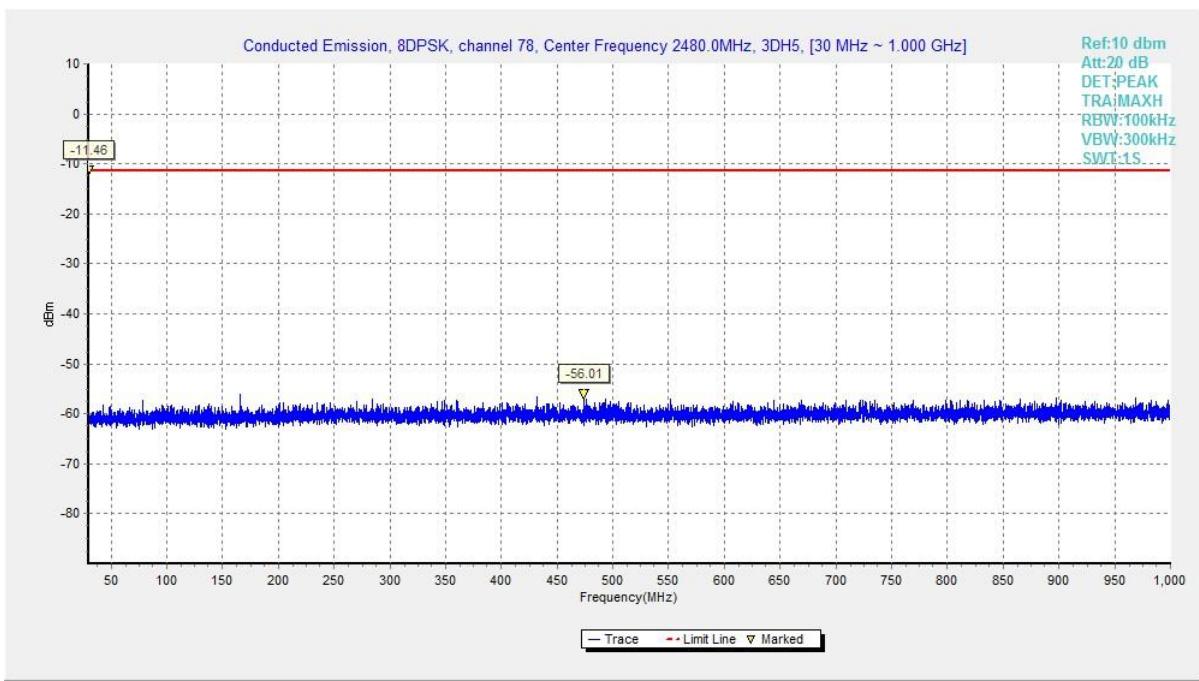

**Fig. 31 Conducted Spurious Emission (All channel, 30MHz-1GHz)**

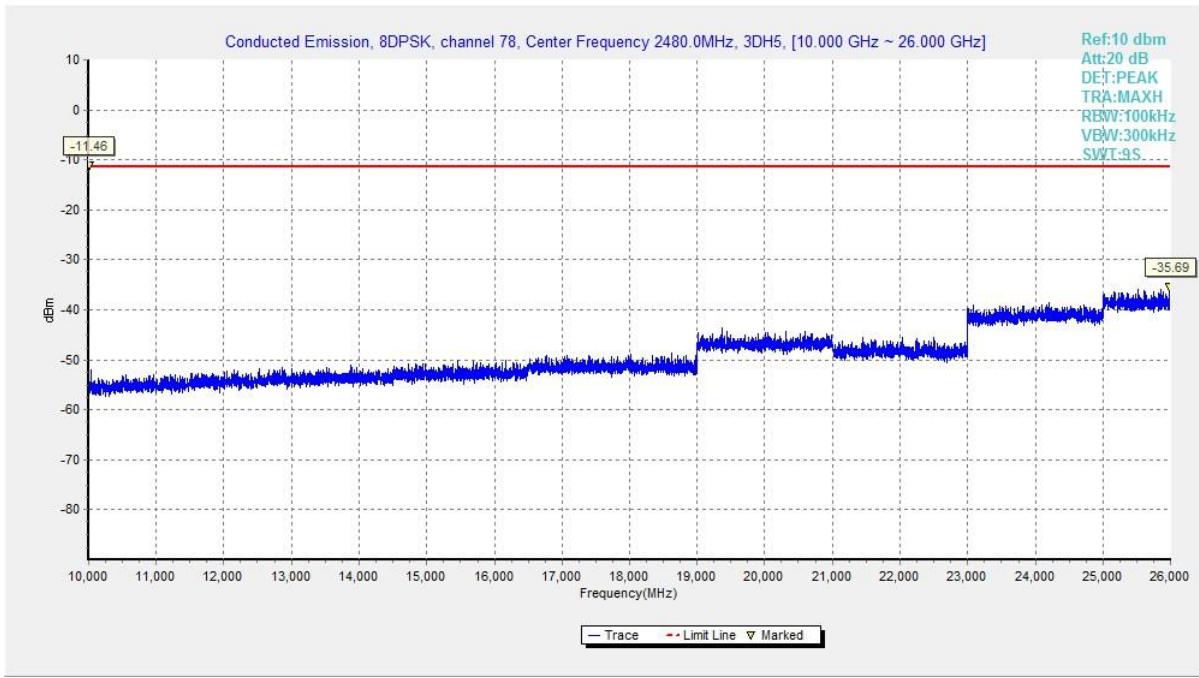

**Fig. 32 Conducted Spurious Emission (All channel, 10GHz-26GHz)**

#### A.4 Radiated Emission

##### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

##### Limit in restricted band:

Frequency of emission (MHz)	Field strength ( $\mu$ V/m)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

##### Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time (s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note: According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

## Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	1 GHz ~ 18 GHz	Fig.33	<b>P</b>
	39	1 GHz ~ 18 GHz	Fig.34	<b>P</b>
	78	1 GHz ~ 18 GHz	Fig.35	<b>P</b>
	Restricted Band(CH0)	2.38 GHz ~ 2.45 GHz	Fig.36	<b>P</b>
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.37	<b>P</b>
$\pi/4$ DQPSK	0	1 GHz ~ 18 GHz	Fig.38	<b>P</b>
	39	1 GHz ~ 18 GHz	Fig.39	<b>P</b>
	78	1 GHz ~ 18 GHz	Fig.40	<b>P</b>
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.41	<b>P</b>
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.42	<b>P</b>
8DPSK	0	1 GHz ~ 18 GHz	Fig.43	<b>P</b>
	39	1 GHz ~ 18 GHz	Fig.44	<b>P</b>
	78	1 GHz ~ 18 GHz	Fig.45	<b>P</b>
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.46	<b>P</b>
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.47	<b>P</b>
/	All channels	9 kHz ~ 30 MHz	Fig.48	<b>P</b>
		30 MHz ~ 1 GHz	Fig.49	<b>P</b>
		18 GHz ~ 26.5 GHz	Fig.50	<b>P</b>

**Worst Case Result**  
**GFSK CH0 (1-18GHz)**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Pol	Corr. (dB)
2992.000000	43.8	74.0	30.2	V	8.9
4167.000000	37.0	74.0	37.0	V	-11.5
6173.600000	40.5	74.0	33.5	V	-6.4
9303.600000	46.7	74.0	27.3	V	-0.9
14807.200000	51.1	74.0	22.9	H	6.5
17924.800000	55.1	74.0	18.9	H	14.0

Frequency (MHz)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Pol	Corr. (dB)
2992.000000	33.7	54.0	20.3	V	8.9
4167.000000	23.8	54.0	30.2	V	-11.5
6173.600000	27.6	54.0	26.4	V	-6.4
9303.600000	32.4	54.0	21.6	V	-0.9
14807.200000	38.7	54.0	15.3	H	6.5
17924.800000	42.7	54.0	11.3	H	14.0

**$\pi/4$  DQPSK CH0 (1-18GHz)**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Pol	Corr. (dB)
2972.000000	44.6	74.0	29.4	H	9.0
4684.800000	39.3	74.0	34.7	V	-9.5
5844.600000	39.8	74.0	34.2	V	-6.9
8454.000000	44.9	74.0	29.1	H	-2.3
14807.600000	52.0	74.0	22.0	V	6.5
17970.800000	54.8	74.0	19.2	V	14.4

Frequency (MHz)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Pol	Corr. (dB)
2972.000000	32.7	54.0	21.3	H	9.0
4684.800000	26.1	54.0	27.9	V	-9.5
5844.600000	27.0	54.0	27.0	V	-6.9
8454.000000	31.4	54.0	22.6	H	-2.3
14807.600000	39.0	54.0	15.0	V	6.5
17970.800000	42.2	54.0	11.8	V	14.4

**8DPSK CH0 (1-18GHz)**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Pol	Corr. (dB)
2981.600000	44.3	74.0	29.7	V	9.0
3859.800000	35.8	74.0	38.2	V	-12.8
6031.600000	39.3	74.0	34.7	H	-6.8
7408.800000	43.9	74.0	30.1	H	-2.2
14796.000000	50.7	74.0	23.3	H	6.5
17985.200000	54.9	74.0	19.1	H	14.1

Frequency (MHz)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Pol	Corr. (dB)
2981.600000	32.4	54.0	21.6	V	9.0
3859.800000	22.5	54.0	31.5	V	-12.8
6031.600000	26.4	54.0	27.6	H	-6.8
7408.800000	31.3	54.0	22.7	H	-2.2
14796.000000	38.6	54.0	15.4	H	6.5
17985.200000	42.9	54.0	11.1	H	14.1

Note:

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss.  $P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result =  $P_{Mea}$  + Cable Loss + Antenna Factor - Gain of the preamplifier

**See below for test graphs.**

**Conclusion: Pass**

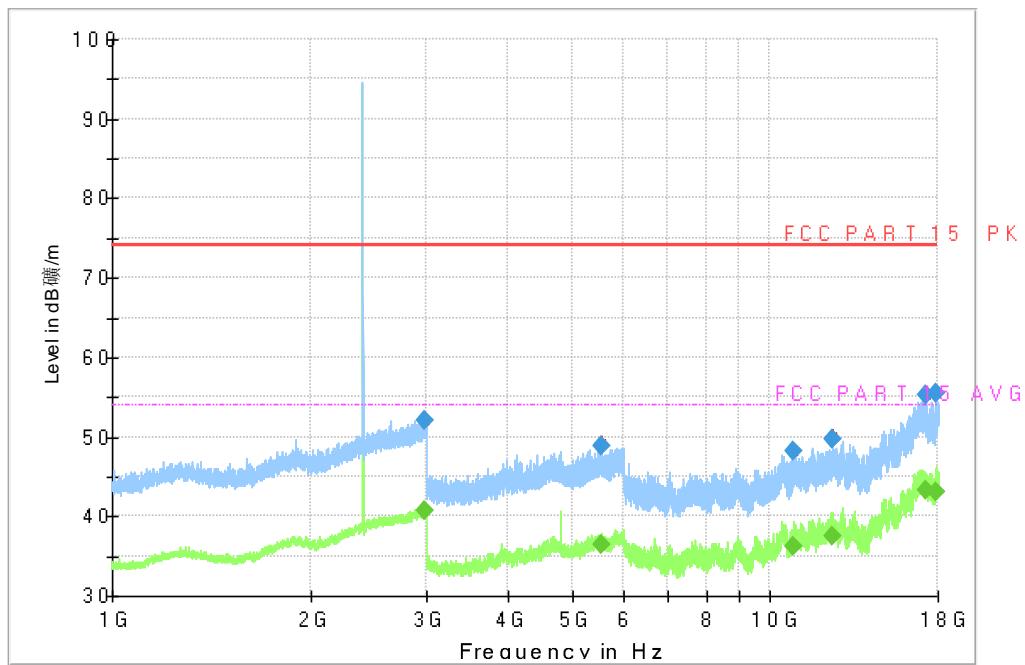


Fig. 33 Radiated Spurious Emission (GFSK, Ch0, 1GHz ~ 18GHz)

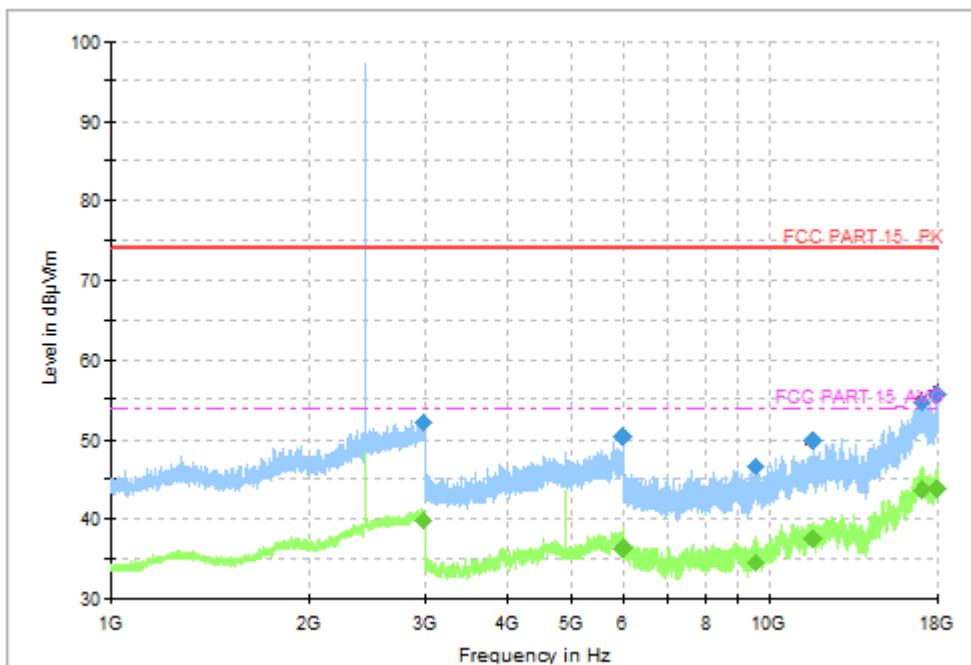


Fig. 34 Radiated Spurious Emission (GFSK, Ch39, 1GHz ~ 18GHz)

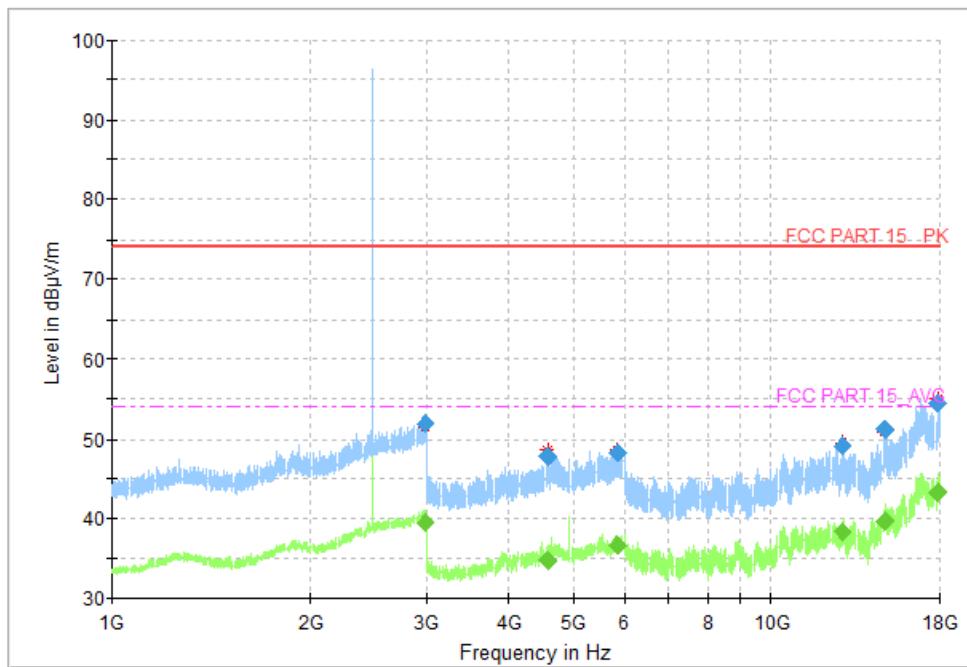


Fig. 35 Radiated Spurious Emission (GFSK, Ch78, 1GHz ~ 18GHz)

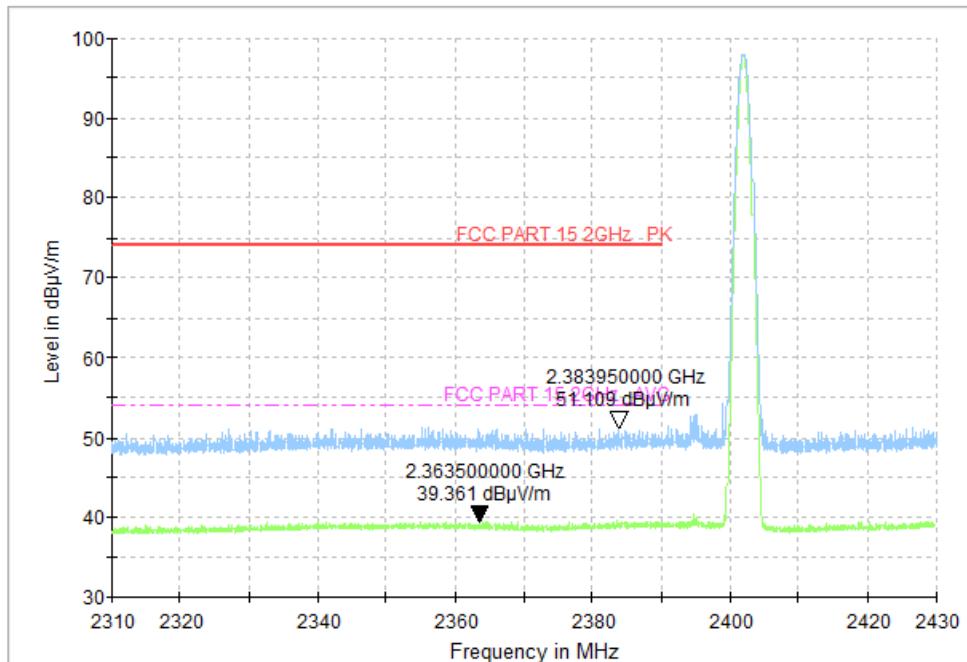


Fig. 36 Radiated Band Edges (GFSK, Ch0, 2380GHz ~ 2450GHz)

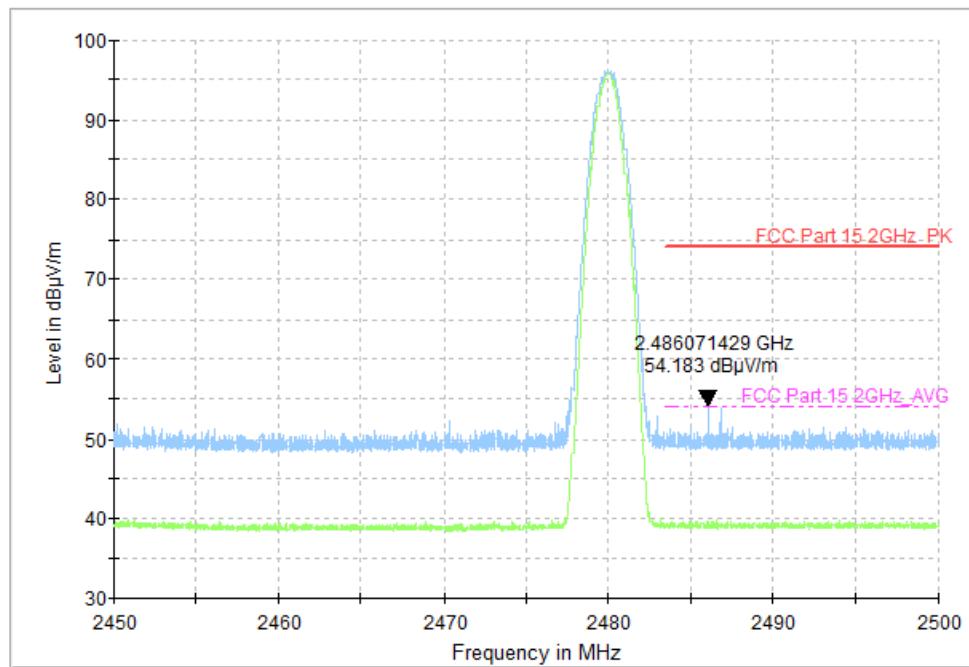


Fig. 37 Radiated Band Edges (GFSK, Ch78, 2450GHz ~ 2500GHz)

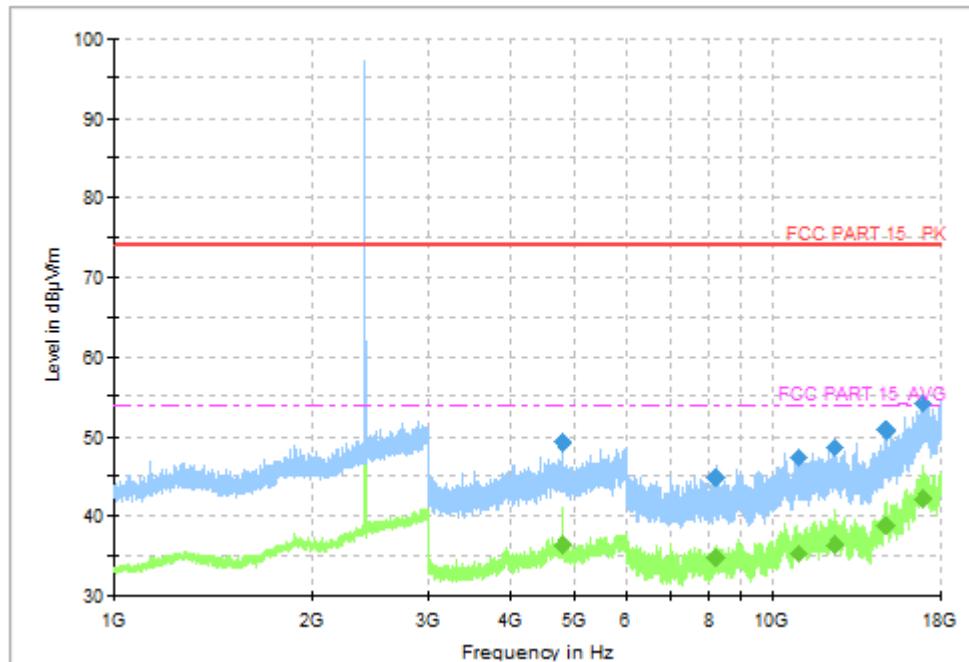


Fig. 38 Radiated Spurious Emission ( $\pi/4$  DQPSK, Ch0, 1GHz ~ 18GHz)

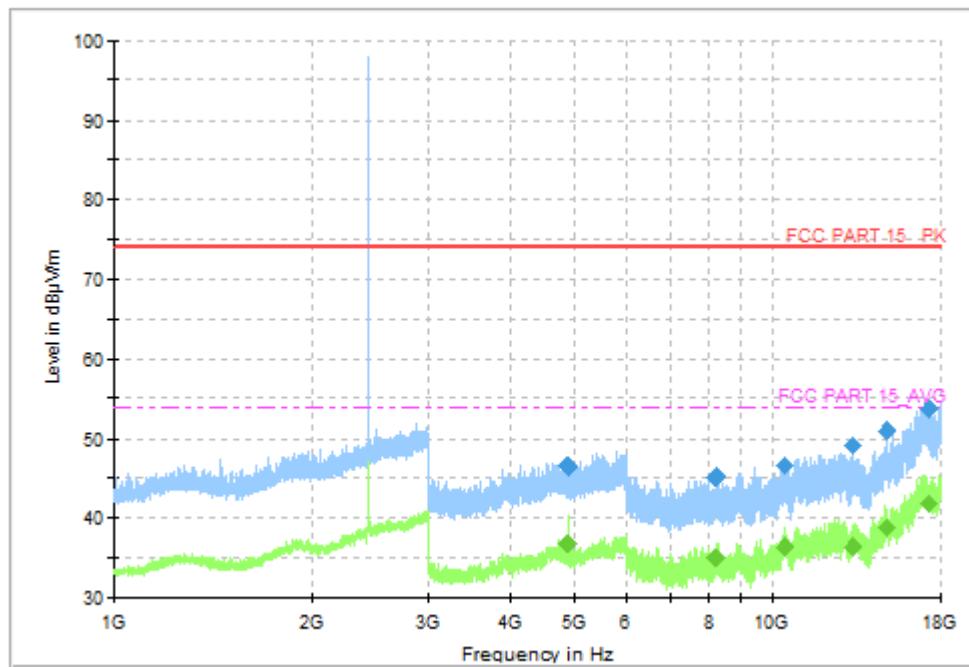


Fig. 39 Radiated Spurious Emission ( $\pi/4$  DQPSK, Ch39, 1GHz ~ 18GHz)

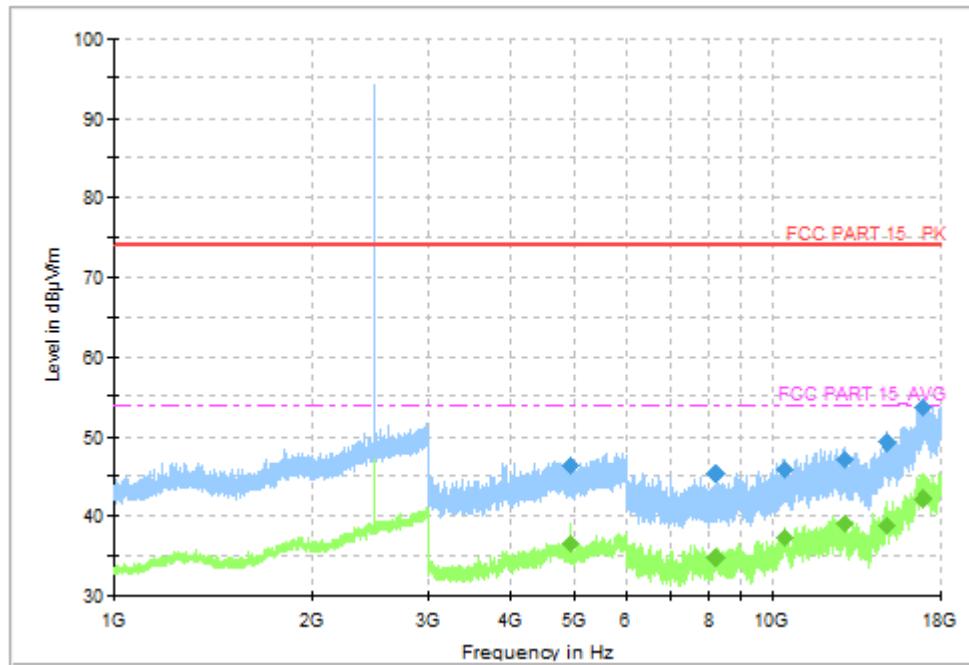


Fig. 40 Radiated Spurious Emission ( $\pi/4$  DQPSK, Ch78, 1GHz ~ 18GHz)

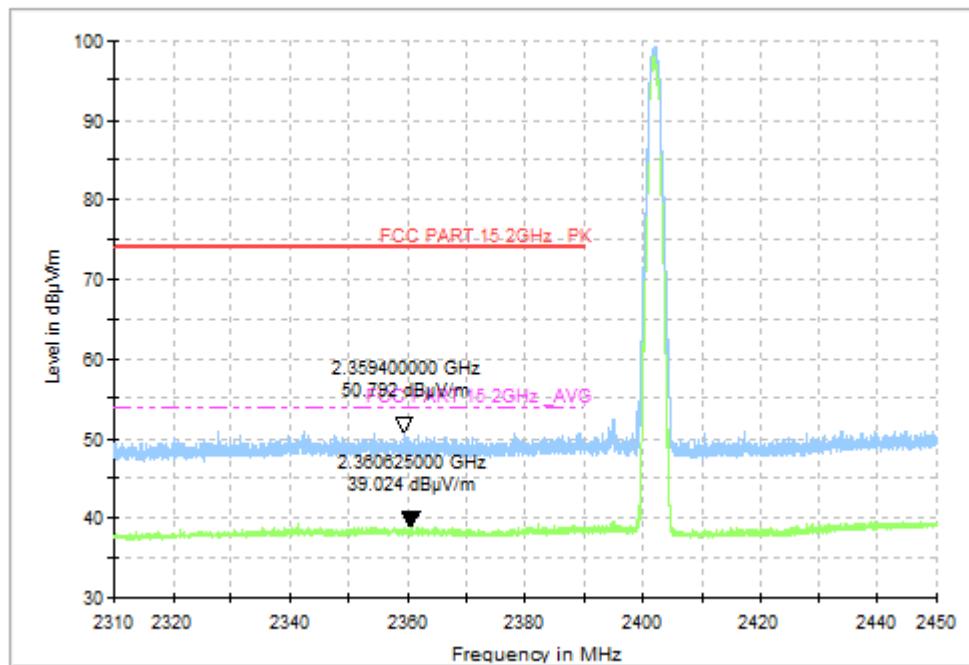


Fig. 41 Radiated Band Edges ( $\pi/4$  DQPSK, Ch0, 2380GHz ~ 2450GHz)

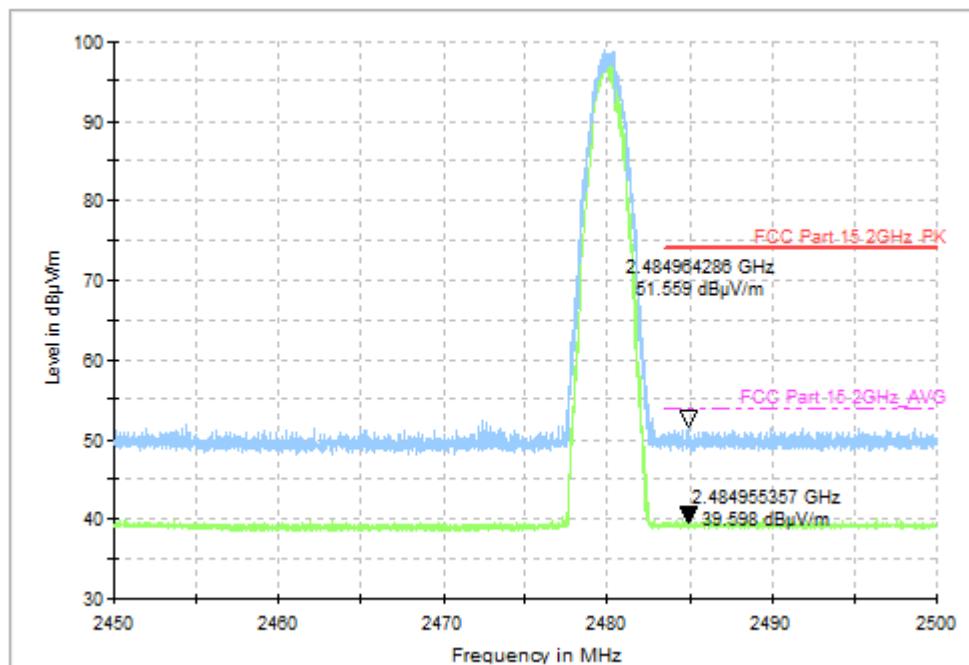


Fig. 42 Radiated Band Edges ( $\pi/4$  DQPSK, Ch78, 2450GHz ~ 2500GHz)

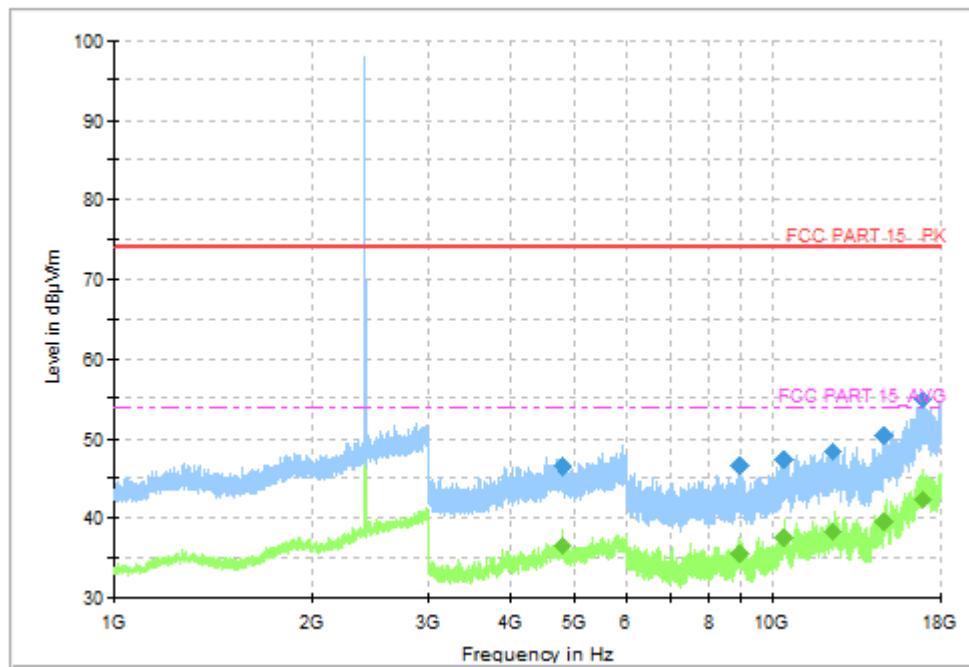


Fig. 43 Radiated Spurious Emission (8DPSK, Ch0, 1GHz ~ 18GHz)



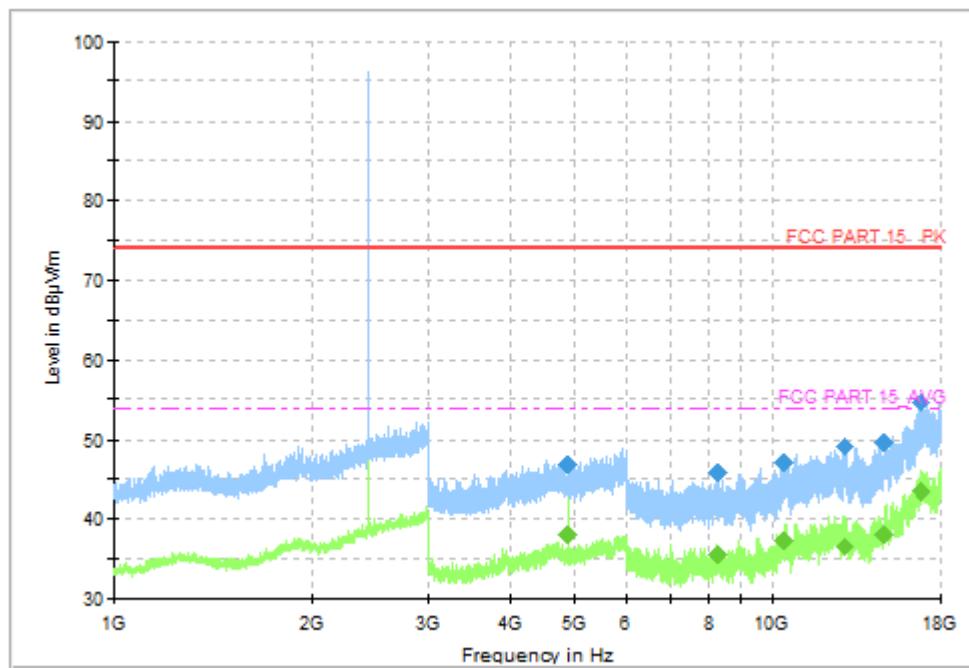


Fig. 44 Radiated Spurious Emission (8DPSK, Ch39, 1GHz ~ 18GHz)

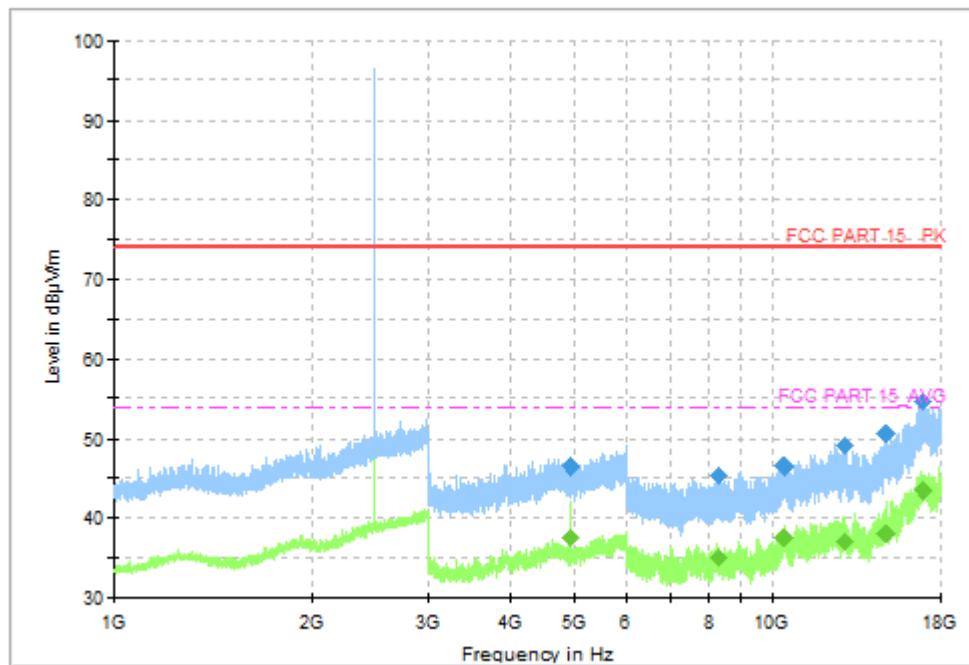

**Fig. 45 Radiated Spurious Emission (8DPSK, Ch78, 1GHz ~ 18GHz)**

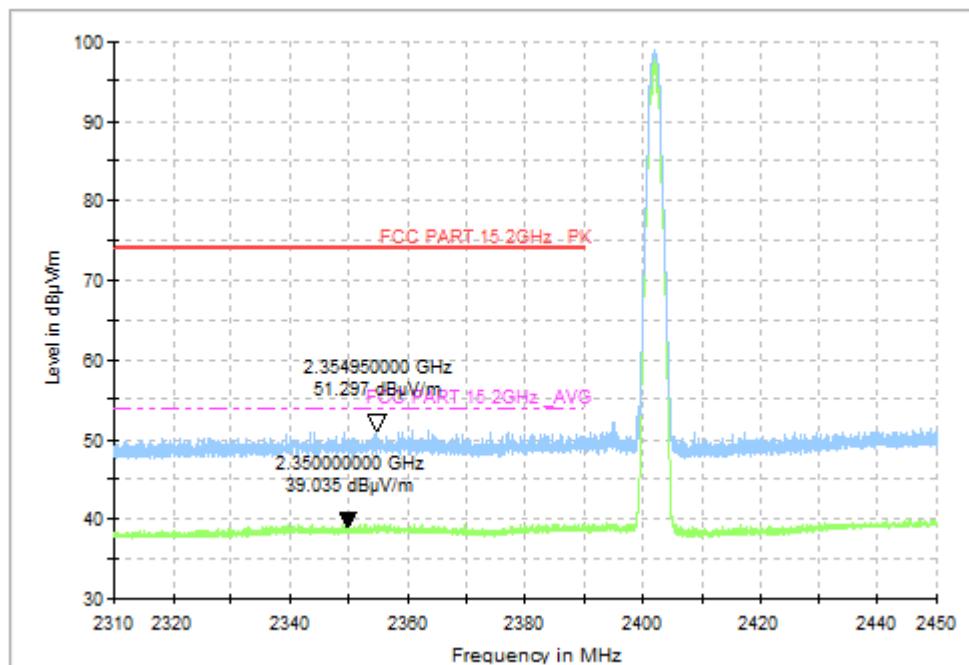

**Fig. 46 Radiated Band Edges (8DPSK, Ch0, 2380GHz ~ 2450GHz)**

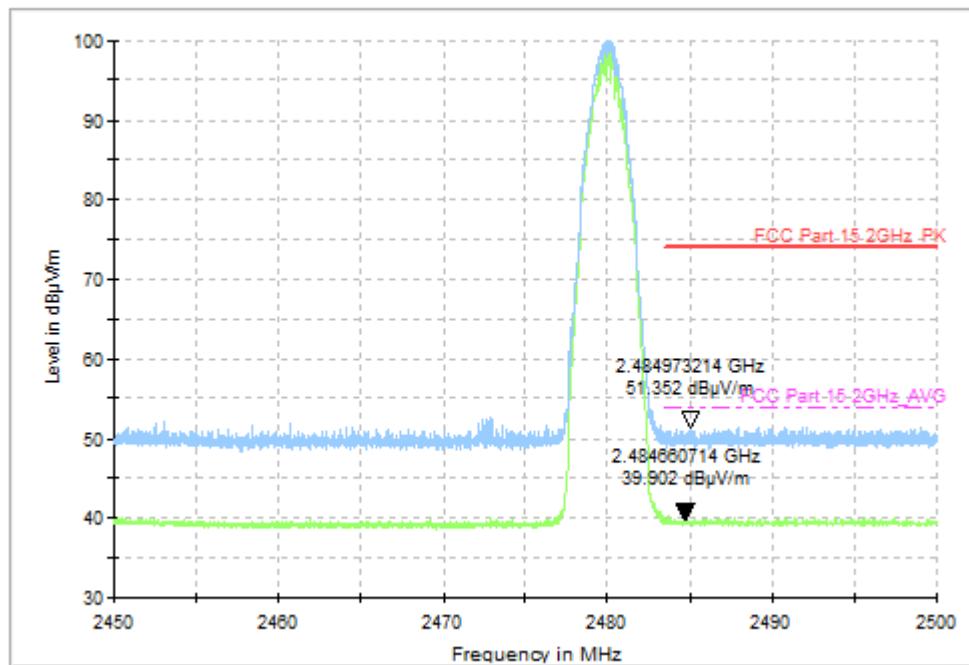


Fig. 47 Radiated Band Edges (8DPSK, Ch78, 2450GHz ~ 2500GHz)

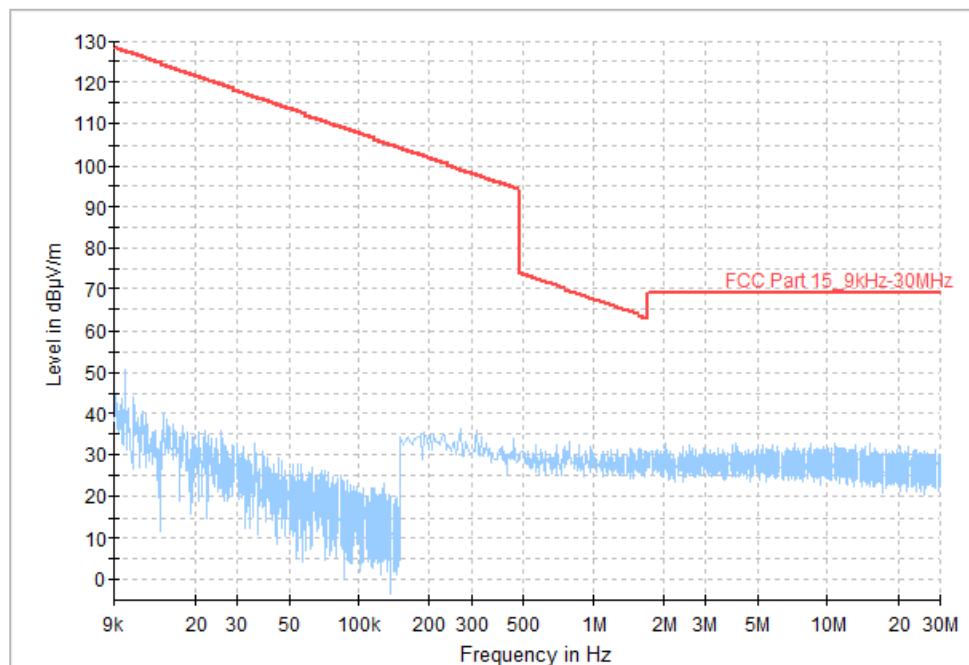


Fig. 48 Radiated Spurious Emission (All Channels, 9kHz ~ 30MHz)

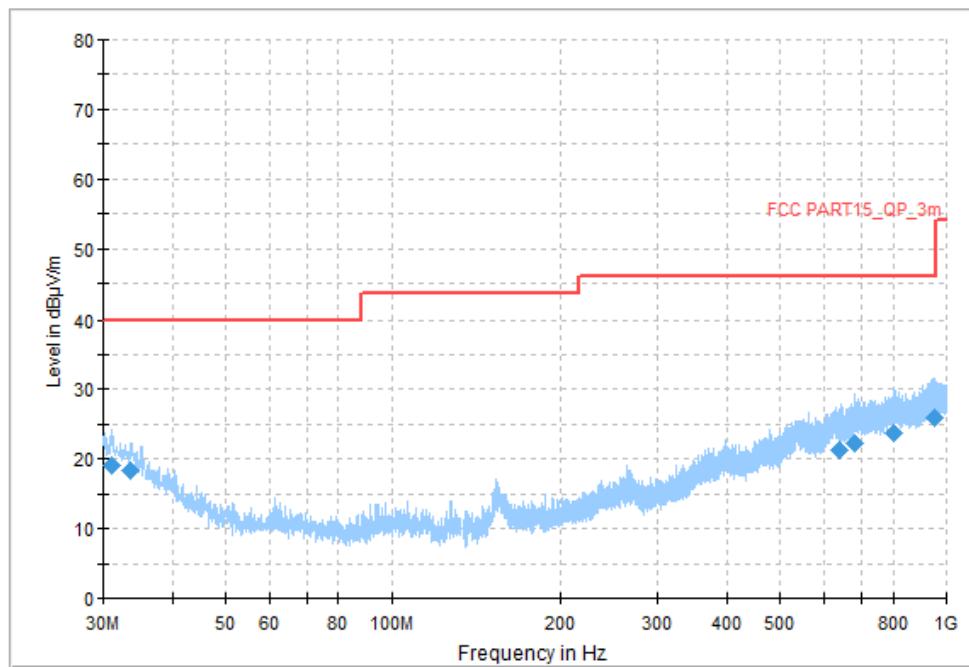


Fig. 49 Radiated Spurious Emission (All Channels, 30MHz ~ 1GHz)

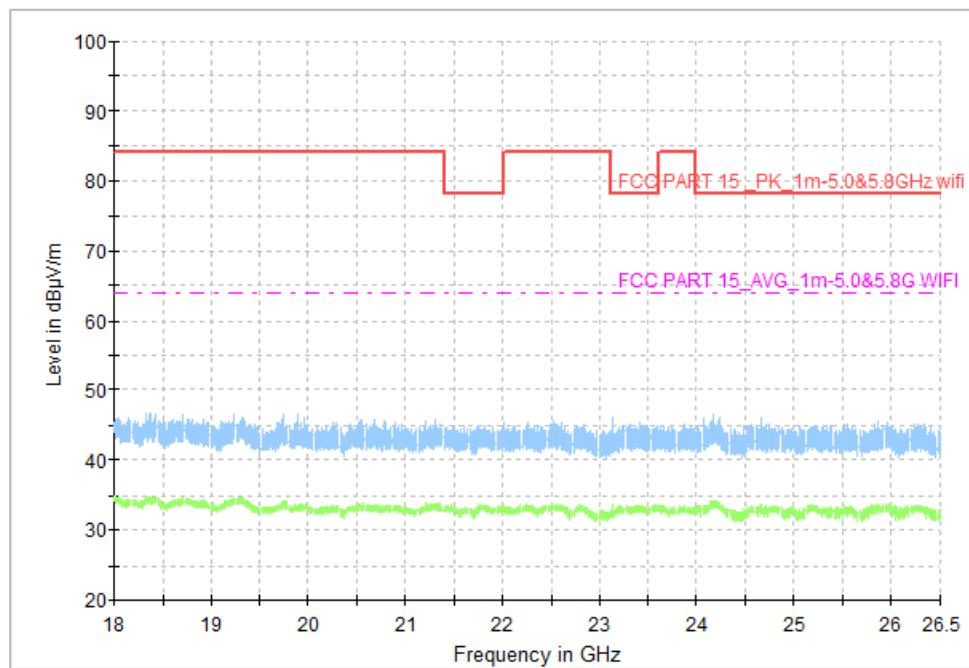


Fig. 50 Radiated Spurious Emission (All Channels, 18GHz ~ 26.5GHz)

### A.5 20dB Bandwidth

#### Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	/

#### Measurement Result:

Mode	Channel	20dB Bandwidth (kHz)		Conclusion
GFSK	0	Fig.51	950.25	/
	39	Fig.52	945.00	
	78	Fig.53	966.75	
$\pi/4$ DQPSK	0	Fig.54	1267.50	/
	39	Fig.55	1228.50	
	78	Fig.56	1254.00	
8DPSK	0	Fig.57	1239.75	/
	39	Fig.58	1265.25	
	78	Fig.59	1259.25	

See below for test graphs.

Conclusion: PASS

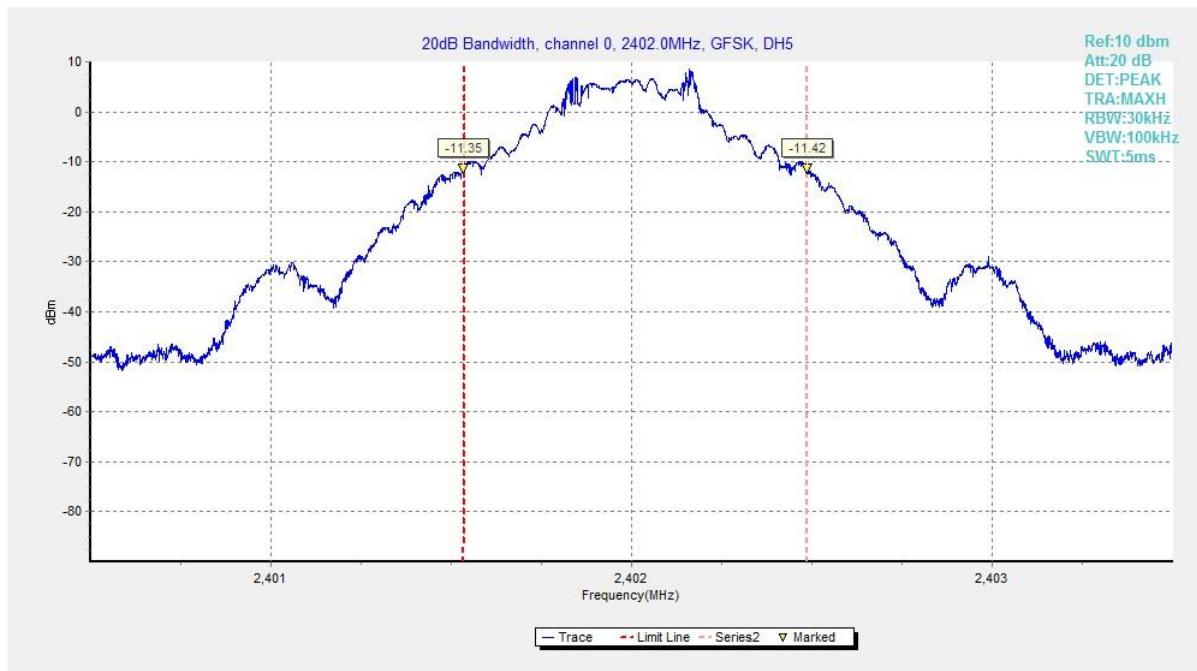
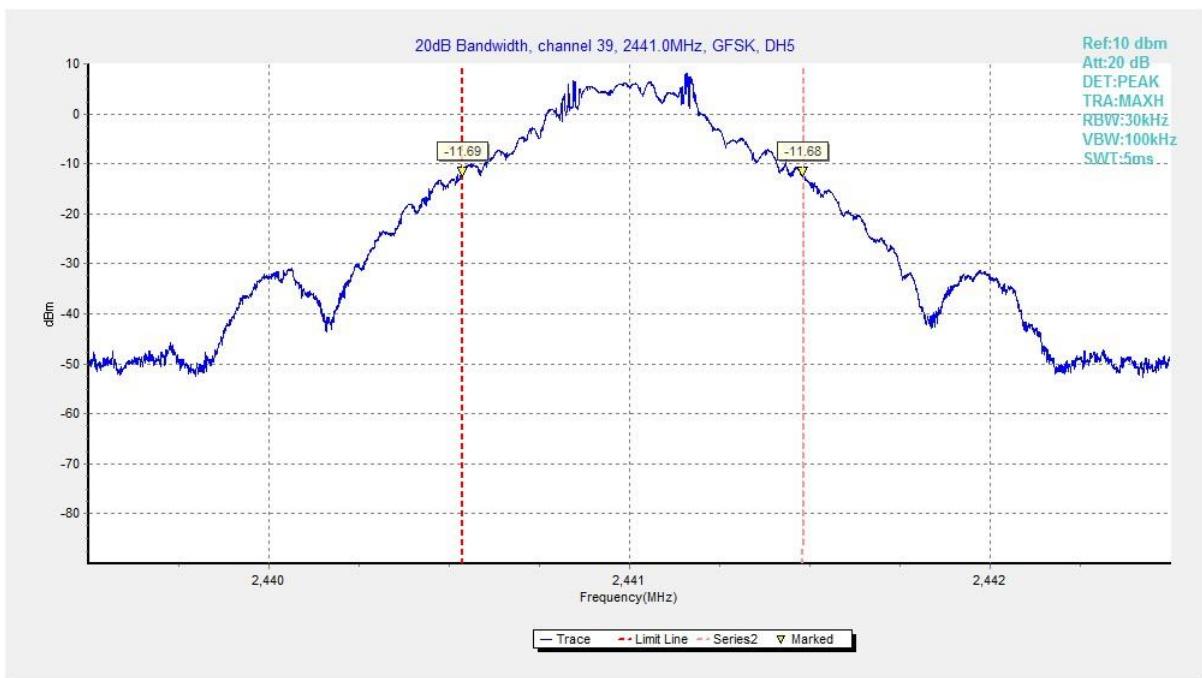
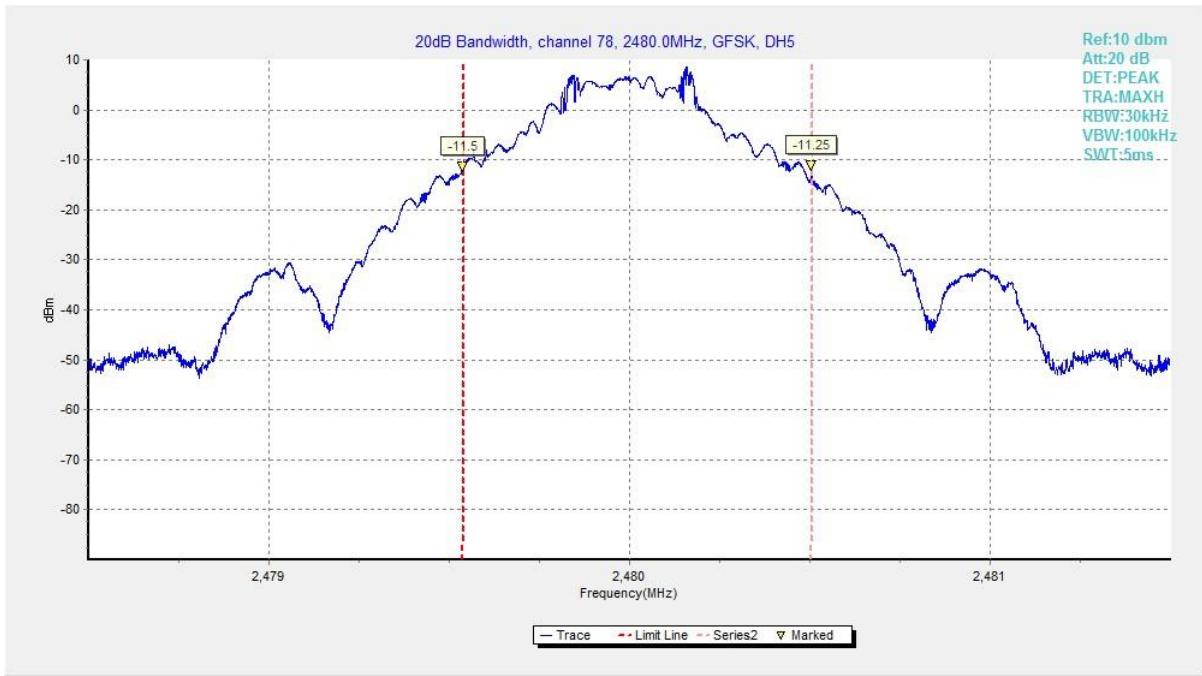



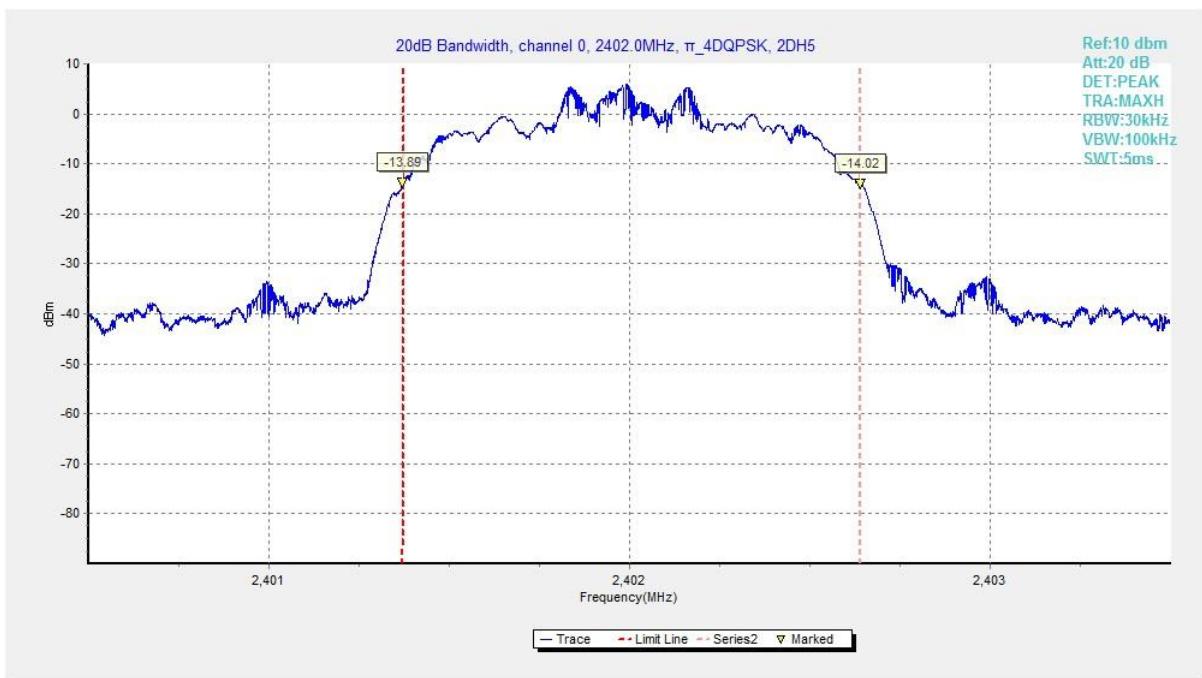
Fig. 51 20dB Bandwidth (GFSK, Ch 0)



**Fig. 52 20dB Bandwidth (GFSK, Ch 39)**

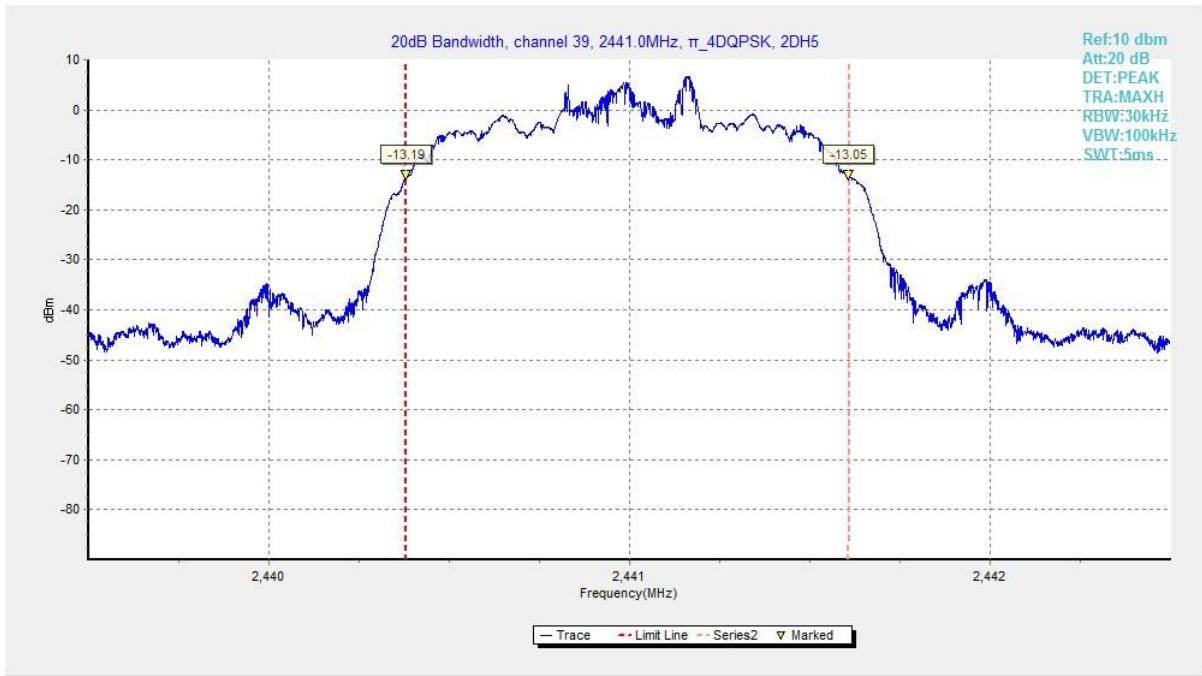

**Fig. 53 20dB Bandwidth (GFSK, Ch 78)**


 Fig. 54 20dB Bandwidth ( $\pi/4$  DQPSK, Ch 0)

 Fig. 55 20dB Bandwidth ( $\pi/4$  DQPSK, Ch 39)

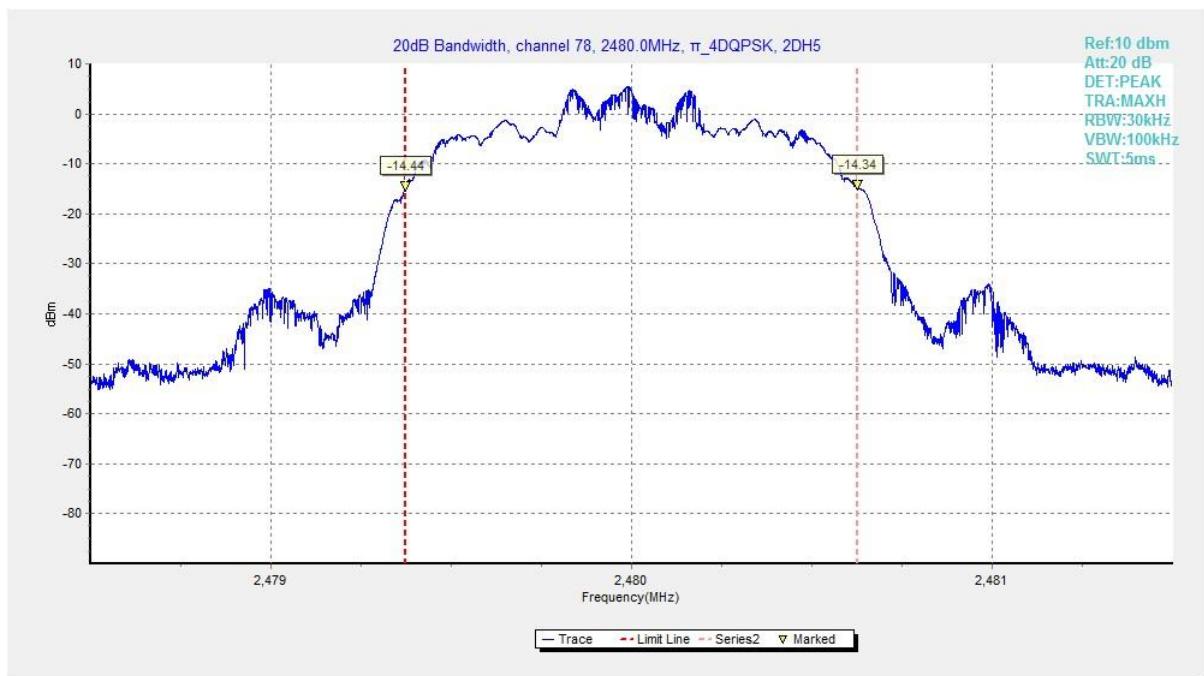


Fig. 56 20dB Bandwidth ( $\pi/4$  DQPSK, Ch 78)

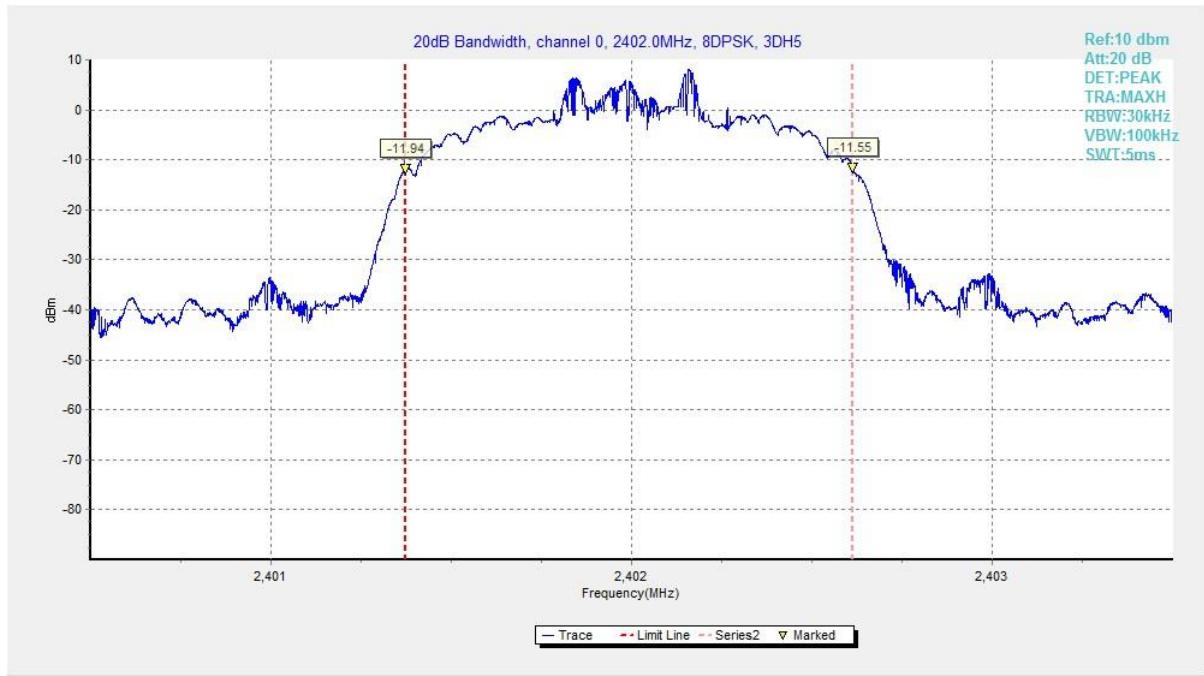


Fig. 57 20dB Bandwidth (8DPSK, Ch 0)

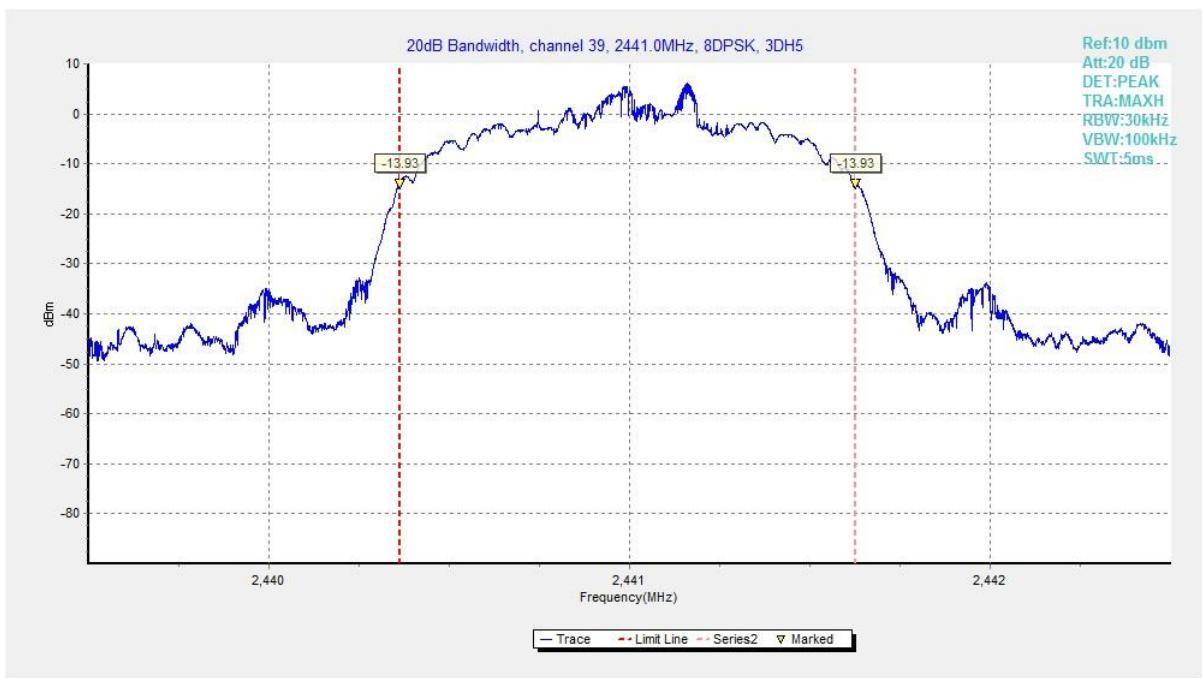


Fig. 58 20dB Bandwidth (8DPSK, Ch 39)

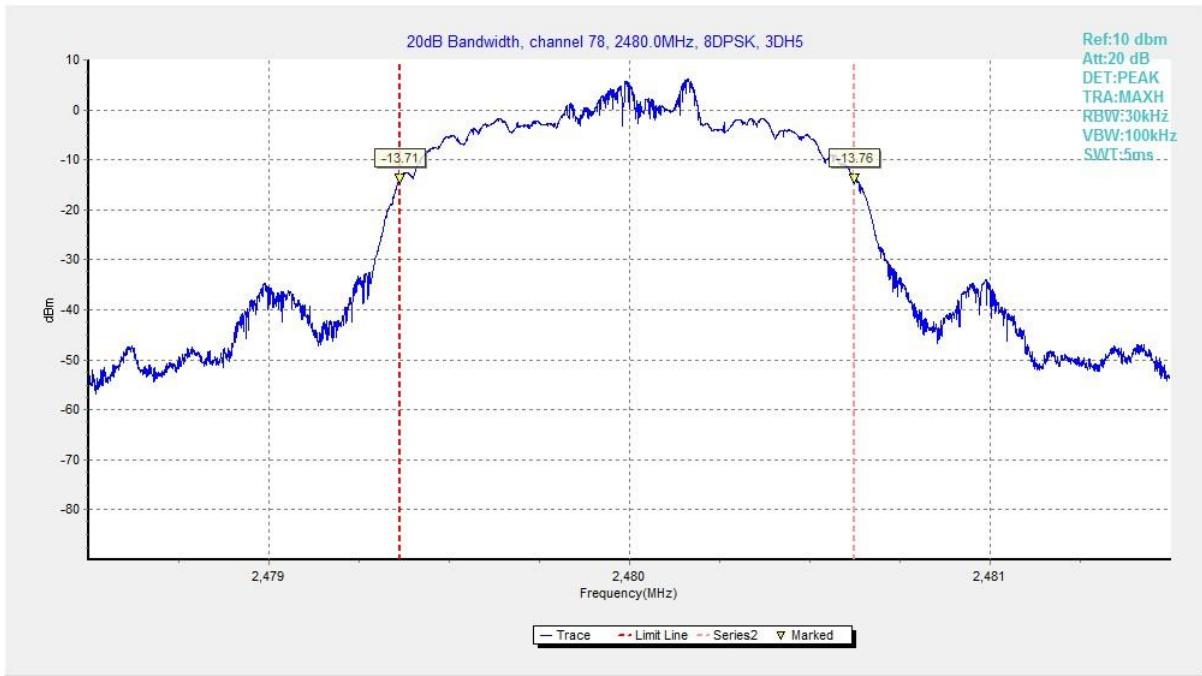


Fig. 59 20dB Bandwidth (8DPSK, Ch 78)

### A.6 Time of Occupancy (Dwell Time)

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (a)	< 400 ms

#### Measurement Results:

Mode	Channel	Packet	Dwell Time(ms)	Conclusion
GFSK	39	DH5	Fig.60	P
			Fig.61	
$\pi/4$ DQPSK	39	2-DH5	Fig.62	P
			Fig.63	
8DPSK	39	3-DH5	Fig.64	P
			Fig.65	

See below for test graphs.

Conclusion: Pass

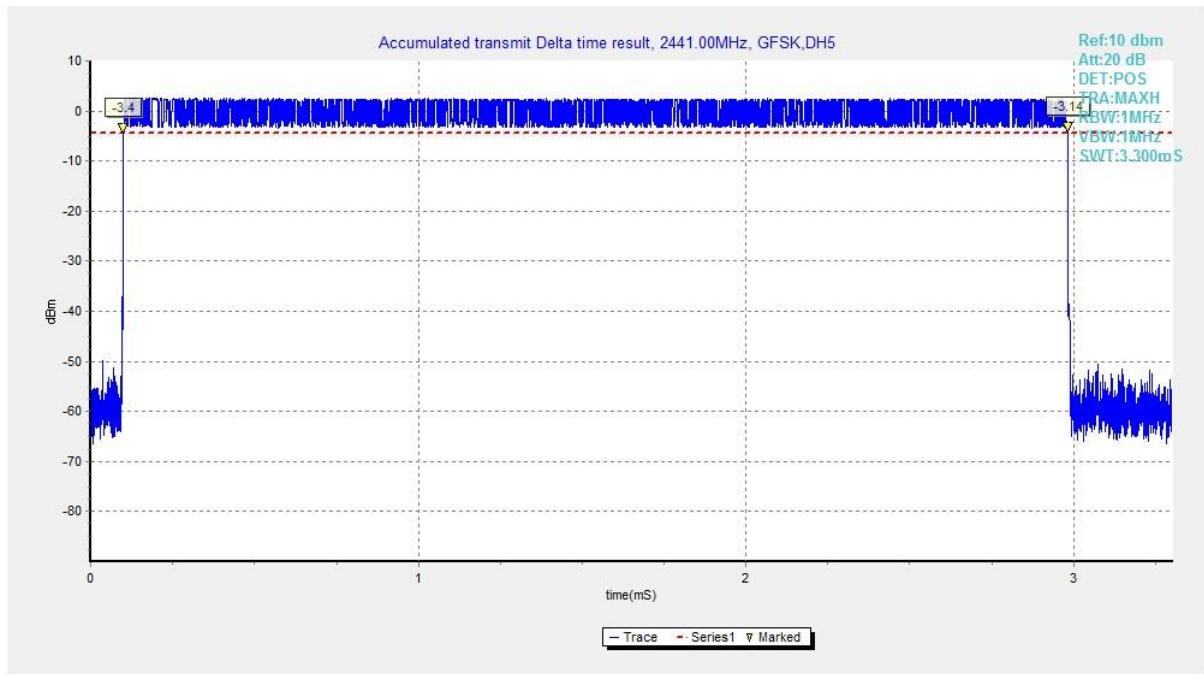


Fig. 60 Time of Occupancy(Dwell Time) (GFSK, Ch39)

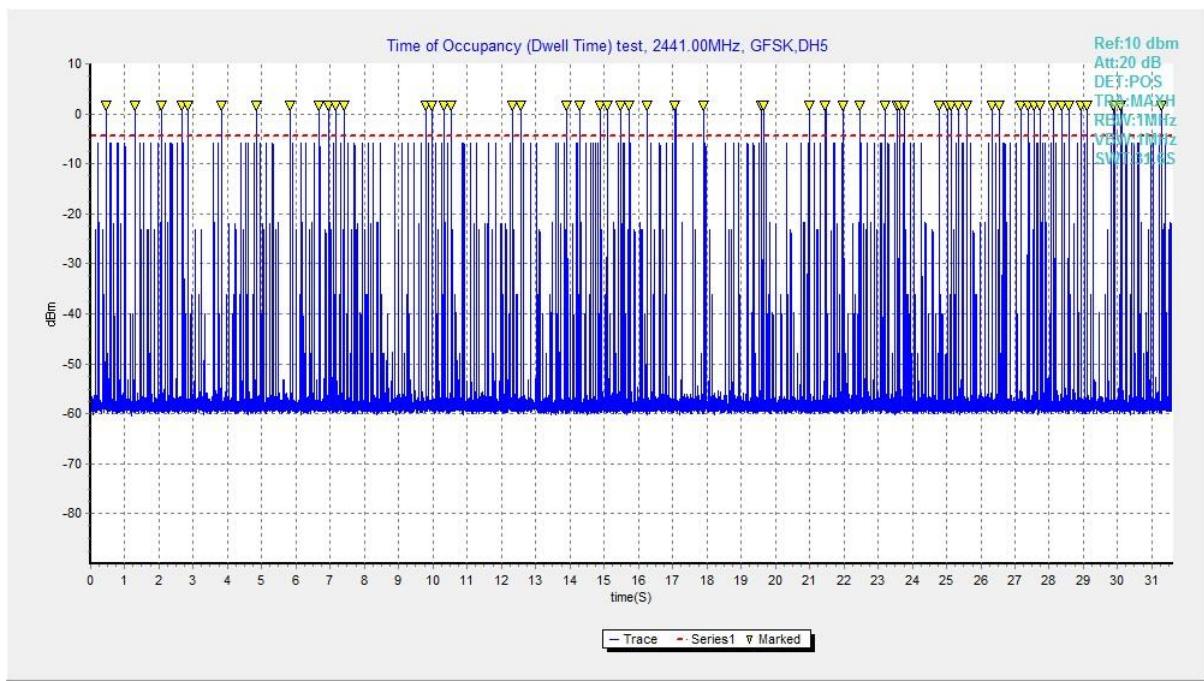


Fig. 61 Time of Occupancy(Dwell Time) (GFSK, Ch39)

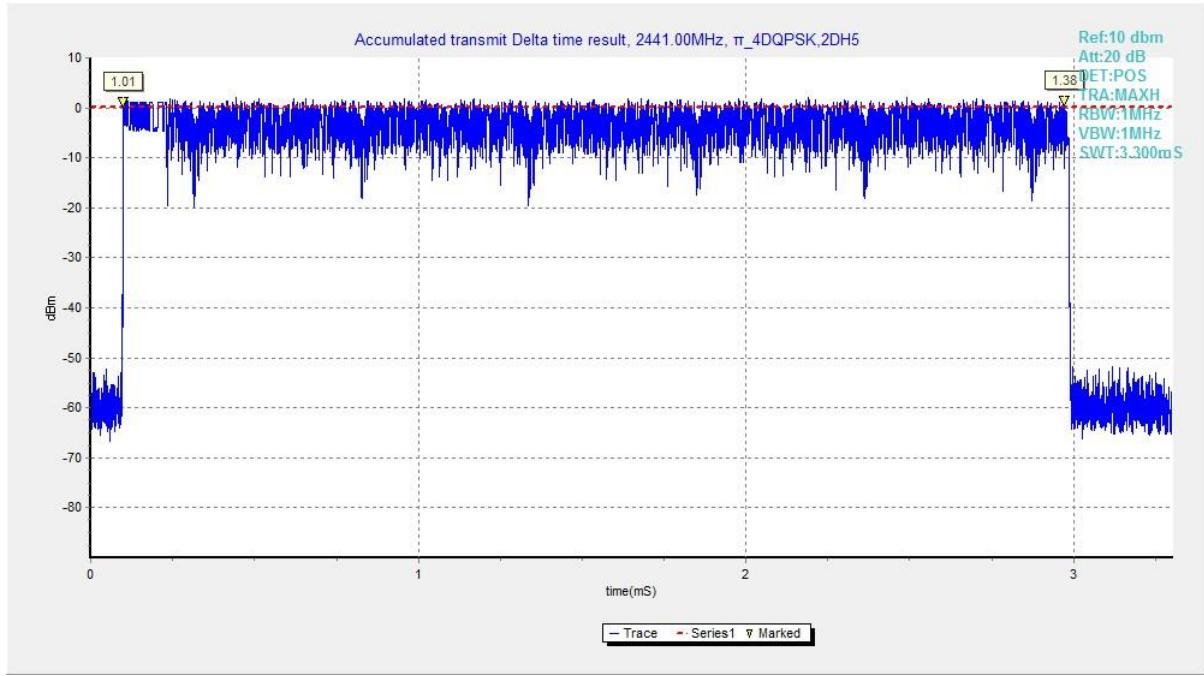


Fig. 62 Time of Occupancy(Dwell Time) ( $\pi/4$  DQPSK, Ch39)

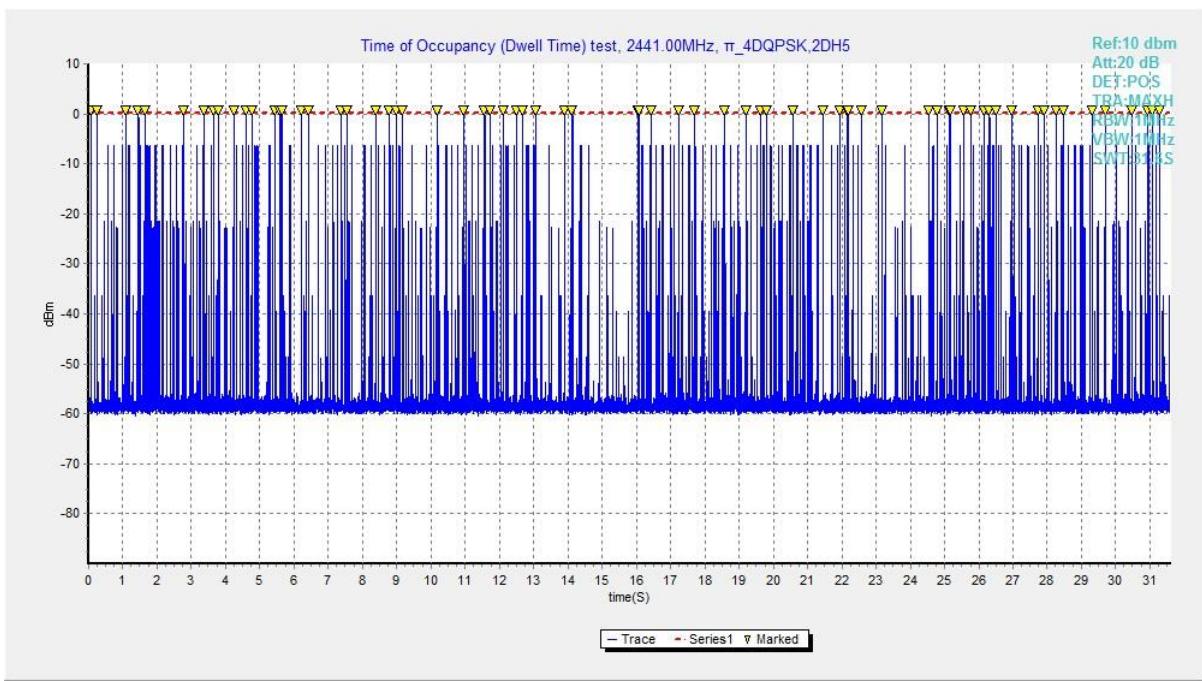


Fig. 63 Time of Occupancy(Dwell Time) ( $\pi/4$  DQPSK, Ch39)


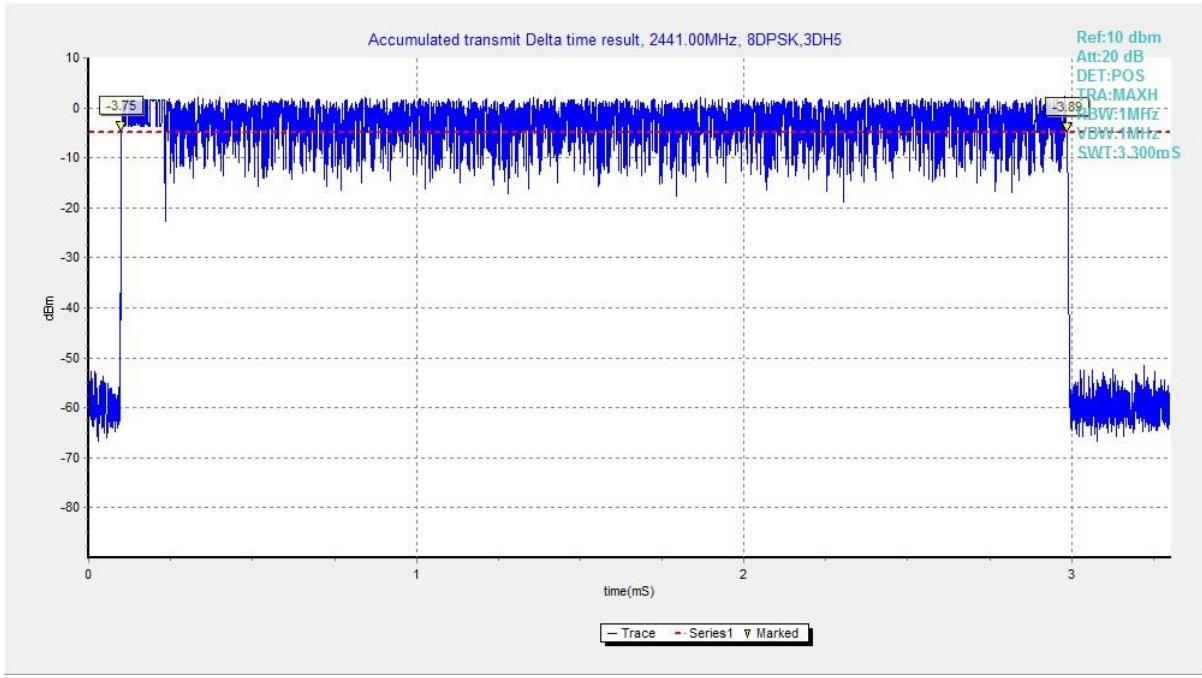


Fig. 64 Time of Occupancy(Dwell Time) (8DPSK, Ch39)

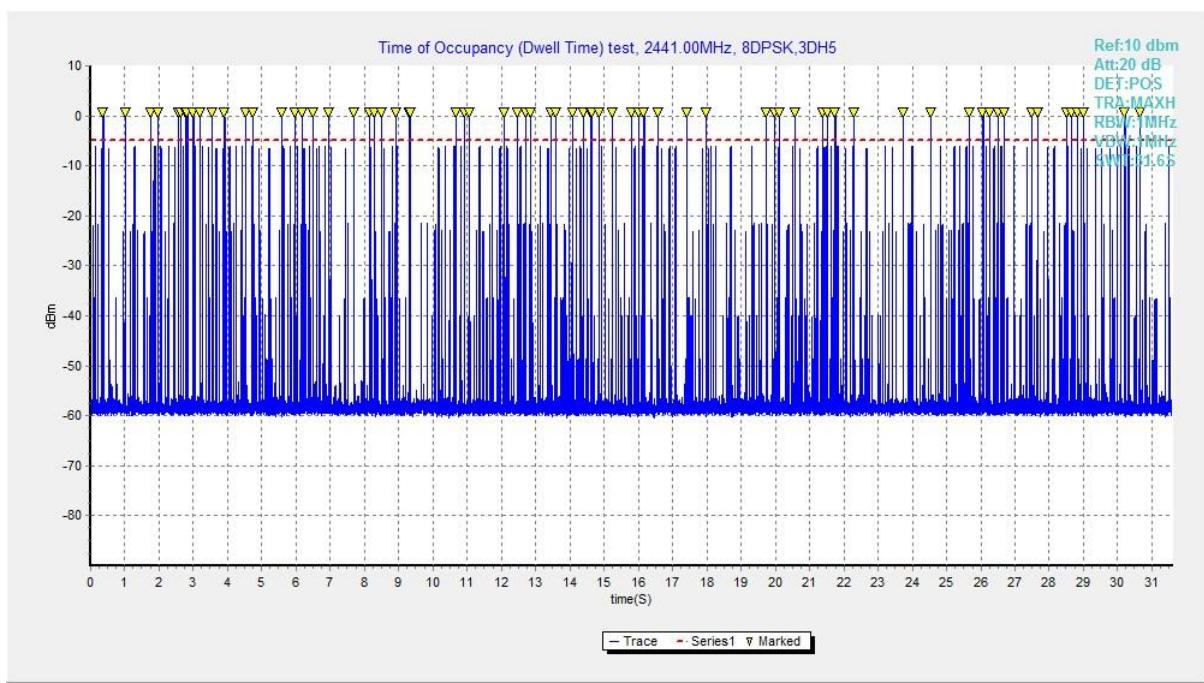

**Fig. 65 Time of Occupancy(Dwell Time) (8DPSK, Ch39)**

### A.7 Number of Hopping Channels

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	At least 15 non-overlapping channels

#### Measurement Results:

Mode	Packet	Number of hopping channels	Test result	Conclusion
GFSK	DH5	Fig.66	Fig.67	79
$\pi/4$ DQPSK	2-DH5	Fig.68	Fig.69	79
8DPSK	3-DH5	Fig.70	Fig.71	79

See below for test graphs.

Conclusion: Pass



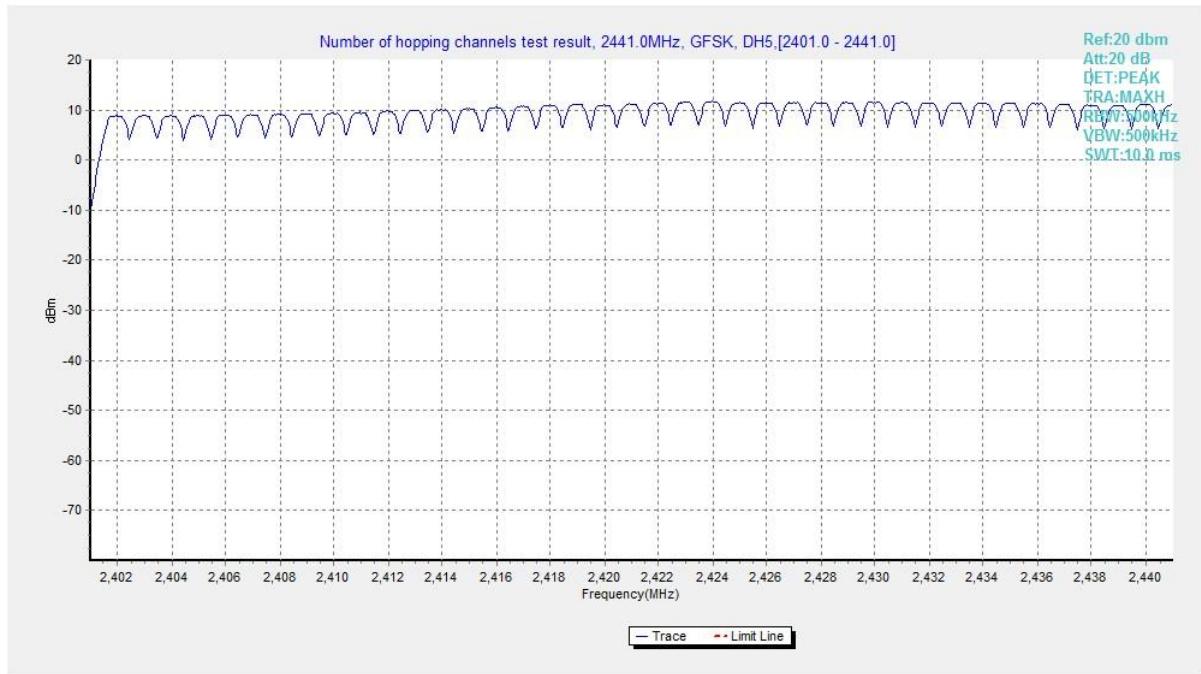



Fig. 66 Hopping channel ch0~39 (GFSK, Ch39)

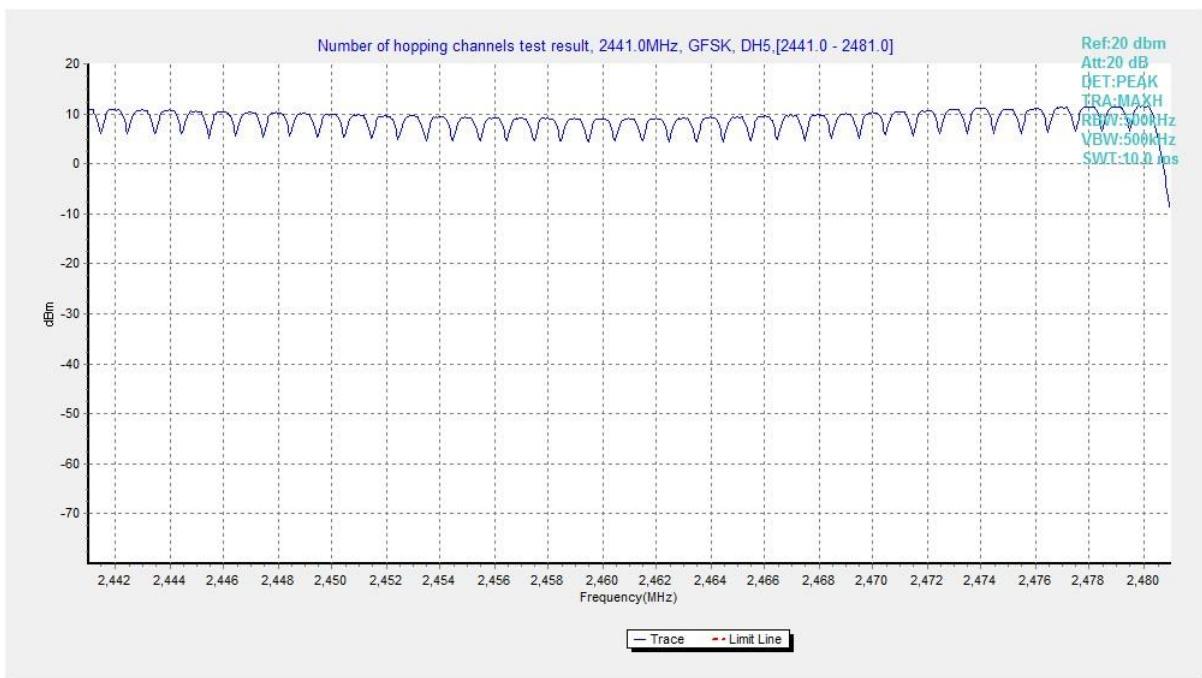


**Fig. 67 Hopping channel ch40~78 (GFSK, Ch39)**

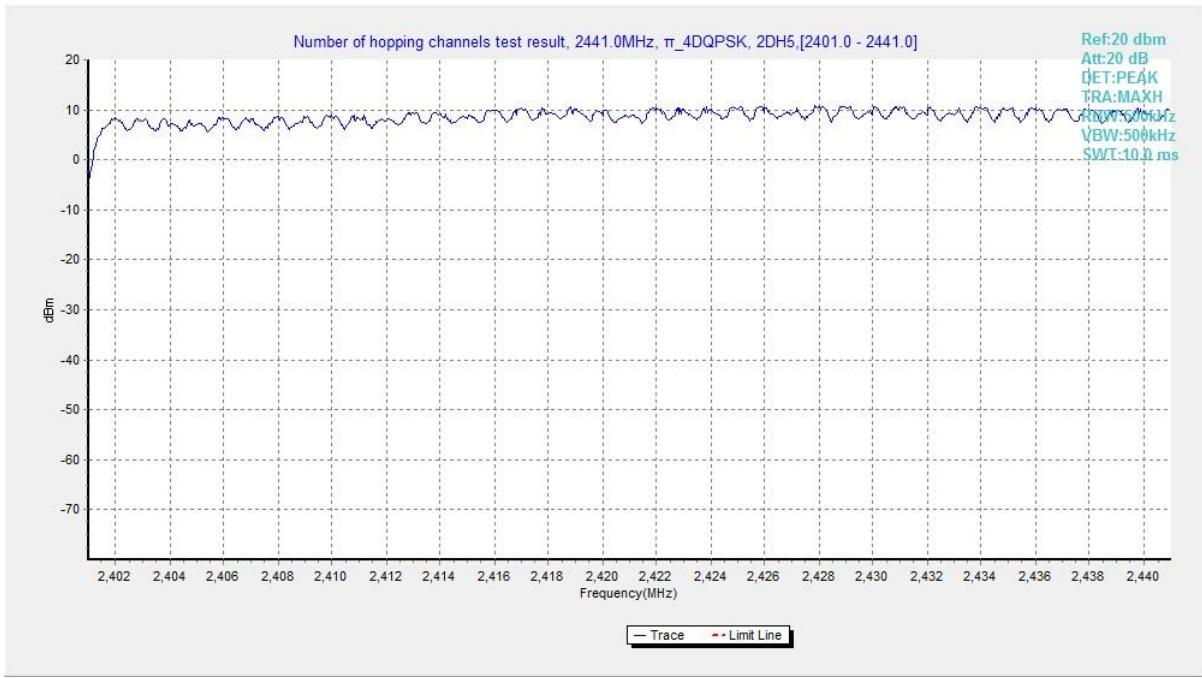

**Fig. 68 Hopping channel ch0~39 ( $\pi/4$  DQPSK, Ch39)**

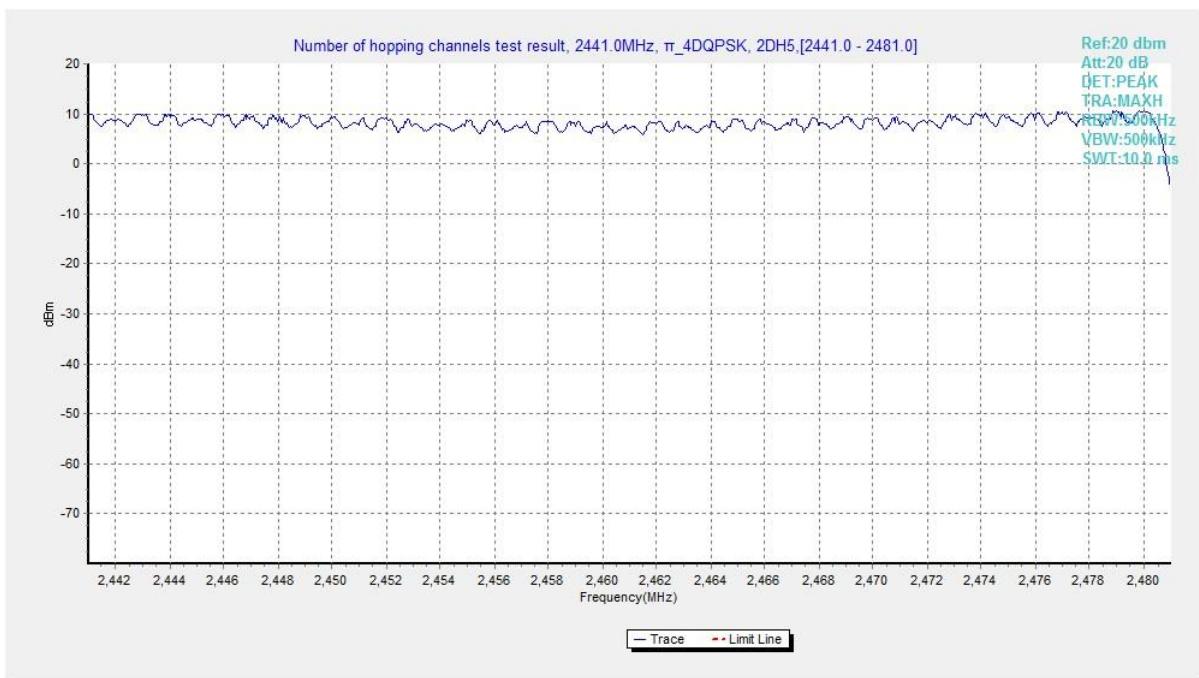

**Fig. 69 Hopping channel ch40~78 (π /4 DQPSK, Ch39)**

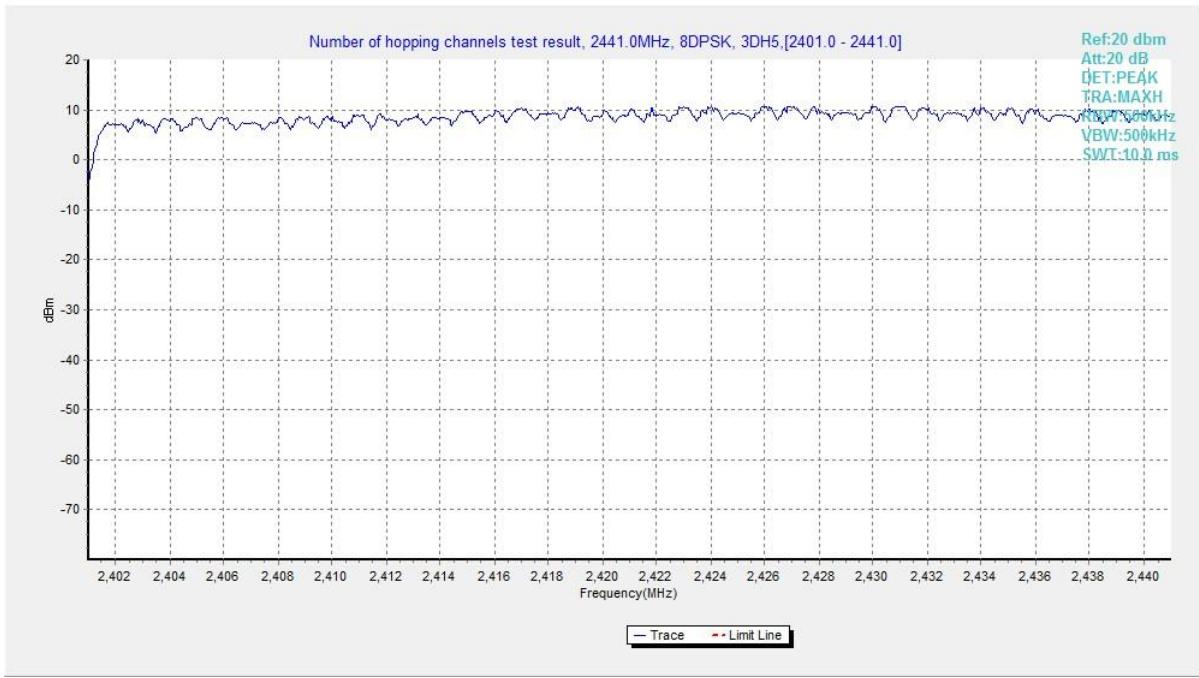

**Fig. 70 Hopping channel ch0~39 (8DPSK, Ch39)**

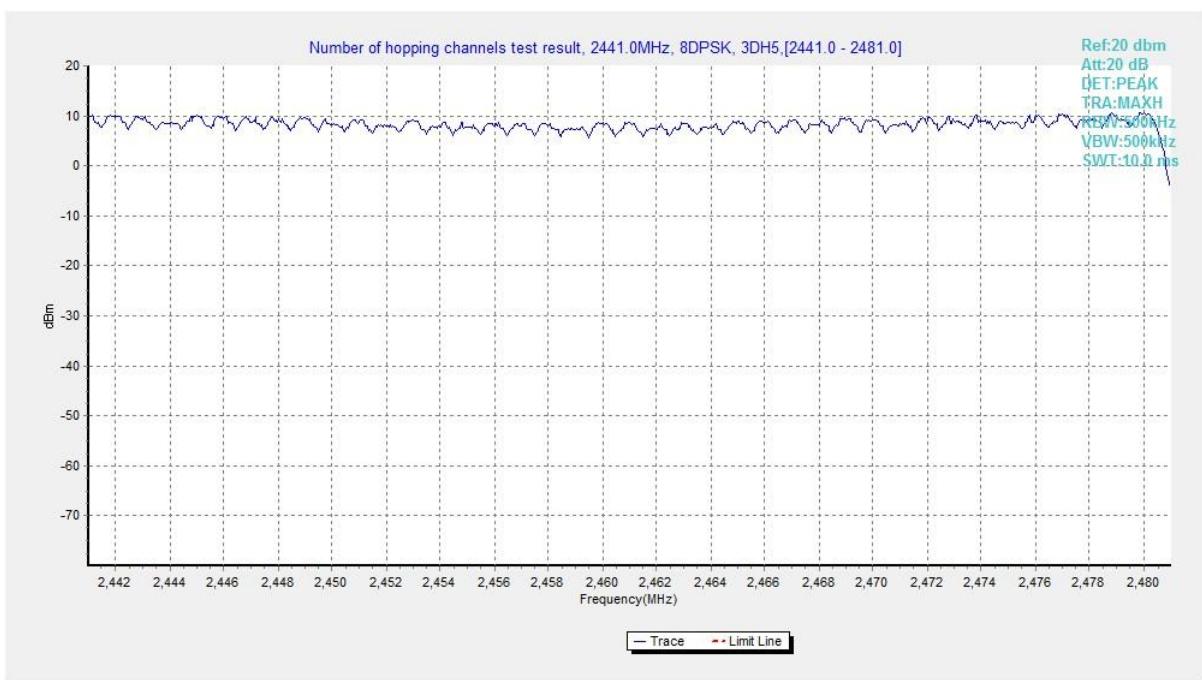


Fig. 71 Hopping channel ch40~78 (8DPSK, Ch39)

### A.8 Carrier Frequency Separation

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	By a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

#### Measurement Results:

Mode	Channel	Packet	Separation of hopping channels	Test result (MHz)	Conclusion
GFSK	39	DH5	Fig.72	1.00	P
$\pi/4$ DQPSK	39	2-DH5	Fig.73	1.00	P
8DPSK	39	3-DH5	Fig.74	1.00	P

See below for test graphs.

Conclusion: Pass

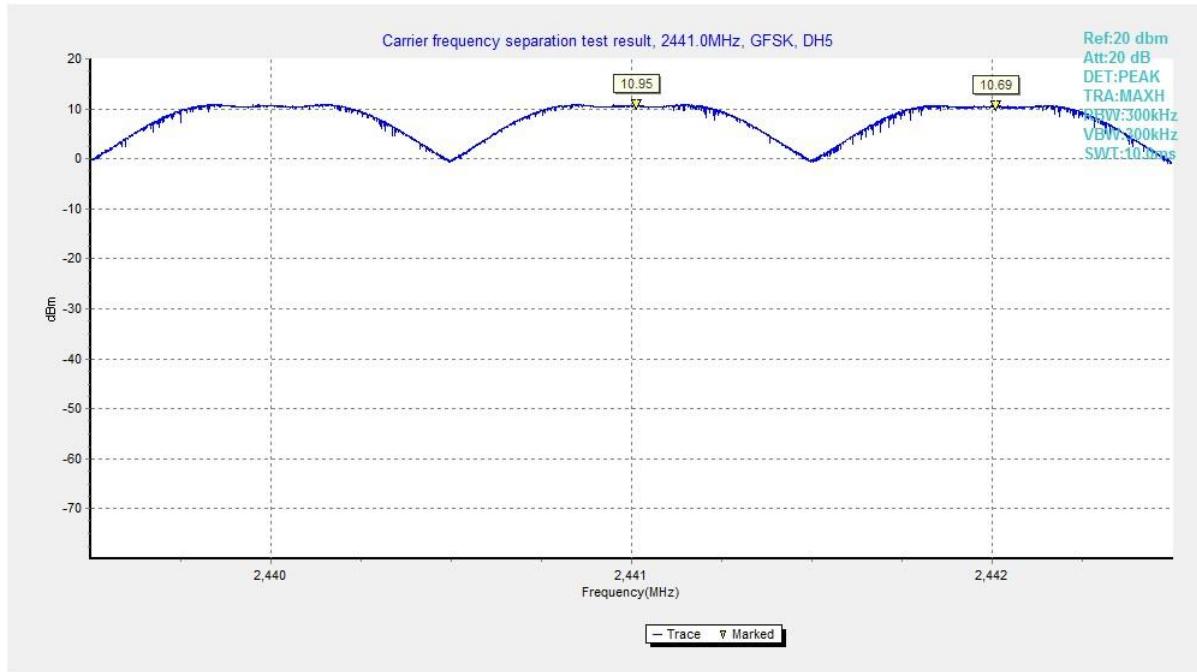


Fig. 72 Carrier Frequency Separation (GFSK, Ch39)

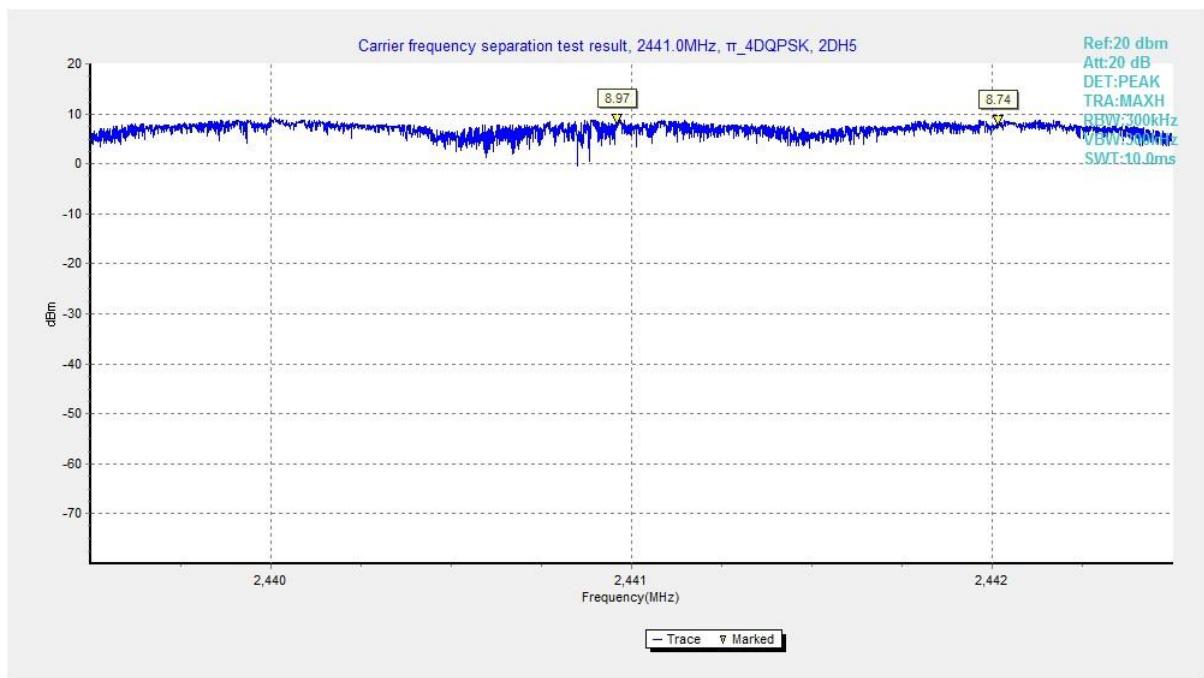


Fig. 73 Carrier Frequency Separation ( $\pi$  /4 DQPSK, Ch39)

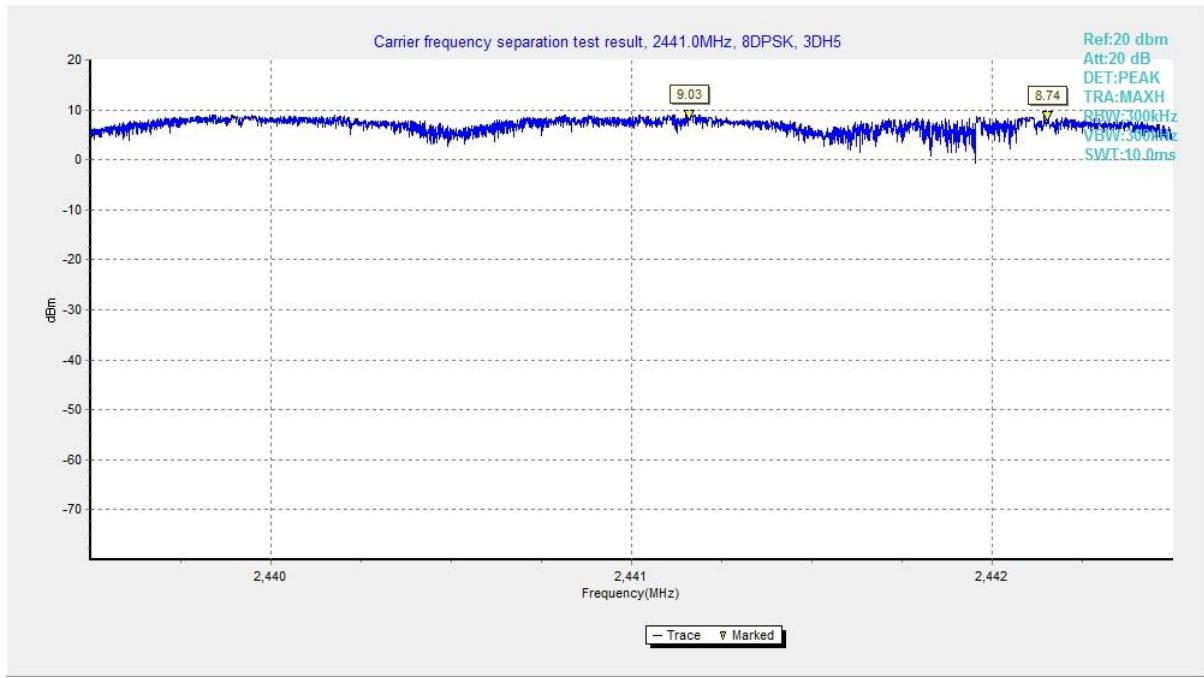


Fig. 74 Carrier Frequency Separation (8DPSK, Ch39)

### A.9 AC Power line Conducted Emission

#### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

#### Measurement Result and limit:

BT (Quasi-peak Limit) - AE3

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.75	Fig.76	P
0.5 to 5	56			
5 to 30	60			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

BT (Average Limit) - AE3


Frequency range (MHz)	Average-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.75	Fig.76	P
0.5 to 5	46			
5 to 30	50			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results include the L1 and N measurements.

See below for test graphs.

Conclusion: Pass

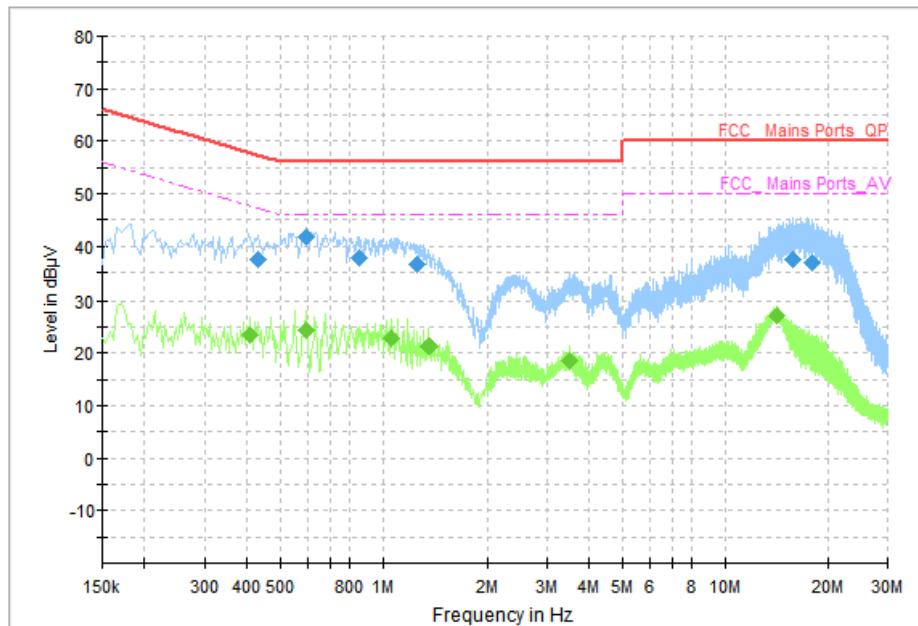

**Fig. 75 AC Powerline Conducted Emission (Traffic, AE3, 120V)**

**Measurement Results: Quasi Peak**

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.430000	37.42	57.25	19.83	L1	ON	10
0.594000	41.73	56.00	14.27	L1	ON	10
0.854000	37.89	56.00	18.11	N	ON	10
1.266000	36.60	56.00	19.40	N	ON	10
15.730000	37.34	60.00	22.66	L1	ON	10
18.098000	36.75	60.00	23.25	L1	ON	10

**Measurement Results: Average**

Frequency (MHz)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.406000	23.31	47.73	24.42	N	ON	10
0.598000	24.34	46.00	21.66	N	ON	10
1.058000	22.87	46.00	23.13	N	ON	10
1.362000	21.28	46.00	24.72	N	ON	10
3.478000	18.63	46.00	27.37	N	ON	10
14.142000	27.22	50.00	22.78	L1	ON	10

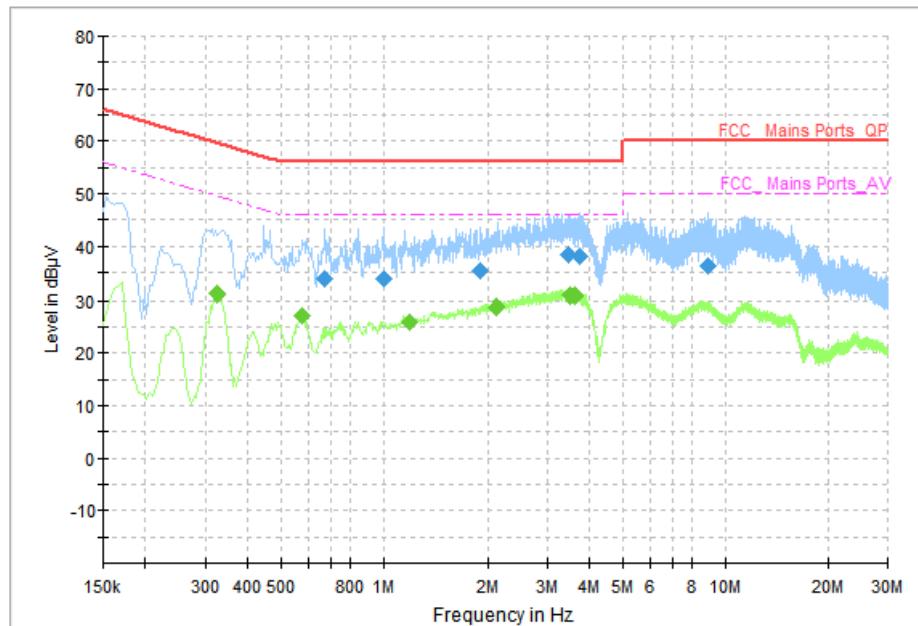


Fig. 76 AC Power line Conducted Emission (Idle, AE3, 120V)

**Measurement Results: Quasi Peak**

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.426000	38.15	57.33	19.18	N	ON	10
0.594000	41.70	56.00	14.30	L1	ON	10
0.766000	39.06	56.00	16.94	N	ON	10
1.278000	36.46	56.00	19.54	N	ON	10
16.154000	37.60	60.00	22.40	L1	ON	10
18.662000	36.38	60.00	23.62	L1	ON	10

**Measurement Results: Average**

Frequency (MHz)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.430000	23.28	47.25	23.97	N	ON	10
0.638000	25.29	46.00	20.71	N	ON	10
0.766000	24.76	46.00	21.24	N	ON	10
1.274000	22.12	46.00	23.88	N	ON	10
3.594000	18.47	46.00	27.53	N	ON	10
14.054000	27.17	50.00	22.83	L1	ON	10

\*\*\*END OF REPORT\*\*\*