



TEST REPORT

No.25T04Z100699-013

for

TCL Communication Ltd.

Tablet PC

8189S

FCC ID: 2ACCJB233

with

Hardware Version: 03

Software Version: 4PA5

Issued Date: 2025-06-09

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04Z100699-013	Rev.0	1st edition	2025-06-09

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA	4
1.5. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE	6
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS	7
4.1. DOCUMENTS SUPPLIED BY APPLICANT	7
4.2. REFERENCE DOCUMENTS FOR TESTING	7
5. TEST RESULTS	8
6. TEST FACILITIES UTILIZED	9
7. MEASUREMENT UNCERTAINTY	10
ANNEX A: EUT PARAMETERS	11
ANNEX B: DETAILED TEST RESULTS	12
ANNEX C: PERSONS INVOLVED IN THIS TESTING	27

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Location 1: CTTL(Huayuan North Road)

Address: No. 52 Huayuan North Road, Haidian District, Beijing,
100191, P. R. China

1.3. Testing Environment

Normal Temperature: 15-35℃

Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2025-04-29


Testing End Date: 2025-05-12

1.5. Signature




Zhang Xia

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Zang Qi

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
Contact: Ting Wang
Telephone: ting.wang.hz@tcl.com
Email: +86 752 2639091

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
Contact: Ting Wang
Telephone: ting.wang.hz@tcl.com
Email: +86 752 2639091

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Tablet PC
Model Name	8189S

Note: The EUT functions are described in Annex A of this test report. Specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the client. Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
EUT1	357684210038279/ 357684210038360	03	4PA5	2025-04-27

*EUT ID: is used to identify the test sample in the lab internally. The SW version information was provided by the applicant.

3.3. Internal Identification of AE

AE ID*	Description	Model	Manufacturer	Note
AE1	USB Cable	CDA0000307C1	JUWEI	Data cable
AE2	Charger	/	Provided by the laboratory	---

*AE ID: is used to identify the test sample in the lab internally. The model name information was provided by the applicant.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1 + AE1 + AE2	Charging
Set.2	EUT1 + AE1 + PC	Connected to PC
Set.3	EUT1 + AE1 + Mobile phone	OTG(Provide power for others)

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, were supplied by the client or manufacturer, which is the basis of testing. CAICT is not responsible for the accuracy of customer supplied technical information that may affect the test results (for example, antenna gain and loss of customer supplied cable).

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2023
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. Test Results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	BR	Re-use test data from basic model report.
	NA	Not applicable
	NM	Not measured

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(Huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(Huayuan North Road)

6. Test Facilities Utilized

Test instruments list:

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	LISN	ENV216	101200	R&S	1 year	2025-05-16
2	Test Receiver	ESCI	100344	R&S	1 year	2026-04-01
3	Universal Radio Communication Tester	CMW500	116588	R&S	1 year	2026-01-25
4	Test Receiver	ESW44	103023	R&S	1 year	2025-06-06
5	BiLog Antenna	VULB9163	01222	Schwarzbeck	1 year	2025-09-11
6	EMI Antenna	3115	6914	ETS-Lindgren	1 year	2026-03-31
7	PC With mouse and keyboard	M4000e-17	M706GWXD	Lenovo	N/A	N/A
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
9	Universal Radio Communication Tester	E7515B	MY60102215	Keysight	1 year	2025-7-9
10	Signal Generator	SML01	106247	R&S	1 year	2025-5-15

Note: the above equipment were in calibration due date when used for testing.

Test software list:

Test Item	Test Software	Software Vendor
Radiated Emission	EMC32	R&S
Conducted Emission	EMC32	R&S

Semi-anechoic chamber utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz

Shielded room utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

7. Measurement Uncertainty

Where relevant, the following measurement uncertainty(worse case) levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Location 1: CTTL(huayuan North Road)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	5.15dB($k=2$)
	1GHz-18GHz	5.54dB($k=2$)
Conducted Emission	150kHz-30MHz	AC Power Line: 3.08dB($k=2$)

ANNEX A: EUT parameters

Cellular Bands operate between 30MHz-960MHz	☒ GSM	Band 850
	☒ WCDMA	Band V
	☒ LTE	Band 5/12/13/14/17/26/29/71
	☒ 5G NR SA	Band 5/12/14/71
Other FCC Part 15B related features	☒ FM ☒ MP3 ☒ Video ☒ Camera ☒ USB data/charging/OTG	

ANNEX B: Detailed Test Results

B.1. Radiated Emission

Reference: FCC Part 15.109(a).

Method of measurement: The field strength of radiated emissions from the unintentional radiator at distances of 10 meters (for 30MHz-1GHz) and 3 meters (for above 1GHz) were tested. The test was in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at the specified distance from the EUT. During the test, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

EUT operating mode: The EUT was operating in the USB data and/or charging mode. During the test, the EUT was connected to a charger in the case of charging mode. The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in Annex A, were investigated. Only the worst case emissions are reported. All equipment was placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

Measurement limit:

Frequency range (MHz)	Field strength limit (μV/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. The limits for 10 meters distance is got by converting: $\text{Limit}(10\text{m}) = \text{Limit}(3\text{m}) + 20[\log(3/10)]$, which is according to FCC 15.109(g)(2)

Test settings:

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

Measurement results:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Note: The measurement results showed as followed are worst cases, and the combinations of different batteries, cables and headsets were considered if applicable.

EUT1 Front camera, GSM 850 idle, MP3 and charger mode, Set.1

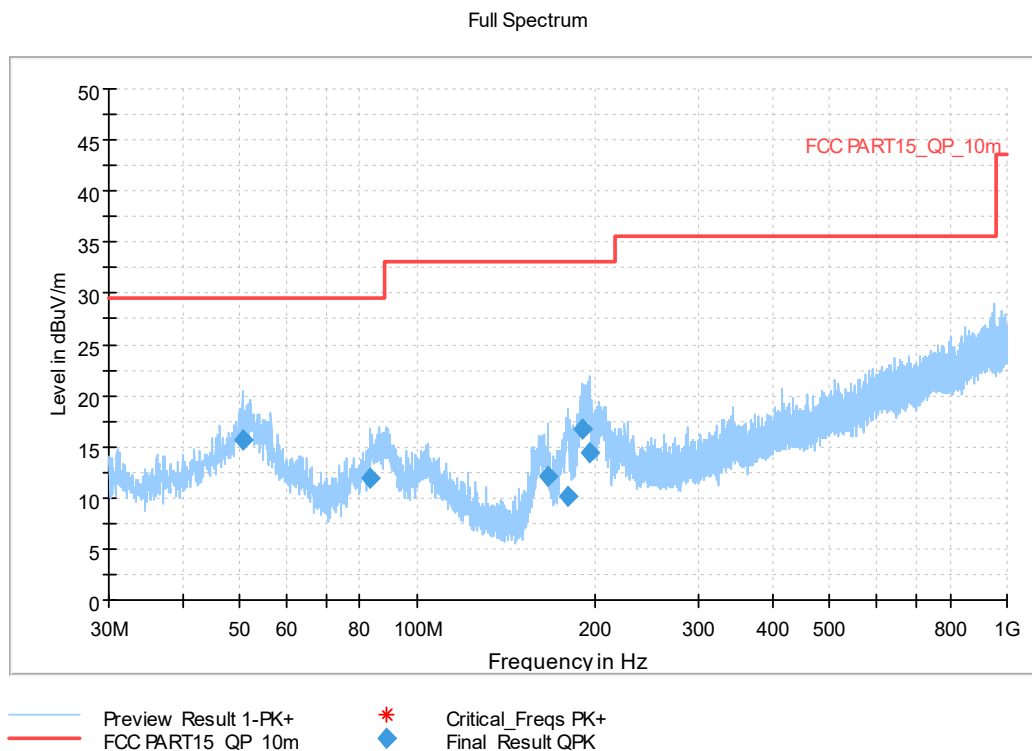


Figure A.1 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.515500	15.60	29.54	13.94	120.000	100.0	V	255.0
83.204500	11.94	29.54	17.60	120.000	182.0	V	300.0
166.236500	12.09	33.06	20.97	120.000	125.0	V	-16.0
179.768000	10.07	33.06	22.99	120.000	118.0	V	69.0
190.535000	16.70	33.06	16.36	120.000	225.0	V	-22.0
196.258000	14.40	33.06	18.66	120.000	100.0	V	-7.0

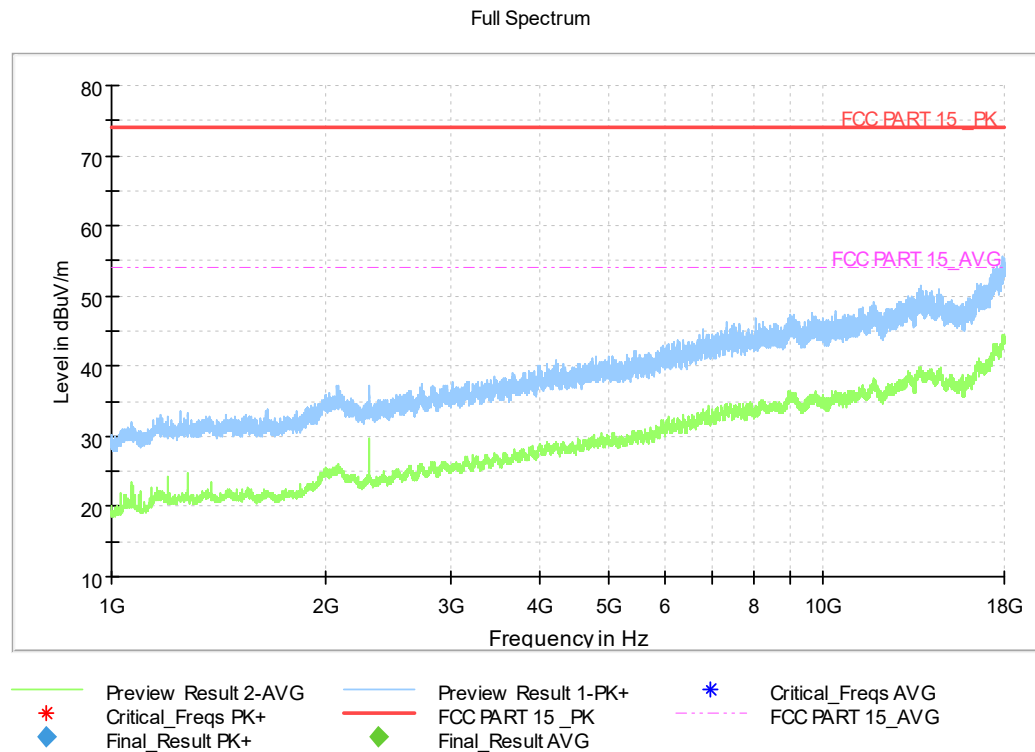


Figure A.2 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17947.3	44.08	-26.8	42.3	28.58	54	9.92	V
17958.2	44.06	-26.8	42.3	28.56	54	9.94	V
17962.3	44.05	-26.8	42.3	28.55	54	9.95	V
17931.7	44.03	-26.8	42.3	28.53	54	9.97	V
17965.3	44.03	-26.8	42.3	28.53	54	9.97	H
17939.5	44.02	-26.8	42.3	28.52	54	9.98	H

Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17901.1	55.6	-26.8	42.3	40.1	74	18.4	H
17975.5	55.26	-26.8	42.3	39.76	74	18.74	V
17886.4	54.88	-26.8	42.3	39.38	74	19.12	V
17941.5	54.8	-26.8	42.3	39.3	74	19.2	H
17982	54.78	-26.8	42.3	39.28	74	19.22	V
17943.2	54.74	-26.8	42.3	39.24	74	19.26	H

EUT1 LTE Band 12 idle, rear camera and charger mode, Set.1

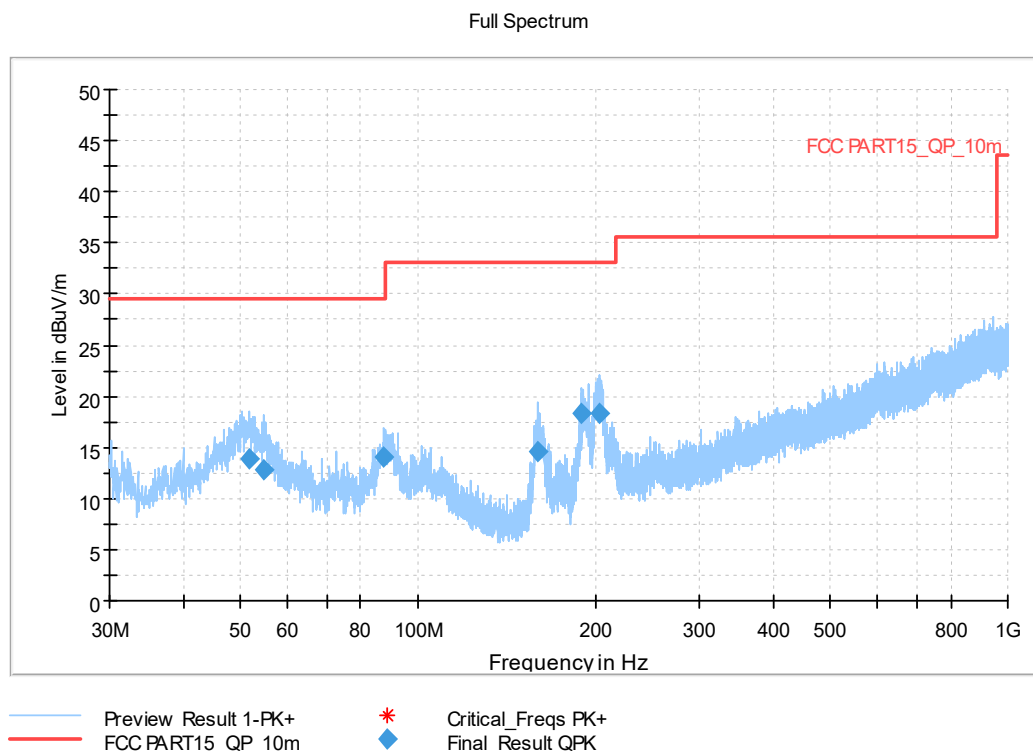


Figure A.3 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
51.776500	13.86	29.54	15.68	120.000	107.0	V	287.0
54.880500	12.77	29.54	16.77	120.000	325.0	V	225.0
87.715000	14.10	29.54	15.44	120.000	181.0	V	305.0
159.543500	14.58	33.06	18.48	120.000	107.0	V	6.0
189.904500	18.24	33.06	14.82	120.000	125.0	V	-7.0
202.514500	18.26	33.06	14.80	120.000	100.0	V	45.0

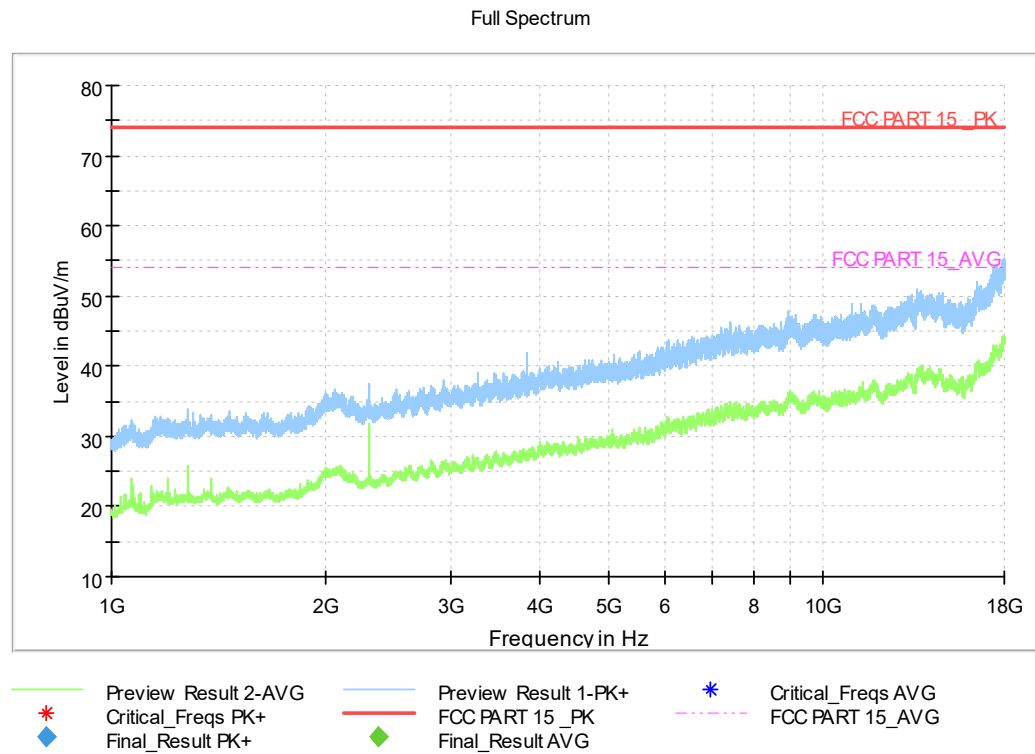


Figure A.4 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17939.8	44	-26.8	42.3	28.5	54	10	V
17900.4	43.91	-26.8	42.3	28.41	54	10.09	V
17901.1	43.9	-26.8	42.3	28.4	54	10.1	V
17951.4	43.88	-26.8	42.3	28.38	54	10.12	H
17911.3	43.86	-26.8	42.3	28.36	54	10.14	H
17958.9	43.82	-26.8	42.3	28.32	54	10.18	H

Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17958.5	55.36	-26.8	42.3	39.86	74	18.64	V
17970.8	55.12	-26.8	42.3	39.62	74	18.88	H
17939.5	54.99	-26.8	42.3	39.49	74	19.01	H
17973.5	54.77	-26.8	42.3	39.27	74	19.23	H
17919.4	54.63	-26.8	42.3	39.13	74	19.37	V
17936.4	54.58	-26.8	42.3	39.08	74	19.42	V

EUT1 LTE Band 17 idle, FM and charger mode, Set.1

Full Spectrum

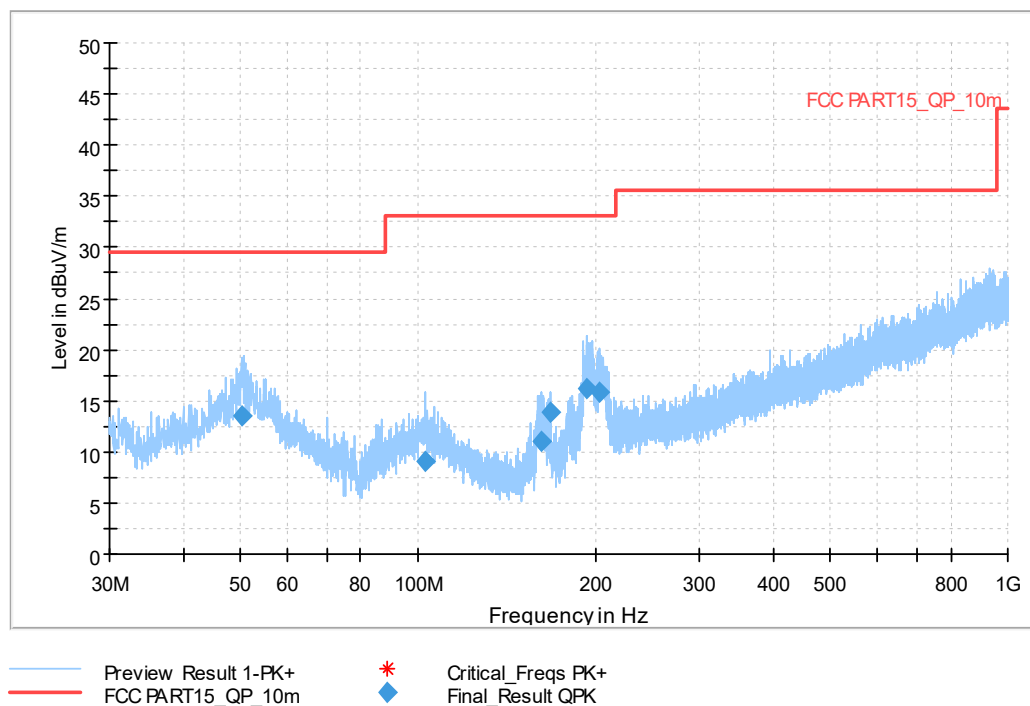


Figure A.5 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.176000	13.57	29.54	15.97	120.000	100.0	V	29.0
103.186500	9.09	33.06	23.97	120.000	175.0	V	112.0
161.871500	11.04	33.06	22.02	120.000	125.0	V	168.0
167.255000	13.93	33.06	19.13	120.000	125.0	V	-7.0
193.736000	16.11	33.06	16.95	120.000	125.0	V	-37.0
203.387500	15.89	33.06	17.17	120.000	100.0	V	156.0

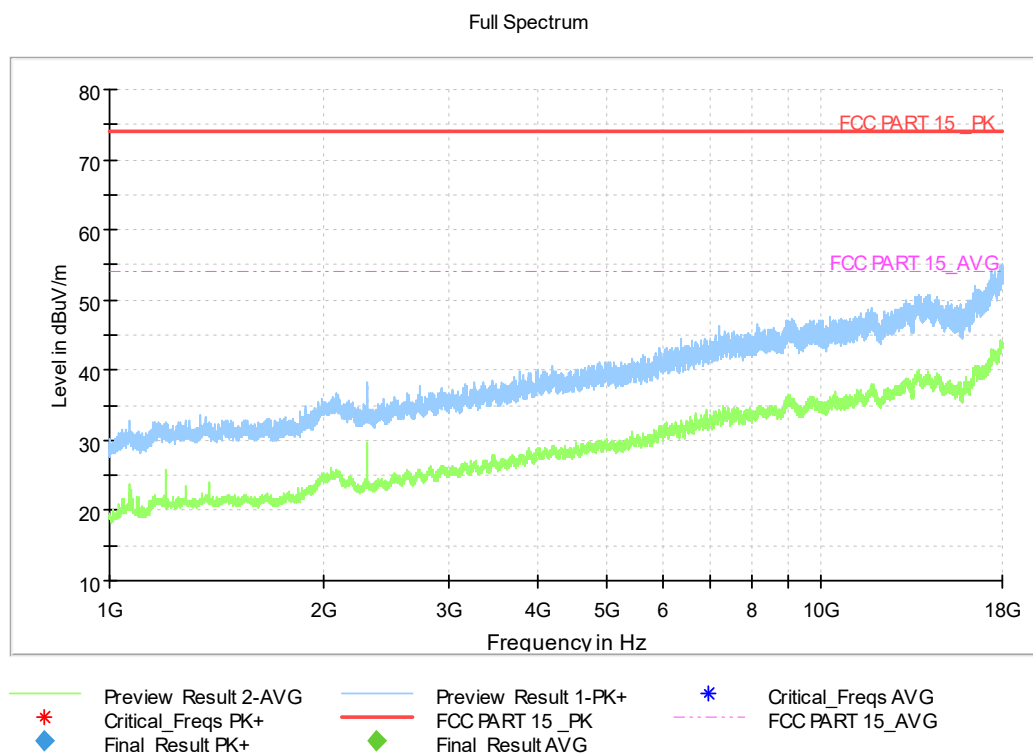


Figure A.6 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17981	44.02	-26.8	42.3	28.52	54	9.98	H
17995.9	43.93	-26.8	42.3	28.43	54	10.07	V
17969.4	43.9	-26.8	42.3	28.4	54	10.1	V
17907.5	43.89	-26.8	42.3	28.39	54	10.11	H
17954.1	43.86	-26.8	42.3	28.36	54	10.14	V
17988.4	43.85	-26.8	42.3	28.35	54	10.15	H

Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17964	55.02	-26.8	42.3	39.52	74	18.98	H
17951	54.91	-26.8	42.3	39.41	74	19.09	H
17944.9	54.84	-26.8	42.3	39.34	74	19.16	V
17974.8	54.81	-26.8	42.3	39.31	74	19.19	H
17919.1	54.75	-26.8	42.3	39.25	74	19.25	V
17980.3	54.68	-26.8	42.3	39.18	74	19.32	V

EUT1 USB connected to PC and NR n41 idle mode, Set.2

Full Spectrum

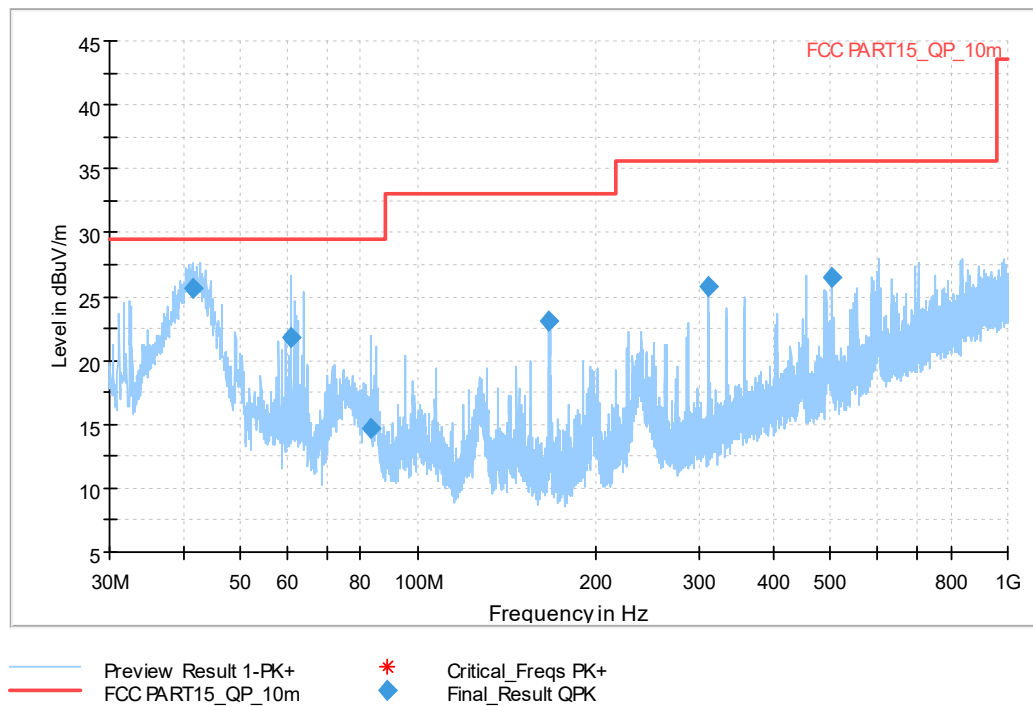


Figure A.7 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
41.446000	25.71	29.54	3.83	120.000	225.0	V	135.0
61.088500	21.79	29.54	7.75	120.000	107.0	V	233.0
83.350000	14.66	29.54	14.88	120.000	192.0	V	30.0
166.770000	23.15	33.06	9.91	120.000	117.0	V	279.0
309.748000	25.83	35.56	9.73	120.000	225.0	H	7.0
503.990500	26.54	35.56	9.02	120.000	182.0	H	83.0

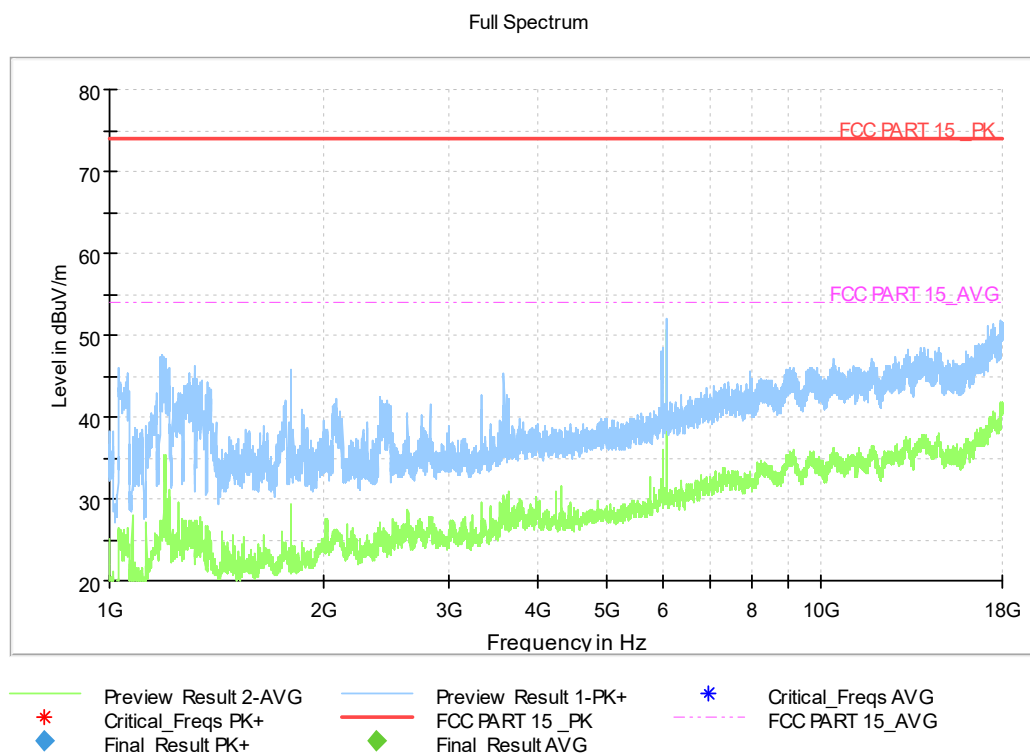


Figure A.8 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
6055.1	50.61	-36.15	35.4	51.36	54	3.39	H
6055.5	49.35	-36.15	35.4	50.1	54	4.65	H
6054.8	47.56	-36.15	35.4	48.31	54	6.44	H
6055.8	43.48	-36.15	35.4	44.23	54	10.52	H
17951	41.71	-26.8	42.3	26.21	54	12.29	H
17970.4	41.69	-26.8	42.3	26.19	54	12.31	H

Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
6055.1	51.92	-36.15	35.4	52.67	74	22.08	H
17942.9	51.85	-26.8	42.3	36.35	74	22.15	H
6055.5	51.69	-36.15	35.4	52.44	74	22.31	H
17969.4	51.62	-26.8	42.3	36.12	74	22.38	V
17968	51.58	-26.8	42.3	36.08	74	22.42	V
17957.2	51.56	-26.8	42.3	36.06	74	22.44	H

EUT1 USB connected to another mobile phone and WCDMA 850MHz idle mode, Set.3

Full Spectrum

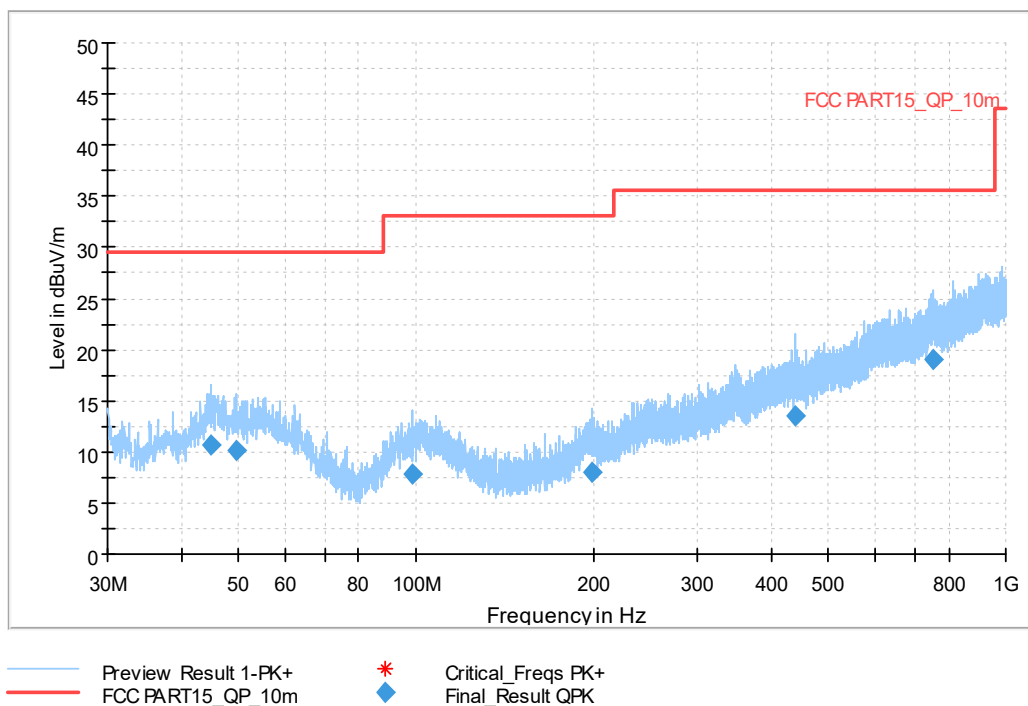


Figure A.9 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
44.986500	10.65	29.54	18.89	120.000	215.0	H	90.0
49.642500	10.17	29.54	19.37	120.000	125.0	H	225.0
98.627500	7.86	33.06	25.20	120.000	316.0	V	171.0
198.295000	8.06	33.06	25.00	120.000	292.0	V	135.0
438.612500	13.56	35.56	22.00	120.000	325.0	V	225.0
753.620000	19.10	35.56	16.46	120.000	125.0	H	-45.0

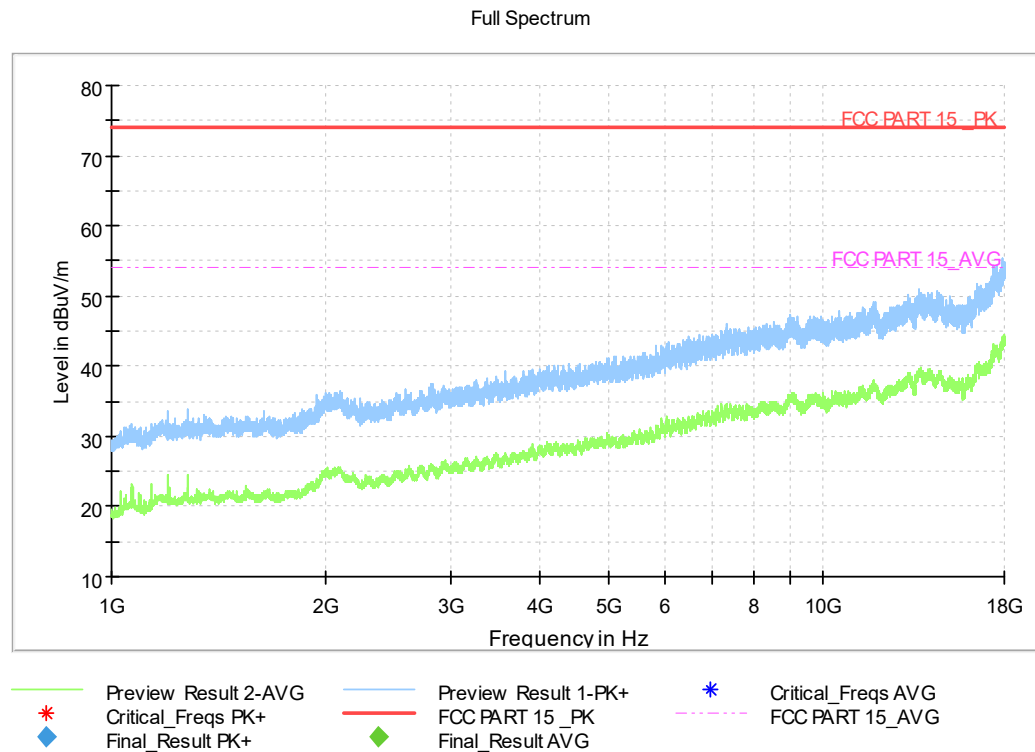


Figure A.10 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17958.2	43.98	-26.8	42.3	28.48	54	10.02	H
17960.9	43.96	-26.8	42.3	28.46	54	10.04	V
17979.9	43.95	-26.8	42.3	28.45	54	10.05	V
17938.1	43.94	-26.8	42.3	28.44	54	10.06	V
17938.8	43.92	-26.8	42.3	28.42	54	10.08	H
17941.5	43.8	-26.8	42.3	28.3	54	10.2	V

Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17905.1	55.36	-26.8	42.3	39.86	74	18.64	H
17977.2	54.93	-26.8	42.3	39.43	74	19.07	H
17938.5	54.91	-26.8	42.3	39.41	74	19.09	V
17991.8	54.89	-26.8	42.3	39.39	74	19.11	H
17971.1	54.8	-26.8	42.3	39.3	74	19.2	V
17954.4	54.78	-26.8	42.3	39.28	74	19.22	H

B.2. Conducted Emission

Reference: FCC: Part 15.107(a).

Method of measurement: For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

EUT operating mode: The EUT is operating in the charging mode and USB data mode if applicable.

Measurement limit:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

Test Settings:

Voltage(V)	Frequency(Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

Measurement results:

The measurement results showed as followed are worst cases, and the combinations of different batteries, cables and headsets were considered if applicable.

EUT1 Front camera, GSM idle and charger mode, Set.1

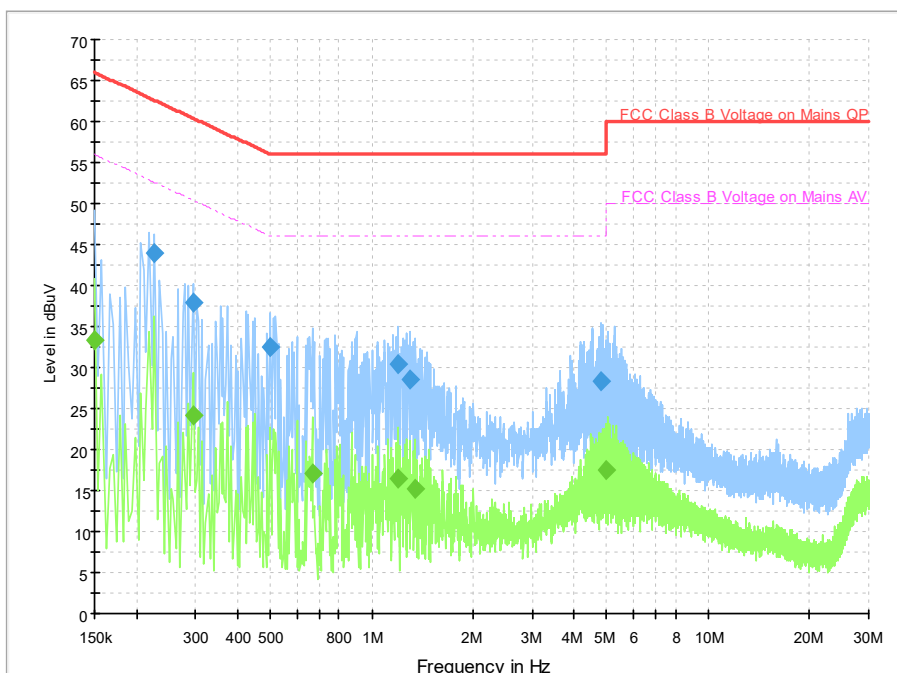


Figure A.11 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.226000	44.0	2000.0	9.000	On	L1	19.9	18.6	62.6
0.294000	38.0	2000.0	9.000	On	N	19.8	22.4	60.4
0.498000	32.5	2000.0	9.000	On	L1	20.0	23.6	56.0
1.202000	30.5	2000.0	9.000	On	L1	19.9	25.5	56.0
1.298000	28.6	2000.0	9.000	On	L1	19.9	27.4	56.0
4.778000	28.2	2000.0	9.000	On	L1	19.8	27.8	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	33.4	2000.0	9.000	On	N	20.1	22.6	56.0
0.294000	24.2	2000.0	9.000	On	L1	19.9	26.2	50.4
0.666000	17.1	2000.0	9.000	On	L1	20.0	28.9	46.0
1.202000	16.4	2000.0	9.000	On	L1	19.9	29.6	46.0
1.338000	15.2	2000.0	9.000	On	L1	19.9	30.8	46.0
4.958000	17.5	2000.0	9.000	On	L1	19.8	28.5	46.0

EUT1 LTE Band 29 idle, rear camera and charger mode, Set.1

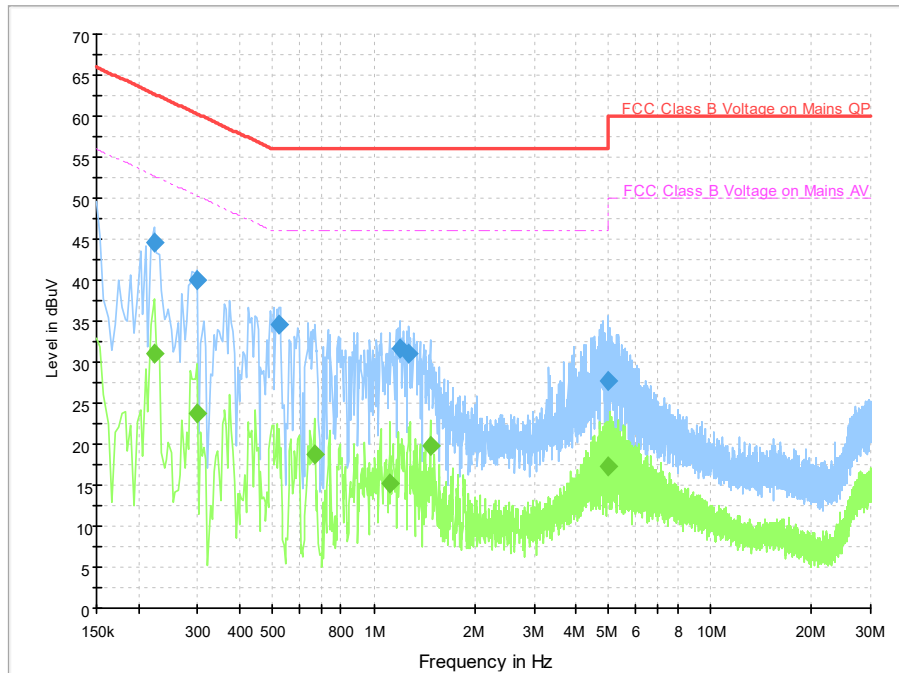


Figure A.12 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.222000	44.6	2000.0	9.000	On	L1	19.9	18.2	62.7
0.298000	39.9	2000.0	9.000	On	L1	19.9	20.4	60.3
0.522000	34.7	2000.0	9.000	On	L1	20.0	21.3	56.0
1.198000	31.6	2000.0	9.000	On	L1	19.9	24.4	56.0
1.274000	31.1	2000.0	9.000	On	L1	19.9	24.9	56.0
4.978000	27.7	2000.0	9.000	On	L1	19.8	28.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.222000	31.0	2000.0	9.000	On	L1	19.9	21.8	52.7
0.298000	23.8	2000.0	9.000	On	L1	19.9	26.5	50.3
0.666000	18.8	2000.0	9.000	On	N	19.8	27.2	46.0
1.118000	15.3	2000.0	9.000	On	L1	19.9	30.7	46.0
1.470000	19.8	2000.0	9.000	On	L1	19.9	26.2	46.0
4.978000	17.4	2000.0	9.000	On	L1	19.8	28.6	46.0

EUT1 USB connected to PC and NR n5 idle mode, Set.2

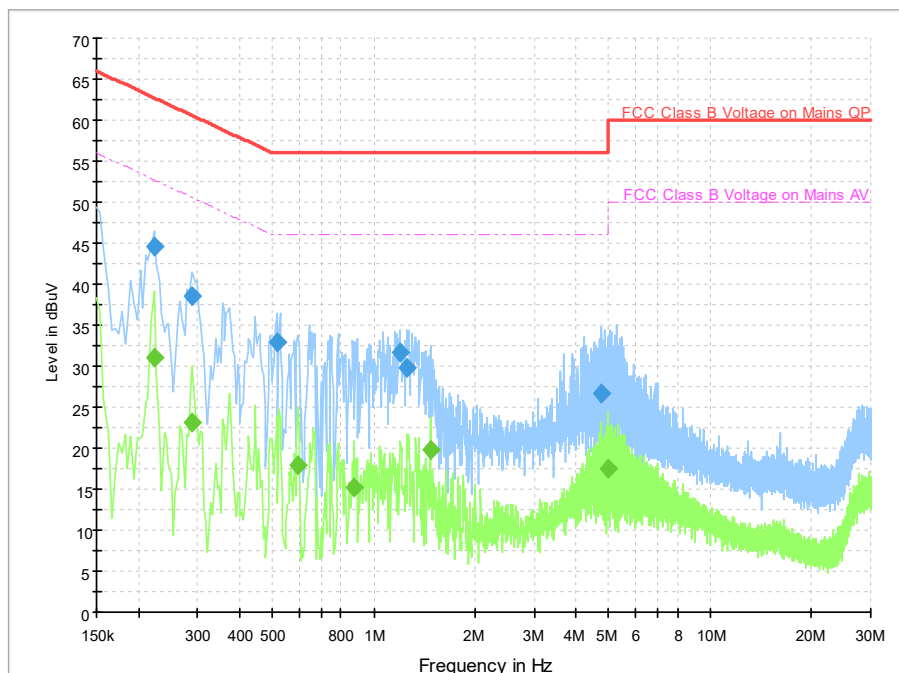


Figure A.13 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.222000	44.5	2000.0	9.000	On	L1	19.9	18.2	62.7
0.290000	38.5	2000.0	9.000	On	L1	19.9	22.1	60.5
0.514000	32.9	2000.0	9.000	On	L1	20.0	23.1	56.0
1.198000	31.6	2000.0	9.000	On	L1	19.9	24.4	56.0
1.254000	29.9	2000.0	9.000	On	L1	19.9	26.1	56.0
4.726000	26.7	2000.0	9.000	On	N	19.6	29.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.222000	30.9	2000.0	9.000	On	L1	19.9	21.8	52.7
0.290000	23.2	2000.0	9.000	On	L1	19.9	27.3	50.5
0.594000	17.9	2000.0	9.000	On	L1	20.0	28.1	46.0
0.874000	15.3	2000.0	9.000	On	L1	19.9	30.7	46.0
1.470000	19.8	2000.0	9.000	On	L1	19.9	26.2	46.0
4.958000	17.5	2000.0	9.000	On	L1	19.8	28.5	46.0

ANNEX C: Persons involved in this testing

Test Item	Tester
Radiated Emission	Yan Hanchen
Conducted Emission	Zhang Tianli

*****END OF REPORT*****