



FCC PART 15C TEST REPORT

No.25T04Z100234-008

for

TCL Communication Ltd.

GSM/UMTS/LTE mobile phone

Model Name: T517J

FCC ID: 2ACCJB237

with

Hardware Version: 05

Software Version: 3A4G

Issued Date: 2025-03-27

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:cttl_terminals@caict.ac.cn, website: www.chinattl.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04Z100234-008	Rev.0	1 st edition	2025-3-27

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	6
1.4. PROJECT DATA	6
1.5. SIGNATURE	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT	8
3.3. INTERNAL IDENTIFICATION OF AE	8
3.4. NORMAL ACCESSORY SETTING	8
3.5. GENERAL DESCRIPTION	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. TEST RESULTS	10
5.1. SUMMARY OF TEST RESULTS	10
5.2. STATEMENTS	10
6. TEST FACILITIES UTILIZED	11
7. MEASUREMENT UNCERTAINTY	12
7.1. PEAK OUTPUT POWER - CONDUCTED	12
7.2. FREQUENCY BAND EDGES - CONDUCTED	12
7.3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED	12
7.4. TRANSMITTER SPURIOUS EMISSION - RADIATED	12
7.5. TIME OF OCCUPANCY (DWELL TIME)	12
7.6. 20DB BANDWIDTH	12
7.7. CARRIER FREQUENCY SEPARATION	13
7.8. AC POWERLINE CONDUCTED EMISSION	13
ANNEX A: EUT PARAMETERS	14
ANNEX B: DETAILED TEST RESULTS	15
B.1. MEASUREMENT METHOD	15
B.2. PEAK OUTPUT POWER	16
B.3. FREQUENCY BAND EDGES – CONDUCTED	18



B.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED	25
B.5. RADIATED UNWANTED EMISSION	50
B.6. TIME OF OCCUPANCY (DWEIL TIME)	62
B.7. 20dB BANDWIDTH	73
B.8. CARRIER FREQUENCY SEPARATION	79
B.9. NUMBER OF HOPPING CHANNELS	82
B.10. AC POWERLINE CONDUCTED EMISSION	86
B.11. ANTENNA REQUIREMENT	90
ANNEX C: ACCREDITATION CERTIFICATE	91

1. Test Laboratory

1.1. Introduction &Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website

1.2. Testing Location

Conducted Testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated Testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176


1.3. Testing Environment

Normal Temperature: 20-27℃
Relative Humidity: 20-50%


1.4. Project data

Testing Start Date: 2025-2-10
Testing End Date: 2025-3-24

1.5. Signature



Xie Xiuzhen
(Prepared this test report)



Zheng Wei
(Reviewed this test report)



Pang Shuai
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
Contact: Ting Wang
Email: ting.wang.hz@tcl.com
Telephone: +86 752 2639091
Fax: +86 755 36612000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
Contact: Ting Wang
Email: ting.wang.hz@tcl.com
Telephone: +86 752 2639091
Fax: +86 755 36612000-81722

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM/UMTS/LTE mobile phone
Model Name	T517J
FCC ID	2ACCJB237
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/ $\pi/4$ DQPSK/8DPSK
Number of Channels	79
Power Supply	3.91V DC by Battery
Antenna gain	-0.3dBi

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT17a	356956250000570/	05	3A4G	2025-3-10
(25T04Z100217)	356956250000588			
UT06a	356956250000039/	05	3A4G	2025-2-10
(25T04Z100217)	356956250000125			

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	Model	Manufacturer
AE1	Battery1	TLp050C7	Dongguan Veken Battery Co., Ltd.
AE2	Battery2	TLp050CB	Shenzhen Aerospace Electronic Co., Ltd.
AE3	Charger1	QC13US-N	ShenZhen BajunDa Electronics Co.,Ltd
AE4	USB Cable1	JWUB1686-M01R	Huizhou Juwei Electronics Co.,Ltd
AE5	USB Cable2	FKY-23-367	Qiyang Fukangyuan Electronic Technology Co., Ltd.

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery should be used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of GSM/UMTS/LTE mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	2024
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	
ANSI C63.10	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	June,2013
	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	

5. Test Results

5.1. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
F Fail, The EUT does not comply with the essential requirements in the standard
NA Not Applicable, The test was not applicable
NP Not Performed, The test was not performed by CTTL
BR Re-use test data from basic model report.

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power	15.247 (b)(1)	BR
Frequency Band Edges- Conducted	15.247 (d)	BR
Transmitter Spurious Emission - Conducted	15.247 (d)	BR
Radiated Unwanted Emission	15.247, 15.205, 15.209	BR
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	BR
20dB Bandwidth	15.247 (a)(1)	BR
Carrier Frequency Separation	15.247 (a)(1)	BR
Number of hopping channels	15.247 (a)(iii)	BR
AC Powerline Conducted Emission	15.107, 15.207	BR
Antenna Requirement	15.203	BR

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

The Equipment Under Test (EUT) model T517J (FCC ID: 2ACCJB237) is a variant product of T517H (FCC ID: 2ACCJB237), according to the declaration of changes provided by the applicant and FCC KDB publication 178919 D01, all results are derived from test report No.25T04Z100217-037.

For detail differences between two models please refer the Declaration of Changes document.

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	100024	R&S	1 year	2026-03-09
2	Bluetooth Tester	CBT	100315	R&S	1 year	2026-03-08
3	Test Receiver	ESCI	100766	R&S	1 year	2025-04-18
4	LISN	ENV216	101459	R&S	1 year	2025-05-16
5	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103015	R&S	1 year	2026-01-15
2	EMI Antenna	VULB 9163	01176	SCHWARZBECK	1 year	2025-04-07
3	EMI Antenna	3117	00058888	ETS-Lindgren	1 year	2025-09-18
4	Bluetooth Tester	CMW500	143008	Rohde & Schwarz	1 year	2026-01-15
5	EMI Antenna	LB-180400 -25-C-KF	211008400 0006	A-INFO	1 year	2025-05-22

7. Measurement Uncertainty

7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.2. Frequency Band Edges - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.3. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

7.4. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

Frequency Range	Uncertainty(dBm) (k=2)
9kHz-30MHz	3.96
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.29
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.62
$18\text{GHz} \leq f \leq 40\text{GHz}$	3.52

7.5. Time of Occupancy (Dwell Time)

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.88ms
-------------------------------	--------

7.6. 20dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

7.7. Carrier Frequency Separation

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

7.8. AC Powerline Conducted Emission

Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.10dB
-------------------------------	--------

ANNEX A: EUT parameters

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.


ANNEX B: Detailed Test Results

B.1. Measurement Method

B.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

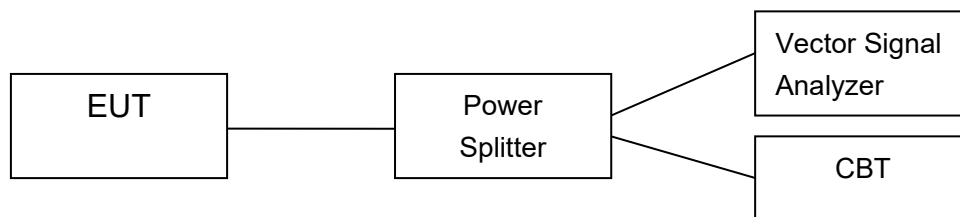

B.1.2. Radiated Emission Measurements

The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

B.2. Peak Output Power

B.2.1. Peak Output Power – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.5

a) Use the following spectrum analyzer settings:

- Span: 6MHz
- RBW: 3MHz
- VBW: 3MHz
- Sweep time: 2.5ms
- Detector function: peak
- Trace: max hold

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power.

Measurement Limit:

Standard	Limits	
FCC Part 15.247 (b)(1)	Bandwidth $\leq$ 1MHz	30dBm (1W)
	Bandwidth $>$ 1MHz	21dBm (125mW)

Measurement Results:

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	10.43	10.20	10.35	P

For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	9.65	9.98	9.74	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.99	9.21	9.86	P

Conclusion: PASS

B.2.2. E.I.R.P.

The radiated E.I.R.P. is listed below:

Antenna gain = -0.3dBi

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	10.13	9.90	10.05	P

For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	9.35	9.68	9.44	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	8.69	8.91	9.56	P

Note: E.I.R.P. are calculated with the antenna gain.

Conclusion: PASS

B.3. Frequency Band Edges – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- Span: 10 MHz
- Resolution Bandwidth: 100 kHz
- Video Bandwidth: 300 kHz
- Sweep Time:Auto
- Detector: Peak
- Trace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

Measurement Result:

For GFSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.1	-61.17	P
	Hopping ON	Fig.2	-65.17	P
78	Hopping OFF	Fig.3	-66.61	P
	Hopping ON	Fig.4	-67.12	P

For $\pi/4$ DQPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.5	-62.95	P
	Hopping ON	Fig.6	-64.09	P
78	Hopping OFF	Fig.7	-65.88	P
	Hopping ON	Fig.8	-67.32	P

For 8DPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.9	-61.99	P
	Hopping ON	Fig.10	-66.83	P

78	Hopping OFF	Fig.11	-66.81	P
	Hopping ON	Fig.12	-67.41	P

Conclusion: PASS

Test graphs as below

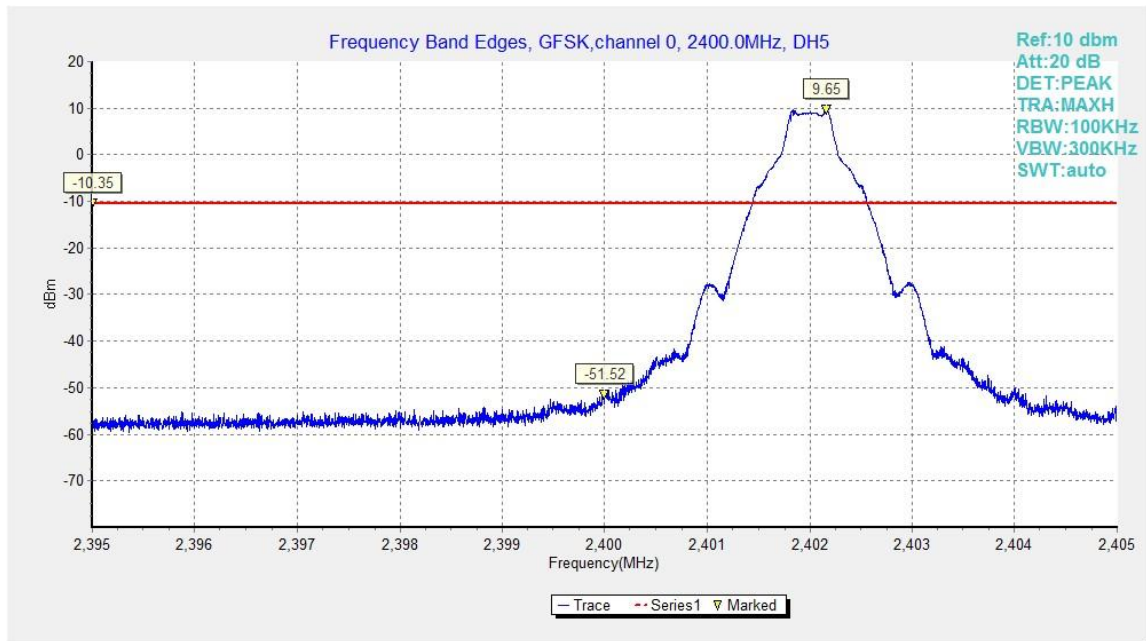


Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

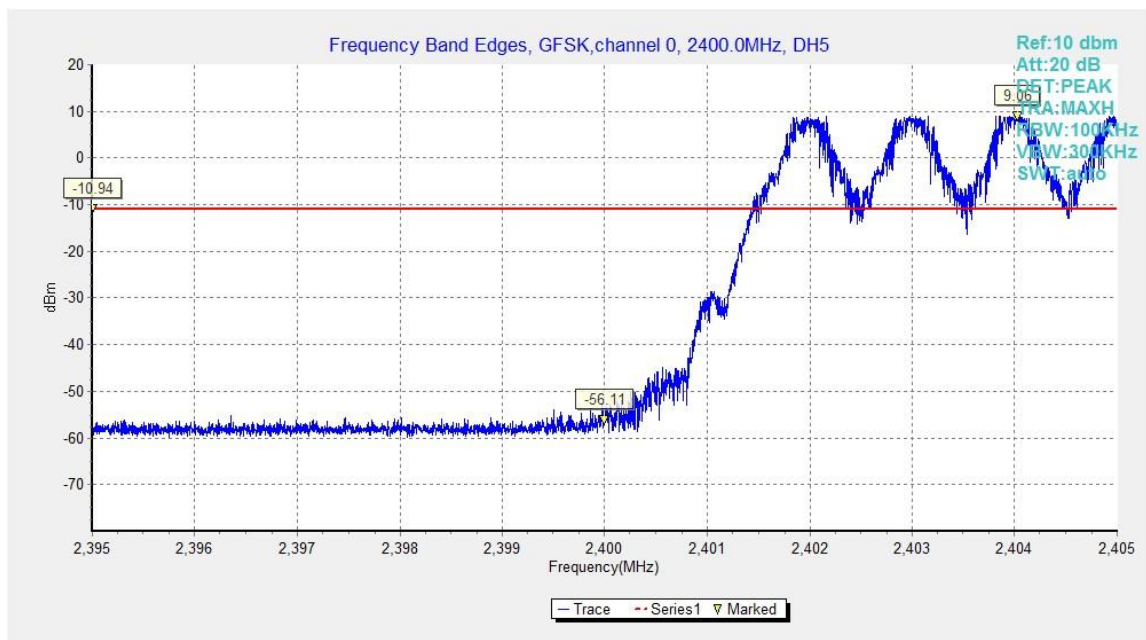


Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

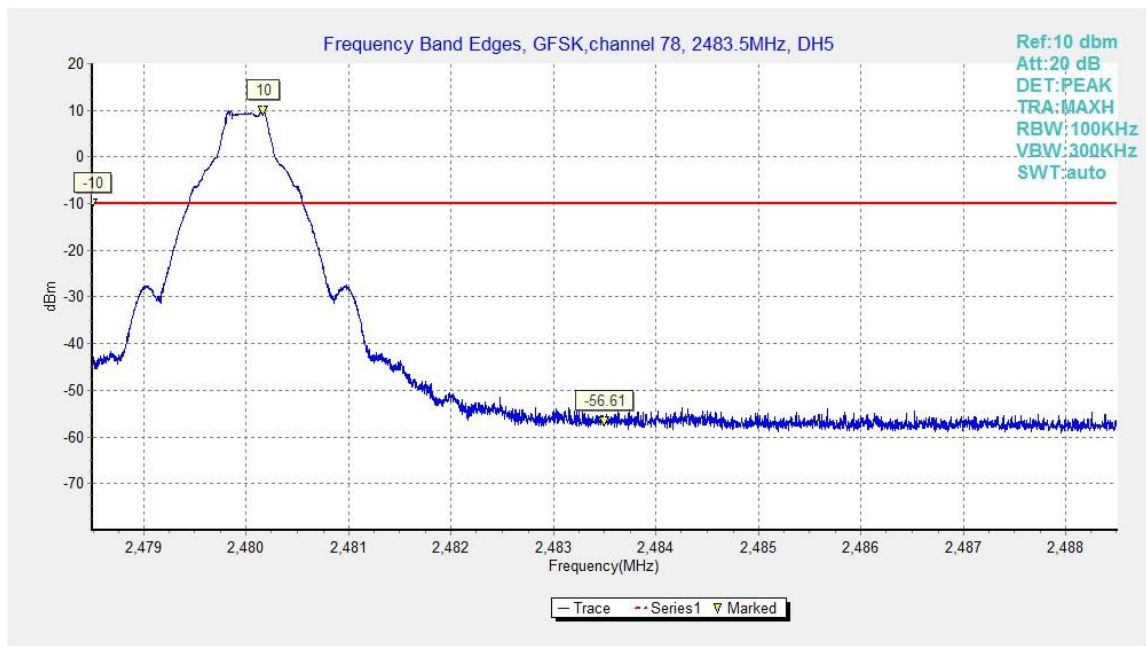


Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

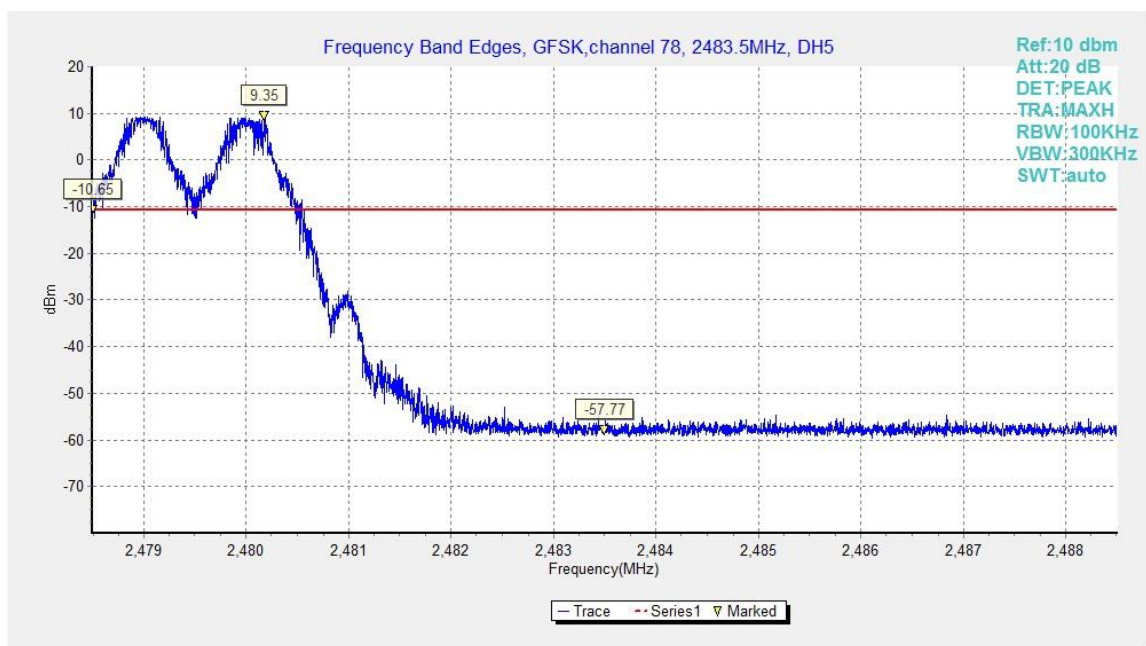


Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On

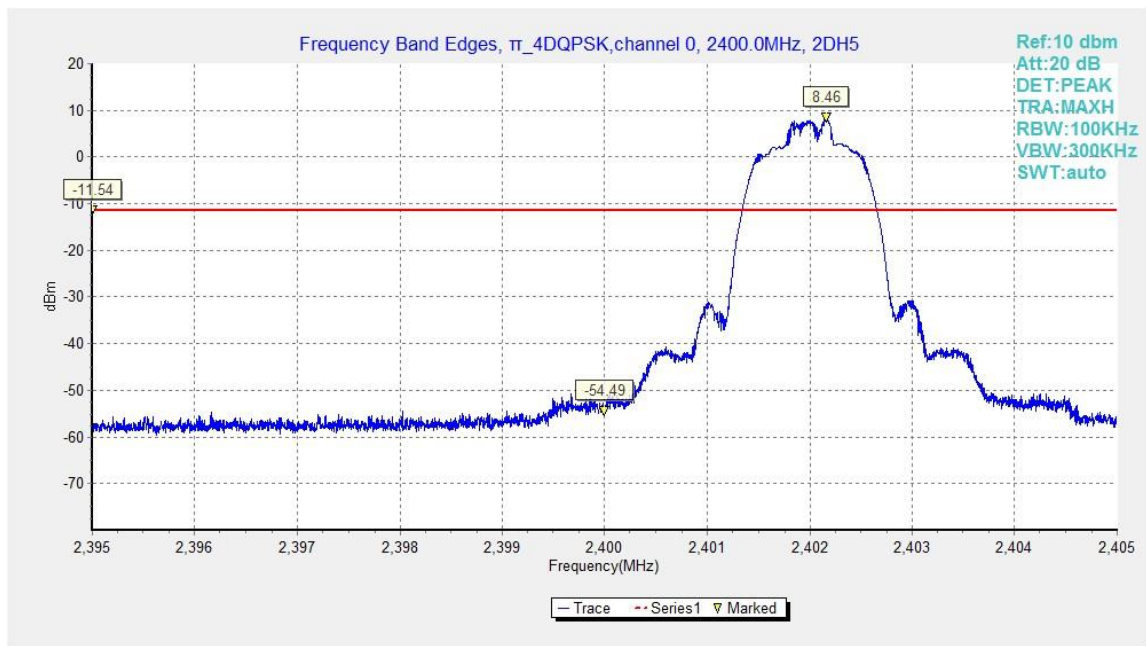


Fig.5. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping Off

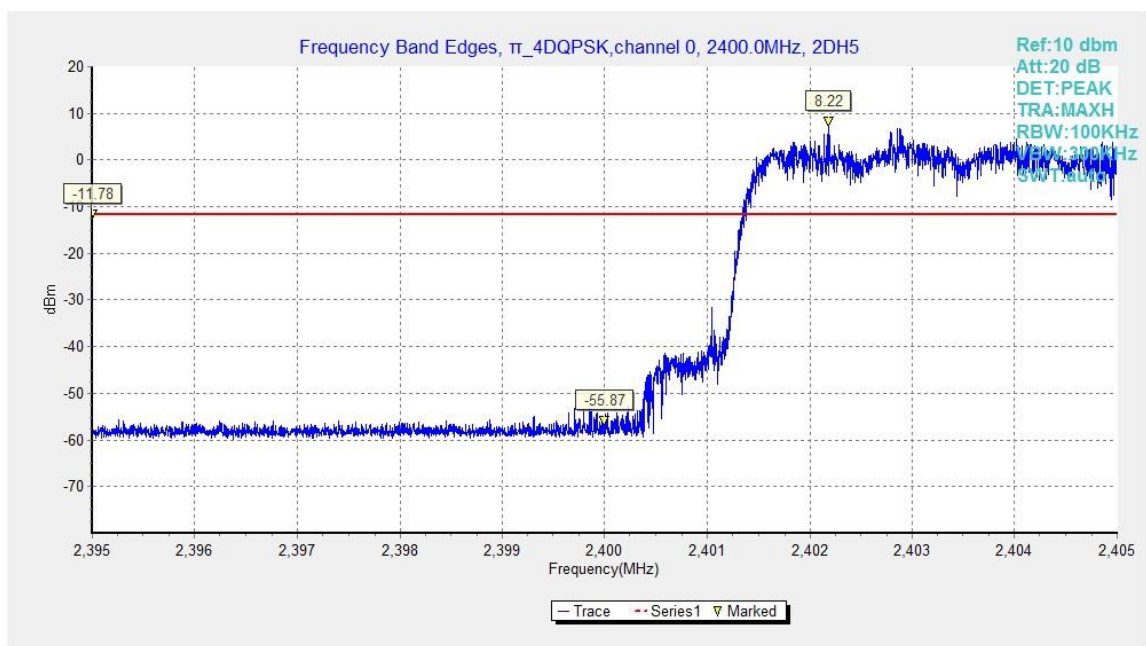


Fig.6. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping On

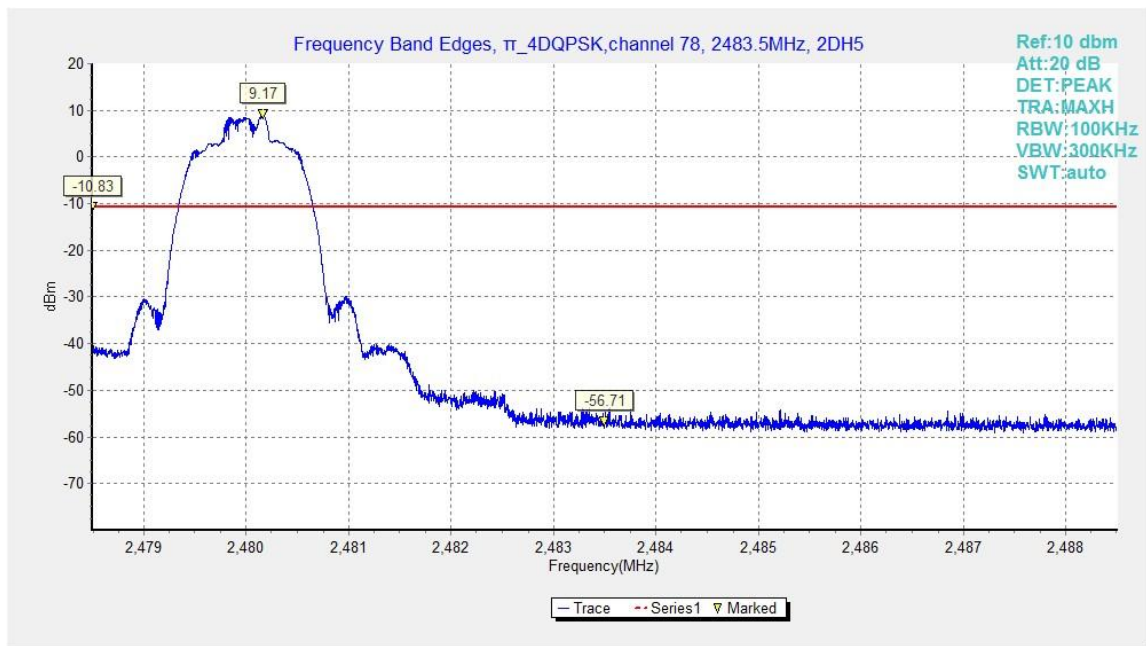


Fig.7. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping Off

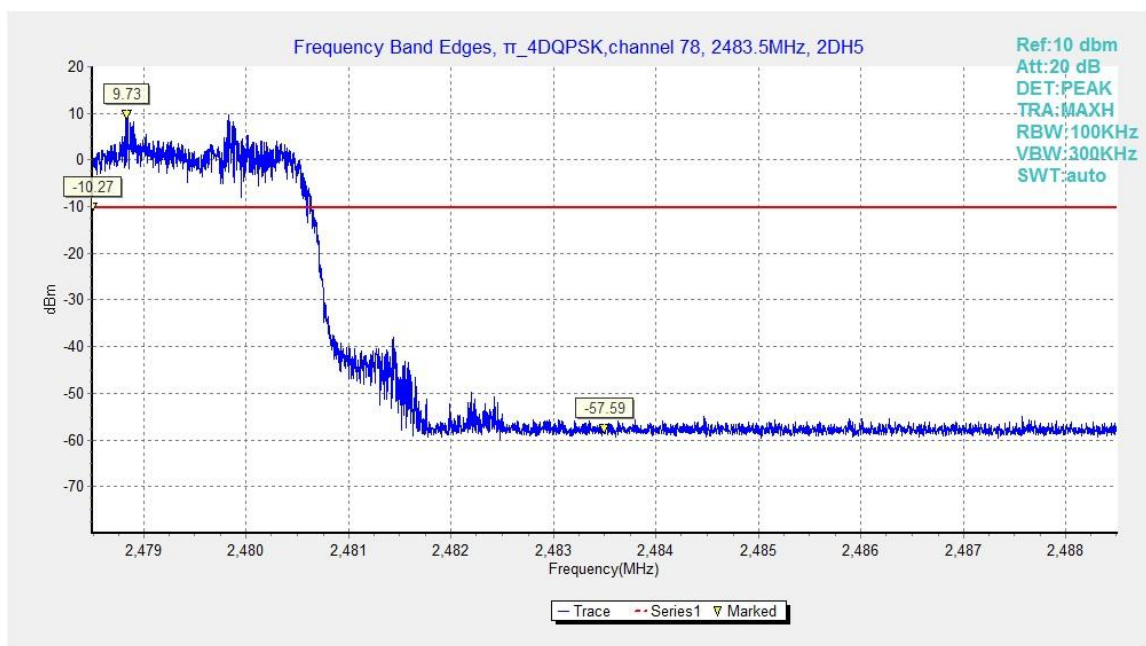


Fig.8. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping On

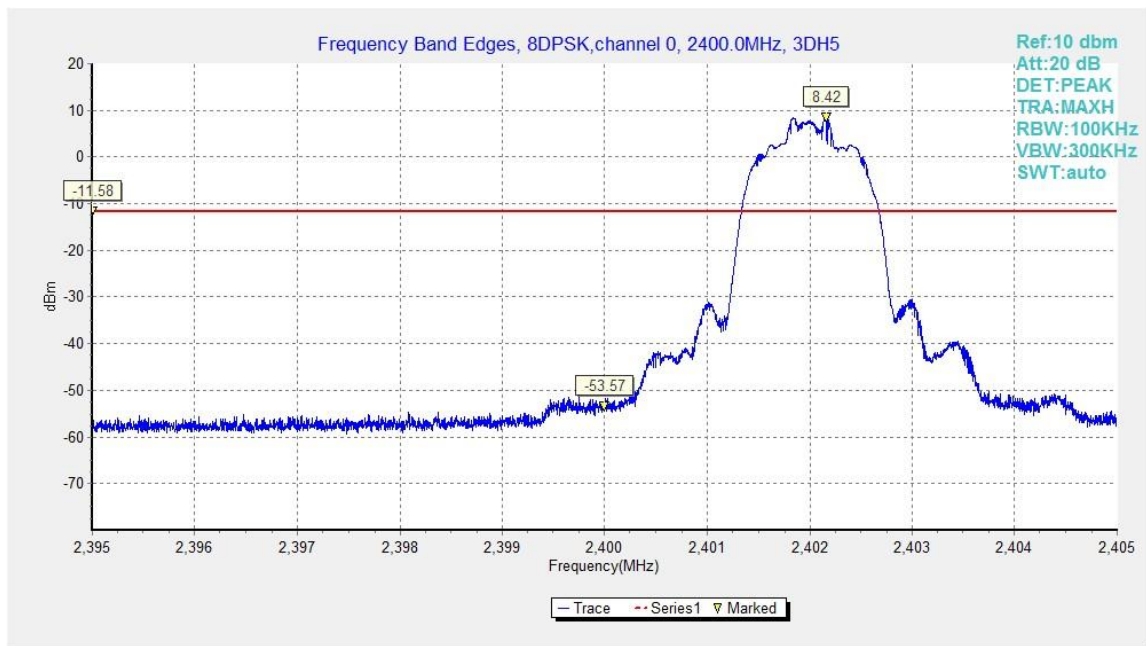


Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

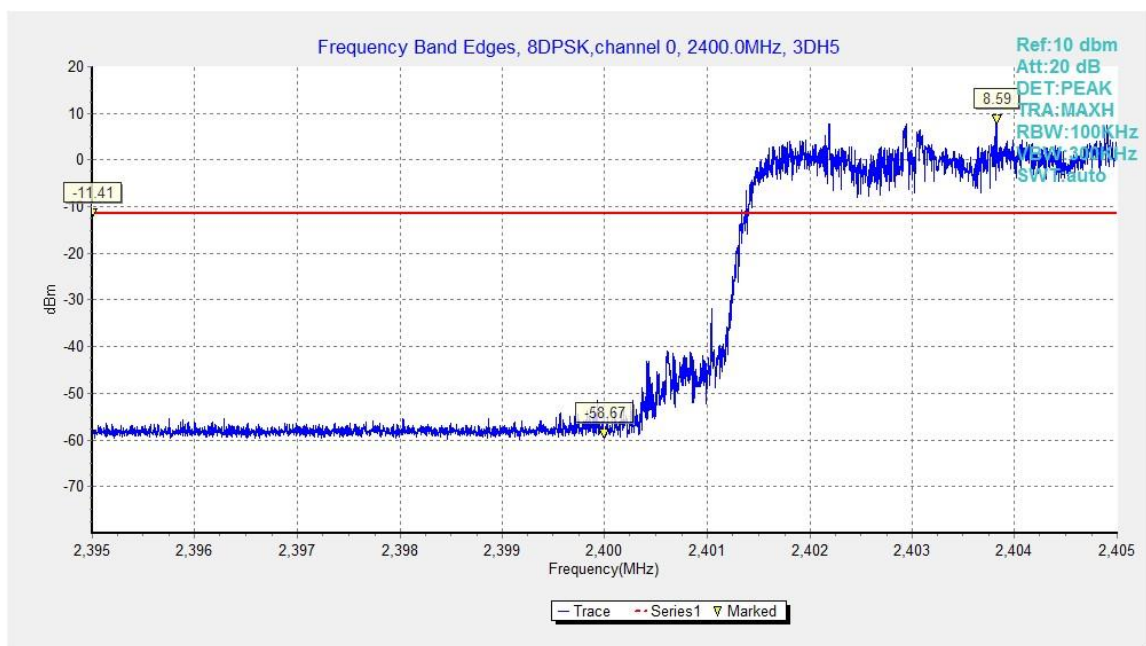


Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

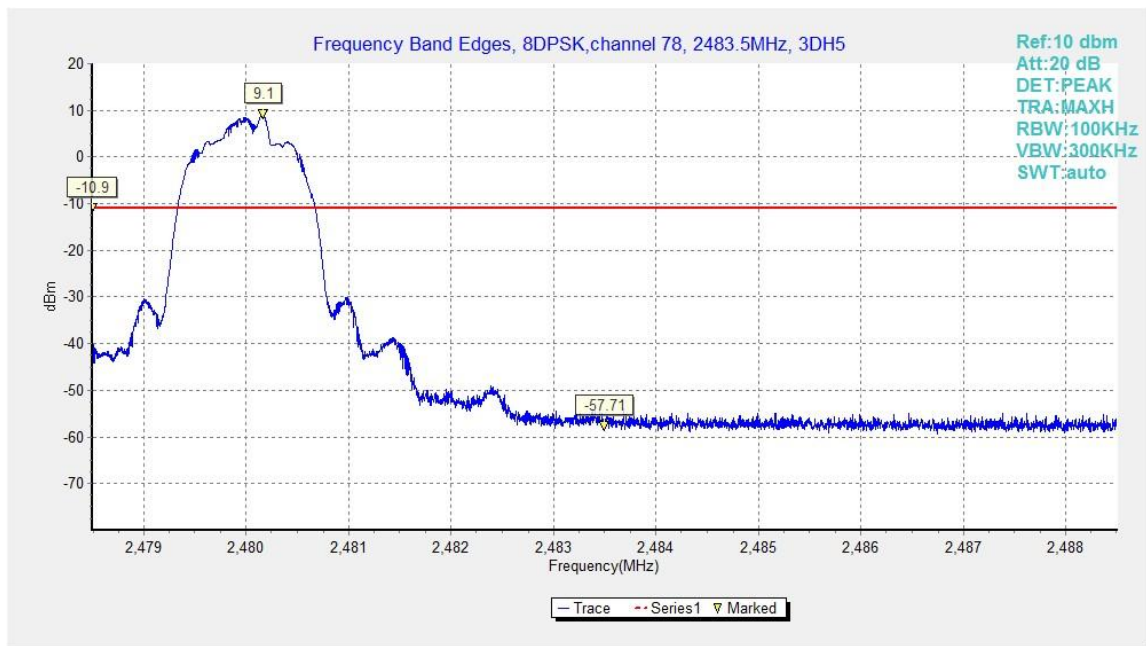


Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

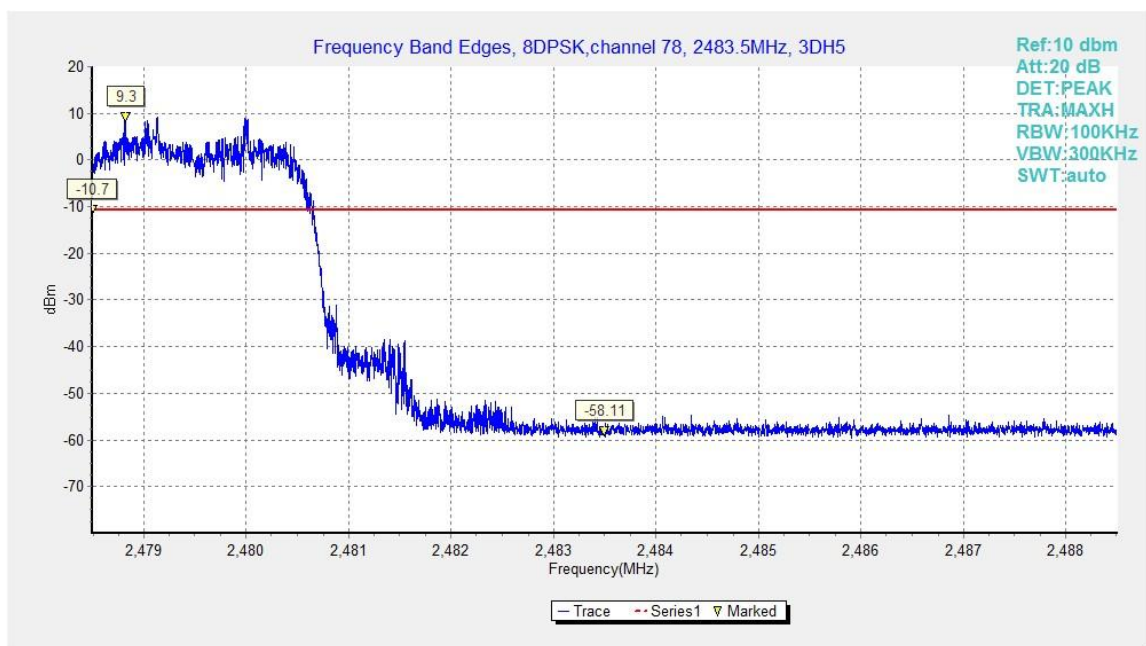


Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On

B.4. Transmitter Spurious Emission - Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.8

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.13	P

2402 MHz	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3 GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P
Ch 39 2441 MHz	Center Frequency	Fig.18	P
	30 MHz ~ 1 GHz	Fig.19	P
	1 GHz ~ 3 GHz	Fig.20	P
	3 GHz ~ 10 GHz	Fig.21	P
	10 GHz ~ 26 GHz	Fig.22	P
Ch 78 2480 MHz	Center Frequency	Fig.23	P
	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 10 GHz	Fig.26	P
	10 GHz ~ 26 GHz	Fig.27	P

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.28	P
	30 MHz ~ 1 GHz	Fig.29	P
	1 GHz ~ 3 GHz	Fig.30	P
	3 GHz ~ 10 GHz	Fig.31	P
	10 GHz ~ 26 GHz	Fig.32	P
Ch 39 2441 MHz	Center Frequency	Fig.33	P
	30 MHz ~ 1 GHz	Fig.34	P
	1 GHz ~ 3 GHz	Fig.35	P
	3 GHz ~ 10 GHz	Fig.36	P
	10 GHz ~ 26 GHz	Fig.37	P
Ch 78 2480 MHz	Center Frequency	Fig.38	P
	30 MHz ~ 1 GHz	Fig.39	P
	1 GHz ~ 3 GHz	Fig.40	P
	3 GHz ~ 10 GHz	Fig.41	P
	10 GHz ~ 26 GHz	Fig.42	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	P
	30 MHz ~ 1 GHz	Fig.44	P
	1 GHz ~ 3 GHz	Fig.45	P
	3 GHz ~ 10 GHz	Fig.46	P
	10 GHz ~ 26 GHz	Fig.47	P

Ch 39 2441 MHz	Center Frequency	Fig.48	P
	30 MHz ~ 1 GHz	Fig.49	P
	1 GHz ~ 3 GHz	Fig.50	P
	3 GHz ~ 10 GHz	Fig.51	P
	10 GHz ~ 26 GHz	Fig.52	P
Ch 78 2480 MHz	Center Frequency	Fig.53	P
	30 MHz ~ 1 GHz	Fig.54	P
	1 GHz ~ 3 GHz	Fig.55	P
	3 GHz ~ 10 GHz	Fig.56	P
	10 GHz ~ 26 GHz	Fig.57	P

Conclusion: PASS

Test graphs as below

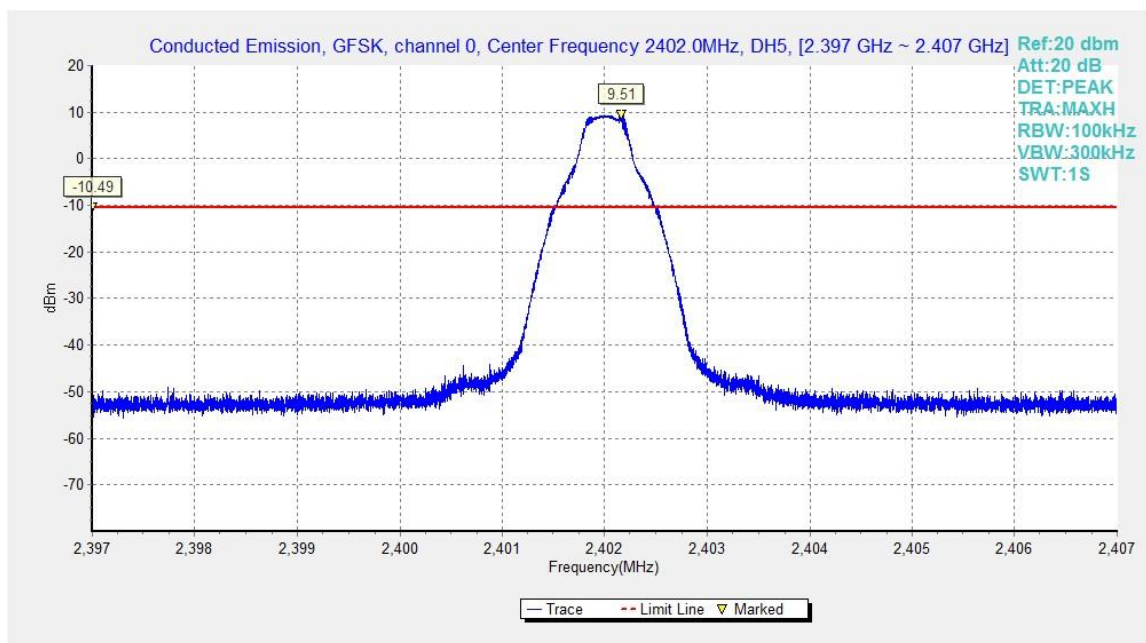


Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz

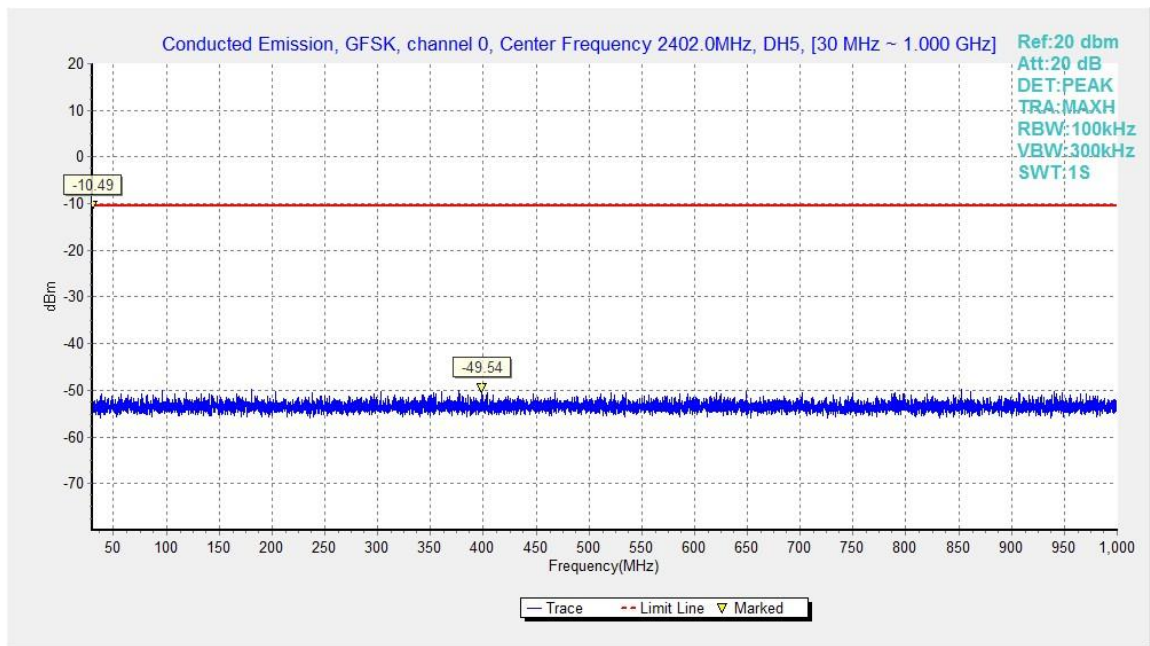


Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

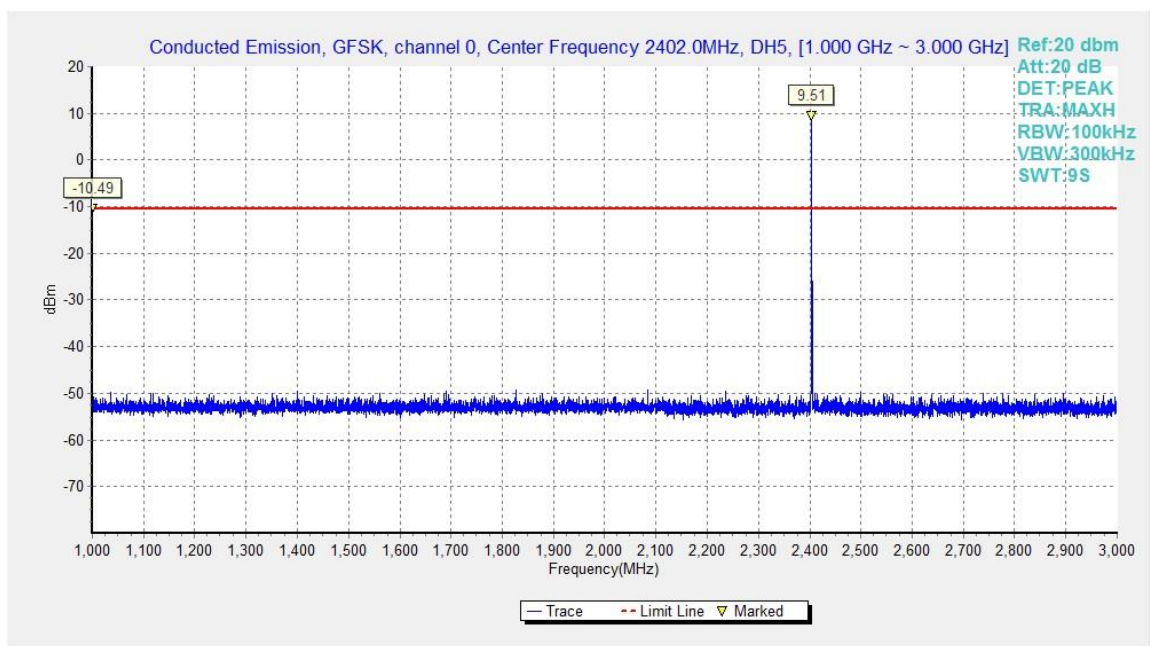


Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

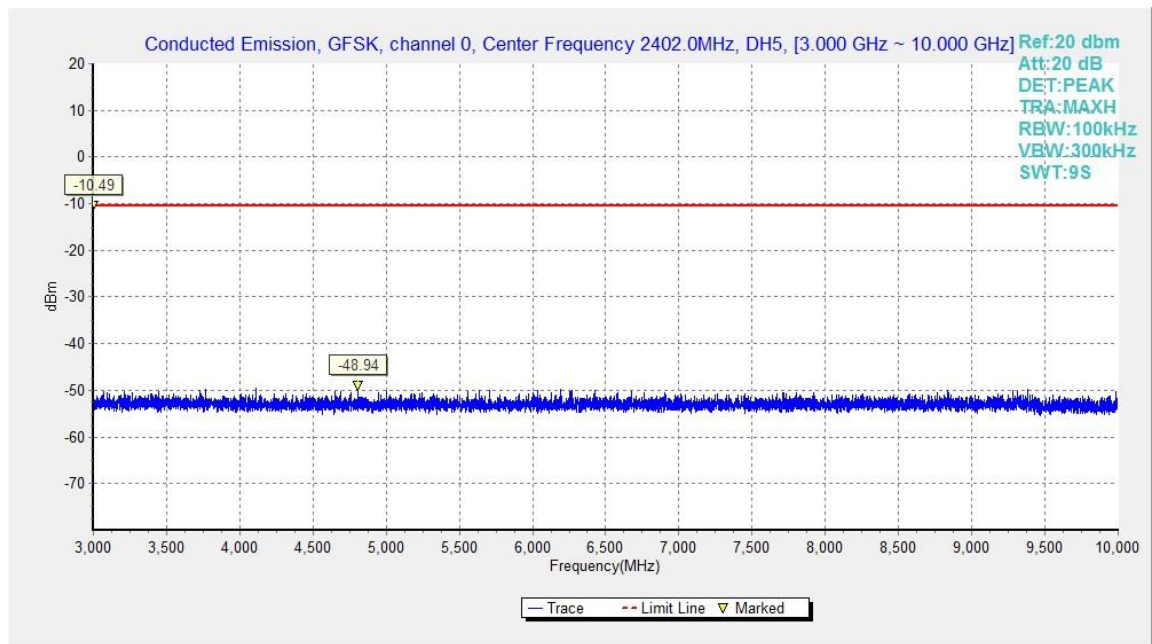


Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

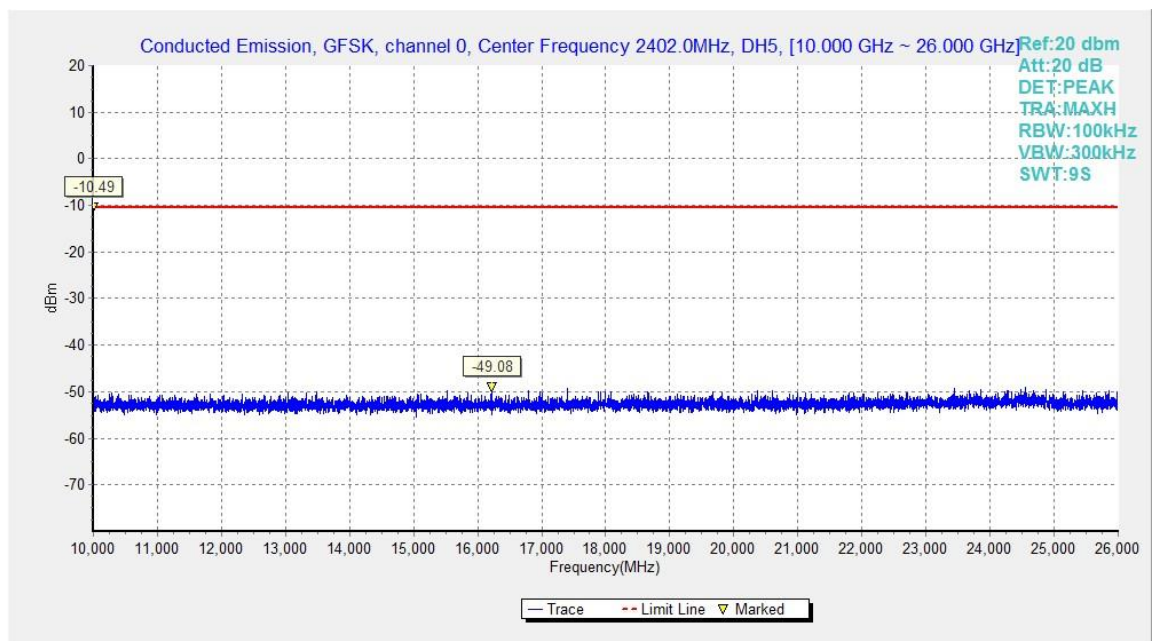


Fig.17. Conducted spurious emission: GFSK, Channel 0, 10GHz - 26GHz

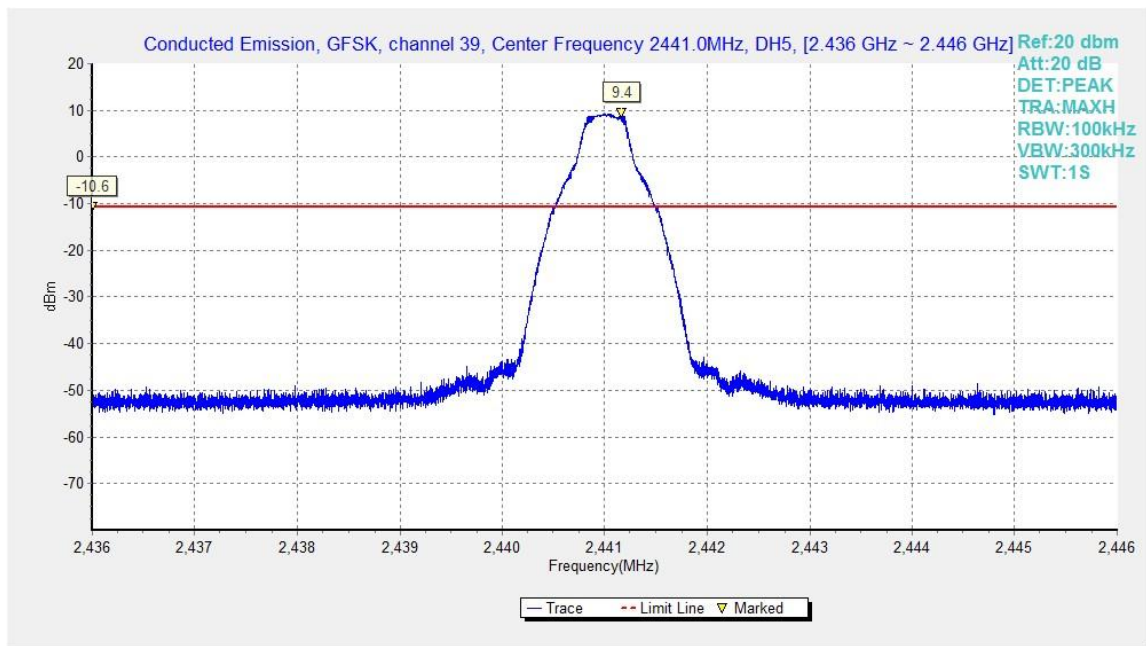


Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

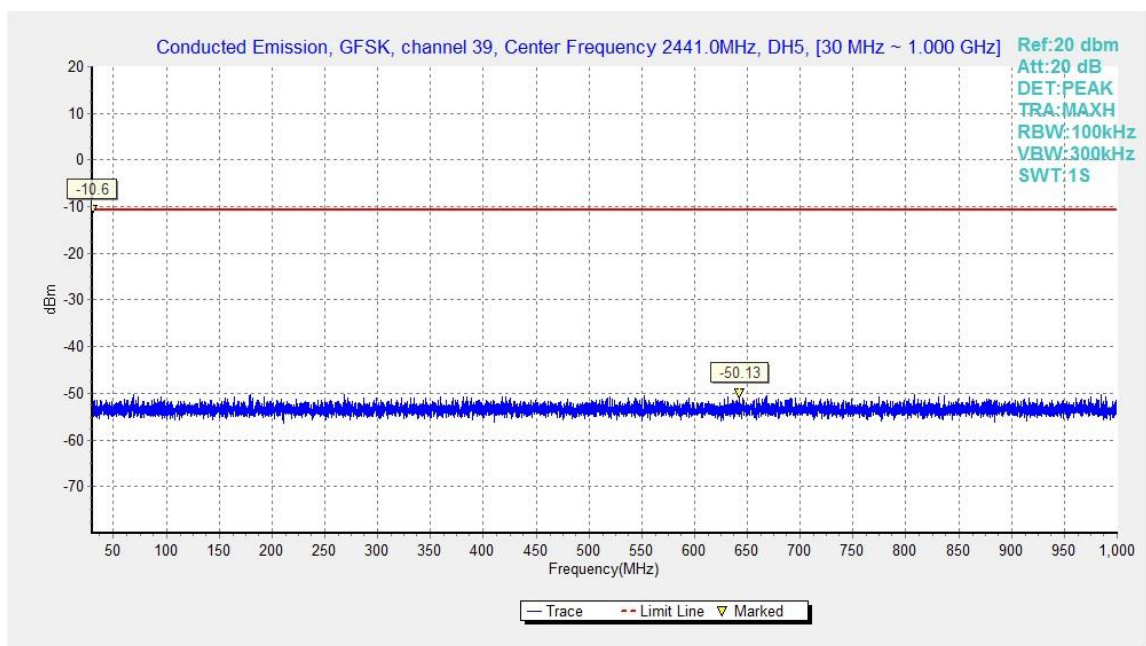


Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

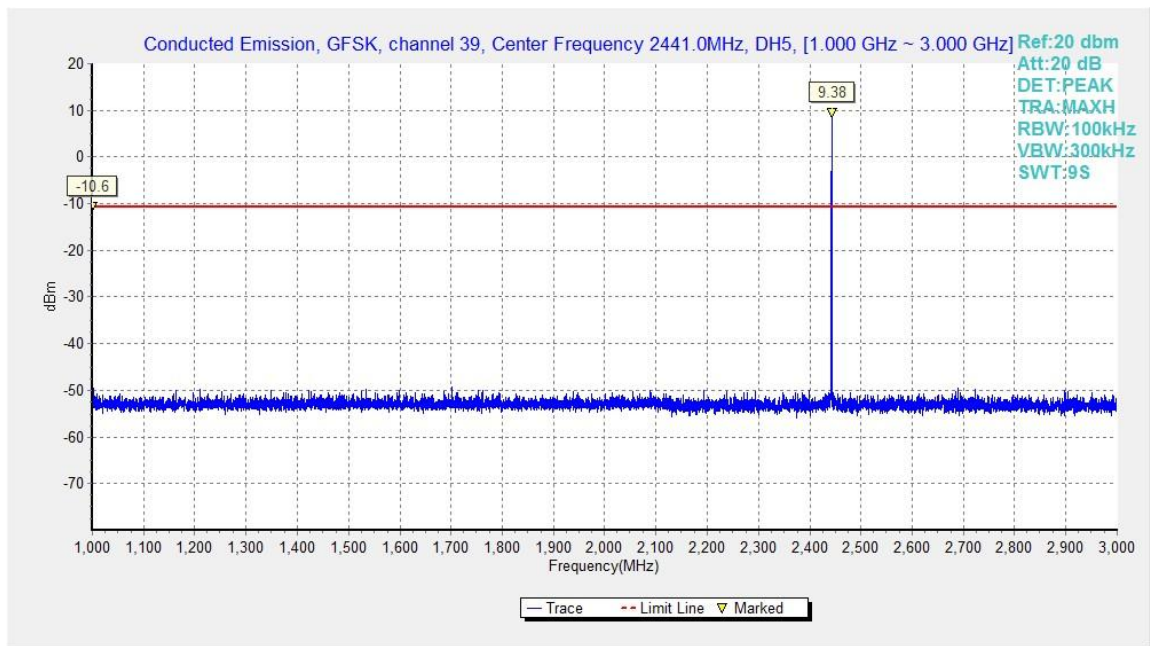


Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

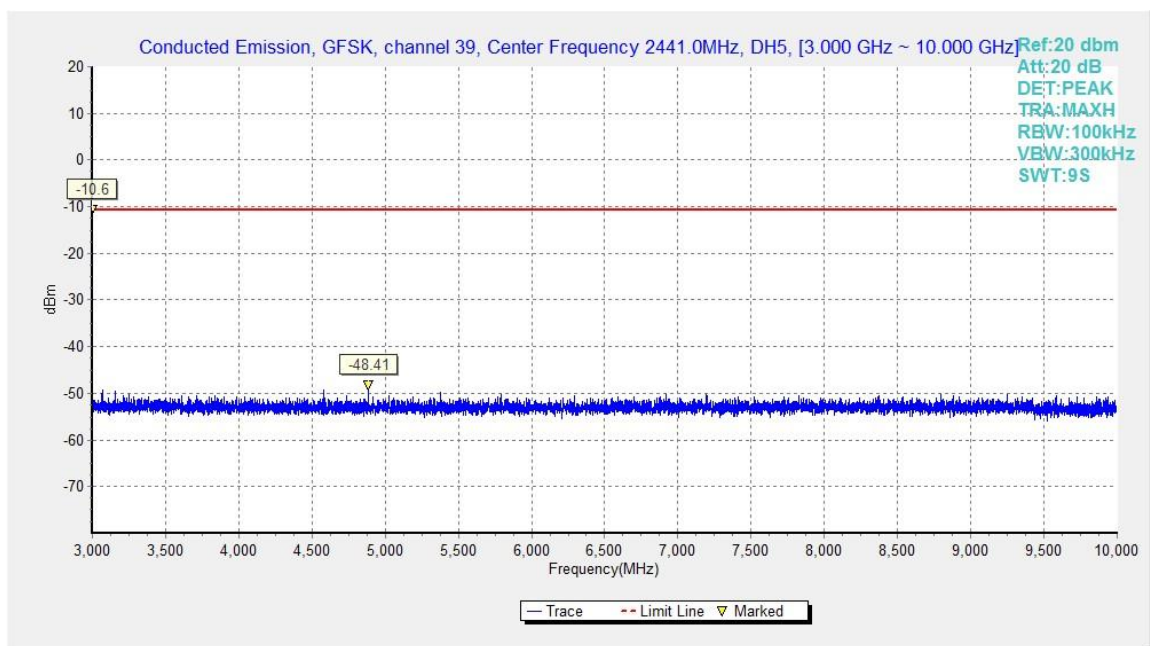


Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

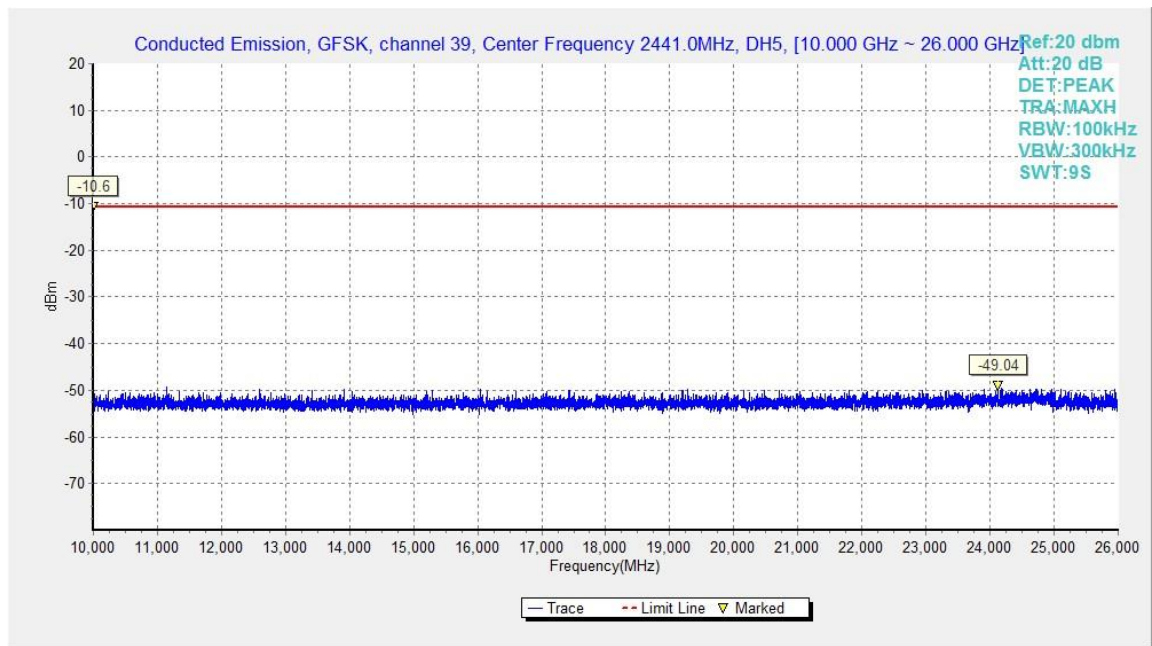


Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

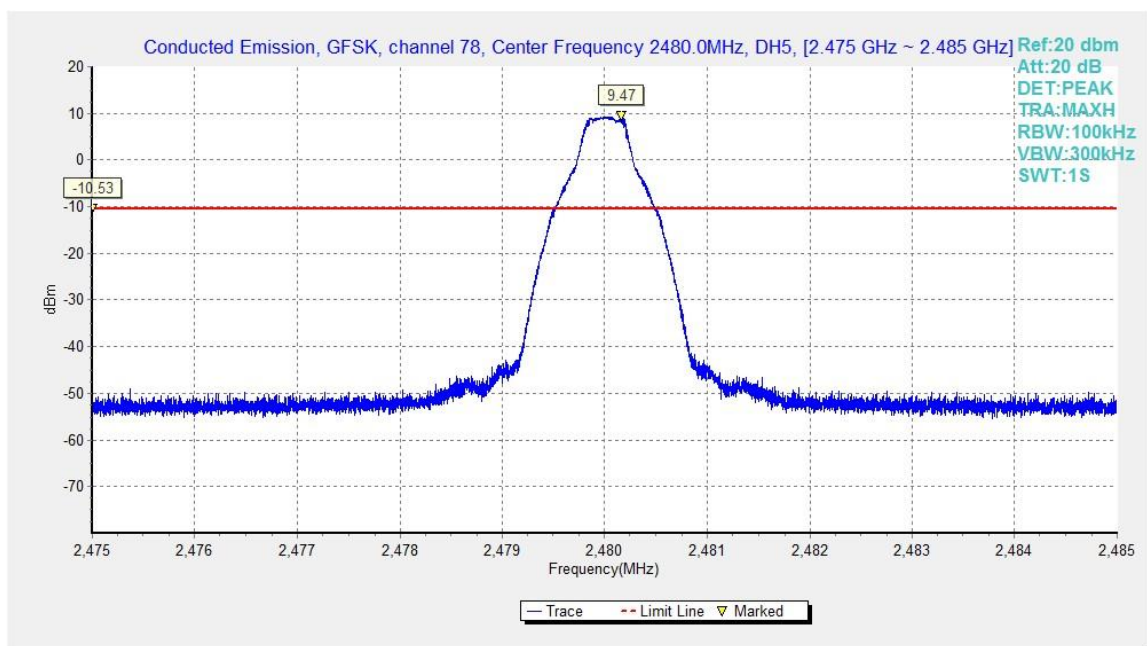


Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz

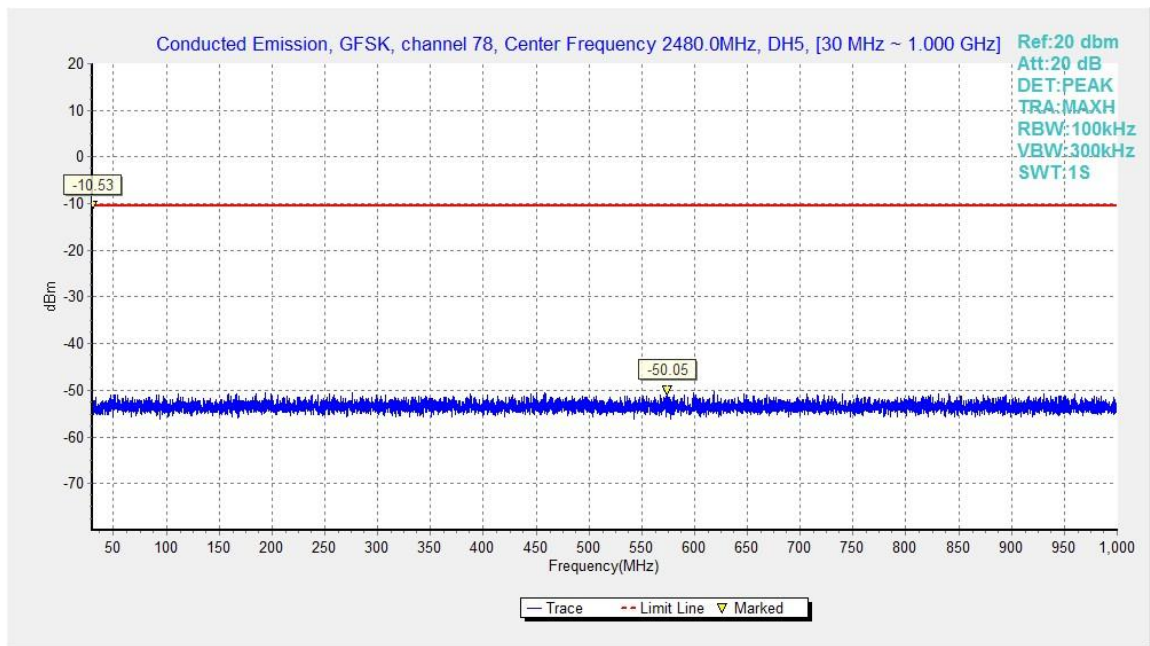


Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

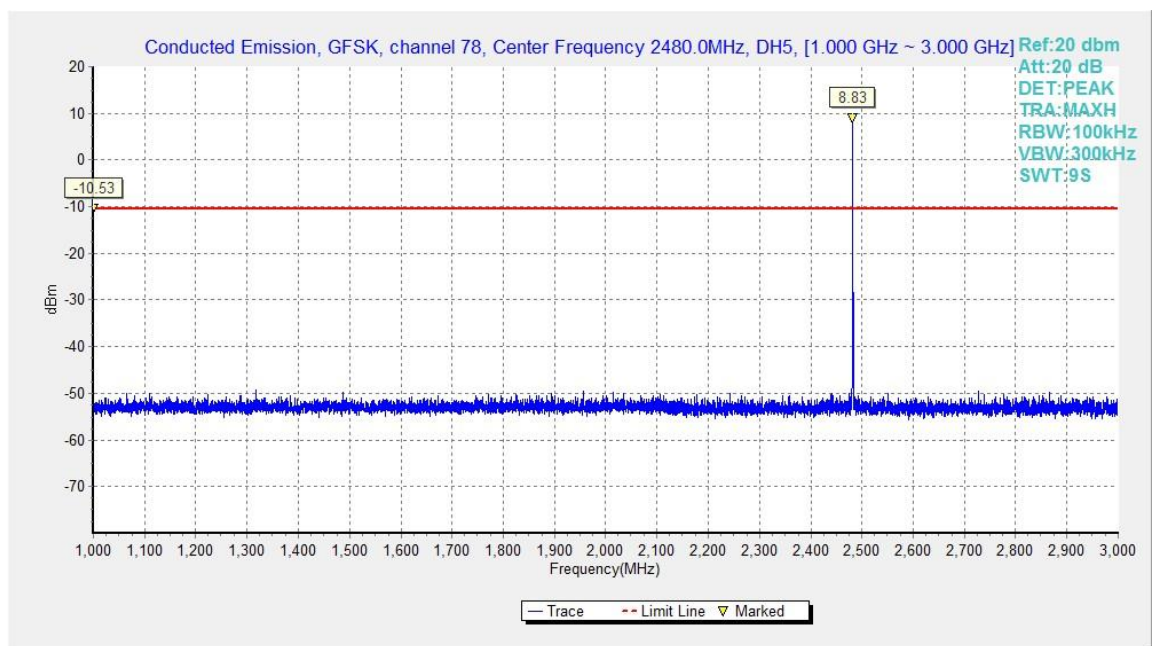


Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

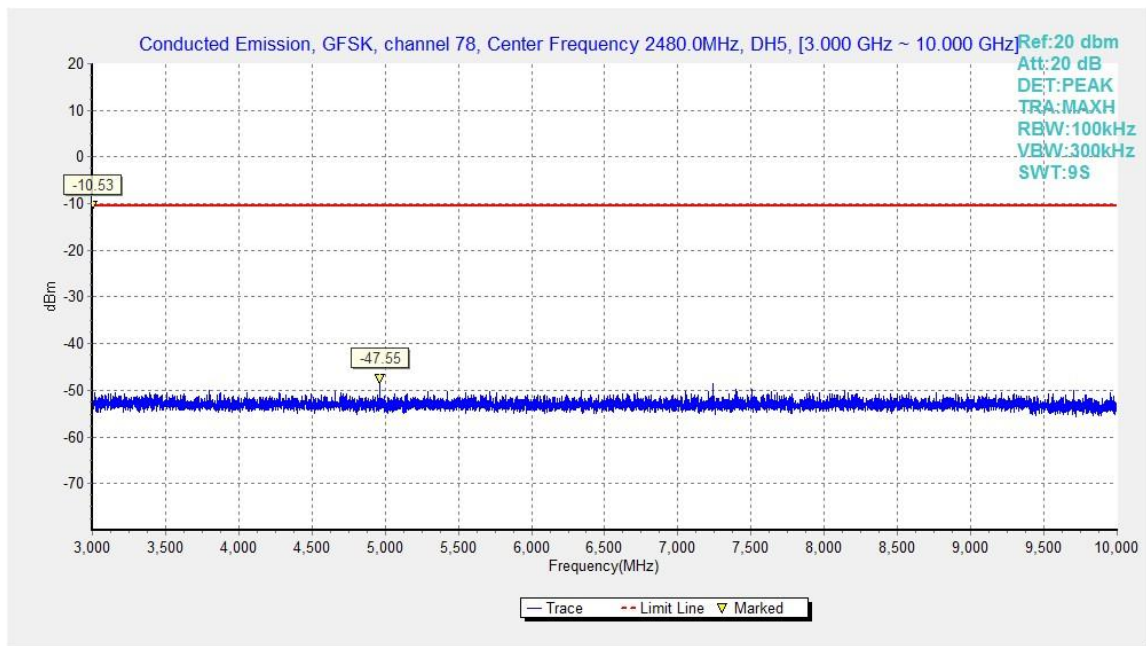


Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

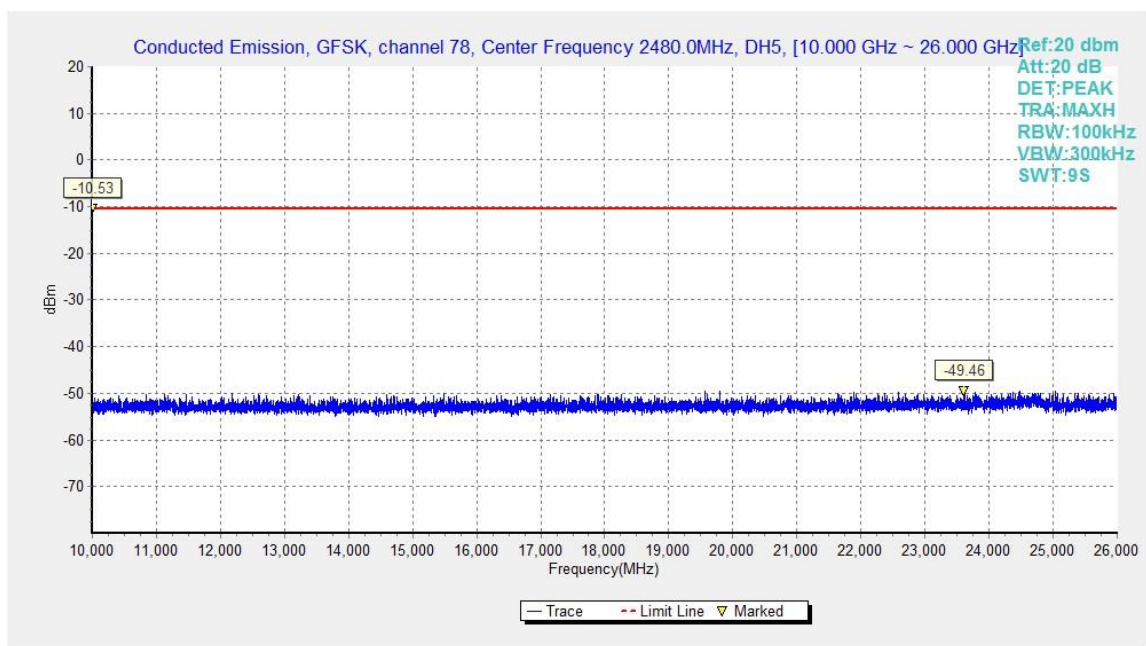


Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz

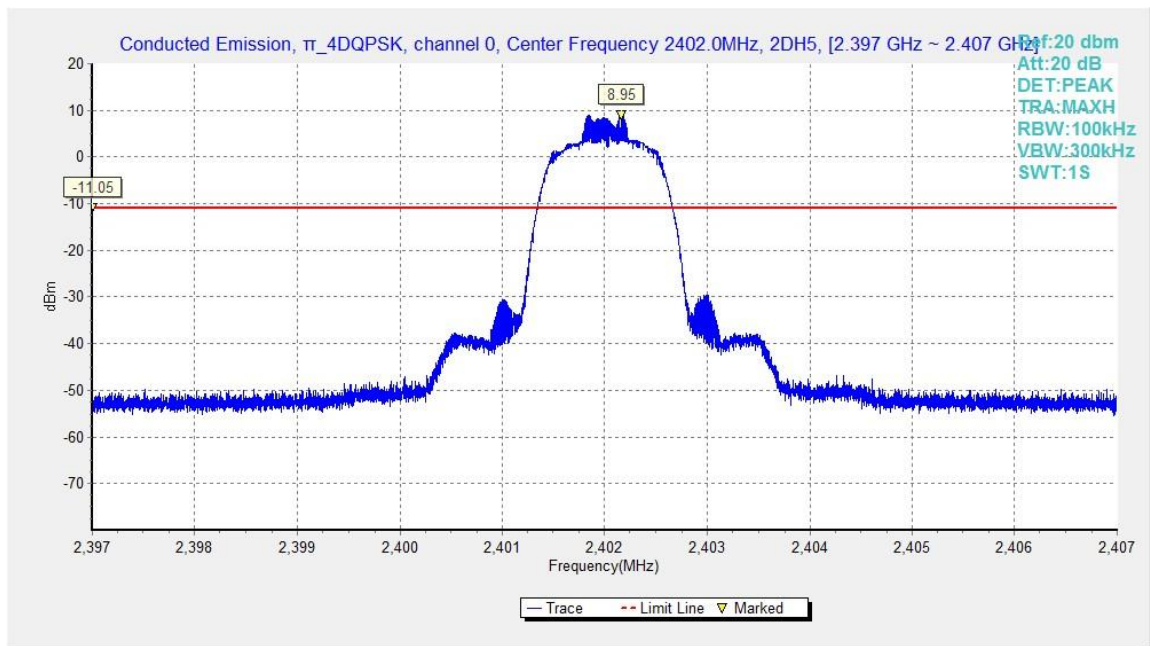


Fig.28. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 2402MHz

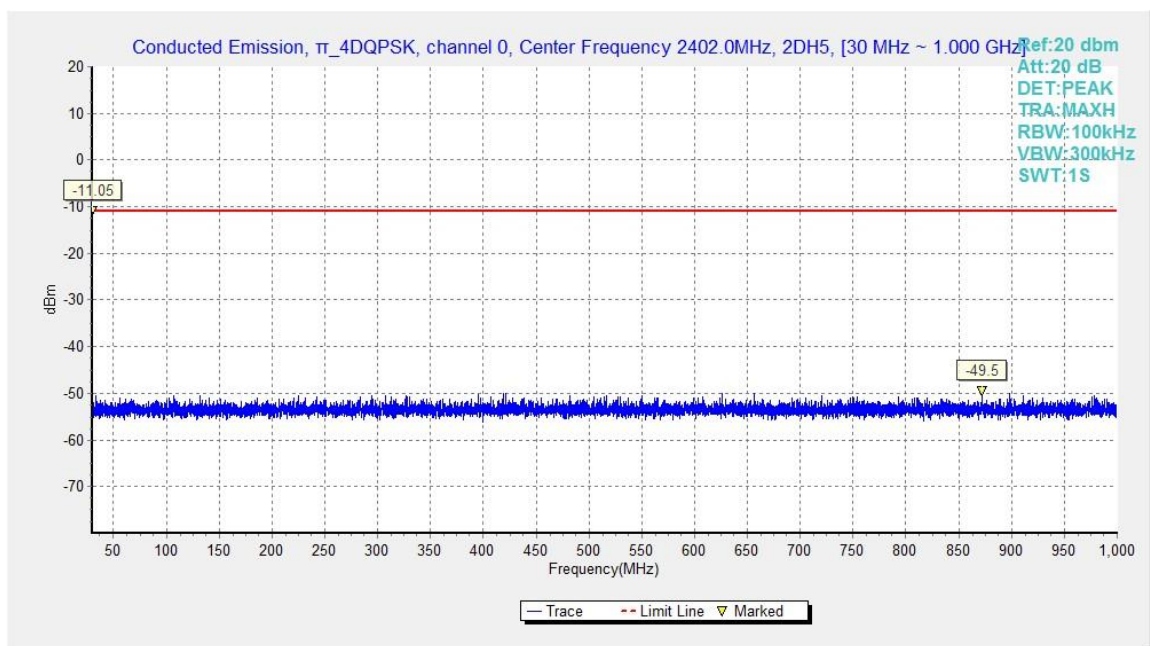


Fig.29. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 30MHz - 1GHz

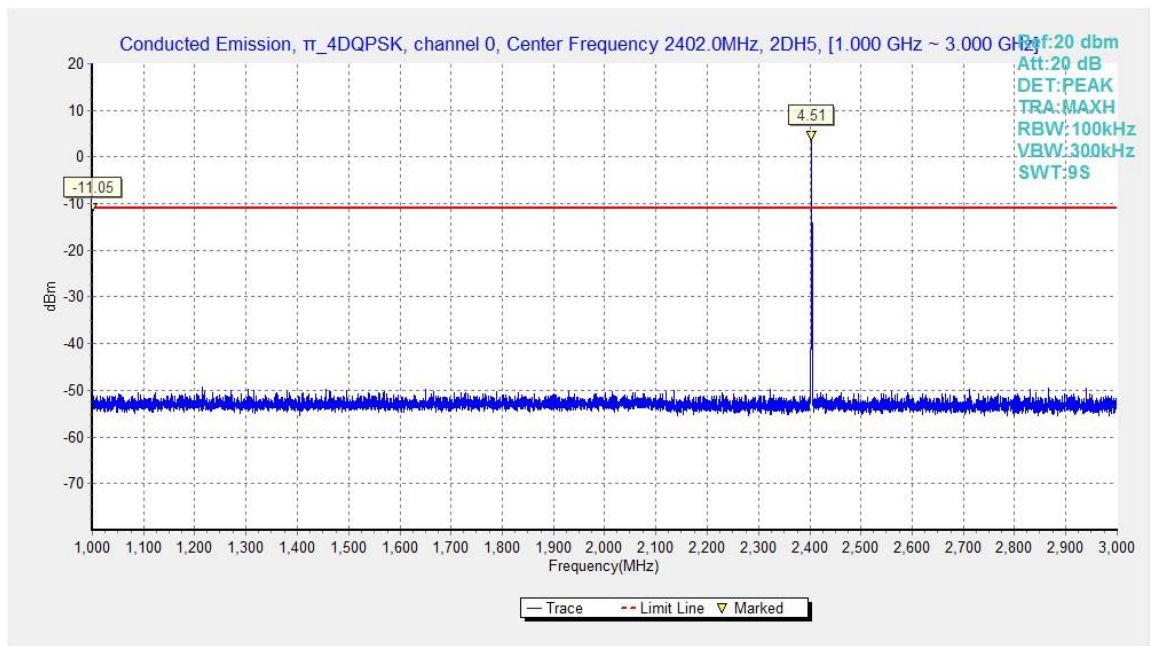


Fig.30. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 1GHz - 3GHz

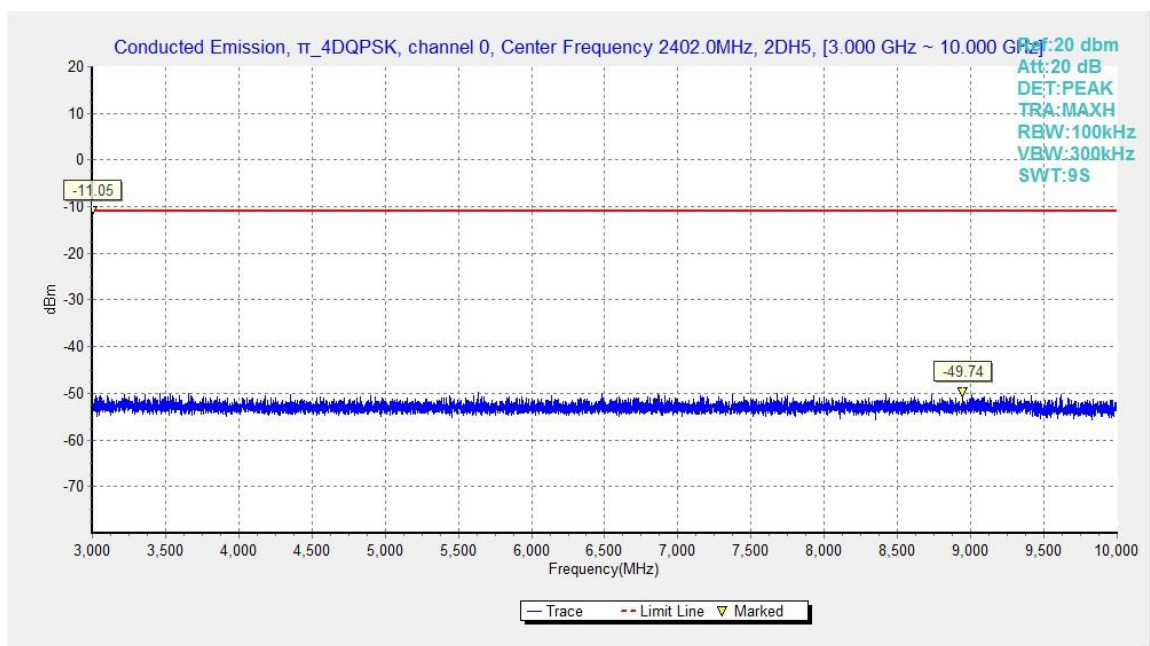


Fig.31. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 3GHz - 10GHz

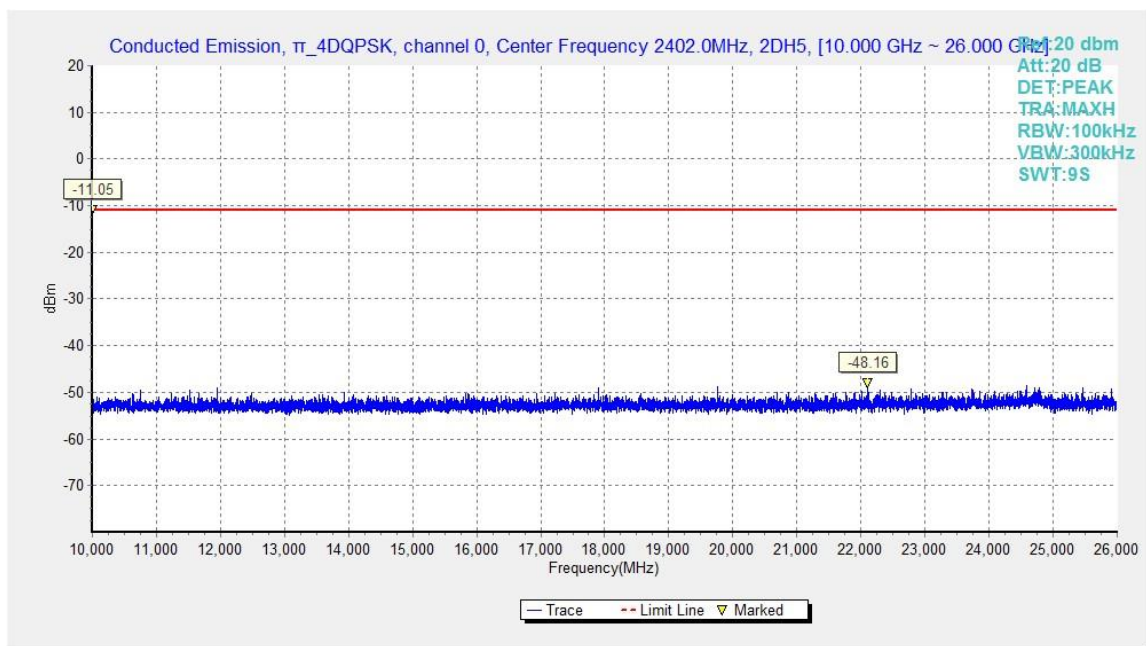


Fig.32. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 10GHz - 26GHz

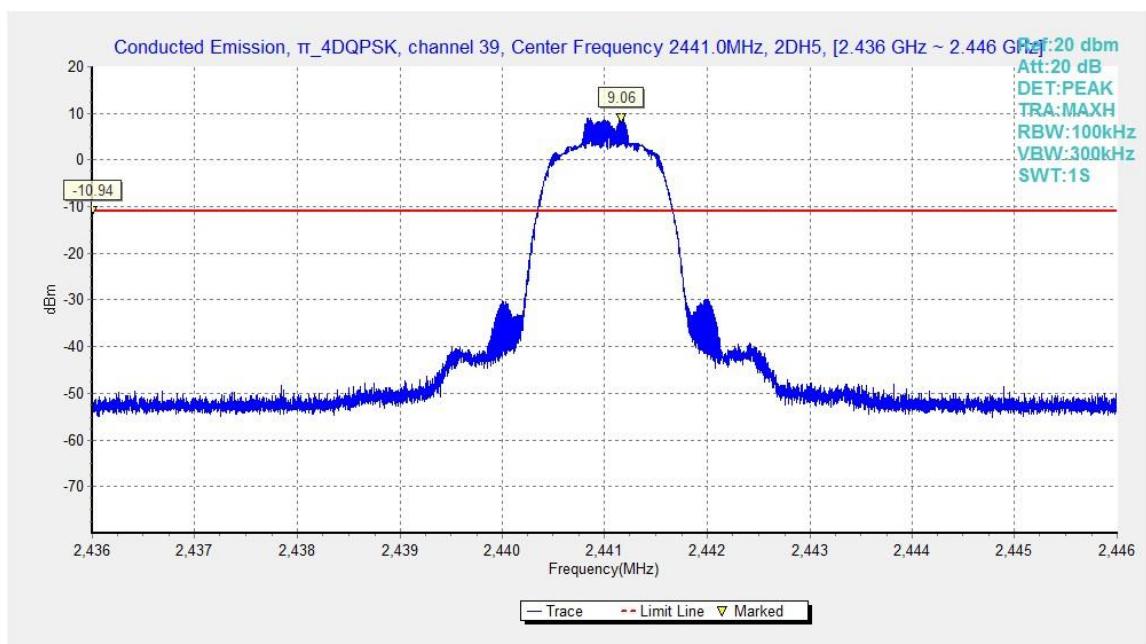


Fig.33. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 2441MHz

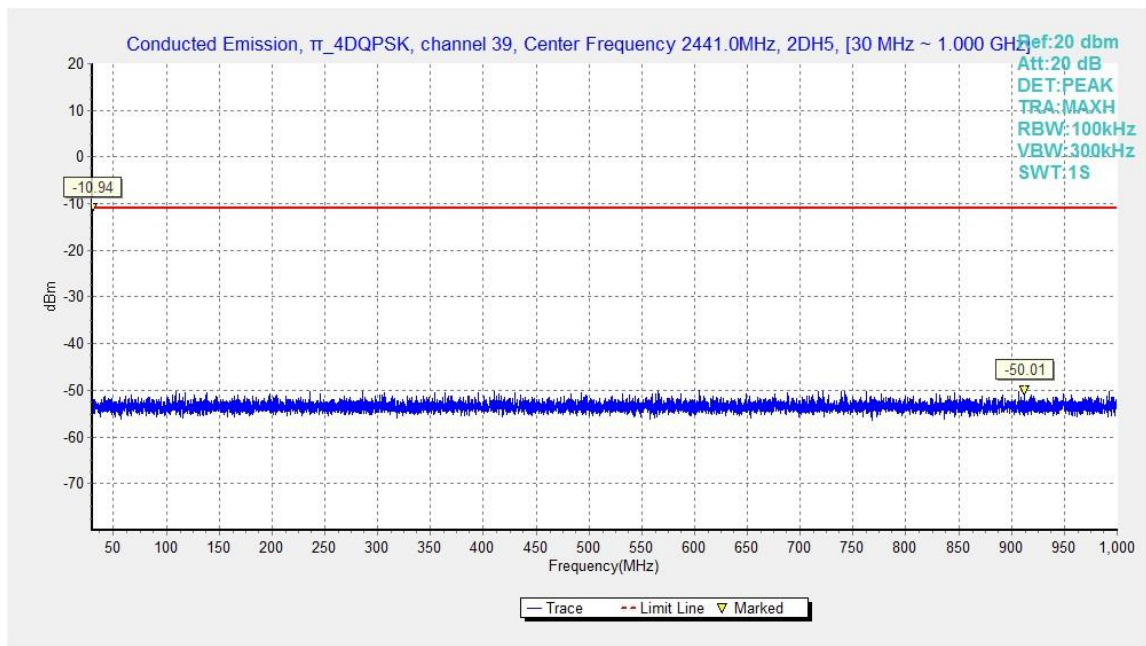


Fig.34. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 30MHz - 1GHz

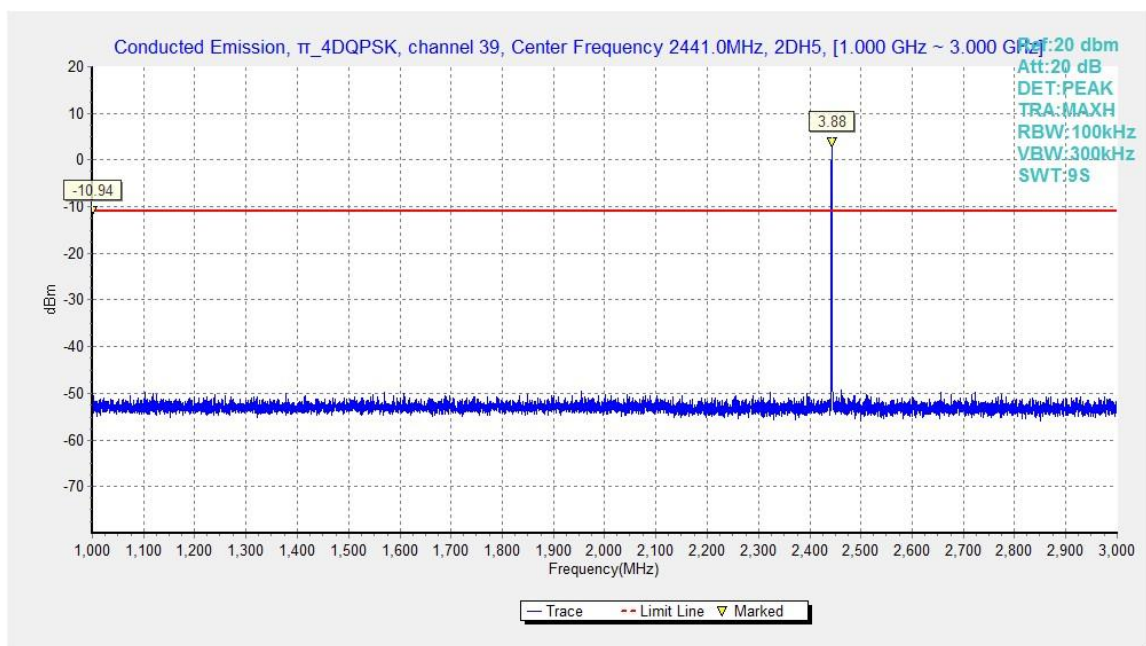


Fig.35. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 1GHz - 3GHz

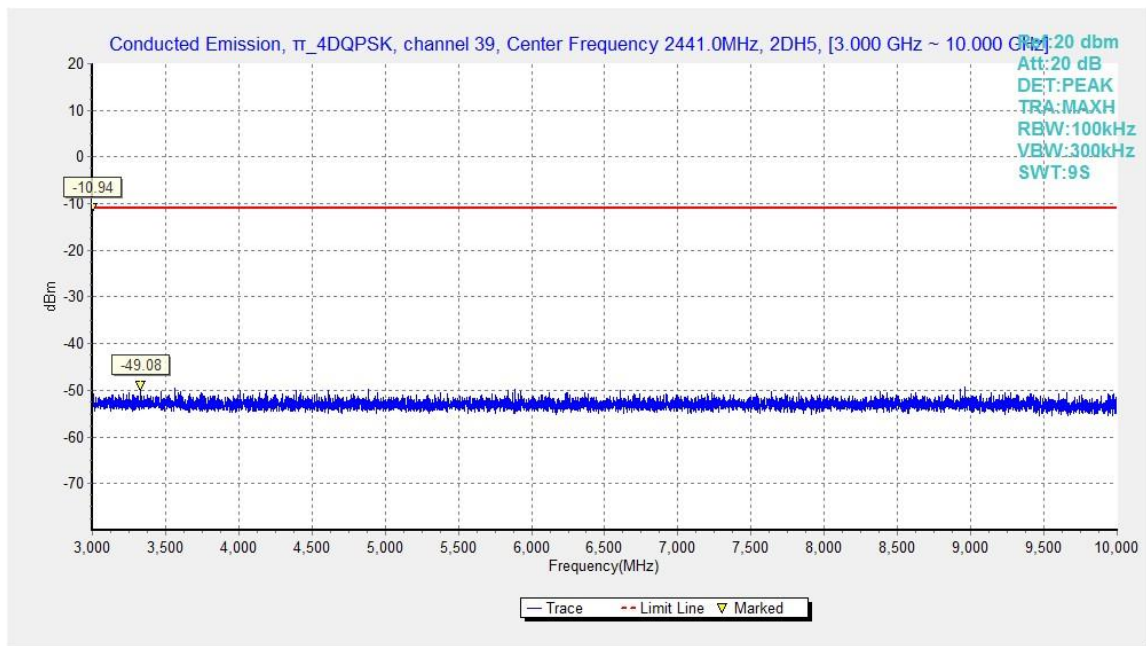


Fig.36. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 3GHz - 10GHz

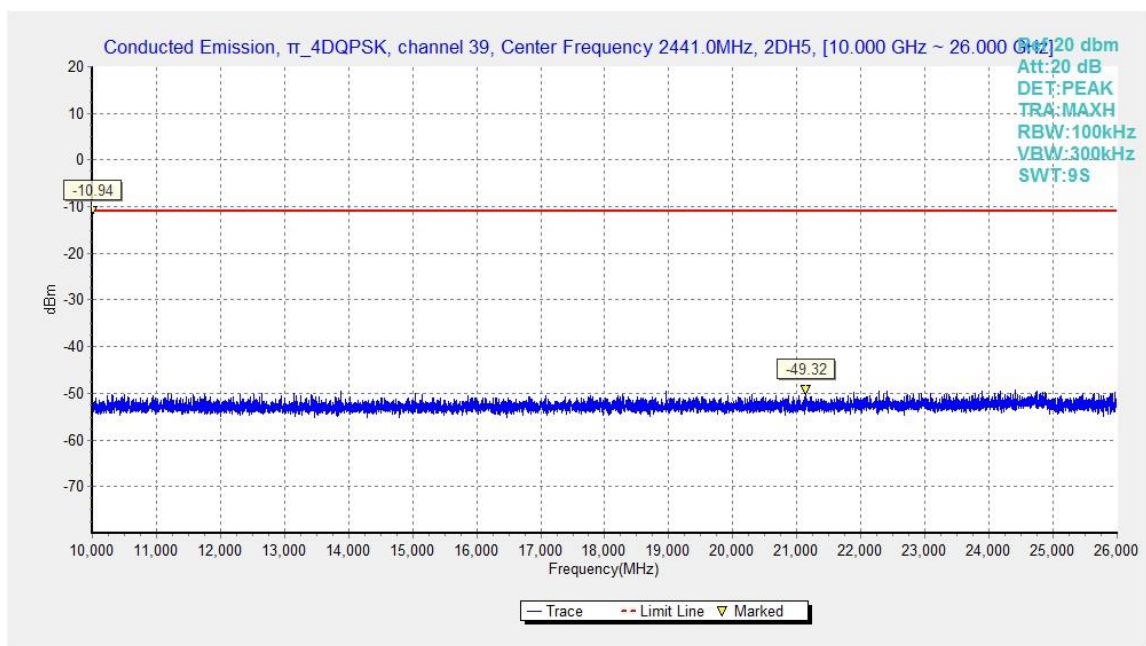


Fig.37. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 10GHz – 26GHz

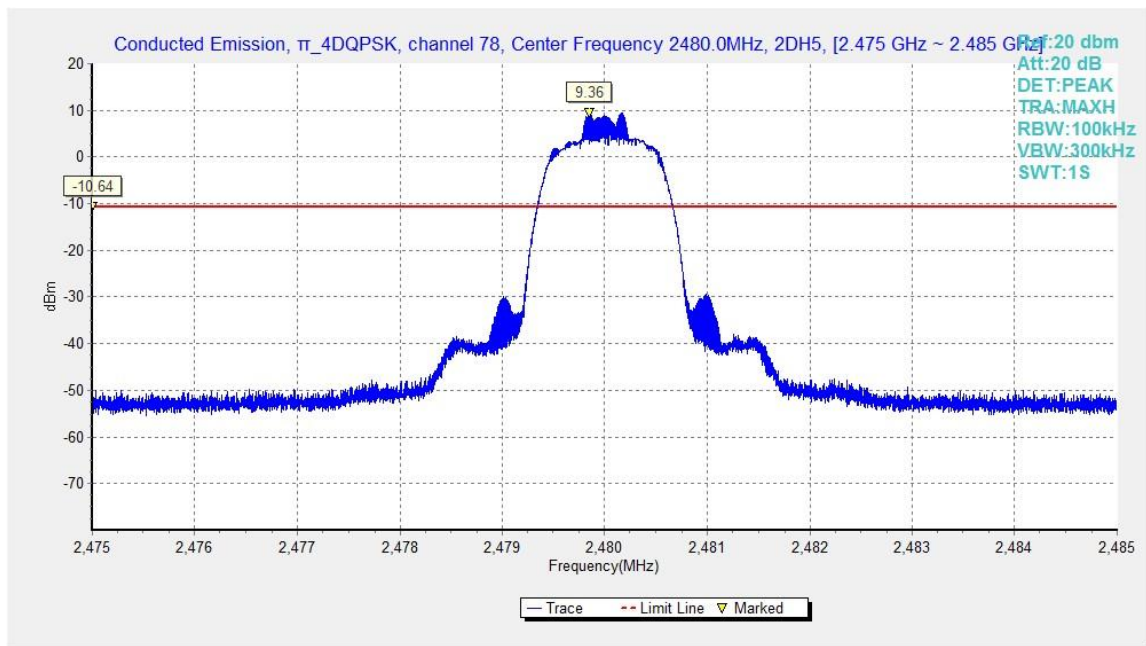


Fig.38. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 2480MHz

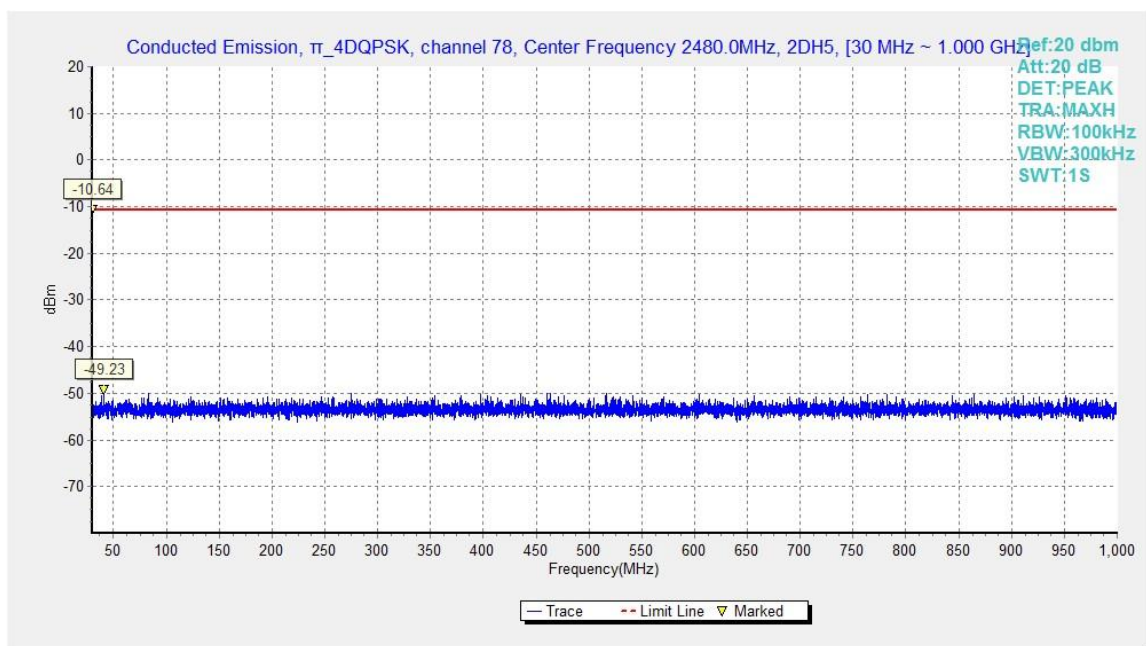


Fig.39. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 30MHz - 1GHz

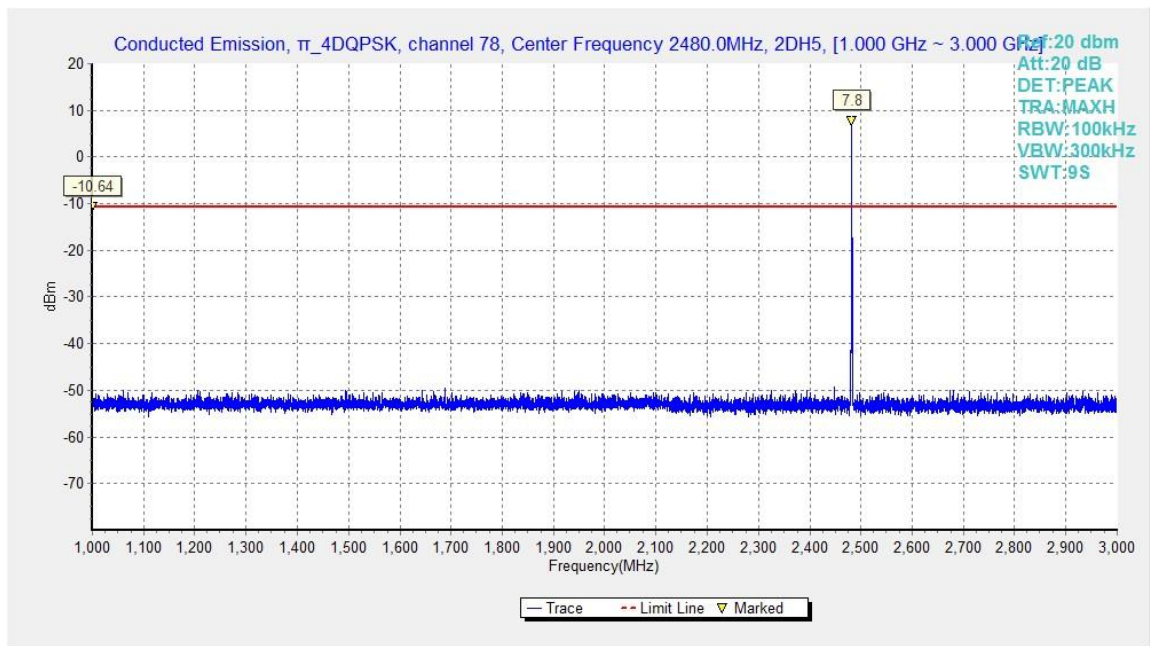


Fig.40. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 1GHz - 3GHz

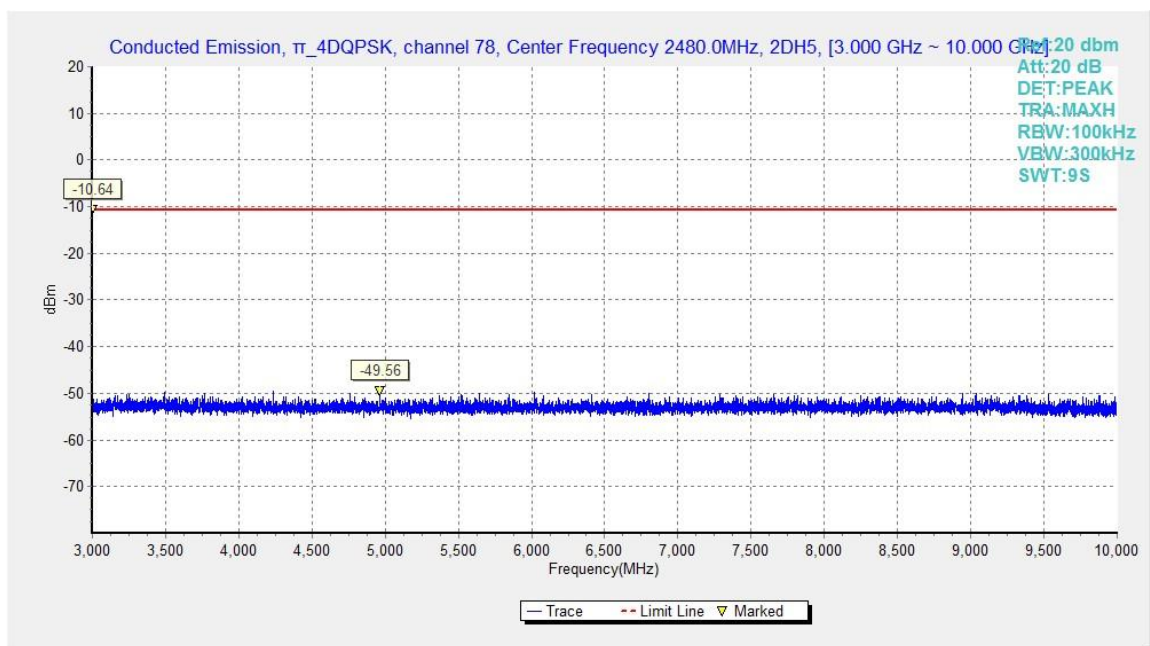


Fig.41. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 3GHz - 10GHz

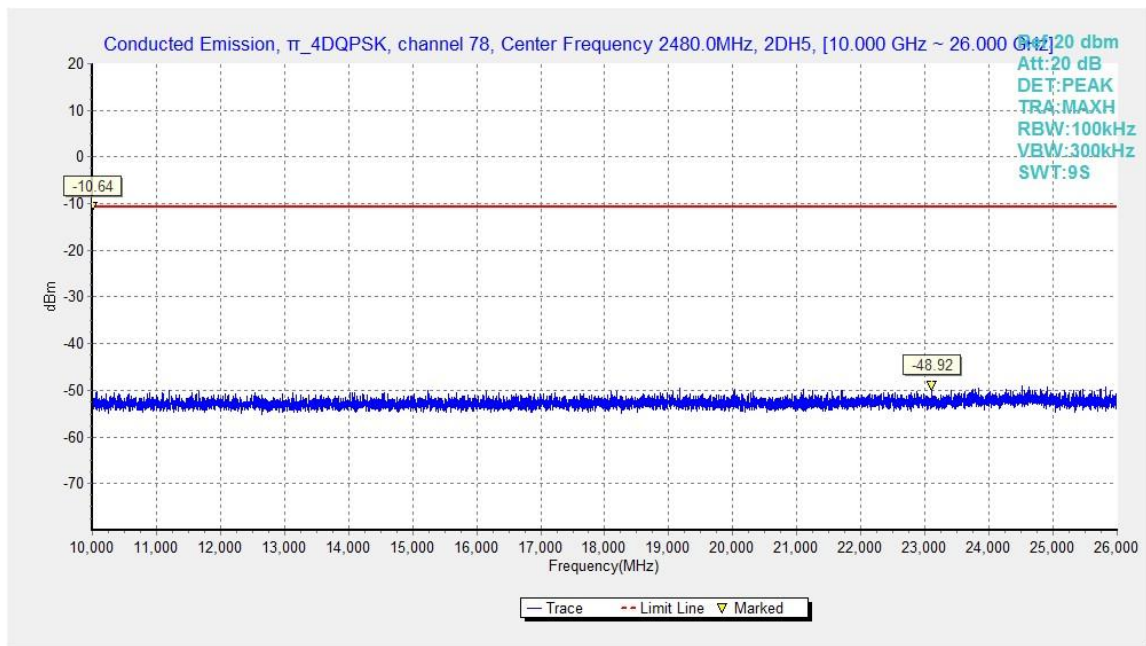


Fig.42. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 10GHz - 26GHz

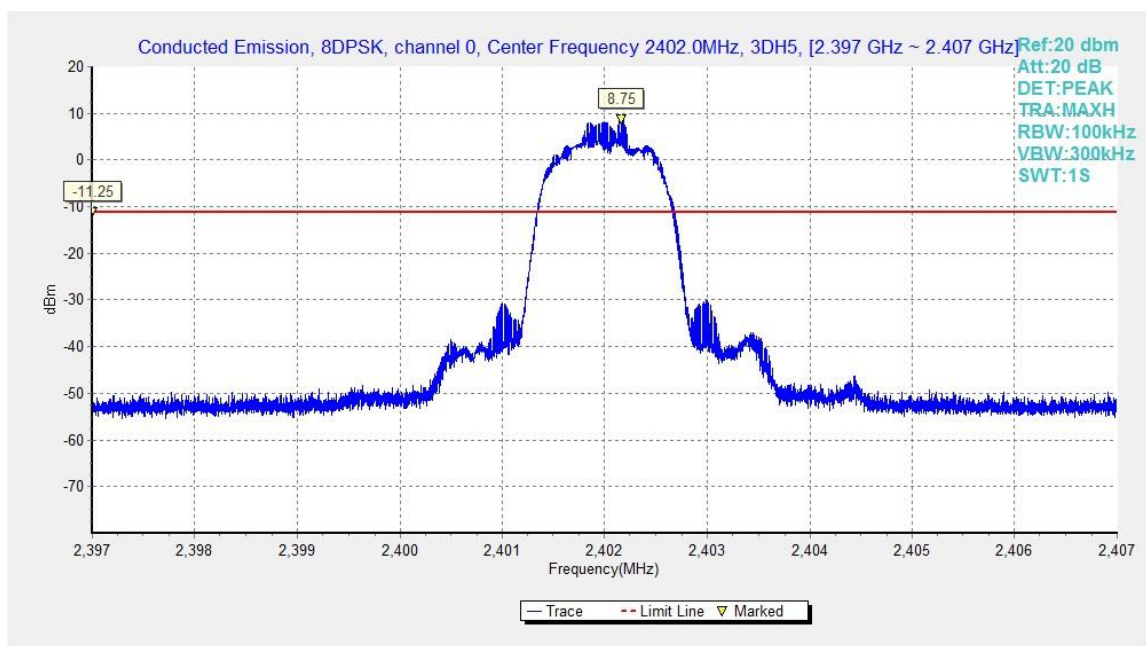


Fig.43. Conducted spurious emission: 8DPSK, Channel 0, 2402MHz

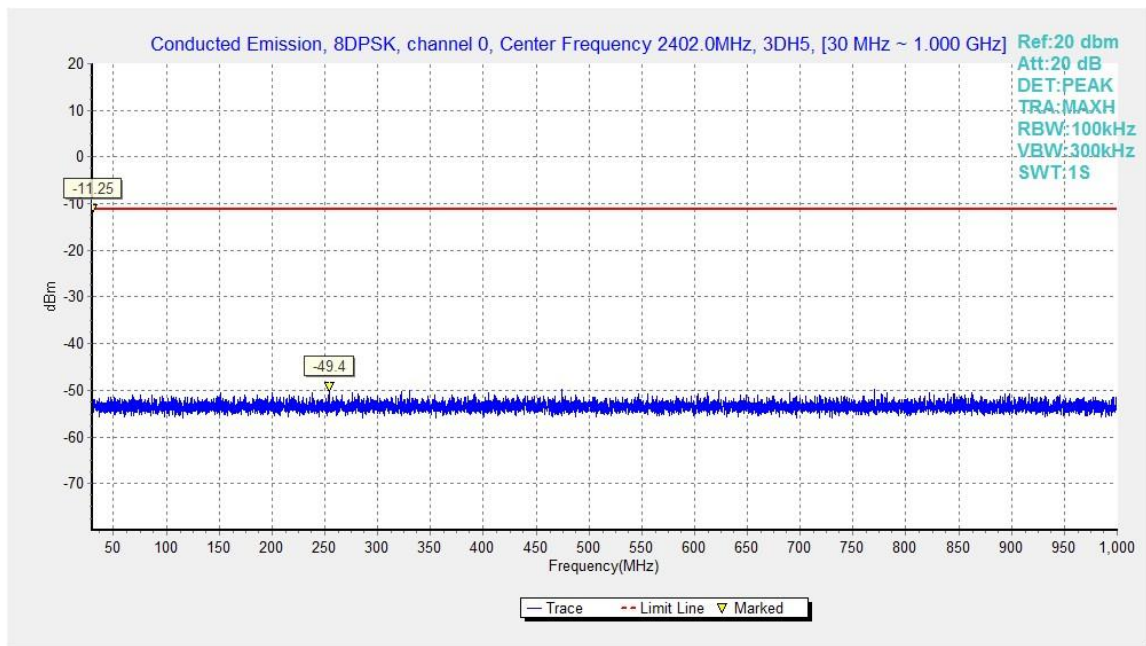


Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

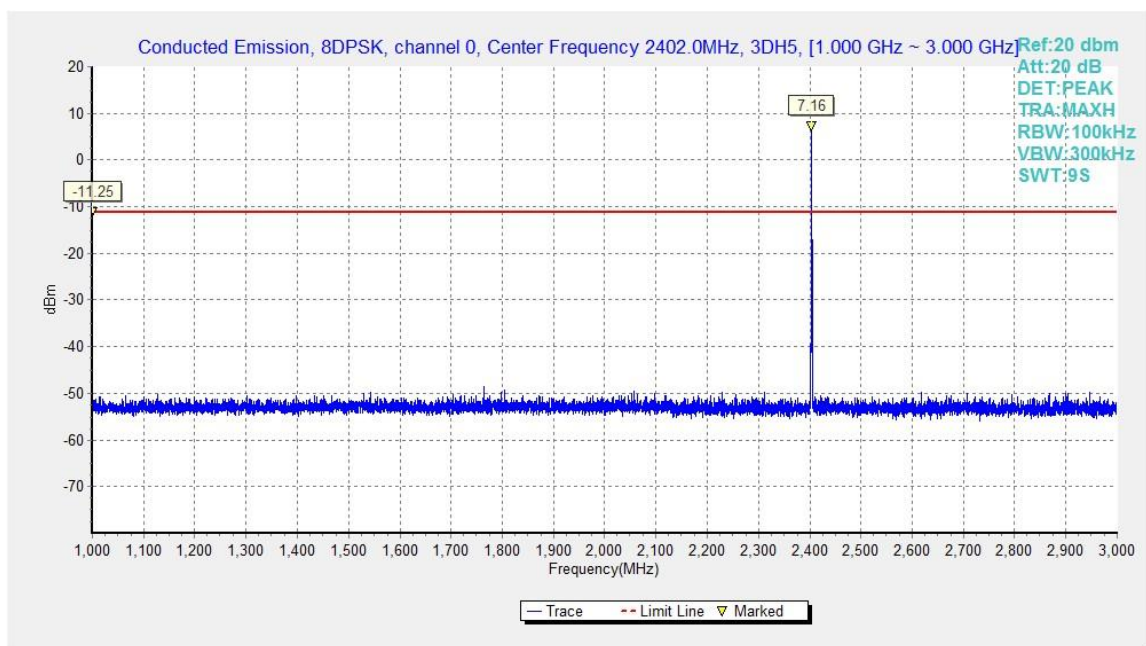


Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

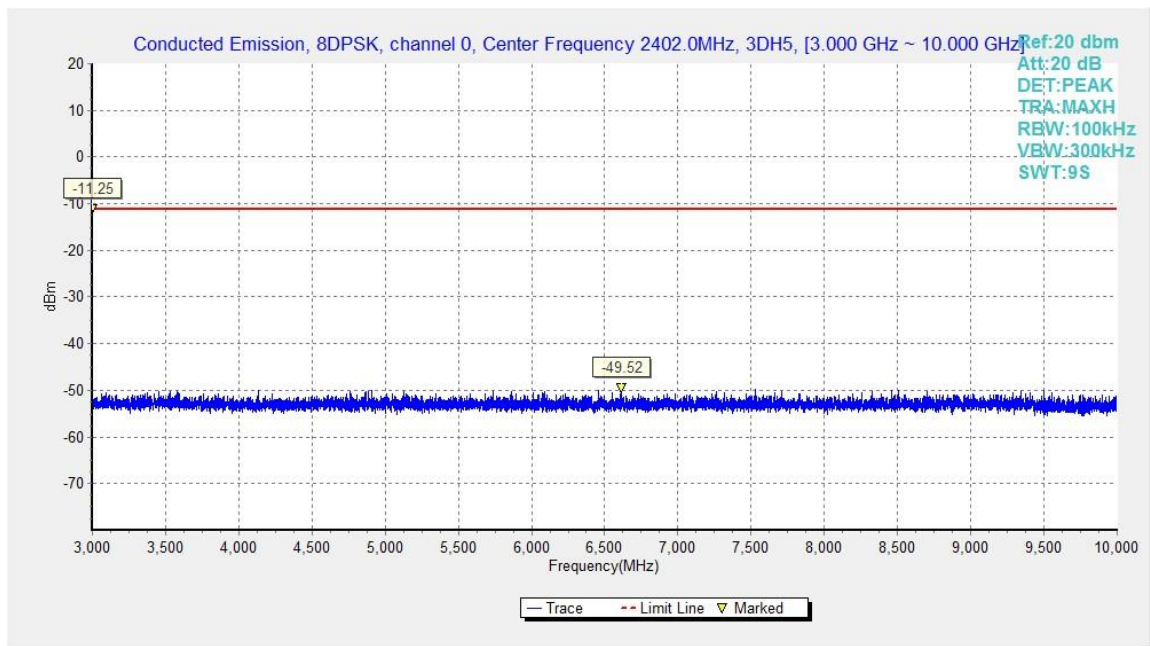


Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

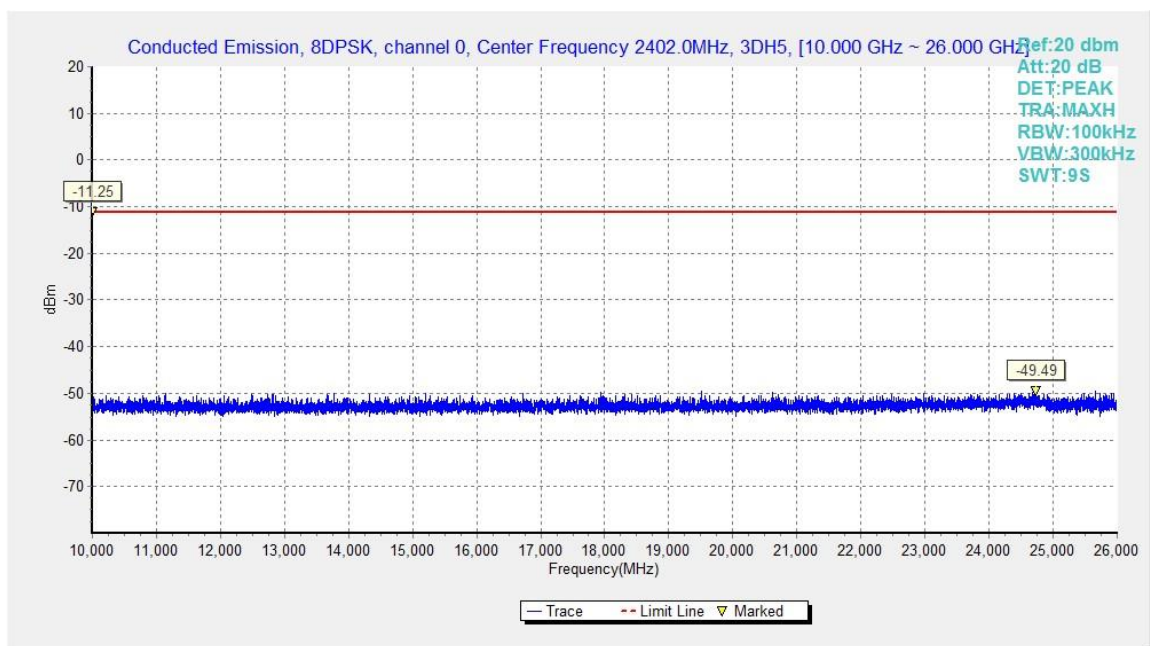


Fig.47. Conducted spurious emission: 8DPSK, Channel 0, 10GHz - 26GHz

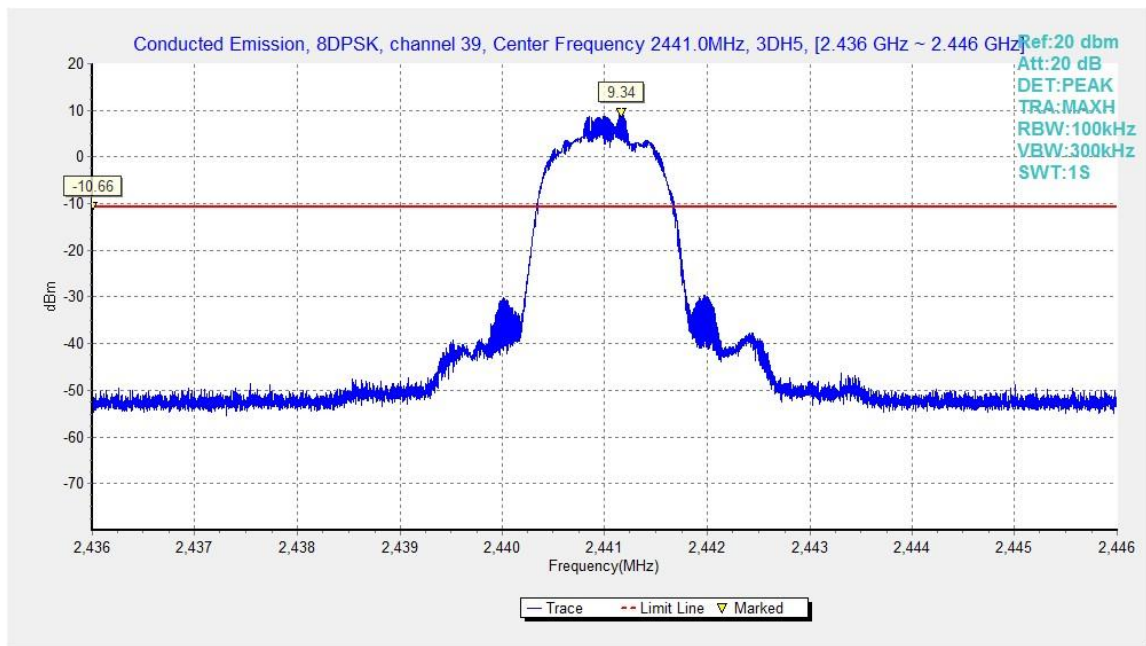


Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

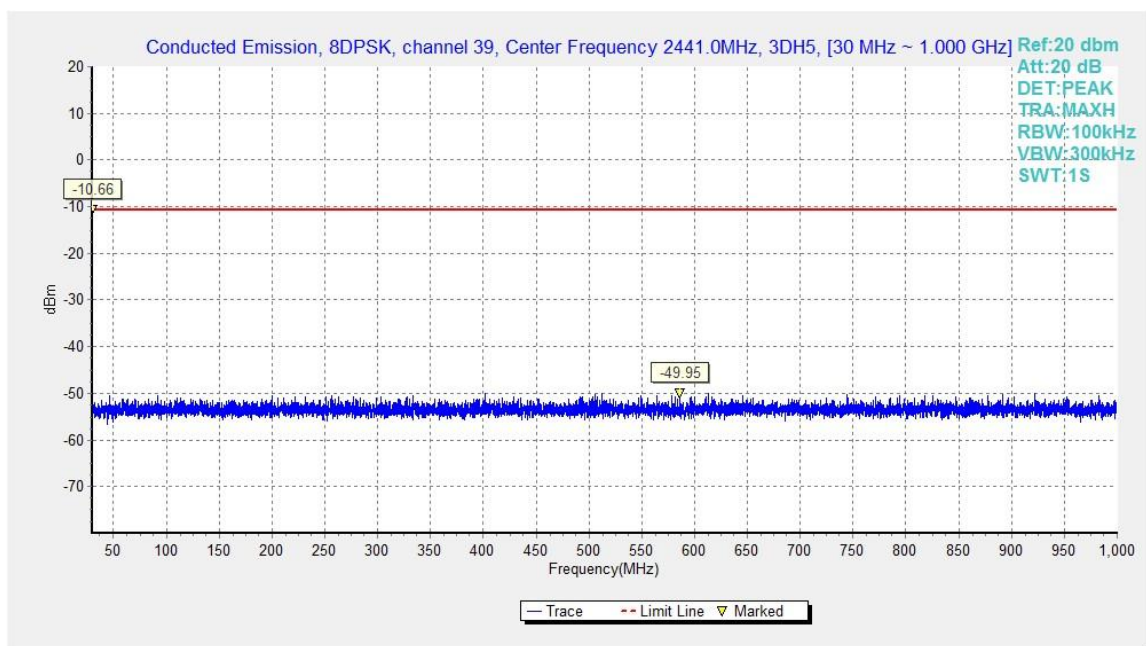


Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

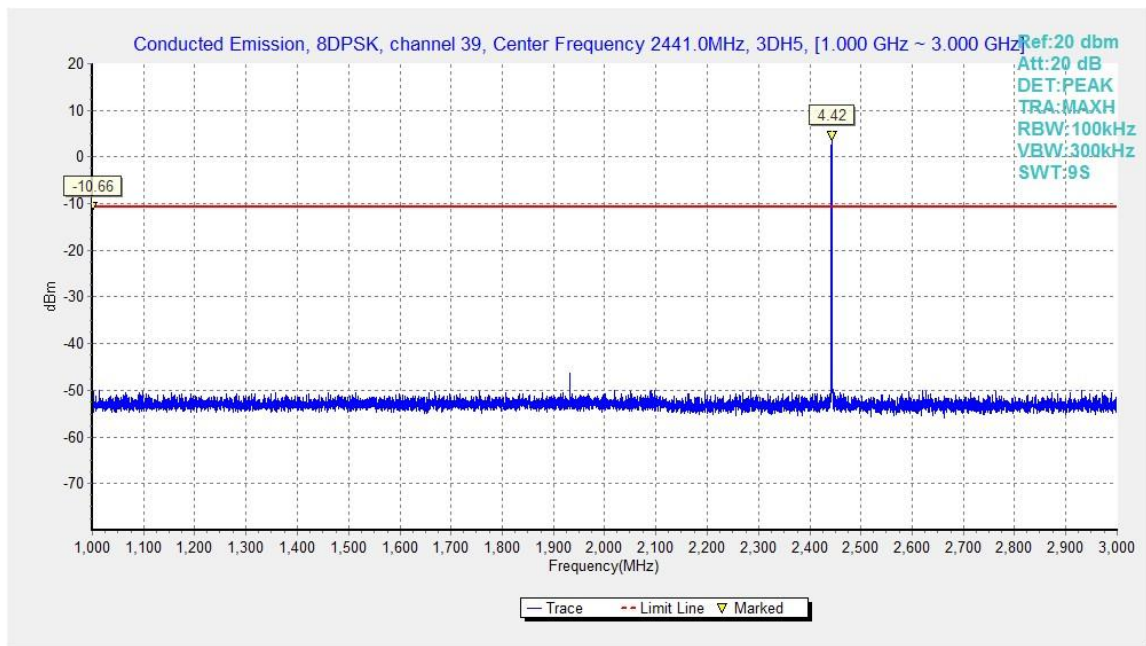


Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

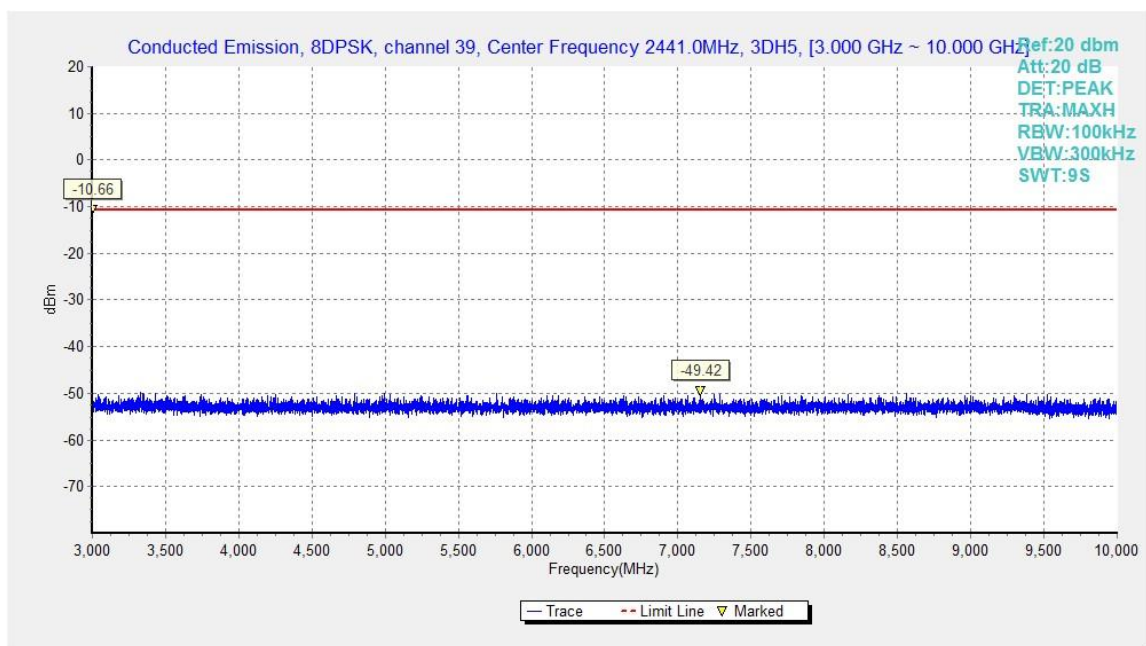


Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

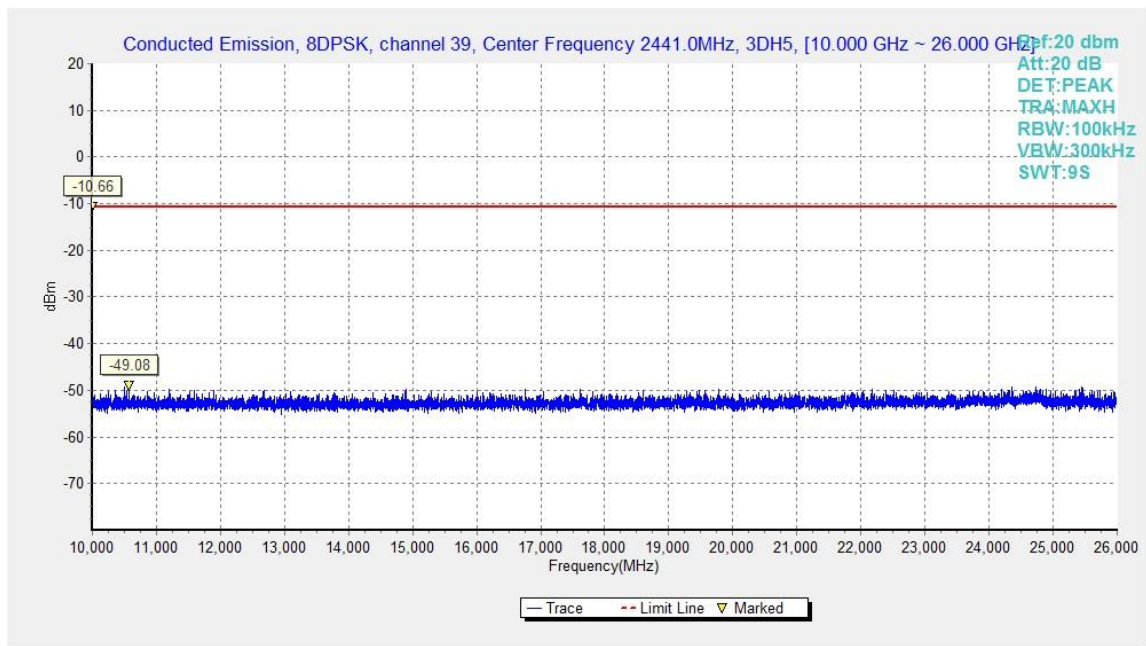


Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

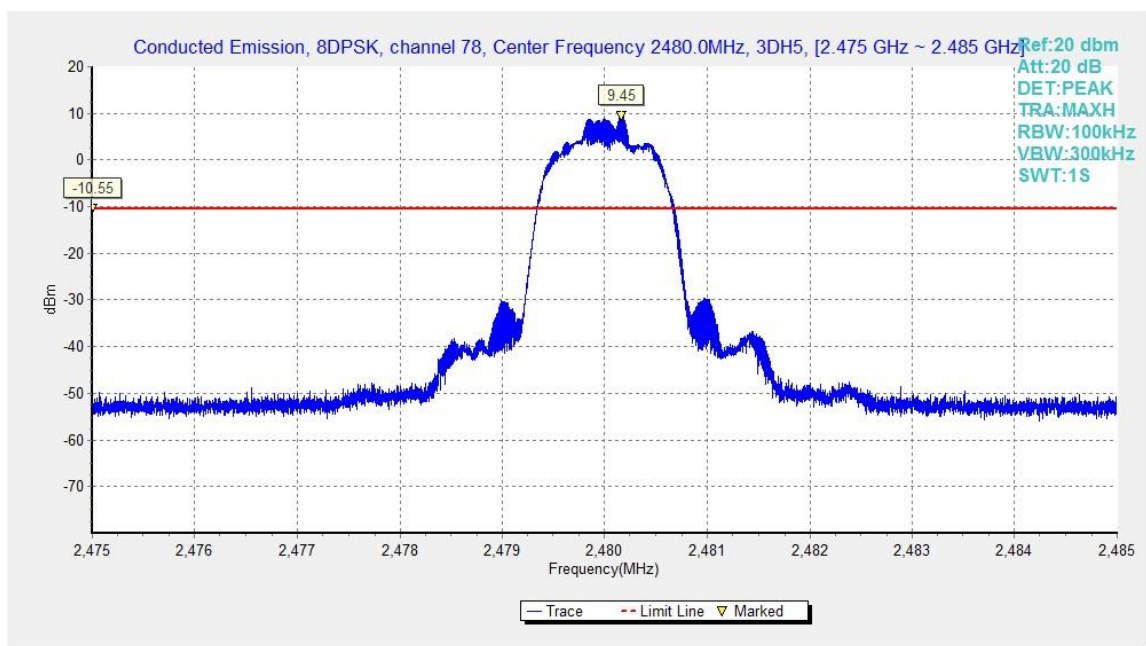


Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

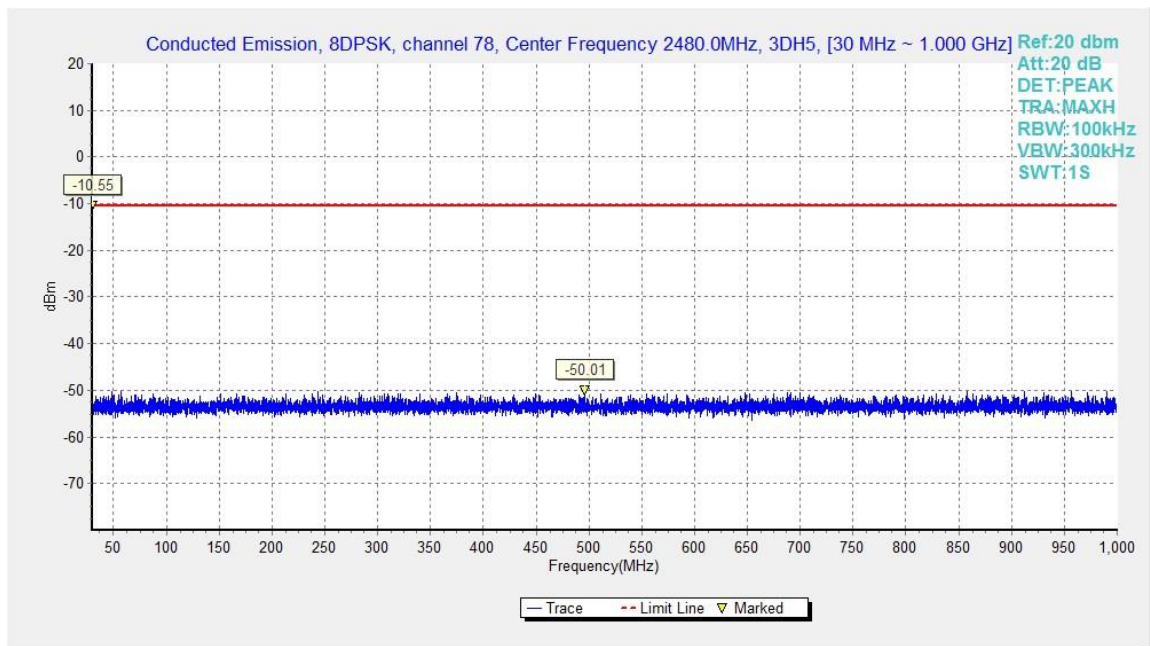


Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

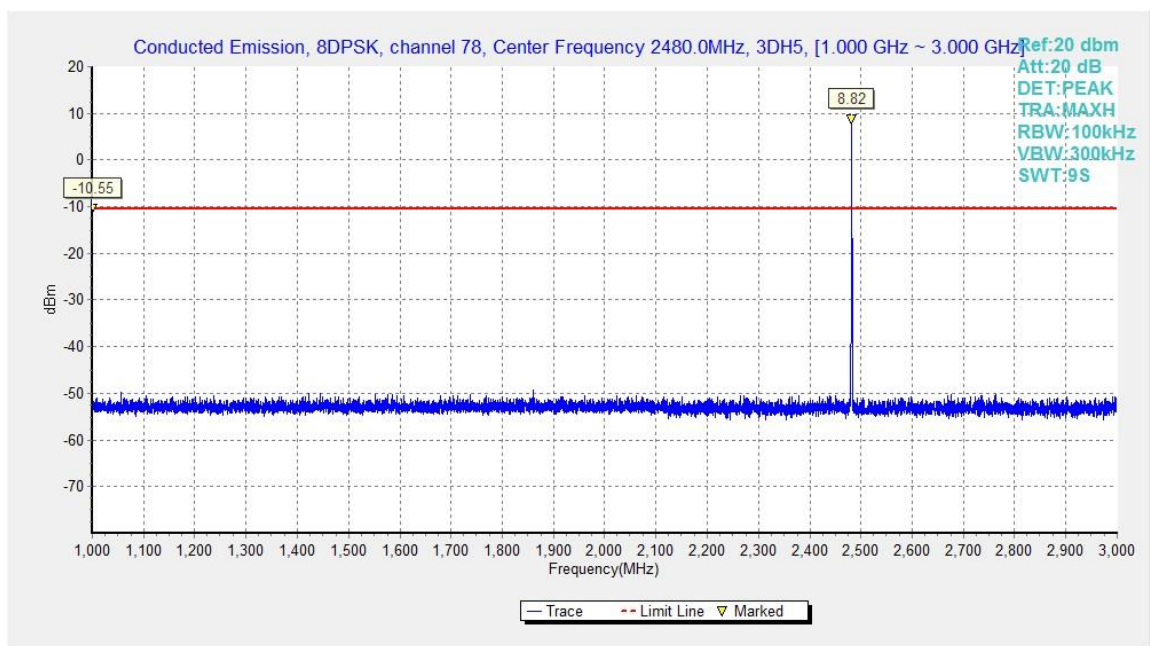


Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

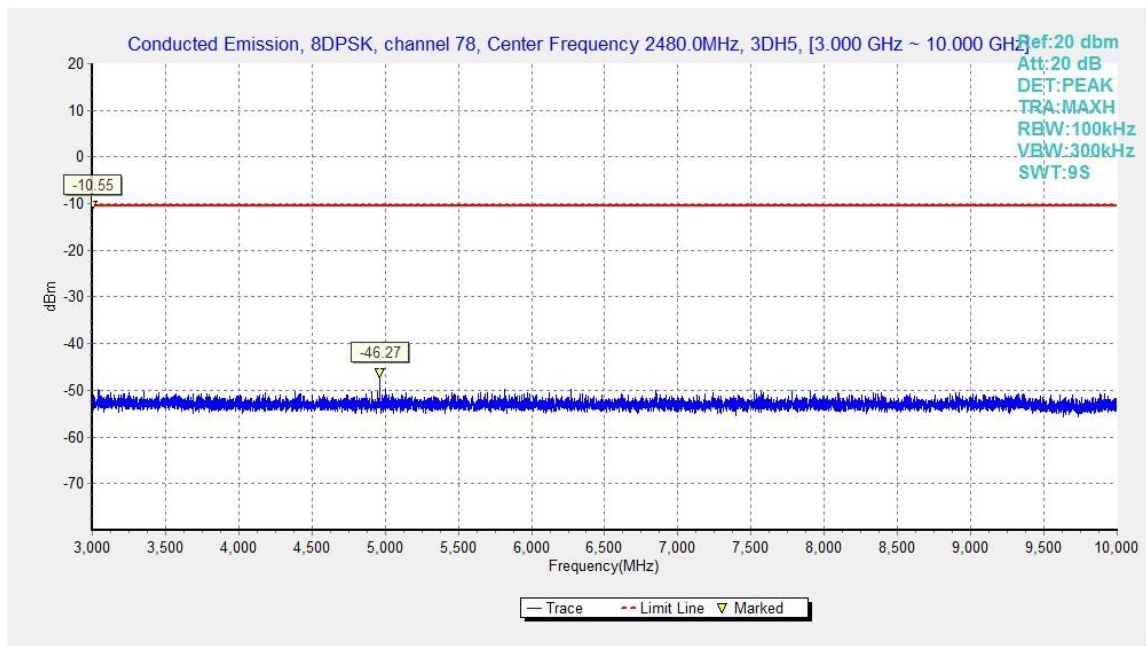


Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

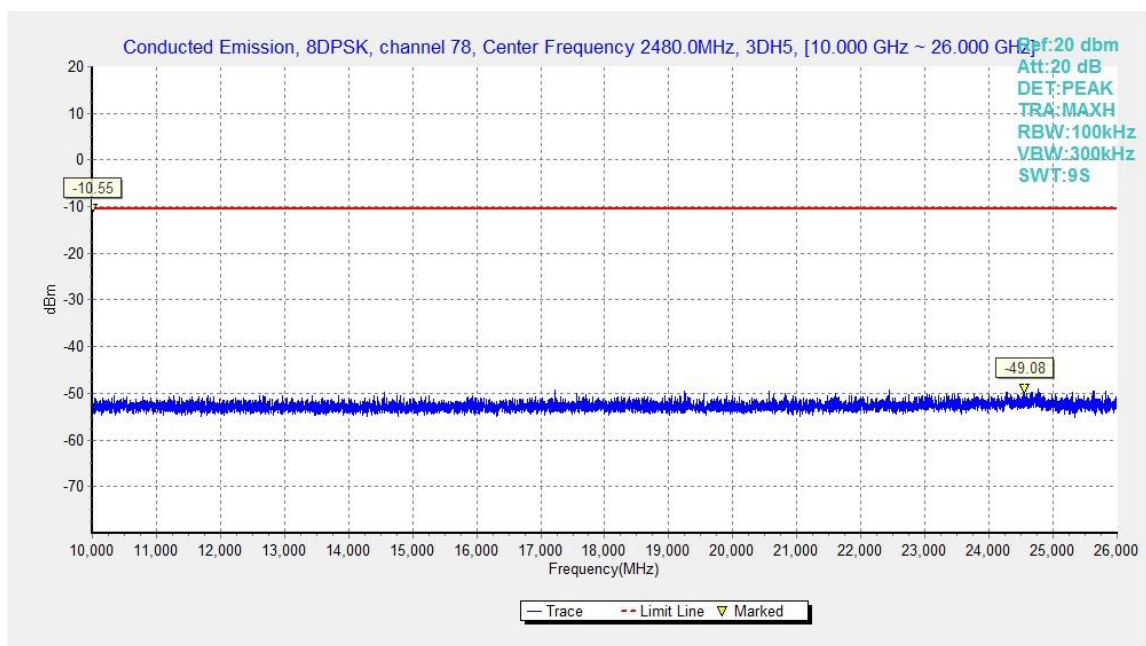


Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

B.5. Radiated Unwanted Emission

Limits

Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band

Frequency (MHz)	Field strength($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength ($\mu\text{V/m}$)	Field strength (dB $\mu\text{V/m}$)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor.

Test setup

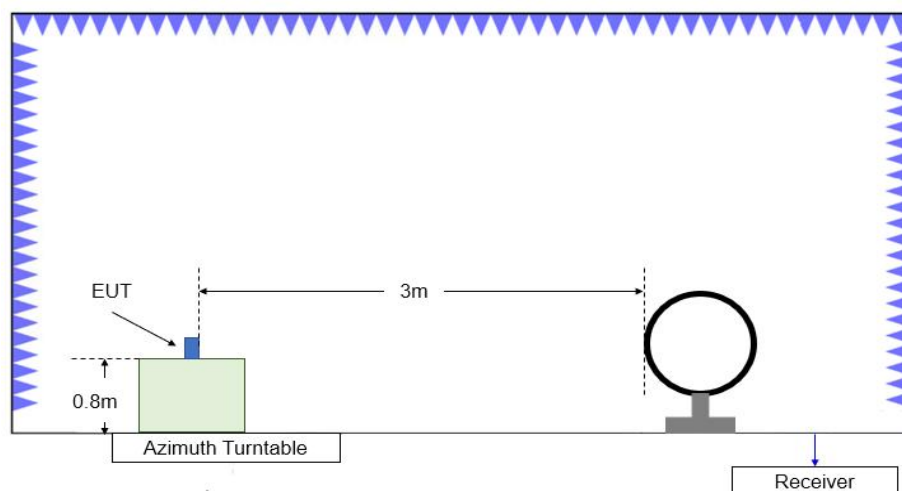


Figure B.5.1. Test Site Diagram (9kHz-30MHz)

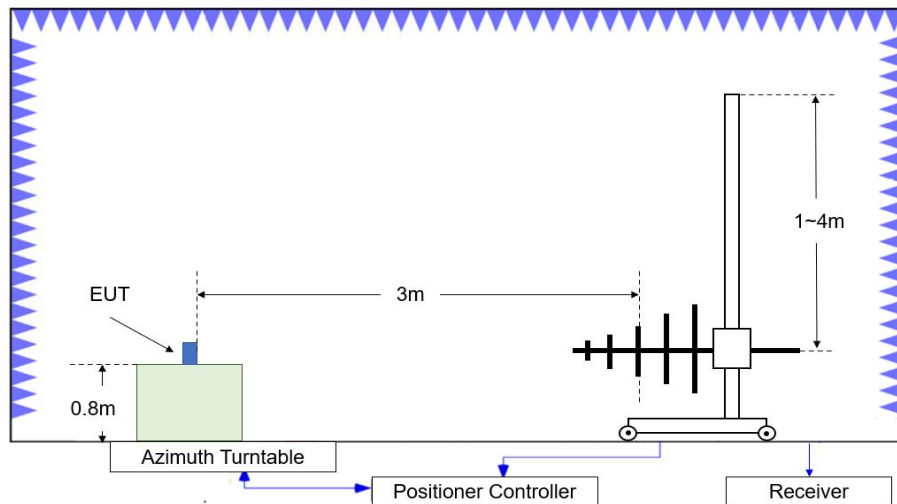


Figure B.5.2. Test Site Diagram (30MHz-1GHz)

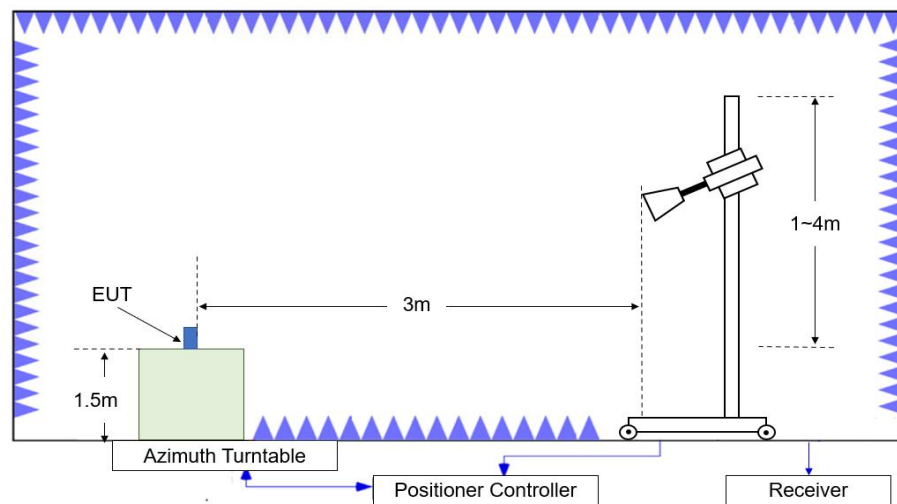


Figure B.5.3. Test Site Diagram (1GHz-40GHz)

Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10-2013 (ANSI C63.10-2020).

Test setting

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-3000	1MHz/3MHz	15
3000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Sample Calculation

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}= P_{Mea}+Cable\ Loss+Antenna\ Factor$

Test note

1. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
2. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
3. Measurement frequencies were performed from 9 kHz to the 10th harmonic of highest fundamental frequency or 40GHz, whichever is lower.

Test Result

EUT ID: UT17a

Radiated Spurious Emission

GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2382.450	53.30	-24.82	31.93	46.20	74.00	20.70	V
2385.000	52.80	-24.80	31.94	45.66	74.00	21.20	H
4803.500	45.68	-32.23	34.30	43.61	74.00	28.32	H
7206.000	41.41	-29.88	35.60	35.69	74.00	32.59	V
9608.000	45.34	-26.71	36.72	35.34	74.00	28.66	V
12010.000	45.90	-27.34	38.62	34.62	74.00	28.10	V

GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2433.600	52.28	-25.21	32.13	45.35	74.00	21.72	V
2447.600	53.06	-24.58	32.19	45.44	74.00	20.95	H
4881.500	44.76	-32.21	34.24	42.73	74.00	29.24	V
7323.000	42.31	-29.41	35.75	35.97	74.00	31.69	V
9764.000	42.89	-28.13	37.07	33.94	74.00	31.11	V
12205.000	48.13	-25.95	38.71	35.38	74.00	25.87	V

GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2484.500	53.30	-24.54	32.20	45.64	74.00	20.70	H
2484.950	53.81	-24.53	32.20	46.14	74.00	20.19	V
4960.000	45.12	-31.90	34.10	42.92	74.00	28.88	V

7440.000	42.08	-28.77	35.68	35.18	74.00	31.92	V
9920.000	44.01	-28.05	37.34	34.72	74.00	29.99	H
12400.000	45.45	-27.32	38.70	34.08	74.00	28.55	H

$\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2385.250	53.03	-24.80	31.94	45.89	74.00	20.97	H
2389.200	53.02	-24.77	31.96	45.83	74.00	20.98	H
4803.500	42.97	-32.23	34.30	40.90	74.00	31.03	H
7206.000	41.89	-29.88	35.60	36.17	74.00	32.11	H
9608.000	46.30	-26.71	36.72	36.30	74.00	27.70	V
12010.000	44.66	-27.34	38.62	33.37	74.00	29.35	V

$\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2432.400	52.09	-25.22	32.13	45.19	74.00	21.91	H
2446.400	52.48	-24.67	32.19	44.96	74.00	21.52	H
4882.000	43.01	-32.18	34.24	40.96	74.00	30.99	V
7323.000	42.11	-29.41	35.75	35.77	74.00	31.89	V
9764.000	43.92	-28.13	37.07	34.98	74.00	30.08	H
12205.000	46.65	-25.95	38.71	33.89	74.00	27.35	H

$\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2484.050	53.53	-24.55	32.20	45.89	74.00	20.47	V
2485.050	53.64	-24.53	32.20	45.97	74.00	20.36	V
4960.000	42.79	-31.90	34.10	40.58	74.00	31.21	H
7440.000	42.12	-28.77	35.68	35.21	74.00	31.88	V
9920.000	43.47	-28.05	37.34	34.19	74.00	30.53	V
12400.000	46.30	-27.32	38.70	34.93	74.00	27.70	V

8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2388.000	52.26	-24.78	31.95	45.08	74.00	21.75	V
2389.400	52.35	-24.77	31.96	45.16	74.00	21.65	H
4803.500	43.07	-32.23	34.30	41.00	74.00	30.94	H
7206.000	40.93	-29.88	35.60	35.21	74.00	33.07	V
9608.000	45.41	-26.71	36.72	35.41	74.00	28.59	H
12010.000	44.86	-27.34	38.62	33.58	74.00	29.14	V

8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2430.000	52.45	-25.24	32.12	45.57	74.00	21.55	V
2446.800	52.20	-24.64	32.19	44.65	74.00	21.80	V
4881.500	43.47	-32.21	34.24	41.45	74.00	30.53	V
7323.000	41.18	-29.41	35.75	34.84	74.00	32.82	H
9764.000	43.37	-28.13	37.07	34.42	74.00	30.63	H
12205.000	46.66	-25.95	38.71	33.90	74.00	27.34	V

8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2484.600	53.25	-24.54	32.20	45.59	74.00	20.75	V
2486.850	54.22	-24.49	32.20	46.51	74.00	19.78	V
4959.500	43.92	-31.90	34.10	41.72	74.00	30.08	V
7440.000	42.73	-28.77	35.68	35.82	74.00	31.28	H
9920.000	44.62	-28.05	37.34	35.34	74.00	29.38	V
12400.000	45.29	-27.32	38.70	33.91	74.00	28.71	V

Average Measurement results

GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2382.000	42.52	-24.83	31.93	35.42	54.00	11.48	V
2387.200	42.06	-24.78	31.95	34.90	54.00	11.94	V
4804.000	42.30	-32.22	34.30	40.22	54.00	11.70	V
7206.000	32.36	-29.88	35.60	26.64	54.00	21.64	V
9608.000	36.32	-26.71	36.72	26.32	54.00	17.68	H
12010.000	35.56	-27.34	38.62	24.28	54.00	18.44	V

GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2435.200	43.11	-25.20	32.14	36.17	54.00	10.89	V
2447.200	43.47	-24.61	32.19	35.89	54.00	10.53	V
4882.000	40.28	-32.18	34.24	38.22	54.00	13.72	V
7323.000	32.15	-29.41	35.75	25.81	54.00	21.85	V
9764.000	34.80	-28.13	37.07	25.86	54.00	19.20	H
12205.000	37.78	-25.95	38.71	25.02	54.00	16.22	V

GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2482.200	43.42	-24.59	32.20	35.81	54.00	10.58	V
2488.400	43.15	-24.46	32.20	35.41	54.00	10.85	V
4960.000	41.76	-31.90	34.10	39.56	54.00	12.24	V
7440.000	32.50	-28.77	35.68	25.60	54.00	21.50	V
9920.000	34.68	-28.05	37.34	25.39	54.00	19.32	V
12400.000	36.31	-27.32	38.70	24.93	54.00	17.69	V

$\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2386.800	42.76	-24.79	31.95	35.60	54.00	11.24	V
2389.200	42.19	-24.77	31.96	35.00	54.00	11.81	V
4803.500	41.17	-32.23	34.30	39.10	54.00	12.83	V
7206.000	32.45	-29.88	35.60	26.73	54.00	21.55	H
9608.000	36.50	-26.71	36.72	26.50	54.00	17.50	H
12010.000	35.50	-27.34	38.62	24.22	54.00	18.50	V

$\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2434.400	42.94	-25.21	32.14	36.01	54.00	11.06	V
2451.200	43.55	-24.41	32.20	35.76	54.00	10.45	V
4882.000	39.67	-32.18	34.24	37.62	54.00	14.33	V
7323.000	32.21	-29.41	35.75	25.87	54.00	21.79	H
9764.000	34.69	-28.13	37.07	25.74	54.00	19.31	V
12205.000	37.73	-25.95	38.71	24.97	54.00	16.27	H

$\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2491.600	43.74	-24.47	32.20	36.01	54.00	10.26	V
2496.000	43.92	-24.59	32.20	36.31	54.00	10.08	V
4960.000	40.19	-31.90	34.10	37.99	54.00	13.81	H
7440.000	32.70	-28.77	35.68	25.79	54.00	21.30	H
9920.000	34.60	-28.05	37.34	25.31	54.00	19.40	V
12400.000	36.50	-27.32	38.70	25.13	54.00	17.50	H

8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2382.400	42.02	-24.82	31.93	34.92	54.00	11.98	V
2388.000	41.96	-24.78	31.95	34.78	54.00	12.04	V
4804.000	41.09	-32.22	34.30	39.01	54.00	12.91	V
7206.000	33.13	-29.88	35.60	27.41	54.00	20.87	H
9608.000	37.01	-26.71	36.72	27.01	54.00	16.99	H
12010.000	35.98	-27.34	38.62	24.69	54.00	18.02	V

8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2434.800	42.88	-25.20	32.14	35.94	54.00	11.12	V
2447.200	43.35	-24.61	32.19	35.77	54.00	10.65	V
4882.000	39.59	-32.18	34.24	37.54	54.00	14.41	V
7323.000	32.66	-29.41	35.75	26.32	54.00	21.34	H
9764.000	34.55	-28.13	37.07	25.61	54.00	19.45	V
12205.000	37.97	-25.95	38.71	25.22	54.00	16.03	V

8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2485.600	43.82	-24.52	32.20	36.14	54.00	10.18	V
2490.400	43.70	-24.43	32.20	35.94	54.00	10.30	V
4959.500	39.88	-31.90	34.10	37.68	54.00	14.12	V
7440.000	32.35	-28.77	35.68	25.44	54.00	21.65	V
9920.000	34.81	-28.05	37.34	25.52	54.00	19.19	V
12400.000	36.31	-27.32	38.70	24.93	54.00	17.69	V

Conclusion: Pass

Note: the spurious emission above 18G is noise only and did not show on the report.

Band edge compliance

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.31GHz ~2.43GHz	Fig.58	P
	78	2.45GHz ~2.5GHz	Fig.59	P

Mode	Channel	Frequency Range	Test Results	Conclusion
$\pi/4$ DQPSK	0	2.31GHz ~2.43GHz	Fig.60	P
	78	2.45GHz ~2.5GHz	Fig.61	P

Mode	Channel	Frequency Range	Test Results	Conclusion
8DPSK	0	2.31GHz ~2.43GHz	Fig.62	P
	78	2.45GHz ~2.5GHz	Fig.63	P

Conclusion: PASS

Test graphs as below

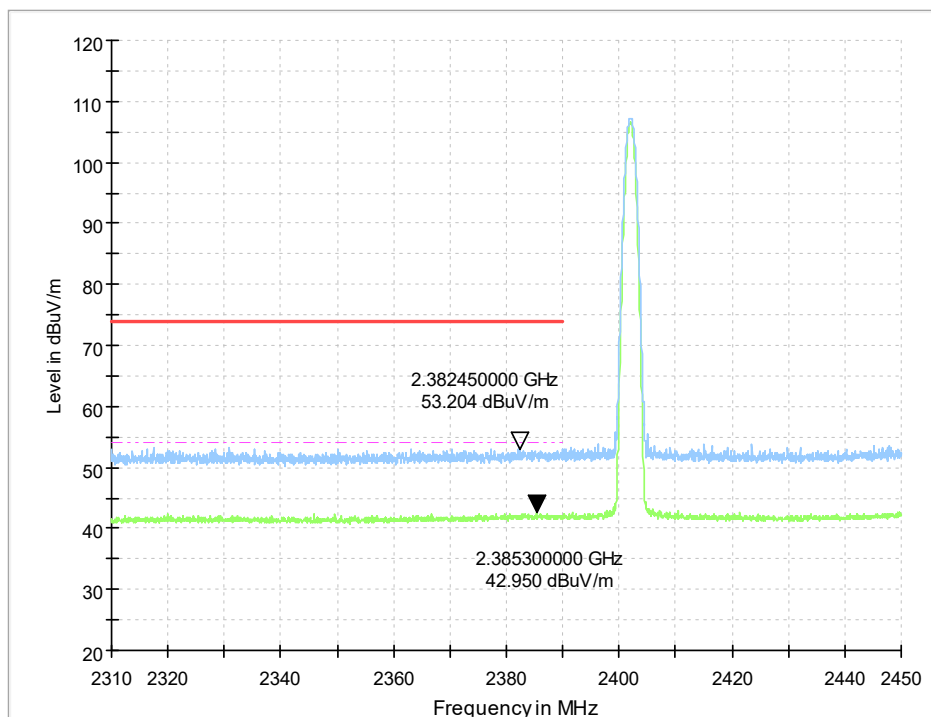


Fig.58. Frequency Band Edges: GFSK, Channel 0, Hopping Off, 2.31 GHz – 2.45GHz

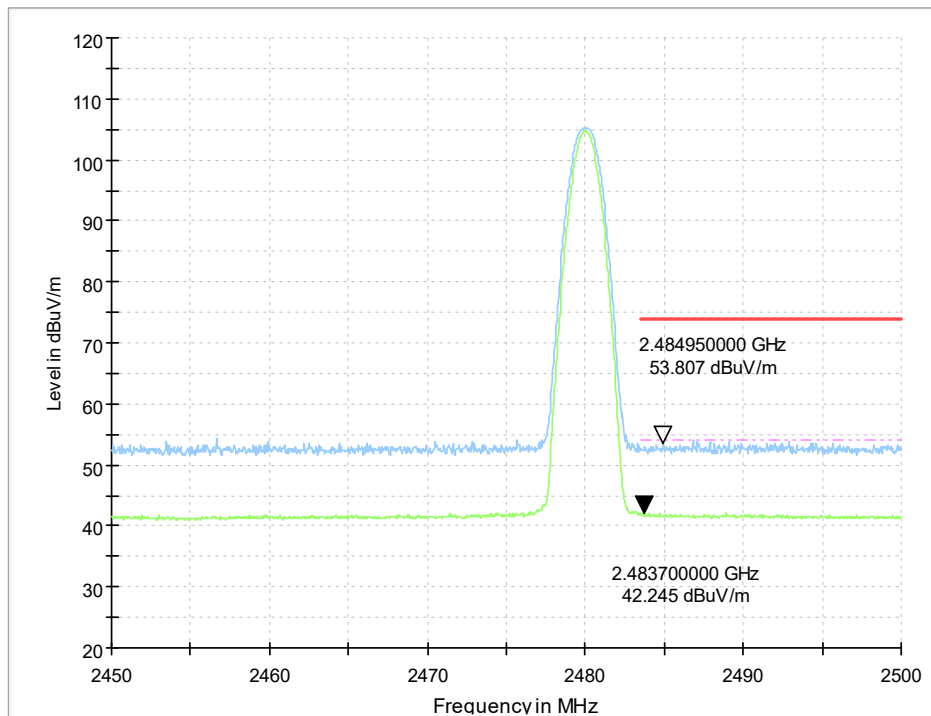


Fig.59. Frequency Band Edges: GFSK, Channel 78, Hopping Off, ch11, 2.45 GHz - 2.50GHz

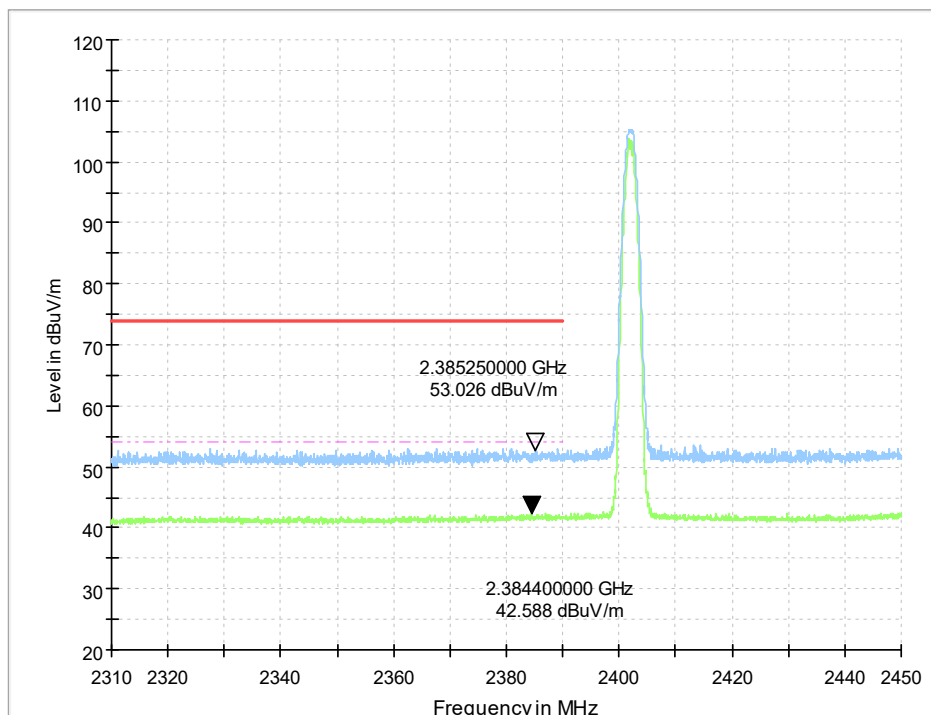


Fig.60. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping Off, 2.31 GHz - 2.45GHz

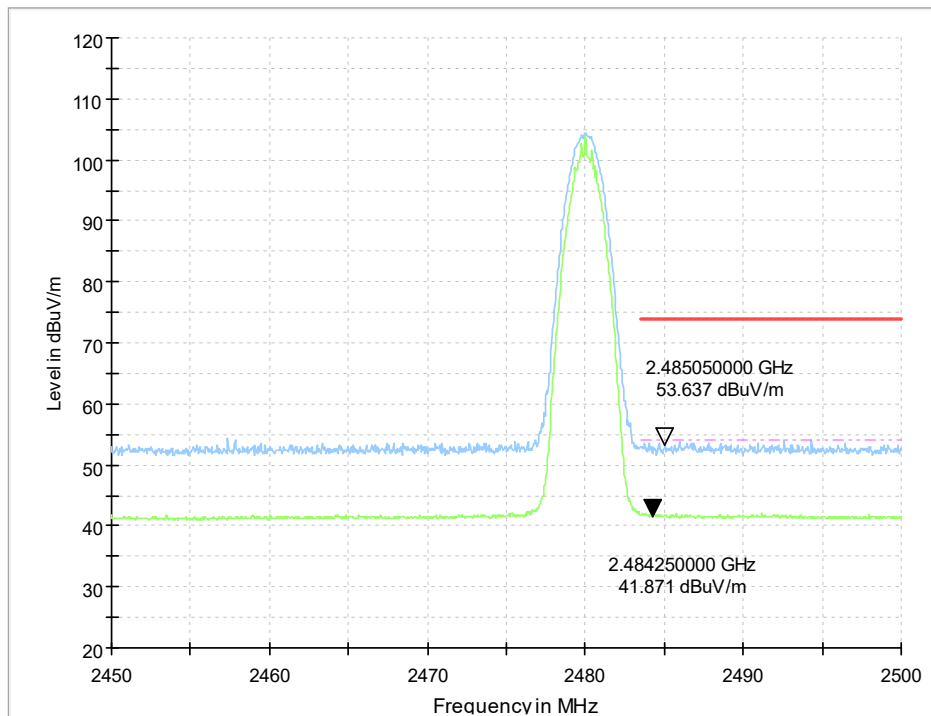


Fig.61. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping Off, 2.45 GHz - 2.50GHz

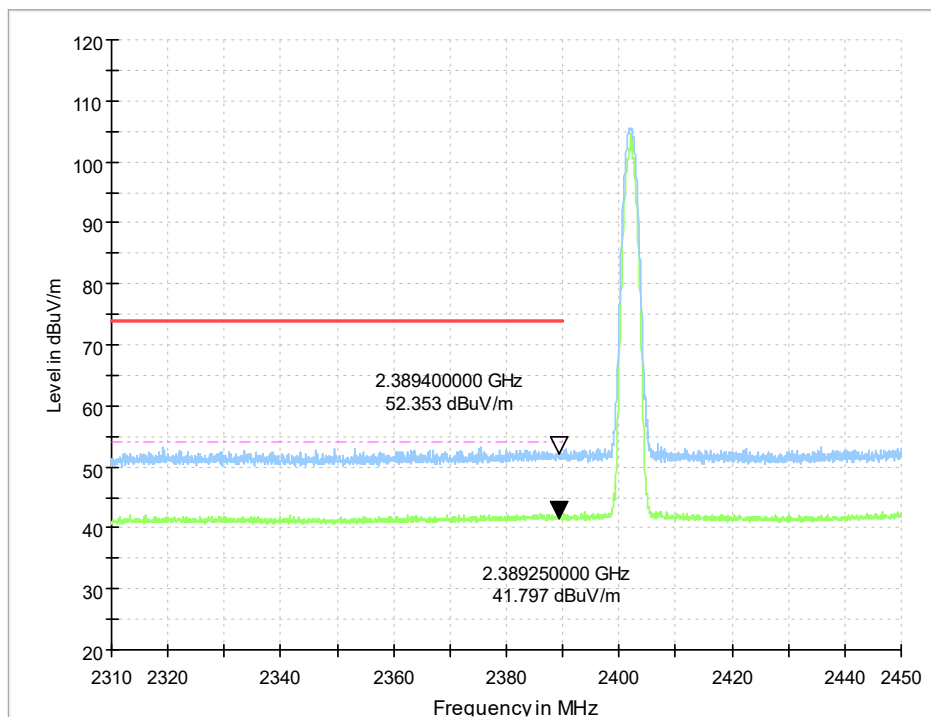


Fig.62. Frequency Band Edges: 8DPSK, Channel 0, 2.31 GHz - 2.45GHz

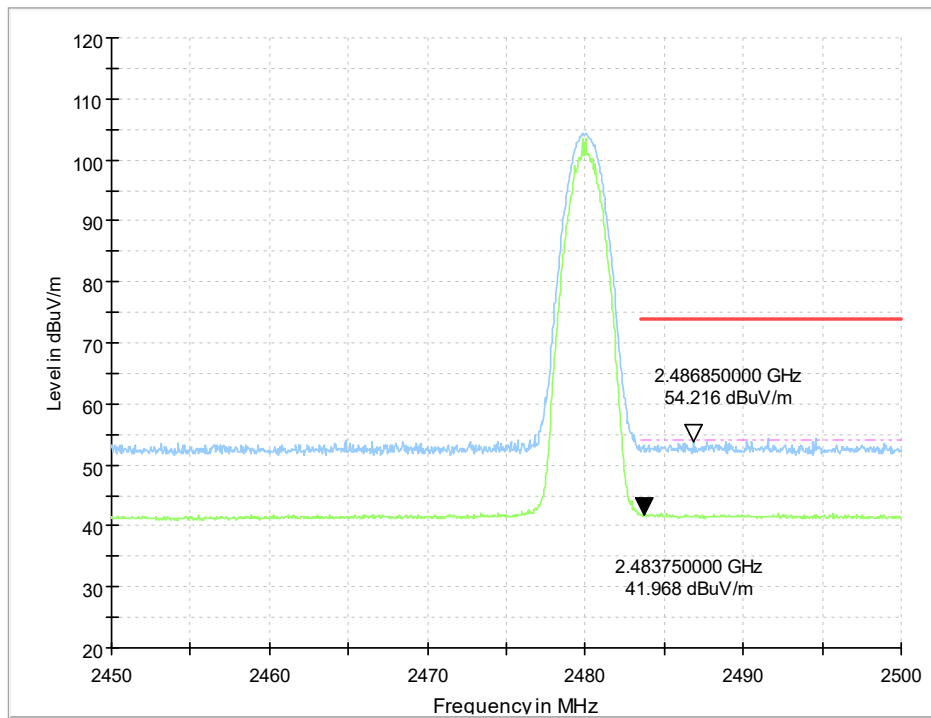


Fig.63. Frequency Band Edges: 8DPSK, Channel 78, 2.45 GHz - 2.50GHz