



**FCC PART 15C
TEST REPORT
No. I14Z49154-SRD01**

for

TCL Communication Ltd

HSUPA/HSDPA/UMTS tri-band/GSM quad-band mobile phone

Model Name: 4023A


FCC ID: 2ACCJH008

with

Hardware Version: PIO

Software Version: v7G1D

Issued Date: 2015-01-06

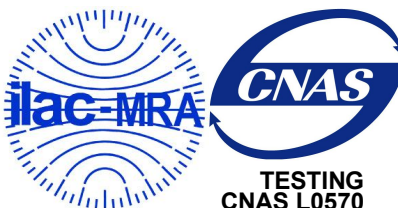

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:cttl_terminals@catr.cn, website:www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I14Z49154-SRD01	Rev.0	1st edition	2015-01-06

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	5
1.3. PROJECT DATA	5
1.4. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT	7
3.3. INTERNAL IDENTIFICATION OF AE	7
3.4. NORMAL ACCESSORY SETTING	7
3.5. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. TEST RESULTS	9
5.1. SUMMARY OF TEST RESULTS	9
5.2. STATEMENTS	9
6. TEST FACILITIES UTILIZED	10
ANNEX A: DETAILED TEST RESULTS	11
A.1. MEASUREMENT METHOD	11
A.2. PEAK OUTPUT POWER – CONDUCTED	12
A.3. FREQUENCY BAND EDGES – CONDUCTED	13
A.4. CONDUCTED EMISSION	20
A.5. RADIATED EMISSION	45
A.6. TIME OF OCCUPANCY (DWELL TIME)	65
A.7. 20dB BANDWIDTH	75
A.8. CARRIER FREQUENCY SEPARATION	81
A.9. NUMBER OF HOPPING CHANNELS	84
A.10. AC POWERLINE CONDUCTED EMISSION	88
ANNEX B: ACCREDITATION CERTIFICATE	91



1. Test Laboratory

1.1. Testing Location

Location 1:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Location 2:CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China100191

1.2. Testing Environment

Normal Temperature: 15-35℃
Extreme Temperature: -10/+55℃
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: 2014-12-21
Testing End Date: 2014-12-18


1.4. Signature



Xu Zhongfei
(Prepared this test report)



Li Zhibin
(Reviewed this test report)



Lv Songdong
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@tcl.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSUPA/HSDPA/UMTS tri-band/GSM quad-band mobile phone
Model Name	4023A
FCC ID	2ACCJH008
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/ $\pi/4$ DQPSK/8DPSK
Number of Channels	79
Power Supply	3.8V DC by Battery

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	/	PIO	v7G1D
EUT2	/	PIO	v7G1D

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	
AE1	Battery	/ Inbuilt
AE1		
Model	CAB31P0000CB	
Manufacturer	OCEANSUN	
Capacitance	1300mAh	
Nominal voltage	3.8v	

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery should be used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of HSUPA/HSDPA/UMTS tri-band/GSM quad-band mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	June,2014
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	
	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	June,2013
FCC Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations	June,2014

5. Test Results

5.1. Summary of Test Results

Abbreviations used in this clause:

P Pass, The EUT complies with the essential requirements in the standard.

F Fail, The EUT does not comply with the essential requirements in the standard

NA Not Applicable, The test was not applicable

NP Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	P
Frequency Band Edges	15.247 (d)	P
Conducted Emission	15.247 (d)	P
Radiated Emission	15.247, 15.205, 15.209	P
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	P
20dB Bandwidth	15.247 (a)(1)	NA
Carrier Frequency Separation	15.247 (a)(1)	P
Number of hopping channels	15.247 (a)(b)(iii)	P
AC Powerline Conducted Emission	15.107, 15.207	P

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

This model is a variant product which market name is 4008A; all the test result has been derived from test report of 4008A.

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2016-01-06
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	1 year	2015-02-09

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2015-11-05
2	EMI Antenna	VULB 9163	9163 175	Schwarzbeck	3 years	2015-07-13
3	EMI Antenna	3117	00119021	ETS-Lindgren	3 years	2015-04-19
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	3 years	2015-06-30
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	3 years	2015-06-30
6	Bluetooth Tester	CBT	100153	Rohde & Schwarz	1 year	2015-09-15
7	LISN	ESH2-Z5	829991/01 2	Rohde & Schwarz	1 year	2015-04-14
8	Loop Antenna	HFH2-Z2	829324/00 7	Rohde & Schwarz	3 years	2015-12-12
9	Pre-amplifier(18GHz)	SCU18	1005277	Rohde & Schwarz	/	/
10	Pre-amplifier(26.5 GHz)	SCU26	1006788	Rohde & Schwarz	/	/

Anechoic chamber

Fully anechoic chamber by Frankonia German.


ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

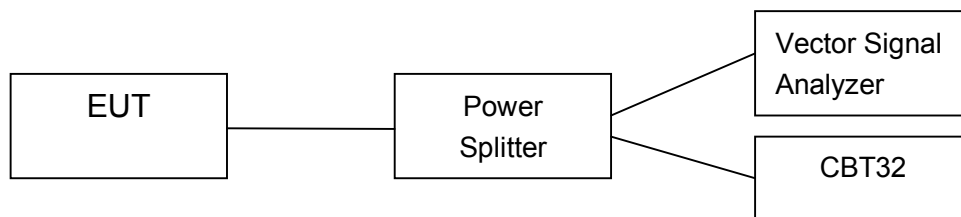

A.1.2. Radiated Emission Measurements


The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

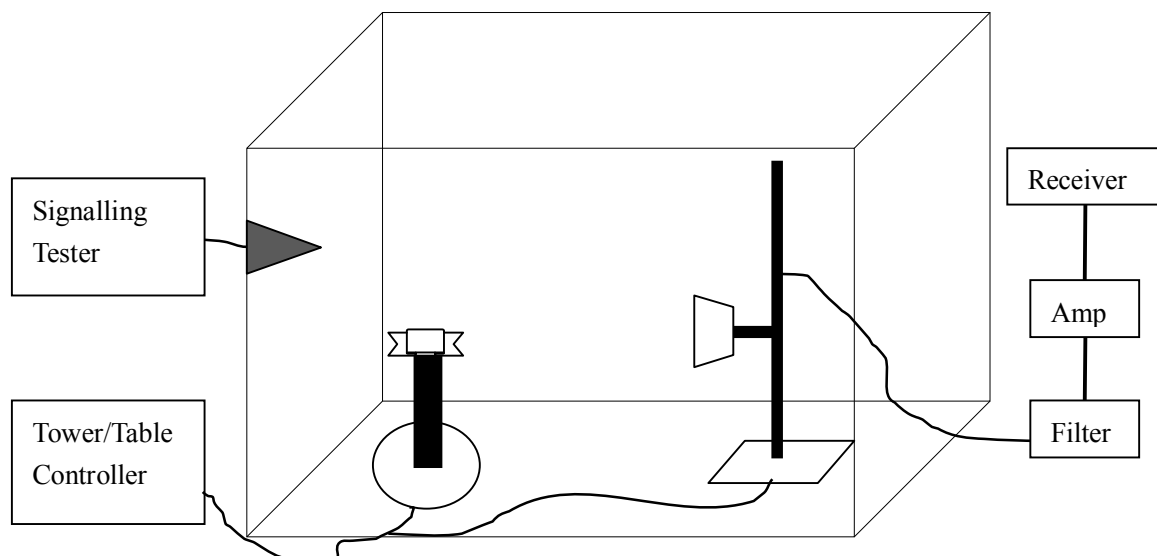

A.2. Peak Output Power – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.5

a) Use the following spectrum analyzer settings:

- Span: 6MHz
- RBW: 3MHz
- VBW: 3MHz
- Sweep time: 2.5ms
- Detector function: peak
- Trace: max hold

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power.

e) A plot of the test results and setup description shall be included in the test report.

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

Measurement Results:

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.23	8.75	8.74	P

For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.68	8.18	8.14	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	7.79	8.30	8.29	P

Conclusion: PASS

A.3. Frequency Band Edges – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- Span: 10 MHz
- Resolution Bandwidth: 100 kHz
- Video Bandwidth: 300 kHz
- Sweep Time: 5ms
- Detector: Peak
- Trace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

For GFSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.1	-56.17	P
	Hopping ON	Fig.2	-59.43	P
78	Hopping OFF	Fig.3	-61.42	P
	Hopping ON	Fig.4	-62.32	P

For $\pi/4$ DQPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.5	-56.21	P
	Hopping ON	Fig.6	-55.72	P
78	Hopping OFF	Fig.7	-60.19	P
	Hopping ON	Fig.8	-59.76	P


For 8DPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.9	-54.90	P
	Hopping ON	Fig.10	-56.45	P

78	Hopping OFF	Fig.11	-59.50	P
	Hopping ON	Fig.12	-56.79	P


Conclusion: PASS

Test graphs as below

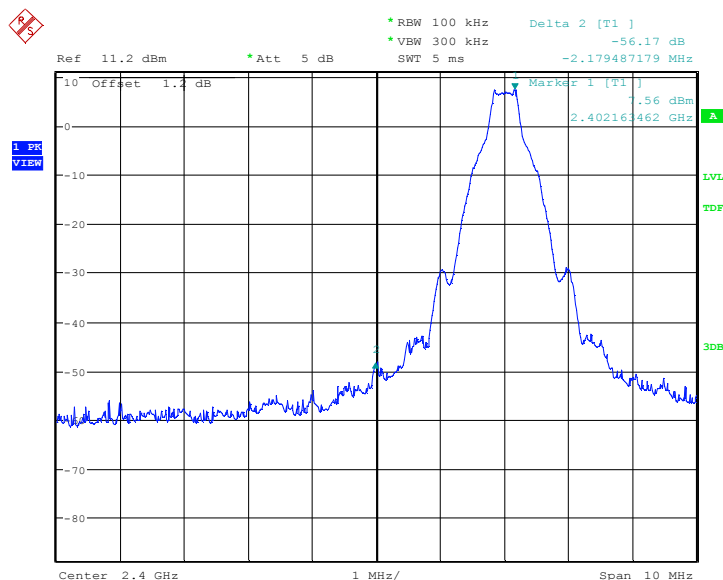


Date: 3,DEC.2014 17:41:06

Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

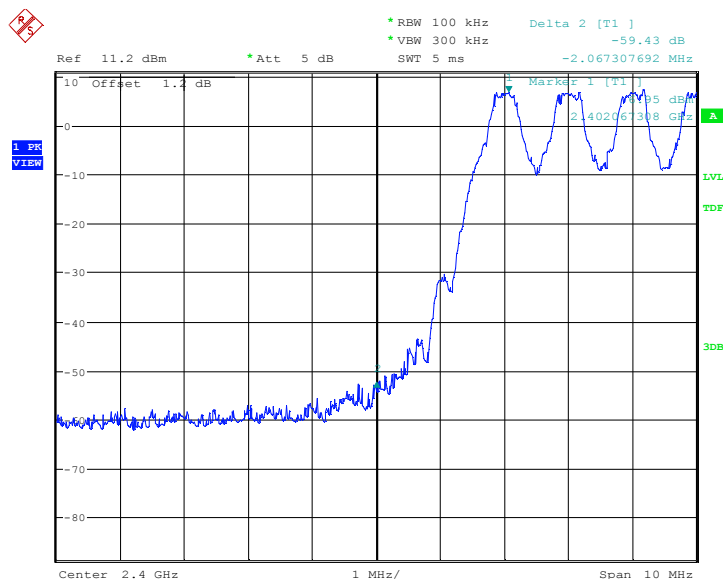


Date: 3,DEC.2014 17:43:25

Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

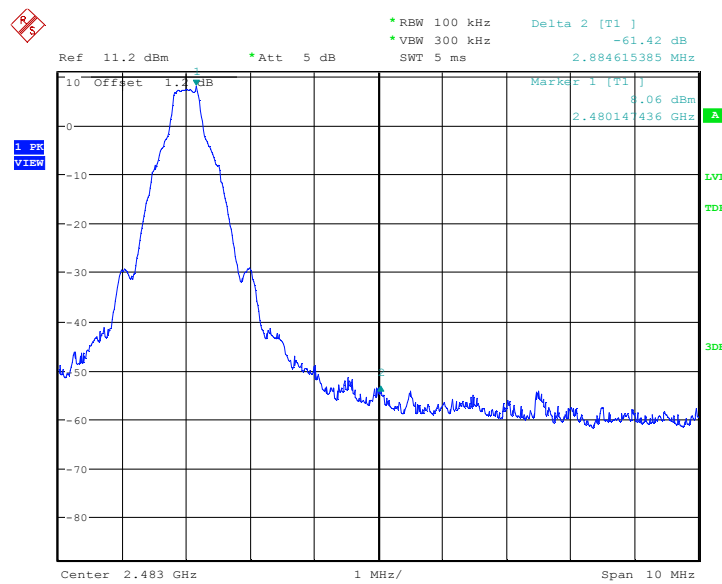


Date: 3.DEC.2014 17:41:23

Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

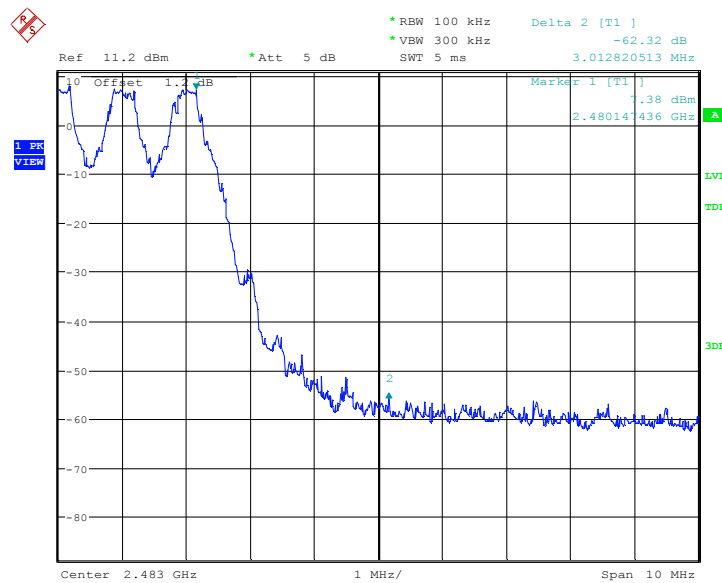


Date: 3.DEC.2014 17:45:28

Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On

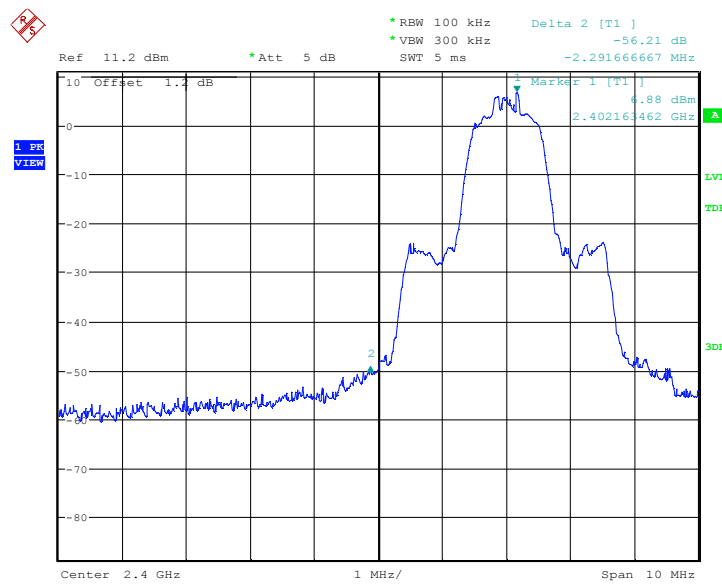


Date: 3.DEC.2014 18:03:04

Fig.5. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping Off

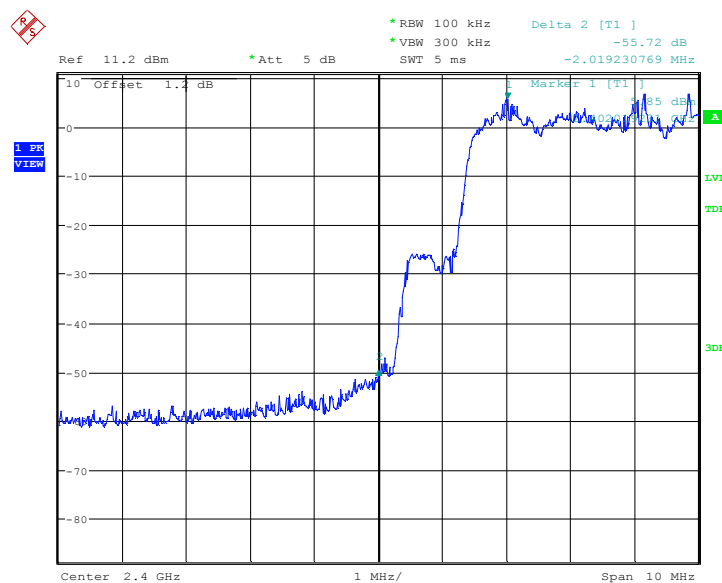


Date: 3.DEC.2014 18:05:24

Fig.6. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping On

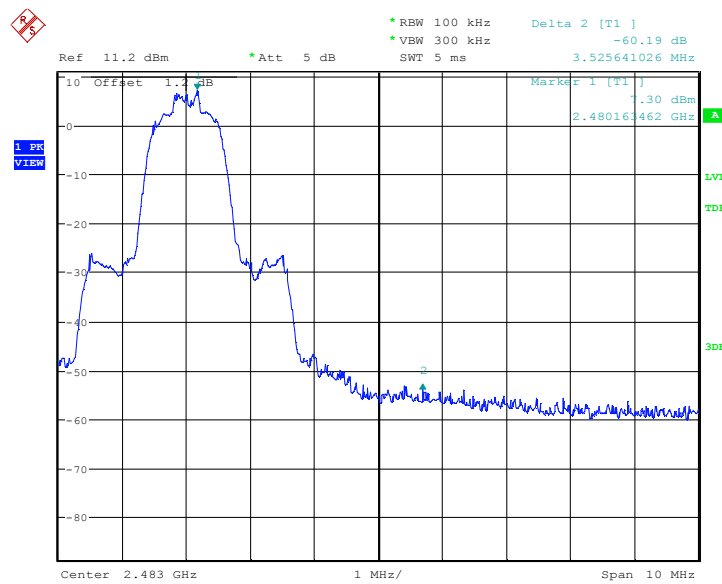


Date: 3.DEC.2014 18:03:21

Fig.7. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping Off

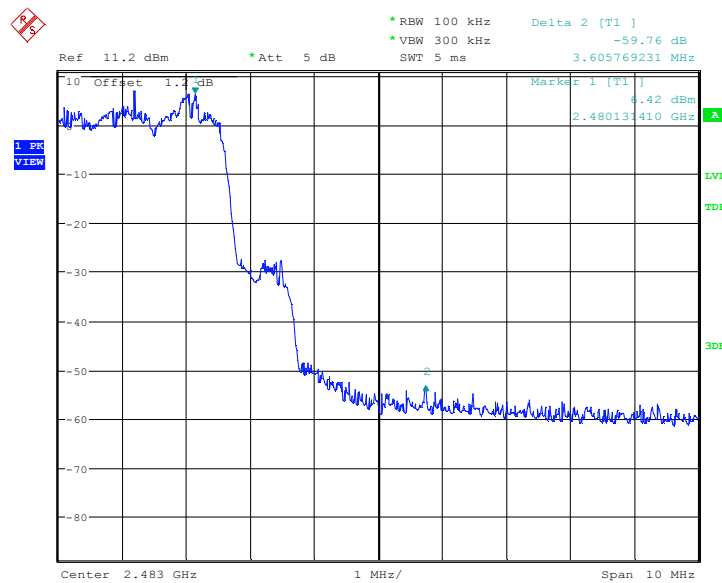


Date: 3.DEC.2014 18:07:26

Fig.8. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping On

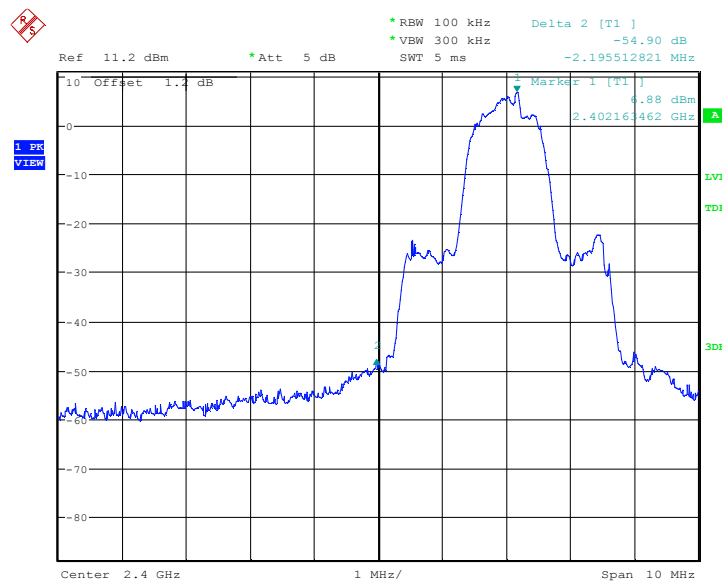


Date: 3.DEC.2014 18:25:03

Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

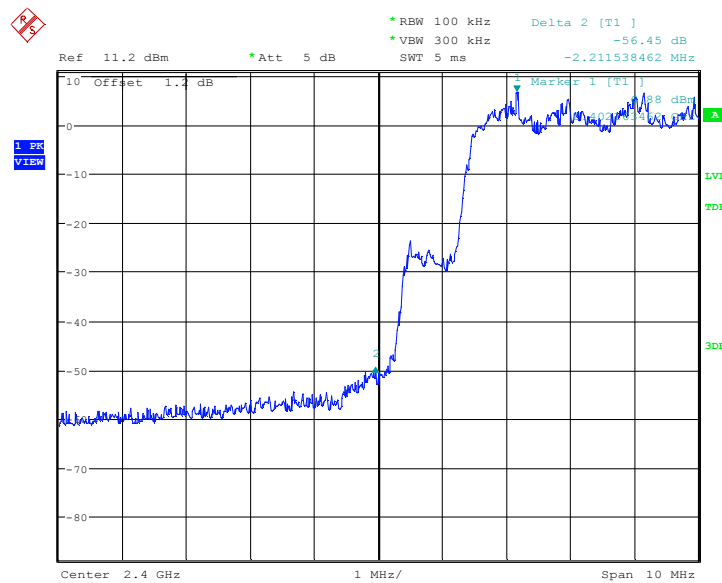


Date: 3.DEC.2014 18:27:22

Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

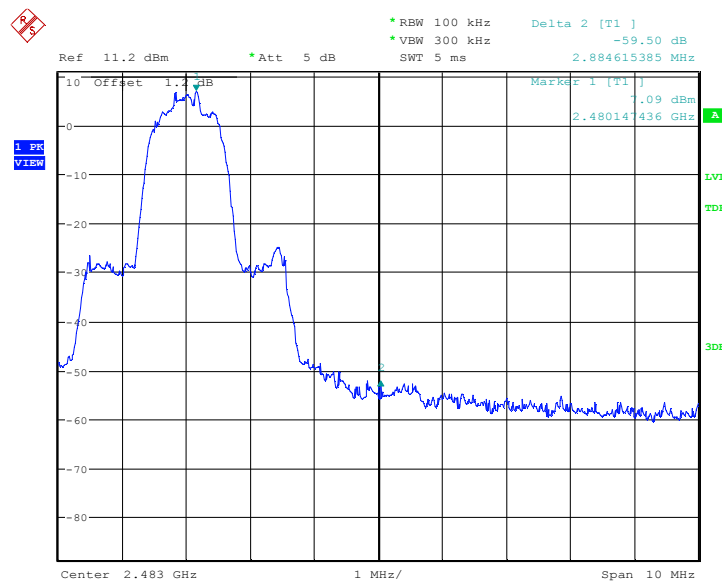

Date: 3.DEC.2014 18:25:20

Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

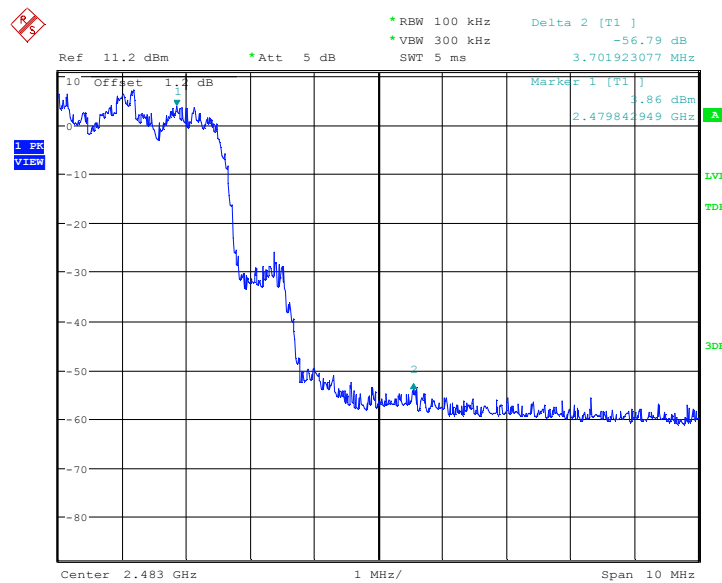

Date: 3.DEC.2014 18:29:26

Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On

A.4. Conducted Emission

Method of Measurement: See ANSI C63.10-clause 7.8.8

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:**For GFSK**

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.13	P

2402 MHz	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3 GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P
Ch 39 2441 MHz	Center Frequency	Fig.18	P
	30 MHz ~ 1 GHz	Fig.19	P
	1 GHz ~ 3 GHz	Fig.20	P
	3 GHz ~ 10 GHz	Fig.21	P
	10 GHz ~ 26 GHz	Fig.22	P
Ch 78 2480 MHz	Center Frequency	Fig.23	P
	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 10 GHz	Fig.26	P
	10 GHz ~ 26 GHz	Fig.27	P

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.28	P
	30 MHz ~ 1 GHz	Fig.29	P
	1 GHz ~ 3 GHz	Fig.30	P
	3 GHz ~ 10 GHz	Fig.31	P
	10 GHz ~ 26 GHz	Fig.32	P
Ch 39 2441 MHz	Center Frequency	Fig.33	P
	30 MHz ~ 1 GHz	Fig.34	P
	1 GHz ~ 3 GHz	Fig.35	P
	3 GHz ~ 10 GHz	Fig.36	P
	10 GHz ~ 26 GHz	Fig.37	P
Ch 78 2480 MHz	Center Frequency	Fig.38	P
	30 MHz ~ 1 GHz	Fig.39	P
	1 GHz ~ 3 GHz	Fig.40	P
	3 GHz ~ 10 GHz	Fig.41	P
	10 GHz ~ 26 GHz	Fig.42	P


For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	P
	30 MHz ~ 1 GHz	Fig.44	P
	1 GHz ~ 3 GHz	Fig.45	P
	3 GHz ~ 10 GHz	Fig.46	P
	10 GHz ~ 26 GHz	Fig.47	P

Ch 39 2441 MHz	Center Frequency	Fig.48	P
	30 MHz ~ 1 GHz	Fig.49	P
	1 GHz ~ 3 GHz	Fig.50	P
	3 GHz ~ 10 GHz	Fig.51	P
	10 GHz ~ 26 GHz	Fig.52	P
Ch 78 2480 MHz	Center Frequency	Fig.53	P
	30 MHz ~ 1 GHz	Fig.54	P
	1 GHz ~ 3 GHz	Fig.55	P
	3 GHz ~ 10 GHz	Fig.56	P
	10 GHz ~ 26 GHz	Fig.57	P


Conclusion: PASS

Test graphs as below

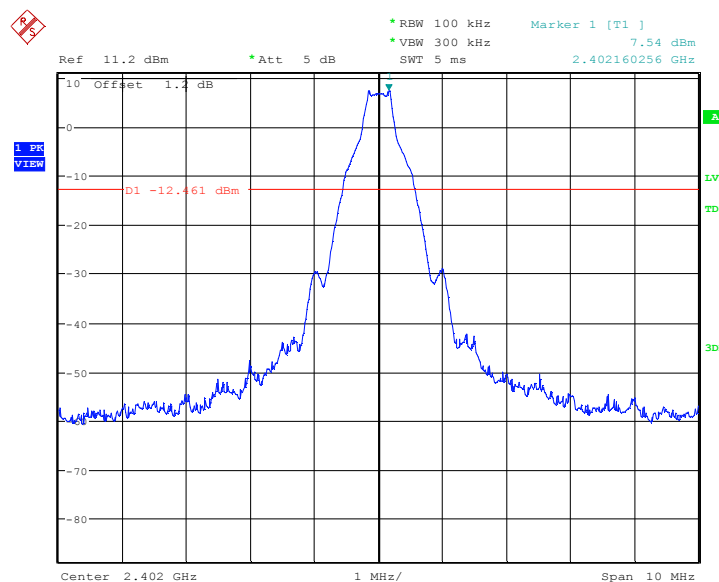


Date: 3,DEC,2014 17:45:47

Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz

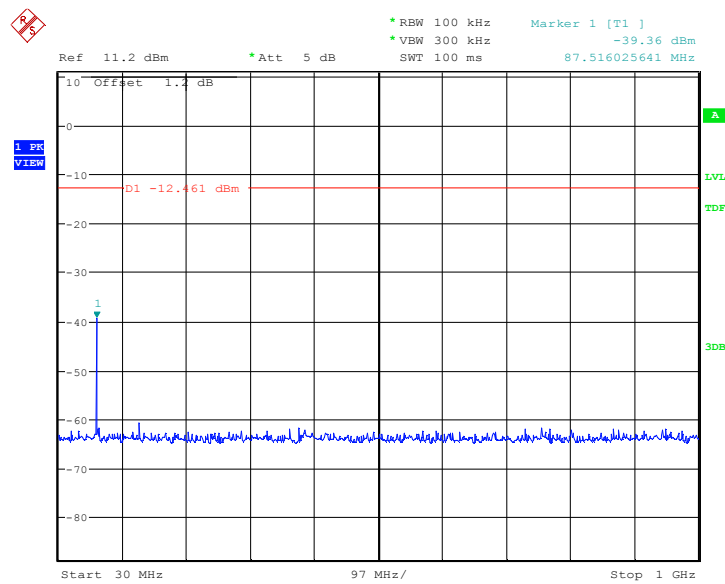


Date: 3.DEC.2014 17:46:03

Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

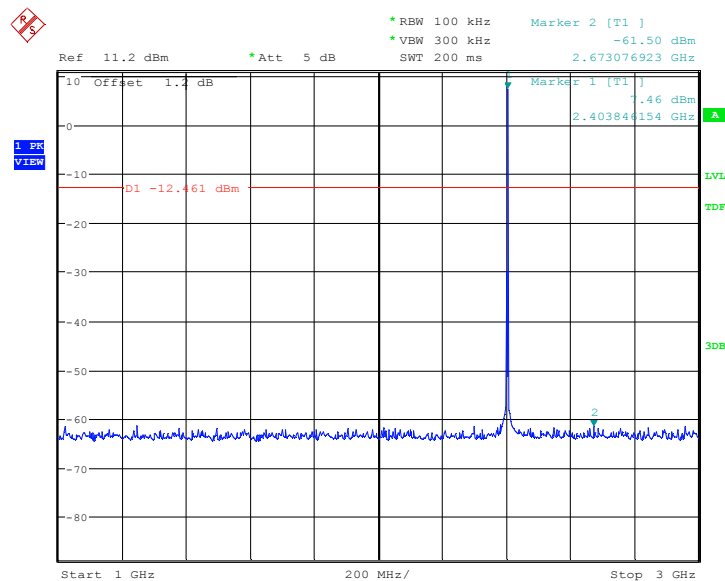


Date: 3.DEC.2014 17:46:35

Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

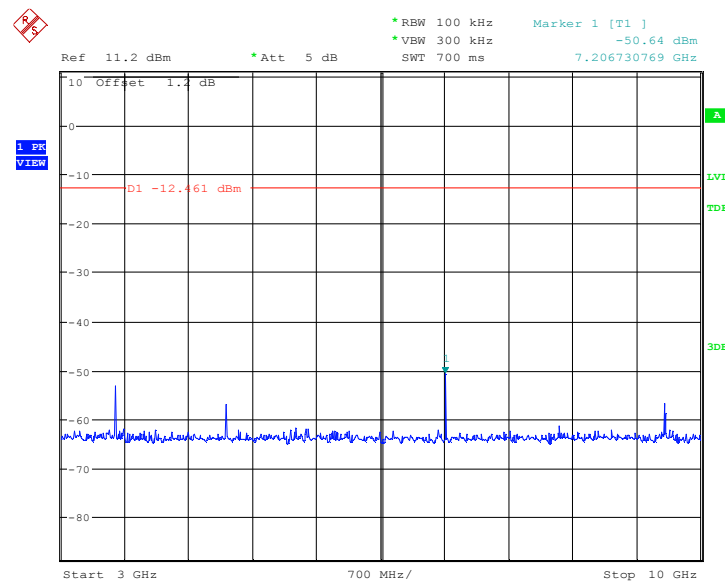


Date: 3.DEC.2014 17:46:51

Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

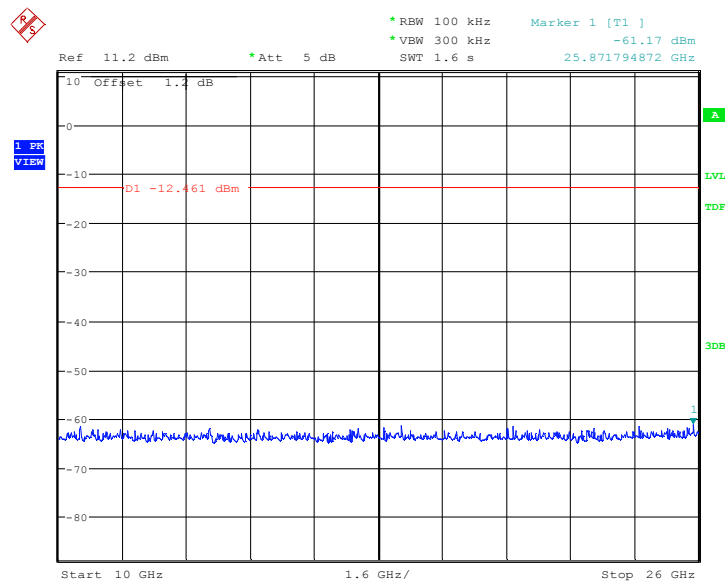


Date: 3.DEC.2014 17:47:08

Fig.17. Conducted spurious emission: GFSK, Channel 0, 10GHz - 26GHz

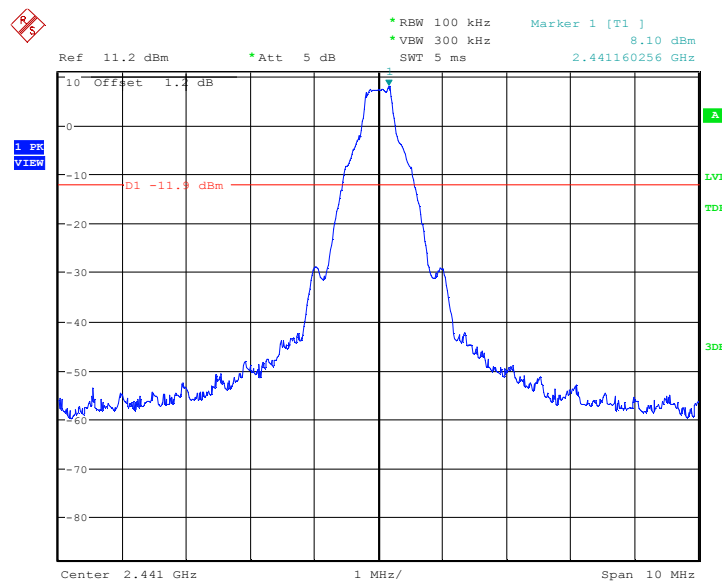


Date: 3.DEC.2014 17:47:24

Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

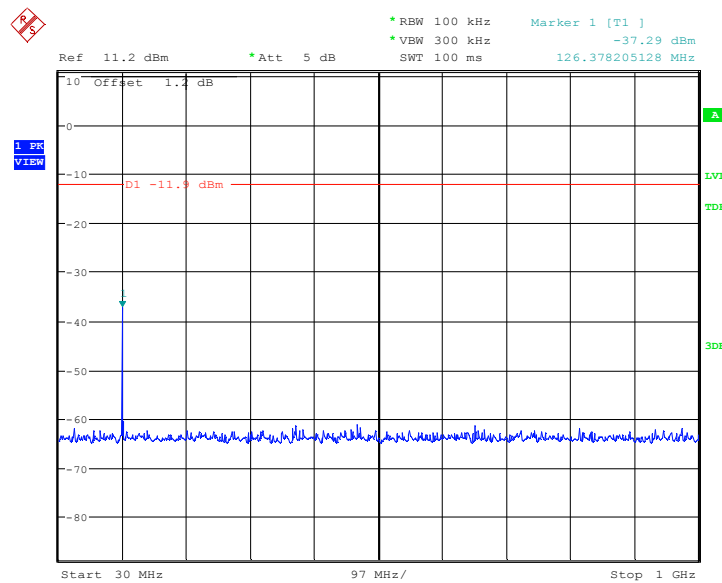


Date: 3.DEC.2014 17:47:41

Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

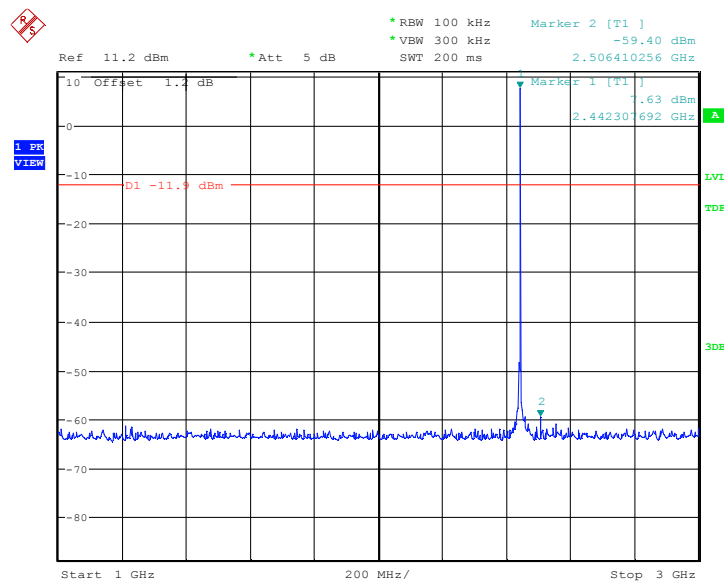


Date: 3.DEC.2014 17:48:12

Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

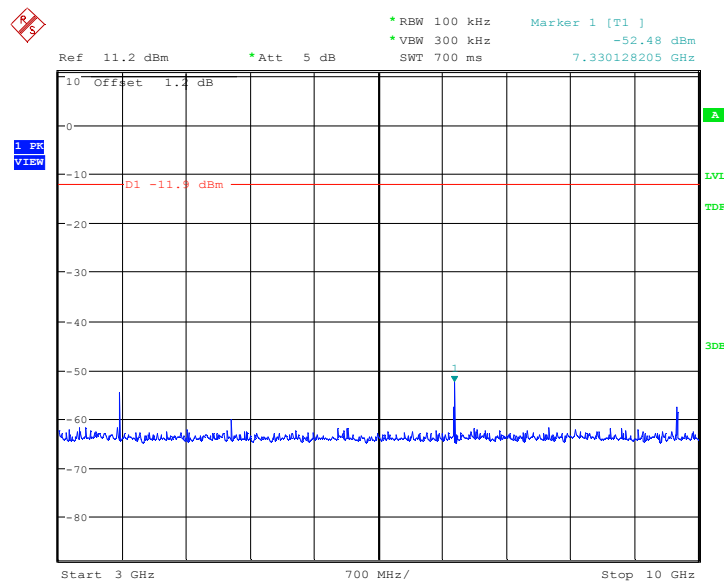


Date: 3.DEC.2014 17:48:29

Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

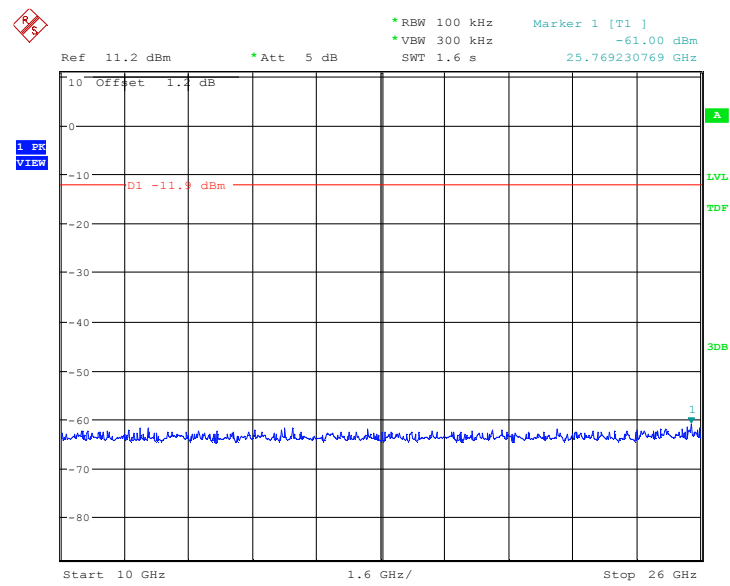


Date: 3.DEC.2014 17:48:45

Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

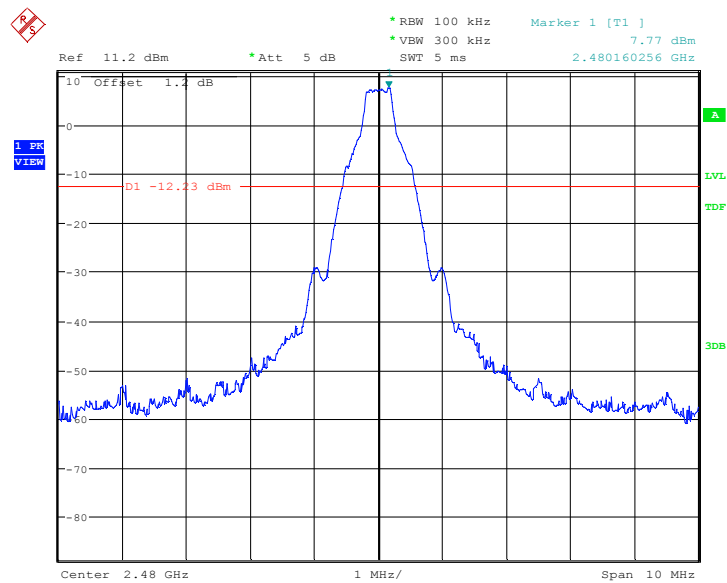


Date: 3.DEC.2014 17:49:02

Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz

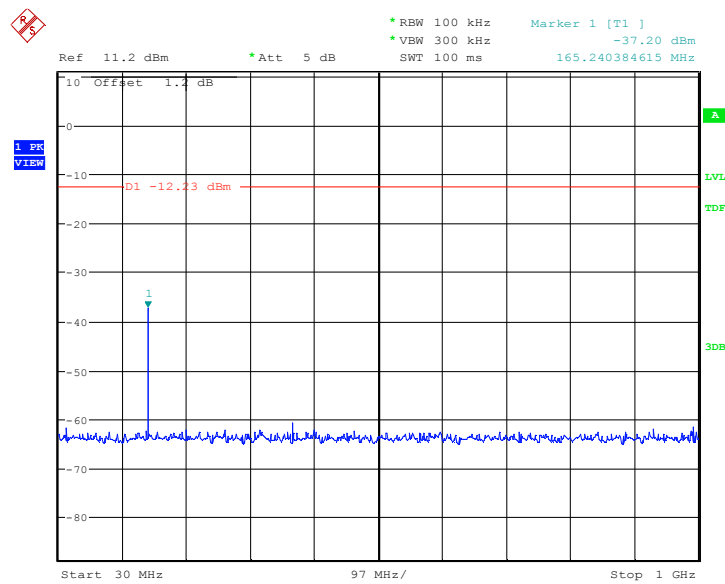


Date: 3.DEC.2014 17:49:19

Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

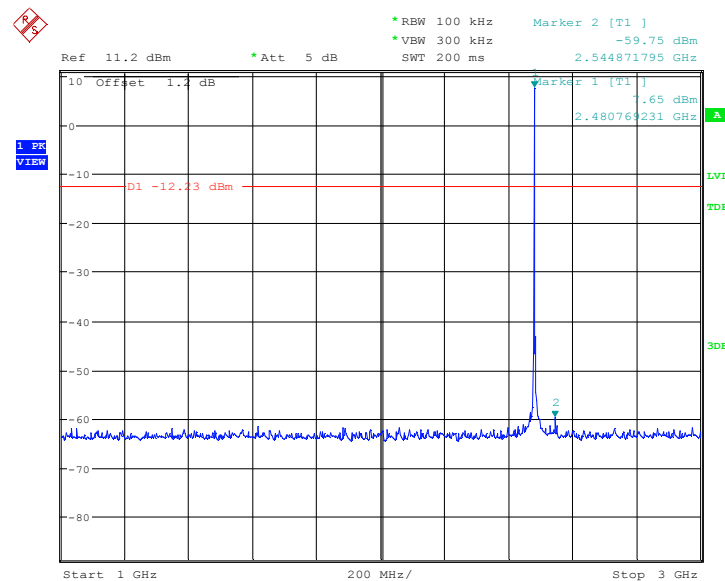


Date: 3.DEC.2014 17:49:50

Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

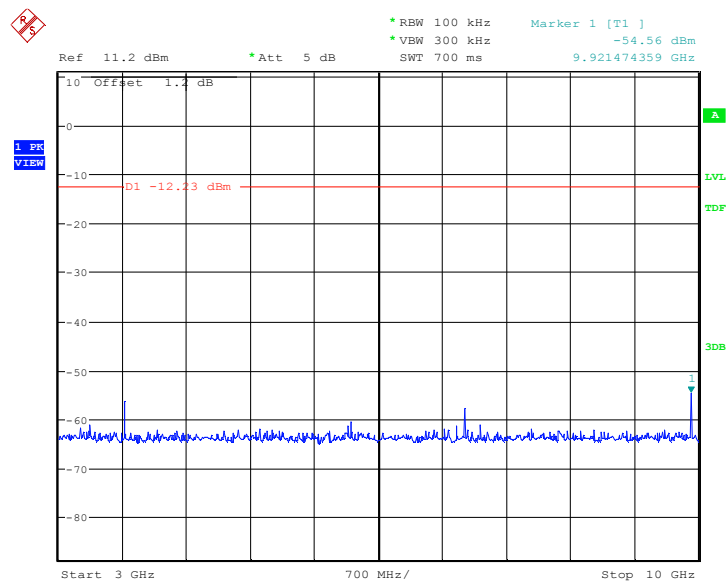


Date: 3.DEC.2014 17:50:07

Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

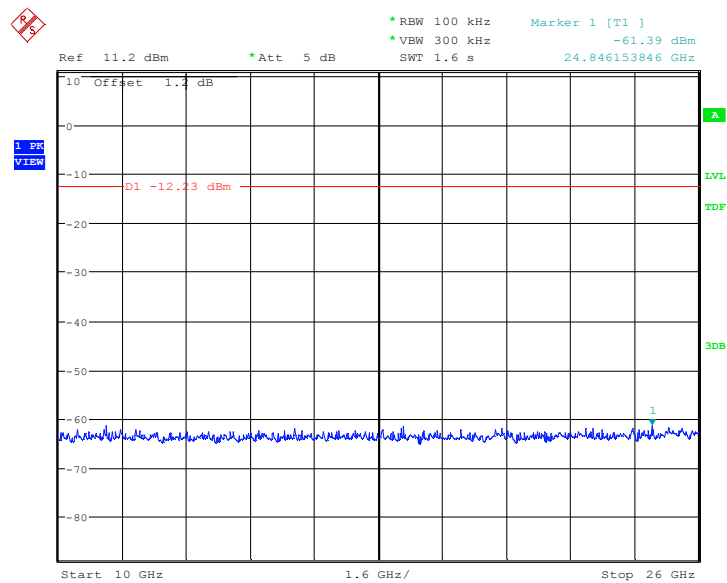


Date: 3.DEC.2014 17:50:23

Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz

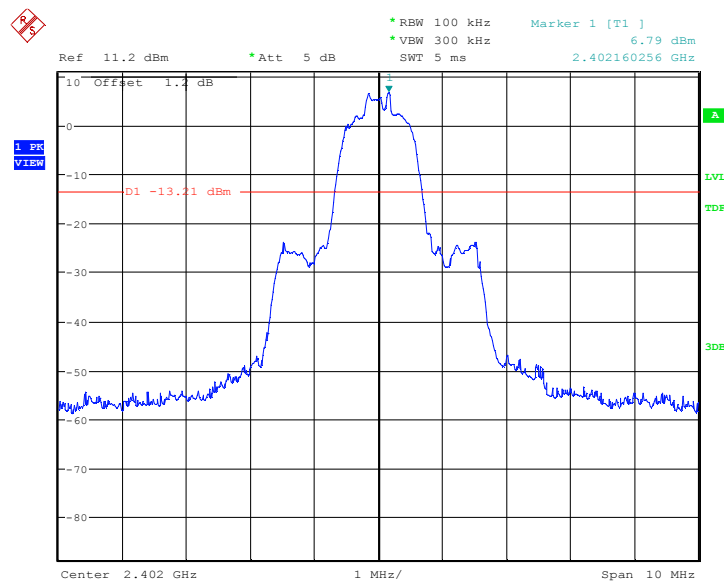


Date: 3.DEC.2014 18:07:45

Fig.28. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0,2402MHz

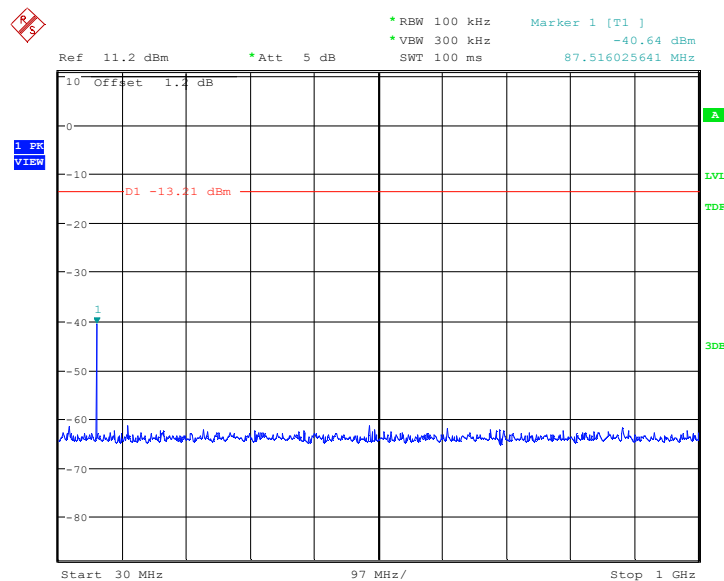


Date: 3.DEC.2014 18:08:02

Fig.29. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 30MHz - 1GHz

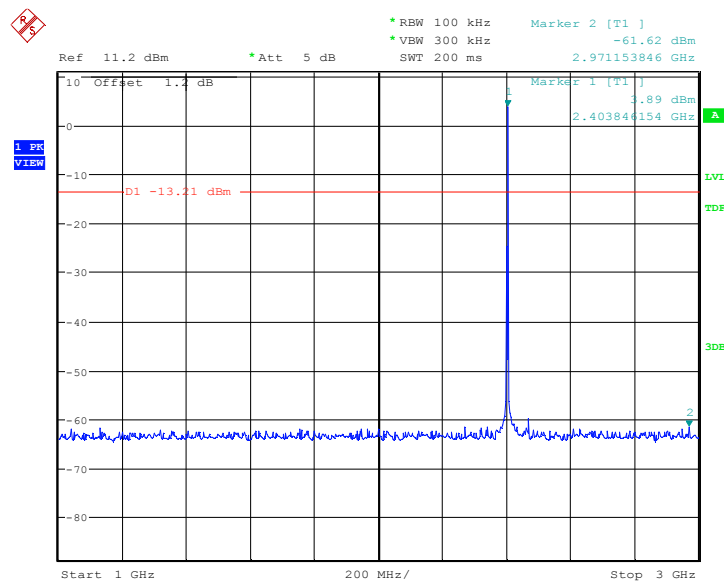


Date: 3.DEC.2014 18:08:34

Fig.30. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 1GHz - 3GHz

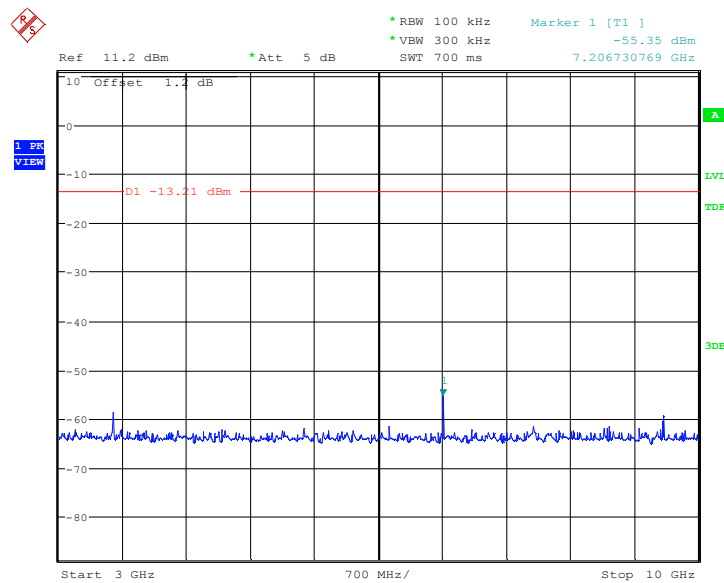


Date: 3.DEC.2014 18:08:50

Fig.31. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 3GHz - 10GHz

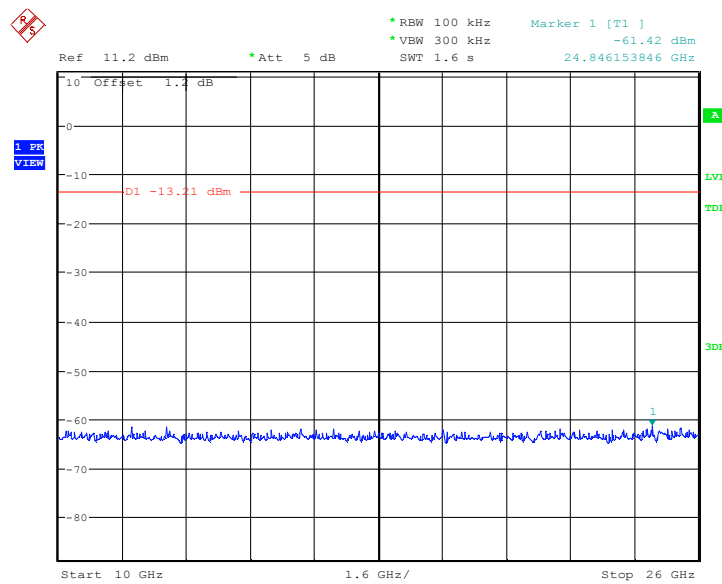


Date: 3.DEC.2014 18:09:07

Fig.32. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 10GHz - 26GHz

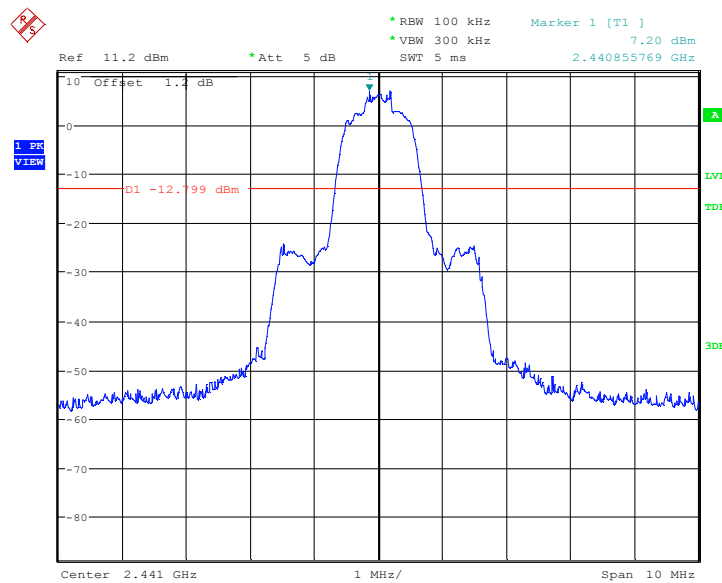


Date: 3.DEC.2014 18:09:23

Fig.33. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 2441MHz

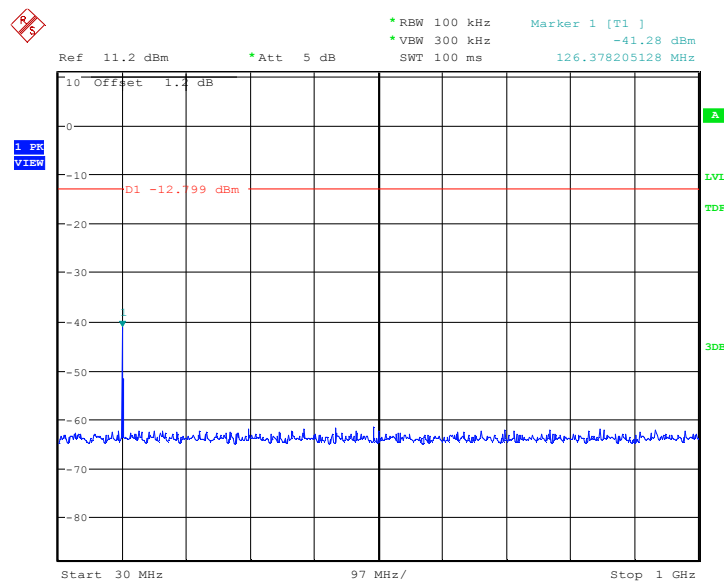


Date: 3.DEC.2014 18:09:40

Fig.34. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 30MHz - 1GHz

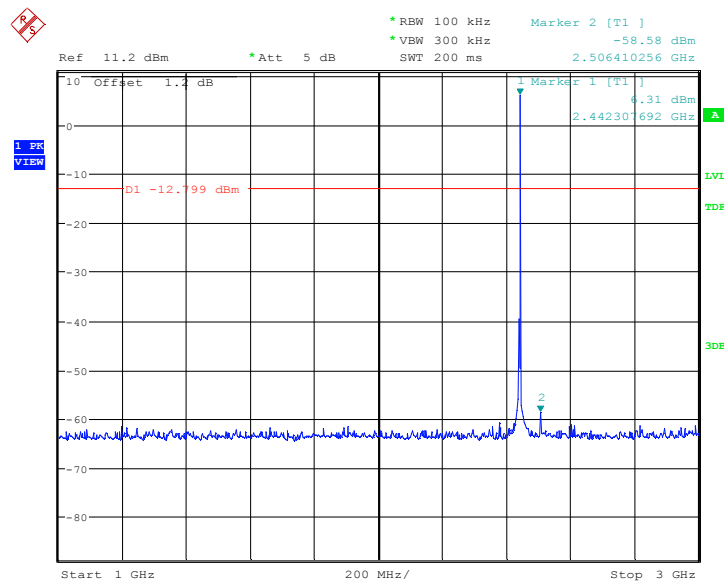


Date: 3.DEC.2014 18:10:11

Fig.35. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 1GHz - 3GHz

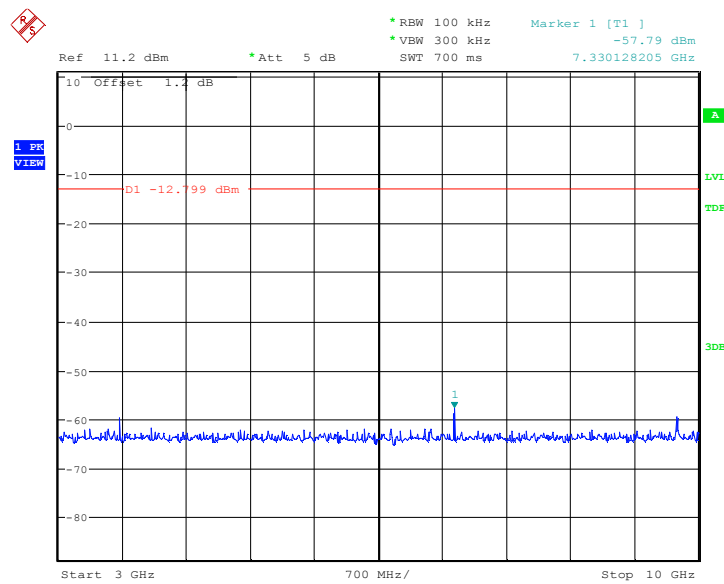


Date: 3.DEC.2014 18:10:28

Fig.36. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 3GHz - 10GHz

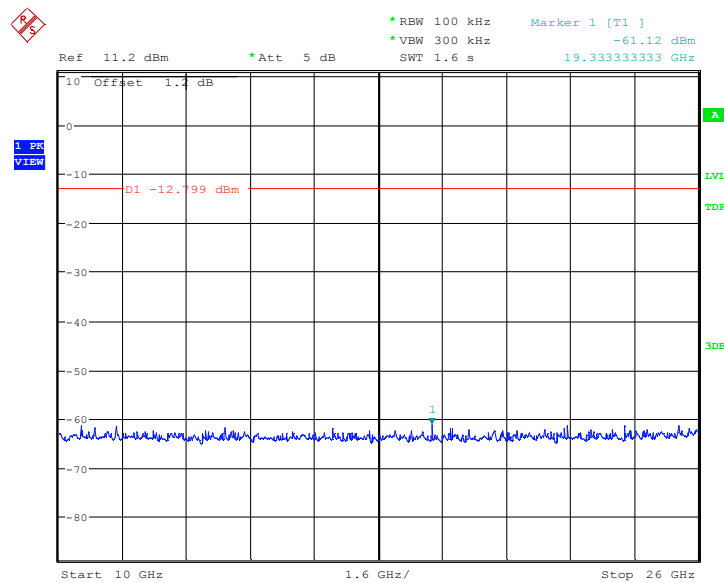


Date: 3.DEC.2014 18:10:44

Fig.37. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 10GHz – 26GHz

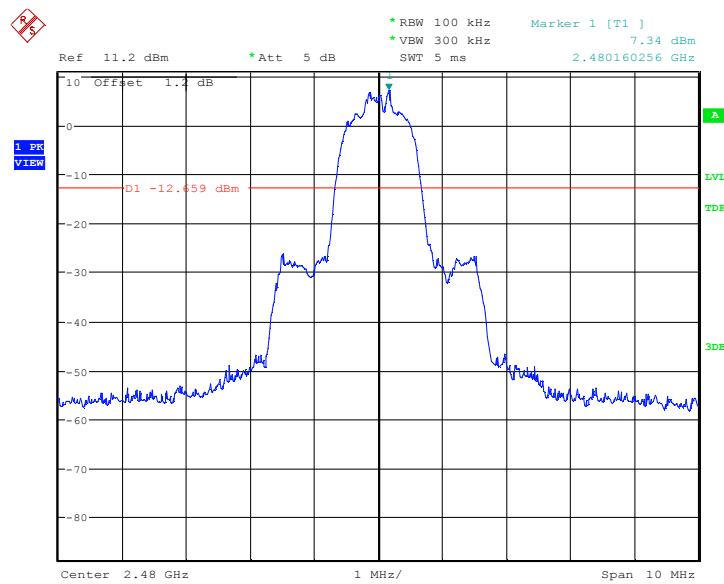


Date: 3.DEC.2014 18:11:01

Fig.38. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 2480MHz

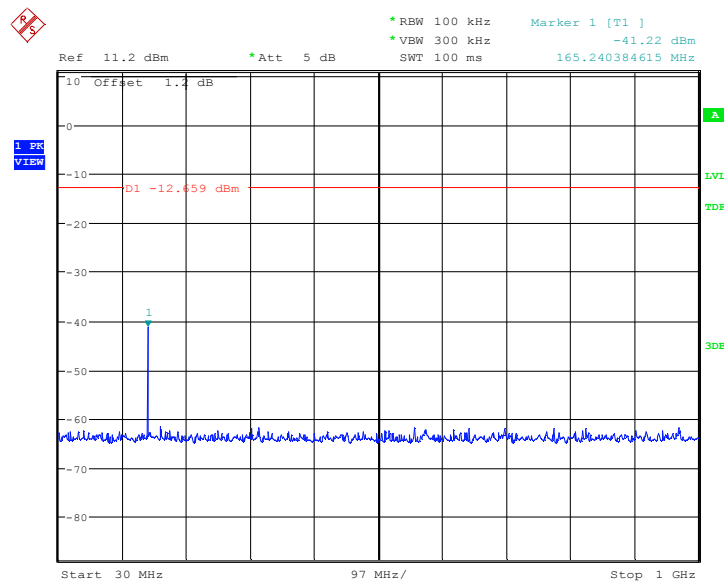


Date: 3.DEC.2014 18:11:18

Fig.39. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 30MHz - 1GHz

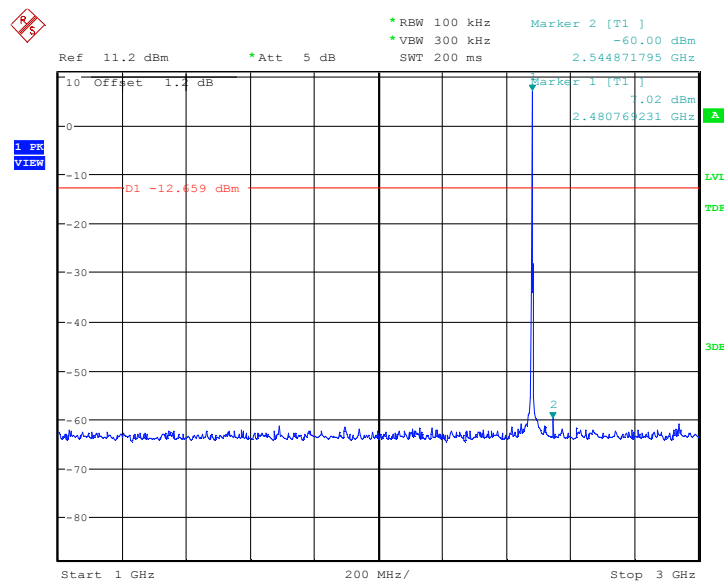


Date: 3.DEC.2014 18:11:49

Fig.40. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 1GHz - 3GHz

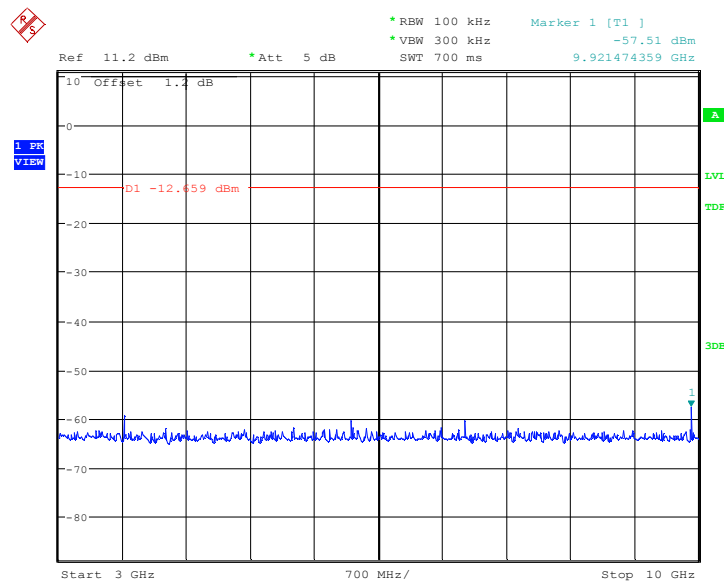


Date: 3.DEC.2014 18:12:06

Fig.41. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 3GHz - 10GHz

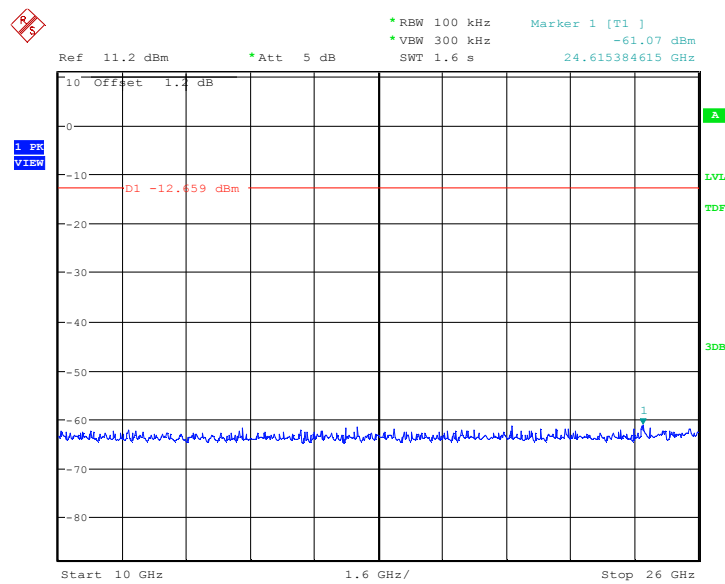


Date: 3.DEC.2014 18:12:22

Fig.42. Fig.30 Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 10GHz - 26GHz

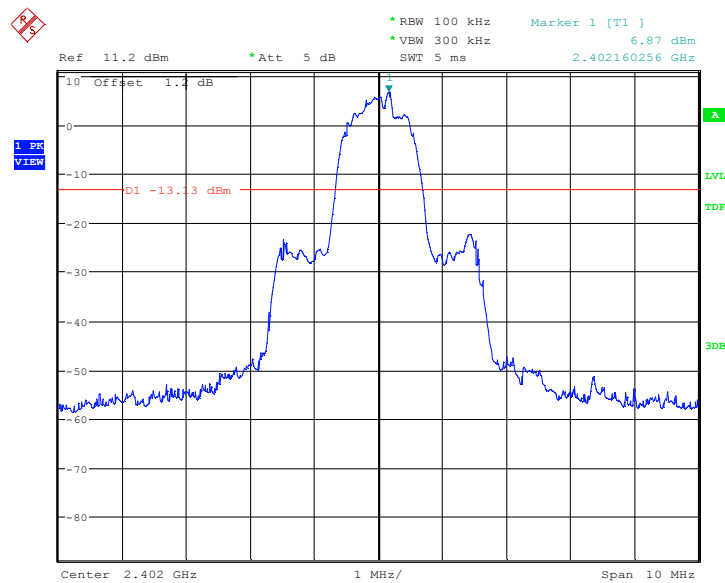


Date: 3.DEC.2014 18:29:45

Fig.43. Conducted spurious emission: 8DPSK, Channel 0, 2402MHz

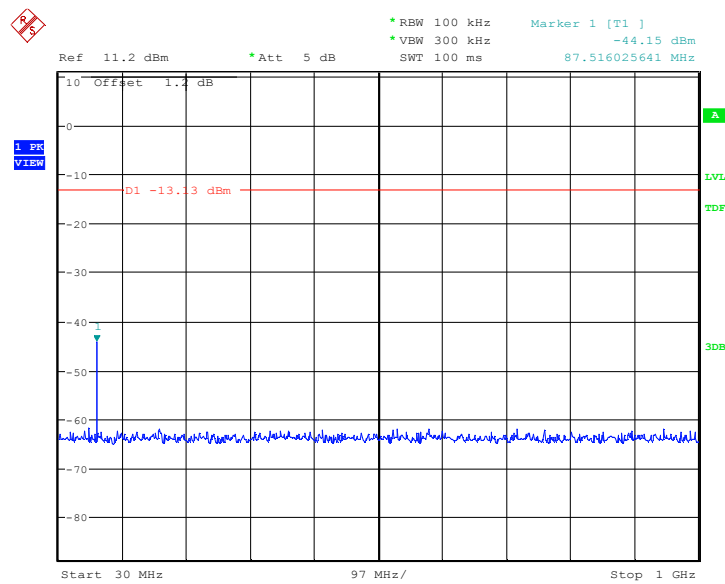


Date: 3.DEC.2014 18:30:01

Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

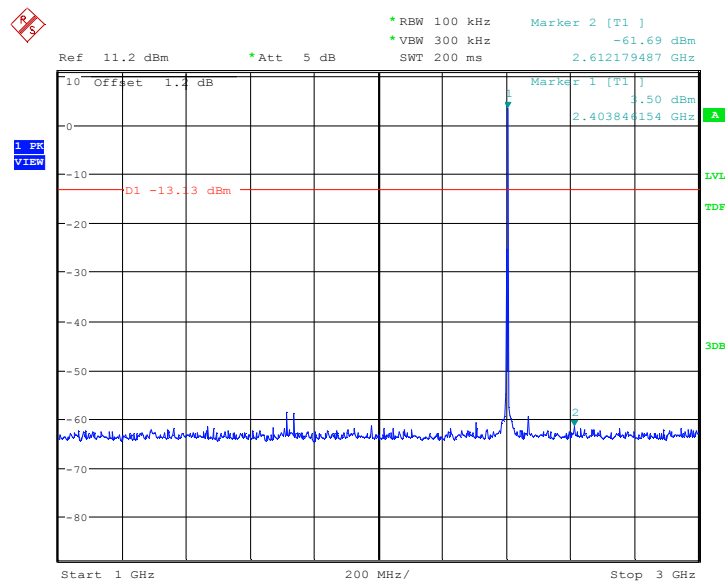


Date: 3.DEC.2014 18:30:33

Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

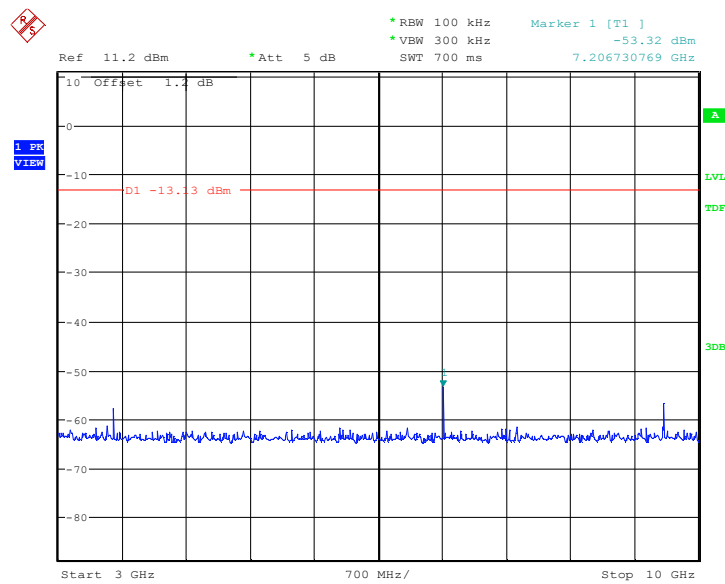

Date: 3.DEC.2014 18:30:49

Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

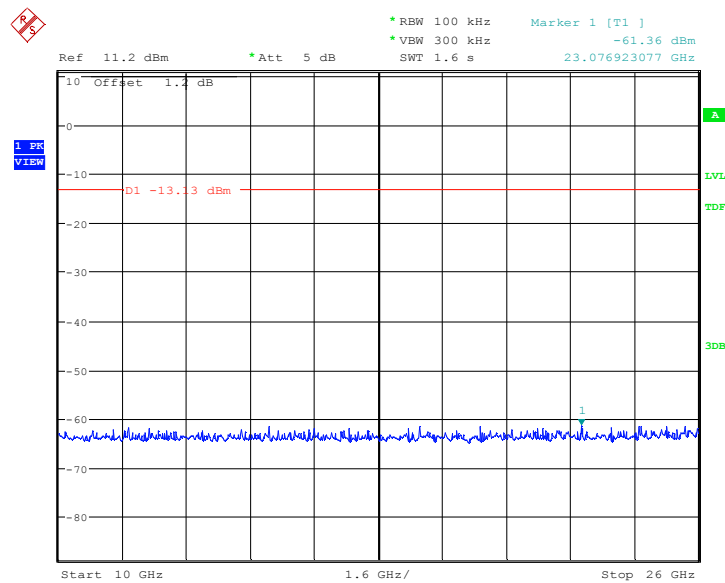

Date: 3.DEC.2014 18:31:06


Fig.47. Conducted spurious emission: 8DPSK, Channel 0, 10GHz - 26GHz



Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz




Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

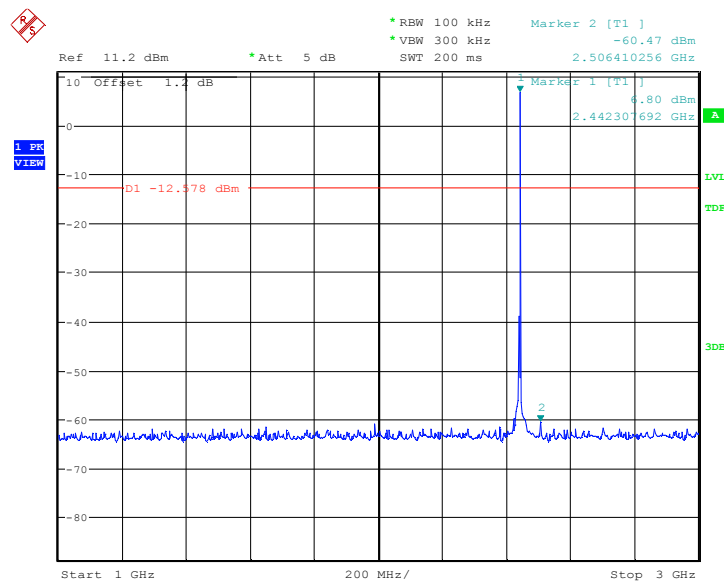


Date: 3.DEC.2014 18:32:11

Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

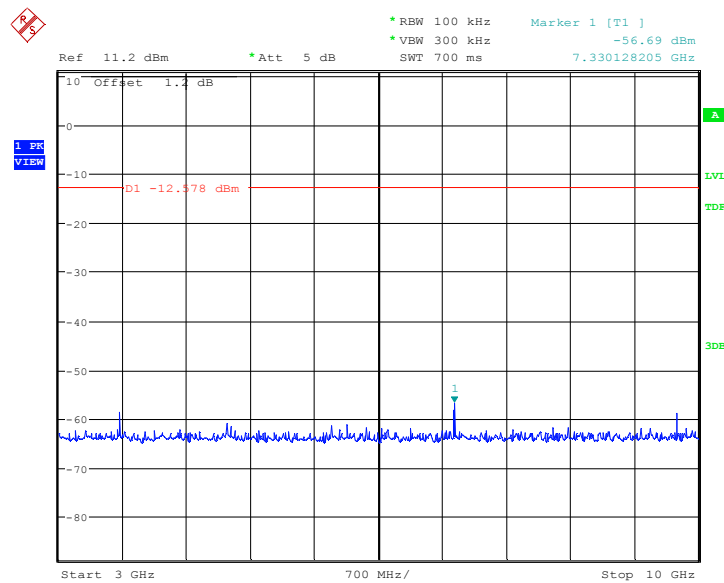


Date: 3.DEC.2014 18:32:27

Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

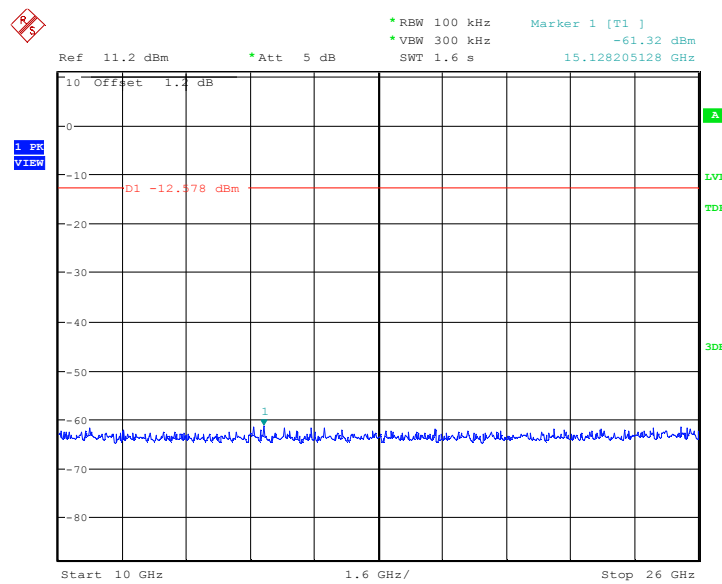


Date: 3.DEC.2014 18:32:44

Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

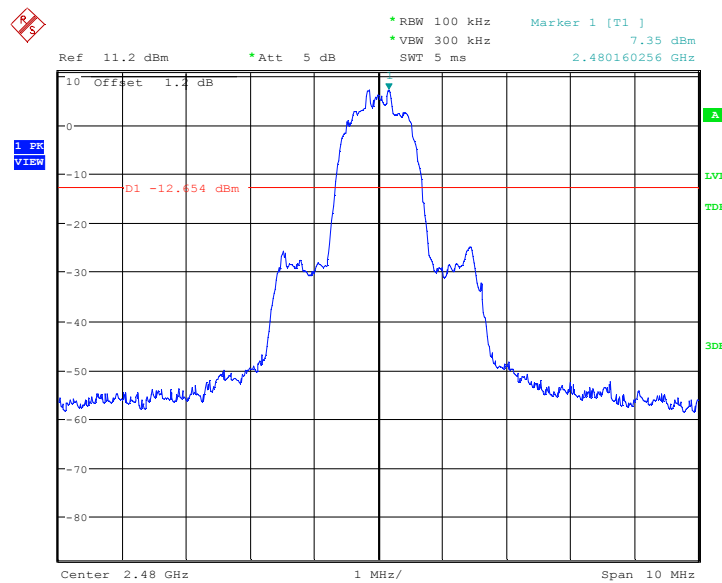


Date: 3.DEC.2014 18:33:00

Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

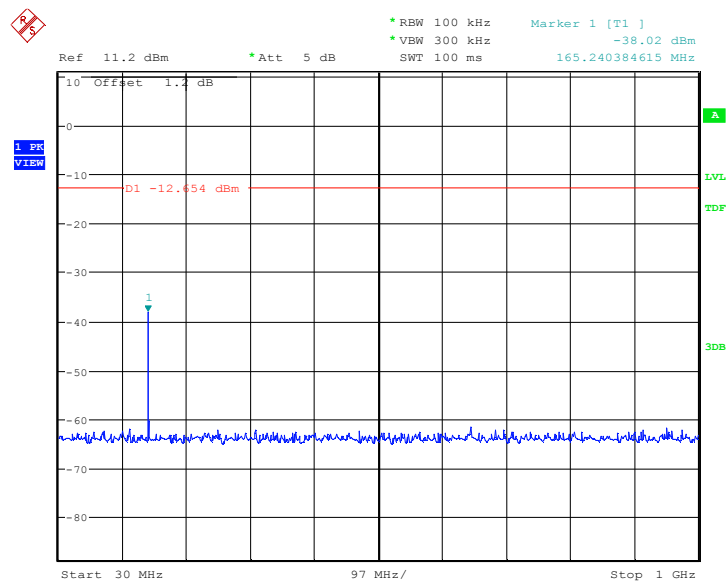


Date: 3.DEC.2014 18:33:17

Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

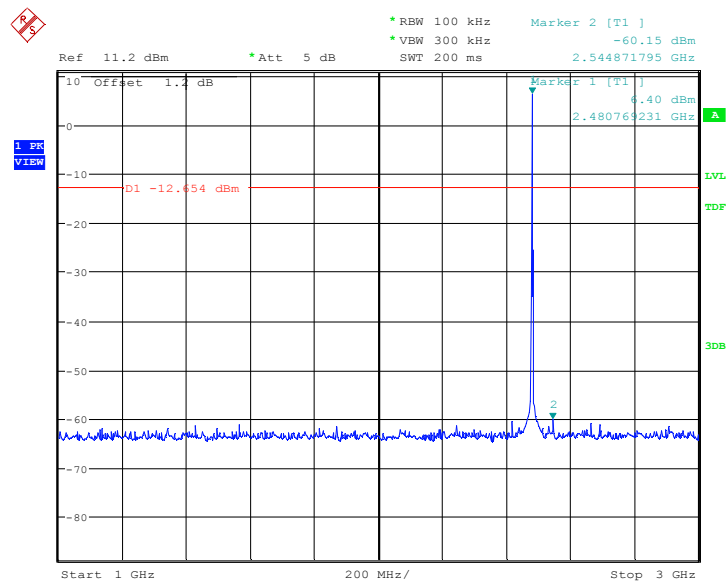


Date: 3.DEC.2014 18:33:48

Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

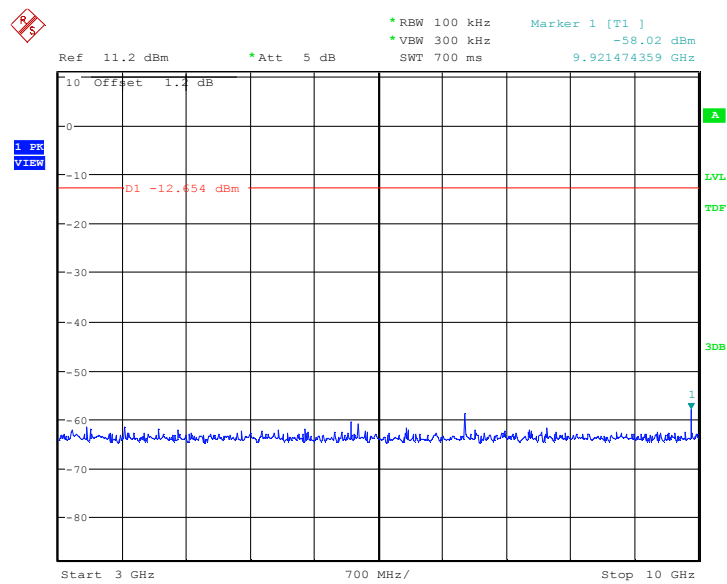

Date: 3.DEC.2014 18:34:05

Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

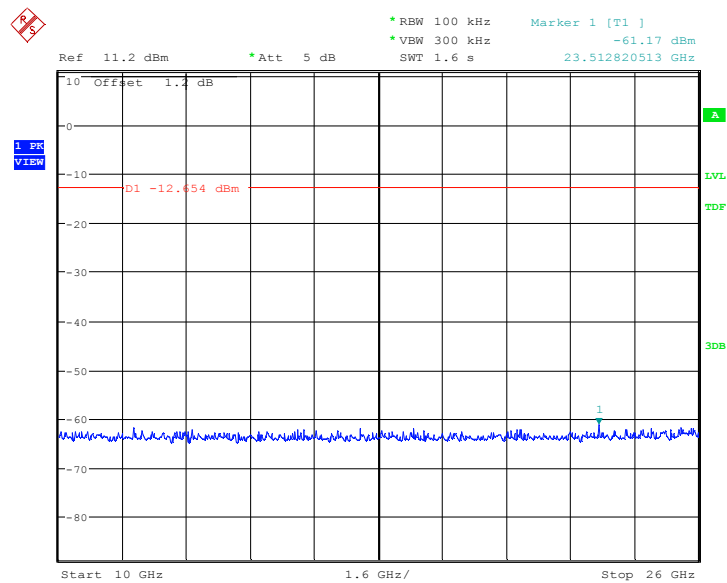

Date: 3.DEC.2014 18:34:21

Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

A.5. Radiated Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

Result= P_{Mea} +ARPL

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.58	P
	3 GHz ~ 18 GHz	Fig.59	P
Ch 39 2441 MHz	9 kHz ~ 30 MHz	Fig.60	P
	30 MHz ~ 1 GHz	Fig.61	P
	1 GHz ~ 3 GHz	Fig.62	P
	3 GHz ~ 18 GHz	Fig.63	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.64	P
	3 GHz ~ 18 GHz	Fig.65	P
Power	2.38GHz~2.4GHz---L	Fig.66	P

Power	2.45GHz~2.5GHz---H	Fig.67	P
For all channels	18 GHz ~ 26 GHz	Fig.68	P

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.69	P
	3 GHz ~ 18 GHz	Fig.70	P
Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.71	P
	1 GHz ~ 3 GHz	Fig.72	P
	3 GHz ~ 18 GHz	Fig.73	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.74	P
	3 GHz ~ 18 GHz	Fig.75	P
Power	2.38GHz~2.4GHz---L	Fig.76	P
Power	2.45GHz~2.5GHz---H	Fig.77	P
For all channels	18 GHz ~ 26 GHz	Fig.78	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.79	P
	3 GHz ~ 18 GHz	Fig.80	P
Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.81	P
	1 GHz ~ 3 GHz	Fig.82	P
	3 GHz ~ 18 GHz	Fig.83	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.84	P
	3 GHz ~ 18 GHz	Fig.85	P
Power	2.38GHz~2.4GHz---L	Fig.86	P
Power	2.45GHz~2.5GHz---H	Fig.87	P
For all channels	18 GHz ~ 26 GHz	Fig.88	P

GFSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	PMea(dBuv/m)	Polarization
2390.000	35.1	-11.1	46.200	H
17998.500	42.2	27.9	14.300	H
17995.500	42.1	27.9	14.200	V
17977.500	42.0	27.9	14.100	V
17980.500	42.0	27.9	14.100	V
17964.000	41.9	27.9	14.000	V

GFSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
17997.000	42.5	27.9	14.600	H
17985.000	42.2	27.9	14.300	V
17979.000	42.2	27.9	14.300	V
17974.500	42.2	27.9	14.300	V
17995.500	42.1	27.9	14.200	H
17971.500	42.1	27.9	14.200	H

GFSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2483.519	41.7	-11.2	52.300	H
17971.500	42.1	27.9	15.100	V
17985.000	42.0	27.9	14.900	V
17979.000	42.0	-1.1	43.666	H
17994.000	42.0	27.9	14.700	H
17974.500	42.0	27.9	14.700	V

 $\pi/4$ DQPSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2389.825	35.1	-11.1	46.200	H
17955.000	41.9	27.9	14.000	V
17973.000	41.9	27.9	14.000	H
17995.500	41.7	27.9	13.800	V
17998.500	41.6	27.9	13.700	H
17956.500	41.6	27.9	13.700	V

 $\pi/4$ DQPSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
17997.000	42.0	27.9	14.100	V
17977.500	41.9	27.9	14.000	V
17971.500	41.7	27.9	13.800	V
17967.000	41.7	27.9	13.800	H
17974.500	41.7	27.9	13.800	V
17985.000	41.7	27.9	13.800	V

 $\pi/4$ DQPSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2483.513	40.6	-11.2	53.800	V
17998.500	42.4	27.9	15.900	H
17977.500	42.2	27.9	15.700	V
17995.500	41.9	-1.1	44.566	V
17991.000	41.9	27.9	15.600	V
17967.000	41.8	27.9	15.500	H

8DPSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2389.569	35.2	-11.1	46.300	V
17998.500	42.0	27.9	14.100	H
17977.500	41.9	27.9	14.000	V
17980.500	41.8	27.9	13.900	V
17991.000	41.7	27.9	13.800	H
17971.500	41.7	27.9	13.800	V

8DPSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
17994.000	42.0	27.9	14.100	H
17977.500	41.8	27.9	13.900	H
17997.000	41.8	27.9	13.900	V
17985.000	41.8	27.9	13.900	V
17967.000	41.7	27.9	13.800	H
17991.000	41.7	27.9	13.800	V

8DPSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2483.550	40.3	-11.2	51.500	H
18000.000	41.9	-1.1	42.966	V
17994.000	41.8	27.9	13.900	V
17970.000	41.7	27.9	13.800	V
17973.000	41.7	27.9	13.800	V
17988.000	41.6	27.9	13.700	H

Conclusion: PASS

Test graphs as below:

RE_BT_1G-3GHz

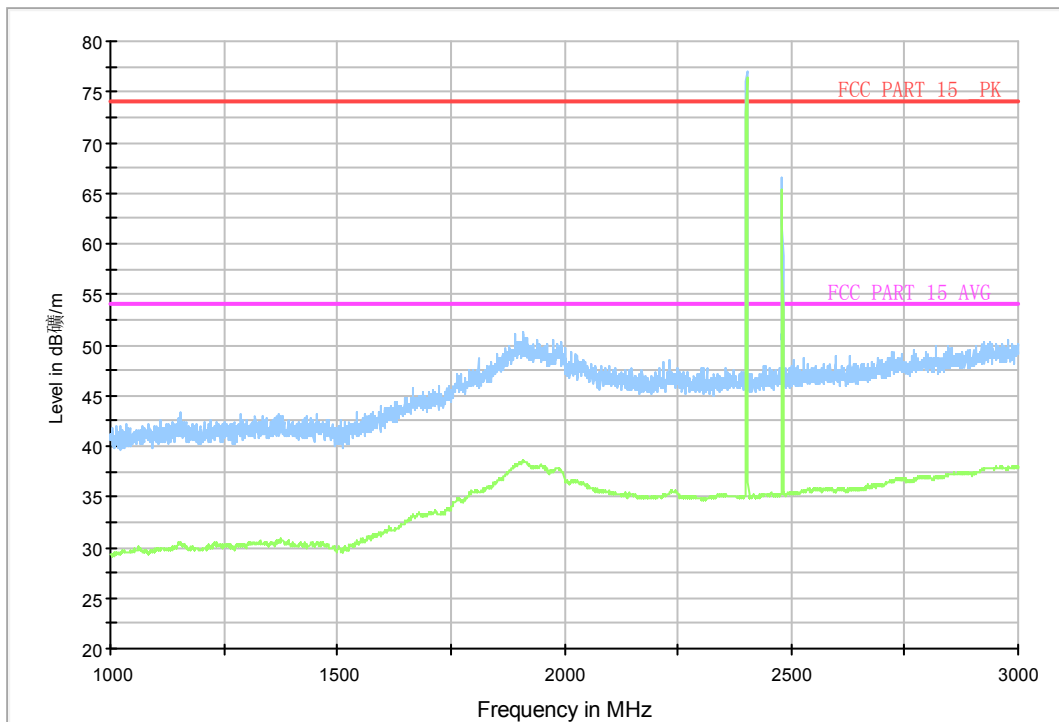


Fig.58. Radiated emission: GFSK, Channel 0, 1 GHz - 3 GHz

Normal RE_3G-18GHz

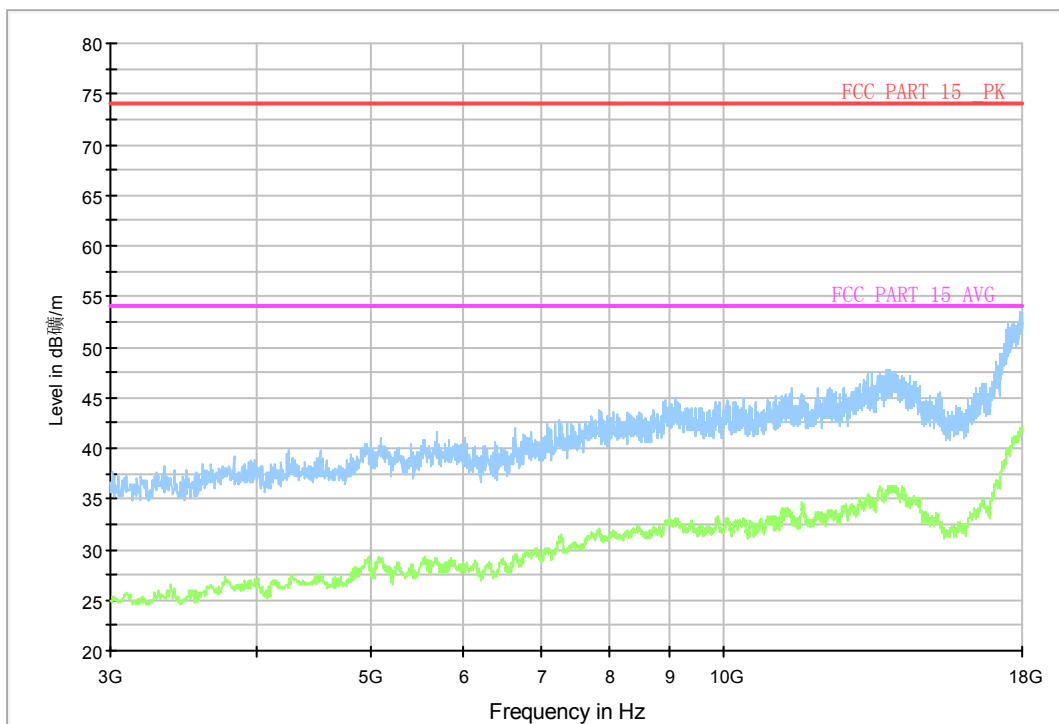


Fig.59. Radiated emission: GFSK, Channel 0, 3 GHz - 18 GHz

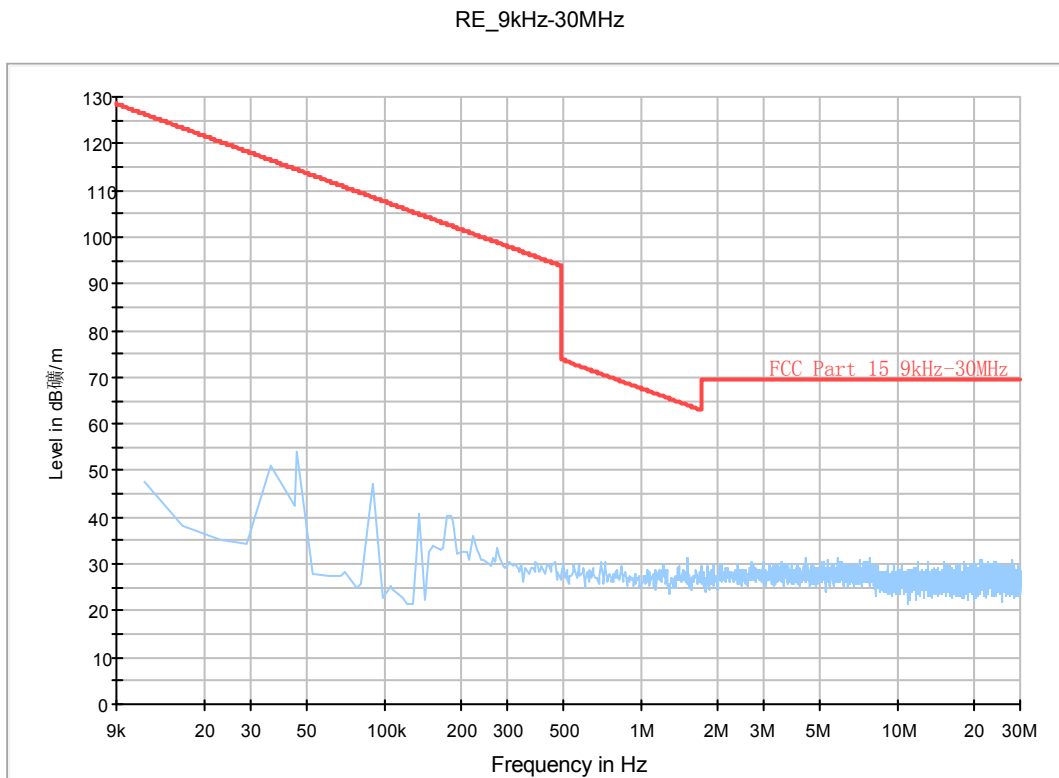


Fig.60. Radiated emission: GFSK, Channel 39, 9 kHz - 30 MHz

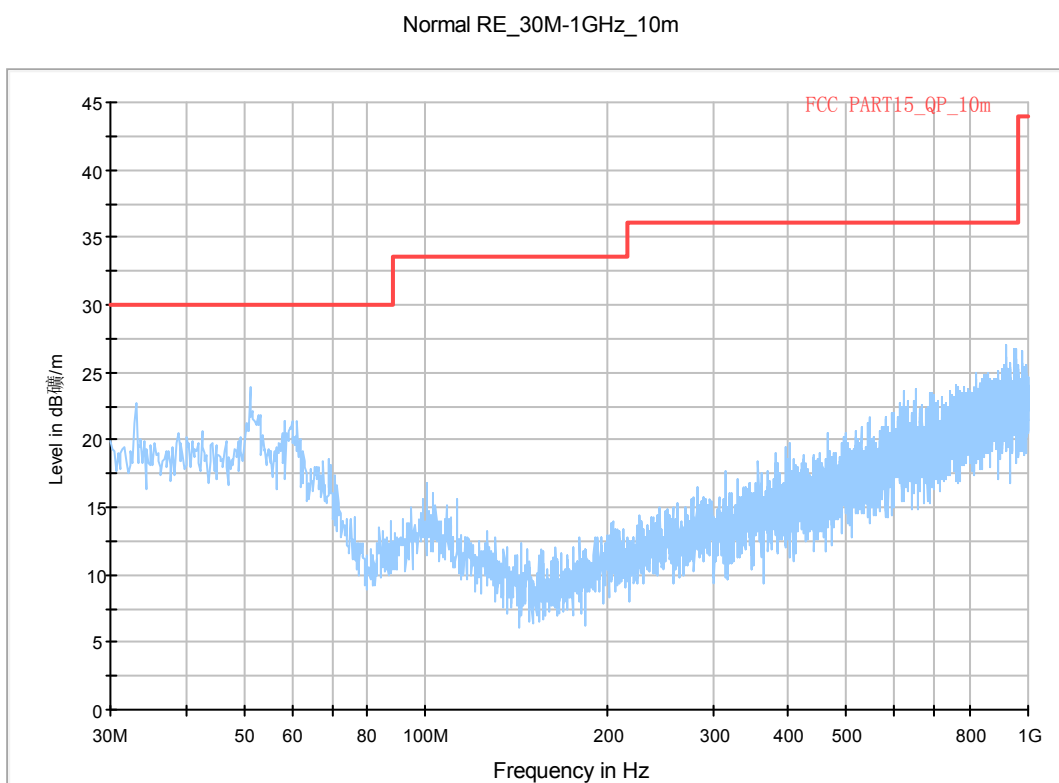


Fig.61. Radiated emission: GFSK, Channel 39, 30 MHz - 1 GHz

RE_BT_1G-3GHz

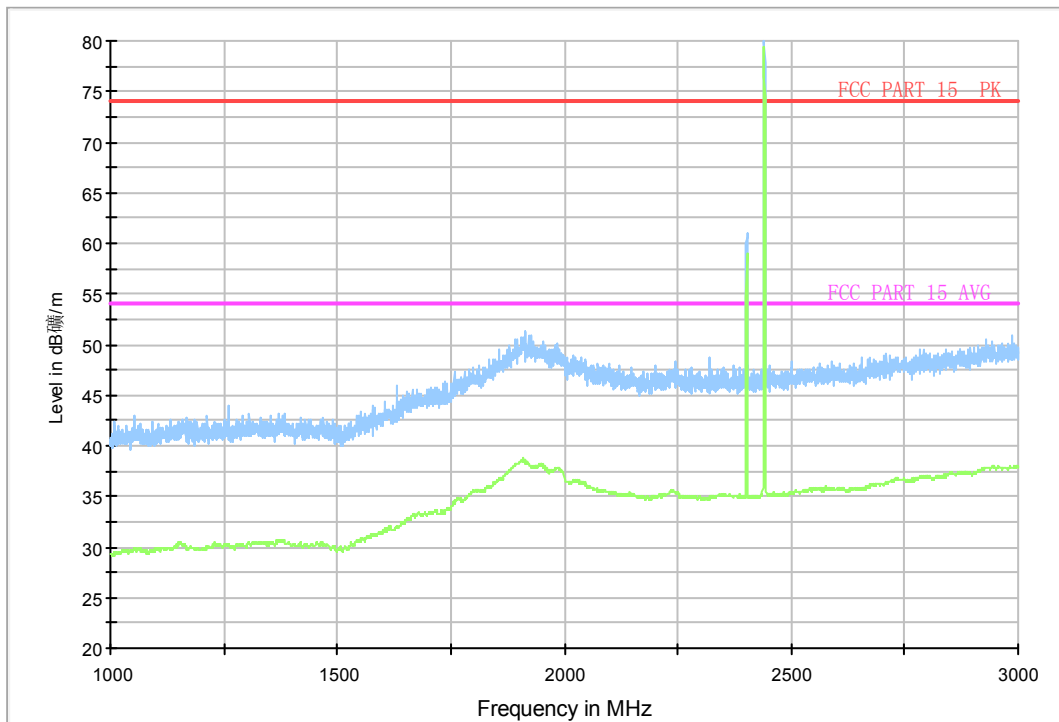


Fig.62. Radiated emission: GFSK, Channel 39, 1 GHz - 3 GHz

Normal RE_3G-18GHz

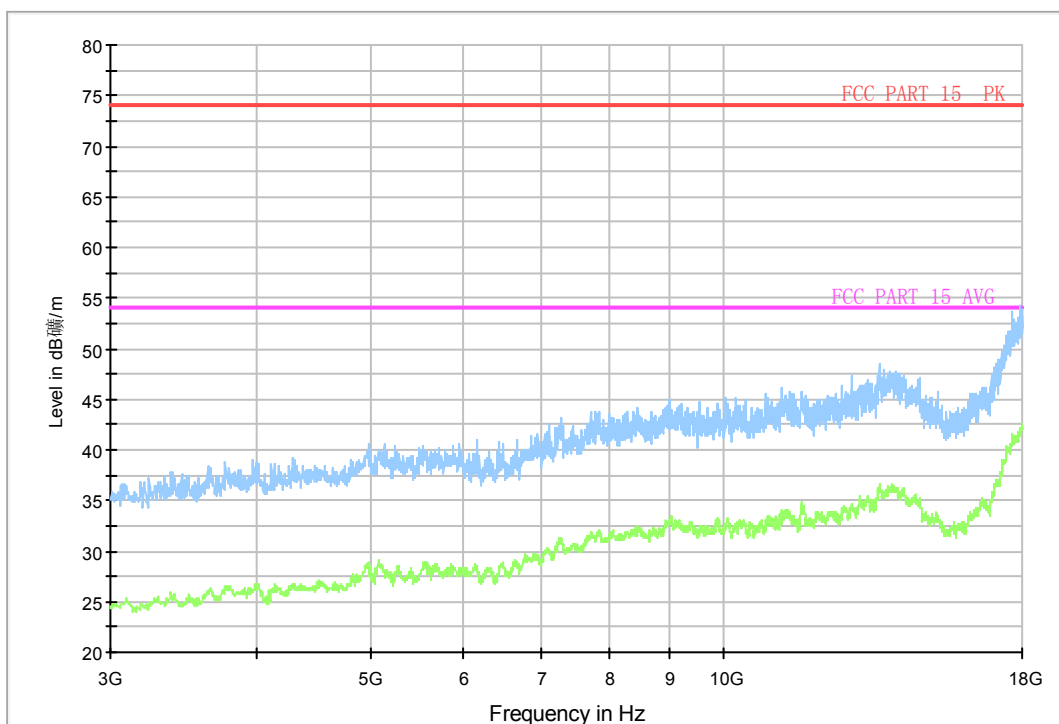


Fig.63. Radiated emission: GFSK, Channel 39, 3 GHz - 18 GHz

RE_BT_1G-3GHz

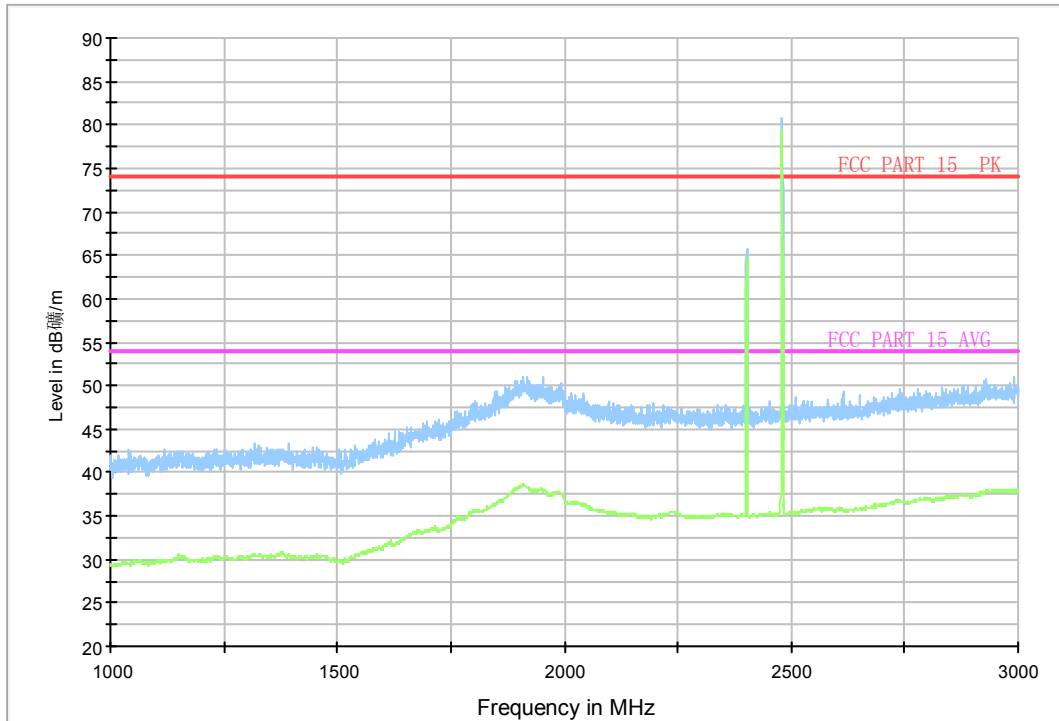


Fig.64. Radiated emission: GFSK, Channel 78, 1 GHz - 3 GHz

Normal RE_3G-18GHz

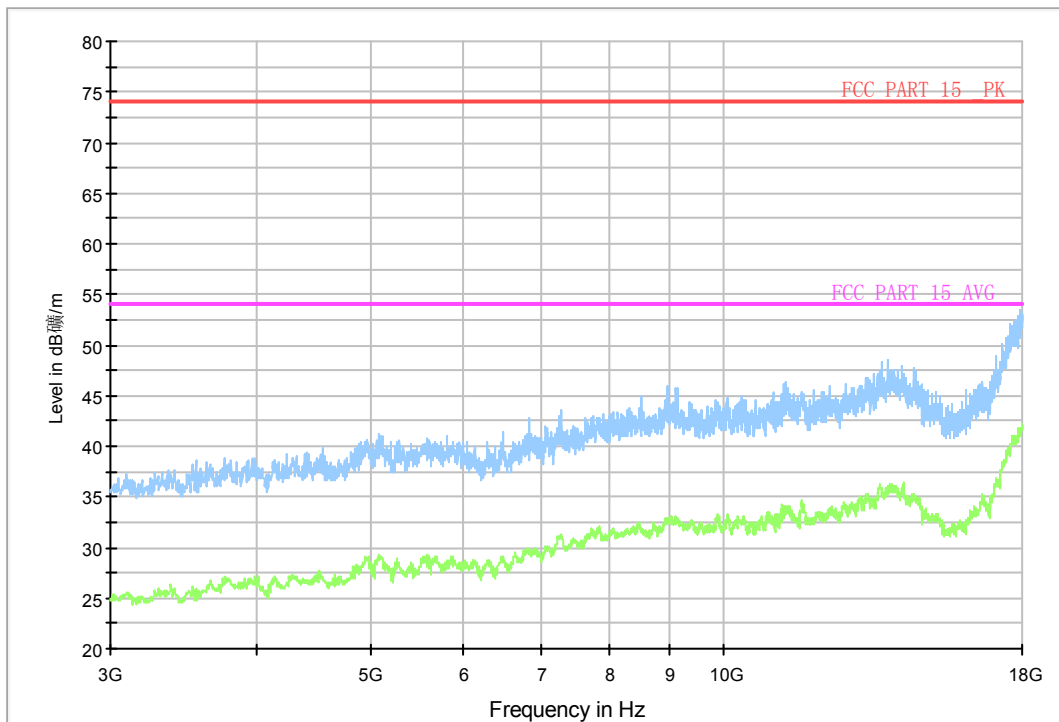


Fig.65. Radiated emission: GFSK, Channel 78, 3 GHz - 18 GHz

RE-BT-Power_2.38G-2.43GHz

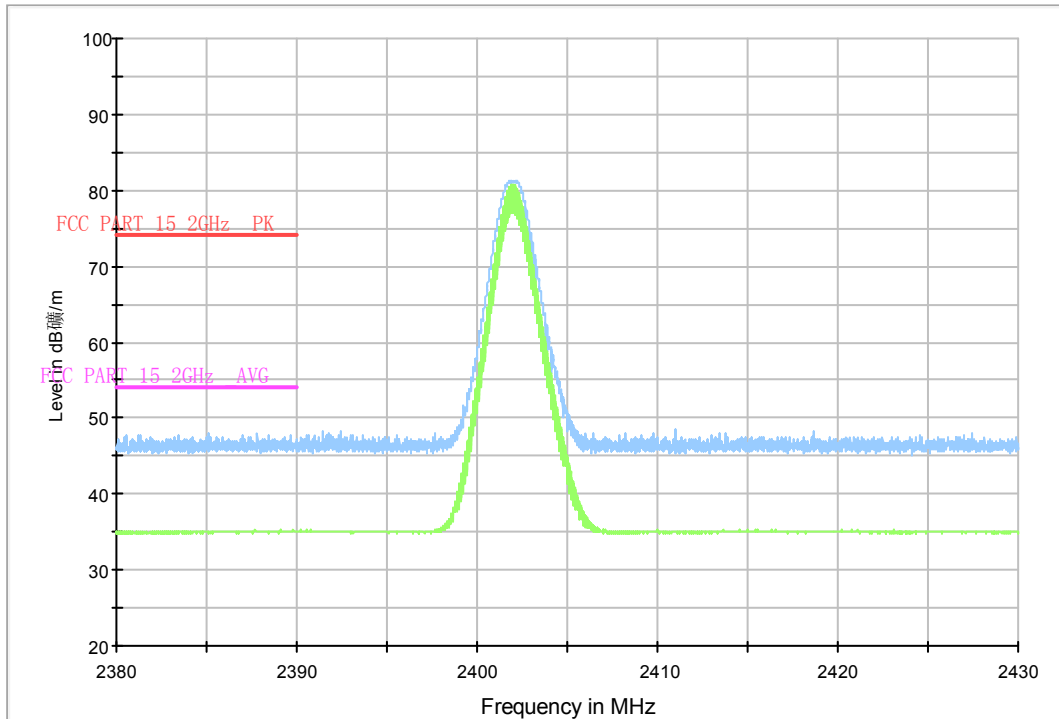


Fig.66. Radiated emission (Power): GFSK, low channel

RE-BT-Power_2.45G-2.5GHz

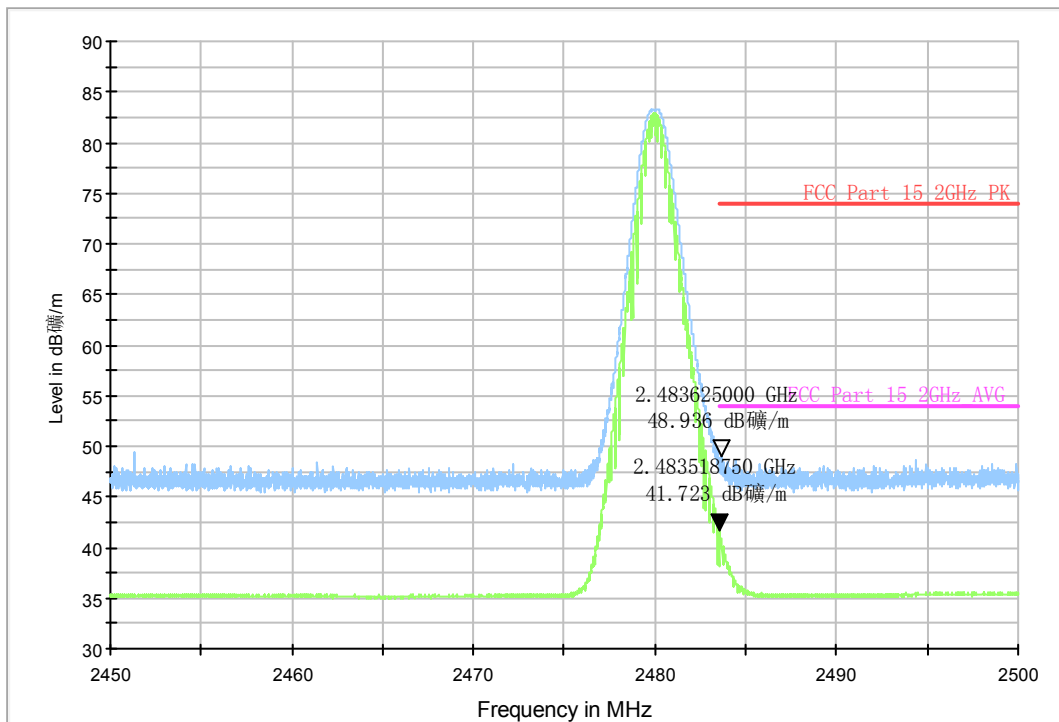


Fig.67. Radiated emission (Power) GFSK, high channel

Normal RE_18G-26.5GHz

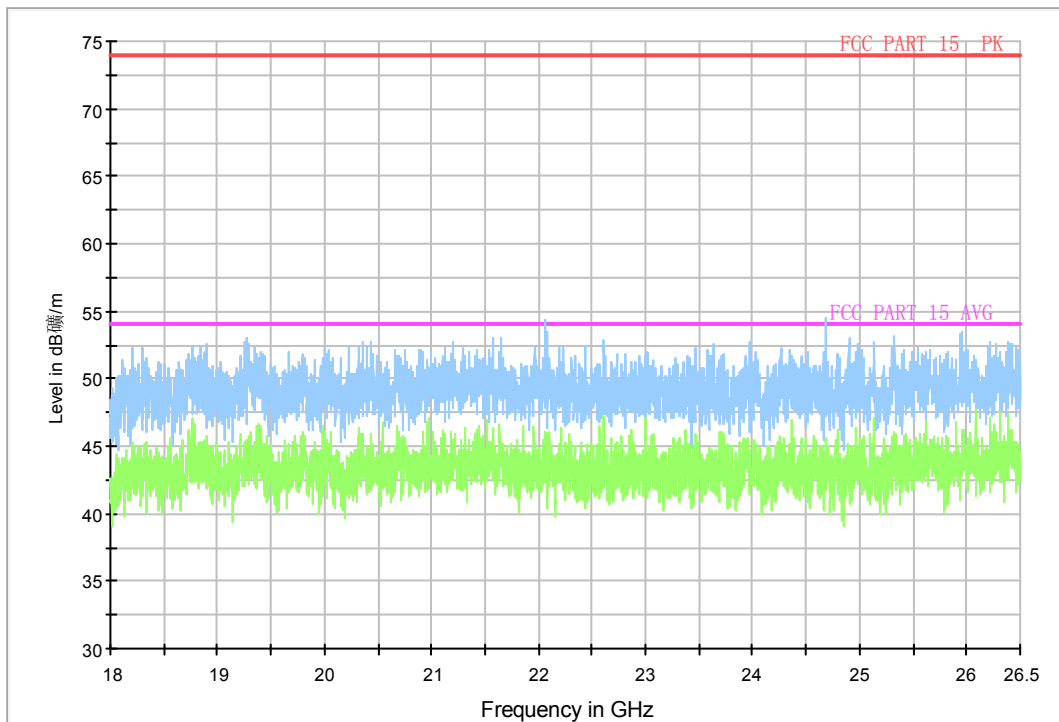


Fig.68. Radiated emission: GFSK, 18 GHz - 26 GHz

RE_BT_1G-3GHz

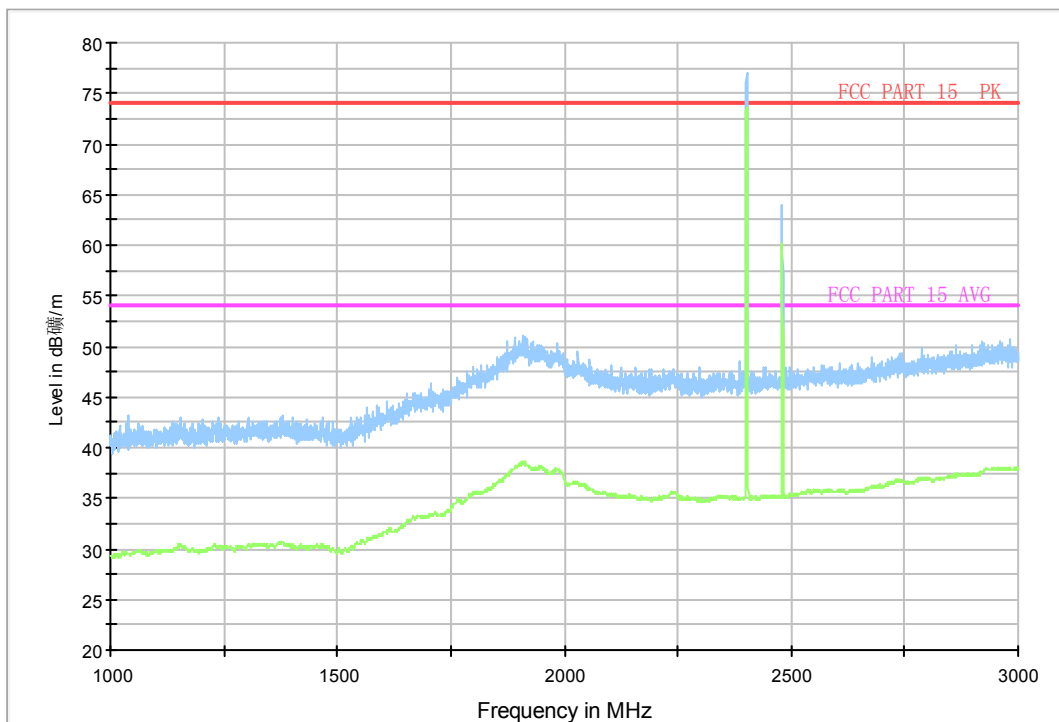


Fig.69. Radiated emission: $\pi/4$ DQPSK, Channel 0, 1 GHz - 3 GHz

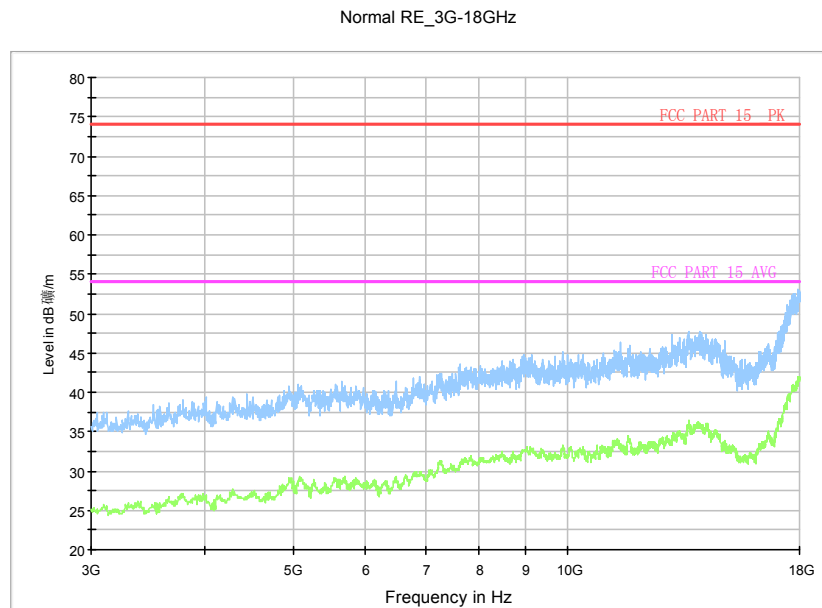


Fig.70. Radiated emission: $\pi/4$ DQPSK, Channel 0, 3 GHz - 18 GHz

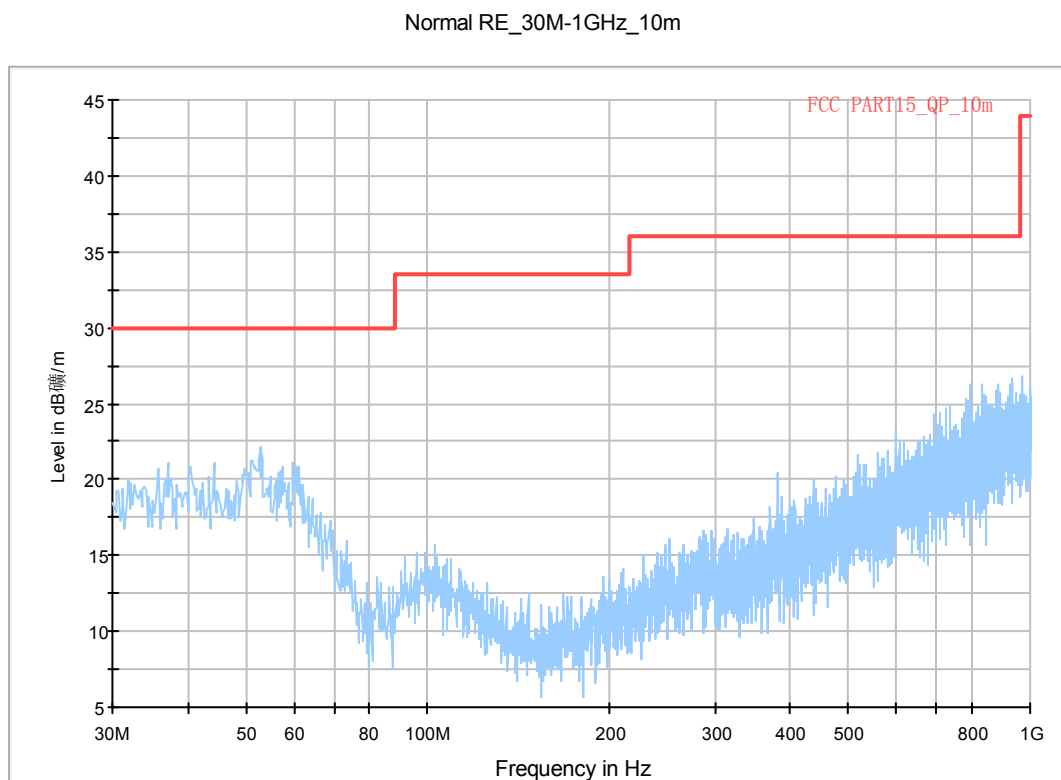


Fig.71. Radiated emission: $\pi/4$ DQPSK, Channel 39, 30 MHz - 1 GHz

RE_BT_1G-3GHz

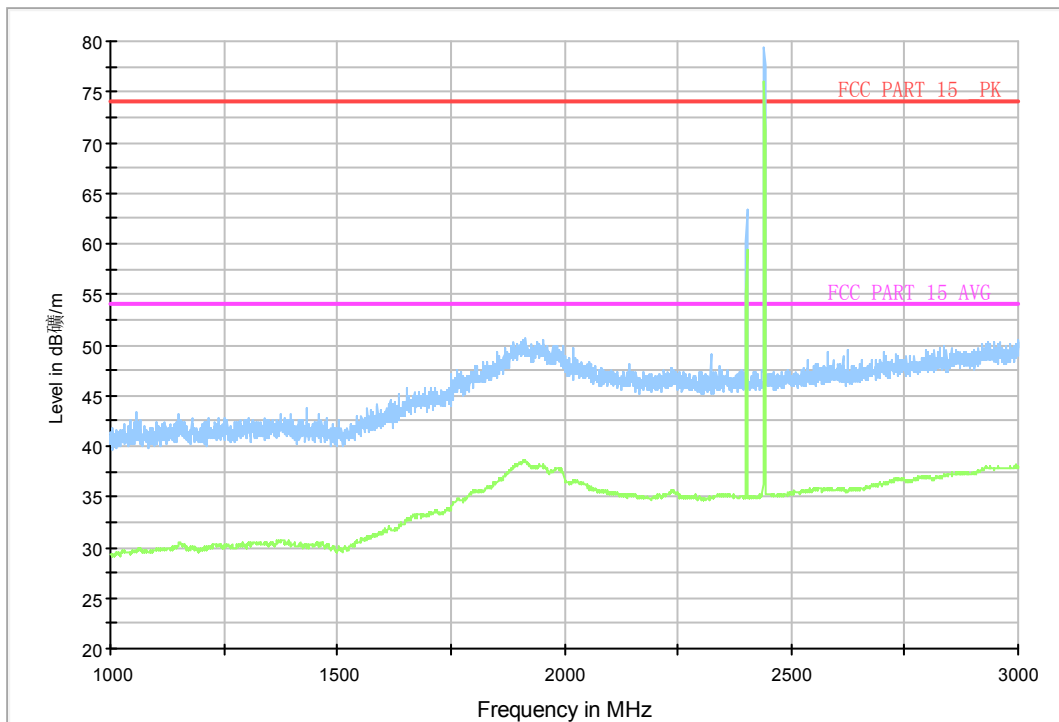


Fig.72. Radiated emission: $\pi/4$ DQPSK, Channel 39, 1 GHz - 3 GHz

Normal RE_3G-18GHz

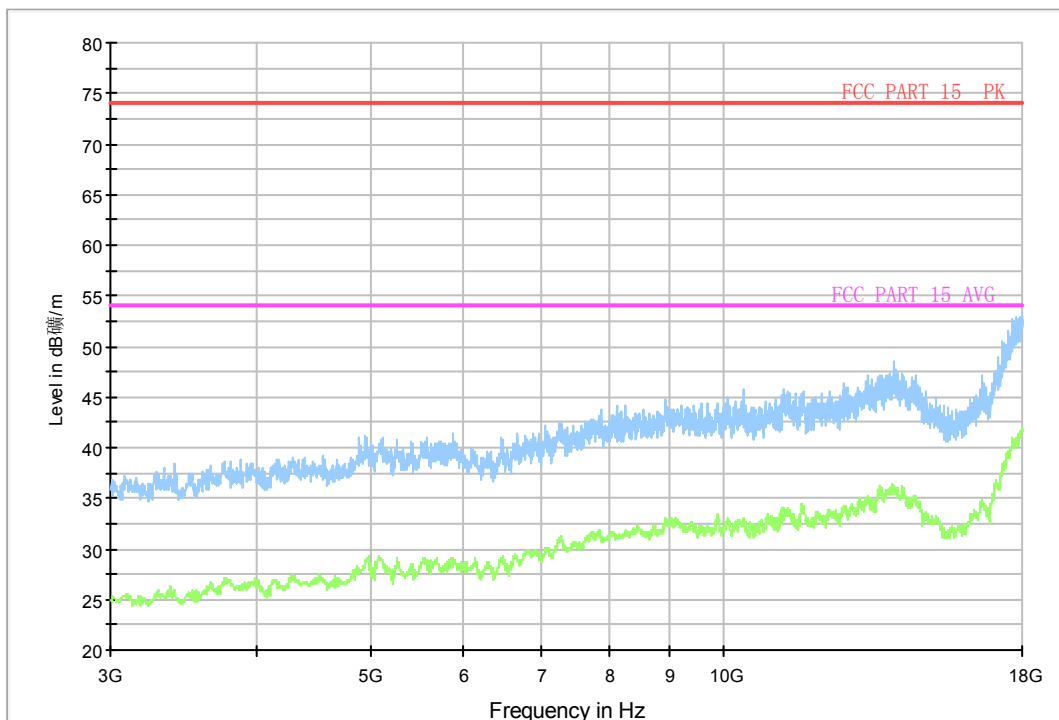


Fig.73. Radiated emission: $\pi/4$ DQPSK, Channel 39, 3 GHz - 18 GHz

RE_BT_1G-3GHz

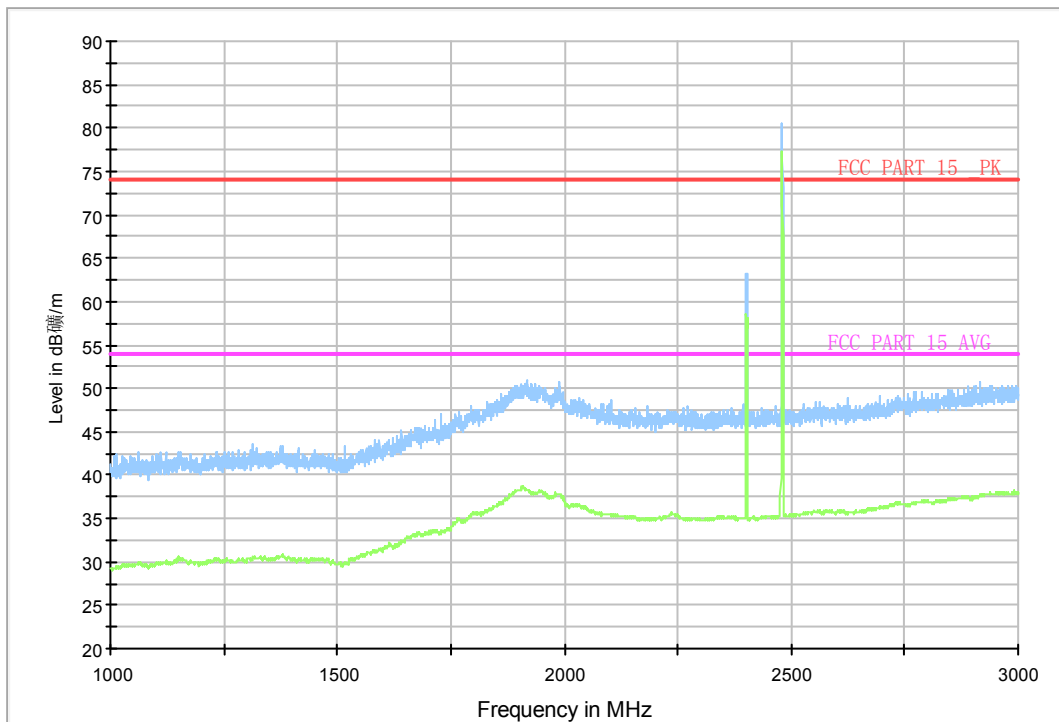


Fig.74. Radiated emission: $\pi/4$ DQPSK, Channel 78, 1 GHz - 3 GHz

Normal RE_3G-18GHz

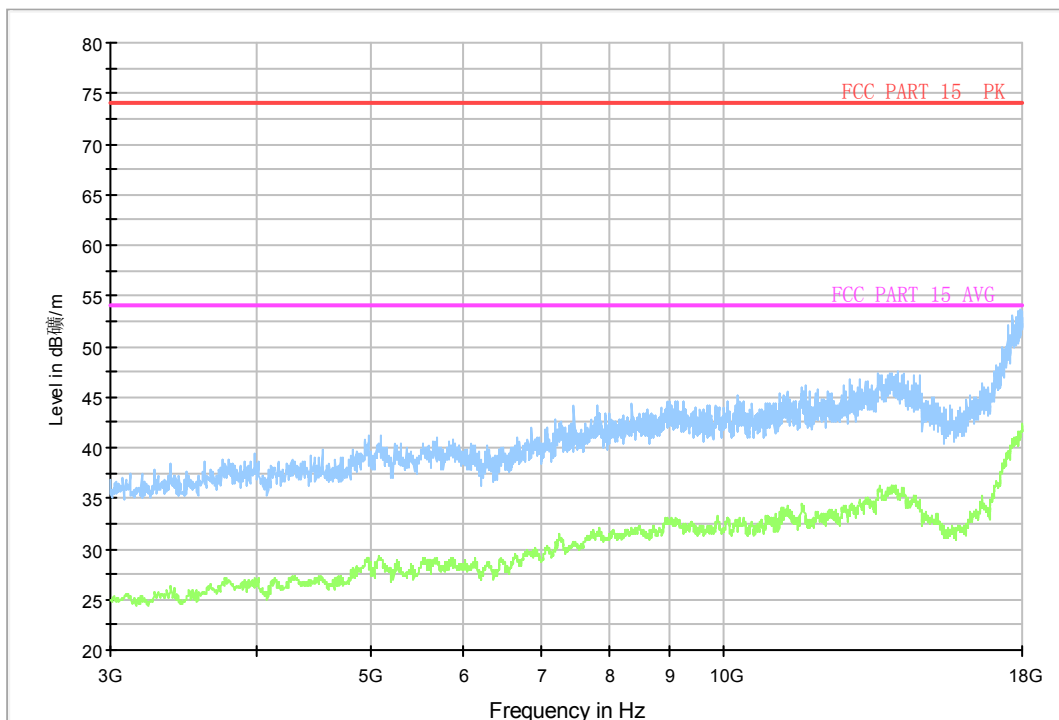


Fig.75. Radiated emission: $\pi/4$ DQPSK, Channel 78, 3 GHz - 18 GHz

RE-BT-Power_2.38G-2.43GHz

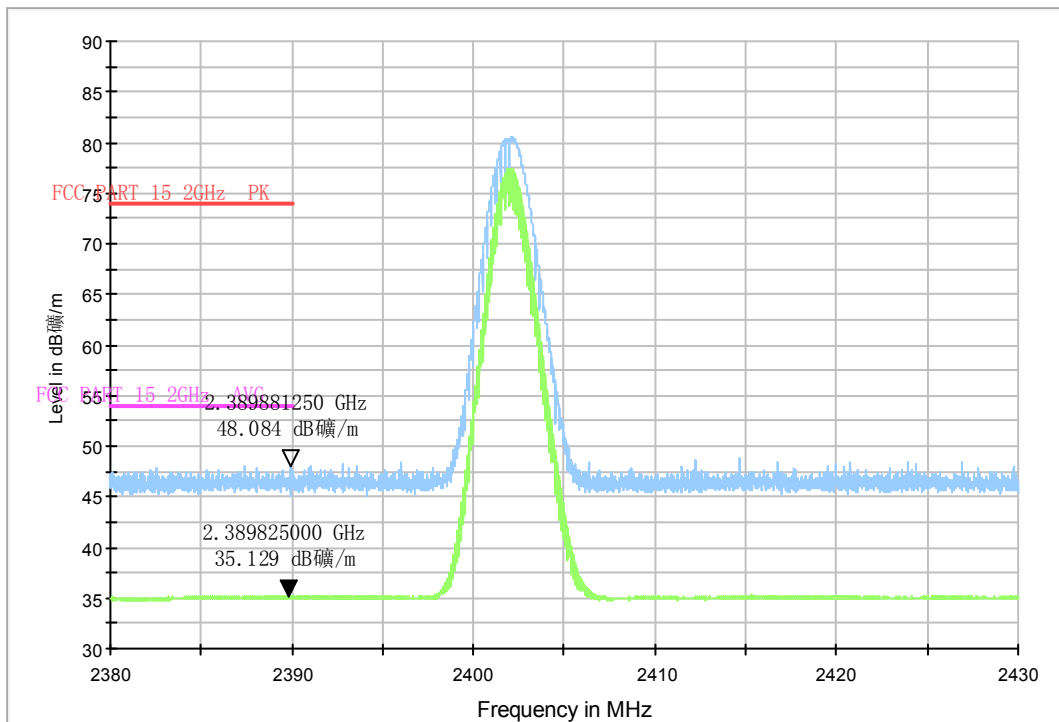


Fig.76. Radiated emission (Power): $\pi/4$ DQPSK, low channel

RE-BT-Power_2.45G-2.5GHz

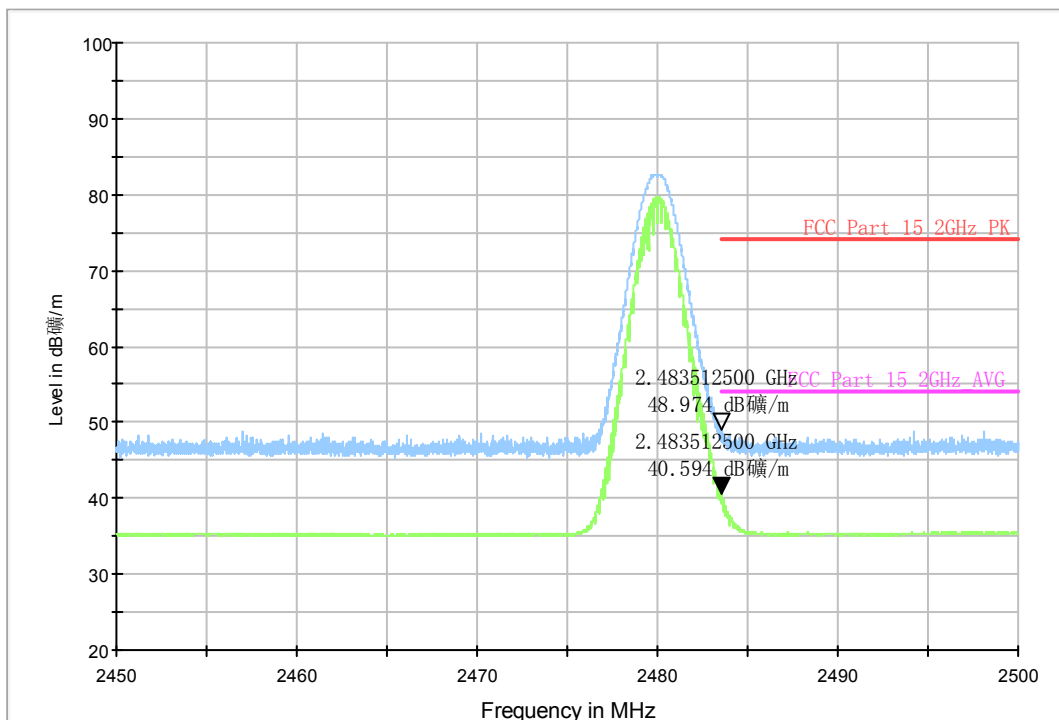


Fig.77. Radiated emission (Power): $\pi/4$ DQPSK, high channel

Normal RE_18G-26.5GHz

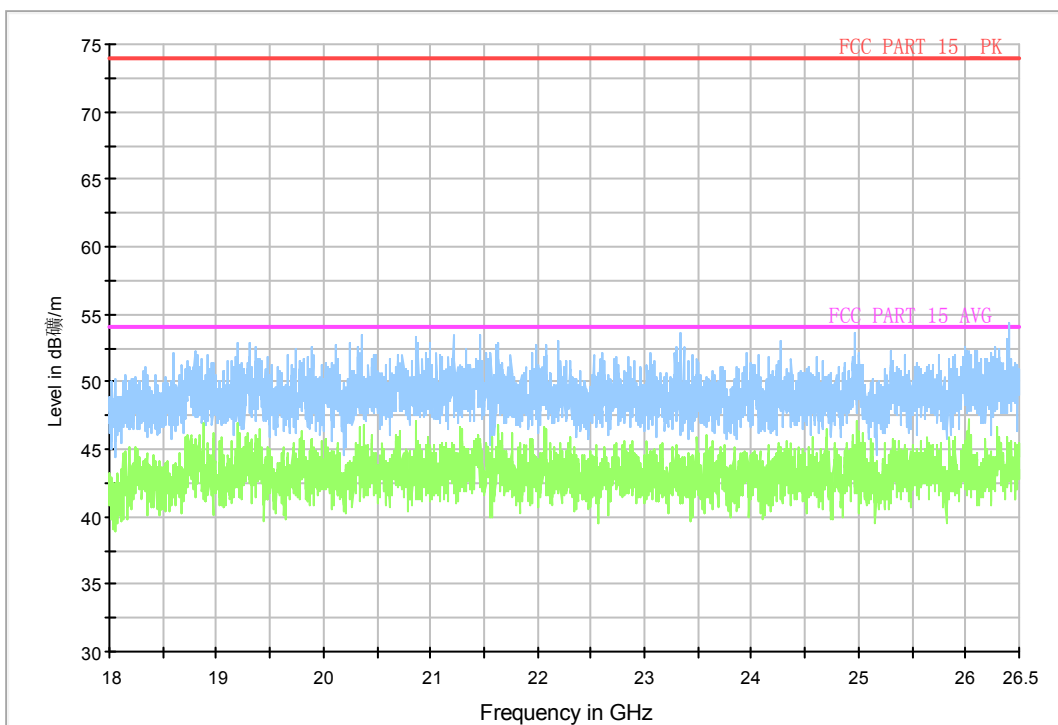


Fig.78. Radiated emission: $\pi/4$ DQPSK, 18 GHz - 26 GHz

RE_BT_1G-3GHz

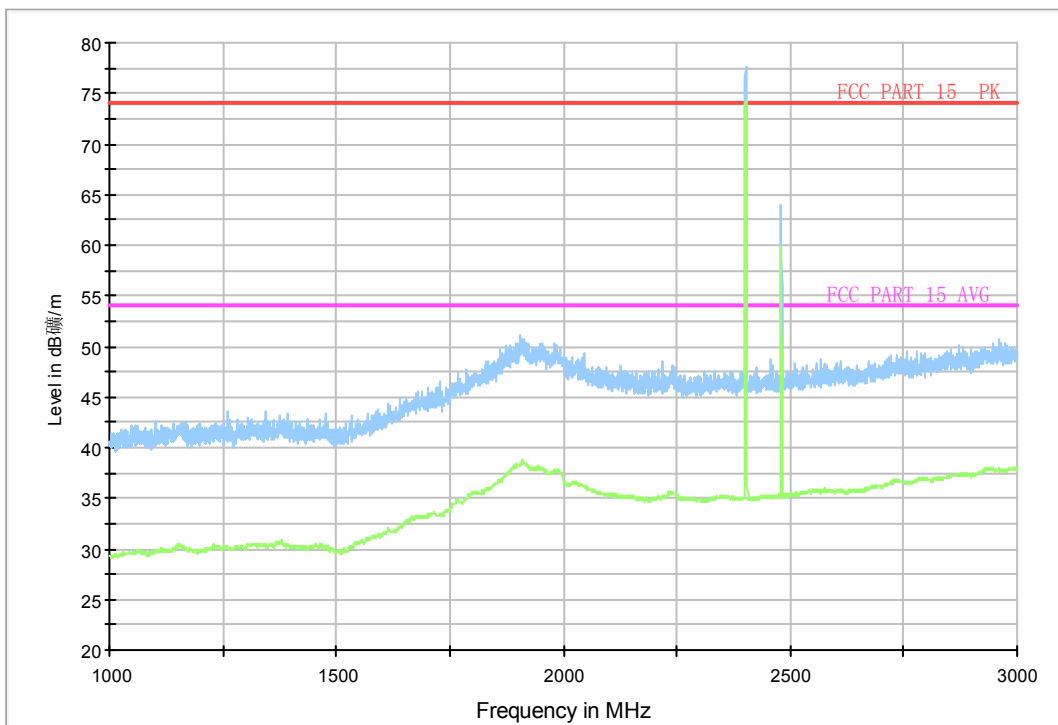


Fig.79. Radiated emission: 8DPSK, Channel 0, 1 GHz - 3 GHz

Normal RE_3G-18GHz

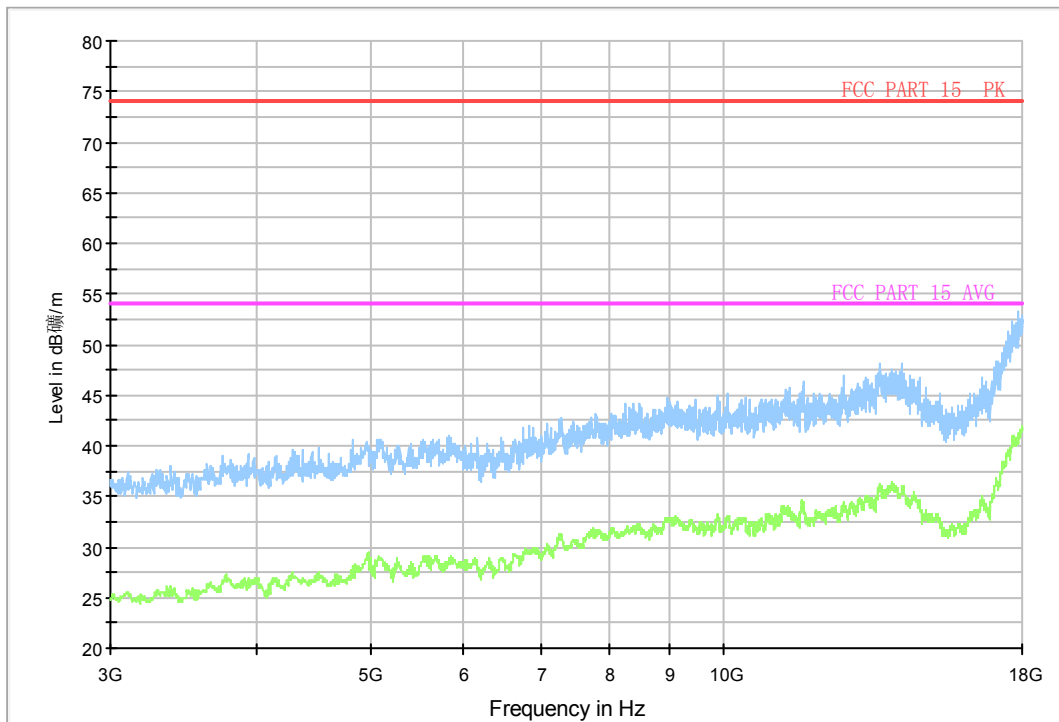


Fig.80. Radiated emission: 8DPSK, Channel 0, 3 GHz - 18 GHz

Normal RE_30M-1GHz_10m

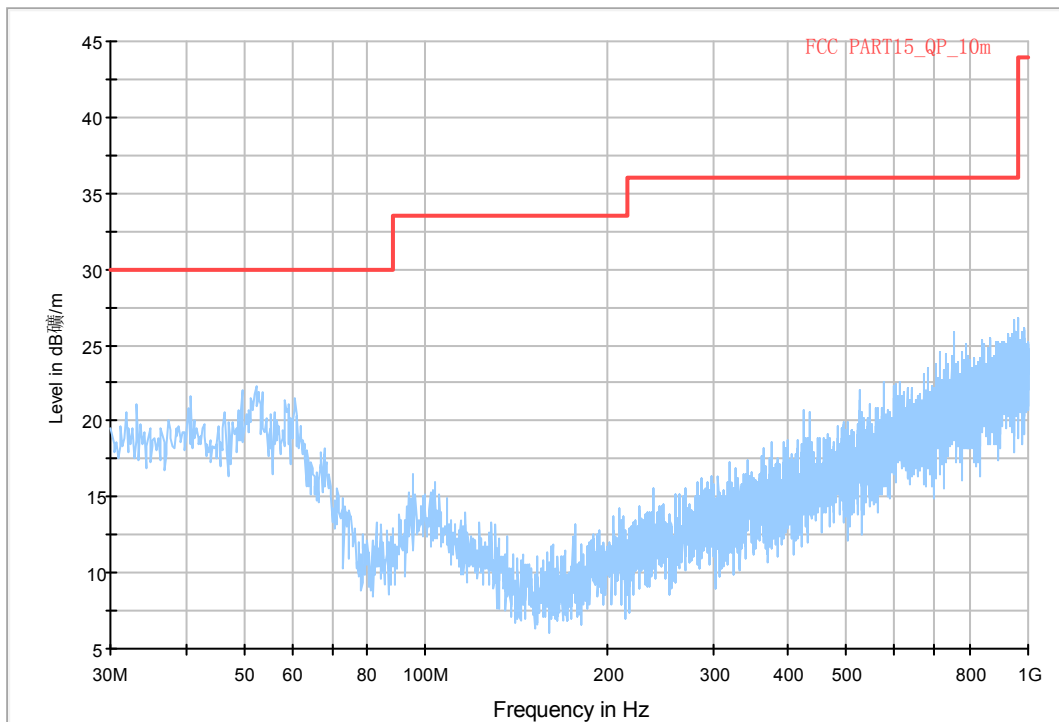


Fig.81. Radiated emission: 8DPSK, Channel 39, 30 MHz - 1 GHz

RE_BT_1G-3GHz

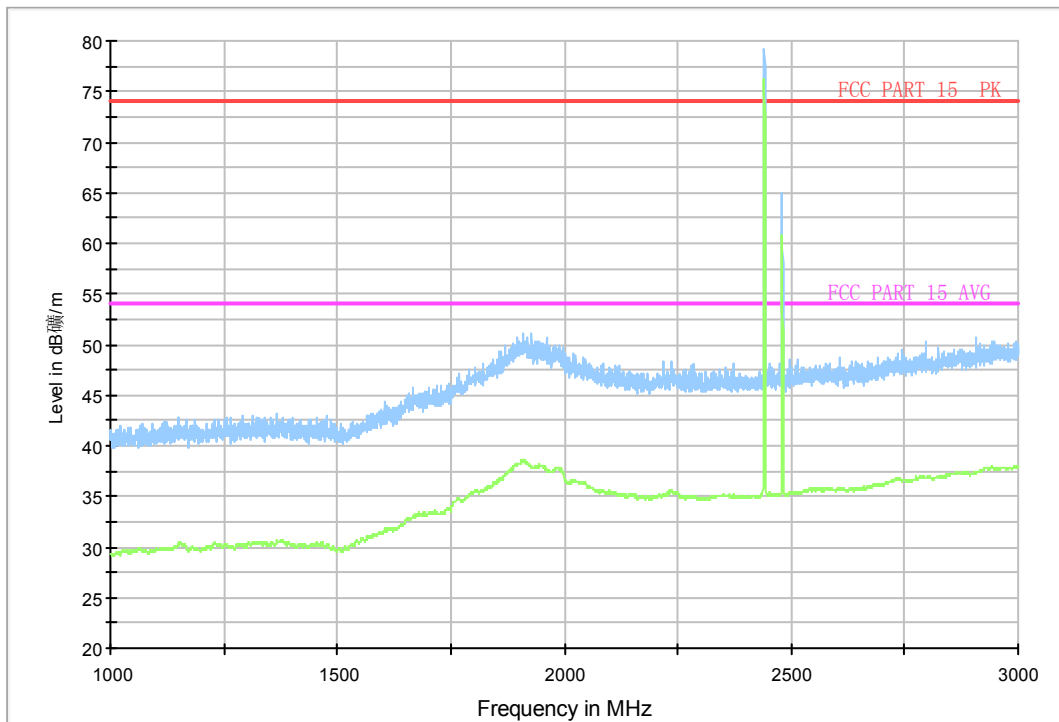


Fig.82. Radiated emission: 8DPSK, Channel 39, 1 GHz - 3 GHz

Normal RE_3G-18GHz

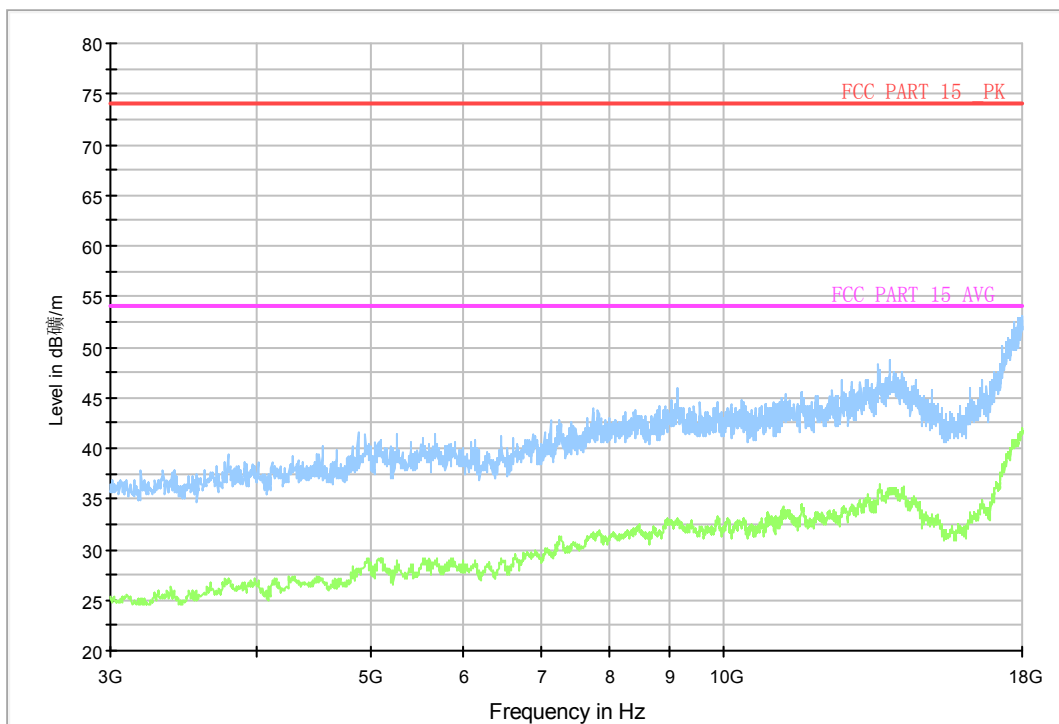


Fig.83. Radiated emission: 8DPSK, Channel 39, 3 GHz - 18 GHz

RE_BT_1G-3GHz

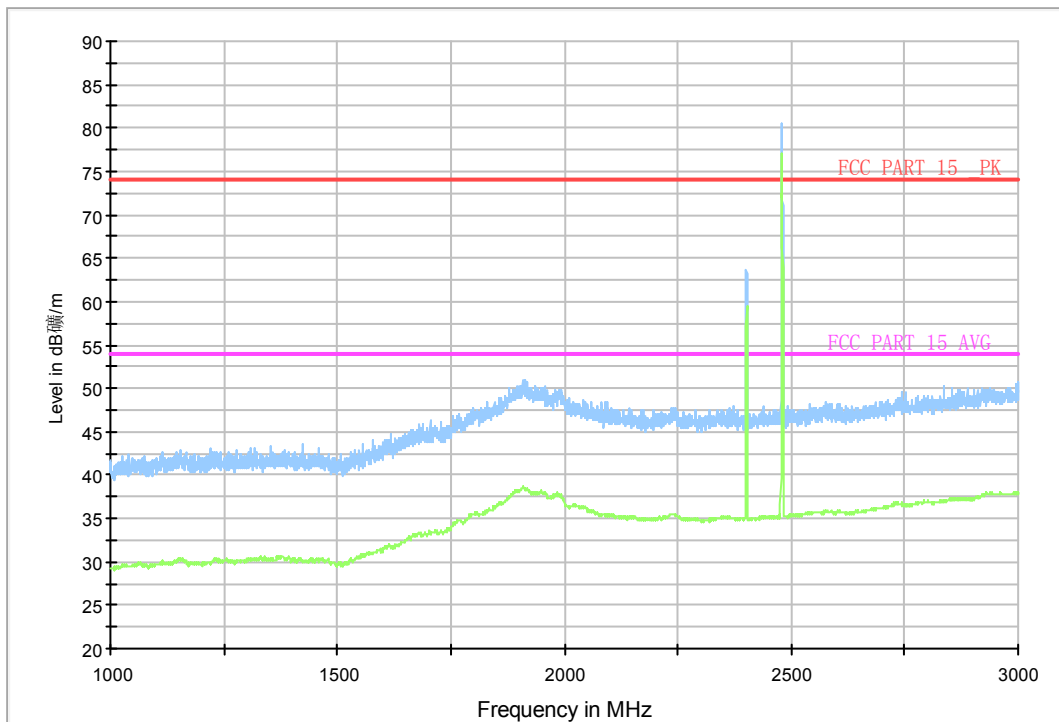


Fig.84. Radiated emission: 8DPSK, Channel 78, 1 GHz - 3 GHz

Normal RE_3G-18GHz

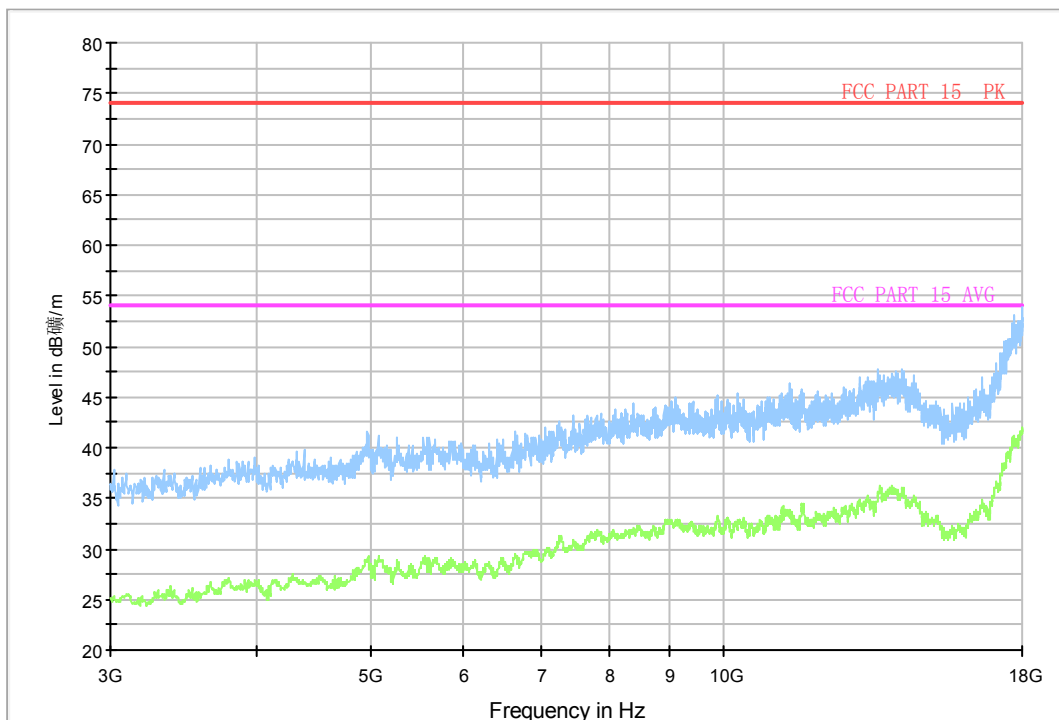


Fig.85. Radiated emission: 8DPSK, Channel 78, 3 GHz - 18 GHz

RE-BT-Power_2.38G-2.43GHz

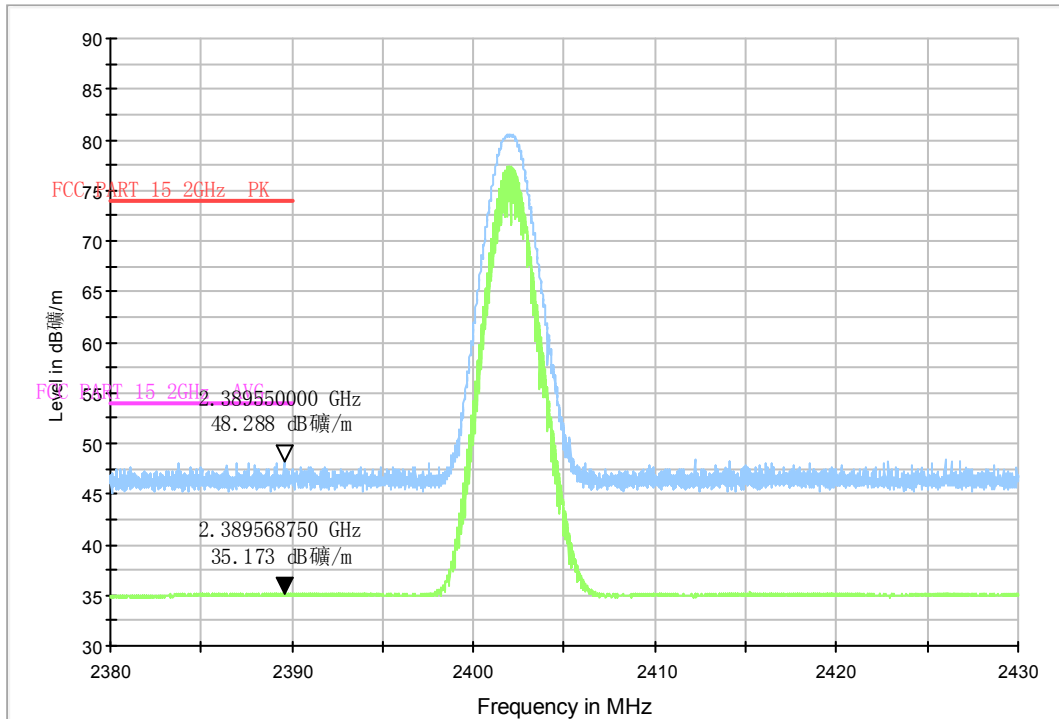


Fig.86. Radiated emission (Power): 8DPSK, low channel

RE-BT-Power_2.45G-2.5GHz

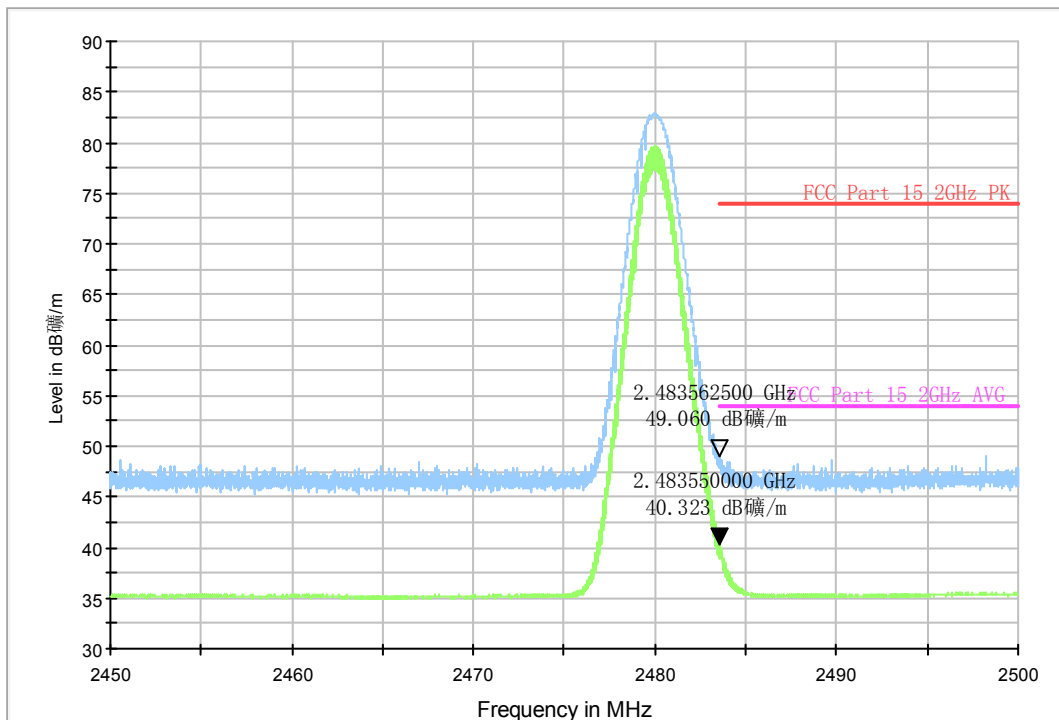


Fig.87. Radiated emission (Power): 8DPSK, high channel

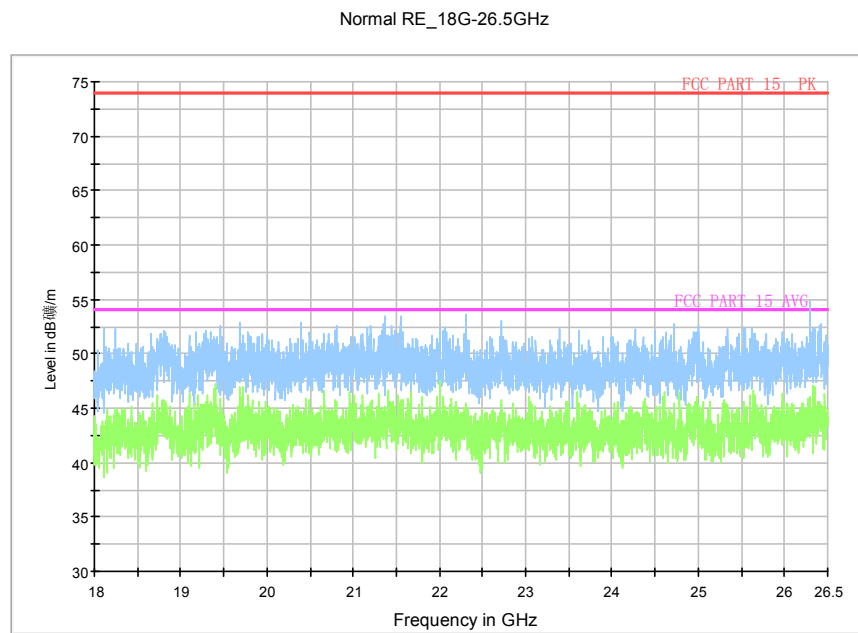


Fig.88. Radiated emission: 8DPSK, 18 GHz - 26 GHz

A.6. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW $\geq$ RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.89	97.36	P
		Fig.90		
	DH3	Fig.91	167.22	P
		Fig.92		
	DH5	Fig.93	208.66	P
		Fig.94		

For $\pi/4$ DQPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.95	107.38	P
		Fig.96		
	DH3	Fig.97	149.19	P
		Fig.98		
	DH5	Fig.99	174.20	P
		Fig.100		


For 8DPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.101	101.28	P
		Fig.102		
	DH3	Fig.103	152.96	P

	DH5	Fig.104	220.25	P
		Fig.105		
		Fig.106		


Conclusion: PASS

Test graphs as below:

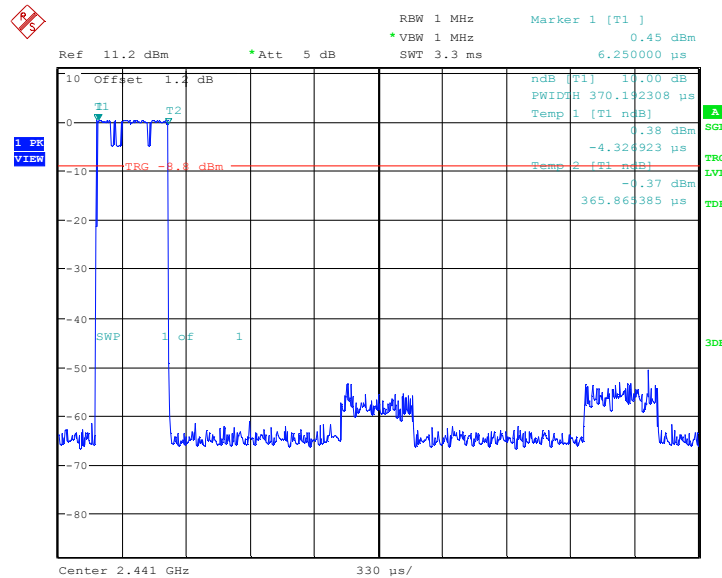


Date: 3.DEC.2014 17:51:47

Fig.89. Time of occupancy (Dwell Time): Channel 39, Packet DH1

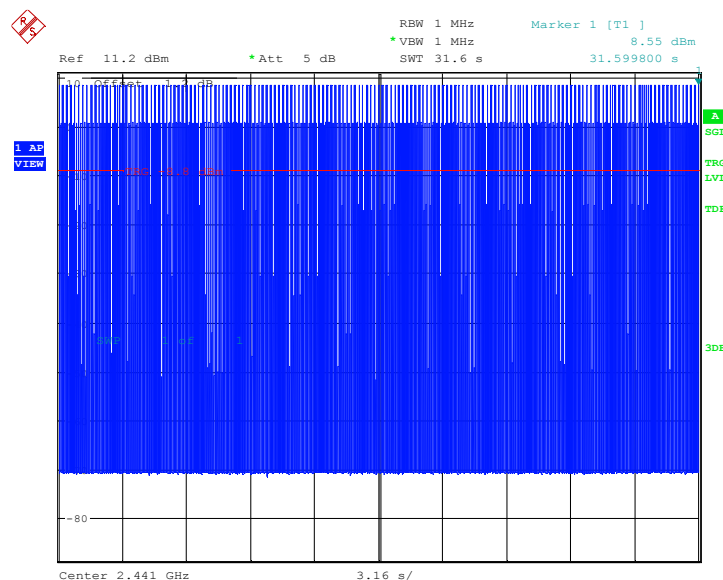


Date: 3.DEC.2014 17:51:35

Fig.90. Number of Transmissions Measurement:Channel 39,Packet DH1

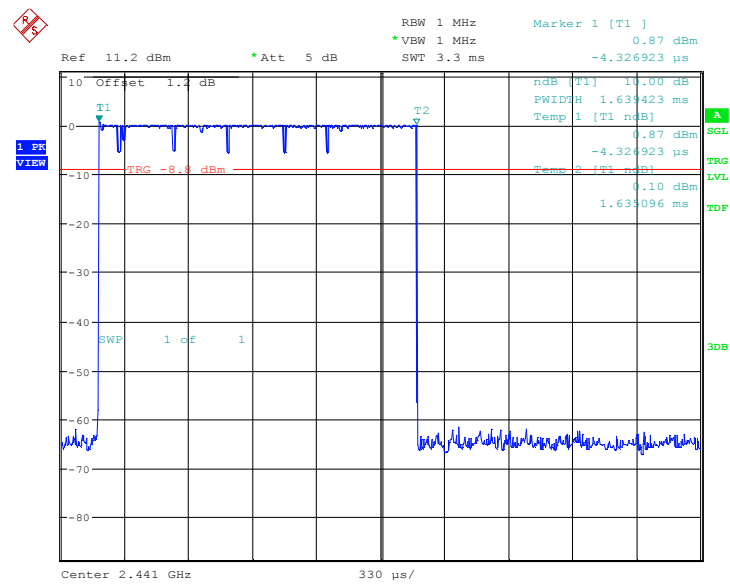

Date: 3.DEC.2014 17:53:04

Fig.91. Time of occupancy (Dwell Time): Channel 39, Packet DH3

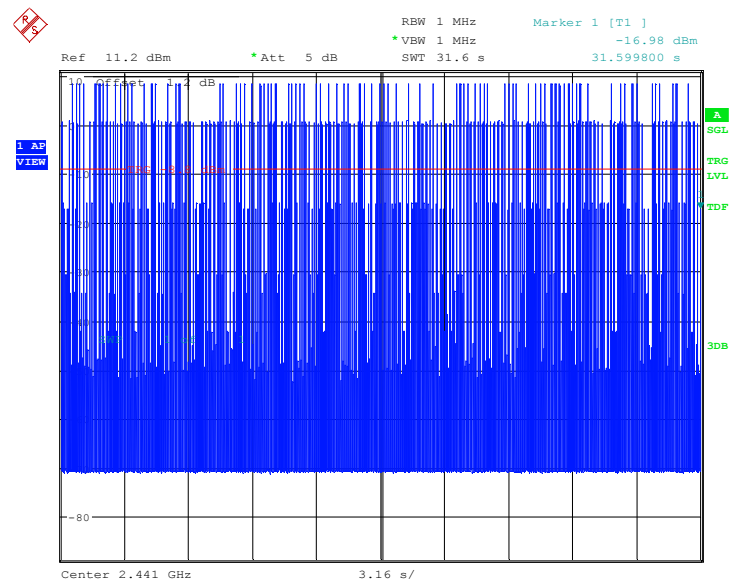

Date: 3.DEC.2014 17:52:52


Fig.92. Number of Transmissions Measurement: Channel 39, Packet DH3



Fig.93. Time of occupancy (Dwell Time): Channel 39, Packet DH5




Fig.94. Number of Transmissions Measurement:Channel 39,Packet DH5

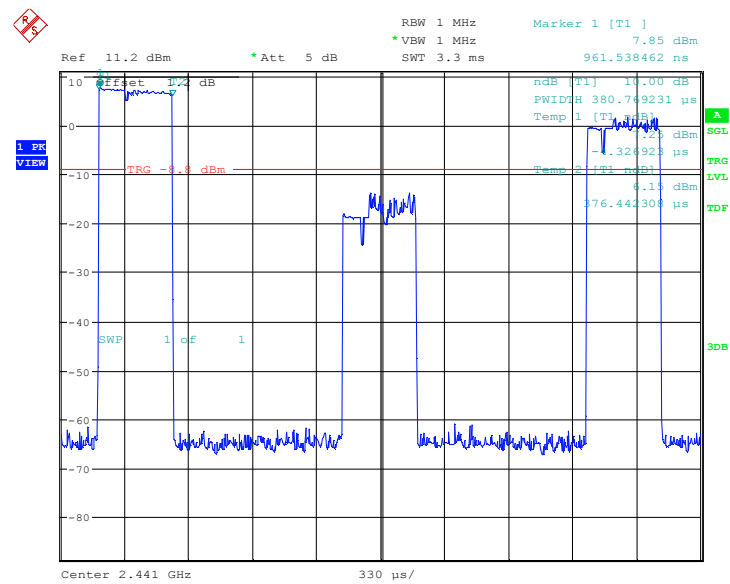


Date: 3.DEC.2014 18:13:46

Fig.95. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

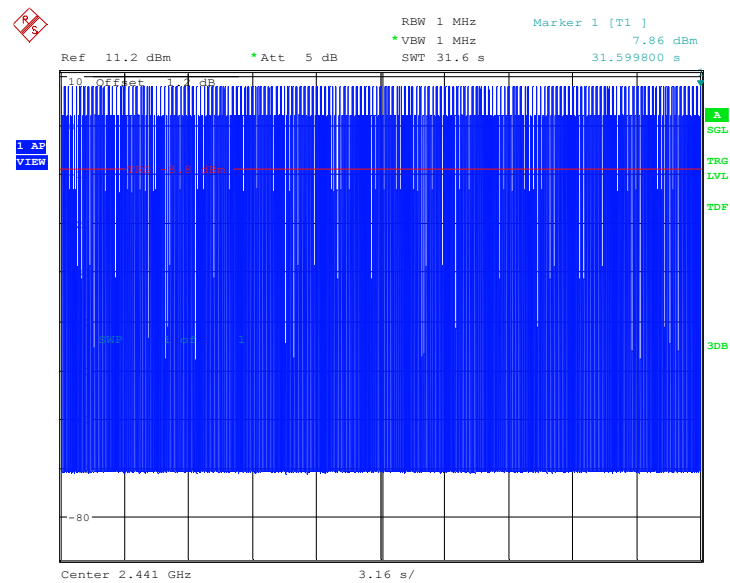


Date: 3.DEC.2014 18:13:34

Fig.96. Number of Transmissions Measurement:Channel 39,Packet 2-DH1

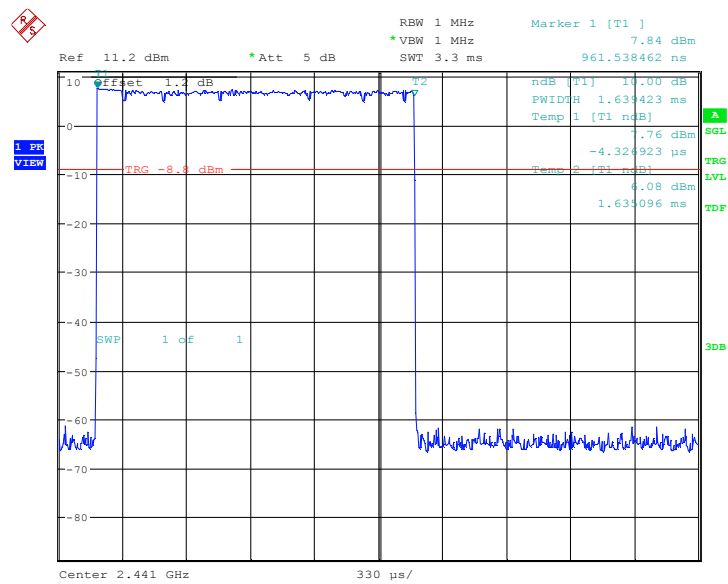


Date: 3.DEC.2014 18:15:03

Fig.97. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

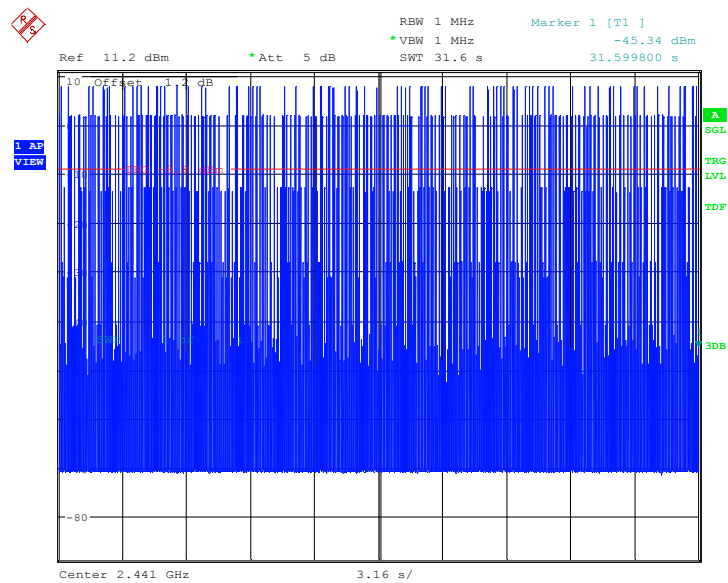


Date: 3.DEC.2014 18:14:51

Fig.98. Number of Transmissions Measurement:Channel 39,Packet 2-DH3

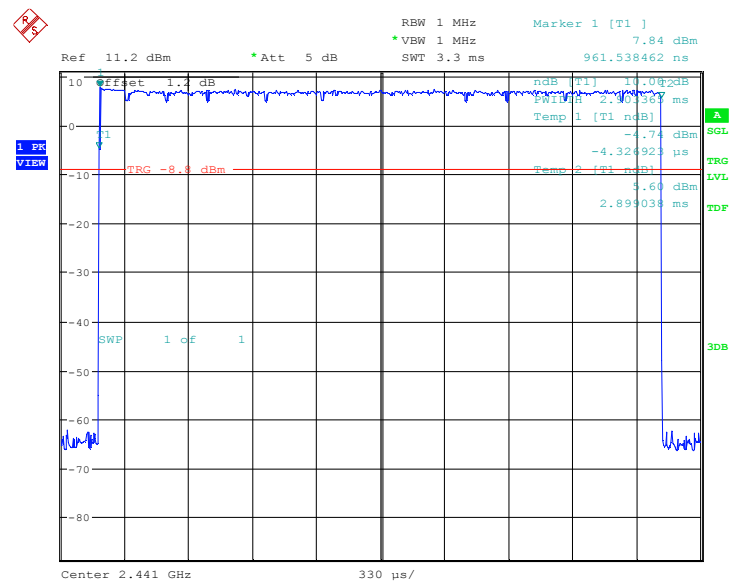


Date: 3.DEC.2014 18:16:18

Fig.99. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

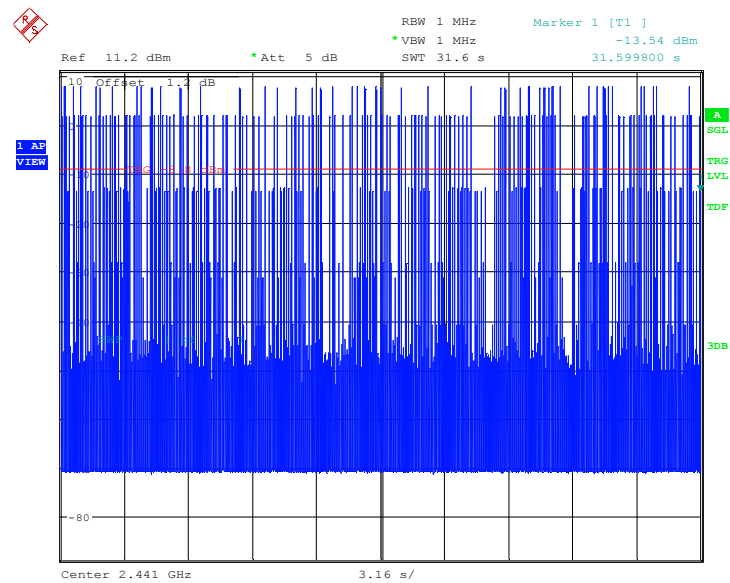


Date: 3.DEC.2014 18:16:06

Fig.100. Number of Transmissions Measurement: Channel 39, Packet 2-DH5

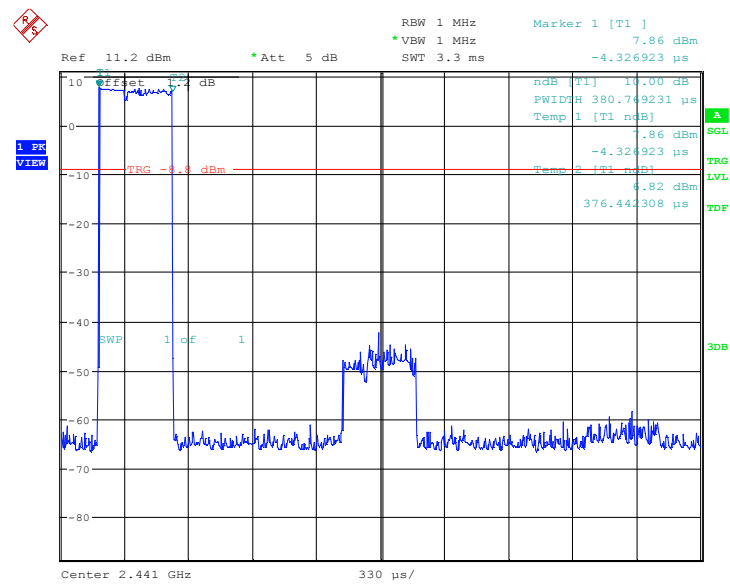


Date: 3.DEC.2014 18:35:47

Fig.101. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

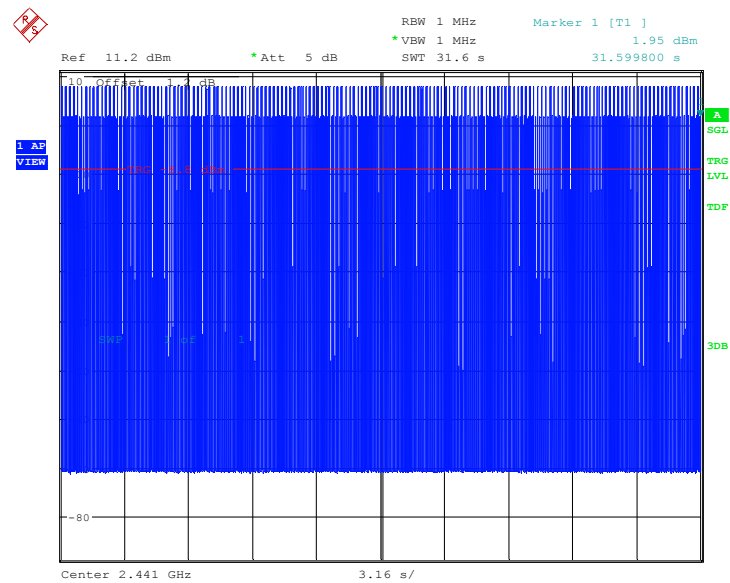


Date: 3.DEC.2014 18:35:35

Fig.102. Number of Transmissions Measurement:Channel 39,Packet 3-DH1

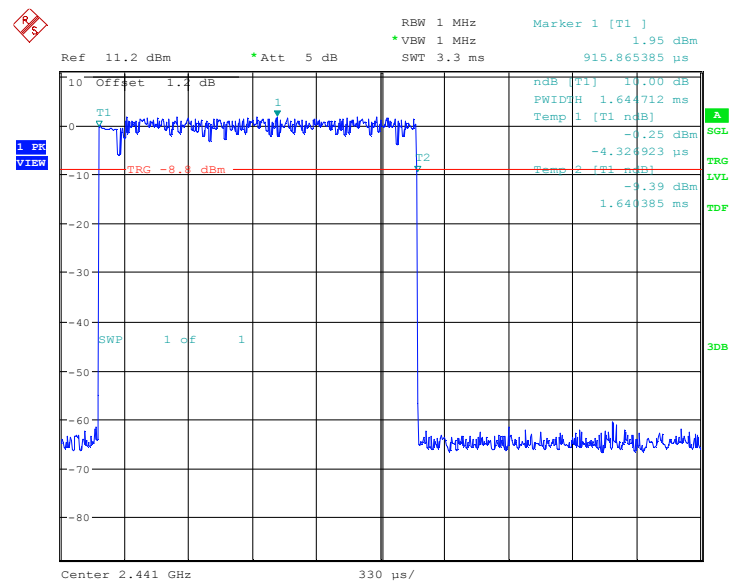


Date: 3.DEC.2014 18:37:07

Fig.103. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

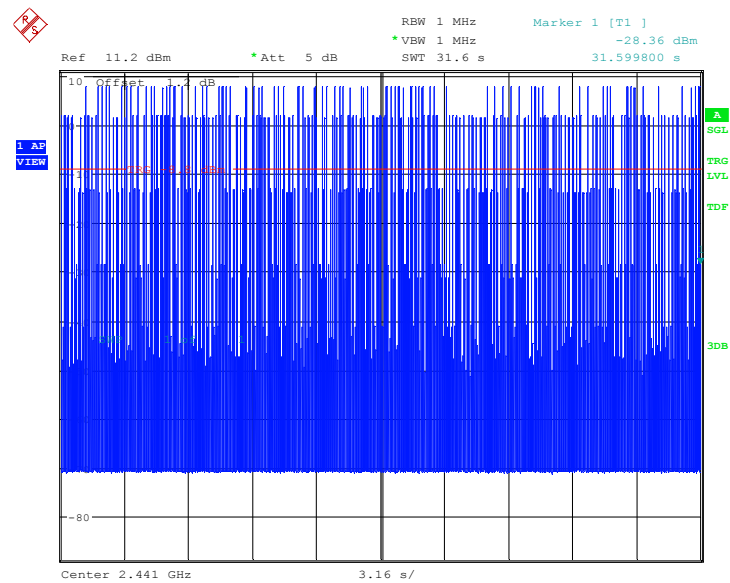


Date: 3.DEC.2014 18:36:55

Fig.104. Number of Transmissions Measurement:Channel 39,Packet 3-DH3

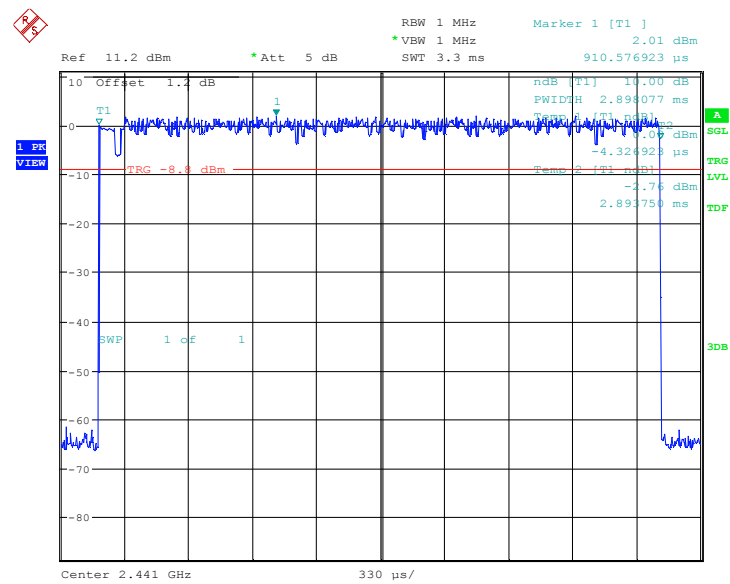

Date: 3.DEC.2014 18:38:24

Fig.105. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

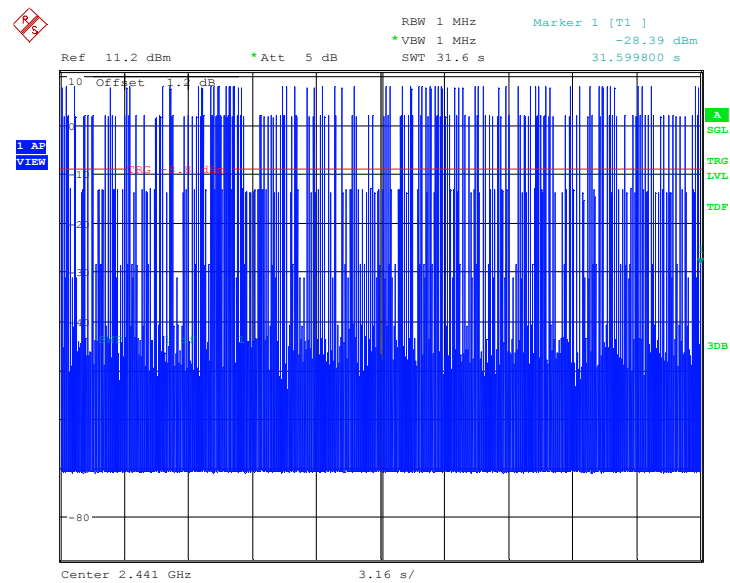

Date: 3.DEC.2014 18:38:12

Fig.106. Number of Transmissions Measurement: Channel 39, Packet 3-DH5

A.7. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 20kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.107	875.00	NA
39	Fig.108	875.00	NA
78	Fig.109	870.19	NA

For $\pi/4$ DQPSK


Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.110	1259.62	NA
39	Fig.111	1259.62	NA
78	Fig.112	1254.81	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.113	1259.62	NA
39	Fig.114	1269.23	NA
78	Fig.115	1259.62	NA


Conclusion: NA

Test graphs as below:

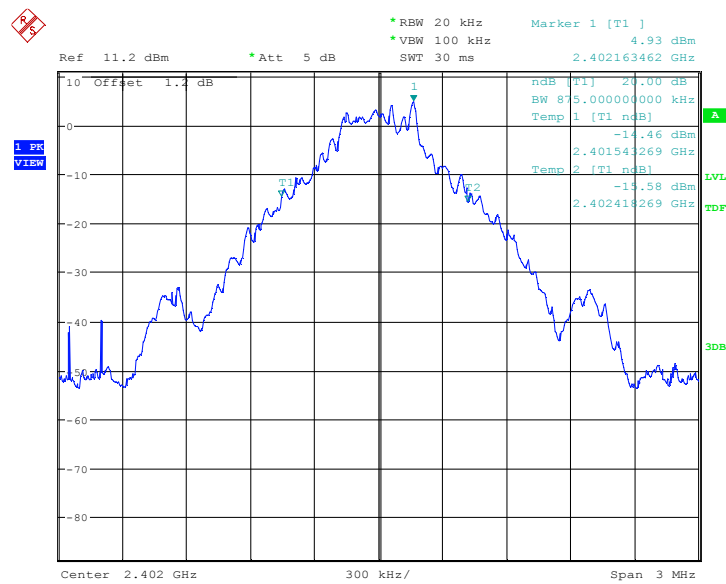


Date: 3.DEC.2014 17:54:52

Fig.107. 20dB Bandwidth: GFSK, Channel 0

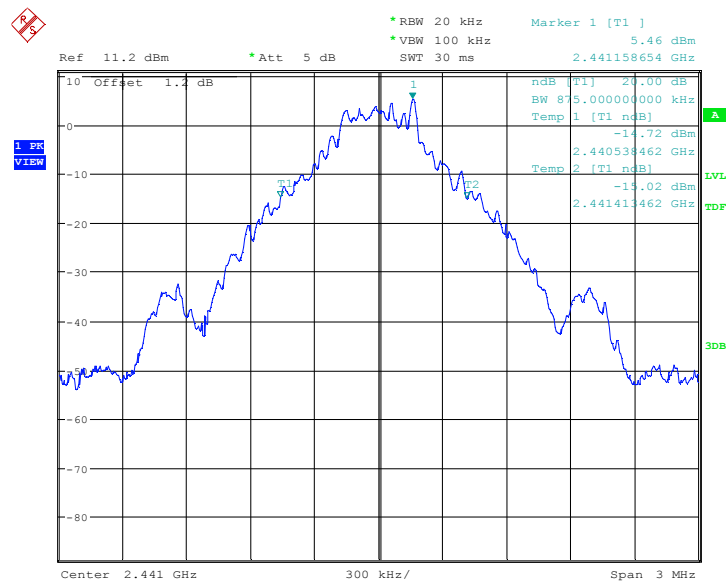


Date: 3.DEC.2014 17:55:24

Fig.108. 20dB Bandwidth: GFSK, Channel 39

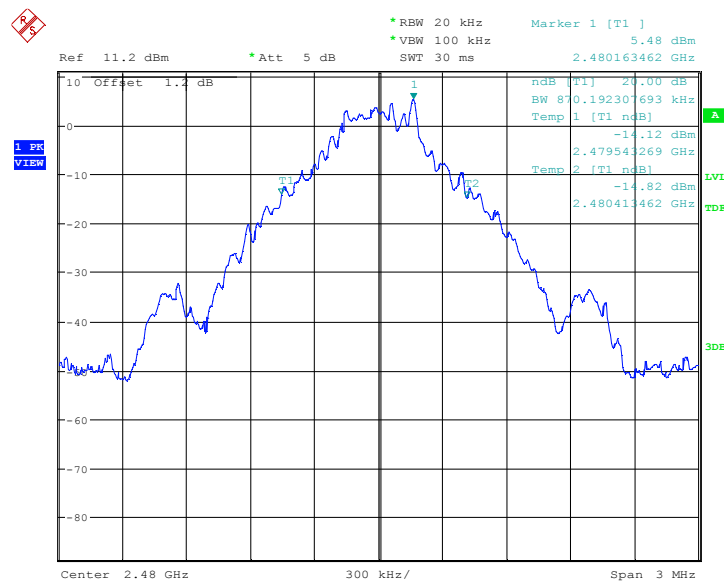

Date: 3.DEC.2014 17:55:56

Fig.109. 20dB Bandwidth: GFSK, Channel 78

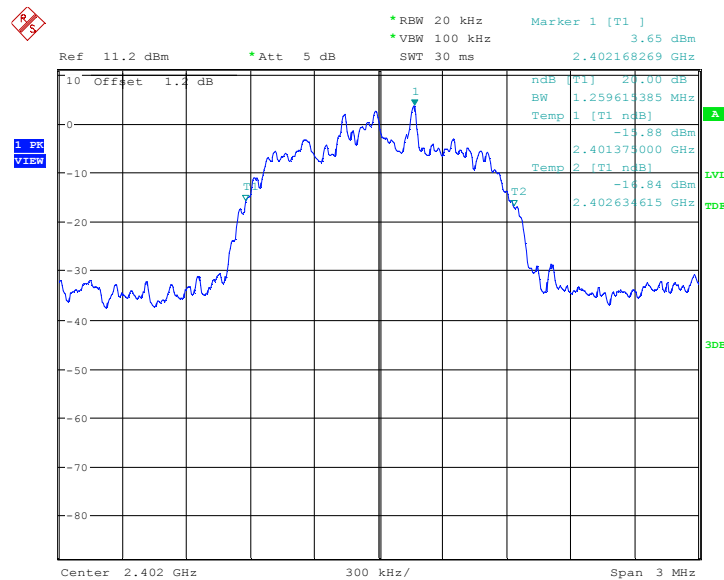

Date: 3.DEC.2014 18:16:52

Fig.110. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 0


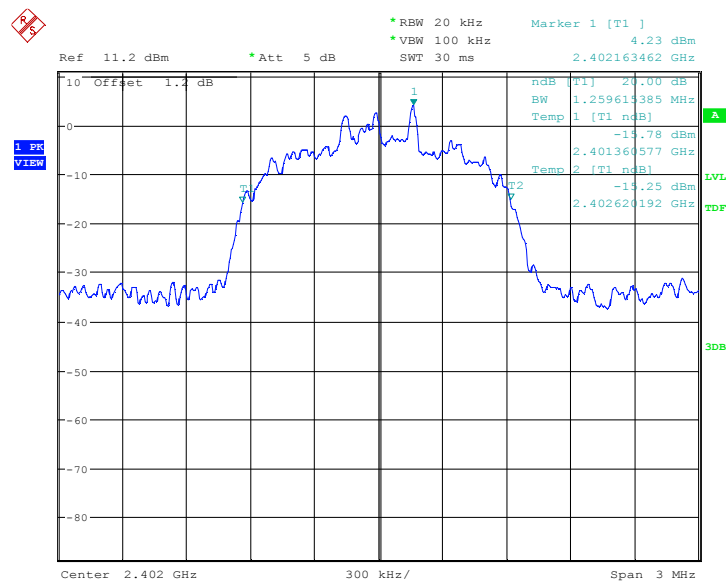


Fig.111. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 39

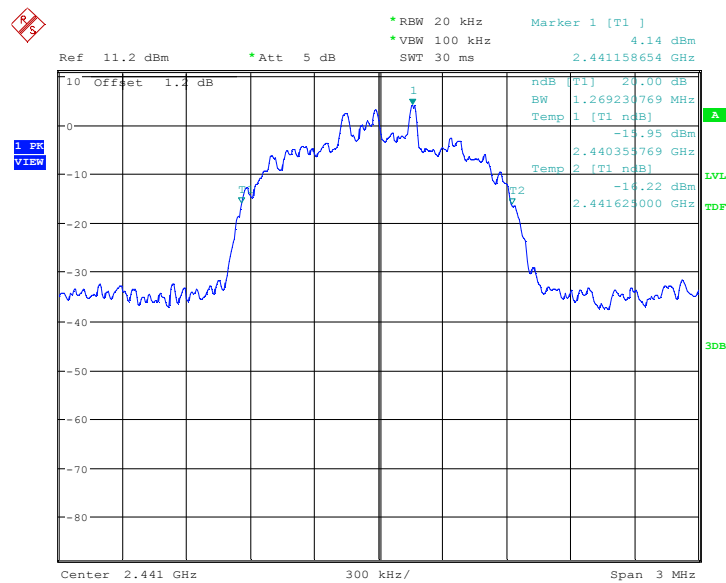


Fig.112. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 78




Date: 3.DEC.2014 18:38:58

Fig.113. 20dB Bandwidth: 8DPSK, Channel 0



Date: 3.DEC.2014 18:39:30

Fig.114. 20dB Bandwidth: 8DPSK, Channel 39

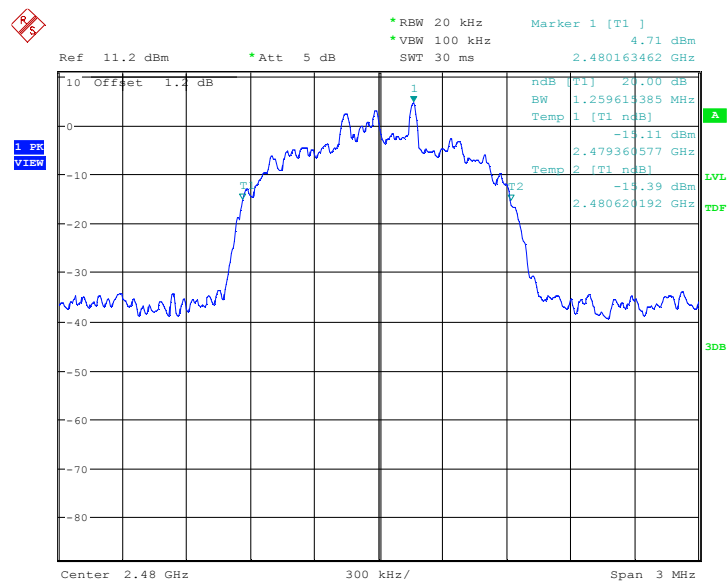

Date: 3.DEC.2014 18:40:02

Fig.115. 20dB Bandwidth: 8DPSK, Channel 78

A.8. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=1MHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.116	1168.27	P

For $\pi/4$ DQPSK


Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.117	1019.23	P

For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.118	1307.69	P


Conclusion: PASS

Test graphs as below:

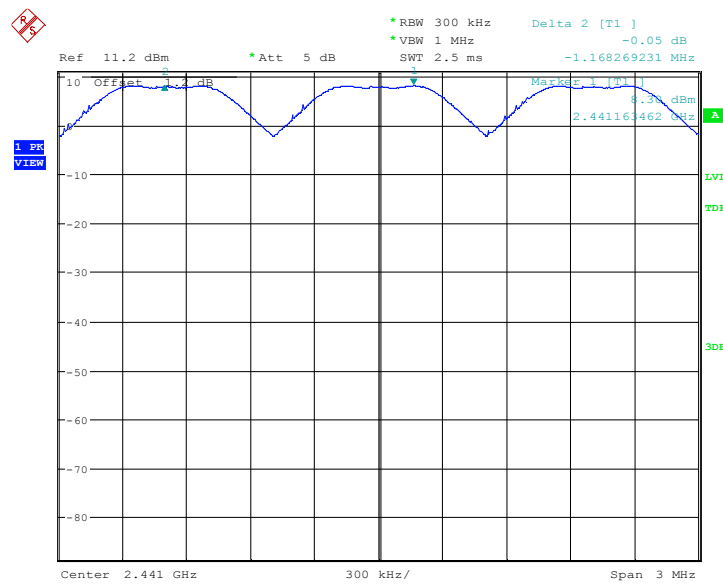


Date: 3.DEC.2014 17:58:00

Fig.116. Carrier frequency separation measurement: GFSK, Channel 39

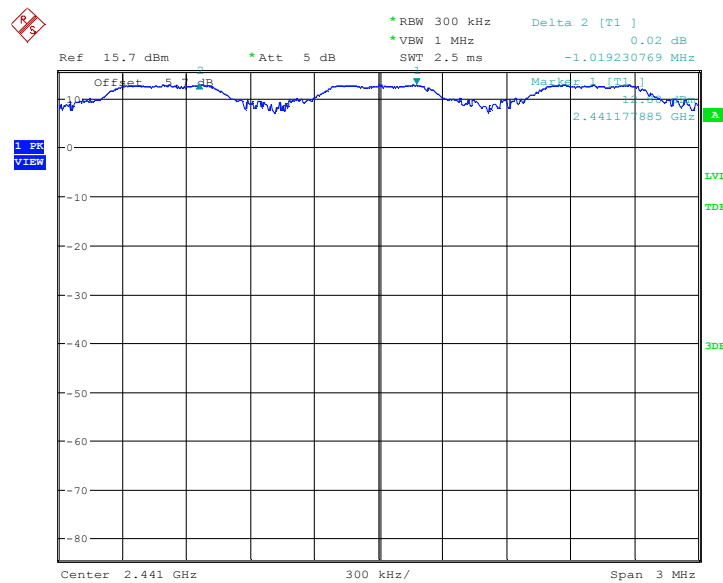

Date: 3.DEC.2014 19:08:04

Fig.117. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

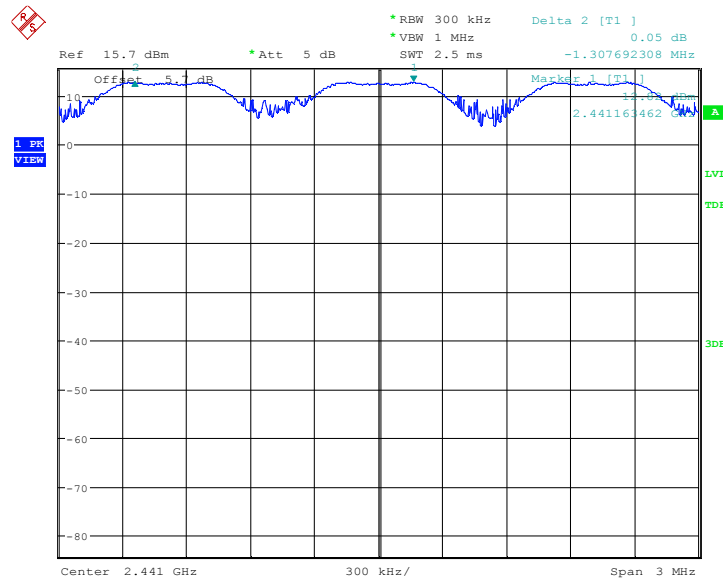

Date: 3.DEC.2014 19:13:17

Fig.118. Carrier frequency separation measurement: 8DPSK, Channel 39

A.9. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.119	79	P
40~78	Fig.120		

For $\pi/4$ DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.121	79	P
40~78	Fig.122		

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.123	79	P
40~78	Fig.124		


Conclusion: PASS

Test graphs as below:




The screenshot shows a VectorStar spectrum analyzer interface. The main display is a grid with a blue trace representing a signal. The trace is centered at 2.44189670 GHz, with a frequency range from 2.44145 GHz to 2.481 GHz. The power level is 11.2 dBm. The resolution bandwidth (RBW) is 500 kHz, and the video bandwidth (VBW) is 500 kHz. The sweep time (SWT) is 2.5 ms. The attenuation (Att) is 5 dB. The reference level (Ref) is 0 dB. The display is in 2D mode. The trace shows a signal with a peak at 2.44189670 GHz. The power level is 11.2 dBm. The resolution bandwidth (RBW) is 500 kHz, and the video bandwidth (VBW) is 500 kHz. The sweep time (SWT) is 2.5 ms. The attenuation (Att) is 5 dB. The reference level (Ref) is 0 dB. The display is in 2D mode.

Date: 3.DEC.2014 18:02:07

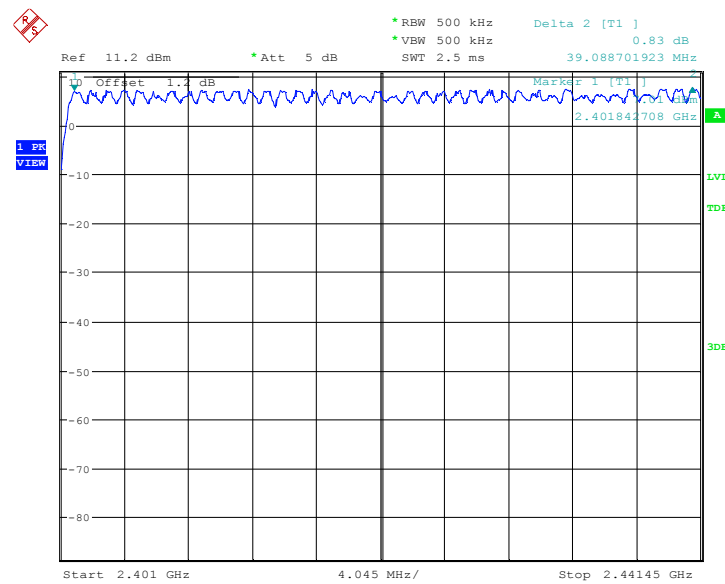


Date: 3.DEC.2014 18:22:04

Fig.121. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

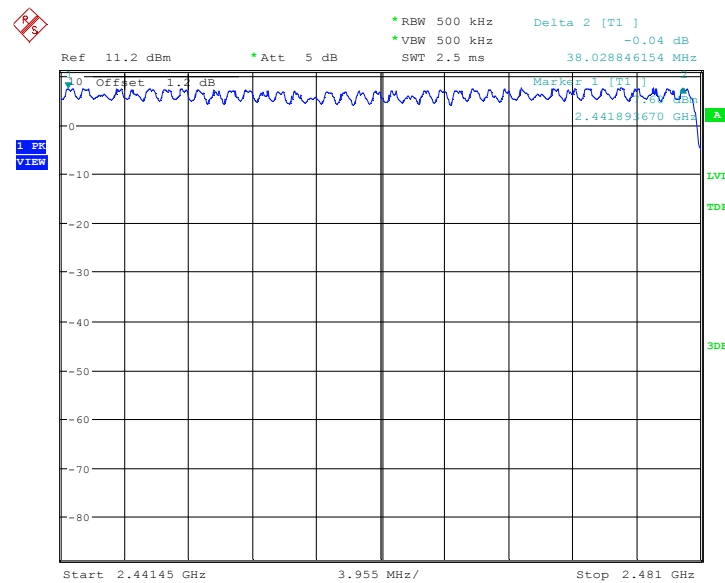


Date: 3.DEC.2014 18:24:06

Fig.122. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

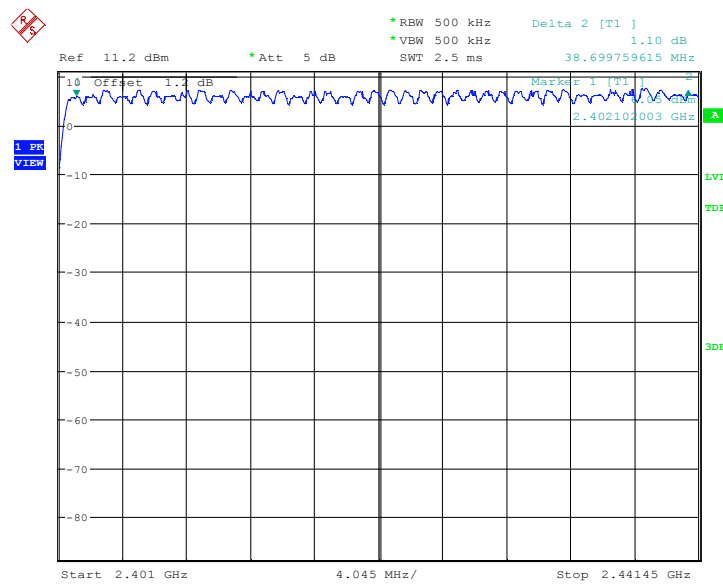

Date: 3.DEC.2014 18:44:11

Fig.123. Number of hopping frequencies: 8DPSK, Channel 0 - 39

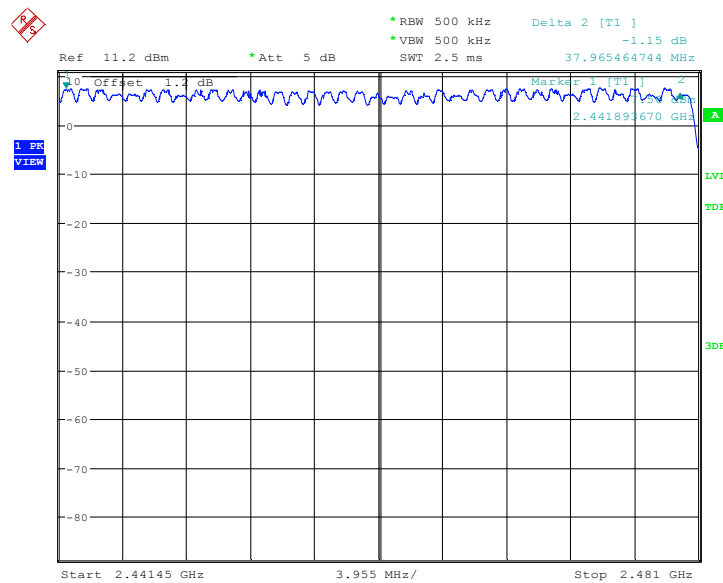

Date: 3.DEC.2014 18:46:13

Fig.124. Number of hopping frequencies: 8DPSK, Channel 40 - 78

A.10. AC Powerline Conducted Emission**Test Condition**

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:**Bluetooth (Quasi-peak Limit)**

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

Conclusion: PASS

Test graphs as below:

Traffic:

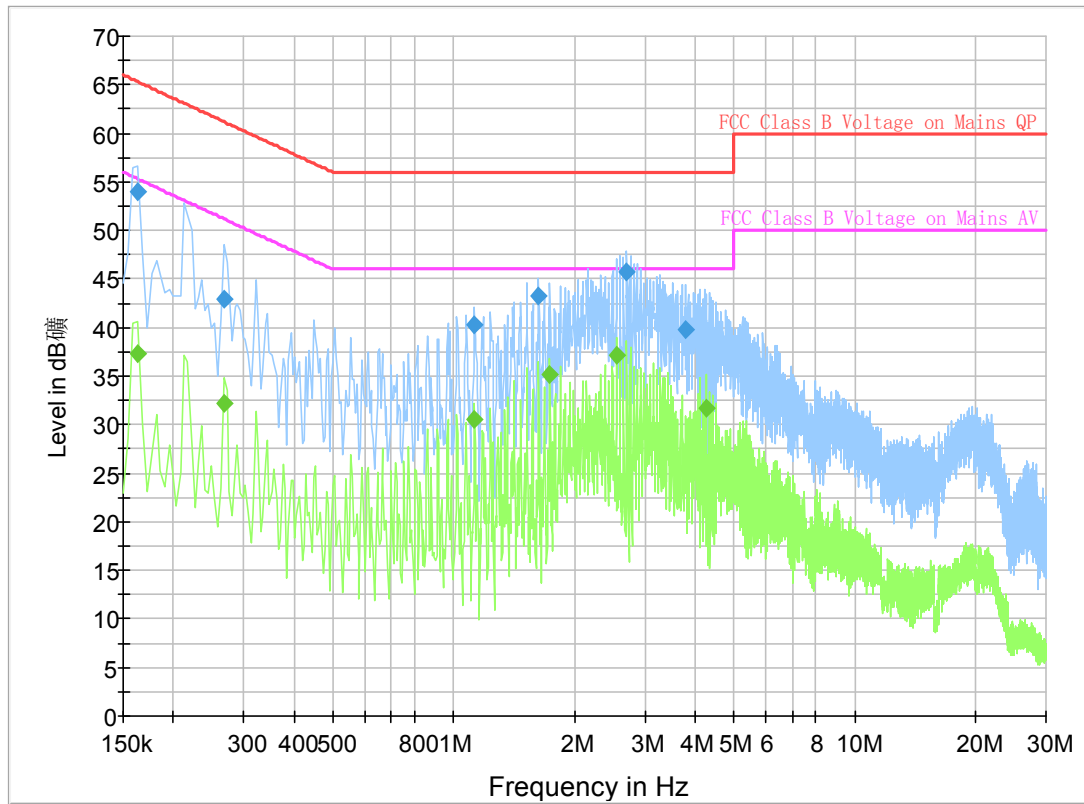


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.163500	54.0	2000.0	9.000	On	L1	19.9	11.3	65.3	
0.267000	43.0	2000.0	9.000	On	L1	19.8	18.2	61.2	
1.126500	40.3	2000.0	9.000	On	L1	19.7	15.7	56.0	
1.630500	43.2	2000.0	9.000	On	L1	19.7	12.8	56.0	
2.706000	45.7	2000.0	9.000	On	L1	19.7	10.3	56.0	
3.786000	39.8	2000.0	9.000	On	N	19.7	16.2	56.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.163500	37.3	2000.0	9.000	On	L1	19.9	18.0	55.3	
0.267000	32.3	2000.0	9.000	On	L1	19.8	18.9	51.2	
1.126500	30.5	2000.0	9.000	On	L1	19.7	15.5	46.0	
1.738500	35.2	2000.0	9.000	On	L1	19.7	10.8	46.0	
2.544000	37.1	2000.0	9.000	On	L1	19.7	8.9	46.0	
4.281000	31.7	2000.0	9.000	On	L1	19.6	14.3	46.0	

Idle:

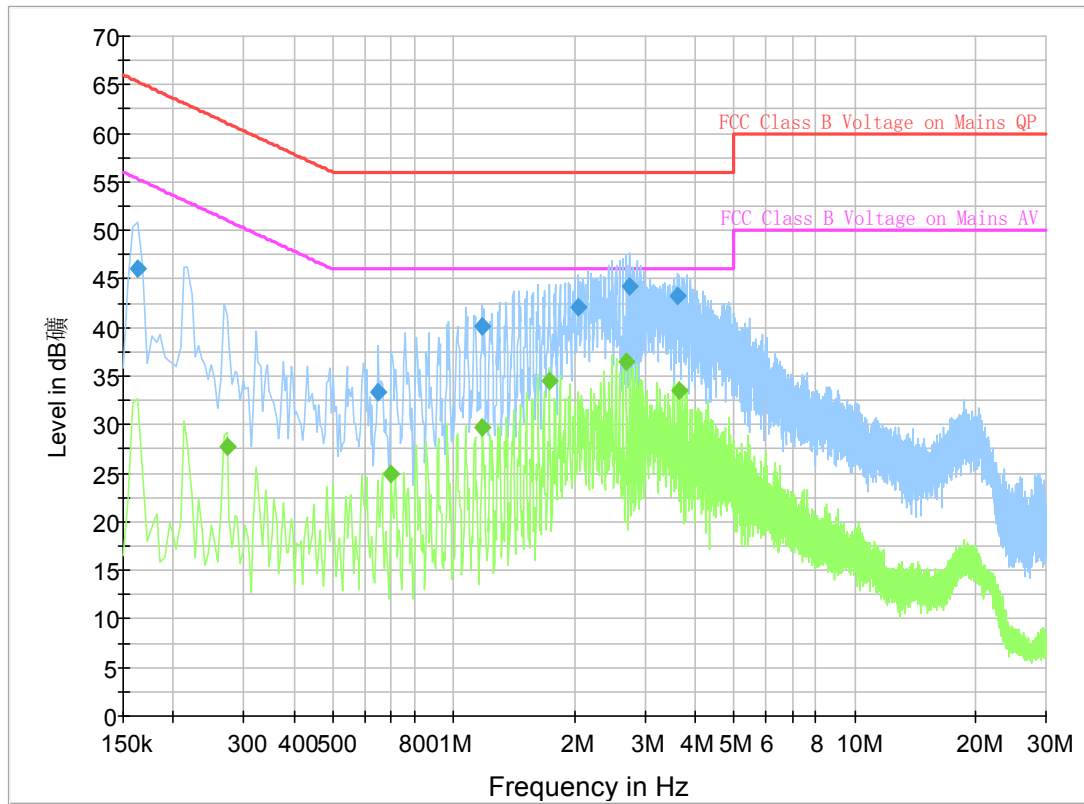

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.163500	46.0	2000.0	9.000	On	L1	19.9	19.3	65.3	
0.649500	33.4	2000.0	9.000	On	N	19.9	22.6	56.0	
1.180500	40.1	2000.0	9.000	On	L1	19.7	15.9	56.0	
2.040000	42.1	2000.0	9.000	On	L1	19.7	13.9	56.0	
2.755500	44.2	2000.0	9.000	On	L1	19.7	11.8	56.0	
3.610500	43.2	2000.0	9.000	On	L1	19.7	12.8	56.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.271500	27.8	2000.0	9.000	On	L1	19.9	23.3	51.1	
0.699000	25.0	2000.0	9.000	On	L1	19.9	21.0	46.0	
1.180500	29.7	2000.0	9.000	On	L1	19.7	16.3	46.0	
1.734000	34.5	2000.0	9.000	On	L1	19.7	11.5	46.0	
2.701500	36.5	2000.0	9.000	On	L1	19.7	9.5	46.0	
3.664500	33.5	2000.0	9.000	On	L1	19.7	12.5	46.0	

ANNEX B: Accreditation Certificate



China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(Registration No. CNAS L0570)

**Telecommunication Technology Labs,
Academy of Telecommunication Research, MIIT**
No.52, Huayuan North Road, Haidian District, Beijing, China

is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing and calibration.

The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.

Date of Issue: 2014-06-20

Date of Expiry: 2017-06-19

Date of Initial Accreditation: 1998-07-03

Date of Update: 2014-06-20



Signed on behalf of China National Accreditation Service
for Conformity Assessment

China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CACA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).

No.CNAS AL 2

0010044

END OF REPORT