



The Photos of SAR test

No. I15Z40237-SEM01

For

TCL Communication Ltd

HSUPA/HSDPA/UMTS Tri-band/GSM Quad-band mobile phone

Model Name: 4027A,4028A

With

Hardware Version: PIO

Software Version: v6D51

FCC ID: 2ACCJH015

Issued Date: 2015-03-25



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504


Email:ctl_terminals@catr.cn, website:www.chinattl.com



Picture 1: Constituents of the sample




Picture 2: Left Hand Touch Cheek Position

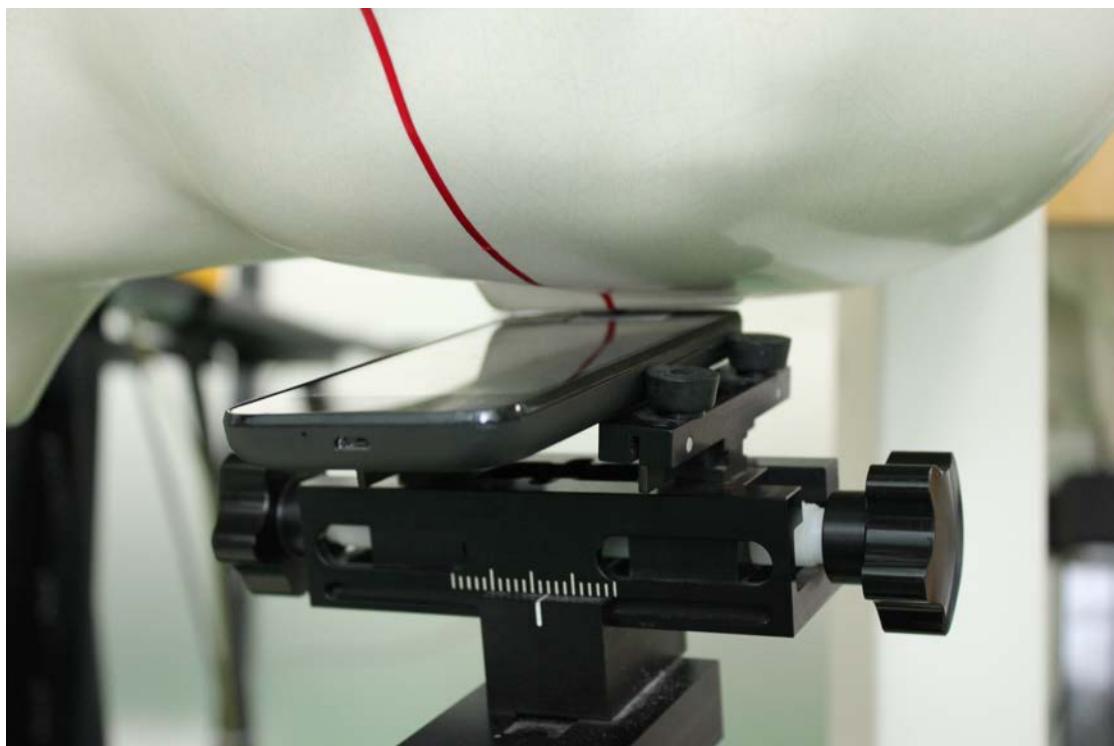

Picture 3: Left Hand Tilt 15° Position



Picture 4: Right Hand Touch Cheek Position

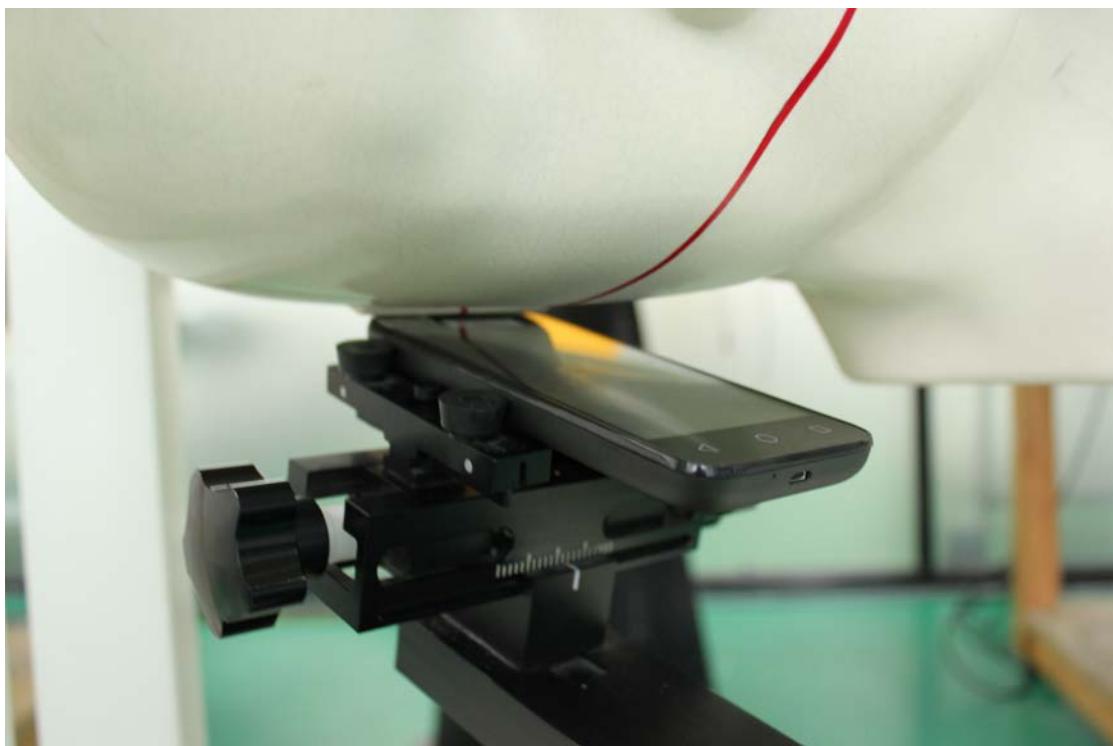


Picture 5: Right Hand Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:



Picture 6: Front

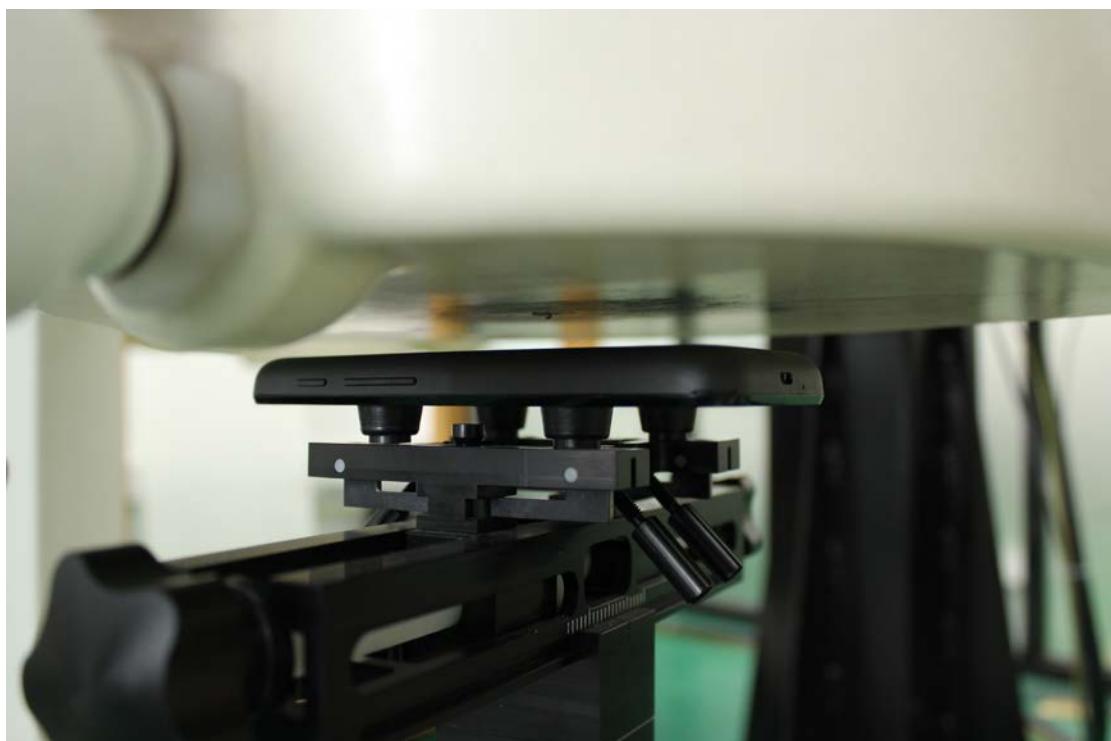


Picture 7: Rear




Picture 7-1: Rear with Headset



Picture 8: Left Side

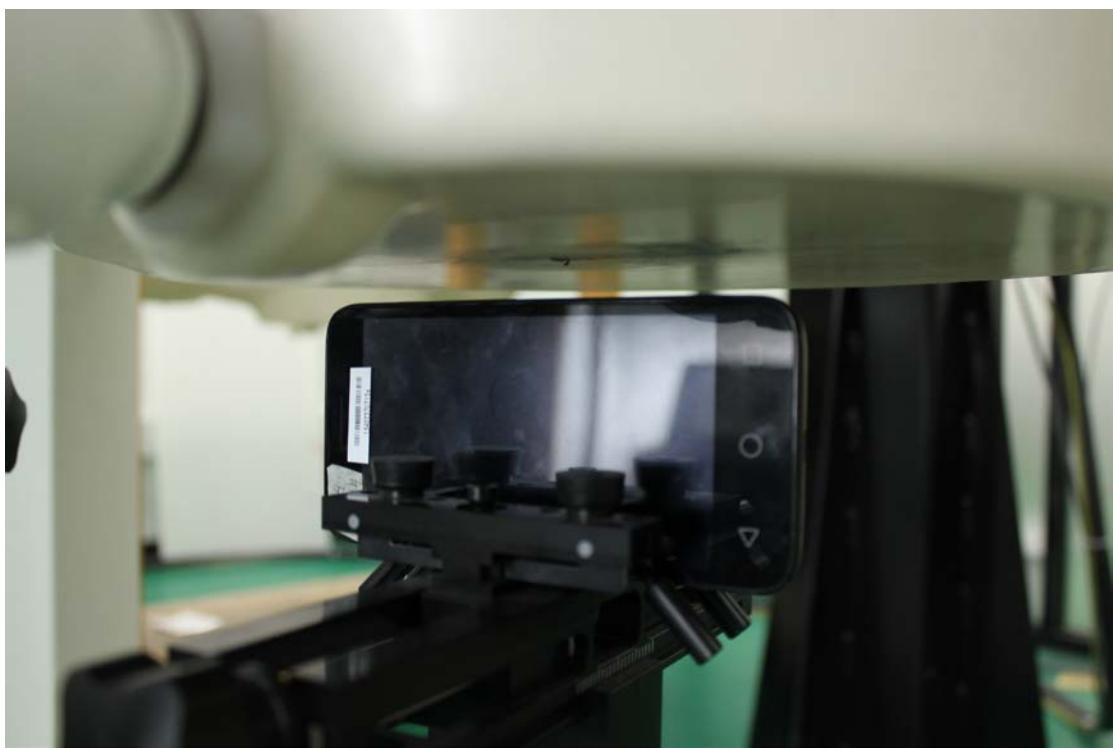

Picture 9: Right Side

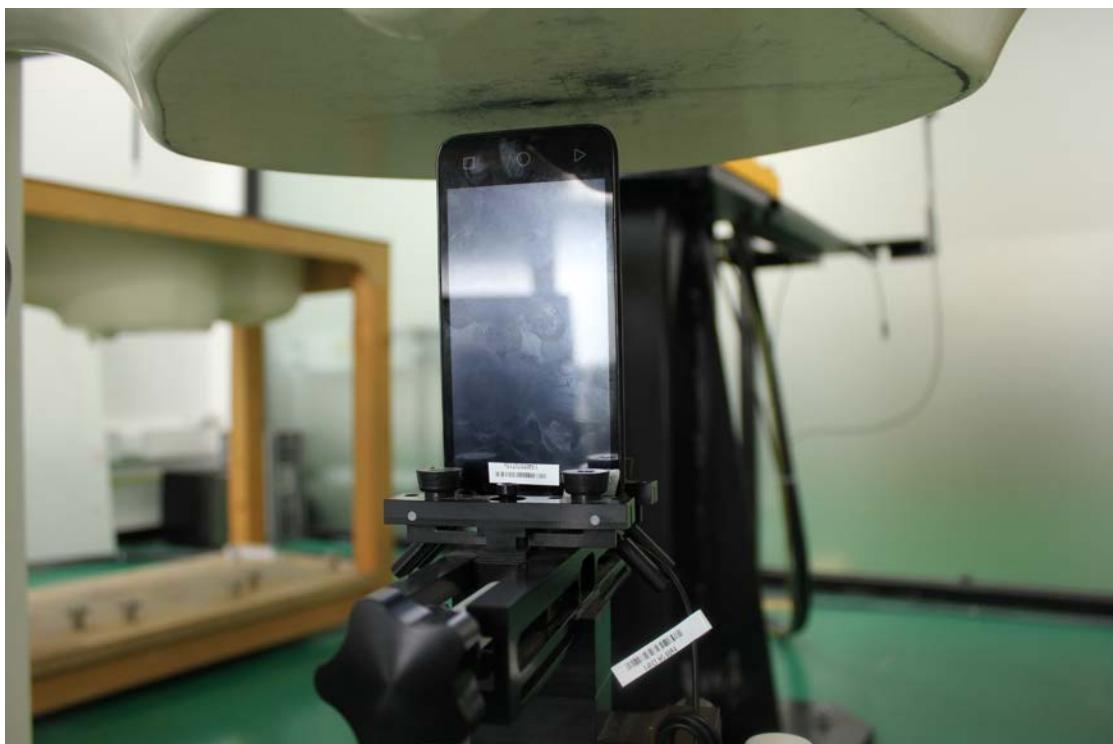

Picture 10: Bottom Side



Picture 10-1: Bottom Side with headset



Picture 11: Top Side