

DASY5 Validation Report for Head TSL

Date: 24.07.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:853

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.54, 4.54, 4.54); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.4 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.24 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

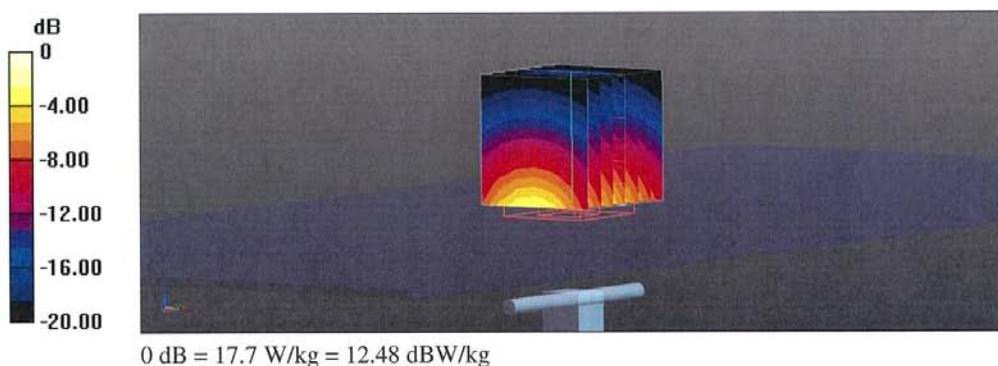

Impedance Measurement Plot for Head TSL

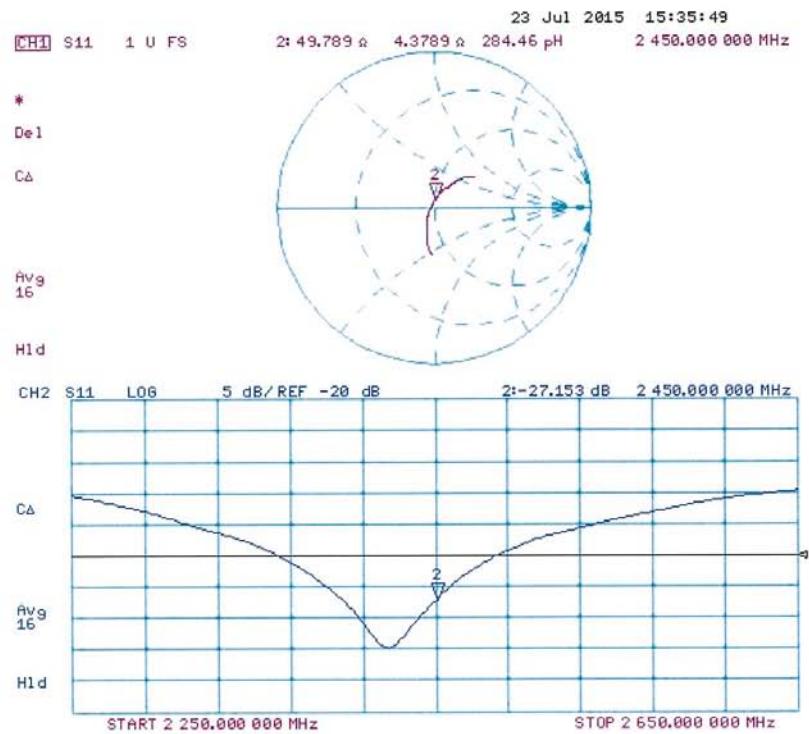

DASY5 Validation Report for Body TSL

Date: 24.07.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:853

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.79 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.16 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

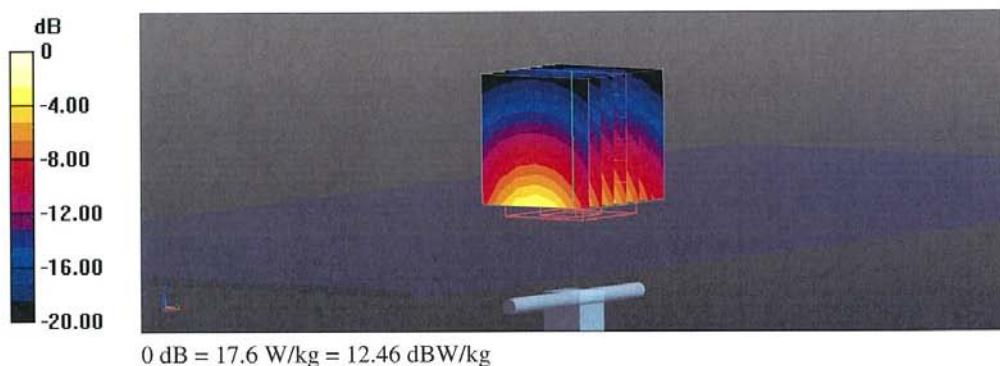

Impedance Measurement Plot for Body TSL

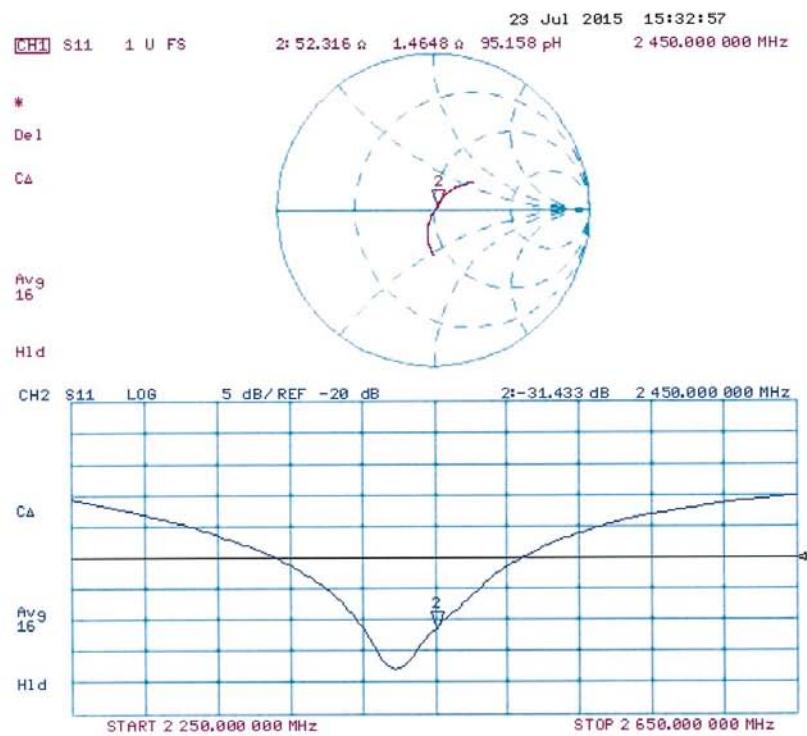

ANNEX I SPOT CHECK TEST

As the test lab for 4034E from TCL Communication Ltd, we, CTTL (Shouxiang), declare on our sole responsibility that, according to “Declaration of changes” provided by applicant, only the Spot check test should be performed. The test results are as below.

I.1 Conducted power of selected case

Table I.1-1: The conducted power results for GSM850/1900

GSM 850MHz	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	\	32.83	\
GSM 1900MHz	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	29.63	\	\

Table I.1-2: The conducted power results for GPRS

GSM 850 GPRS (GMSK)	Measured Power (dBm)		
	251	190	128
1 Txslots	\	32.83	\
PCS1900 GPRS (GMSK)	Measured Power (dBm)		
	810	661	512
2 Txslots	\	\	27.37

Table I.1-3: The conducted Power for WCDMA

Item	band	FDDV result		
	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	\	\	23.71	\
Item	band	FDDII result		
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	\	\	22.56	\

Table I.1-4: The conducted Power for WLAN

802.11b(dBm)				
Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1(2412MHz)	\	\	15.79	\

I.2 Measurement results

Table I.2-1: SAR Values (GSM 850 MHz Band - Head)

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.6	190	Left	Touch	Fig.1	32.83	33.3	0.55	0.61	0.726	0.81	0.07

Table I.2-2: SAR Values (GSM 850 MHz Band-Body)

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.6	190	GPRS (1)	Front	Fig.2	32.83	33.3	0.456	0.51	0.611	0.68	-0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table I.2-3: SAR Values (GSM1900 MHz Band - Head)

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1909.8	810	Left	Touch	Fig.3	29.63	30.3	0.223	0.26	0.384	0.45	0.02

Table I.2-4: SAR Values (GSM 1900 MHz Band-Body)

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1850.2	512	GPRS (2)	Rear	Fig.4	27.37	28	0.267	0.31	0.440	0.51	0.13

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table I.2-5: SAR Values (WCDMA 850 MHz Band - Head)

Ambient Temperature: 22.5 °C Liquid Temperature: 22.0 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.4	4182	Left	Touch	Fig.5	23.71	24	0.594	0.64	0.78	0.83	0.06

Table I.2-6: SAR Values (WCDMA 850 MHz Band-Body)

Ambient Temperature: 22.5 °C				Liquid Temperature: 22.0 °C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.4	4182	Rear	Fig.6	23.71	24	0.59	0.63	0.794	0.85	-0.13

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table I.2-7: SAR Values (WCDMA1900 MHz Band - Head)

Ambient Temperature: 22.5 °C				Liquid Temperature: 22.0 °C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	9400	Left	Touch	Fig.7	22.56	23	0.268	0.30	0.454	0.50	0.12

Table I.2-8: SAR Values (WCDMA1900 MHz Band-Body)

Ambient Temperature: 22.5 °C				Liquid Temperature: 22.0 °C							
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.										
1880	9400	Rear	Fig.8	22.56	23	0.33	0.37	0.549	0.61	-0.17	

Note1: The distance between the EUT and the phantom bottom is 10mm.

I.3 WLAN Evaluation

Head Evaluation

Table I.3-1: SAR Values (WLAN - Head) – 802.11b 5.5Mbps (Full SAR)

Ambient Temperature: 22.5 °C				Liquid Temperature: 22.0 °C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2412	1	Left	Touch	Fig.9	15.79	16.5	0.072	0.08	0.151	0.18	0.06

Table I.3-2: SAR Values (WLAN - Head) – 802.11b 5.5Mbps (Scaled Reported SAR)

Ambient Temperature: 22.5 °C				Liquid Temperature: 22.0 °C			
Frequency		Side	Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)
MHz	Ch.						
2412	1	Left	Touch	98.25%	100%	0.18	0.18


Body Evaluation

Table I.3-3: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Fast SAR)

		Ambient Temperature: 22.0 °C				Liquid Temperature: 21.6 °C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.			(dBm)	(dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
2412	1	Rear	Fig.10	15.79	16.5	0.0126	0.01	0.0365	0.04	0.09

Table I.3-4: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Scaled Reported SAR)

		Ambient Temperature: 22.5 °C				Liquid Temperature: 22.0 °C	
Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)	
MHz	Ch.						
2412	1	Rear	98.25%	100%	0.04	0.04	0.04

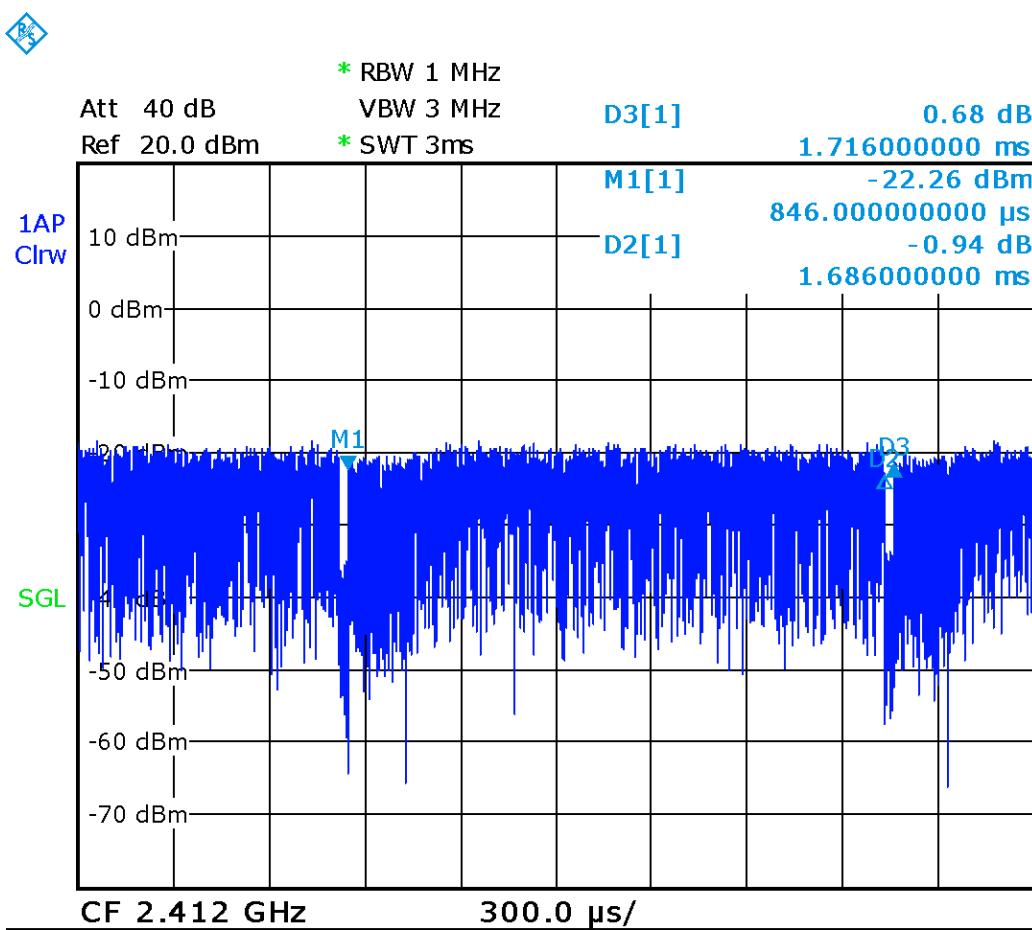

Date: 22.JAN.2016 09:58:14

Picture I.1 The plot of duty factor for WLAN-2.4G

I.4 Reported SAR Comparison

Exposure Configuration	Technology Band	Reported SAR 1g (W/Kg): spot check	Reported SAR 1g (W/Kg): original
Head (Separation Distance 0mm)	GSM 850	0.81	0.97
	PCS 1900	0.45	0.47
	UMTS FDD 5	0.83	0.94
	UMTS FDD 2	0.50	0.55
	WLAN 2.4 GHz	0.18	0.20
Body-worn (Data) (Separation Distance 10mm)	GSM 850	0.68	0.83
	PCS 1900	0.51	0.81
	UMTS FDD 5	0.85	1.01
	UMTS FDD 2	0.61	0.87
	WLAN 2.4 GHz	0.04	0.10

850 Left Cheek Middle

Date: 2016-01-01

Electronics: DAE4 Sn777

Medium: Head 850 MHz

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3617 ConvF(9.58, 9.58, 9.58)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.798 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.111 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.905 W/kg

SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.550 W/kg

Maximum value of SAR (measured) = 0.787 W/kg

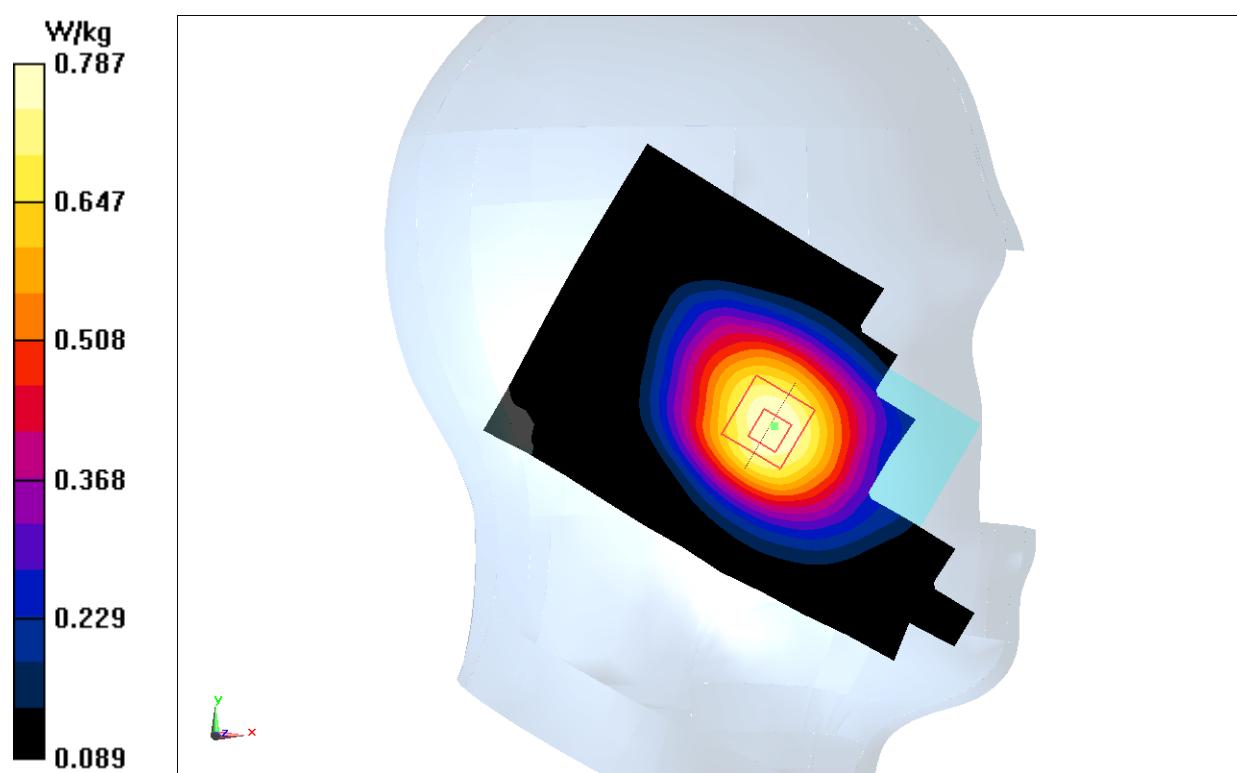


Fig.1 850MHz

850 Body Front Middle

Date: 2016-01-01

Electronics: DAE4 Sn777

Medium: Body 850 MHz

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.215$ mho/m; $\epsilon_r = 58.504$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.667 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.40 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.792 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.456 W/kg

Maximum value of SAR (measured) = 0.675 W/kg

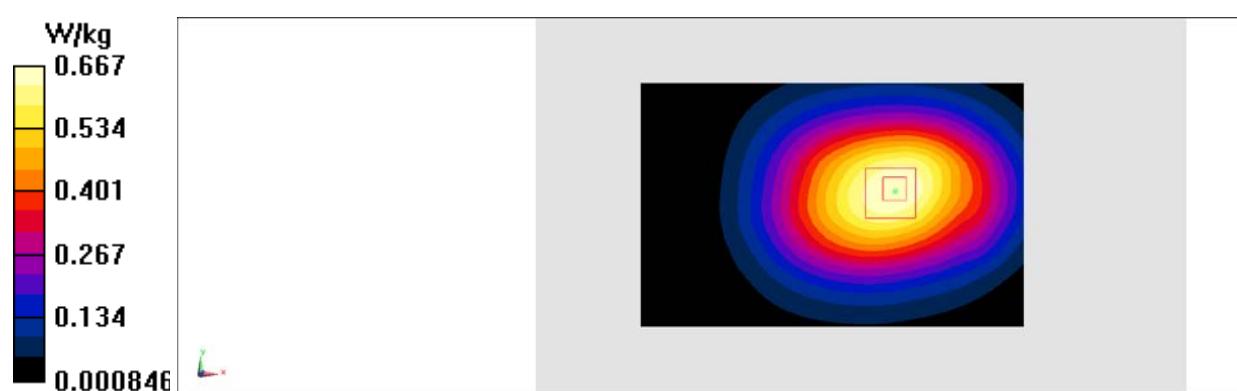


Fig.2 850 MHz

1900 Left Cheek High

Date: 2016-01-02

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters use (interpolated): $f = 1909.8$ MHz; $\sigma = 1.241$ mho/m; $\epsilon_r = 38.122$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3617 ConvF(8.07, 8.07, 8.07)

Area Scan (71x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.459 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.442 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.465 W/kg

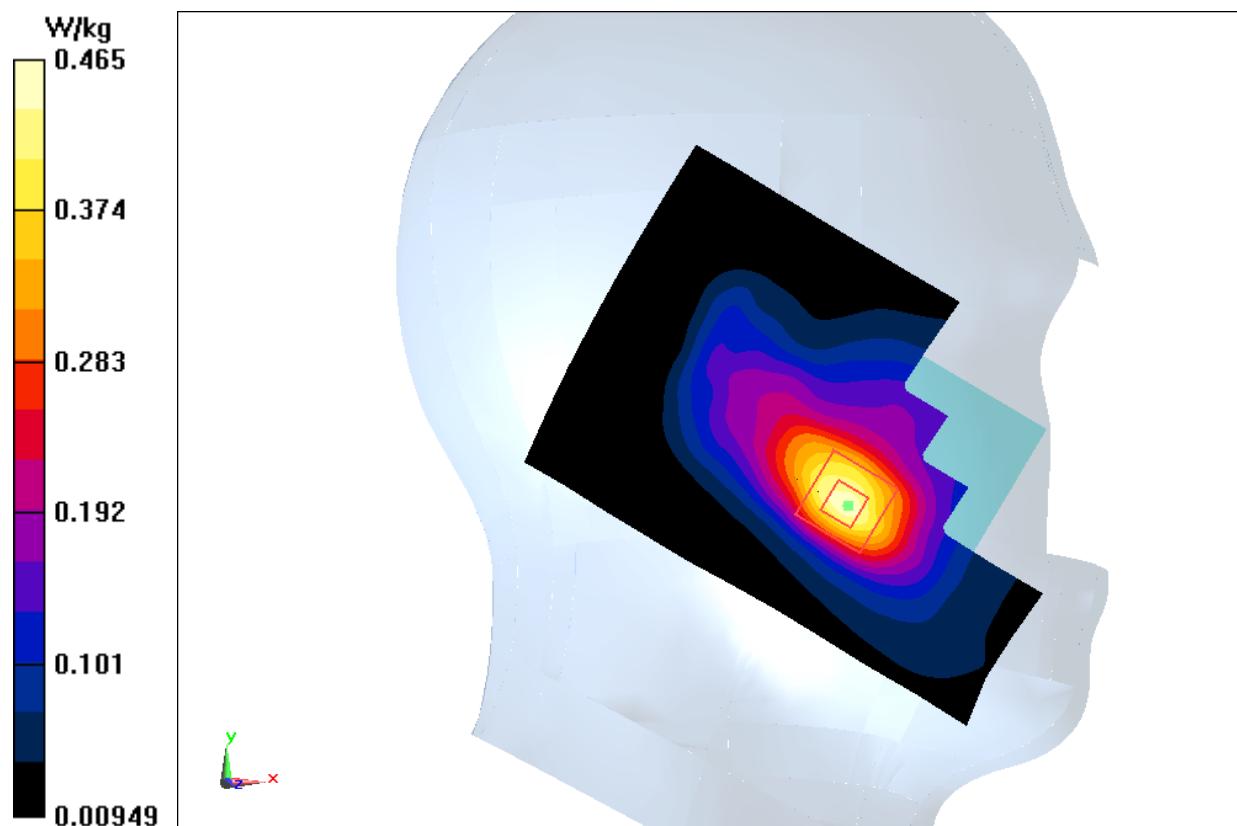


Fig.3 1900 MHz

1900 Body Rear High

Date: 2016-01-02

Electronics: DAE4 Sn777

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.649$ mho/m; $\epsilon_r = 55.04$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: EX3DV4 – SN3617 ConvF(7.74, 7.74, 7.74)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.520 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.054 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

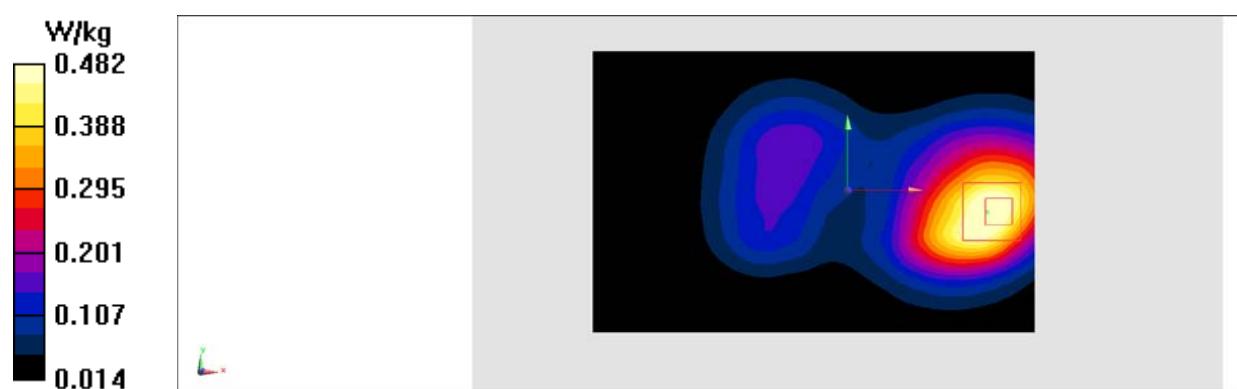


Fig.4 1900 MHz

WCDMA 850 Left Cheek Middle

Date: 2016-01-01

Electronics: DAE4 Sn777

Medium: Head 850 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.912$ mho/m; $\epsilon_r = 40.01$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.58, 9.58, 9.58)

Area Scan (71x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.860 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.12 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.954 W/kg

SAR(1 g) = 0.780 W/kg; SAR(10 g) = 0.594 W/kg

Maximum value of SAR (measured) = 0.855 W/kg

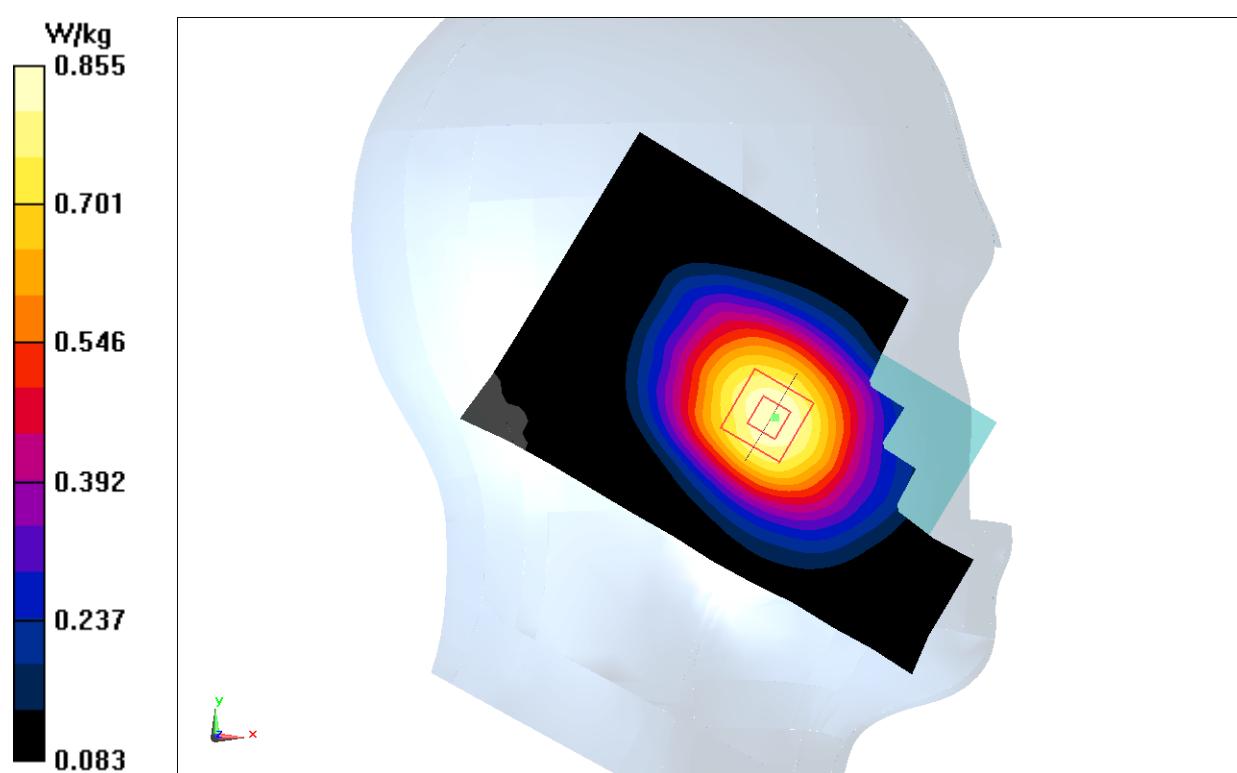


Fig.5 WCDMA 850

WCDMA 850 Body Rear Middle

Date: 2016-01-01

Electronics: DAE4 Sn777

Medium: Body 850 MHz

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.831$ mho/m; $\epsilon_r = 54.461$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(9.71, 9.71, 9.71)

Area Scan (121x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.872 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.48 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.590 W/kg

Maximum value of SAR (measured) = 0.872 W/kg

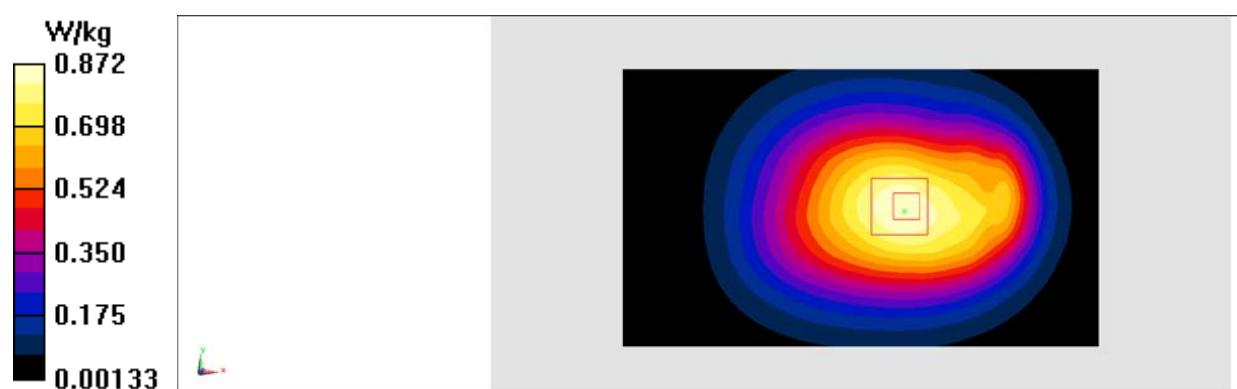


Fig.6 WCDMA 850

WCDMA 1900 Left Cheek Middle

Date: 2016-01-06

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.168$ mho/m; $\epsilon_r = 38.147$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617ConvF(8.07, 8.07, 8.07)

Area Scan (71x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.541 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.969 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 0.543 W/kg

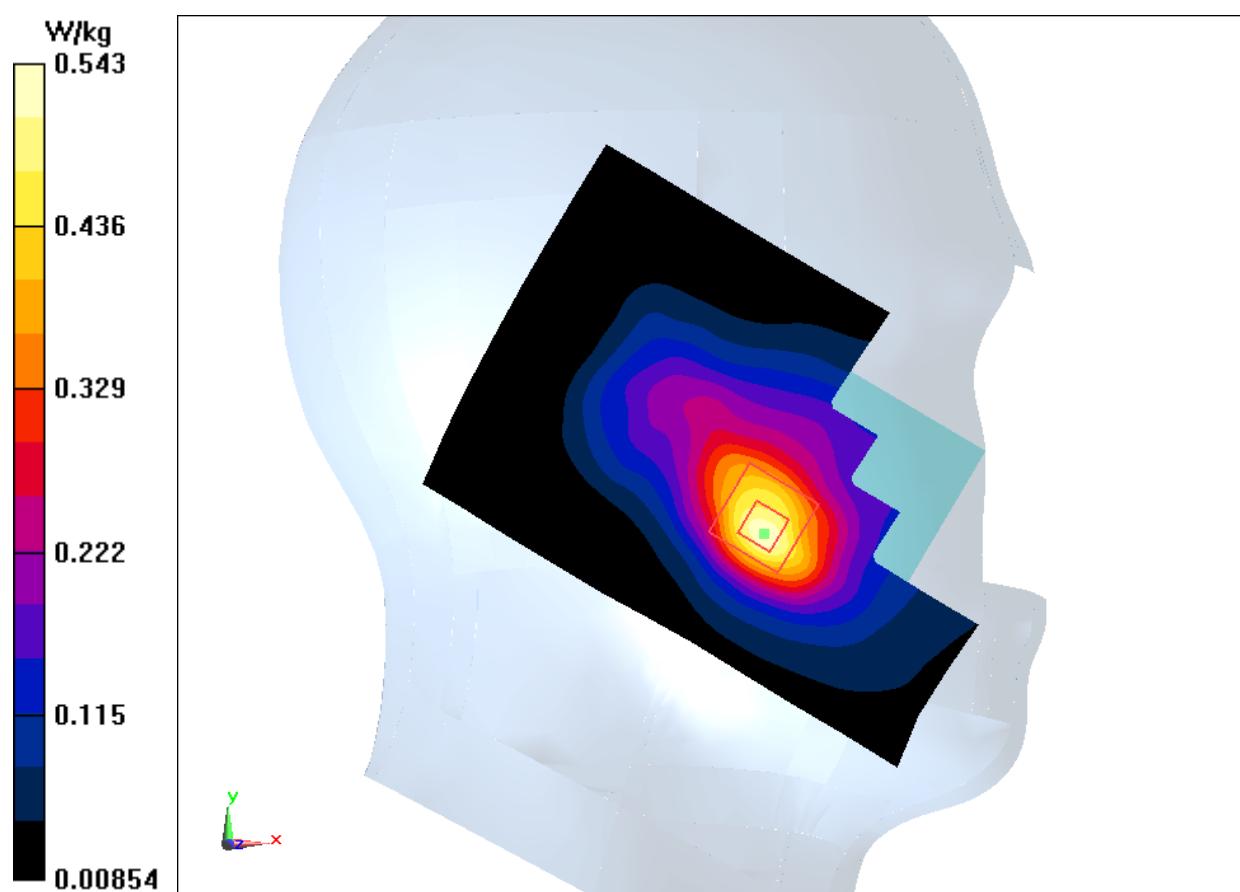


Fig.7 WCDMA1900

WCDMA 1900 Body Rear Low

Date: 2016-01-02

Electronics: DAE4 Sn777

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.257$ mho/m; $\epsilon_r = 52.172$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WCDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3617 ConvF(7.74, 7.74, 7.74)

Area Scan (111x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.656 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.292 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.891 W/kg

SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

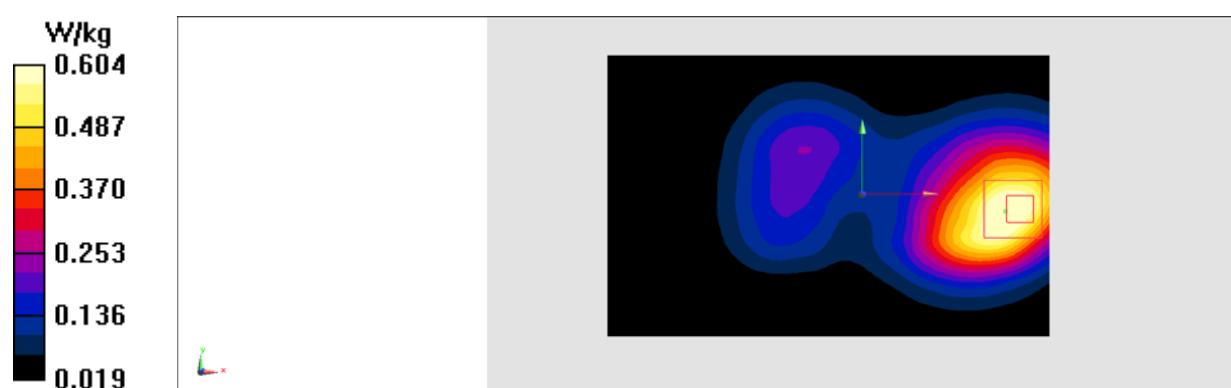


Fig.8 WCDMA1900

Wifi 802.11b Left Cheek Channel 1

Date: 2016-01-03

Electronics: DAE4 Sn777

Medium: Head 2450 MHz

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.585$ mho/m; $\epsilon_r = 37.843$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WLan 2450 Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF (7.24, 7.24, 7.24)

Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.199 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.968 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

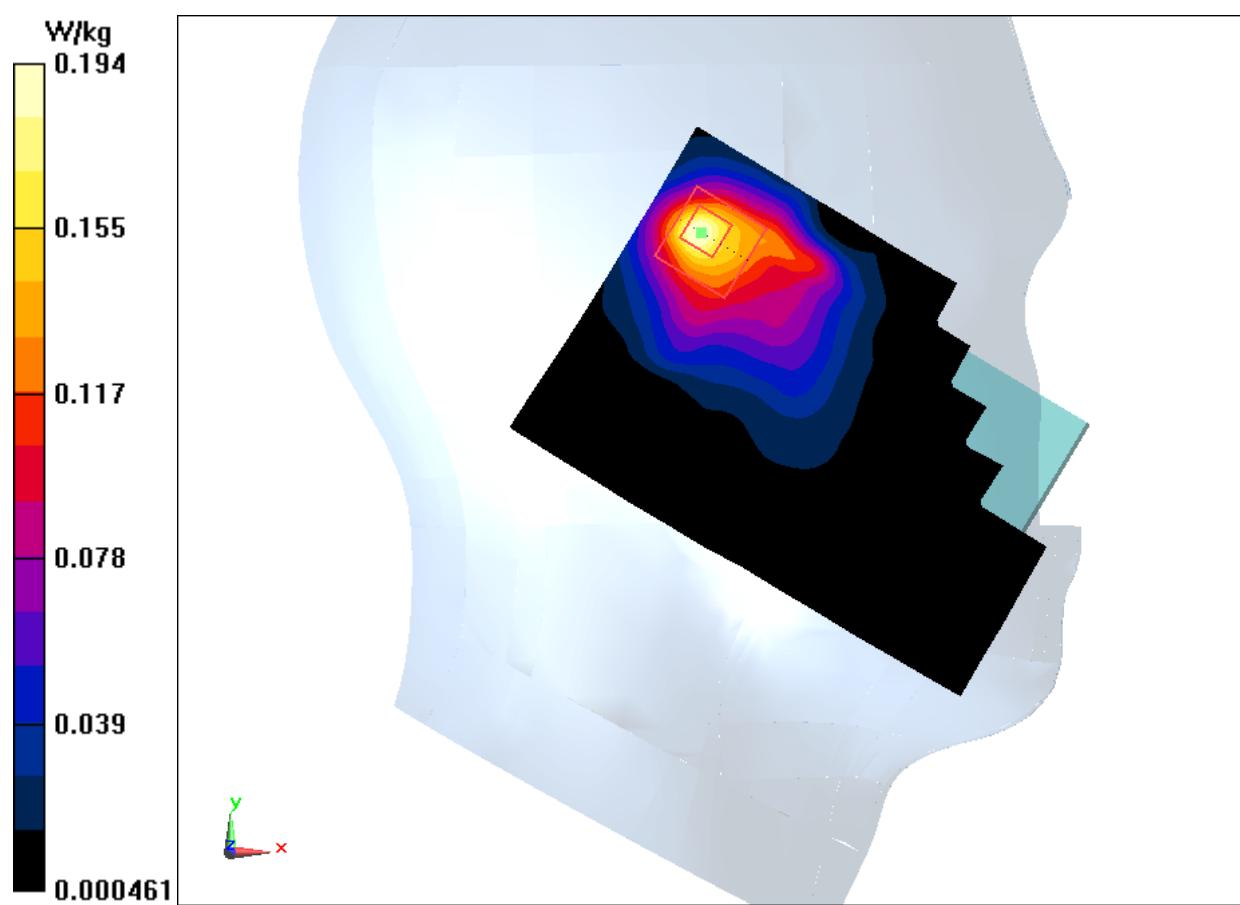


Fig.9 2450 MHz

Wifi 802.11b Body Rear Channel 1

Date: 2016-01-03

Electronics: DAE4 Sn777

Medium: Body 2450 MHz

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.852$ mho/m; $\epsilon_r = 50.597$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: WLan 2450 Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.35, 7.35, 7.35)

Area Scan (101x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0795 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.911 V/m; Power Drift = 0.10dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0498 W/kg

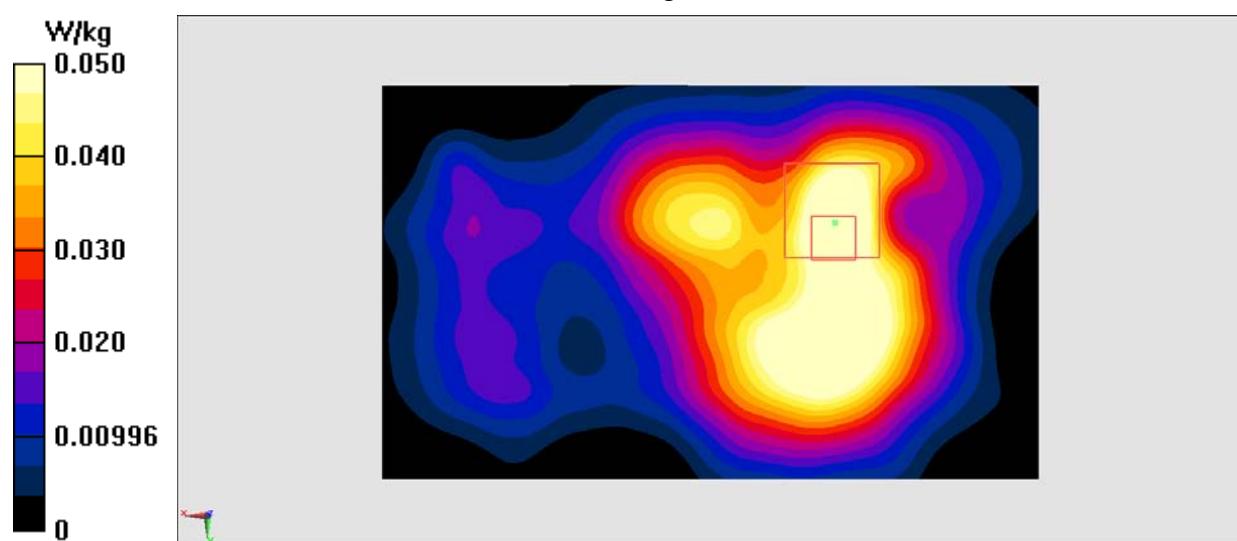


Fig.10 2450 MHz

ANNEX J Accreditation Certificate



China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(No. CNAS L0570)

Telecommunication Technology Labs,
Academy of Telecommunication Research, MIIT
No.52, Huayuan North Road, Haidian District, Beijing, China
No.51, Xueyuan Road, Haidian District, Beijing, China

in ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing and calibration.

The scope of accreditation is detailed in the attached schedule bearing the same accreditation number as above. The schedule forms an integral part of this certificate.

Date of Issue: 2014-10-29

Date of Expiry: 2017-06-19

Date of Initial Accreditation: 1998-07-03



Signed on behalf of China National Accreditation Service
for Conformity Assessment

China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC-MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC-MRA).

No. CNAS AL 2

0011149