



TEST REPORT

No. I16Z40428-SRD12

for

TCL Communication Ltd.

GSM/ UMTS/LTE handheld station

Model Name : VFD 700

FCC ID: 2ACCJH051

with

Hardware Version: PIO

Software Version: v2DS1

Issued Date: 2016-04-21



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

| Report Number | Revision | Description | Issue Date |
|----------------------|-----------------|--------------------|-------------------|
| I16Z40428-SRD12 | Rev.0 | 1st edition | 2016-04-21 |
| | | | |

CONTENTS

| | |
|--|-----------|
| 1. BTEST LABORATORY | 4 |
| 1.1. 8BTESING LOCATION | 4 |
| 1.2. 9BTESING ENVIRONMENT..... | 4 |
| 1.3. 10BPROJECT DATA | 4 |
| 1.4. 11BSIGNATURE | 4 |
| 2. BCLIENT INFORMATION | 5 |
| 2.1. 12BAPPLICANT INFORMATION | 5 |
| 2.2. 13BMANUFACTURER INFORMATION..... | 5 |
| 3. BEQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 6 |
| 3.1. 14BABOUT EUT | 6 |
| 3.2. 15BINTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 6 |
| 3.3. 16BINTERNAL IDENTIFICATION OF AE USED DURING THE TEST..... | 6 |
| 3.4. 17BGENERAL DESCRIPTION..... | 6 |
| 3.5. 18BEUT SET-UPS | 7 |
| 4. BREFERENCE DOCUMENTS | 7 |
| 4.1. 19BDOCUMENTS SUPPLIED BY THE APPLICANT | 7 |
| 4.2. 20BREGULATIONS AND STANDARDS..... | 7 |
| 5. BLABORATORY ENVIRONMENT | 8 |
| 6. BSUMMARY OF TEST RESULTS..... | 9 |
| 6.1. 21BSUMMARY OF TEST RESULTS..... | 9 |
| 6.2. 22BTERMS USED IN THE SUMMARY OF TEST RESULTS | 10 |
| 6.3. 23BSTATEMENTS..... | 10 |
| 7. BTEST EQUIPMENTS UTILIZED | 11 |
| ANNEX A: MEASUREMENT RESULTS..... | 12 |
| 24BA.1. ELECTRIC FIELD STRENGTH OF FUNDAMENTAL AND OUTSIDE THE ALLOCATED BANDS | 12 |
| 25BA.2. ELECTRIC FIELD RADIATED EMISSIONS (< 30MHz) | 14 |
| 26BA.3. ELECTRIC FIELD RADIATED EMISSIONS (\geq 30MHz) | 16 |
| 27BA.4. FREQUENCY TOLERANCE | 18 |
| 28BA.5. 20dB BANDWIDTH..... | 19 |
| 29BA.6. CONDUCTED EMISSION..... | 21 |
| ANNEX C: TEST LAYOUT | 24 |
| ANNEX D: ACCREDITATION CERTIFICATE | 24 |

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China 100191

1.2. Testing Environment

Ambient Temperature: 15 ~ 25 °C

Relative Humidity: 30 ~ 60 %

Air pressure 860 ~ 1060 mbar


1.3. Project Data

Receipt of Sample: Mar. 29th, 2016

Testing Start Date: Mar. 29th, 2016

Testing End Date: Apr. 20th, 2016

1.4. Signature




Xiao Ming

(Prepared this test report)



Zhu Liang

(Reviewed this test report)



Lv Songdong

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Telephone: +86- 0086-21-31363544
Fax: +86- 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: +86- 0086-21-31363544
Fax: +86- 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

| | |
|------------------------|------------------------------------|
| Description: | GSM/UMTS /LTE handheld station |
| FCC ID | 2ACCJH051 |
| With NFC Function: | Yes |
| Frequency: | 13.56 MHz |
| Antenna: | Internal |
| Operation Voltage: | 3.5VDC to 4.2VDC (nominal: 3.7VDC) |
| Operation Temperature: | -10°C to +55°C |

Note1: Photographs of EUT are shown in ANNEX B of this test report. For component list, please refer to documents of the manufacturer.

3.2. Internal Identification of EUT Used during the Test

Mobile phone identification

| EUT ID* | IMEI | HW Version | SW Version |
|---------|-----------------|------------|------------|
| EUT | 357042070003786 | PIO | v2DS1 |

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE Used during the Test

| AE ID* | Description | SN | Reversion |
|-----------------|----------------|----|---------------|
| AE1 | Travel Charger | / | 16TCT-CH-0417 |
| AE2 | USB Cable | / | 16TCT-DC-0187 |
| AE3 | Type A CARD | / | / |
| AE1 | | | |
| Model | CBA0061AG0C1 | | |
| Manufacturer | BYD | | |
| Length of cable | / | | |
| AE2 | | | |
| Model | CDA0000024C2 | | |
| Manufacturer | JUWEI | | |
| Length of cable | 78 cm | | |
| AE3 | | | |
| Type | / | | |
| Manufacturer | Gemalto | | |

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

This is a product supporting GSM/UMTS/LTE with 2.4G/5G technologies.

Manuals and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

Manufacturer's declaration: NFC work does not depend on other access methods, such as WLAN, GPRS, etc.

3.5. EUT Set-ups

| EUT Set-up No. | Combination of EUT and AE | Remarks |
|-----------------------|----------------------------------|----------------|
| Set. NFC01 | EUT1 + AE1 + AE2 + AE3 | -- |
| Set. NFC02 | EUT1 | -- |
| Set. NFC03 | EUT1 + AE3 | |

The Transmit State of NFC: the NFC function is on. The EUT will transmit the NFC data and command continuously during the test.

The Transmit State of without modulation: The EUT will transmit the CW signal at the operating frequency.

4. Reference Documents

4.1. Documents Supplied by the Applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Regulations and Standards

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|------------------|---|----------------|
| CFR 47 Part 2 | Part 2 — Frequency Allocations and Radio Treaty Matters; General Rules and Regulations. | 2015 |
| CFR 47 Part 15 | Part 15 — Radio Frequency Devices. Subpart C — Intentional Radiators. § 15.35 Measurement detector functions and bandwidths. § 15.207 Conducted limits. § 15.209 Radiated emission limits, general requirements. § 15.215 Additional provisions to the general radiated emission limitations. § 15.225 Operation within the band 13.110–14.010 MHz. | 2015 |
| ANSI C63.4 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. | 2014 |

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

| | |
|---|---|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 15 %, Max. = 75 % |
| Shielding effectiveness | 0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB. |
| Electrical insulation | > 2 MΩ |
| Ground system resistance | < 4Ω |
| Normalised site attenuation (NSA) | < ± 4 dB, 3m/10m distance, from 30 to 1000 MHz |
| Site voltage standing-wave ratio (S_{VSWR}) | Between 0 and 6 dB, from 1GHz to 18GHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 3000 MHz |

Fully-Anechoic Chamber FAC-3 (8.6mx6.1mx3.85m) did not exceed following limits along the testing:

| | |
|---|---|
| Temperature | Min. = 15 °C, Max. = 25 °C |
| Relative humidity | Min. = 30 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 2 MΩ |
| Ground system resistance | < 1 Ω |
| Site voltage standing-wave ratio (S_{VSWR}) | Between 0 and 6 dB, from 1 to 18GHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 4000 MHz |

Conducted Chamber did not exceed following limits along the testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 25 °C |
| Relative humidity | Min. = 30 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 2 MΩ |
| Ground system resistance | < 0.5 Ω |

Control Room did not exceed following limits along the testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 25 °C |
| Relative humidity | Min. = 30 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 2 MΩ |
| Ground system resistance | < 0.5 Ω |

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

| No | Test Cases | Clause in Regulation | Section in This Report | Verdict |
|---|--|--|------------------------|-------------------|
| 1 | Electric Field Strength of Fundamental Emissions | CFR 47 § 15.225(a) | A.1 | P(Set. NFC03) |
| 2 | Electric Field Strength of Outside the Allocated Bands | CFR 47 § 15.225(b) CFR 47 § 15.225(c) | | P(Set. NFC03) |
| 3 | Electric Field Radiated Emissions | CFR 47 § 15.209 | A.2 | P(Set. NFC01) |
| | | CFR 47 § 15.225(d) | A.3 | P(Set. NFC01) |
| 4 | Frequency Tolerance | CFR 47 § 15.225(e) | A.4 | P(Set. NFC02) |
| 5 | 20dB Bandwidth | CFR 47 § 15.215(c) | A.5 | P(Set. NFC02, 03) |
| 6 | Conducted Emissions | CFR 47 § 15.207 | A.6 | P(Set. NFC01) |
| The measurement is carried out according to ANSI C63.4. See ANNEX A for details. | | | | |

Test Conditions:

For this report, all the test cases listed above were tested under normal Temperature, Voltage, Humidity, and Air Pressure. The specific conditions are as following:

| | | |
|--------------|-------|-----------|
| Temperature | T min | -10 °C |
| | T nom | 25 °C |
| | T max | 55 °C |
| Voltage | V min | 3.5 V |
| | V nom | 3.7 V |
| | V max | 4.2 V |
| Humidity | H nom | 44% |
| Air Pressure | A nom | 1010 mbar |

6.2. Terms Used in the Summary of Test Results

Terms Used in Condition Column:

| | |
|-------|--------------------|
| T nom | Normal Temperature |
| T min | Low Temperature |
| T max | High Temperature |
| V nom | Normal Voltage |
| V min | Low Voltage |
| V max | High voltage |
| H nom | Norm Humidity |
| A nom | Norm Air Pressure |

Terms Used in Verdict Column:

| | |
|----|---|
| P | Pass, The EUT complies with the essential requirements in the standard. |
| NP | Not Perform, The test was not performed by CTTL |
| NA | Not Applicable, The test was not applicable |
| F | Fail, The EUT does not comply with the essential requirements in the standard |

Abbreviations:

| | |
|----------|---------------------------------------|
| AC | Alternating Current |
| AFH | Adaptive Frequency Hopping |
| BW | Band Width |
| E.I.R.P. | equivalent isotropical radiated power |
| ISM | Industrial, Scientific and Medical |
| RF | Radio Frequency |
| Tx | Transmitter |

6.3. Statements

The test cases listed in Section 6.1 of this report for the EUT specified in Section 3 were performed by CTTL according to the reference documents in Section 4.

The EUT meets all applicable requirements of the regulations and standards in Section 4.2.

This report only deals with the NFC function among the features described in section 3.

7. Test Equipments Utilized

| NO. | NAME | TYPE | SERIES NUMBER | PRODUCER | CAL. DUE DATE | CAL. INTERVAL |
|-----|--------------------------------------|-----------|---------------|--------------|---------------|---------------|
| 1. | Thermal Chamber | PL-2G | 343074 | ESPEC | 2016-05-12 | 1 Year |
| 2. | Spectrum Analyzer | RSA3408A | B 010277 | Tektronix | 2016-05-27 | 1 Year |
| 3. | H-field Antenna | HFH2-Z2 | 829324/0007 | R&S | 2016-07-02 | 1 Year |
| 4. | EMI Antenna | VULB 9163 | 9163-235 | Schwarzbeck | 2017-09-28 | 3 Years |
| 5. | Test Receiver | ESCI | 100344 | R&S | 2017-03-03 | 1 Year |
| 6. | EMI Antenna | 3117 | 00119024 | ETS-Lindgren | 2017-01-20 | 3 Years |
| 7. | EMI Antenna | 9117 | 167 | Schwarzbeck | 2016-07-06 | 3 Year |
| 8. | EMI Antenna | 3117 | 00058889 | ETS-Lindgren | 2017-12-20 | 3 Years |
| 9. | Signal Generator | N5183A | MY49060052 | Agilent | 2017-03-02 | 1 Year |
| 10. | Power Amplifier | 5S1G4 | 0341863 | AR | / | 1 Year |
| 11. | Universal Radio Communication Tester | CMW500 | 143008 | R&S | 2016-12-09 | 1 Year |
| 12. | Universal Radio Communication Tester | CMW500 | 116588 | R&S | 2016-10-27 | 1 Year |
| 13. | Universal Radio Communication Tester | E5515C | MY48363198 | Agilent | 2016-07-06 | 1 Year |
| 14. | Spectrum Analyzer | E4440A | MY48250642 | Agilent | 2017-02-27 | 1 Year |
| 15. | LISN | ESH2-Z5 | 829991/012 | R&S | 2017-04-14 | 1 Year |
| 16. | Climatic chamber | SH-641 | 92014694 | ESPEC | 2016-11-27 | 1 Year |

ANNEX A: MEASUREMENT RESULTS

A.1. Electric Field Strength of Fundamental and Outside the Allocated bands

A.1.1. Reference

See Clause 13.5, Clause 13.4, Clause 8, and Annex E of ANSI C63.4-2014 specifically.

See Clause 4, Clause 5, and Clause 6 of ANSI C63.4-2014 generally.

A.1.2. Measurement Methods


The transmitter carrier output levels (E-Field) from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving loop antenna is 1.0 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.

The measurement bandwidth is:

| Frequency of Emission (MHz) | RBW/VBW |
|-----------------------------|-----------|
| 12.56-14.56 | 10/30 kHz |

The E-field measured at 3m is calculated as:

$$\text{E-field (dB}\mu\text{V/m)} = \text{Rx (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{AF@3m (dB/m)}$$

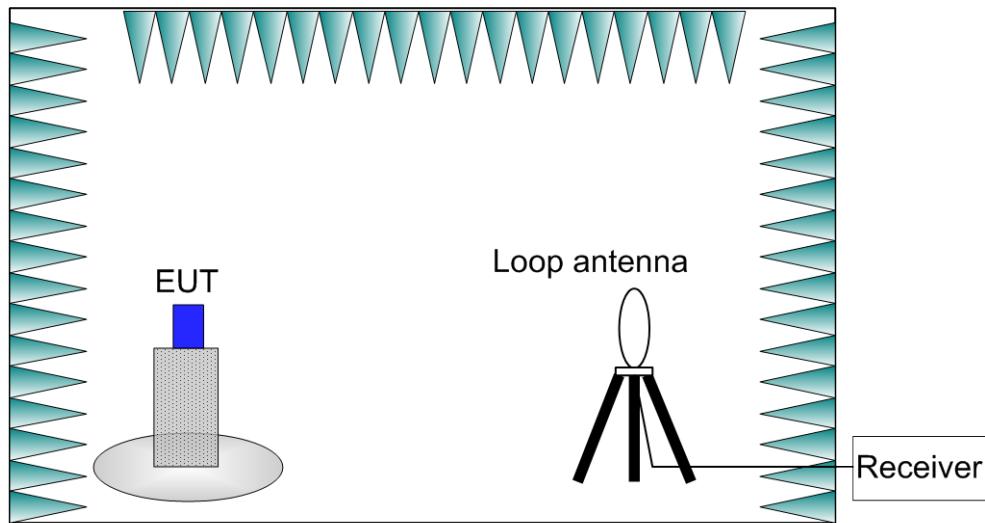

A.1.3. EUT Operating Mode and Test Conditions

The measurement of EUT is carried out under the transmit state of NFC (See 3.5).

The EUT is powered by a travel adapter.

During the measurements, the ambient temperature of the electromagnetic anechoic chamber is

in the range of 15 ~ 25 °C.

A.1.4. Limits

| Frequency Range (MHz) | E-field Strength Limit @ 30 m (µV/m) | E-field Strength Limit @ 3 m (dBµV/m) |
|-----------------------|--------------------------------------|---------------------------------------|
| 13.560 ± 0.007 | +15,848 | 124 |
| 13.410 to 13.553 | +334 | 90 |
| 13.567 to 13.710 | | |
| 13.110 to 13.410 | +106 | 81 |
| 13.710 to 14.010 | | |

Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:

Extrapolation(dB) = 40log₁₀(Measurement Distance/Specification Distance)

A.1.5. Measurement Results

Measurement results of normal conditions see Figure A-1 for different set-ups of EUT. The result displayed take into account applicable antenna factors and cable losses.

Conclusions: Set. NFC03, PASS.

RE_FCC_NFC Main Frequency_13.110MHz-14.010MHz

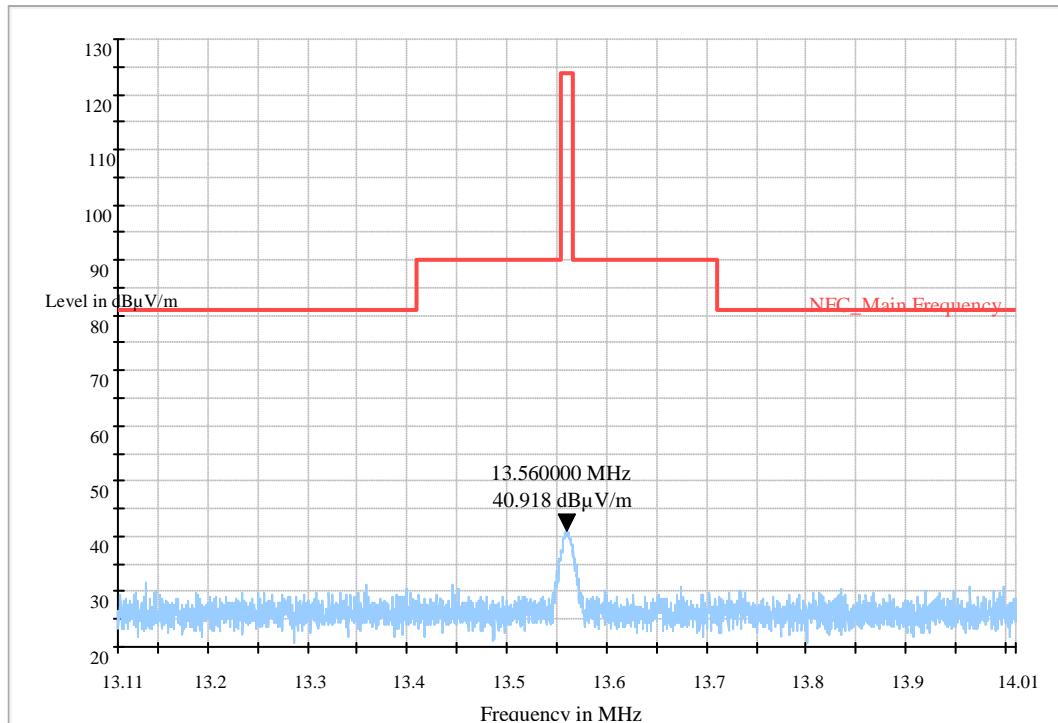


Figure A-1: Set. NFC03

A.1.6. Measurement Uncertainty

Measurement uncertainty: $U = 4.0 \text{ dB}$, $k=2$.

A.2. Electric Field Radiated Emissions (< 30MHz)

A.2.1. Reference

See Clause 13.4, Clause 8 and Annex E of ANSI C63.4-2014 specifically.

See Clause 4, Clause 5, and Clause 6 of ANSI C63.4-2014 generally.

A.2.2. Measurement Methods


The transmitter carrier output levels (E-Field) from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving loop antenna is 1.0 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.

The measurement bandwidth is:

| Frequency of Emission (MHz) | RBW/VBW |
|-----------------------------|------------|
| 0.009-0.15 | 100/300 Hz |
| 0.15-30 | 10/30 kHz |

The E-field measured at 3m is calculated as:

$$\text{E-field (dB}\mu\text{V/m)} = \text{Rx (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{AF@3m (dB/m)}$$

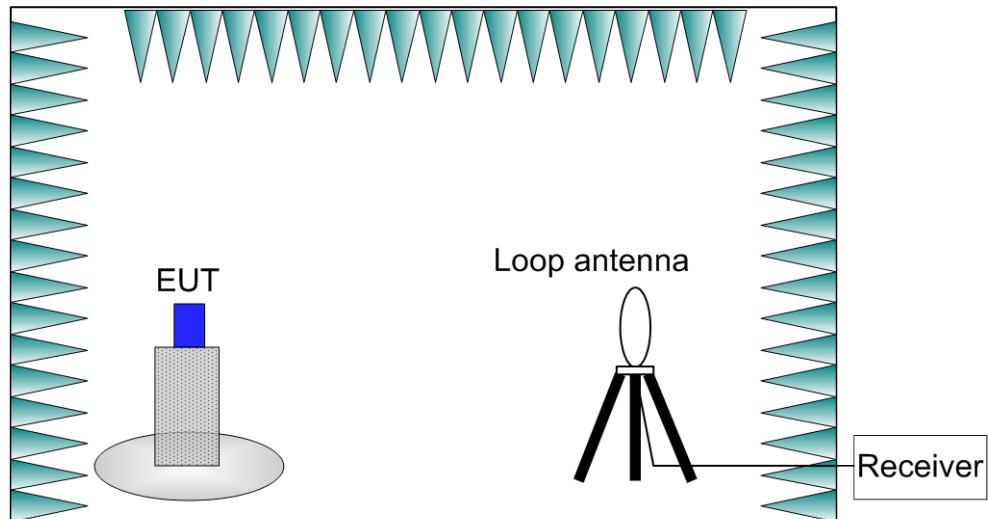

A.2.3. EUT Operating Mode and Test Conditions

The measurement of EUT is carried out under the transmit state of NFC (See 3.5).

The EUT is powered by a travel adapter.

During the measurements, the ambient temperature of the electromagnetic anechoic chamber is

in the range of 15 ~ 25 °C.

A.2.4. Limits

| Frequency Range (MHz) | E-field Strength Limit @ 30m (mV/m) | E-field Strength Limit @ 3m (dB μ V/m) |
|--|-------------------------------------|--|
| 0.009-0.490 | 2400/F(kHz) | 129-94 |
| 0.490-1.705 | 24000/F(kHz) | 74-63 |
| 1.705-30 | 30 | 70 |
| Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula: | | |
| Extrapolation(dB) = 40log ₁₀ (Measurement Distance/Specification Distance) | | |

A.2.5. Measurement Results

Measurement results of normal conditions see Figure A-2 for different set-ups of EUT. The result displayed take into account applicable antenna factors and cable losses.

Conclusions: Set. NFC01, **PASS**.

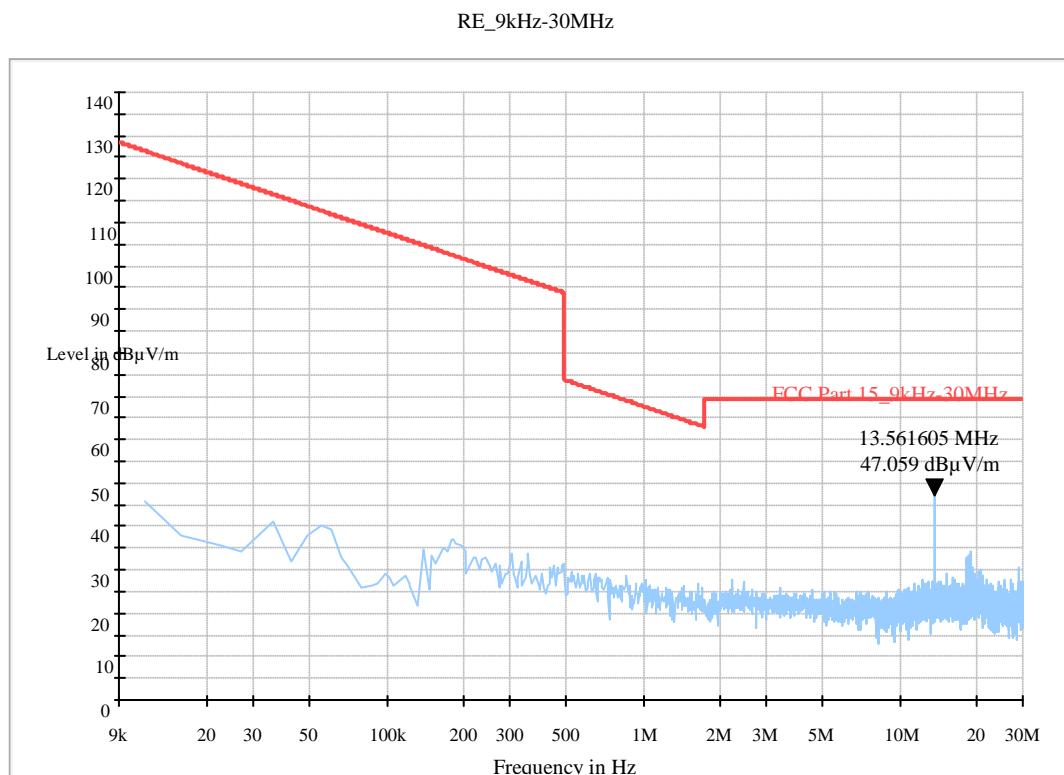


Figure A-2: Set. NFC01

A.2.6. Measurement Uncertainty

Measurement uncertainty: $U = 4.0$ dB, $k=2$.

A.3. Electric Field Radiated Emissions ($\geq 30\text{MHz}$)

A.3.1. Reference

See Clause 13.4, Clause 8, and Annex E of ANSI C63.4-2014 specifically.


See Clause 4, Clause 5, and Clause 6 of ANSI C63.4-2014 generally.

A.3.2. Measurement Methods

The electric field radiated emissions from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 10m from the receiving antenna. The receiving antennas connected to a measurement receiver comply with Clause 15 of ANSI C63.2-1996 and Clause 4.1.5 of ANSI C63.4-2014. In order to search for maximum field strength emitted from the EUT, the receiving antenna can be moved between the height of 1.0 m to 4.0 m. Detected E-field was maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna positions for both vertical and horizontal antenna polarizations. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.

The measurement bandwidth is:

| Frequency of Emission (MHz) | RBW/VBW |
|-----------------------------|---------|
| 30-1000 | 120kHz |

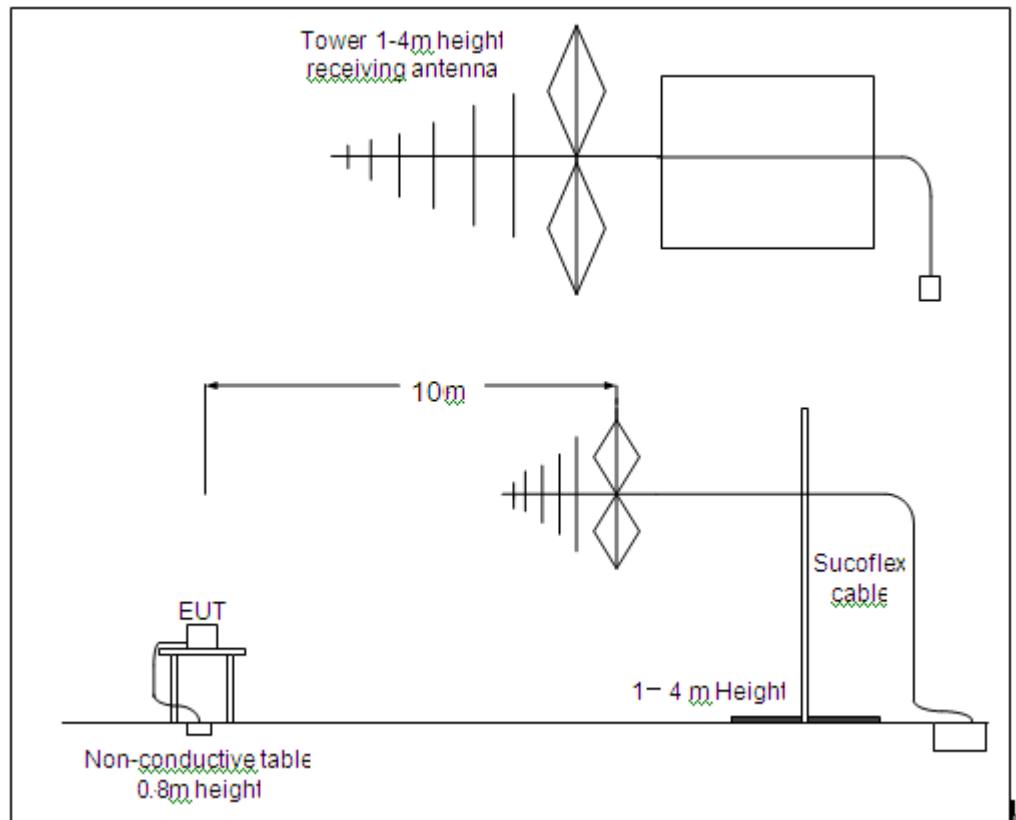

A.3.3. EUT Operating Mode and Test Conditions

The measurement of EUT is carried out under the transmit state of NFC (See 3.5).

EUT1 had been connected to a travel adapter.

During the measurements, the ambient temperature of the electromagnetic anechoic chamber is in the range of 15 ~ 25 °C.

A.3.4. Limits

| Frequency Range (MHz) | E-field Strength Limit @ 3m (mV/m) | E-field Strength Limit @ 3m (dB μ V/m) | E-field Strength Limit @ 10m (dB μ V/m) |
|-----------------------|------------------------------------|--|---|
| 30-88 | 100 | 40 | 30 |
| 88-216 | 150 | 43.5 | 33.5 |
| 216-960 | 200 | 46 | 36 |
| 960-1000 | 500 | 54 | 44 |

A.3.5. Measurement Results

Measurement results of normal conditions see Figure A-3 for different set-ups of EUT. The result displayed take into account applicable antenna factors and cable losses.

Conclusions: Set. NFC01, PASS.

A.3.6. Measurement Uncertainty

Measurement uncertainty: $U = 3.9$ dB, $k=2$

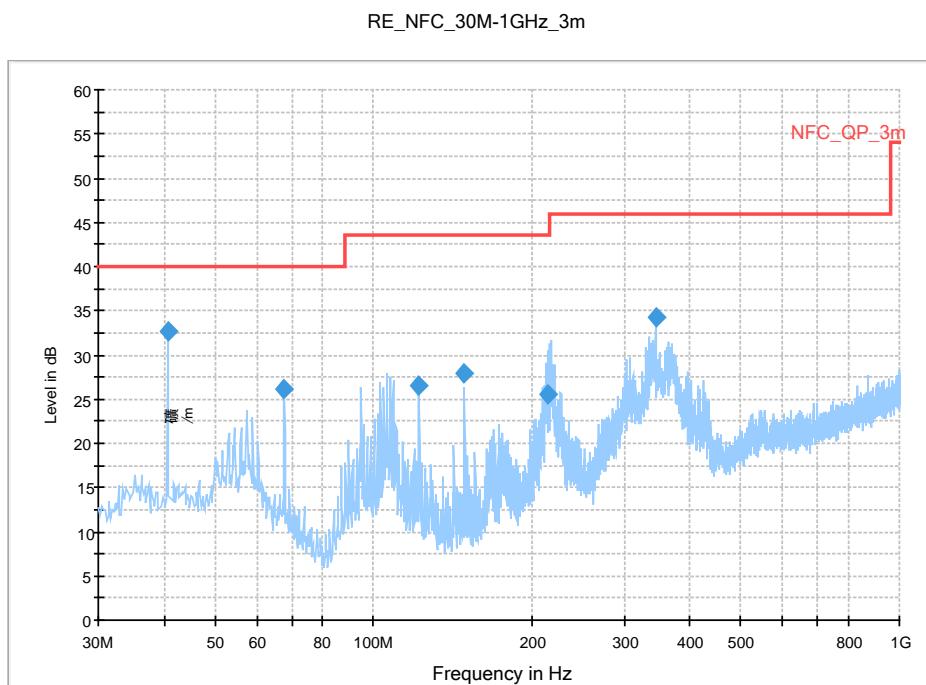


Figure A-3: Set. NFC01


A.4. Frequency Tolerance

A.4.1. Reference

See Clause 13.6 of ANSI C63.4-2014 specifically.

See Clause 4, Clause 5, and Clause 6 of ANSI C63.4-2014 generally.

A.4.2. Measurement Methods

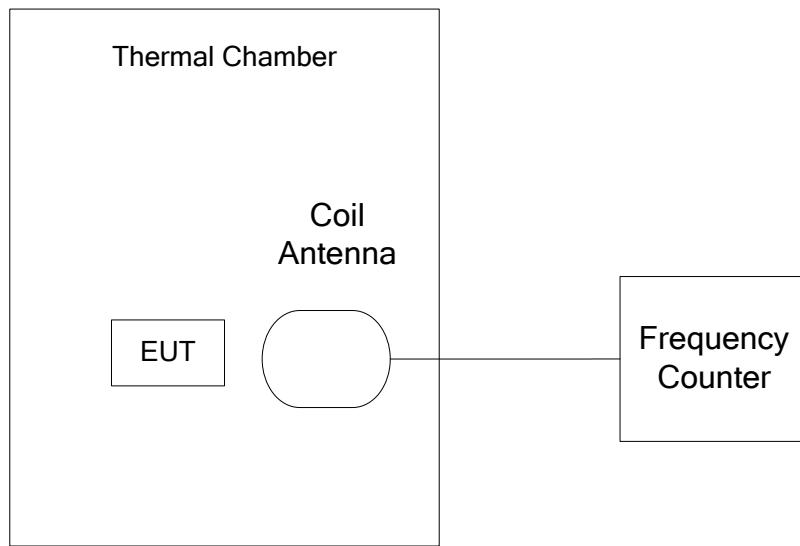

The transmitter output signal was picked up by coil antenna connected to the frequency counter.

The center frequency was measured with 30Hz RBW and 1kHz span.

During the test, the EUT was placed in a thermal chamber until thermal balance and lasting appropriate time.

A.4.3. EUT Operating Mode and Test Conditions

The measurement of EUT is carried out under the transmit state of without modulation (See 3.5).

EUT1 had been not connected to a travel adapter.

Operation Temperature: T min, T nom, and T max with V nom.

Operation Voltage: V min and V max with T nom.

A.4.4. Test Layouts

See A.4.2.

A.4.5. Limits

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

A.4.6. Measurement Results

Measurement results see Table A-1 for different test conditions.

Conclusions: Set. NFC02, **PASS**.

Table A-1: Frequency Stability VS Temperature and Voltage

| Temperature | Voltage | Frequency Error (MHz) | | | |
|-------------|---------|-----------------------|-------------|-------------|--------------|
| | | Startup | 2 Min Later | 5 Min Later | 10 Min Later |
| T min | V nom | 13.559674 | 13.559686 | 13.559651 | 13.55957 |
| T max | V nom | 13.559772 | 13.559683 | 13.559685 | 13.559671 |
| T nom | V nom | 13.559781 | 13.559679 | 13.559670 | 13.559683 |
| T nom | V min | 13.559620 | 13.559681 | 13.559678 | 13.559685 |
| T nom | V max | 13.559377 | 13.559680 | 13.559670 | 13.559680 |

| Temperature | Voltage | Frequency Error (%) | | | |
|-------------|---------|---------------------|-------------|-------------|--------------|
| | | Startup | 2 Min Later | 5 Min Later | 10 Min Later |
| T min | V nom | -0.002 | -0.002 | -0.002 | -0.002 |
| T max | V nom | -0.002 | -0.002 | -0.002 | -0.002 |
| T nom | V nom | -0.002 | -0.002 | -0.002 | -0.002 |
| T nom | V min | -0.002 | -0.002 | -0.002 | -0.002 |
| T nom | V max | -0.004 | -0.002 | -0.002 | -0.002 |

A.4.7. Measurement Uncertainty

Measurement uncertainty: $U = 77 \text{ Hz}$, $k=2$

A.5. 20dB Bandwidth

A.5.1. Reference

See Clause 13.7 of ANSI C63.4-2014 specifically.


See Clause 4, Clause 5, and Clause 6 of ANSI C63.4-2014 generally.

A.5.2. Measurement Methods

The transmitter output signal was picked up by coil antenna to the spectrum analyzer.

The transmitter output signal was picked up by coil antenna connected to the spectrum analyzer.

The bandwidth of the center frequency was measured with 140Hz RBW, 420Hz VBW and 14kHz span.

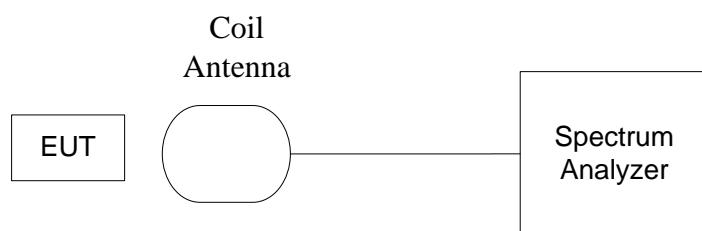

A.5.3. EUT Operating Mode and Test Conditions

The measurement of EUT is carried out under the transmit state of NFC and without modulation (See 3.5).

EUT had been not connected to a travel adapter..

During the measurements, the ambient temperature is in the range of 15 ~ 25 °C.

A.5.4. Test Layouts

See A.5.2.

A.5.5. Limits

The 20dB bandwidth shall be less than 80% of the permitted frequency band. For 13.56 MHz NFC, the permitted frequency band is 14kHz, so the limit is 11.2 kHz.

A.5.6. Measurement Results

Measurement results see Figure A-4.

Conclusions: Set. NFC02 and NFC03, **PASS**.

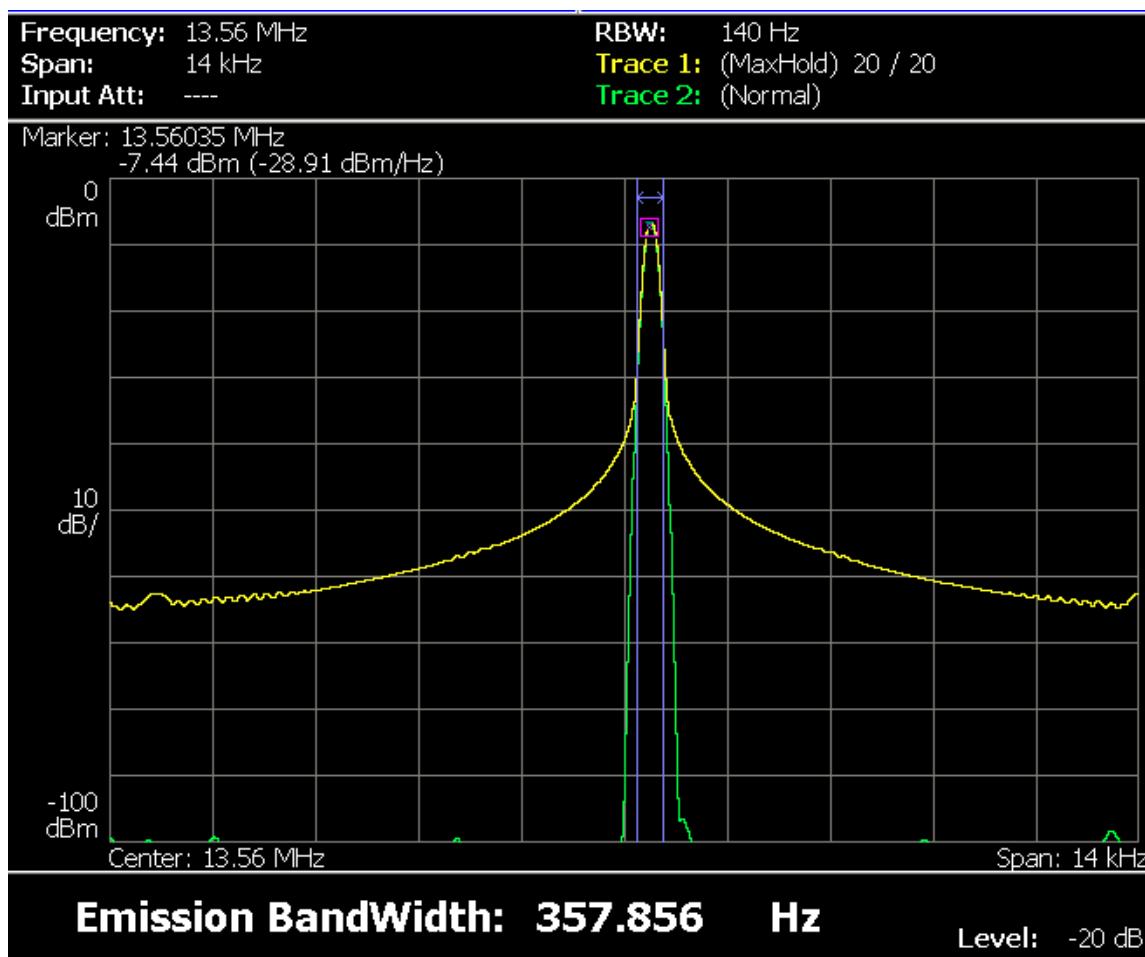


Figure A-4: Test result of EUT1 at test set. NFC02

A.5.7. Measurement Uncertainty

Measurement uncertainty: $U=77$ Hz, $k=2$

A.6. Conducted emission

A.6.1. Reference

See Clause 13.3 and Clause 7 of ANSI C63.4-2014 specifically.

See Clause 4, Clause 5, and Clause 6 of ANSI C63.4-2014 generally.


A.6.2. Measurement Methods

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:
Quasi-Peak / Average Detector.

The measurement bandwidth is:

| Frequency of Emission (MHz) | RBW/VBW |
|-----------------------------|---------|
| 0.15-30 | 9kHz |

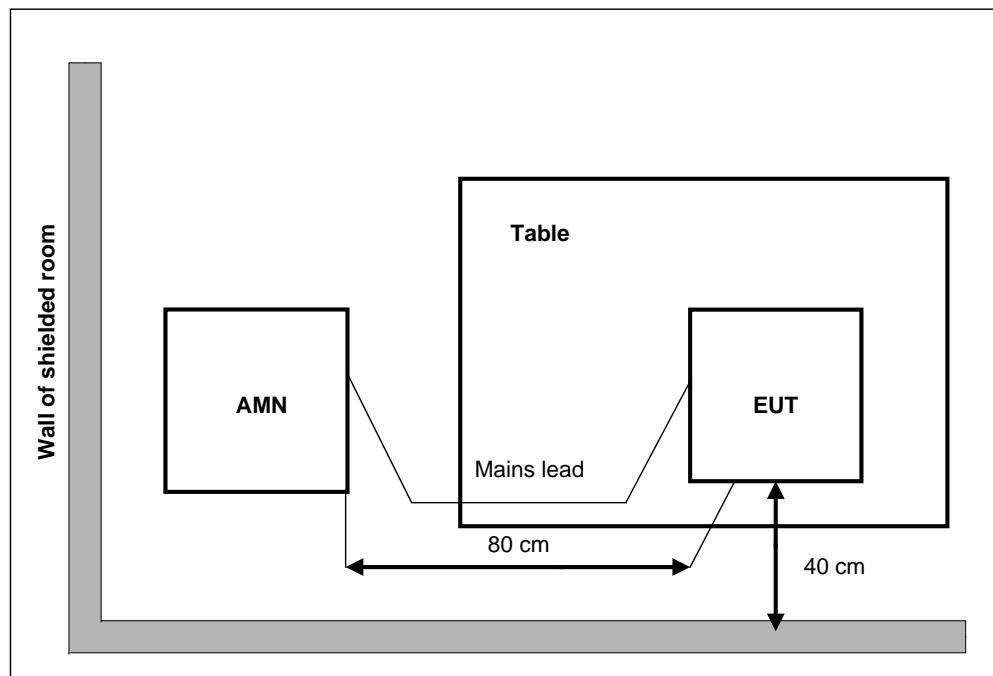

A.6.3. EUT Operating Mode and Test Conditions

The measurement of EUT is carried out under the transmit state of NFC (See 3.5).

The EUT is powered by a travel adapter.

During the measurements, the ambient temperature is in the range of 15 ~ 25 °C.

A.6.4. Limits


| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Average Limit (dB μ V) |
|-----------------------|-------------------------------|----------------------------|
| 0.15 to 0.5 | 66 to 56 | 56 to 46 |

| | | |
|----------|----|----|
| 0.5 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

A.6.5. Measurement Results

Measurement results see Figure A-5.

Conclusions: Set. NFC01, **PASS**.

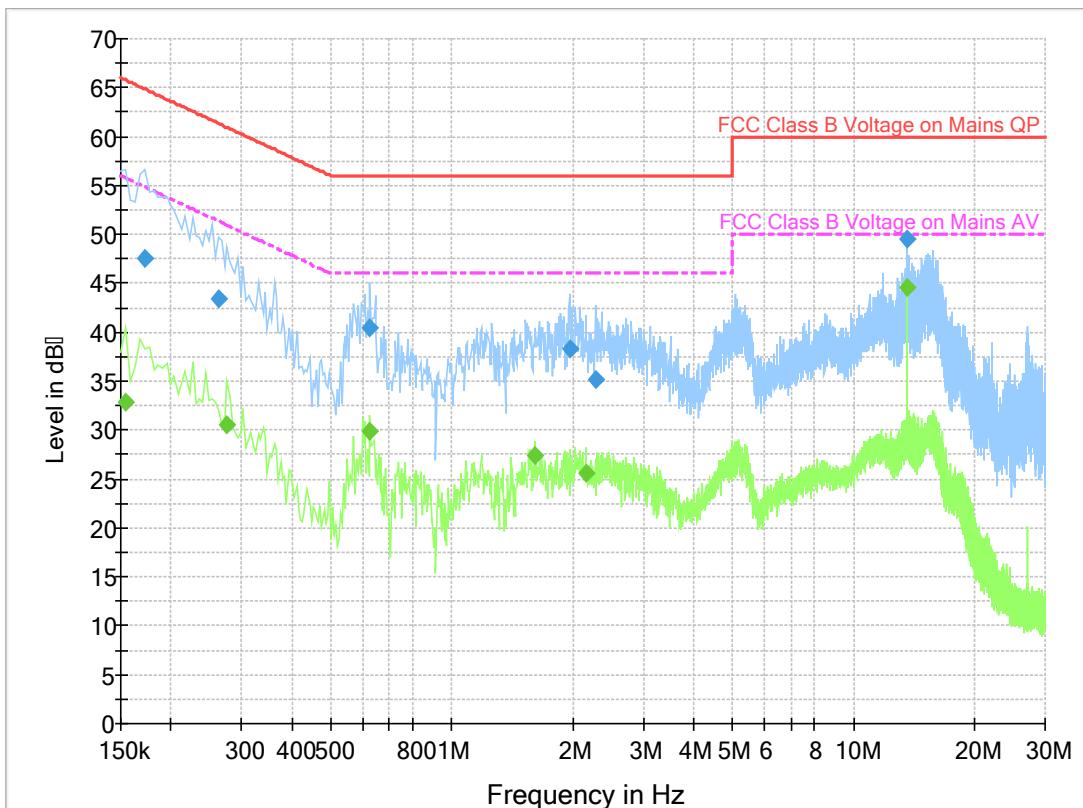

Note: The measurement result at 13.56MHz is the fundamental emission of NFC signal.

Final Result 1

| Frequency | QuasiPeak | PE | Line | Corr. | Margin | Limit |
|-----------|-----------|-----|------|-------|--------|-------|
| 0.172500 | 47.6 | GND | L1 | 19.8 | 17.2 | 64.8 |
| 0.262500 | 43.4 | GND | N | 19.8 | 17.9 | 61.4 |
| 0.627000 | 40.5 | GND | N | 19.8 | 15.5 | 56.0 |
| 1.963500 | 38.3 | GND | L1 | 19.7 | 17.7 | 56.0 |
| 2.274000 | 35.2 | GND | L1 | 19.3 | 20.8 | 56.0 |
| 13.560000 | 49.5 | GND | L1 | 19.9 | 10.5 | 60.0 |

Final Result 2


| Frequency | Average | PE | Line | Corr. | Margin | Limit |
|-----------|---------|-----|------|-------|--------|-------|
| 0.154500 | 32.9 | GND | L1 | 20.0 | 22.9 | 55.8 |
| 0.276000 | 30.5 | GND | L1 | 19.8 | 20.4 | 50.9 |
| 0.627000 | 29.9 | GND | N | 19.8 | 16.1 | 46.0 |
| 1.617000 | 27.3 | GND | L1 | 19.7 | 18.7 | 46.0 |
| 2.161500 | 25.6 | GND | L1 | 19.4 | 20.4 | 46.0 |
| 13.560000 | 44.6 | GND | L1 | 19.9 | 5.4 | 50.0 |

Figure A-5: Test result of EUT1 at test set. NFC01


A.6.6. Measurement Uncertainty

Measurement uncertainty: $U = 3.2 \text{ dB}$, $k=2$

ANNEX C: TEST LAYOUT

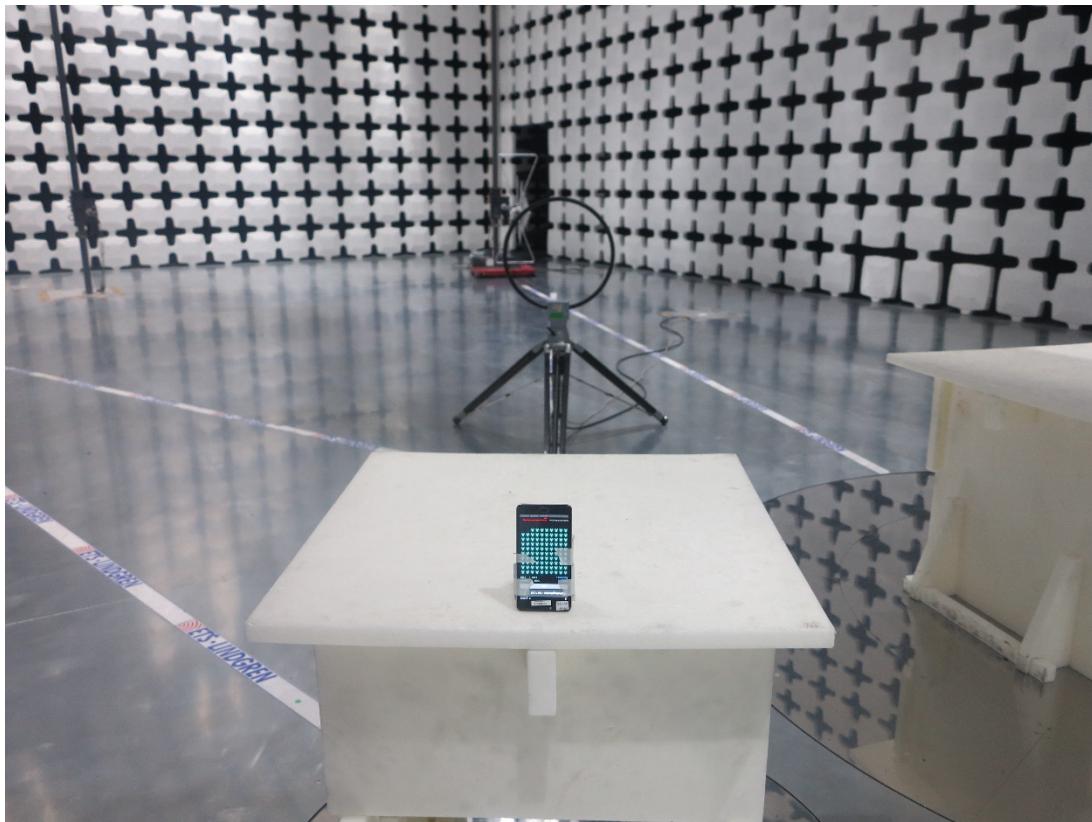

Picture C-1: Field Strength Measurements (Below 30MHz)

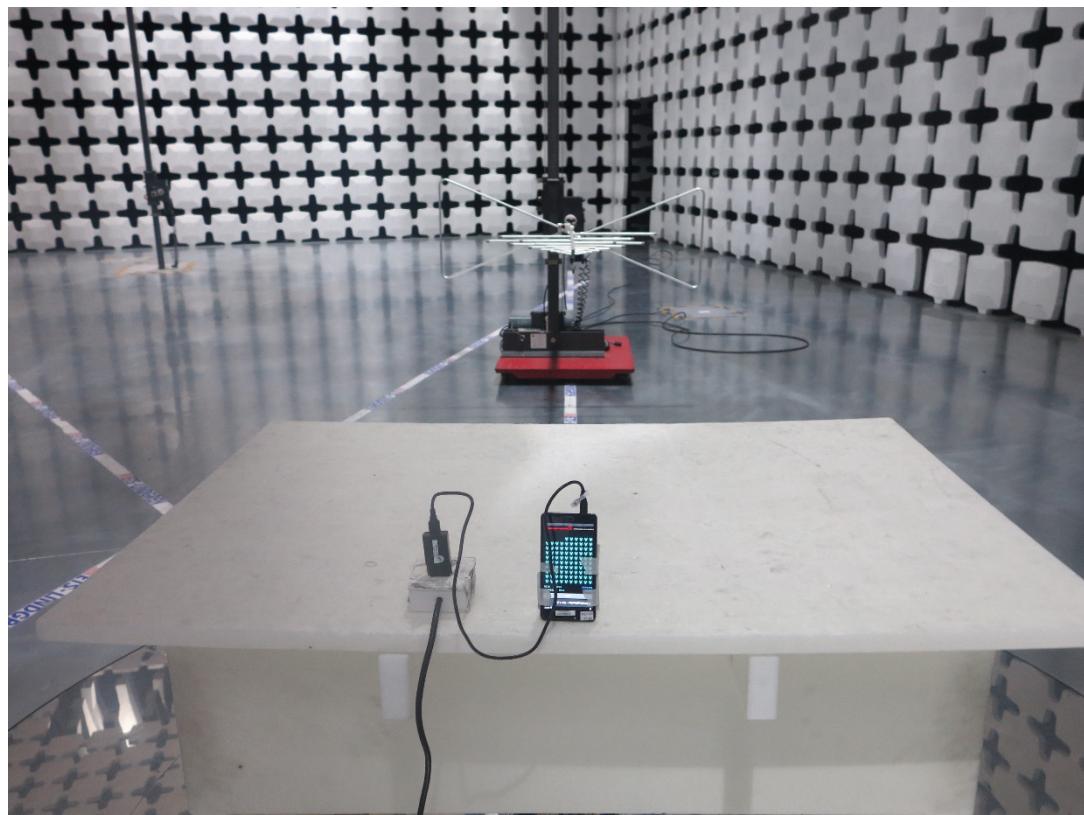

Picture C-2: Field Strength Measurements (Above 30MHz)



Picture C-3: Conducted Emissions Measurements

ANNEX D: Accreditation Certificate



China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(Registration No. CNAS L0570)

China Academy of Telecommunication Research of MIIT

No.52, Huayuan North Road, Haidian District, Beijing, China

is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing and calibration.

The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.

Date of Issue: 2014-06-20

Date of Expiry: 2017-06-19

Date of Initial Accreditation: 1998-07-03

Date of Update: 2014-06-20



**Signed on behalf of China National Accreditation Service
for Conformity Assessment**

China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).

No.CNAS AL 2

0010037

*****END OF REPORT*****