FCC PART 15C
TEST REPORT
No. **I16Z41709-SRD02**

for

TCL Communication Ltd.

LTE / UMTS / GSM mobile phone

Model Name: 5080A

FCC ID: 2ACCJH059

with

Hardware Version: PIO

Software Version: 2CA6

Issued Date: 2016-8-30

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:cttl_terminals@catr.cn, website:www.chinattl.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I16Z41709-SRD02	Rev.0	1st edition	2016-8-30

CONTENTS

1. TEST LABORATORY 4

1.1. TESTING LOCATION 4

1.2. TESTING ENVIRONMENT 4

1.3. PROJECT DATA 4

1.4. SIGNATURE 4

2. CLIENT INFORMATION 5

2.1. APPLICANT INFORMATION 5

2.2. MANUFACTURER INFORMATION 5

3. EQUIPMENT UNDERTEST (EUT) AND ANCILLARY EQUIPMENT (AE) 6

3.1. ABOUT EUT 6

3.2. INTERNAL IDENTIFICATION OF EUT 6

3.3. INTERNAL IDENTIFICATION OF AE 6

3.4. NORMAL ACCESSORY SETTING 8

3.5. GENERAL DESCRIPTION 8

4. REFERENCE DOCUMENTS 9

4.1. DOCUMENTS SUPPLIED BY APPLICANT 9

4.2. REFERENCE DOCUMENTS FOR TESTING 9

5. TEST RESULTS 10

5.1. SUMMARY OF TEST RESULTS 10

5.2. STATEMENTS 10

6. TEST FACILITIES UTILIZED 11

ANNEX A: DETAILED TEST RESULTS 12

A.1. MEASUREMENT METHOD 12

A.2. PEAK OUTPUT POWER – CONDUCTED 13

A.3. FREQUENCY BAND EDGES – CONDUCTED 14

A.4. CONDUCTED EMISSION 21

A.5. RADIATED EMISSION 46

A.6. TIME OF OCCUPANCY (DWELL TIME) 67

A.7. 20DB BANDWIDTH 77

A.8. CARRIER FREQUENCY SEPARATION 83

A.9. NUMBER OF HOPPING CHANNELS 86

A.10. AC POWERLINE CONDUCTED EMISSION 90

ANNEX B: ACCREDITATION CERTIFICATE 96

1. Test Laboratory

1.1. Testing Location

Location 1:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China100191

Location 2: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology Development Area, Beijing, P. R. China 100176

Location 3:CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

1.2. Testing Environment

Normal Temperature: 15-35℃

Extreme Temperature: -10/+55℃

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2016-8-4

Testing End Date: 2016-8-30

1.4. Signature

Sun Zhenyu

(Prepared this test report)

Li Zhuofang

(Reviewed this test report)



Lv Songdong

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	China
Telephone:	0086-21-31363544
Fax:	0086-21-61460602

2.2. Manufacturer Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	China
Telephone:	0086-21-31363544
Fax:	0086-21-61460602

3. Equipment UnderTest (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	LTE / UMTS / GSM mobile phone
Model Name	5080A
FCC ID	2ACCJH059
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/π/4 DQPSK/8DPSK
Number of Channels	79
Power Supply	3.8V DC by Battery

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	014726000000558	PIO	2CA6
EUT2	014726000000434	PIO	2CA6

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description		
AE1	battery	/	/
AE2	battery	/	/
AE3	battery	/	/
AE4	battery	/	/
AE5	Travel charger	/	16TCT-CH-0881
AE6	Travel charger	/	16TCT-CH-0885
AE7	Travel charger	/	16TCT-CH-0803
AE8	Travel charger	/	16TCT-CH-0860
AE9	USB cable	/	16TCT-DC-0373
AE10	USB cable	/	16TCT-CH-0884
AE11	USB cable	/	16TCT-DC-0394
AE12	USB cable	/	16TCT-DC-0419
AE13	Travel charger	/	16TCT-CH-0875
AE14	Travel charger	/	/
AE15	Travel charger	/	19TCT-CH-0615
AE16	Travel charger	/	16TCT-CH-0846
AE17	USB cable	/	16TCT-DC-0377
AE18	USB cable	/	16TCT-DC-0393
AE19	USB cable	/	16TCT-DC-0415
AE20	USB cable	/	/

AE1

Model	CAC2400006CJ
Manufacturer	Coslight
Capacitance	2400 mAh
Nominal voltage	3.85V

AE2

Model	CAC2400008C1
Manufacturer	BYD
Capacitance	2400 mAh
Nominal voltage	3.85V

AE3

Model	CAC2400007C2
Manufacturer	SCUD
Capacitance	2400 mAh
Nominal voltage	3.85V

AE4

Model	CAC2400022CC
Manufacturer	TCL
Capacitance	2400 mAh
Nominal voltage	3.85V

AE5, AE13

Model	CBA0059AGAC4
Manufacturer	Aohai
Length of cable	/

AE6

Model	CBA0059AGAC2
Manufacturer	Tenpao
Length of cable	/

AE7, AE15

Model	CBA0058AGAC2
Manufacturer	Tenpao
Length of cable	/

AE8, AE16

Model	CBA0058AGAC3
Manufacturer	Yingju
Length of cable	/

AE9, AE17

Model	CDA3122002C1
Manufacturer	Juwei
Length of cable	99cm

AE10

Model	CDA3122005C1
Manufacturer	Juwei

Length of cable	99cm
AE11, AE18	
Model	CDA3122002C8
Manufacturer	PUAN
Length of cable	99cm
AE12, AE19	
Model	CDA3122005C8
Manufacturer	PUAN
Length of cable	99cm
AE20	
Model	CDA0000024C2
Manufacturer	Juwei
Length of cable	99cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery should be used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of LTE / UMTS / GSM mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	October, 2015
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

5. Test Results

5.1. Summary of Test Results

Abbreviations used in this clause:

P Pass, The EUT complies with the essential requirements in the standard.

F Fail, The EUT does not comply with the essential requirements in the standard

NA Not Applicable, The test was not applicable

NP Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	**P**
Frequency Band Edges	15.247 (d)	**P**
Conducted Emission	15.247 (d)	**P**
Radiated Emission	15.247, 15.205, 15.209	**P**
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	**P**
20dB Bandwidth	15.247 (a)(1)	**NA**
Carrier Frequency Separation	15.247 (a)(1)	**P**
Number of hopping channels	15.247 (a)(b)(iii)	**P**
AC Powerline Conducted Emission	15.107, 15.207	**P**

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2017-01-06
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	1 year	2017-02-09
3	Shielding Room	S81	/	ETS-Lindgren	/	/
4	Test Receiver	ESCI	100766	Rohde & Schwarz	1 year	2017-03-30
5	LISN	ESH2-Z5	829991-012	Rohde & Schwarz	1 year	2017-04-11

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2017-03-02
2	Loop antenna	HFH2-Z2	829324/007	Rohde & Schwarz	3 years	2017-12-16
3	BiLog Antenna	VULB9163	301	Schwarzbeck	3 years	2017-12-16
4	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	3 years	2017-12-15
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	3 years	2017-06-17
6	Semi-anechoic chamber	/	CT000332-1074	Frankonia German	/	/
7	Vector Signal Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2017-06-28
8	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2016-10-29
9	Bluetooth Tester	CBT	101042	Rohde & Schwarz	1 year	2017-03-02

Test Software Utilized

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V8.40.0	R&S
Conducted Continuous Emission	EMC32 V8.5.1	R&S

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

1). Connect the EUT to the test system correctly.

2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).

3). Set the EUT to the required channel.

4). Set the EUT hopping mode (hopping or hopping off).

5). Set the spectrum analyzer to start measurement.

6). Record the values. Vector Signal Analyzer

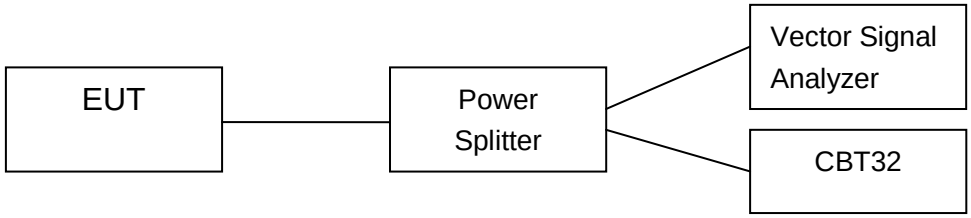

A.1.2. Radiated Emission Measurements

The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

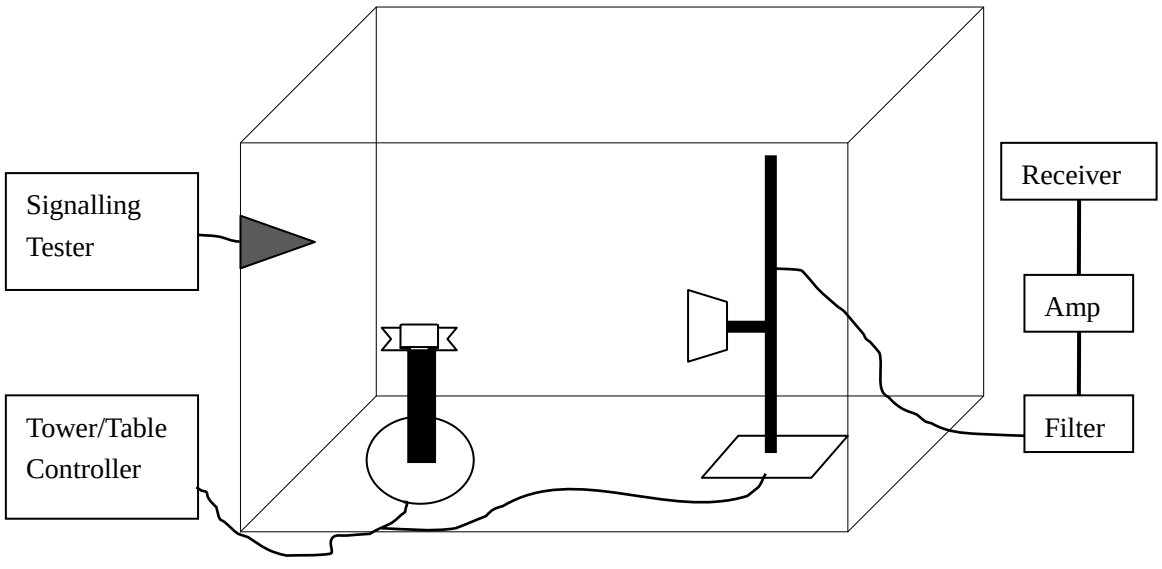

A.2. Peak Output Power – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.5

a) Use the following spectrum analyzer settings:

- Span: 6MHz
- RBW: 3MHz
- VBW: 3MHz
- Sweep time: 2.5ms
- Detector function: peak
- Trace: max hold

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power.

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

Measurement Results:

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	5.37	6.35	5.79	P

Forπ/4 DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	4.29	5.26	4.64	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	4.45	5.46	4.85	P

Conclusion: PASS

A.3. Frequency Band Edges – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

– Span: 10 MHz
– Resolution Bandwidth: 100 kHz
– Video Bandwidth: 300 kHz
– Sweep Time: 5ms
– Detector: Peak
– Trace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an abosolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

Measurement Result:

For GFSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.1	-45.27	P
	Hopping ON	Fig.2	-44.89	P
78	Hopping OFF	Fig.3	-49.99	P
	Hopping ON	Fig.4	-49.90	P

Forπ/4 DQPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.5	-48.45	P
	Hopping ON	Fig.6	-50.55	P
78	Hopping OFF	Fig.7	-52.56	P
	Hopping ON	Fig.8	-49.28	P

For 8DPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.9	-47.90	P
	Hopping ON	Fig.10	-47.52	P

78	Hopping OFF	Fig.11	-51.63	P
	Hopping ON	Fig.12	-53.17	P

Conclusion: PASS

Test graphs as below

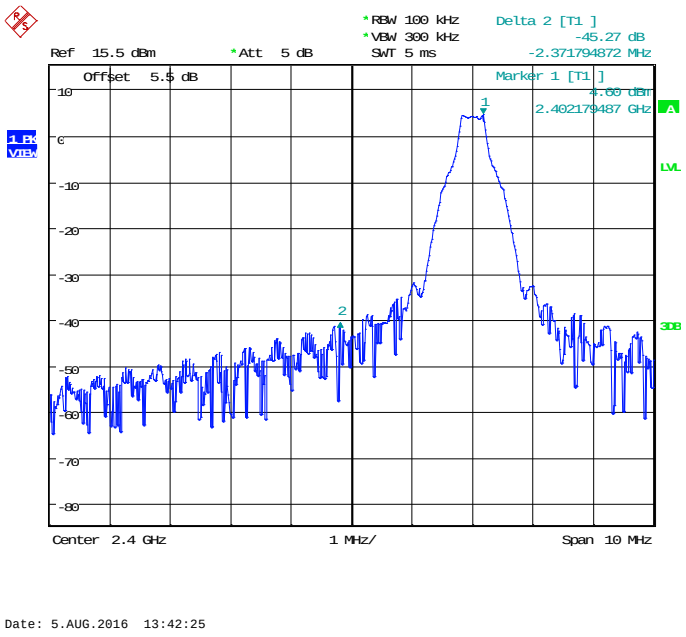

Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

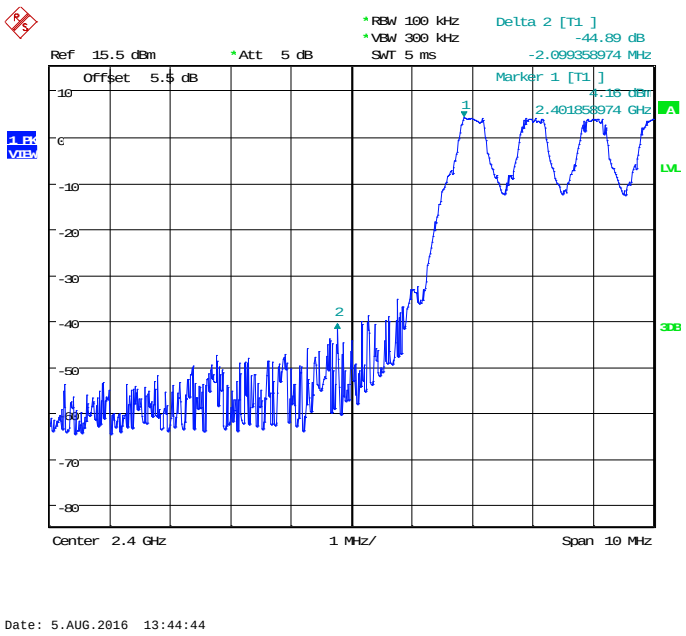

Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

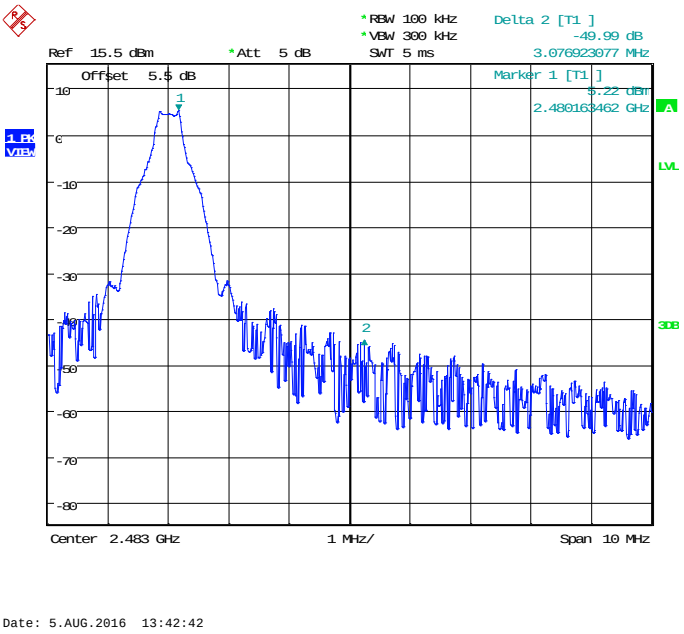

Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

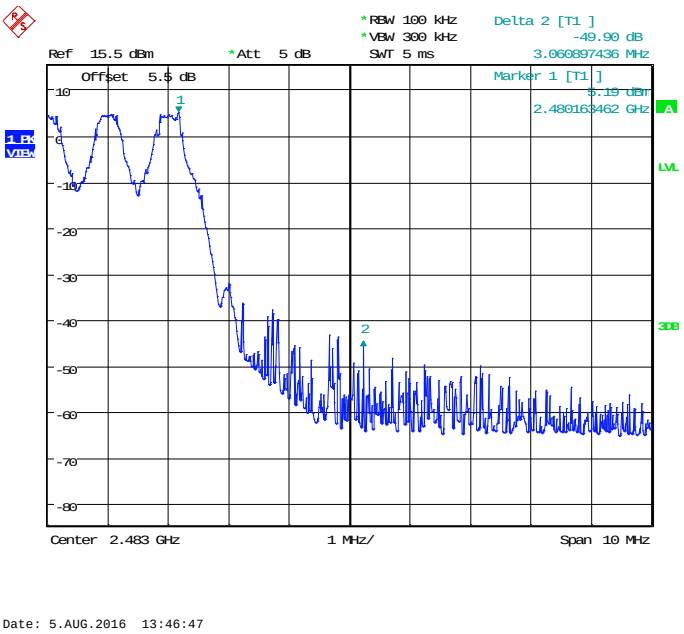

Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On

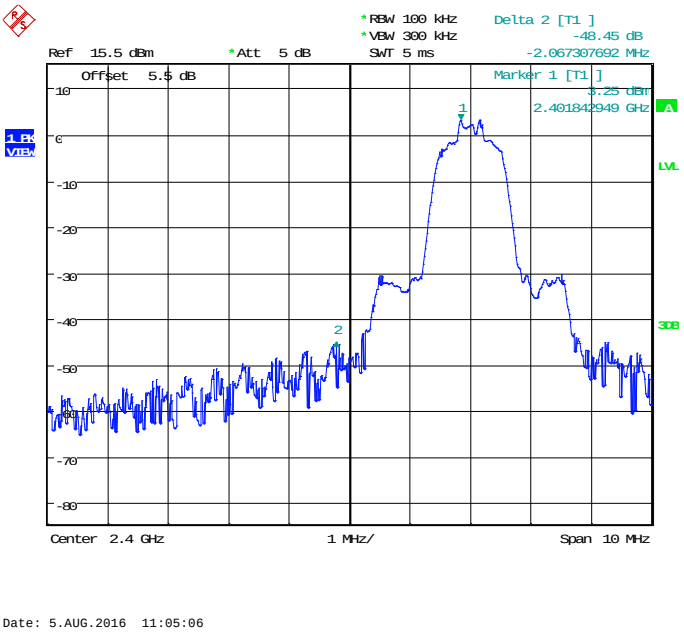

Fig.5. Frequency Band Edges: π/4 DQPSK, Channel 0, Hopping Off

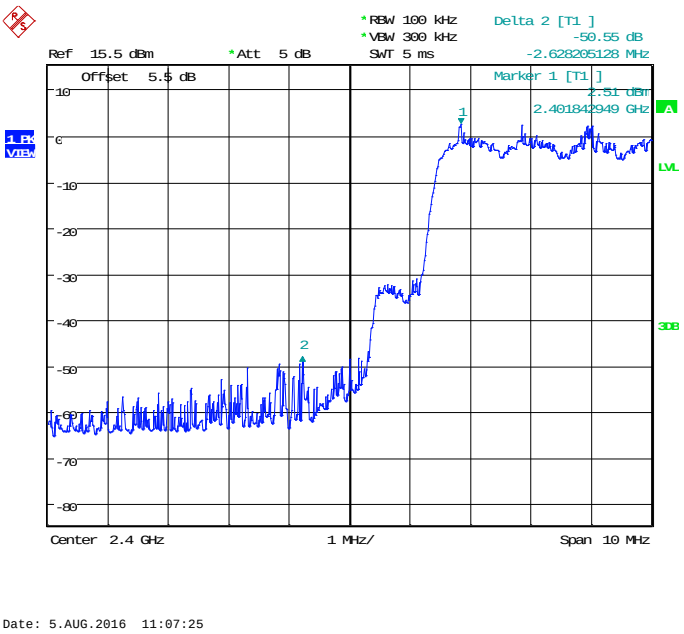

Fig.6. Frequency Band Edges: π/4 DQPSK, Channel 0, Hopping On

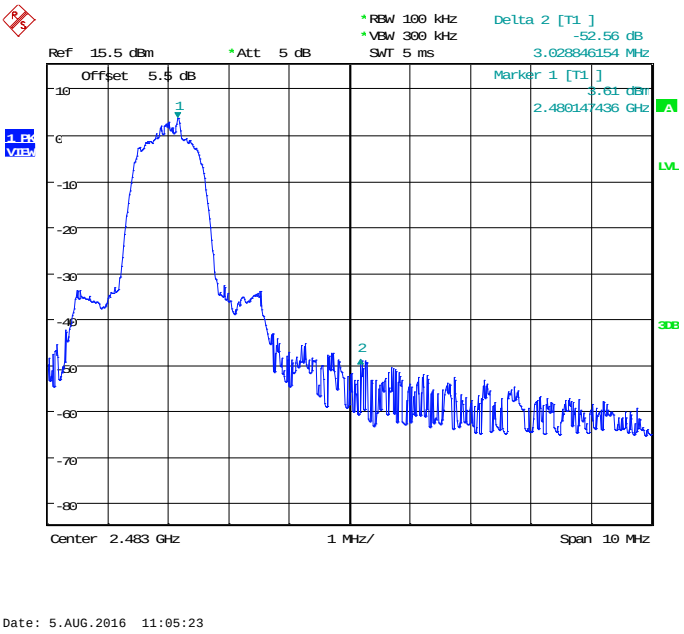

Fig.7. Frequency Band Edges: π/4 DQPSK, Channel 78, Hopping Off

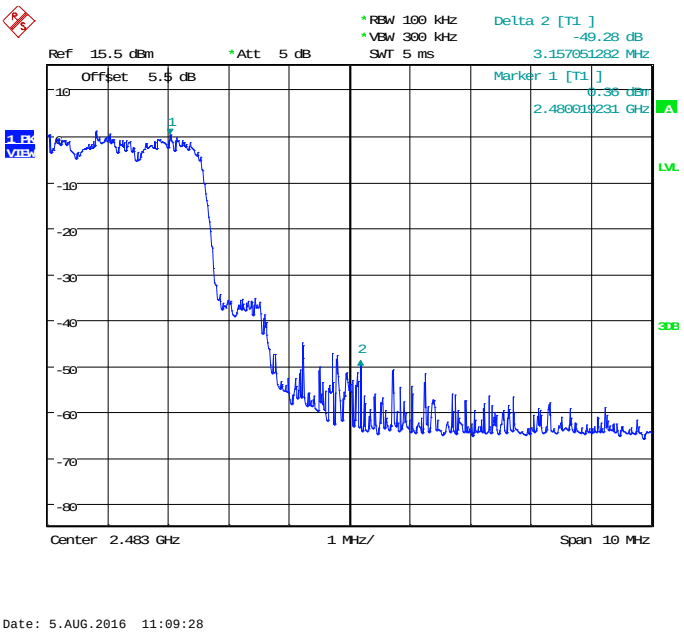

Fig.8. Frequency Band Edges: π/4 DQPSK, Channel 78, Hopping On

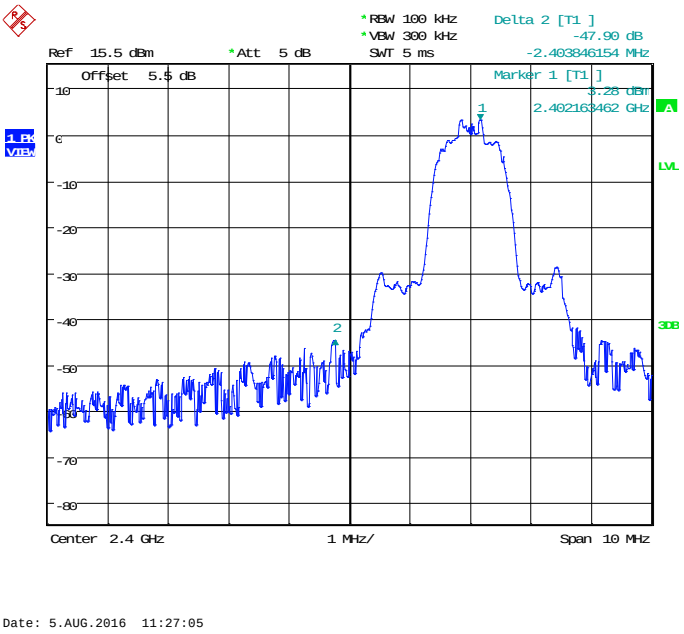

Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

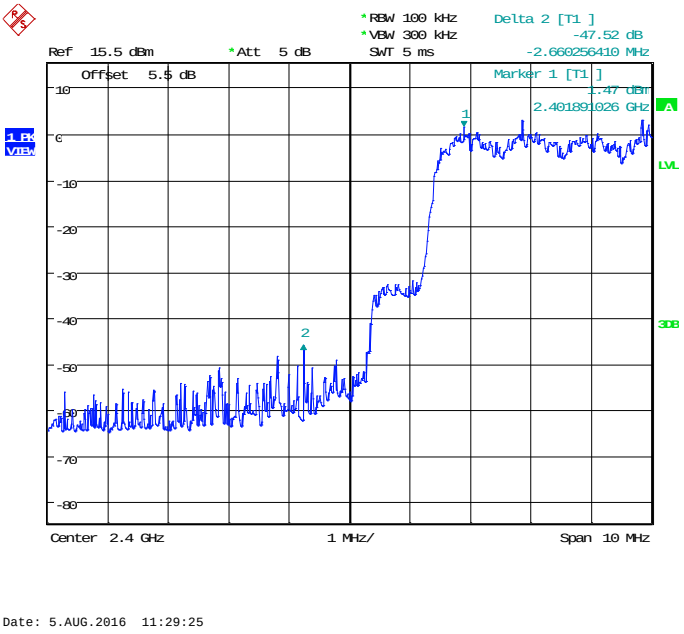

Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

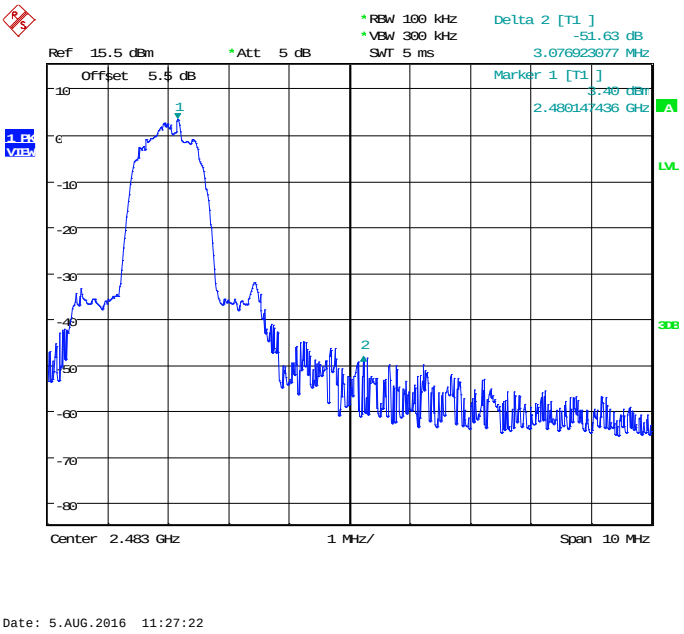

Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

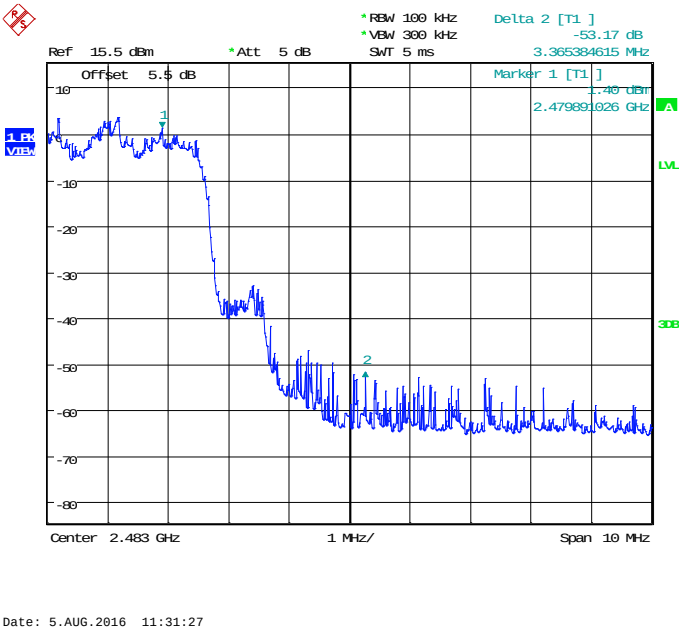

Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On

A.4. Conducted Emission

Method of Measurement: See ANSI C63.10-clause 7.8.8

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.

2. Set the VBW = 300 kHz.

3. Set the span to 5-30 % greater than the EBW.

4. Detector = peak.

5. Sweep time = auto couple.

6. Trace mode = max hold.

7. Allow trace to fully stabilize.

8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.

2. Set VBW = 300 kHz.

3. Set span to encompass the spectrum to be examined.

4. Detector = peak.

5. Trace Mode = max hold.

6. Sweep = auto couple.

7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.13	P

2402 MHz	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3 GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P
Ch 39 2441 MHz	Center Frequency	Fig.18	P
	30 MHz ~ 1 GHz	Fig.19	P
	1 GHz ~ 3 GHz	Fig.20	P
	3 GHz ~ 10 GHz	Fig.21	P
	10 GHz ~ 26 GHz	Fig.22	P
Ch 78 2480 MHz	Center Frequency	Fig.23	P
	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 10 GHz	Fig.26	P
	10 GHz ~ 26 GHz	Fig.27	P

For π/4 DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.28	P
	30 MHz ~ 1 GHz	Fig.29	P
	1 GHz ~ 3 GHz	Fig.30	P
	3 GHz ~ 10 GHz	Fig.31	P
	10 GHz ~ 26 GHz	Fig.32	P
Ch 39 2441 MHz	Center Frequency	Fig.33	P
	30 MHz ~ 1 GHz	Fig.34	P
	1 GHz ~ 3 GHz	Fig.35	P
	3 GHz ~ 10 GHz	Fig.36	P
	10 GHz ~ 26 GHz	Fig.37	P
Ch 78 2480 MHz	Center Frequency	Fig.38	P
	30 MHz ~ 1 GHz	Fig.39	P
	1 GHz ~ 3 GHz	Fig.40	P
	3 GHz ~ 10 GHz	Fig.41	P
	10 GHz ~ 26 GHz	Fig.42	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	P
	30 MHz ~ 1 GHz	Fig.44	P
	1 GHz ~ 3 GHz	Fig.45	P
	3 GHz ~ 10 GHz	Fig.46	P
	10 GHz ~ 26 GHz	Fig.47	P

Ch 39 2441 MHz	Center Frequency	Fig.48	P
	30 MHz ~ 1 GHz	Fig.49	P
	1 GHz ~ 3 GHz	Fig.50	P
	3 GHz ~ 10 GHz	Fig.51	P
	10 GHz ~ 26 GHz	Fig.52	P
Ch 78 2480 MHz	Center Frequency	Fig.53	P
	30 MHz ~ 1 GHz	Fig.54	P
	1 GHz ~ 3 GHz	Fig.55	P
	3 GHz ~ 10 GHz	Fig.56	P
	10 GHz ~ 26 GHz	Fig.57	P

Conclusion: PASS

Test graphs as below

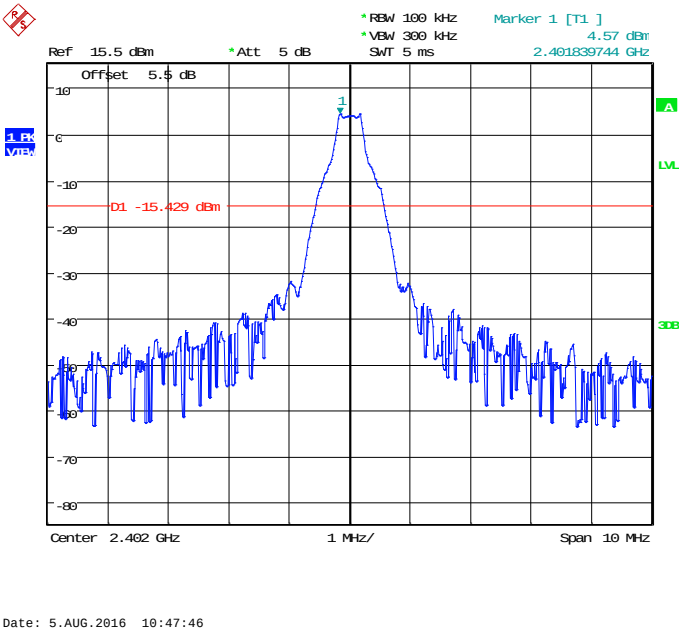

Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz

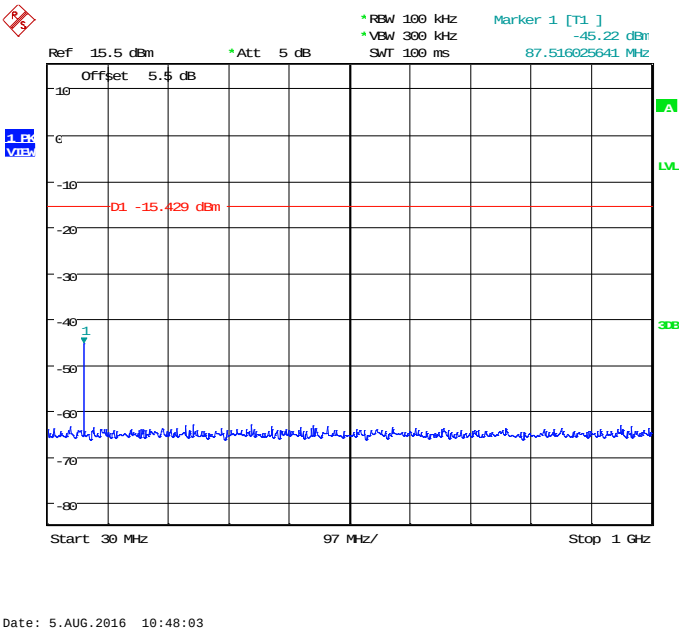

Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

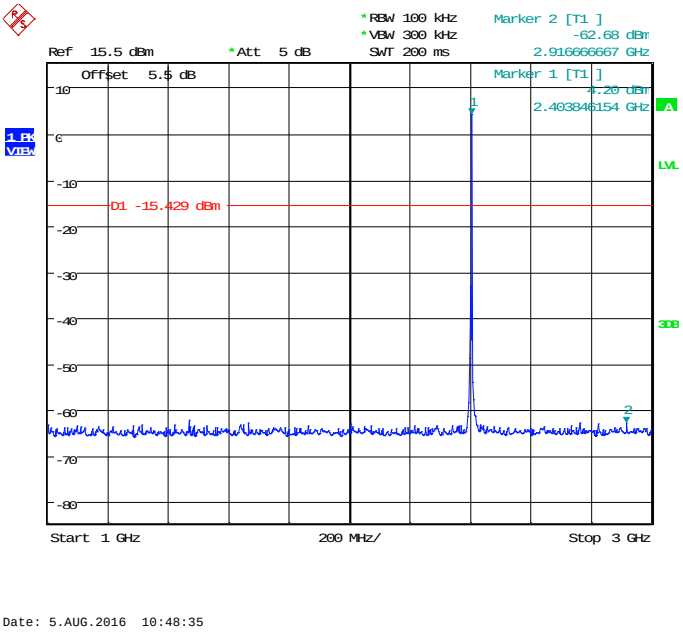

Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

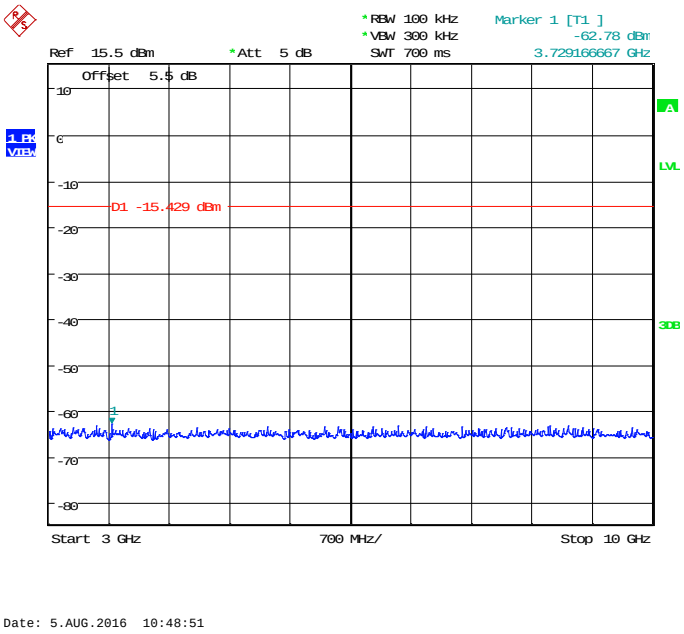

Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

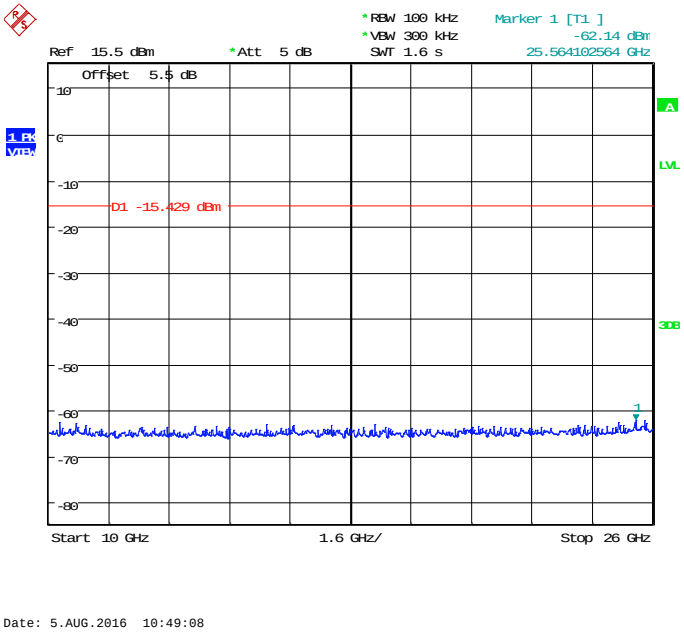

Fig.17. Conducted spurious emission: GFSK, Channel 0,10GHz - 26GHz

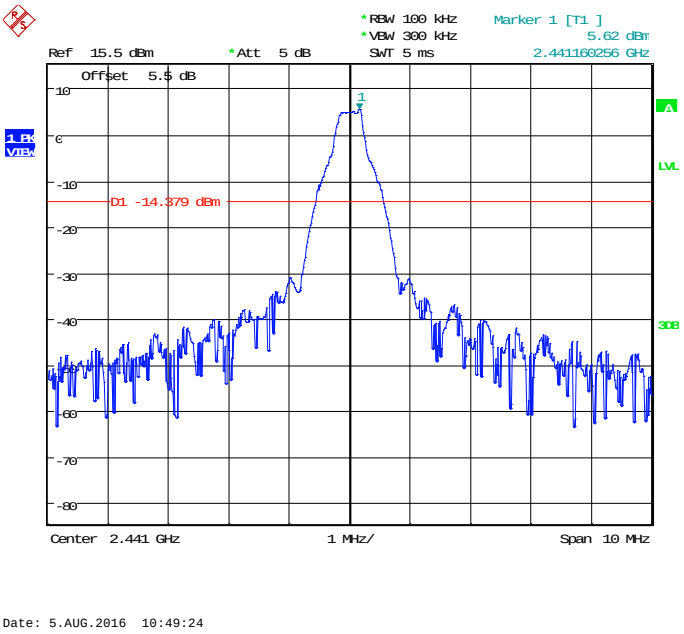

Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

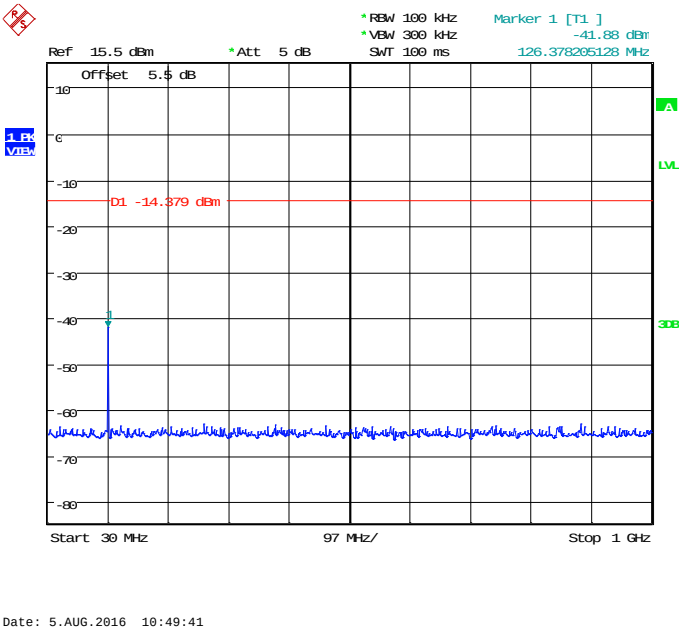

Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

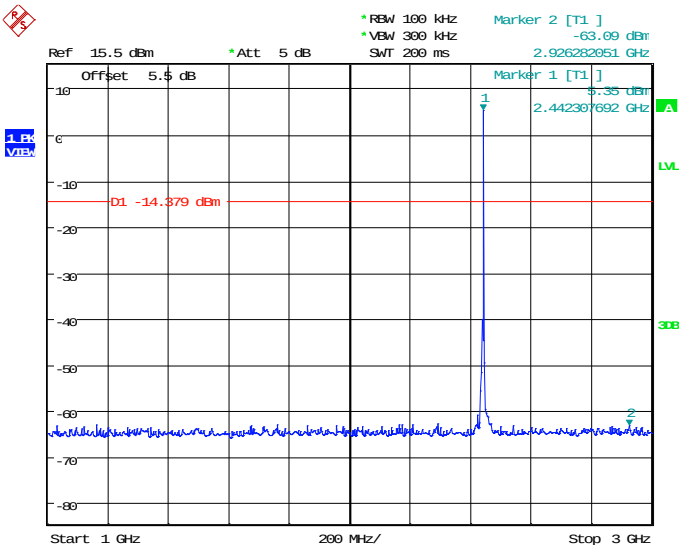

Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

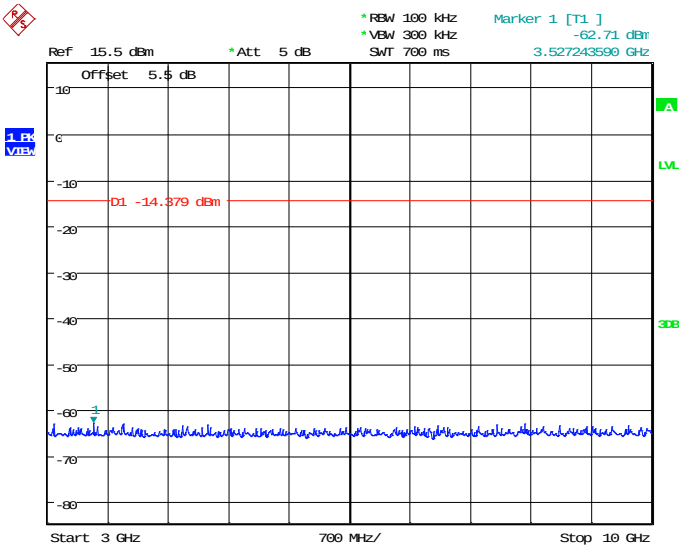

Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

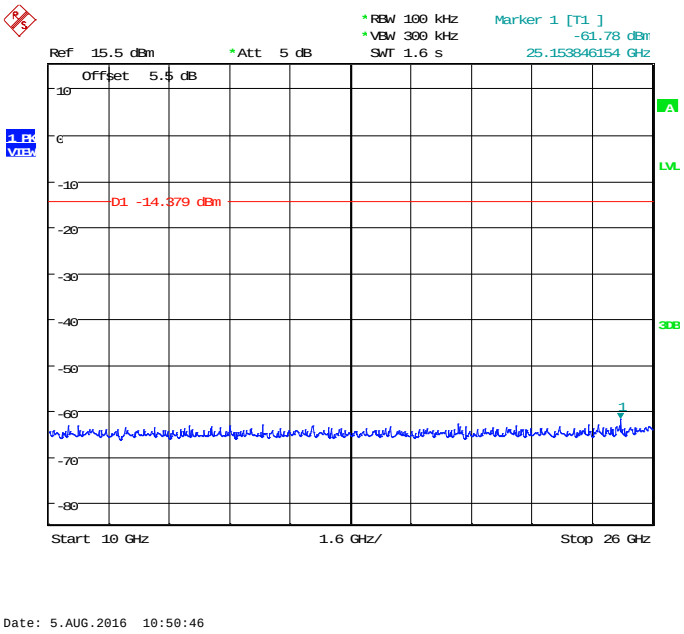

Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

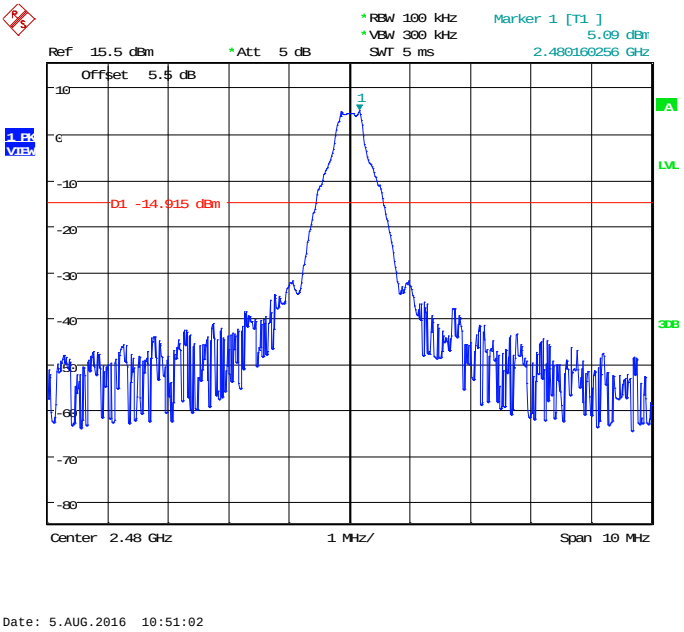

Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz

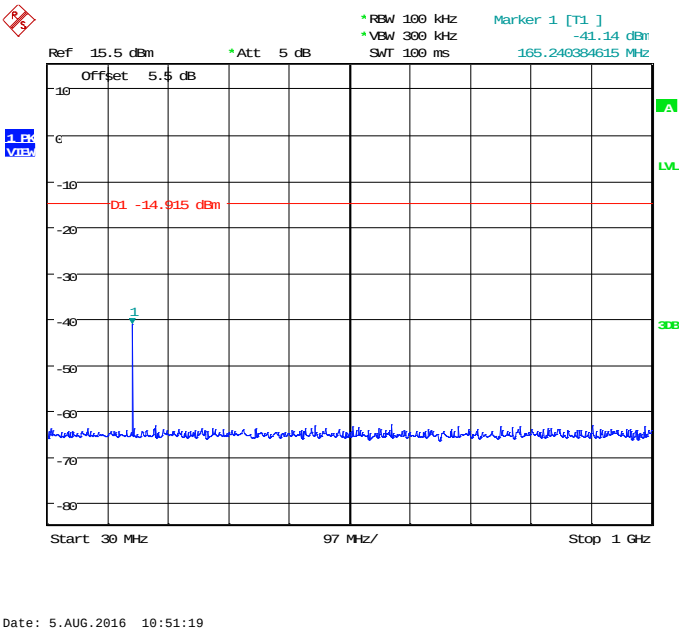

Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

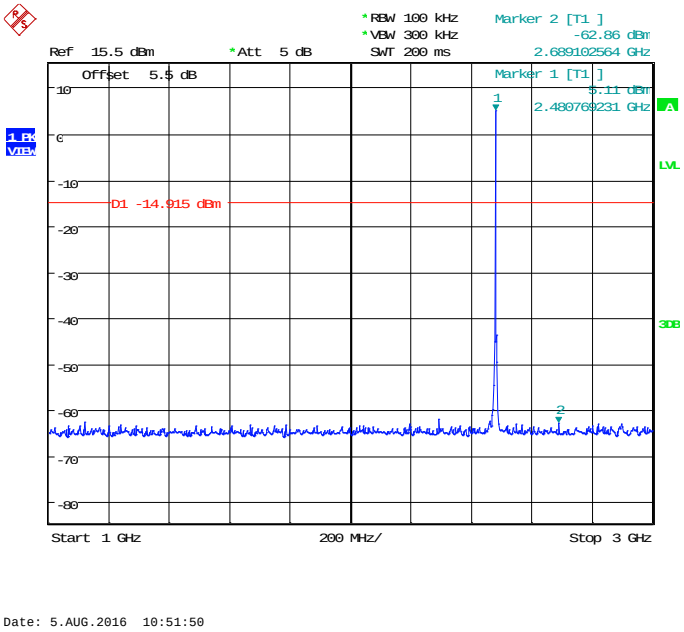

Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

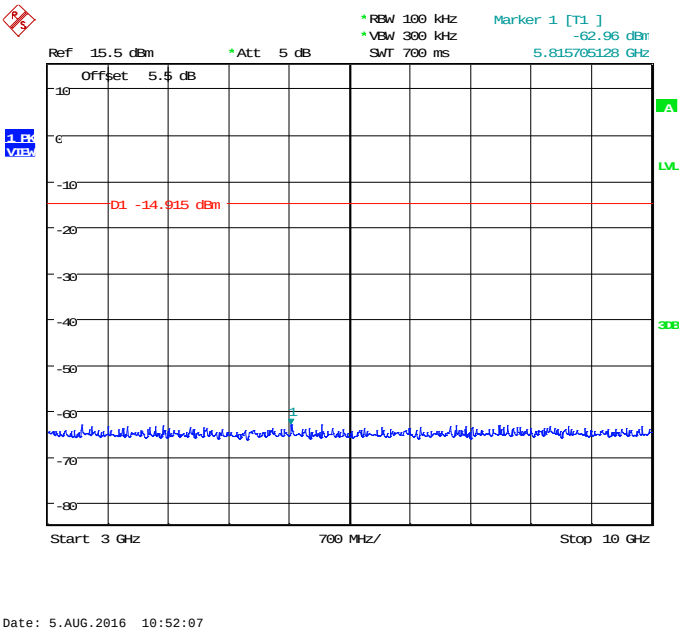

Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

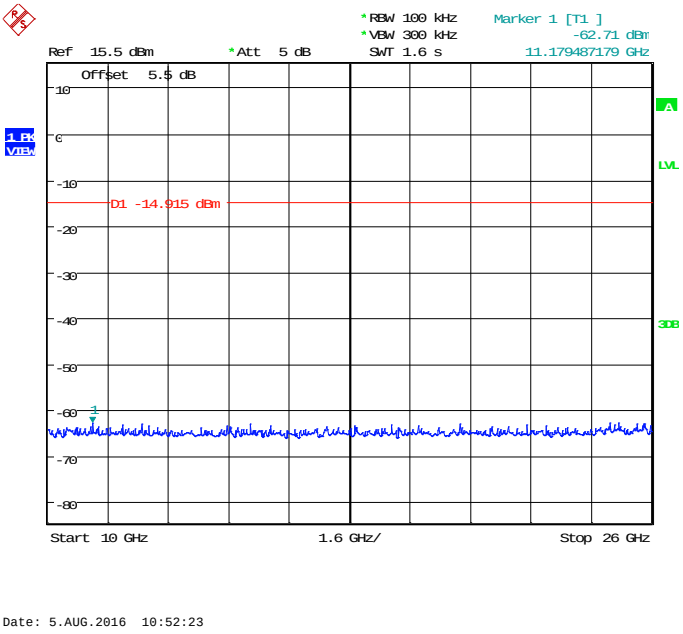

Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz

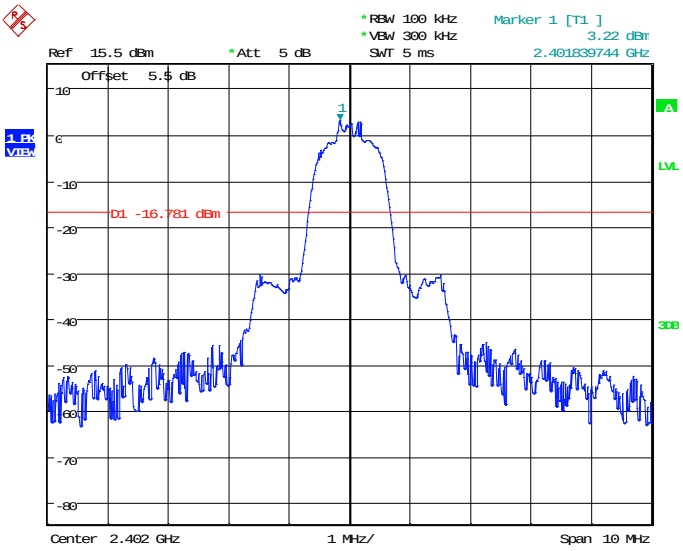

Fig.28. Conducted spurious emission: π/4 DQPSK, Channel 0,2402MHz

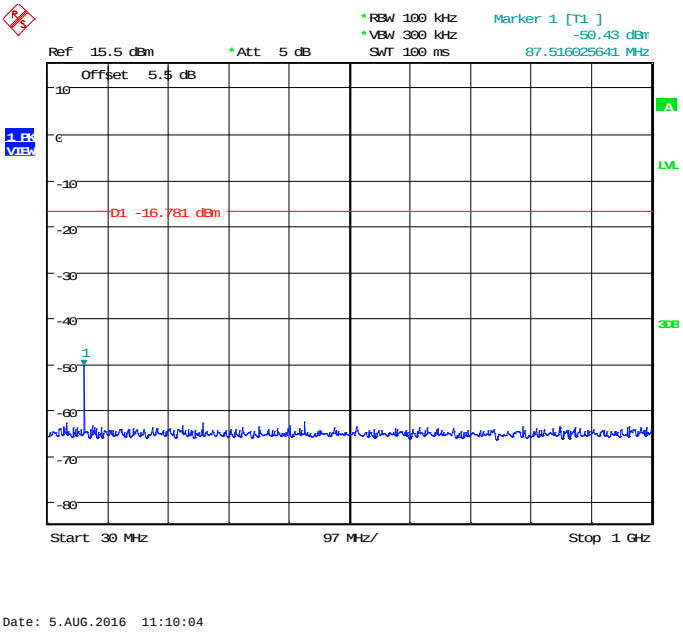

Fig.29. Conducted spurious emission: π/4 DQPSK, Channel 0, 30MHz - 1GHz

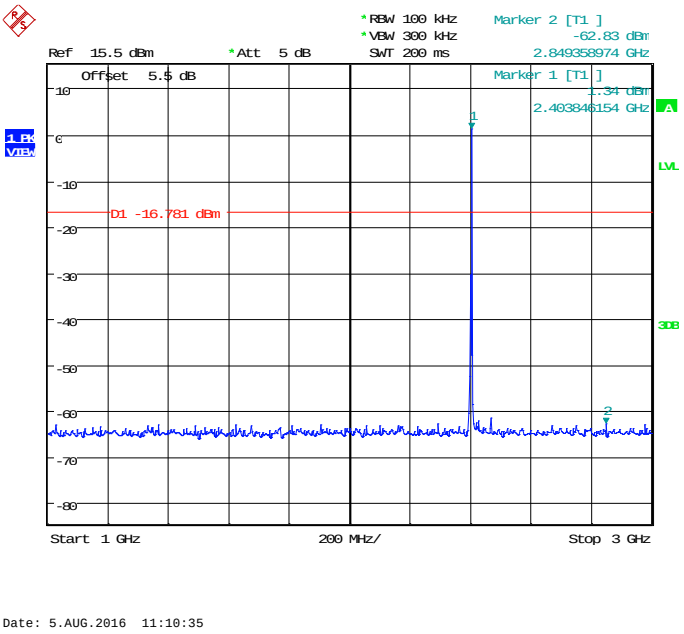

Fig.30. Conducted spurious emission: π/4 DQPSK, Channel 0, 1GHz - 3GHz

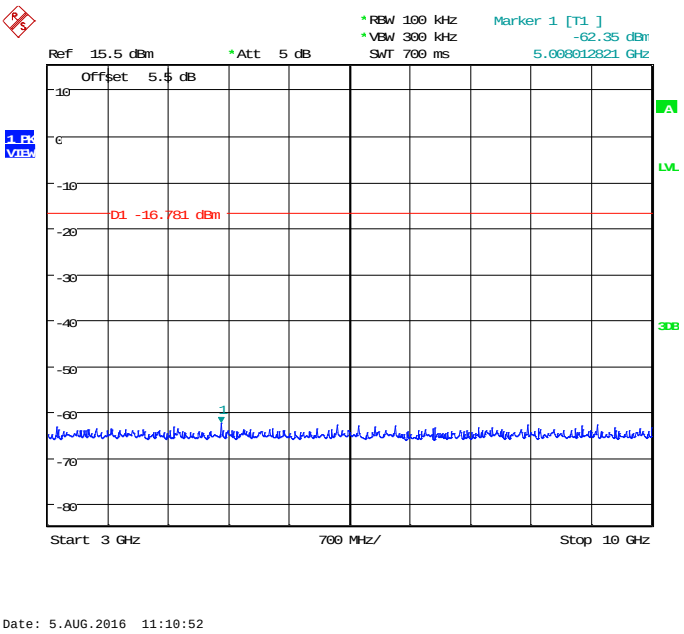

Fig.31. Conducted spurious emission: π/4 DQPSK, Channel 0, 3GHz - 10GHz

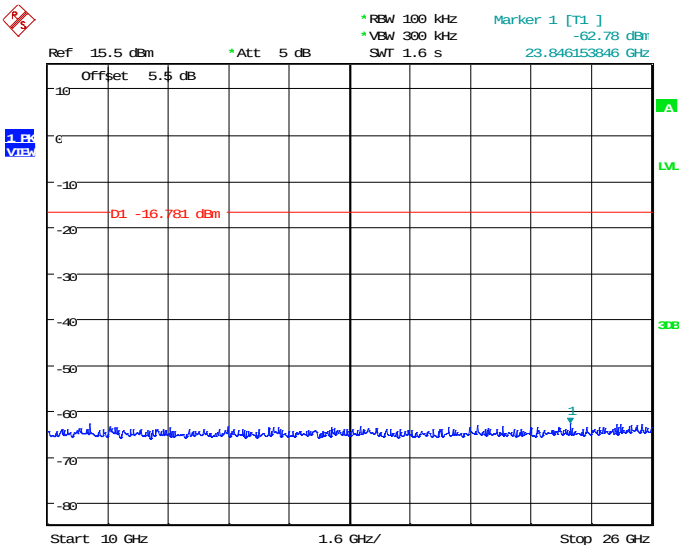

Fig.32. Conducted spurious emission: π/4 DQPSK, Channel 0,10GHz - 26GHz

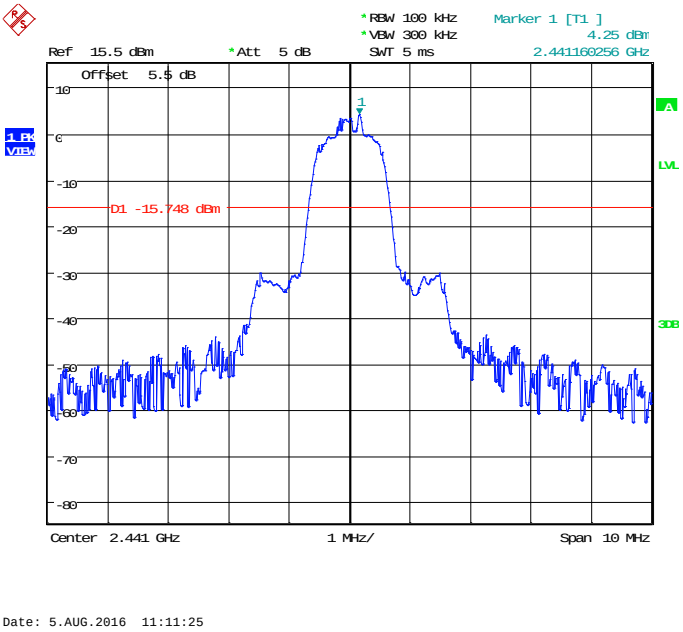

Fig.33. Conducted spurious emission: π/4 DQPSK, Channel 39, 2441MHz

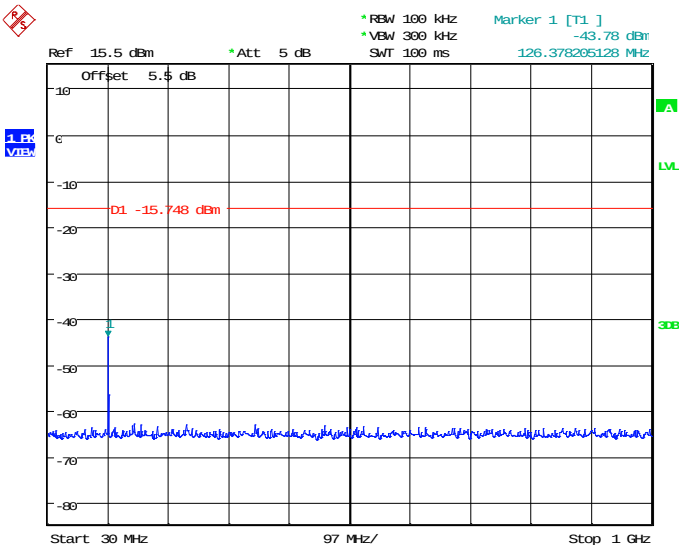

Fig.34. Conducted spurious emission: π/4 DQPSK, Channel 39, 30MHz - 1GHz

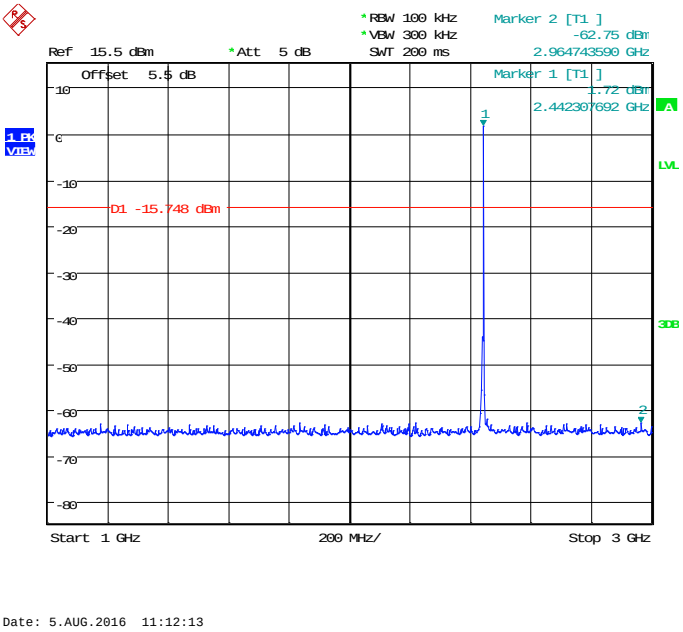

Fig.35. Conducted spurious emission: π/4 DQPSK, Channel 39, 1GHz - 3GHz

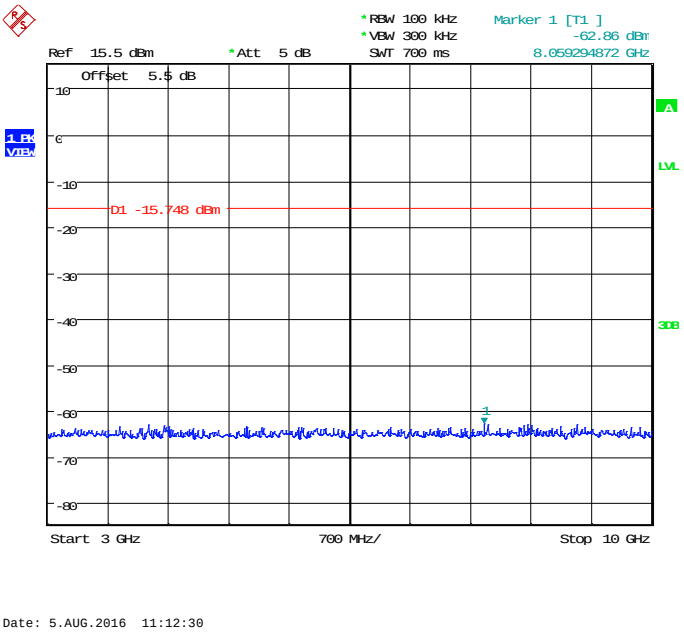

Fig.36. Conducted spurious emission: π/4 DQPSK, Channel 39, 3GHz - 10GHz

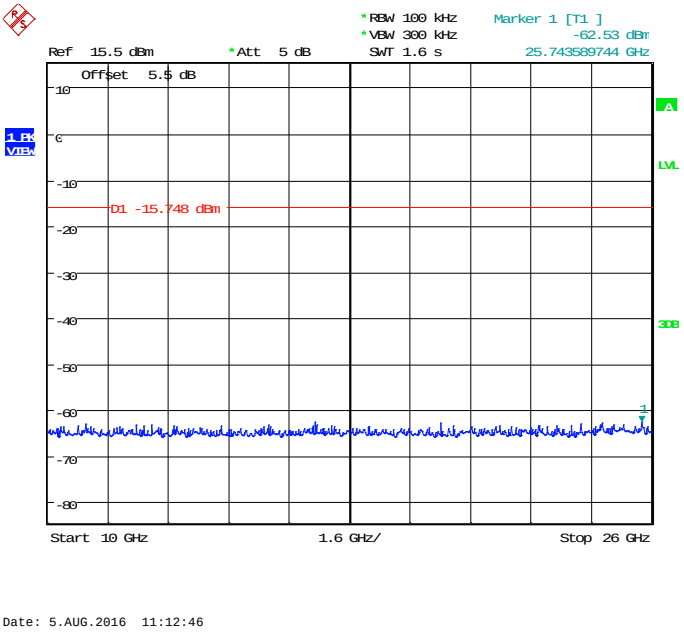

Fig.37. Conducted spurious emission: π/4 DQPSK, Channel 39, 10GHz – 26GHz

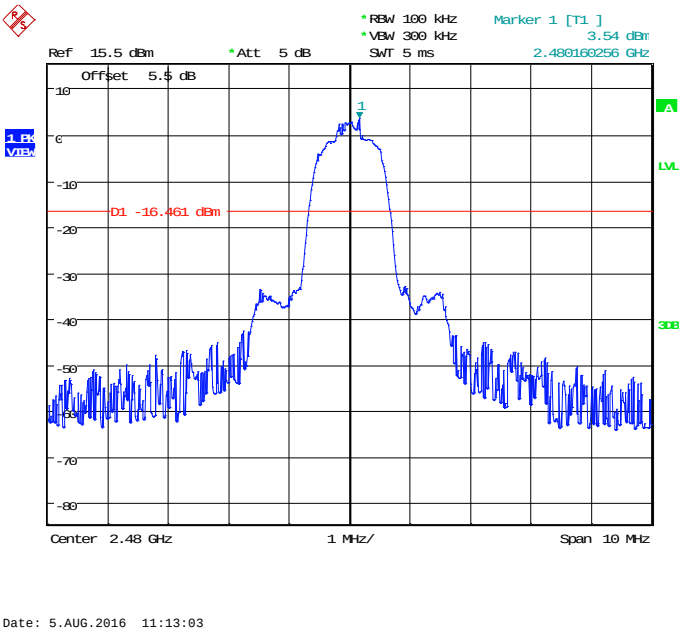

Fig.38. Conducted spurious emission: π/4 DQPSK, Channel 78, 2480MHz

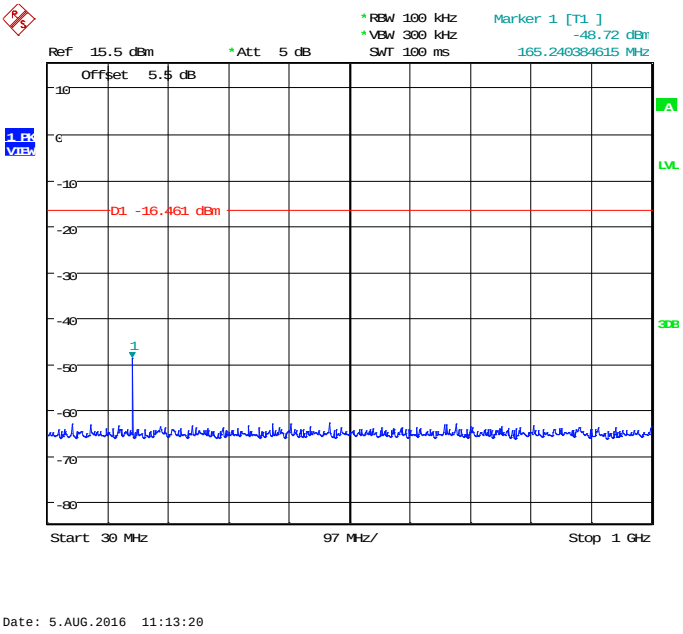

Fig.39. Conducted spurious emission: π/4 DQPSK, Channel 78, 30MHz - 1GHz

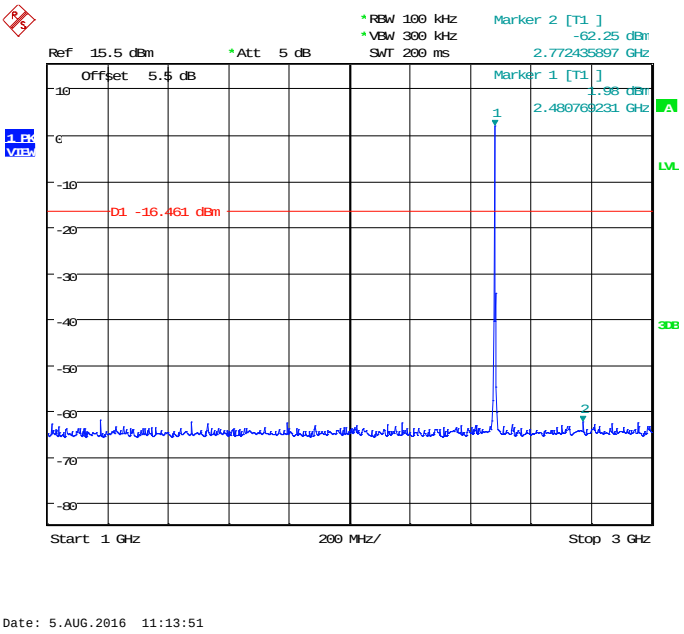

Fig.40. Conducted spurious emission: π/4 DQPSK, Channel 78, 1GHz - 3GHz

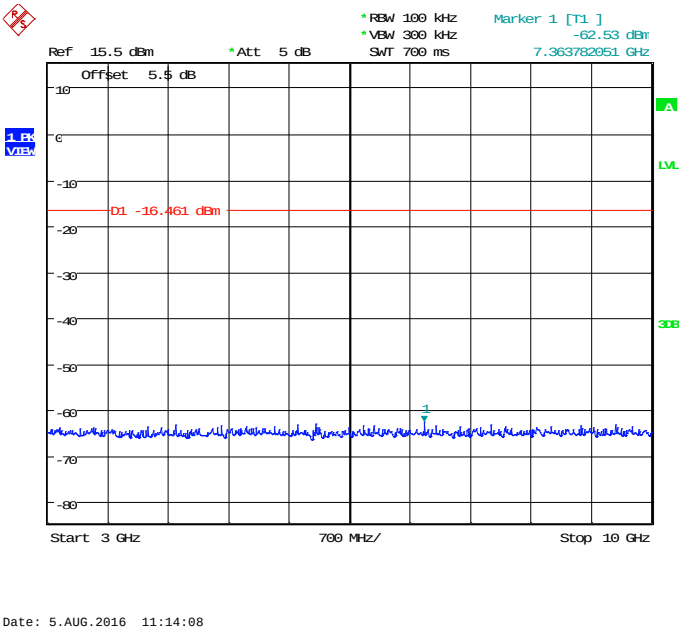

Fig.41. Conducted spurious emission: π/4 DQPSK, Channel 78, 3GHz - 10GHz

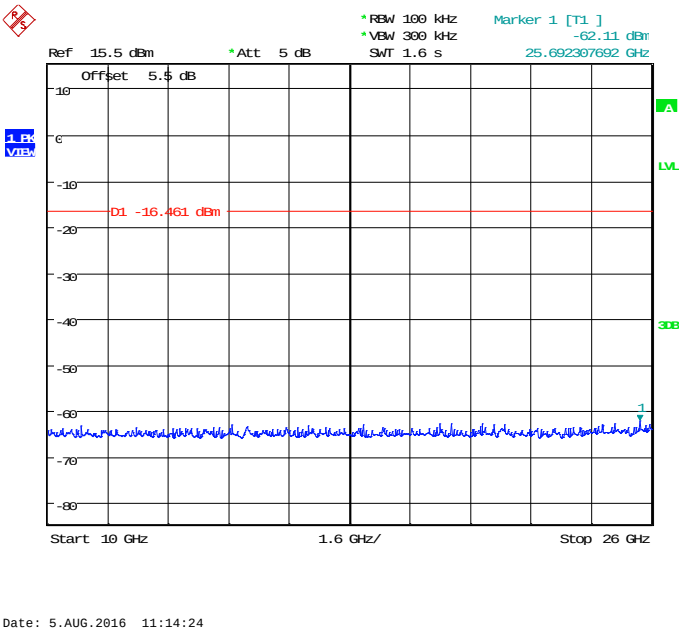

Fig.42. Fig.30 Conducted spurious emission: π/4 DQPSK, Channel 78, 10GHz - 26GHz

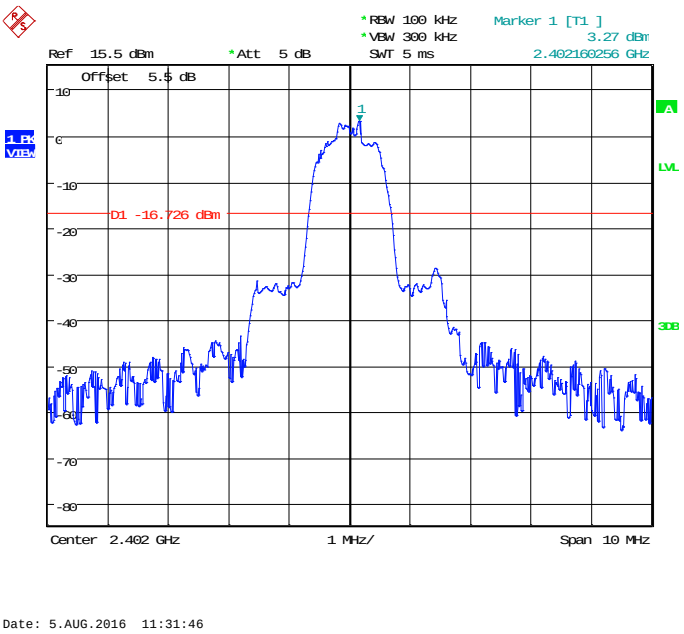

Fig.43. Conducted spurious emission: 8DPSK, Channel 0,2402MHz

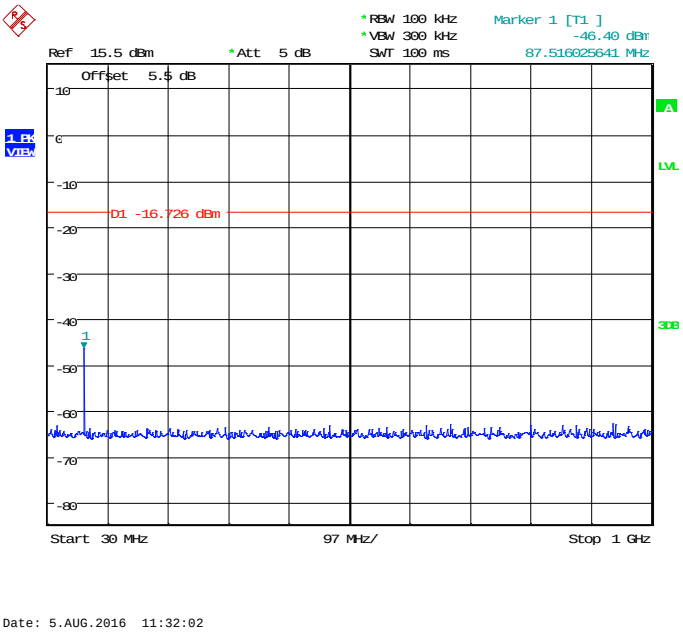

Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

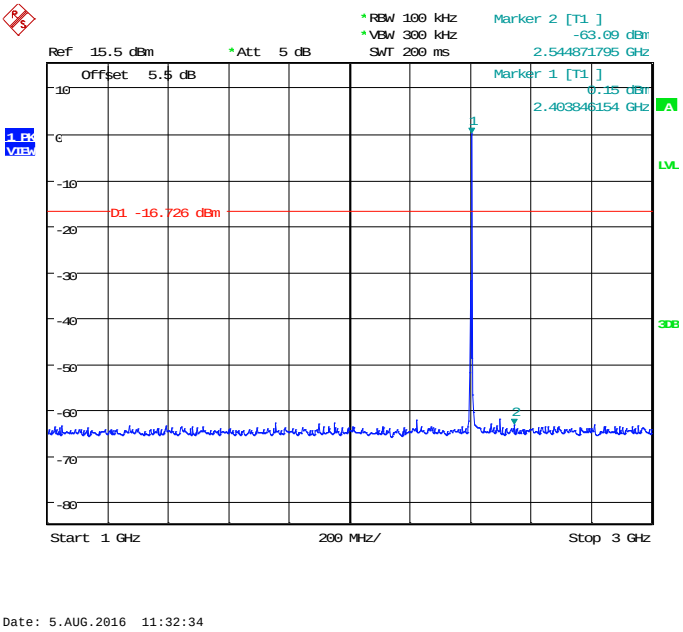

Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

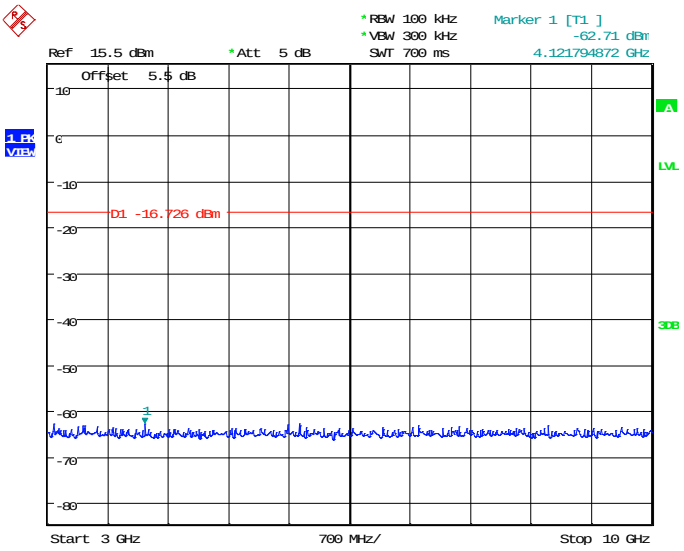

Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

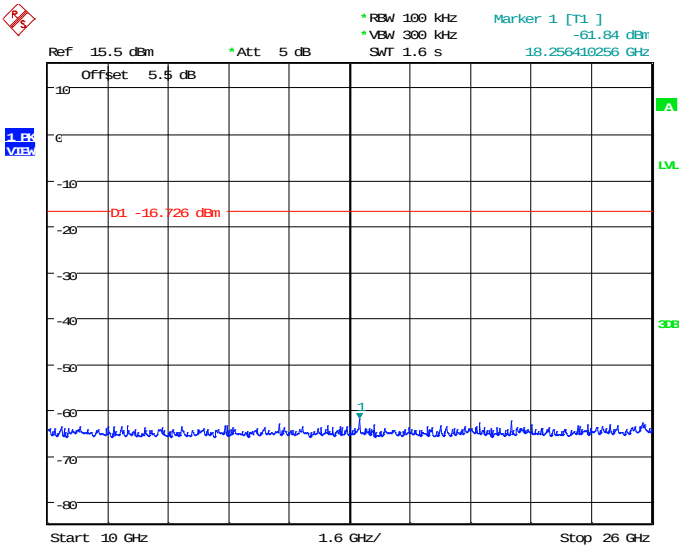

Fig.47. Conducted spurious emission: 8DPSK, Channel 0,10GHz - 26GHz

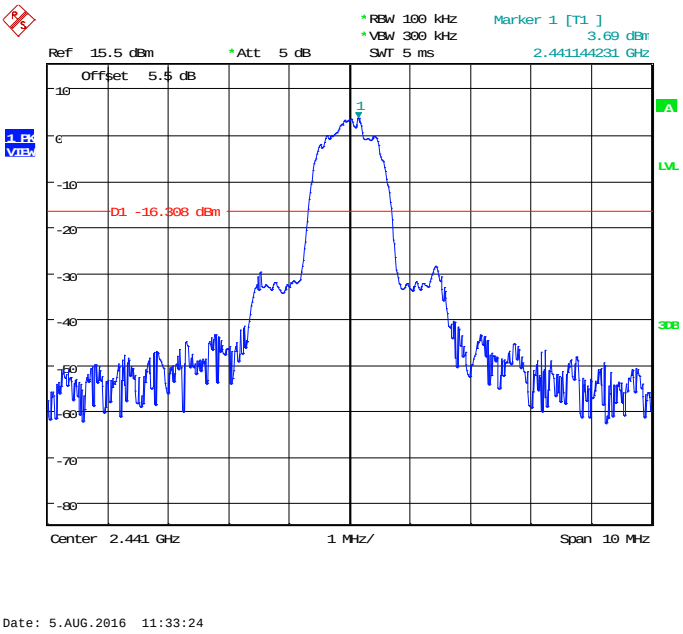

Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

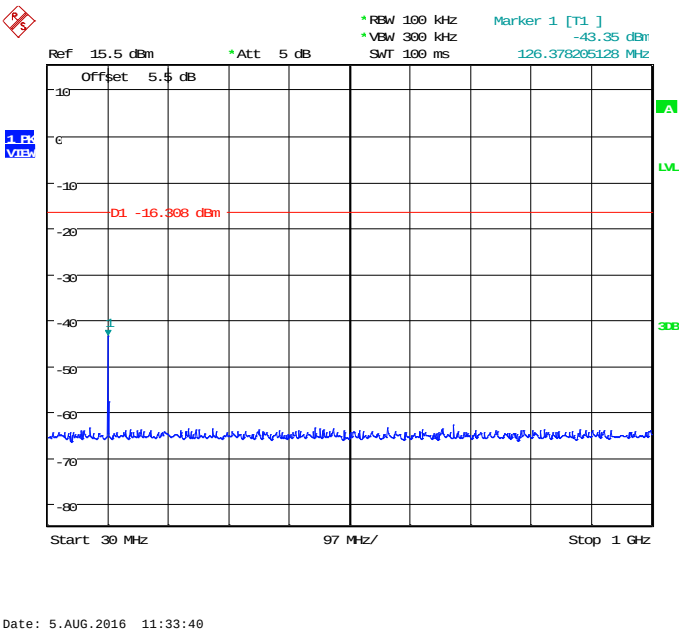

Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

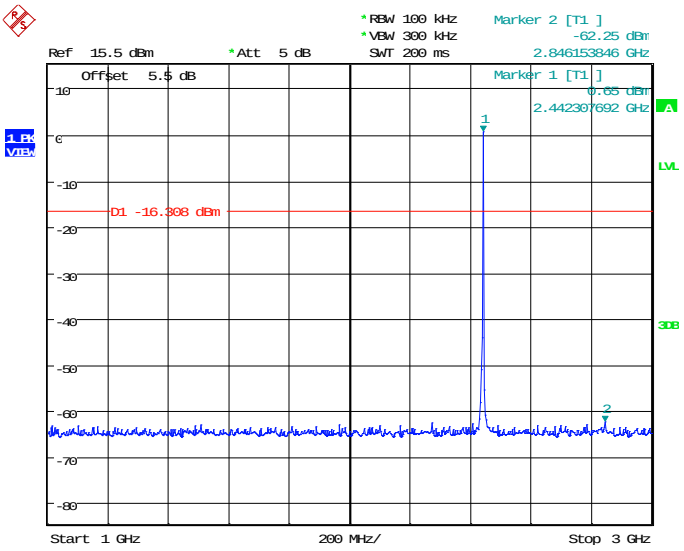

Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

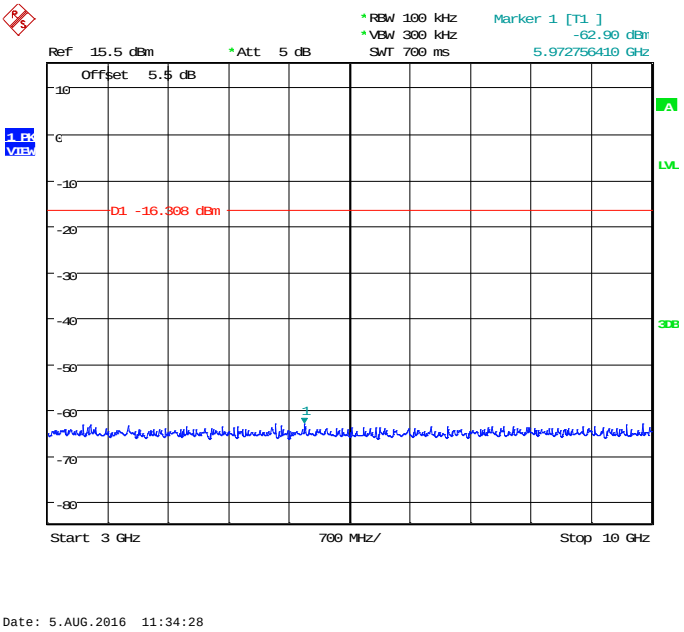

Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

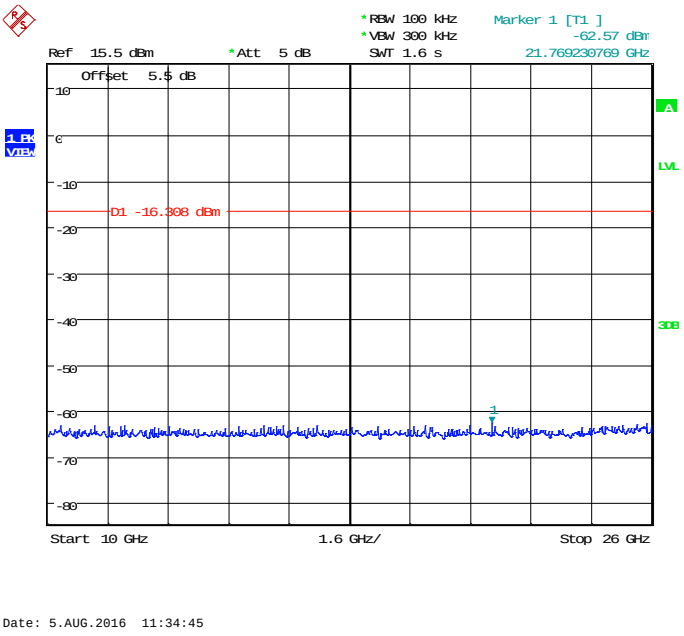

Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

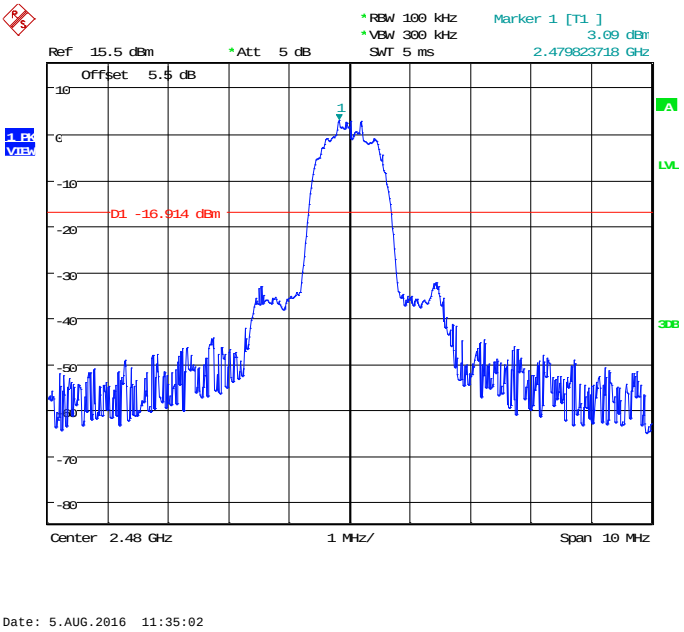

Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

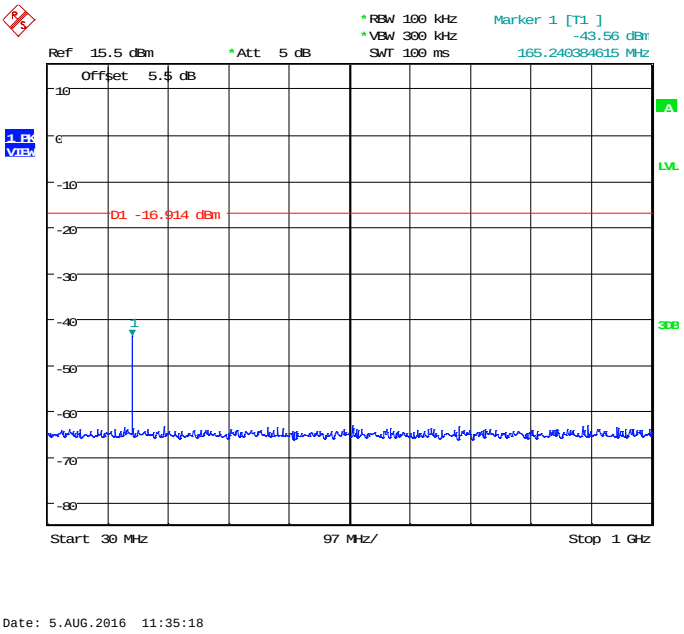

Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

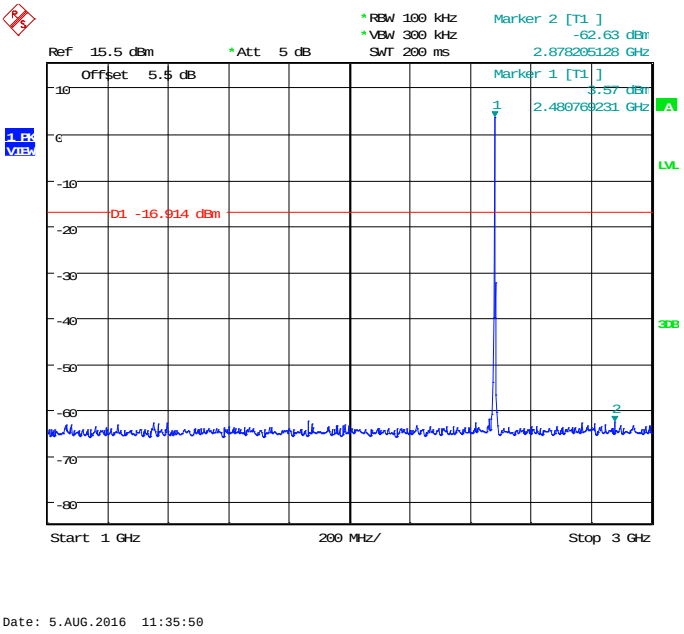

Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

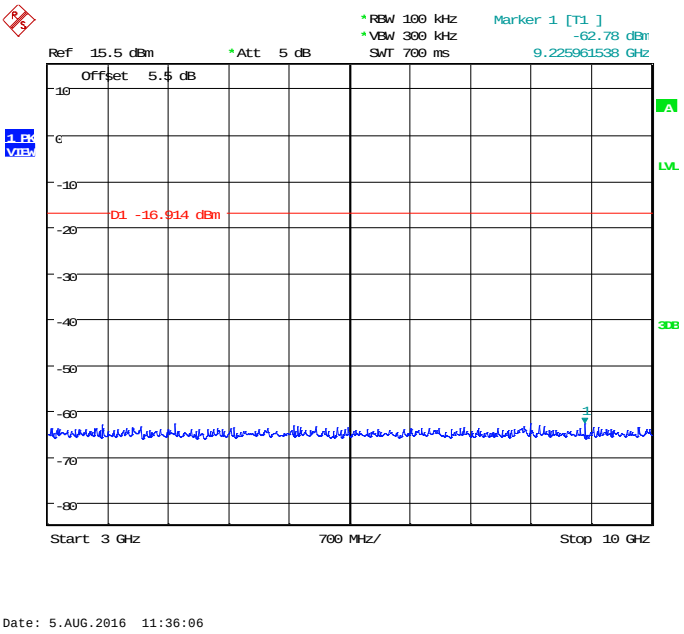

Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

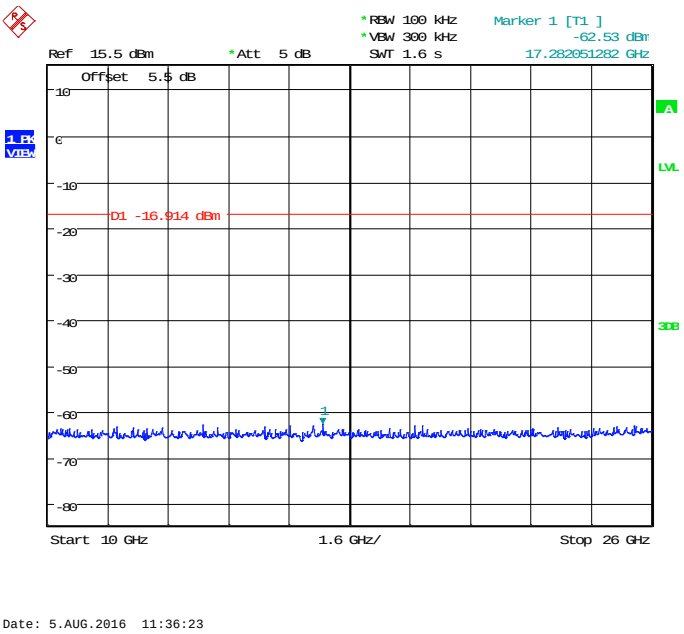

Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

A.5. Radiated Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

Result=P_{Mea}+ P_{rpl}

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.58	P
	3 GHz ~ 18 GHz	Fig.59	P
Ch 39 2441 MHz	9 kHz ~ 30 MHz	Fig.60	P
	30 MHz ~ 1 GHz	Fig.61	P
	1 GHz ~ 3 GHz	Fig.62	P
	3 GHz ~ 18 GHz	Fig.63	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.64	P
	3 GHz ~ 18 GHz	Fig.65	P
Power	2.38GHz~2.4GHz---L	Fig.66	P
Power	2.45GHz~2.5GHz---H	Fig.67	P

For all channels	18 GHz ~ 26 GHz	Fig.68	P

Forπ/4 DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.69	P
	3 GHz ~ 18 GHz	Fig.70	P
Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.71	P
	1 GHz ~ 3 GHz	Fig.72	P
	3 GHz ~ 18 GHz	Fig.73	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.74	P
	3 GHz ~ 18 GHz	Fig.75	P
Power	2.38GHz~2.4GHz---L	Fig.76	P
Power	2.45GHz~2.5GHz---H	Fig.77	P
For all channels	18 GHz ~ 26 GHz	Fig.78	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.79	P
	3 GHz ~ 18 GHz	Fig.80	P
Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.81	P
	1 GHz ~ 3 GHz	Fig.82	P
	3 GHz ~ 18 GHz	Fig.83	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.84	P
	3 GHz ~ 18 GHz	Fig.85	P
Power	2.38GHz~2.4GHz---L	Fig.86	P
Power	2.45GHz~2.5GHz---H	Fig.87	P
For all channels	18 GHz ~ 26 GHz	Fig.88	P

GFSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2390.000	45.6	-11.1	56.700	V
17981.500	51.6	27.9	23.700	H
17974.000	51.5	27.9	23.600	V
17905.000	51.5	27.1	24.400	H
17891.000	51.3	27.1	24.200	H
17989.000	51.3	27.9	23.400	V

GFSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
17973.500	51.4	27.9	23.500	H
17982.000	51.3	27.9	23.400	V
17983.000	51.3	27.9	23.400	V
17909.000	51.3	27.1	24.200	H
17953.500	51.2	27.9	23.300	H
17877.500	51.2	27.1	24.100	V

GFSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2483.500	45.9	-11.2	57.1	H
17984.000	51.5	27.9	23.6	H
17981.000	51.3	27.9	23.4	V
17933.000	51.3	27.9	23.4	H
17985.500	51.2	27.9	23.3	V
17986.500	51.2	27.9	23.3	H

π/4 DQPSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2390.000	45.4	-11.1	56.5	H
17986.000	51.6	27.9	23.7	H
17939.000	51.5	27.9	23.6	V
17972.500	51.4	27.9	23.5	H
17906.000	51.2	27.1	24.1	H
17915.500	51.2	27.9	23.3	V

π/4 DQPSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
17919.000	61.2	27.9	19.0	H
17947.500	61.2	27.9	18.9	H
17996.500	61.3	27.9	18.8	V
17910.000	60.5	27.9	18.7	H
17924.000	60.1	27.9	18.7	V
17940.000	61.1	27.9	18.6	H

π/4 DQPSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2483.500	46.0	-11.2	57.2	V
17925.000	51.3	27.9	23.4	H
17987.500	51.3	27.9	23.4	V
17903.000	51.3	27.1	24.2	H
17918.000	51.2	27.9	23.3	V
17896.500	51.2	27.1	24.1	H

8DPSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2389.360	45.8	-11.1	56.9	H
17996.500	51.3	27.9	23.4	V
17981.500	51.3	27.9	23.4	V
17977.500	51.2	27.9	23.3	H
17966.000	51.2	27.9	23.3	V
17927.500	51.1	27.9	23.2	H

8DPSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
17999.500	51.4	27.9	23.5	H
17895.500	51.3	27.1	24.2	H
17993.000	51.3	27.9	23.4	V
17946.500	51.2	27.9	23.3	H
17933.000	51.2	27.9	23.3	V
17946.000	51.2	27.9	23.3	H

8DPSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2483.500	45.9	-11.2	56.7	H
17979.000	51.5	27.9	19.2	H
17943.500	51.4	27.9	18.9	V
17956.500	51.3	27.9	18.9	V
17965.000	51.3	27.9	18.8	H
17977.000	51.3	27.9	18.8	V

GFSK Ch 0 - Peak

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2389.300	57.8	-11.1	68.9	V
17822.500	63.4	27.1	36.3	H
17876.500	63.3	27.1	36.2	V
17969.000	63.2	27.9	35.3	H
17901.500	62.7	27.1	35.6	V
17939.000	62.7	27.9	34.8	H

GFSK Ch 39 - Peak

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2483.530	63.0	27.9	35.1	H
17948.000	62.9	27.9	35.0	V
17928.500	62.8	27.9	34.9	V
17927.500	62.7	27.9	34.8	H
17925.500	62.6	27.9	34.7	H
17999.000	62.6	27.9	34.7	H

GFSK Ch 78 - Peak

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2483.530	66.0	-11.2	77.2	H
17938.000	63.2	27.9	35.3	H
17987.000	63.0	27.9	35.1	V
17924.000	62.9	27.9	35.0	H
17898.000	62.8	27.1	35.7	V
17979.000	62.6	27.9	34.7	H

π/4 DQPSK Ch 0 - Peak

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2389.720	56.6	-11.1	67.700	H
17933.250	57.7	27.9	29.800	V
17892.000	57.7	27.1	30.600	V
17900.250	57.6	27.1	30.500	H
17995.500	57.5	27.9	29.600	H
17979.000	57.3	27.9	29.400	V

π/4 DQPSK Ch 39 - Peak

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
17980.000	62.9	27.9	35.0	H
17942.500	62.8	27.9	34.9	H
17976.000	62.7	27.9	34.8	V
17999.000	62.6	27.9	34.7	H
17995.000	62.6	27.9	34.7	V
17878.000	62.5	27.1	35.4	H

π/4 DQPSK Ch 78 - Peak

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2483.475	63.6	-11.2	74.8	H
17912.500	63.4	27.1	36.3	H
17920.500	63.1	27.9	35.2	V
17933.500	62.8	27.9	34.9	H
17909.500	62.6	27.1	35.5	V
17898.000	62.3	27.1	35.2	V

8DPSK Ch 0 - Peak

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2387.715	58.2	-11.1	67.7	V
17967.500	62.7	27.9	30.6	H
17961.500	62.6	27.9	30.5	V
17985.000	62.6	27.9	30.2	V
17768.500	62.5	27.1	30.6	H
17957.000	62.5	27.1	30.3	H

8DPSK Ch 39 - Peak

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
17954.500	63.0	27.9	35.1	H
17938.000	62.8	27.9	34.9	H
17942.500	62.7	27.9	34.8	V
17908.000	62.6	27.1	35.5	H
17980.500	62.6	27.9	34.7	H
17982.500	62.5	27.9	34.6	V

8DPSK Ch 78 - Peak

Frequency(MHz)	Result(dBuv/m)	P_{rpl} (dB)	P_{Mea} (dBuv/m)	Polarization
2483.560	62.9	-11.2	74.1	H
17979.500	63.9	27.9	36.0	H
17906.000	63.8	27.1	36.7	V
17924.500	62.8	27.9	34.9	H
17866.500	62.7	27.1	35.6	H
17831.500	62.6	27.1	35.5	H

Sample calculation: 8DPSK Ch 78 - Peak, 2489.490 MHz

Peak ERP(dBm) = P_{Mea} (70.6dBuV/m) + P_{rpl} (-11.2 dB) = 59.4 dBuV/m

Conclusion: PASS

Test graphs as below:

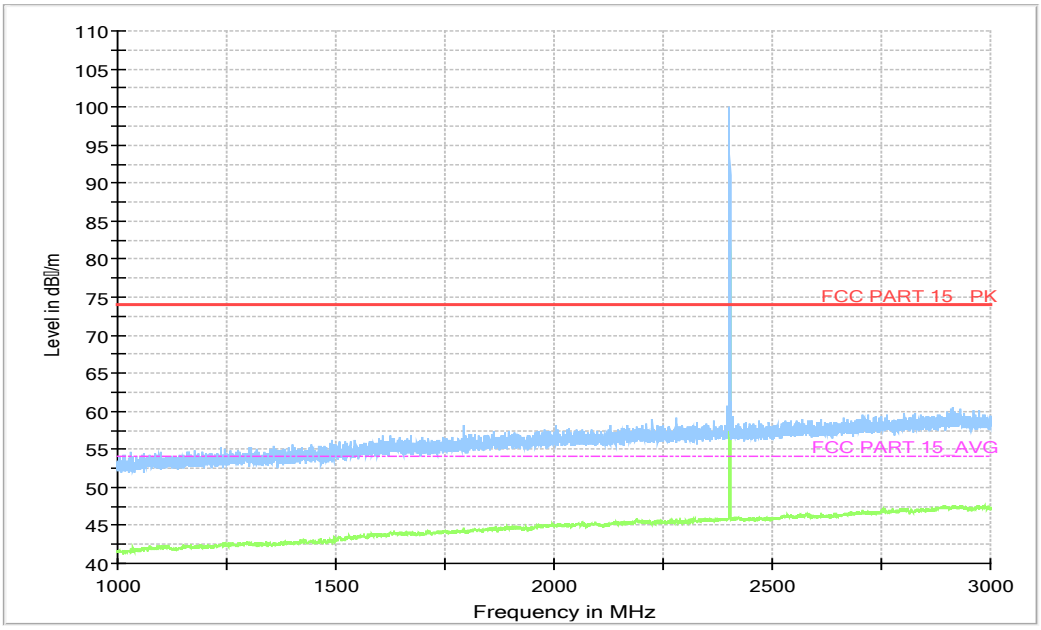

Fig.58. Radiated emission: GFSK, Channel 0, 1 GHz - 3 GHz

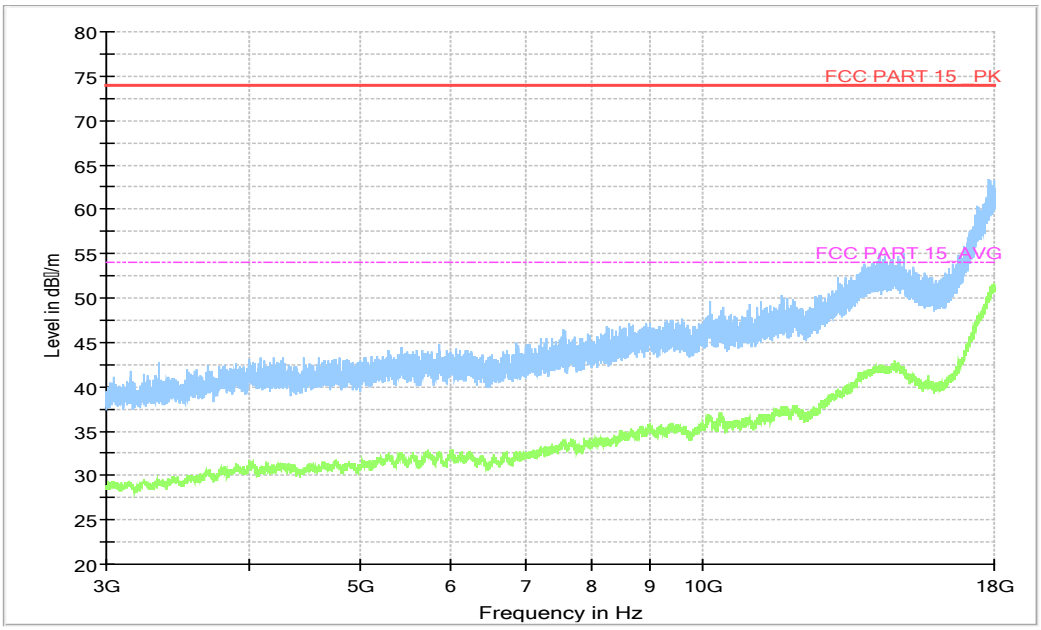

Fig.59. Radiated emission: GFSK, Channel 0, 3 GHz - 18 GHz

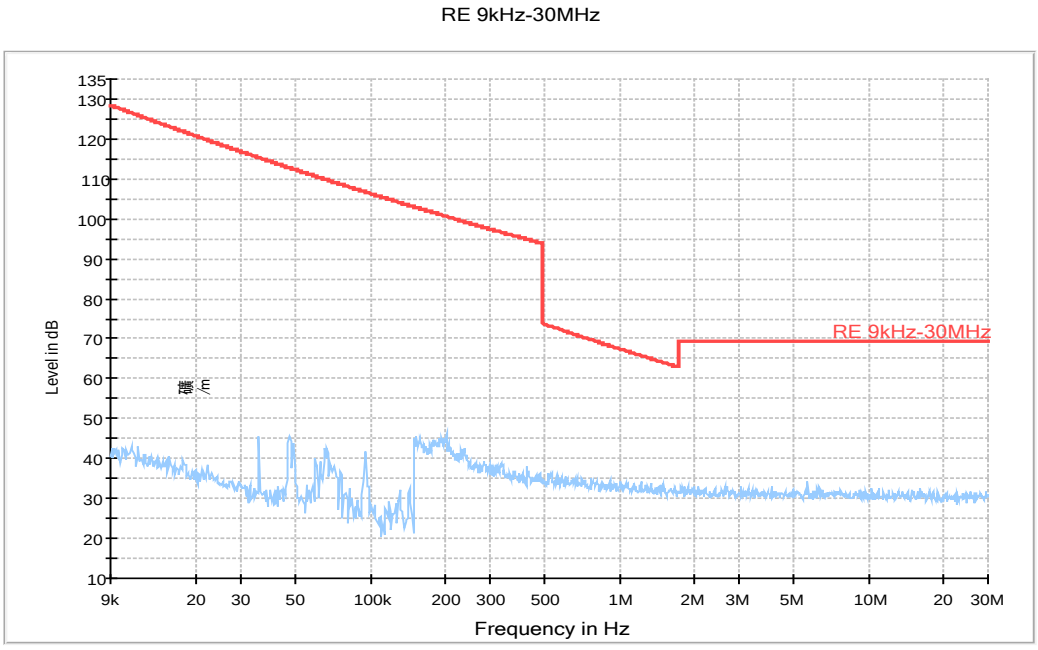

Fig.60. Radiated emission: GFSK, Channel 39, 9 kHz - 30 MHz

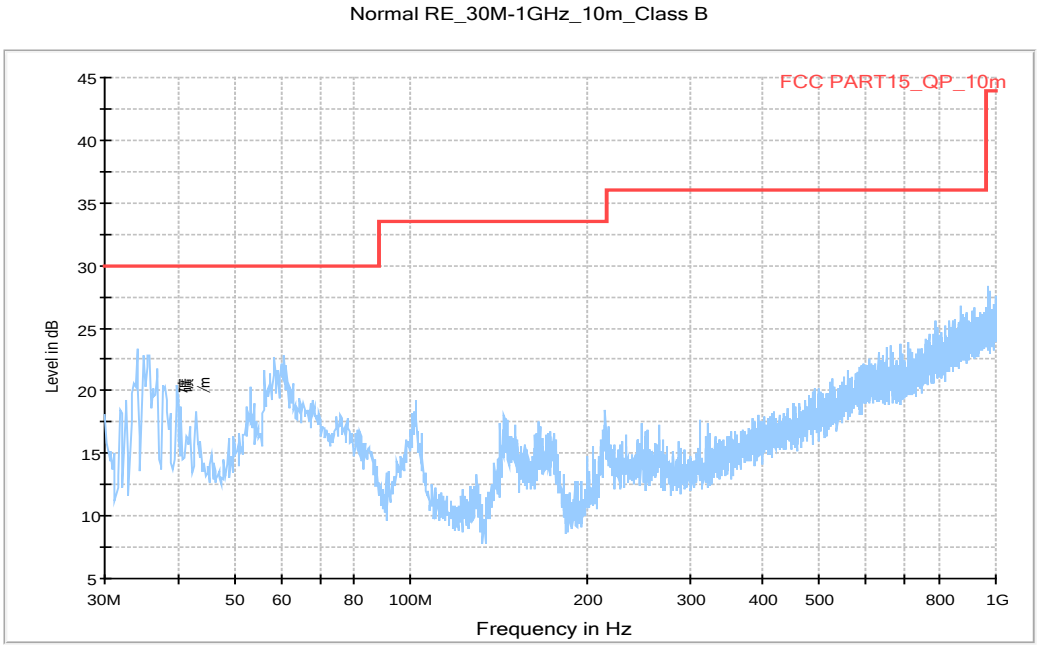

Fig.61. Radiated emission: GFSK, Channel 39, 30 MHz - 1 GHz

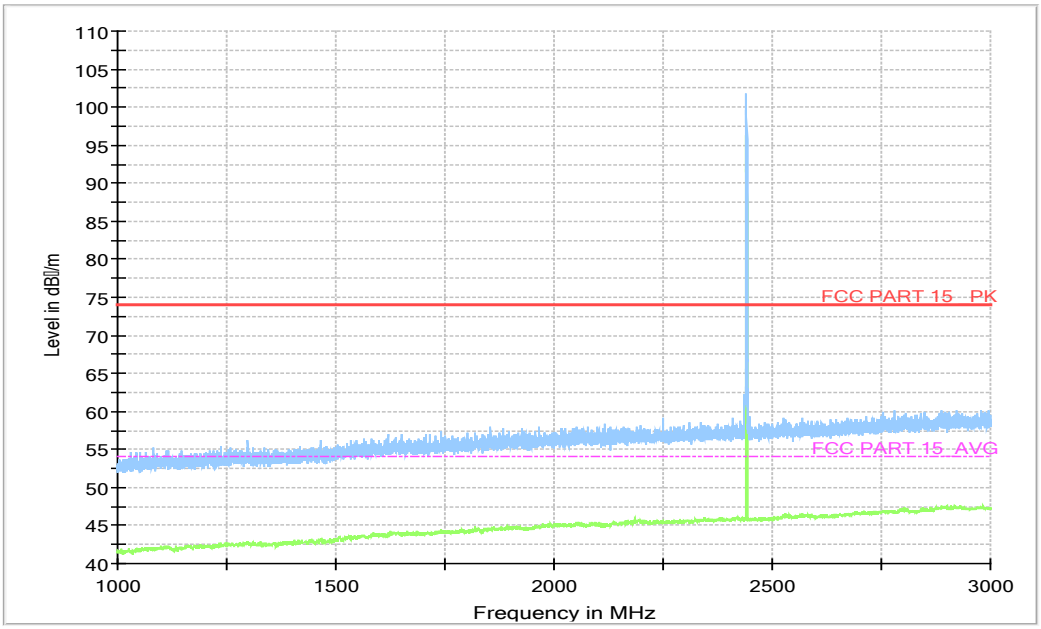

Fig.62. Radiated emission: GFSK, Channel 39, 1 GHz - 3 GHz

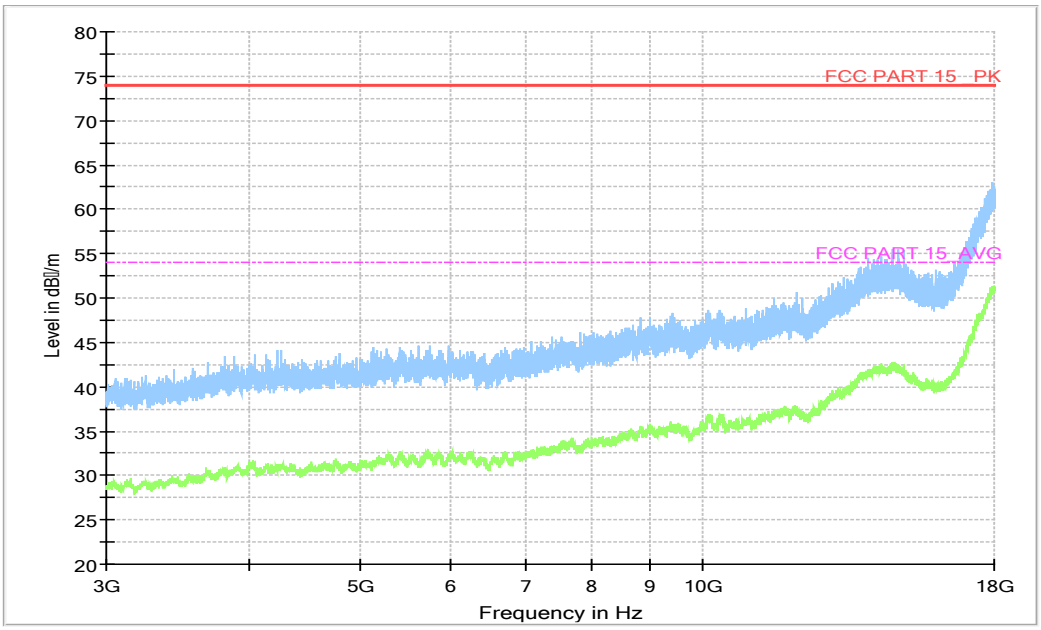

Fig.63. Radiated emission: GFSK, Channel 39, 3 GHz - 18 GHz

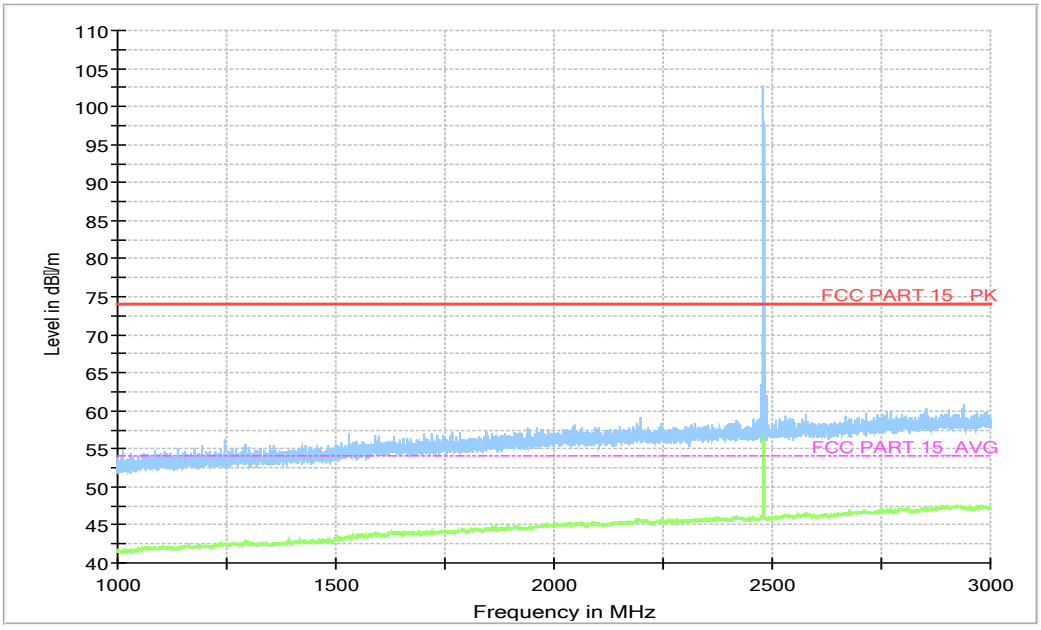

Fig.64. Radiated emission: GFSK, Channel 78, 1 GHz - 3 GHz

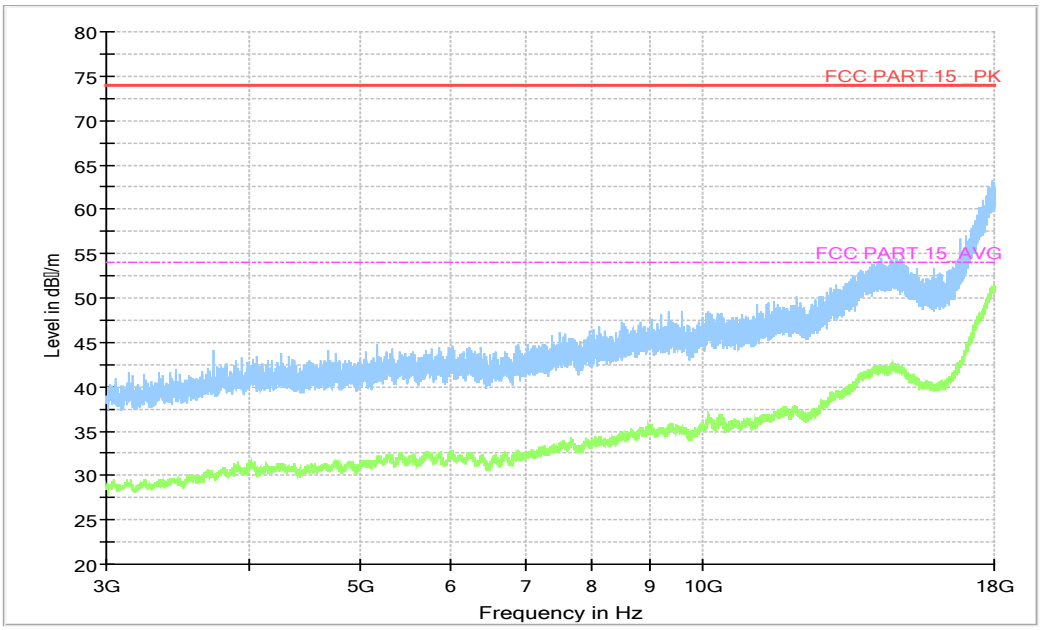

Fig.65. Radiated emission: GFSK, Channel 78, 3 GHz - 18 GHz

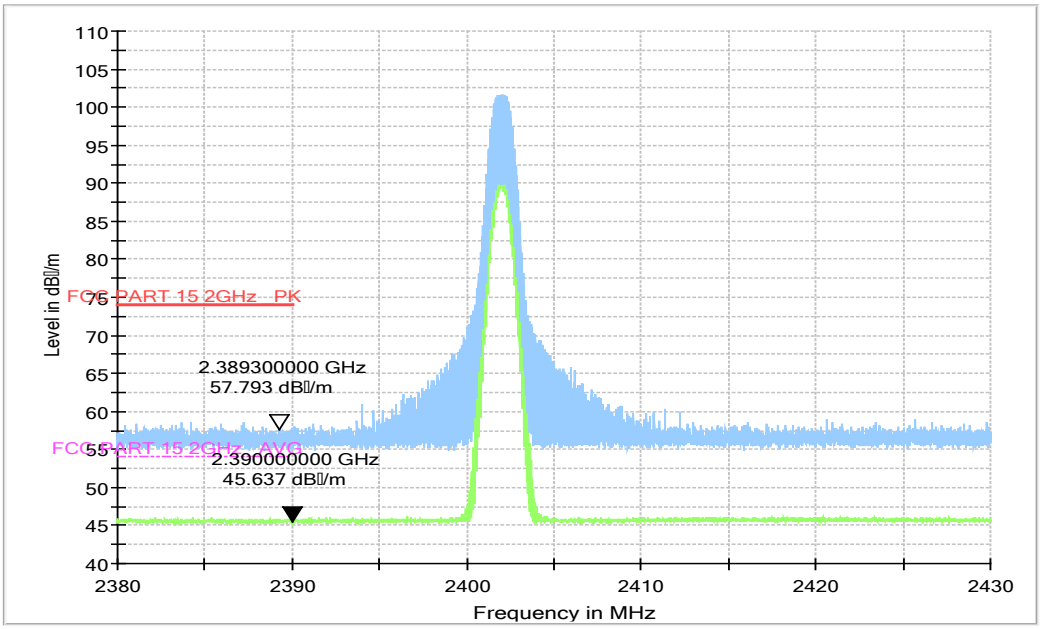

Fig.66. Radiated emission (Power): GFSK, low channel

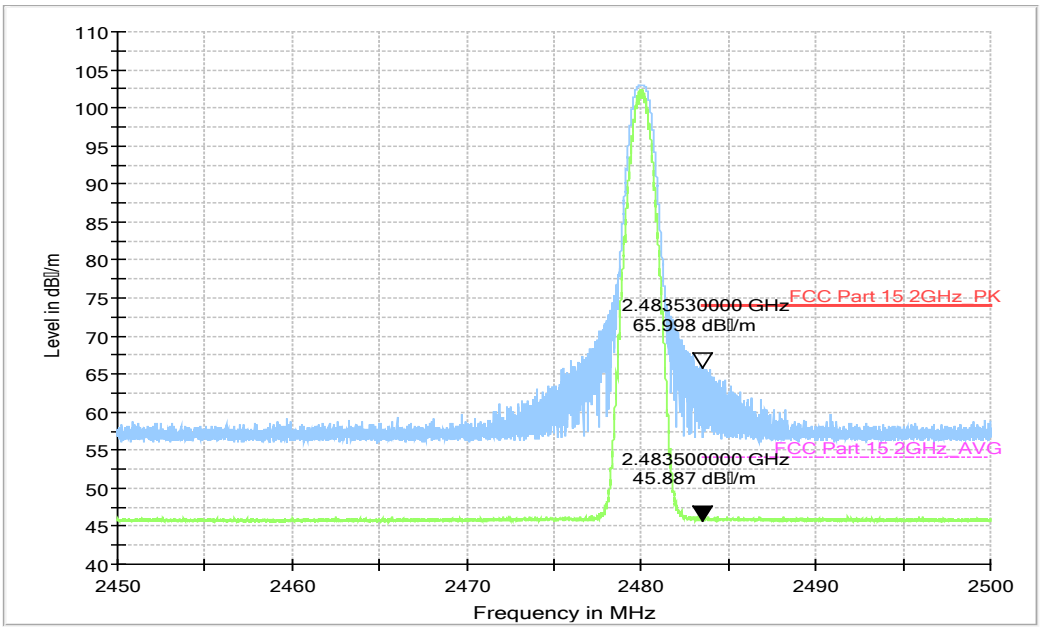

Fig.67. Radiated emission (Power) GFSK, high channel

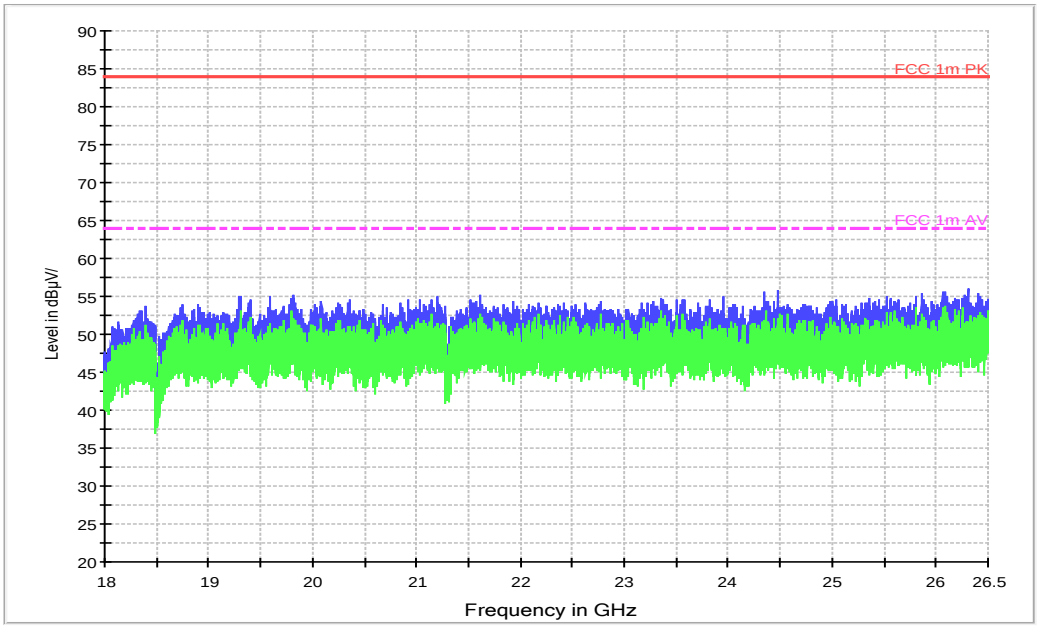

Fig.68. Radiated emission: GFSK, 18 GHz - 26 GHz

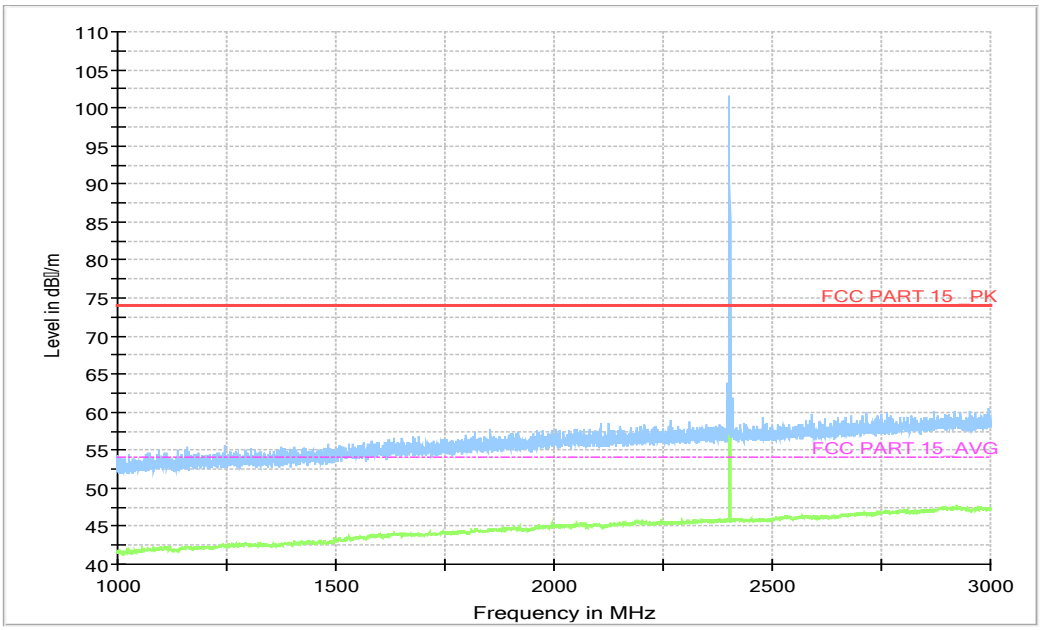

Fig.69. Radiated emission: π/4 DQPSK, Channel 0, 1 GHz - 3 GHz

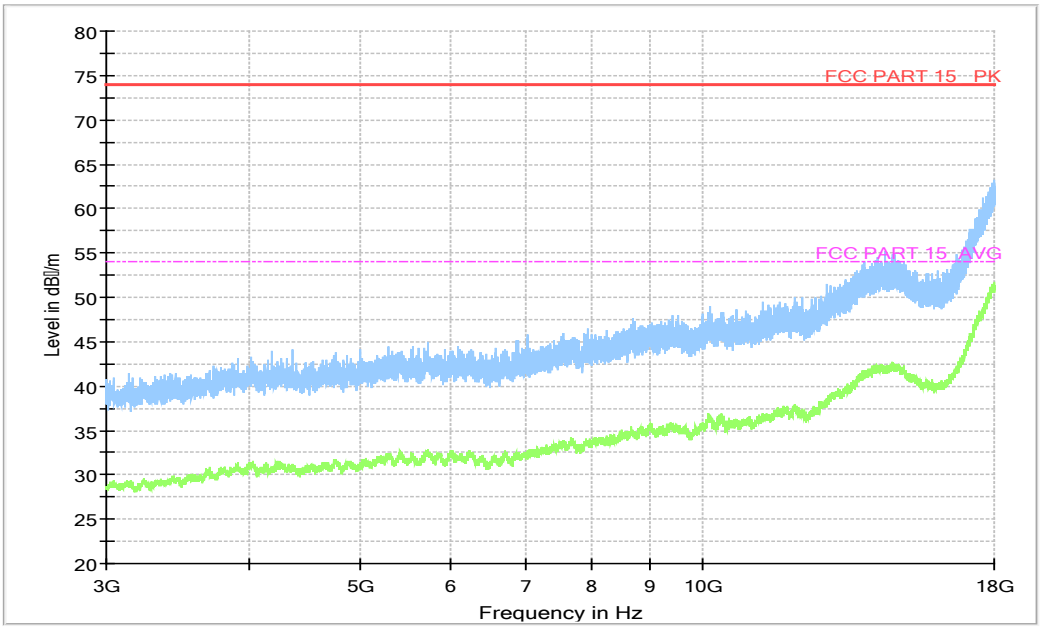

Fig.70. Radiated emission: π/4 DQPSK, Channel 0, 3 GHz - 18 GHz

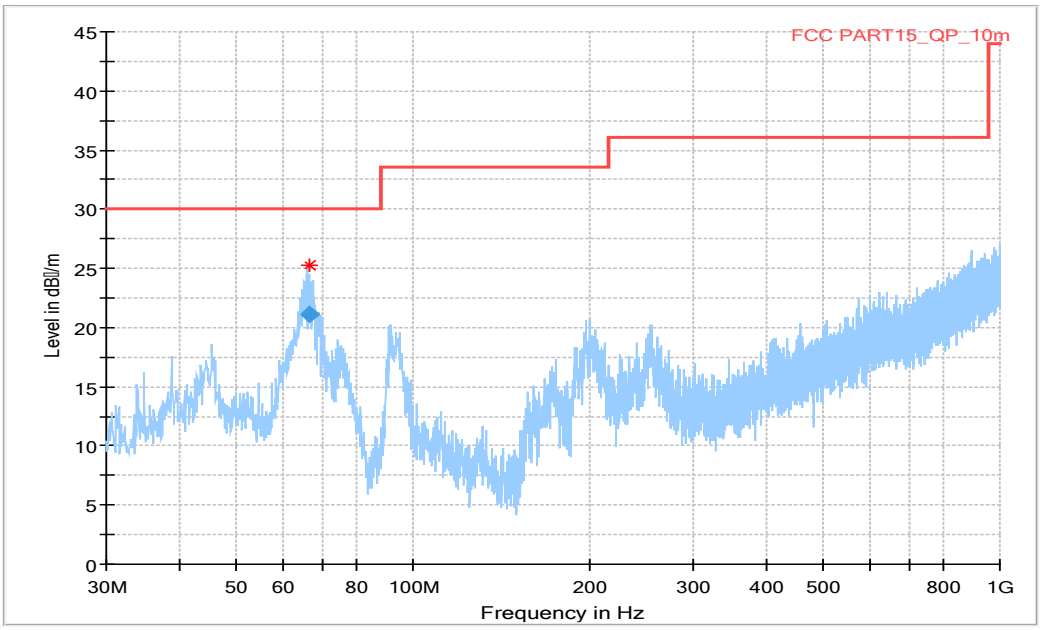

Fig.71. Radiated emission: π/4 DQPSK, Channel 39, 30 MHz - 1 GHz

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
66.490000	21.10	30.00	8.90	103.0	V	251.0

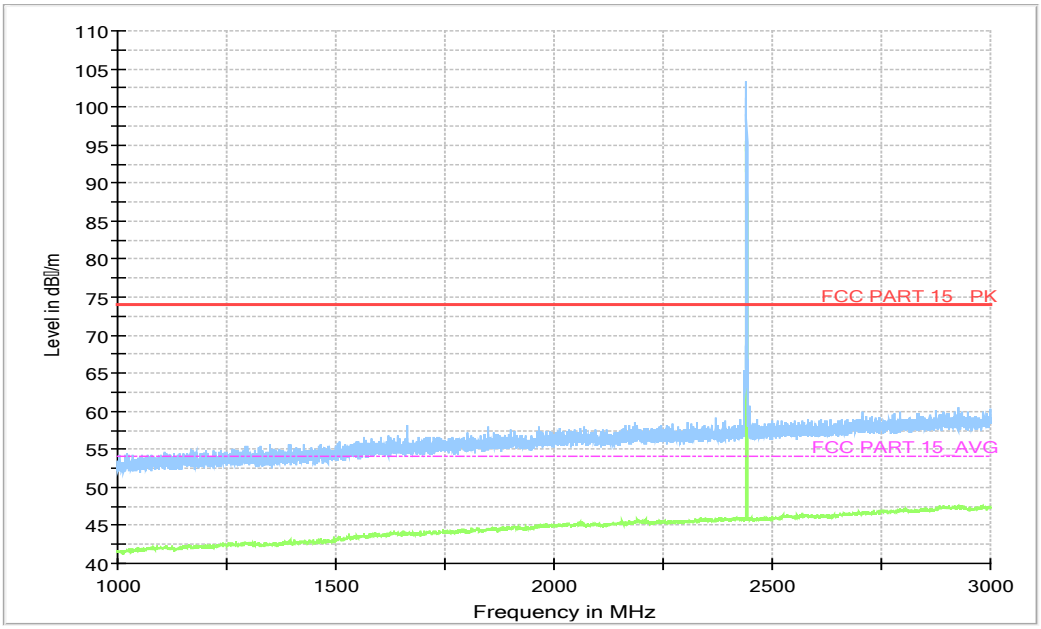

Fig.72. Radiated emission: π/4 DQPSK, Channel 39, 1 GHz - 3 GHz

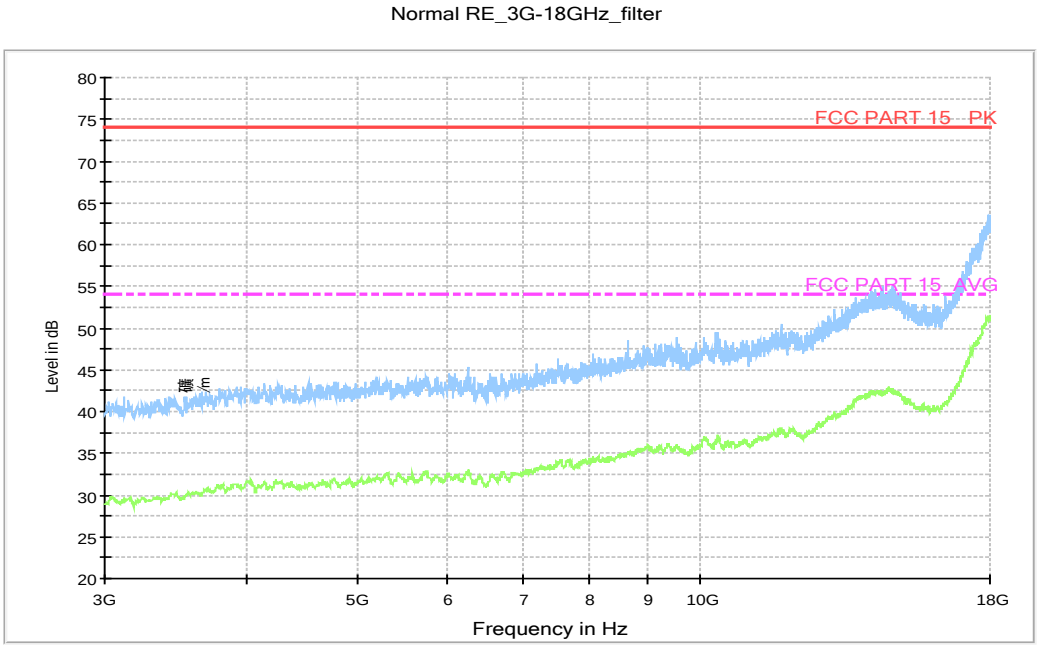

Fig.73. Radiated emission: π/4 DQPSK, Channel 39, 3 GHz - 18 GHz

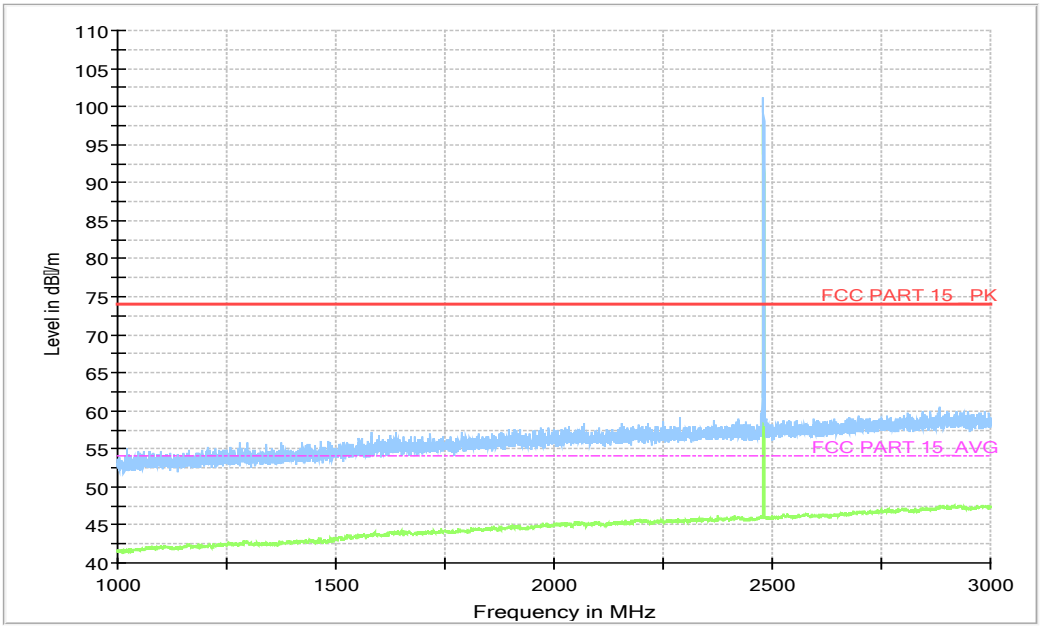

Fig.74. Radiated emission: π/4 DQPSK, Channel 78, 1 GHz - 3 GHz

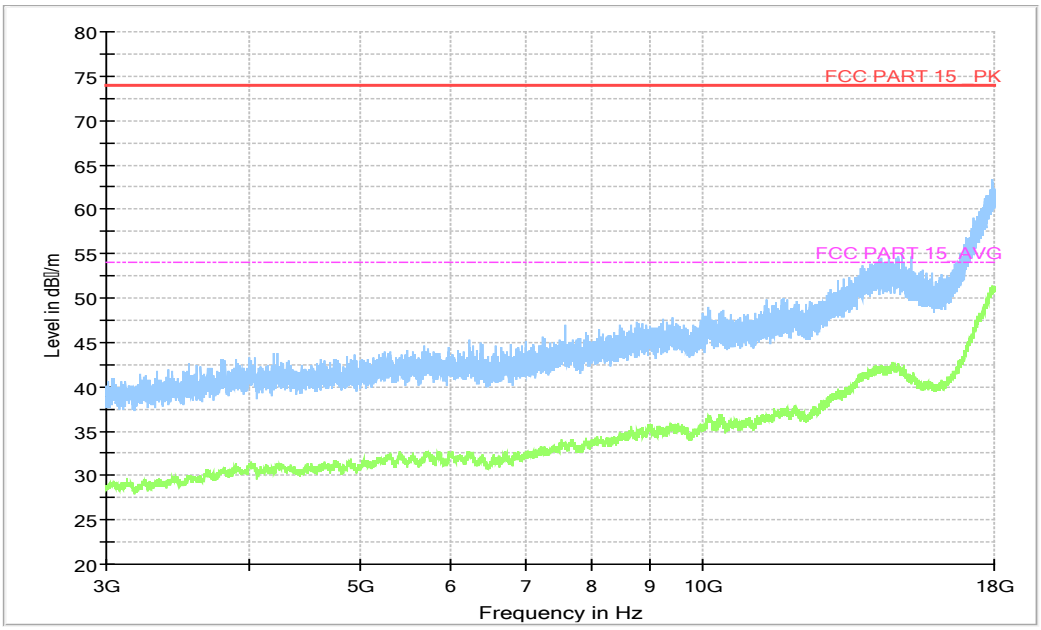

Fig.75. Radiated emission: π/4 DQPSK, Channel 78, 3 GHz - 18 GHz

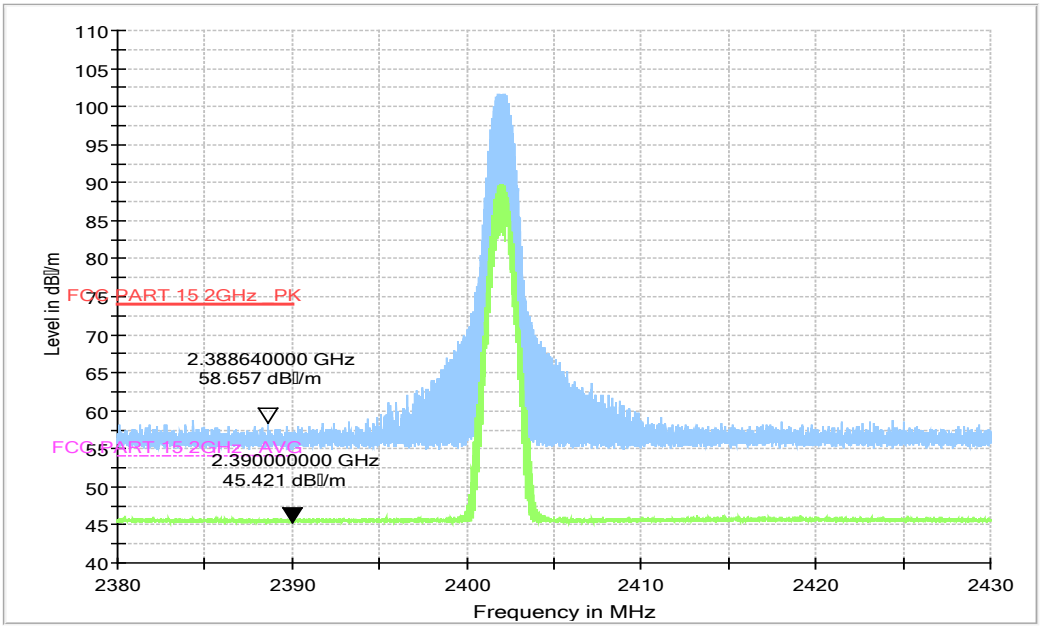

Fig.76. Radiated emission (Power): π/4 DQPSK, low channel

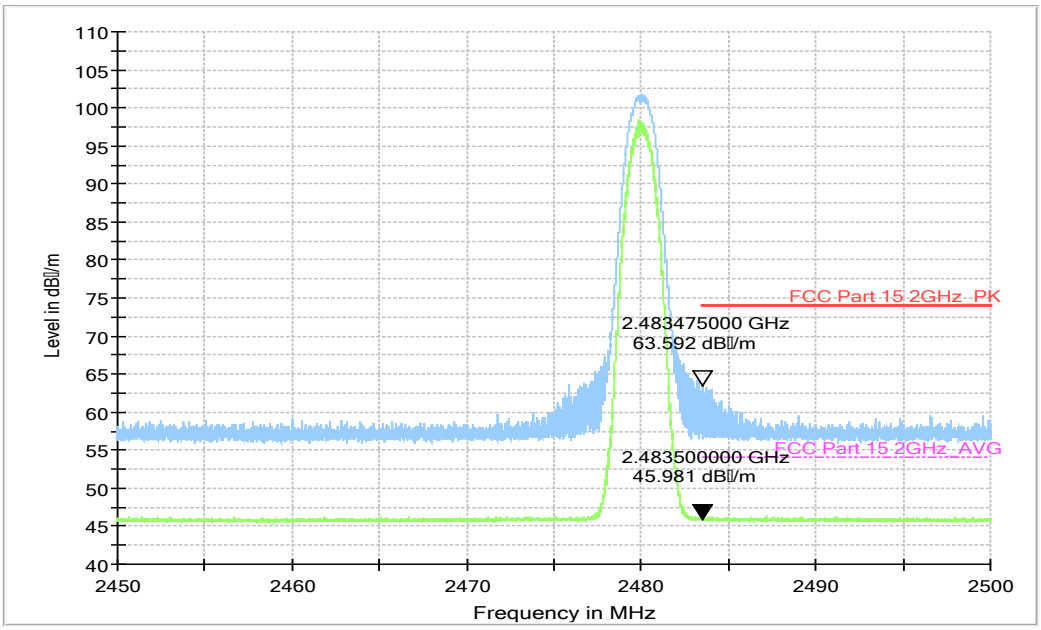

Fig.77. Radiated emission (Power): π/4 DQPSK, high channel

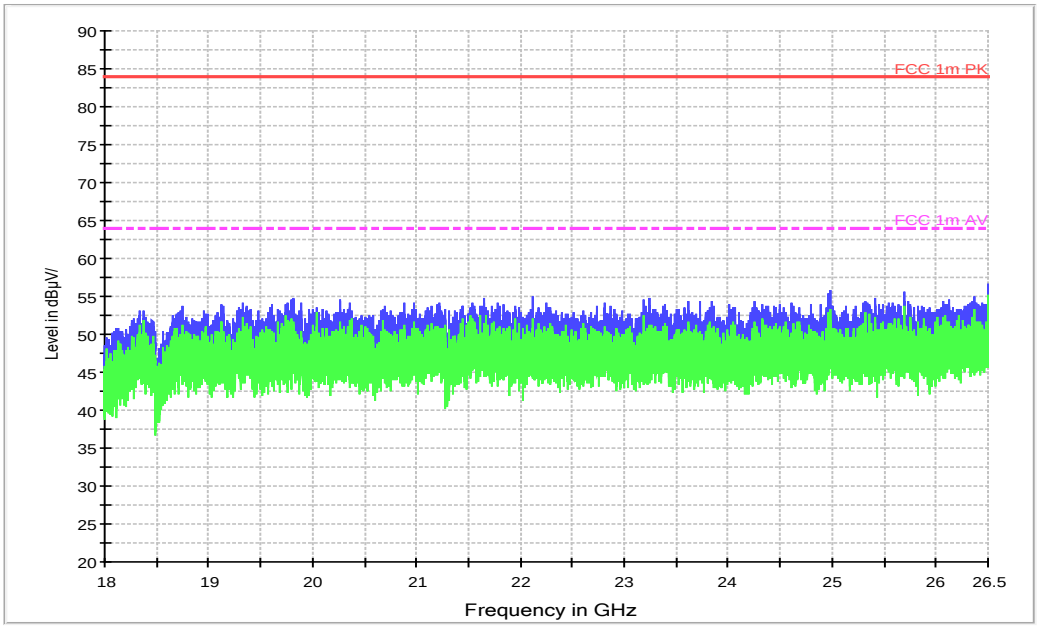

Fig.78. Radiated emission: π/4 DQPSK, 18 GHz - 26 GHz

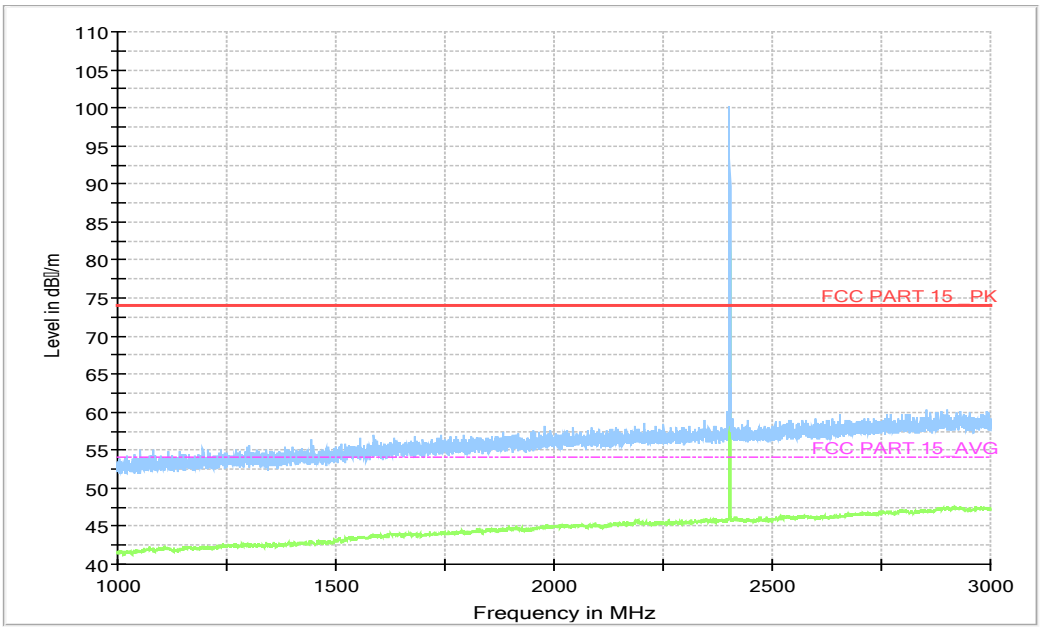

Fig.79. Radiated emission: 8DPSK, Channel 0, 1 GHz - 3 GHz

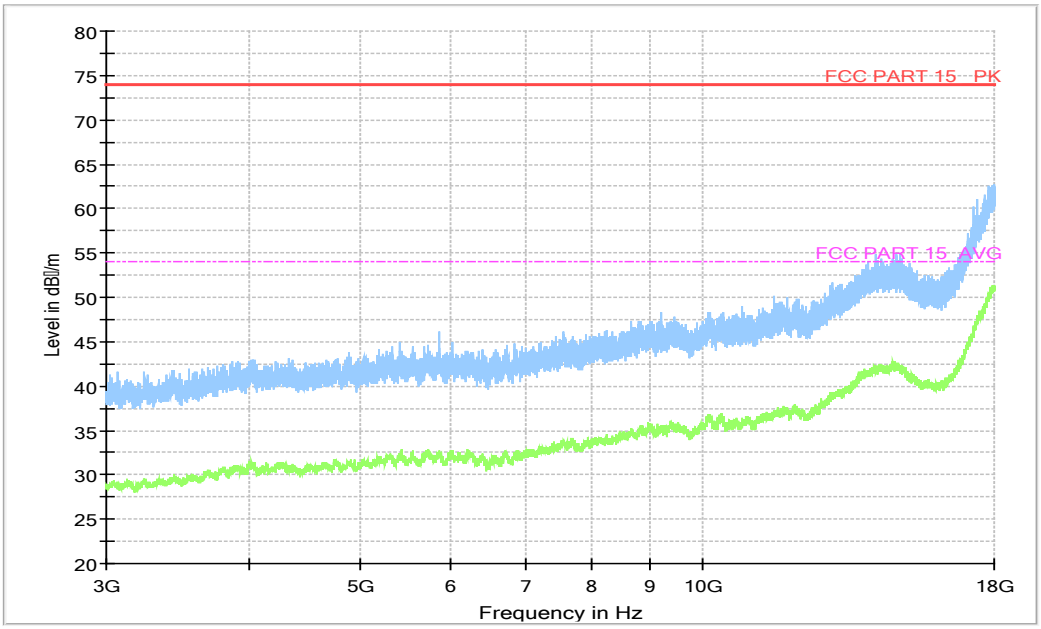

Fig.80. Radiated emission: 8DPSK, Channel 0, 3 GHz - 18 GHz

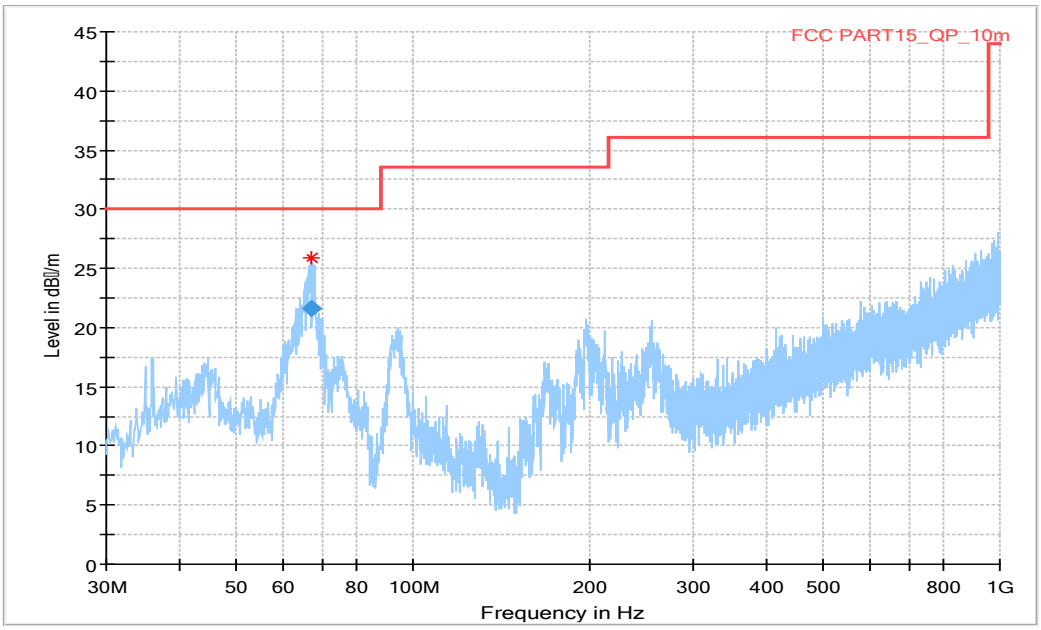

Fig.81. Radiated emission: 8DPSK, Channel 39, 30 MHz - 1 GHz

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
67.017000	21.60	30.00	8.40	1000.0	324.0	V

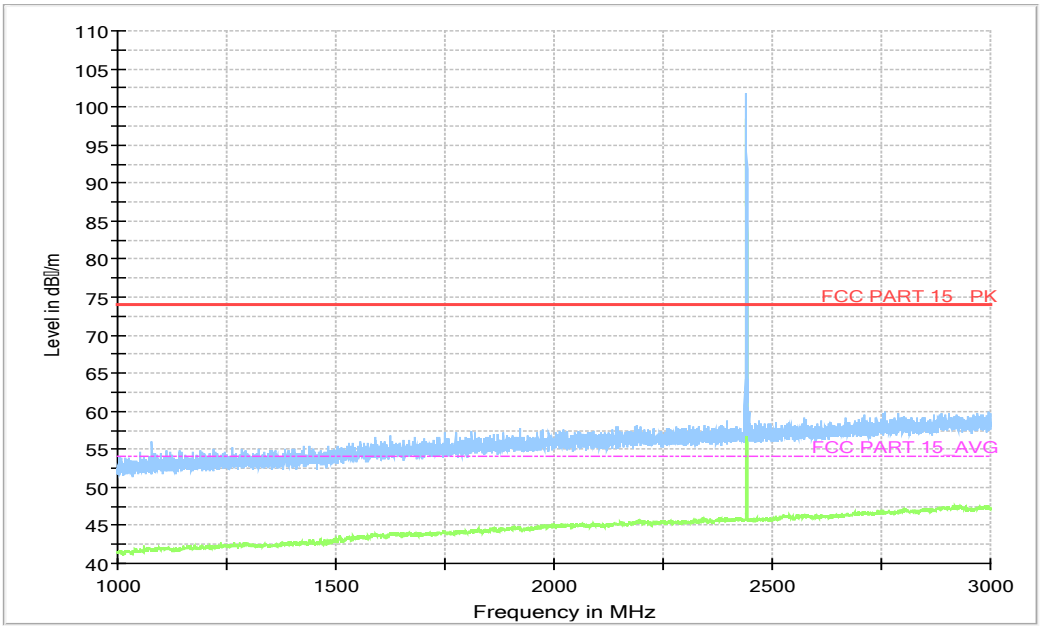

Fig.82. Radiated emission: 8DPSK, Channel 39, 1 GHz - 3 GHz

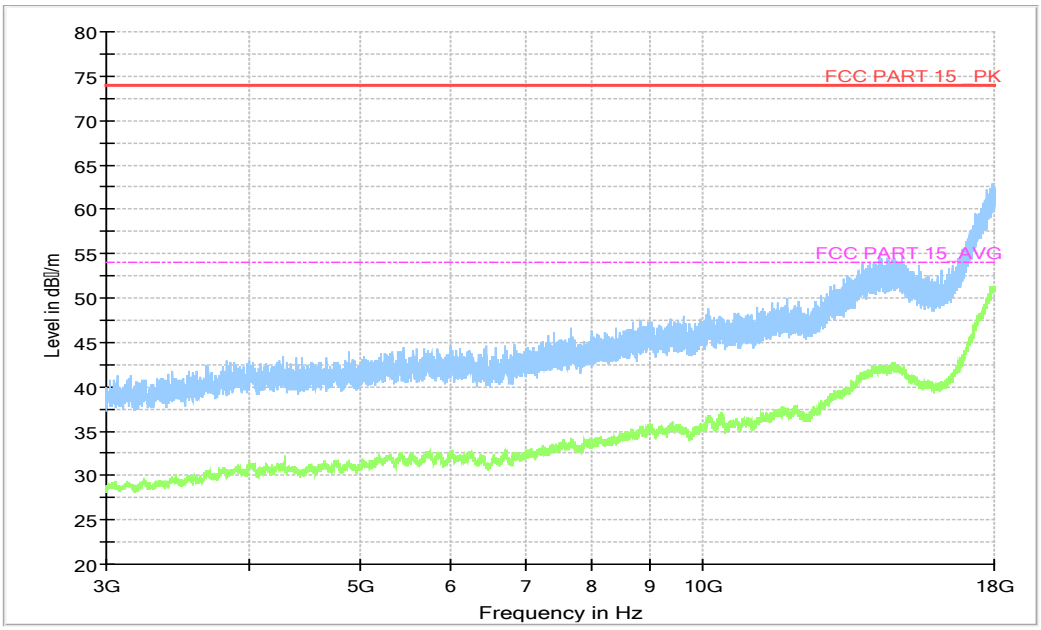

Fig.83. Radiated emission: 8DPSK, Channel 39, 3 GHz - 18 GHz

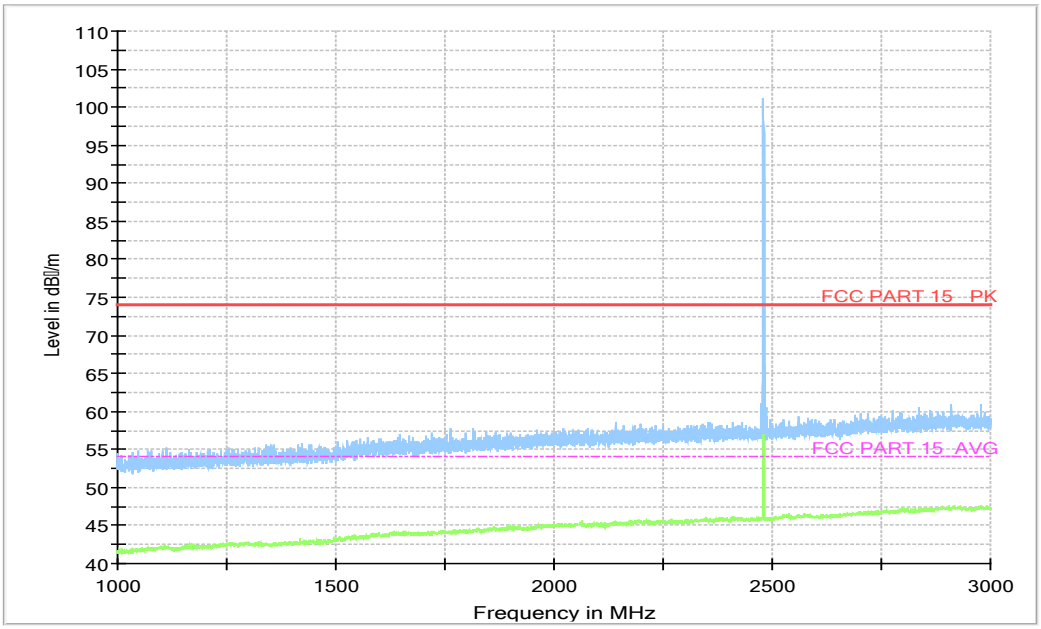

Fig.84. Radiated emission: 8DPSK, Channel 78, 1 GHz - 3 GHz

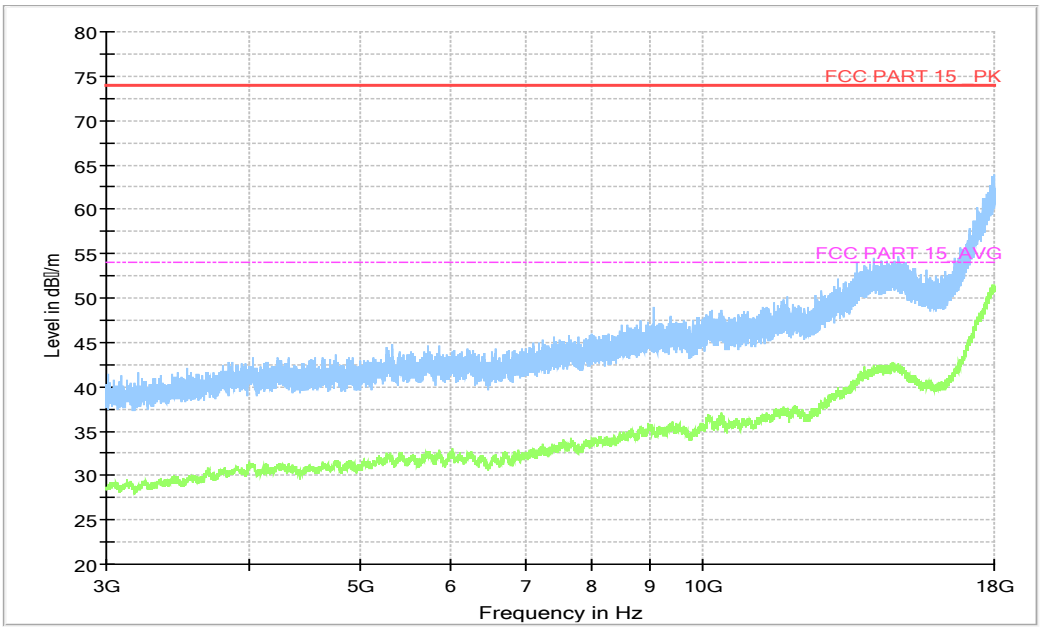

Fig.85. Radiated emission: 8DPSK, Channel 78, 3 GHz - 18 GHz

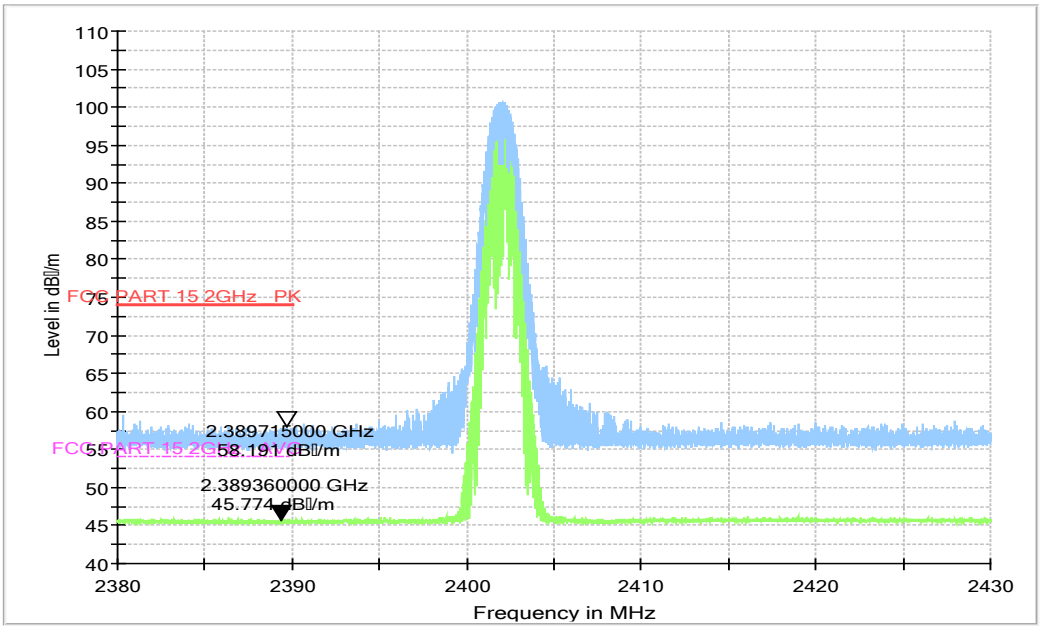

Fig.86. Radiated emission (Power): 8DPSK, low channel

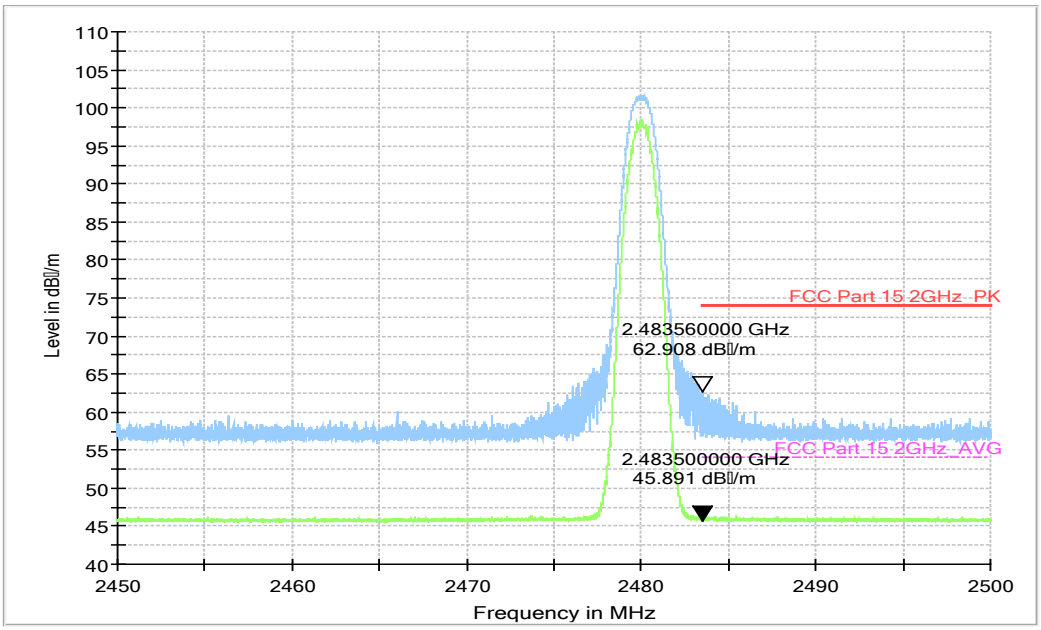

Fig.87. Radiated emission (Power): 8DPSK, high channel

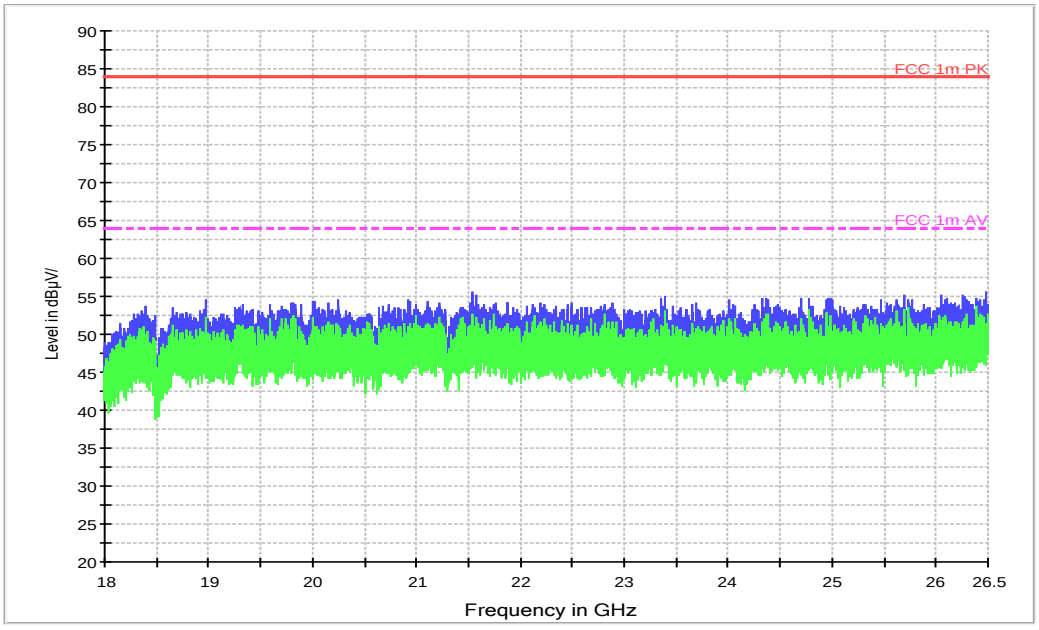

Fig.88. Radiated emission: 8DPSK, 18 GHz - 26 GHz

A.6. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW ≥ RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.89	107.76	P
		Fig.90		
	DH3	Fig.91	165.58	P
		Fig.92		
	DH5	Fig.93	165.19	P
		Fig.94		

For π/4 DQPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.95	107.00	P
		Fig.96		
	DH3	Fig.97	178.20	P
		Fig.98		
	DH5	Fig.99	209.04	P
		Fig.100		

For 8DPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.101	109.28	P
		Fig.102		
	DH3	Fig.103	184.21	P

		Fig.104		
	DH5	Fig.105	194.53	P
		Fig.106		

Conclusion: PASS

Test graphs as below:

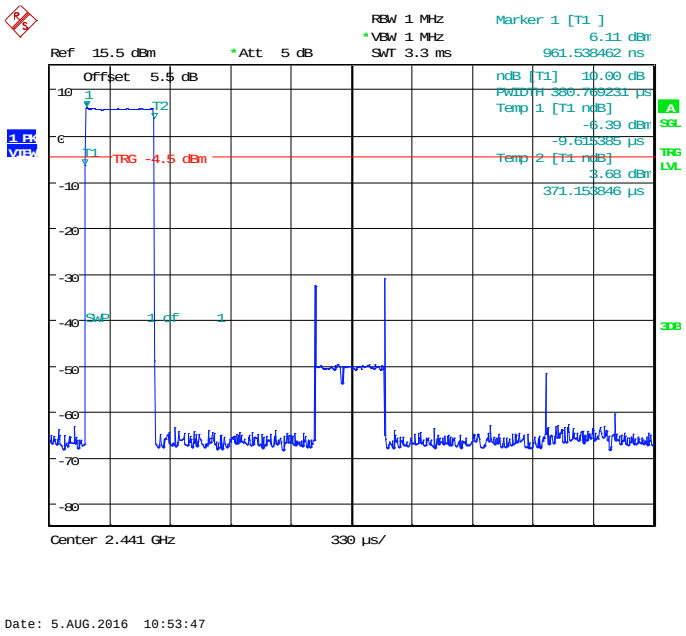

Fig.89. Time of occupancy (Dwell Time): Channel 39, Packet DH1

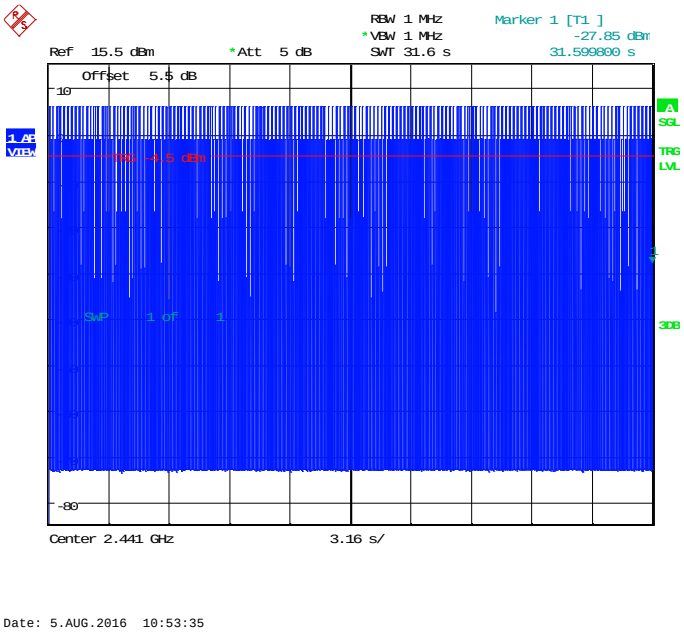

Fig.90. Number of Transmissions Measurement:Channel 39,Packet DH1

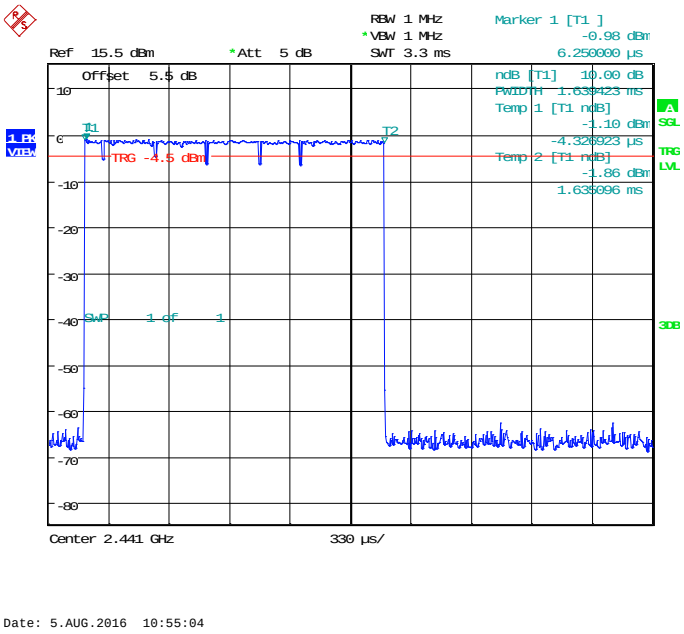

Fig.91. Time of occupancy (Dwell Time): Channel 39, Packet DH3

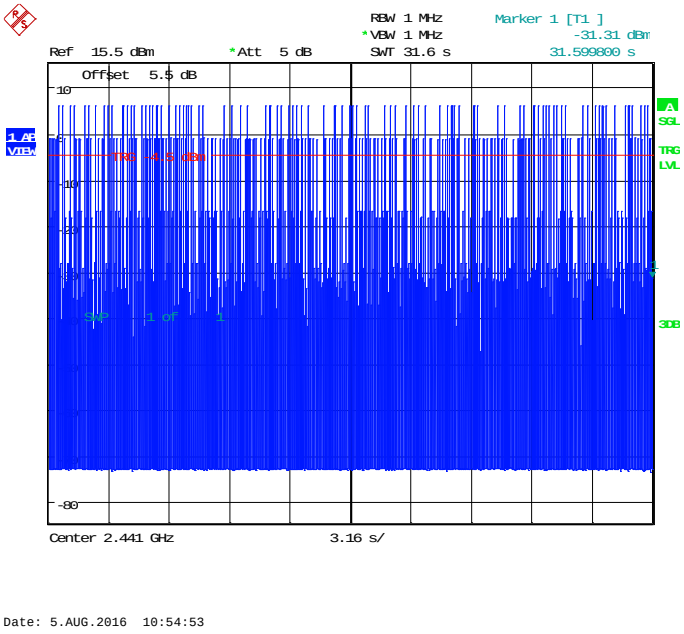

Fig.92. Number of Transmissions Measurement:Channel 39,Packet DH3

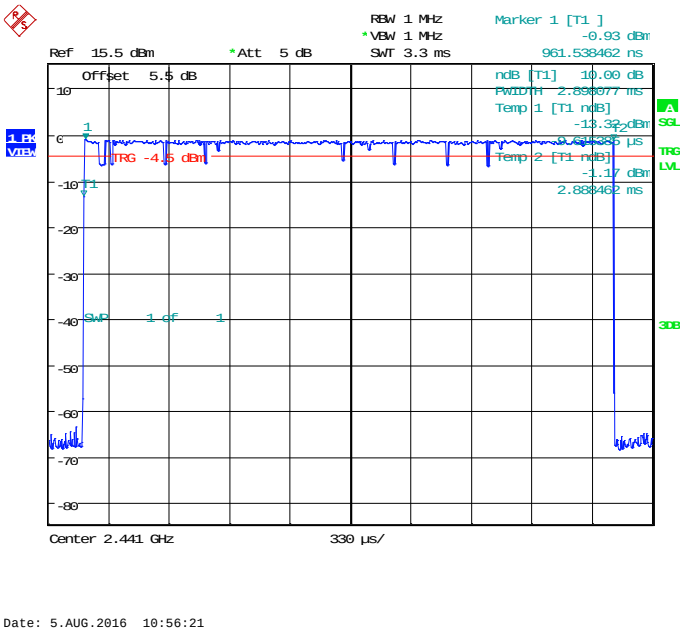

Fig.93. Time of occupancy (Dwell Time): Channel 39, Packet DH5

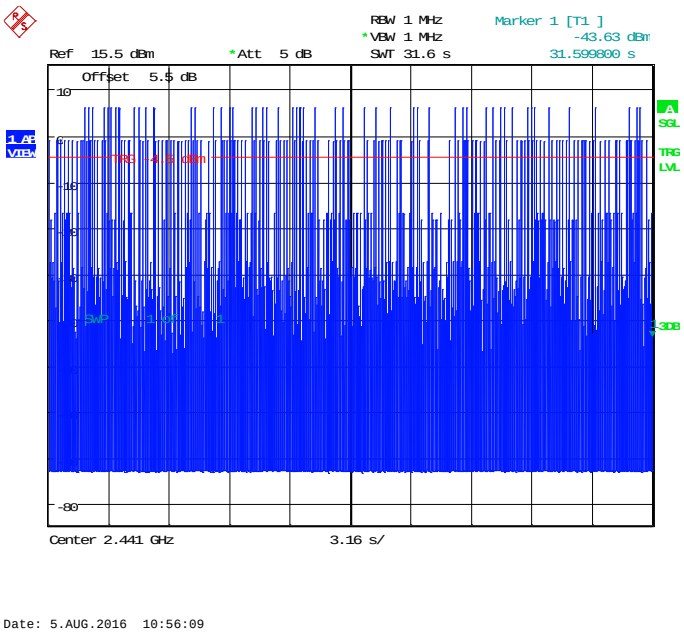

Fig.94. Number of Transmissions Measurement:Channel 39,Packet DH5

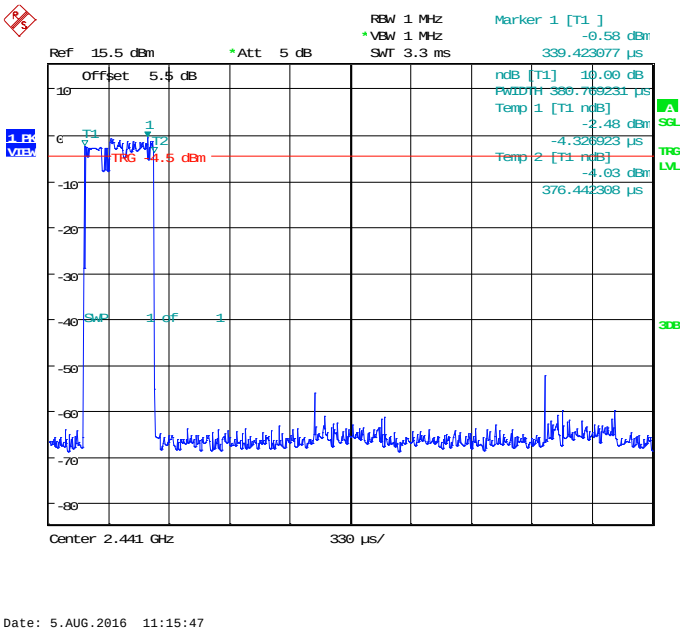

Fig.95. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

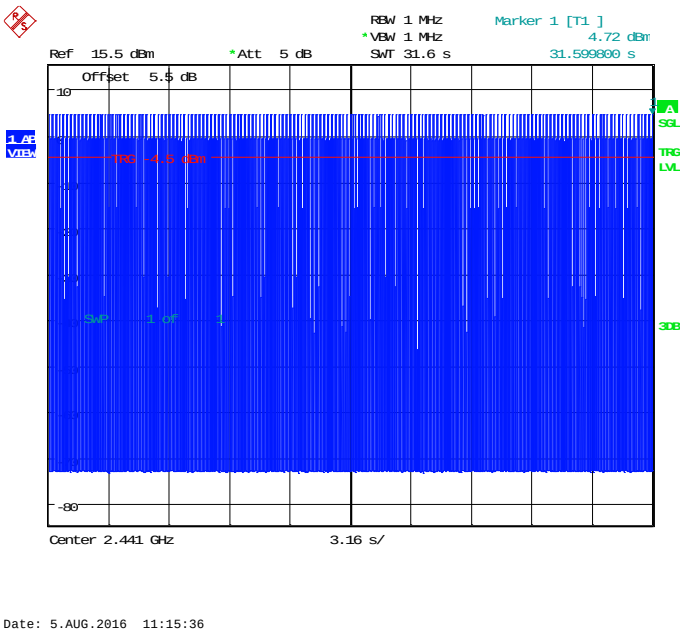

Fig.96. Number of Transmissions Measurement:Channel 39,Packet 2-DH1

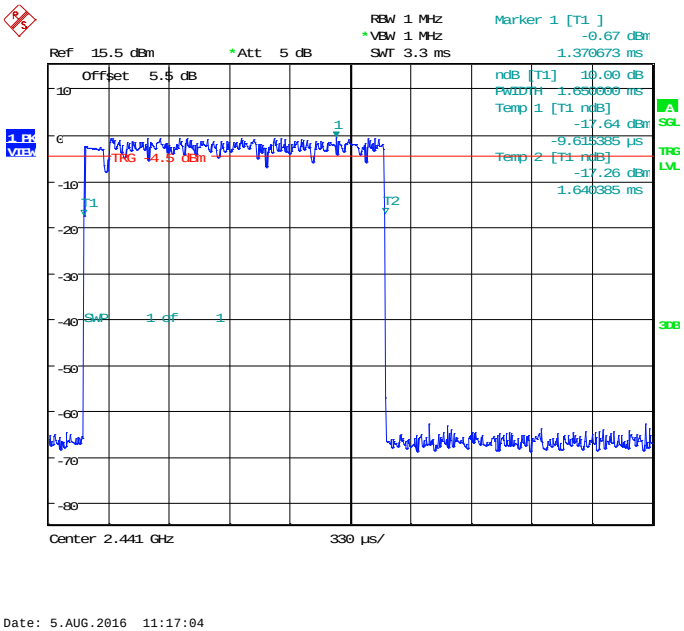

Fig.97. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

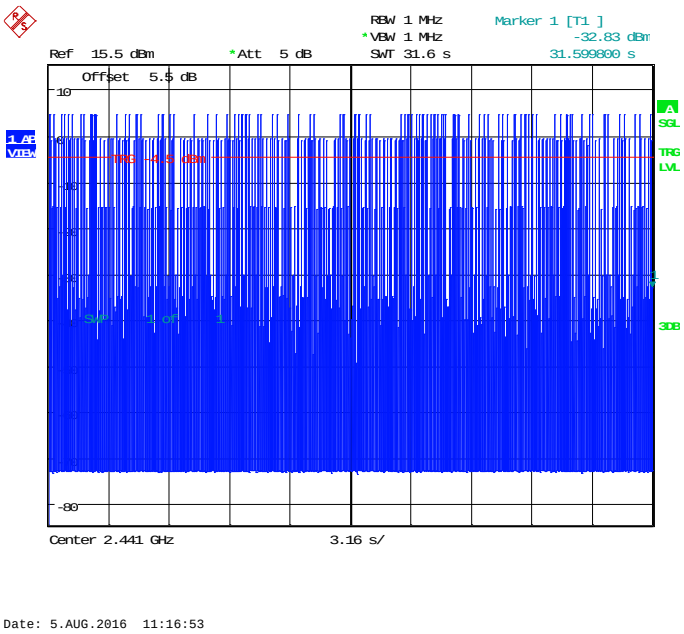

Fig.98. Number of Transmissions Measurement:Channel 39,Packet 2-DH3

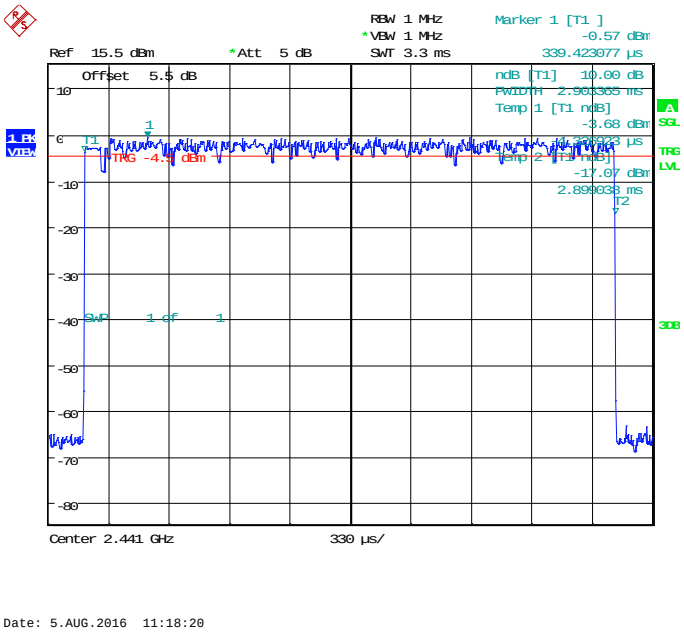

Fig.99. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

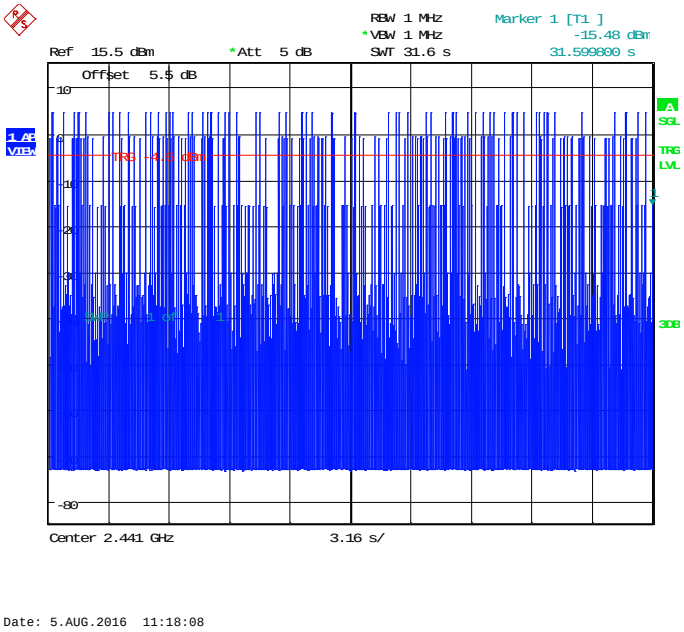

Fig.100. Number of Transmissions Measurement:Channel 39,Packet 2-DH5

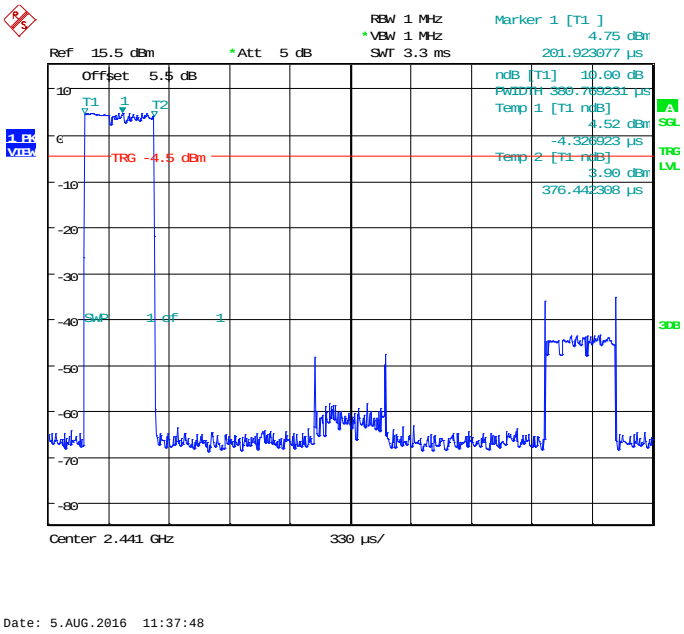

Fig.101. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

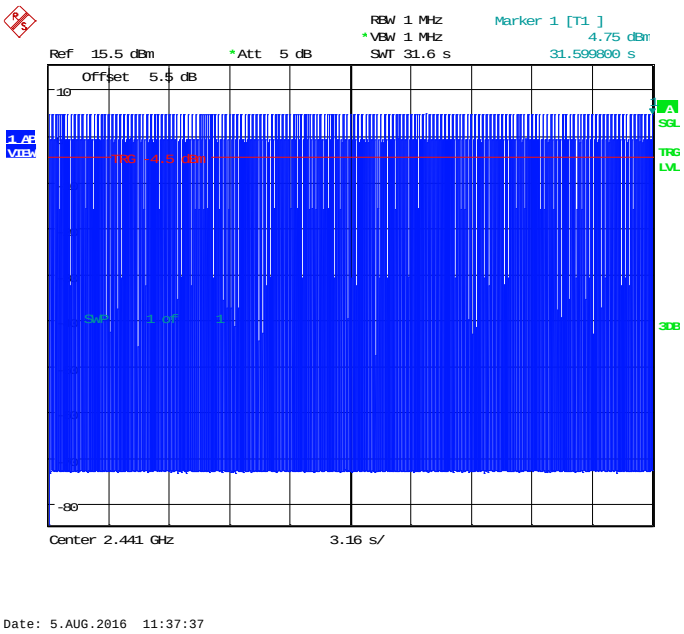

Fig.102. Number of Transmissions Measurement:Channel 39,Packet 3-DH1

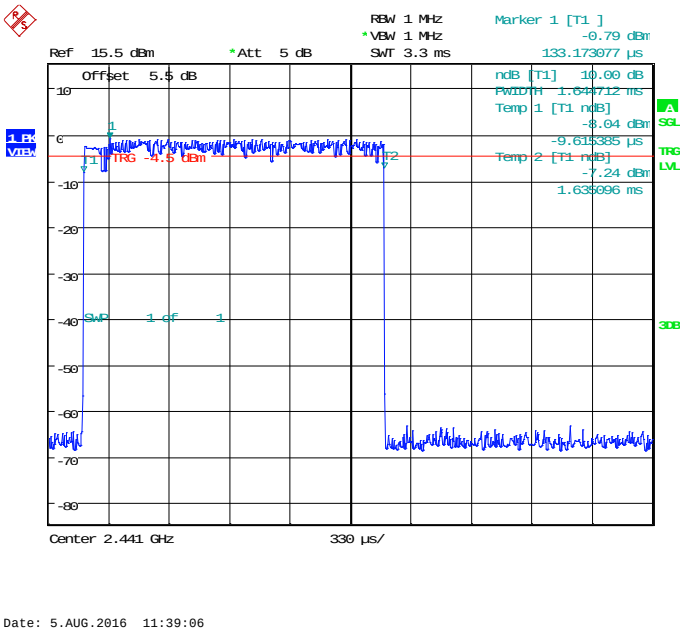

Fig.103. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

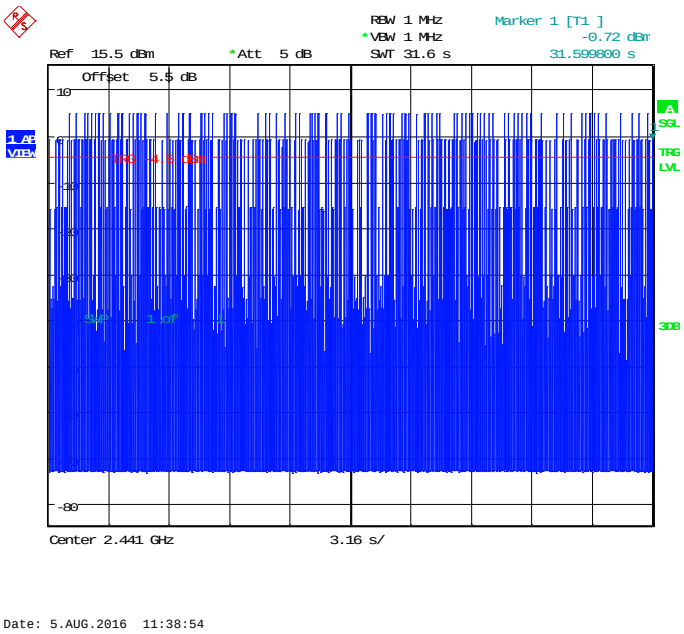

Fig.104. Number of Transmissions Measurement:Channel 39,Packet 3-DH3

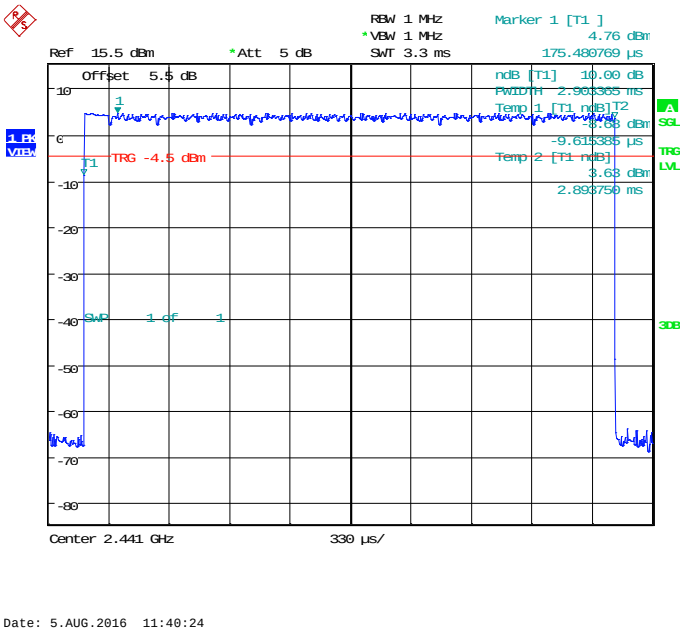

Fig.105. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

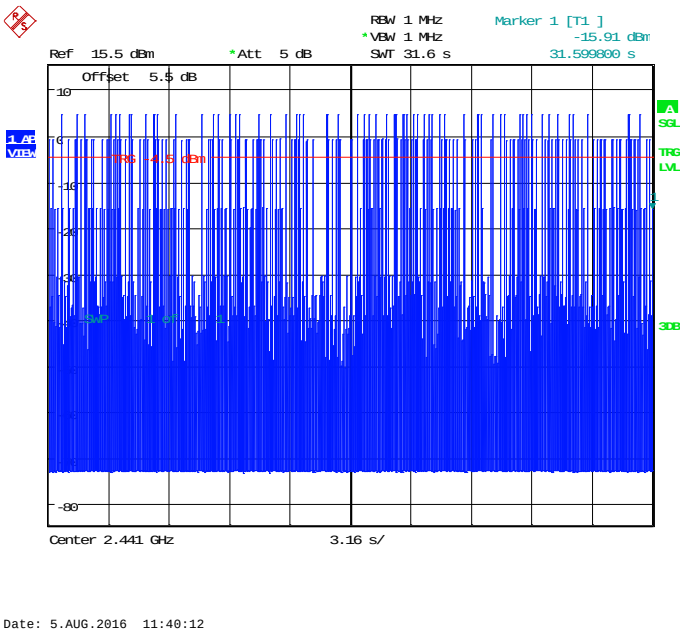

Fig.106. Number of Transmissions Measurement:Channel 39,Packet 3-DH5

A.7. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 20kHz.

2. Set VBW = 100 kHz.

3. Set span to 3MHz

4. Detector = peak.

5. Trace Mode = max hold.

6. Sweep = auto couple.

7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.107	875.00	NA
39	Fig.108	908.65	NA
78	Fig.109	875.00	NA

Forπ/4 DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.110	1274.04	NA
39	Fig.111	1259.62	NA
78	Fig.112	1264.42	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.113	1216.35	NA
39	Fig.114	1274.04	NA
78	Fig.115	1259.62	NA

Conclusion: NA

Test graphs as below:

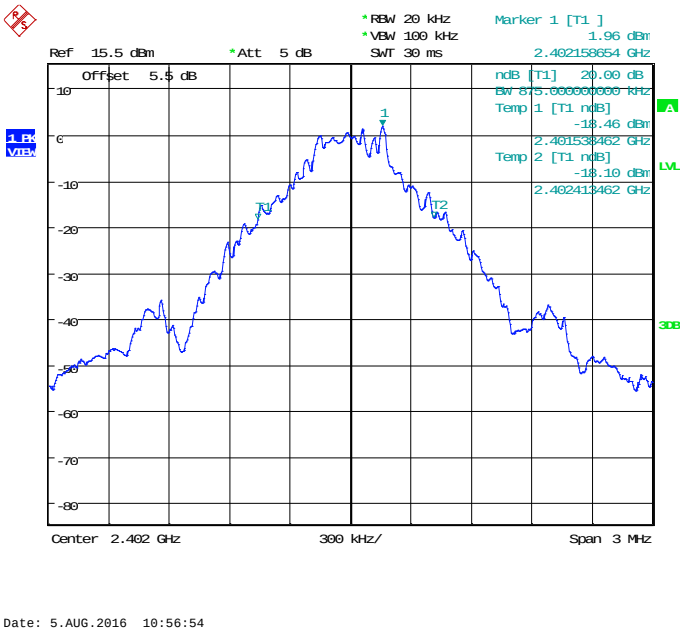

Fig.107. 20dB Bandwidth: GFSK, Channel 0

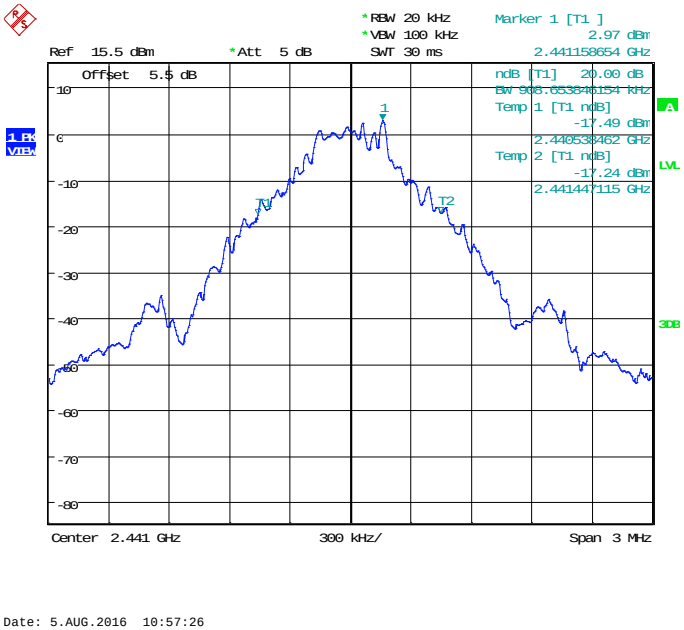

Fig.108. 20dB Bandwidth: GFSK, Channel 39

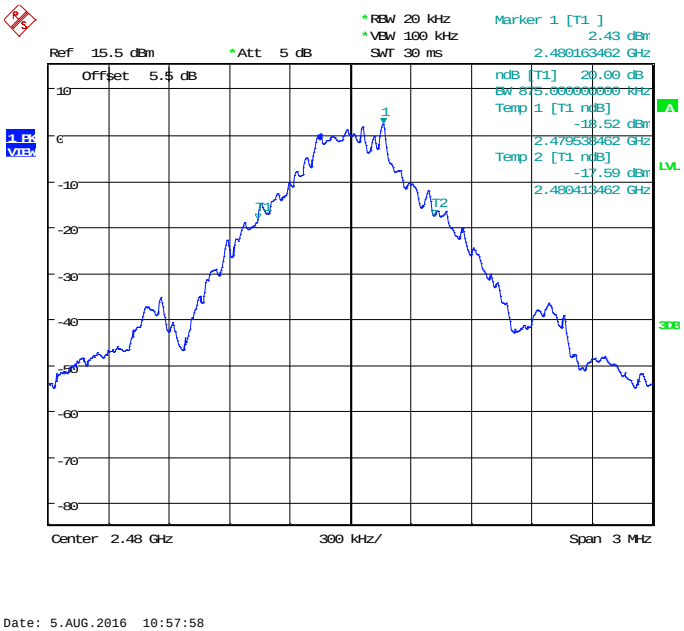

Fig.109. 20dB Bandwidth: GFSK, Channel 78

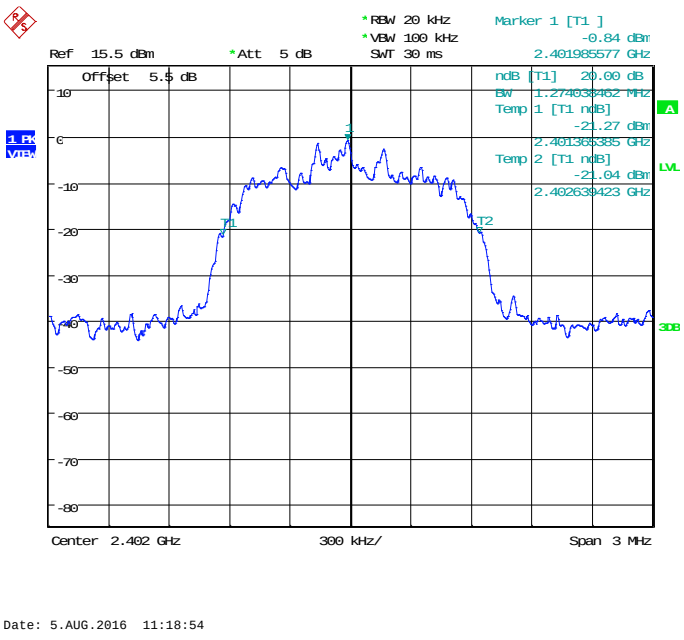

Fig.110. 20dB Bandwidth: π/4 DQPSK, Channel 0

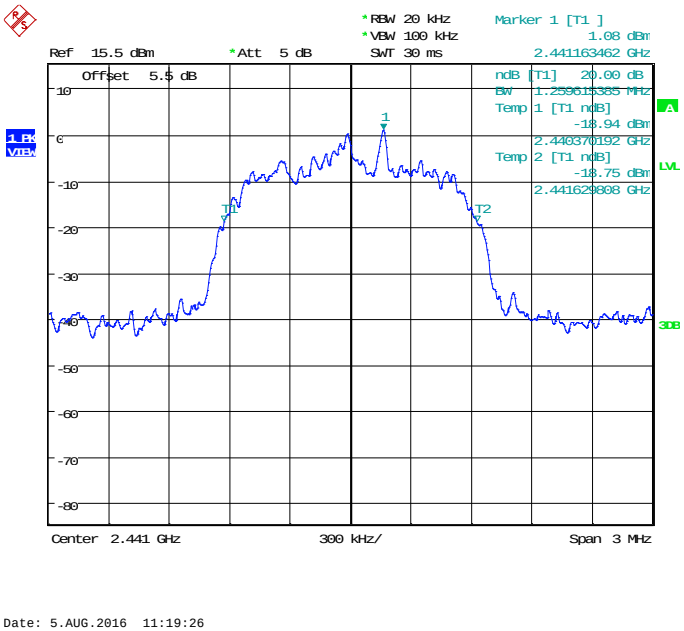

Fig.111. 20dB Bandwidth: π/4 DQPSK, Channel 39

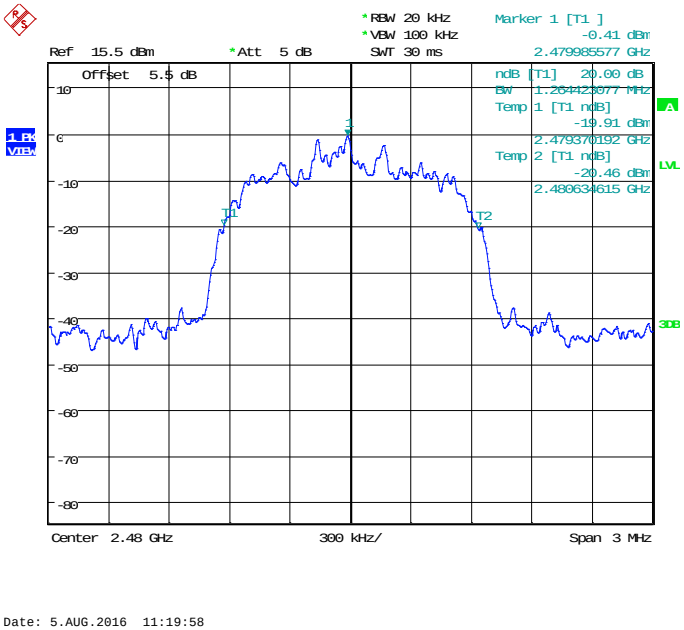

Fig.112. 20dB Bandwidth: π/4 DQPSK, Channel 78

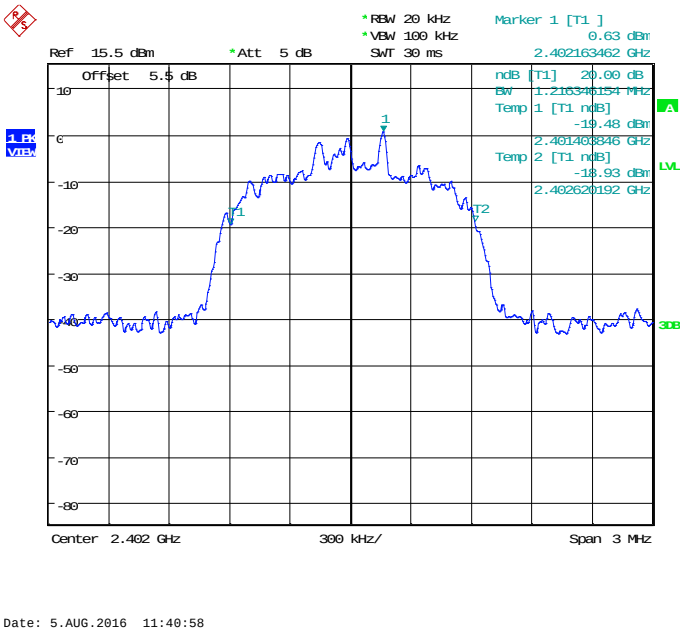

Fig.113. 20dB Bandwidth: 8DPSK, Channel 0

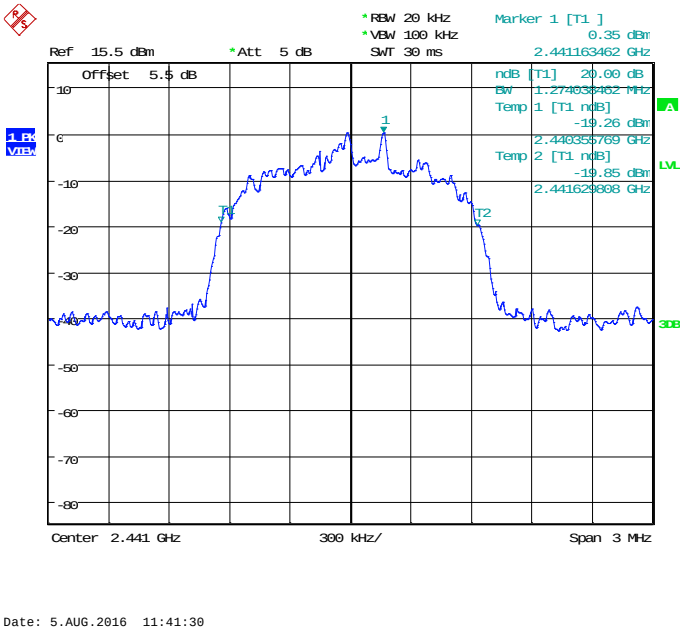

Fig.114. 20dB Bandwidth: 8DPSK, Channel 39

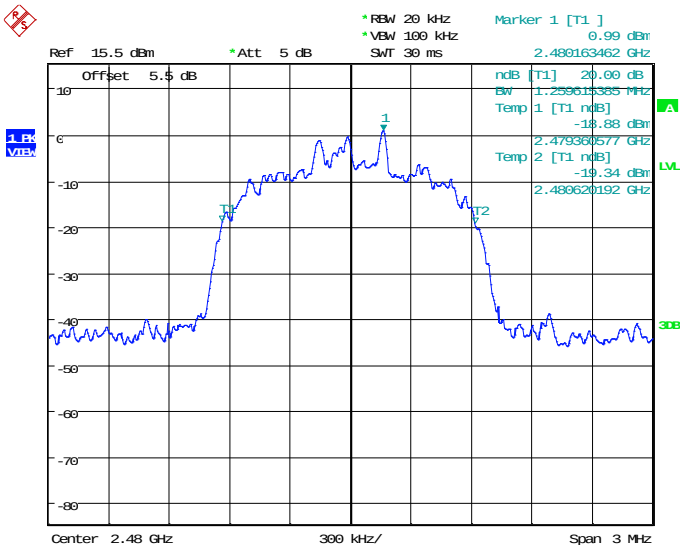

Fig.115. 20dB Bandwidth: 8DPSK, Channel 78

A.8. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=1MHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or (2/3) * 20dB bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or (2/3) * 20dB bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.116	1302.88	P

For π/4 DQPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.117	990.38	P

For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.118	1000.00	P

Conclusion: PASS

Test graphs as below:

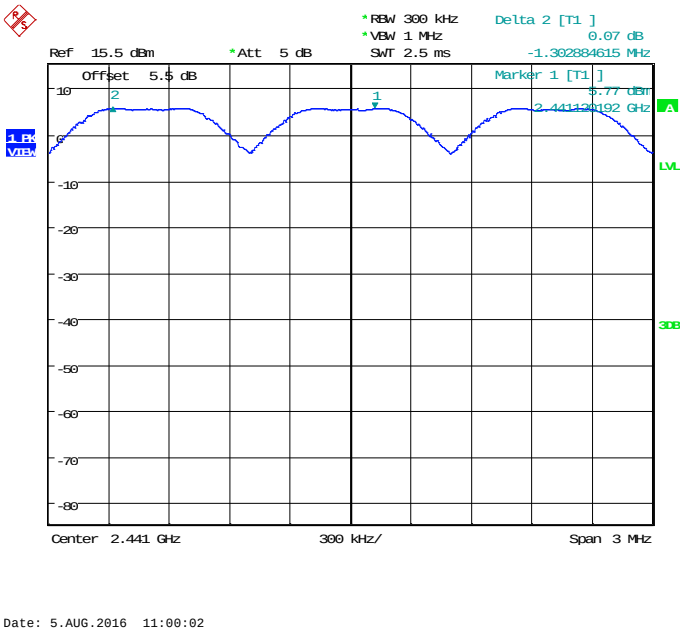

Fig.116. Carrier frequency separation measurement: GFSK, Channel 39

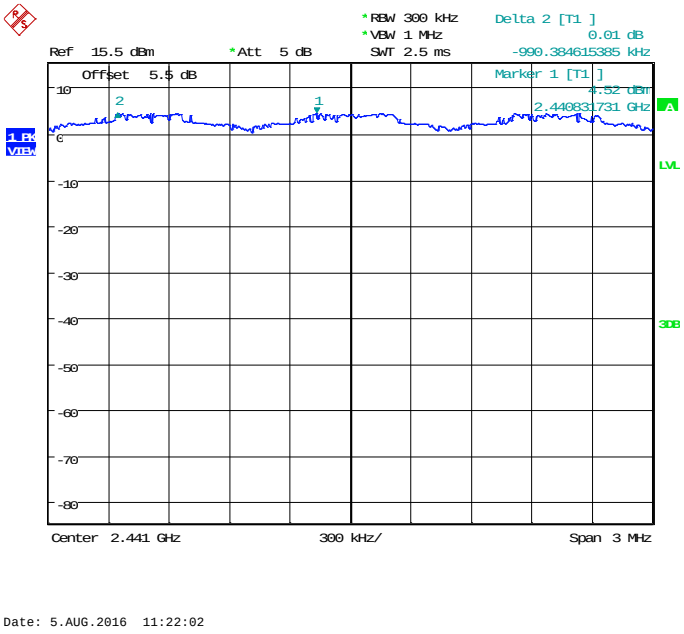

Fig.117. Carrier frequency separation measurement: π/4 DQPSK, Channel 39

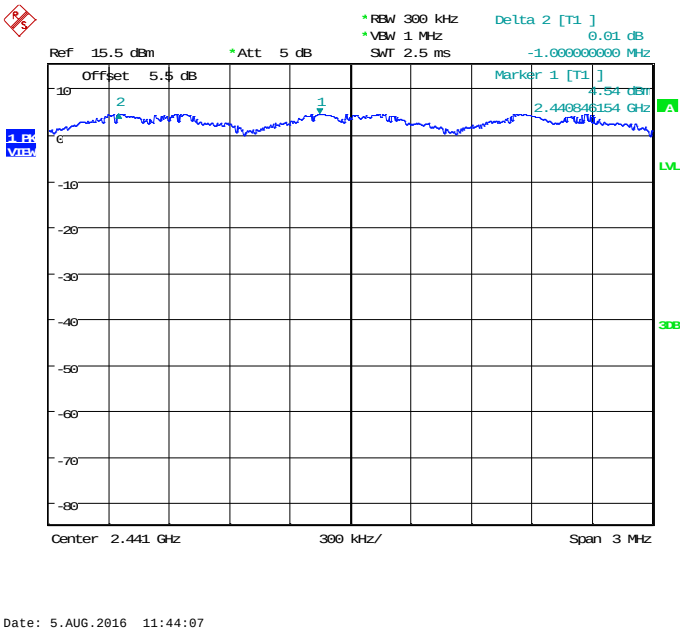

Fig.118. Carrier frequency separation measurement: 8DPSK, Channel 39

A.9. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.119	79	P
40~78	Fig.120		

Forπ/4 DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.121	79	P
40~78	Fig.122		

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.123	79	P
40~78	Fig.124		

Conclusion: PASS

Test graphs as below:

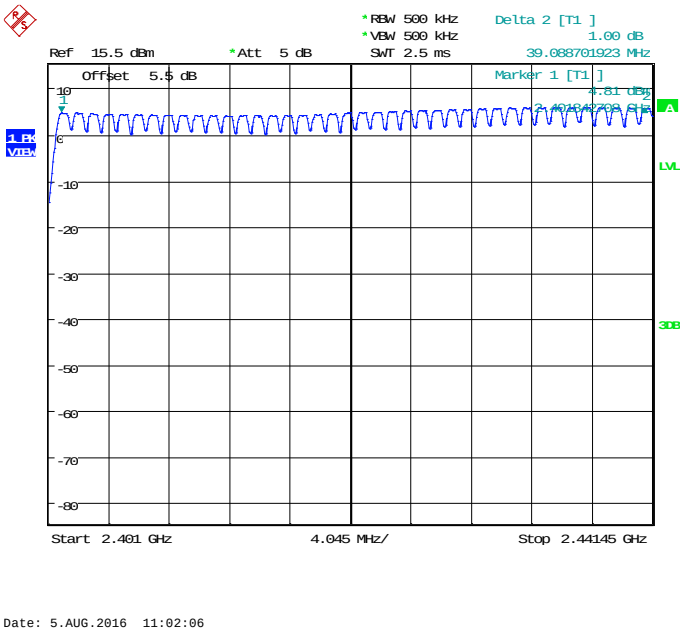

Fig.119. Number of hopping frequencies: GFSK, Channel 0 - 39

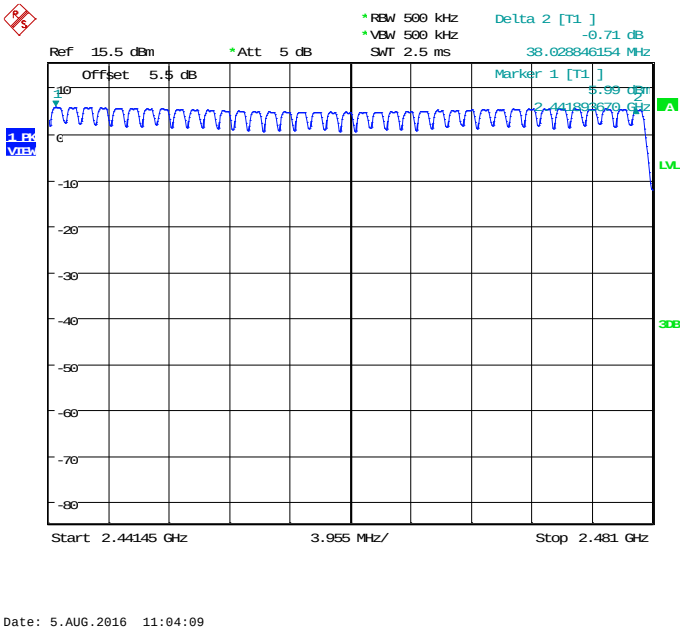

Fig.120. Number of hopping frequencies: GFSK, Channel 40 - 78

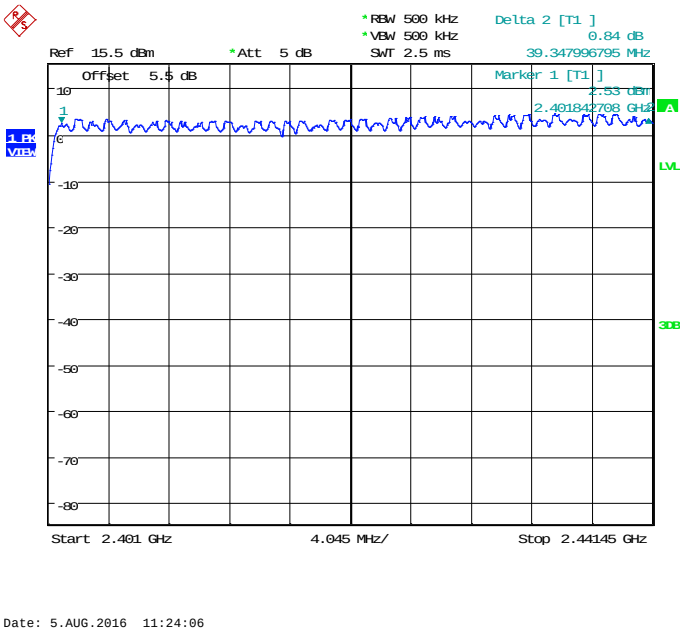

Fig.121. Number of hopping frequencies: π/4 DQPSK, Channel 0 - 39

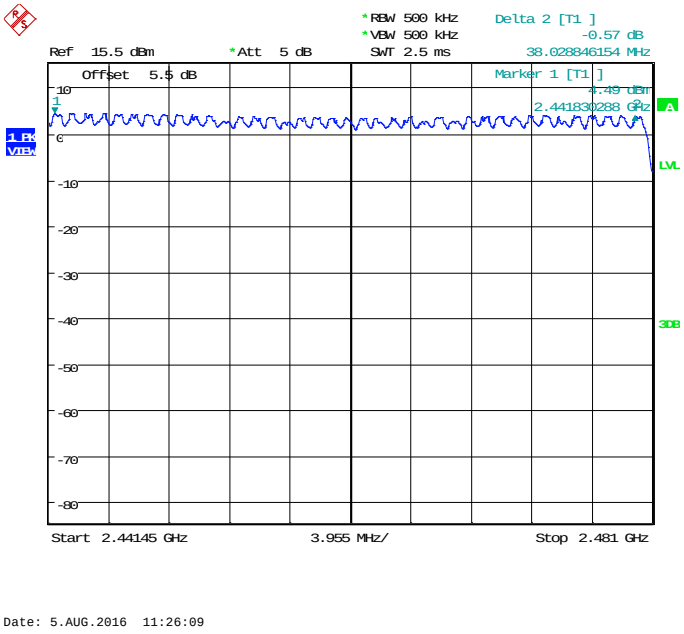

Fig.122. Number of hopping frequencies: π/4 DQPSK, Channel 40 - 78

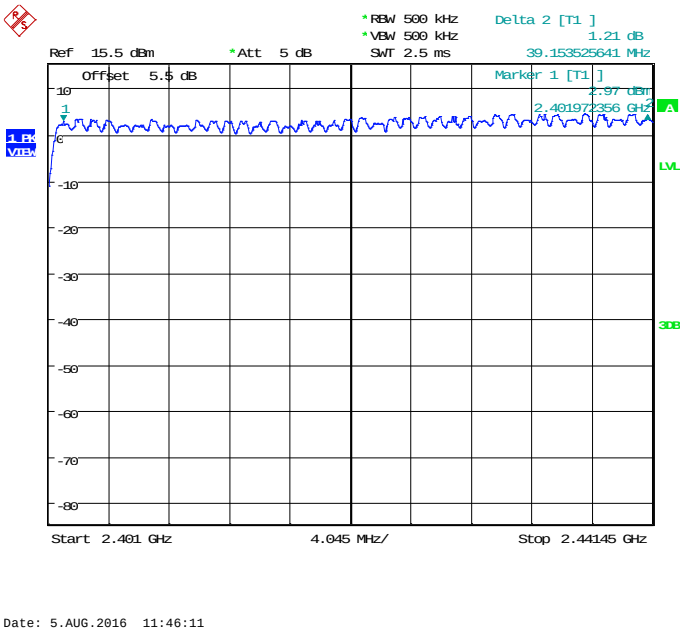

Fig.123. Number of hopping frequencies: 8DPSK, Channel 0 - 39

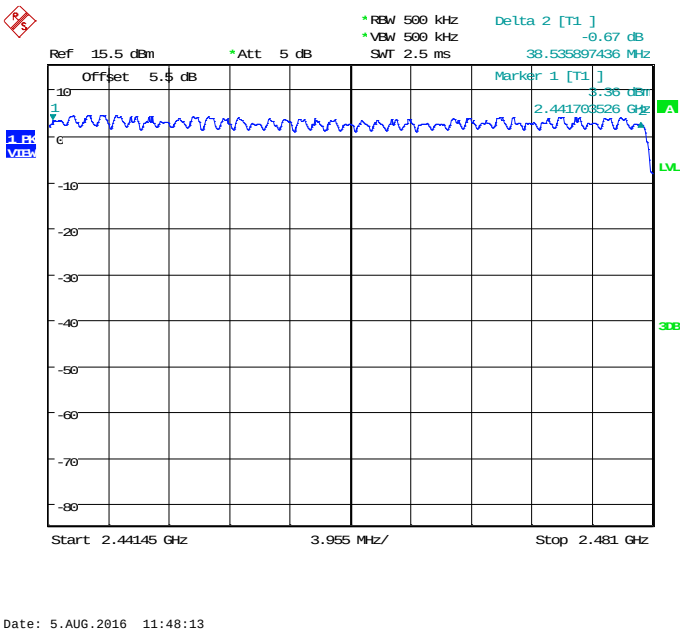

Fig.124. Number of hopping frequencies: 8DPSK, Channel 40 - 78

A.10. AC Powerline Conducted Emission

Test Condition

Voltage（V）	Frequency（Hz）
120	60

Measurement Result and limit:

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

The measurement is made according to ANSI C63.10

Conclusion: PASS

Test graphs as below:

Traffic (CBA0059AGAC4):

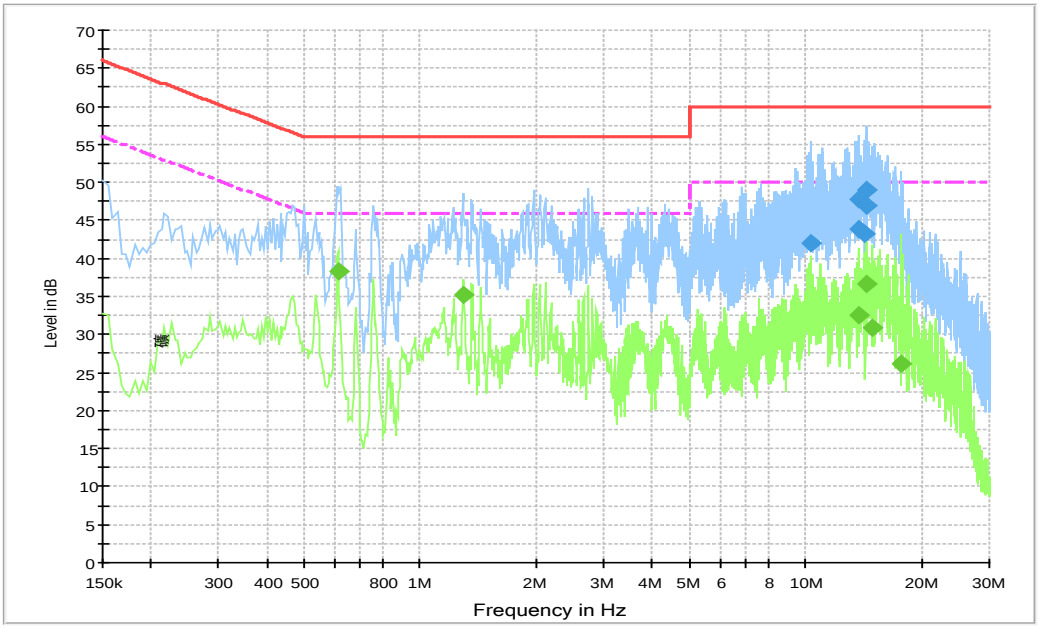

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
10.284001	42.1	GND	L1	10.7	17.9	60.0
13.744501	47.9	GND	L1	10.9	12.1	60.0
13.762501	43.9	GND	L1	10.9	16.1	60.0
14.226001	43.3	GND	L1	10.9	16.7	60.0
14.356501	46.9	GND	L1	10.9	13.1	60.0
14.424001	49.1	GND	L1	10.9	10.9	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.613501	38.2	GND	L1	10.3	7.8	46.0
1.293001	35.2	GND	L1	10.3	10.8	46.0
13.762501	32.6	GND	L1	10.9	17.4	50.0
14.424001	36.7	GND	L1	10.9	13.3	50.0
14.973001	30.9	GND	L1	11.0	19.1	50.0
17.767501	26.2	GND	L1	11.1	23.8	50.0

Idle (CBA0059AGAC4):

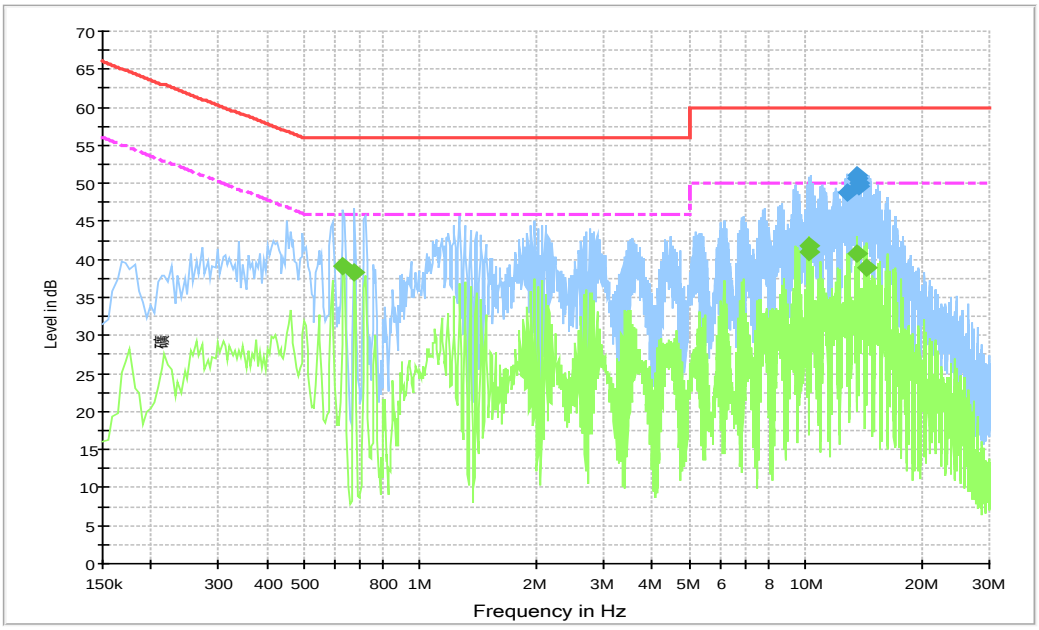

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
12.844501	48.7	GND	L1	10.9	11.3	60.0
13.564501	50.6	GND	L1	10.9	9.4	60.0
13.609501	51.0	GND	L1	10.9	9.0	60.0
13.654501	50.6	GND	L1	10.9	9.4	60.0
13.695001	50.1	GND	L1	10.9	9.9	60.0
13.740001	49.6	GND	L1	10.9	10.4	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.631501	39.1	GND	L1	10.3	6.9	46.0
0.676501	38.4	GND	L1	10.3	7.6	46.0
10.185001	41.1	GND	L1	10.7	8.9	50.0
10.230001	41.7	GND	L1	10.7	8.3	50.0
13.609501	40.7	GND	L1	10.9	9.3	50.0
14.374501	38.9	GND	L1	10.9	11.1	50.0

Traffic (CBA0059AGAC2):

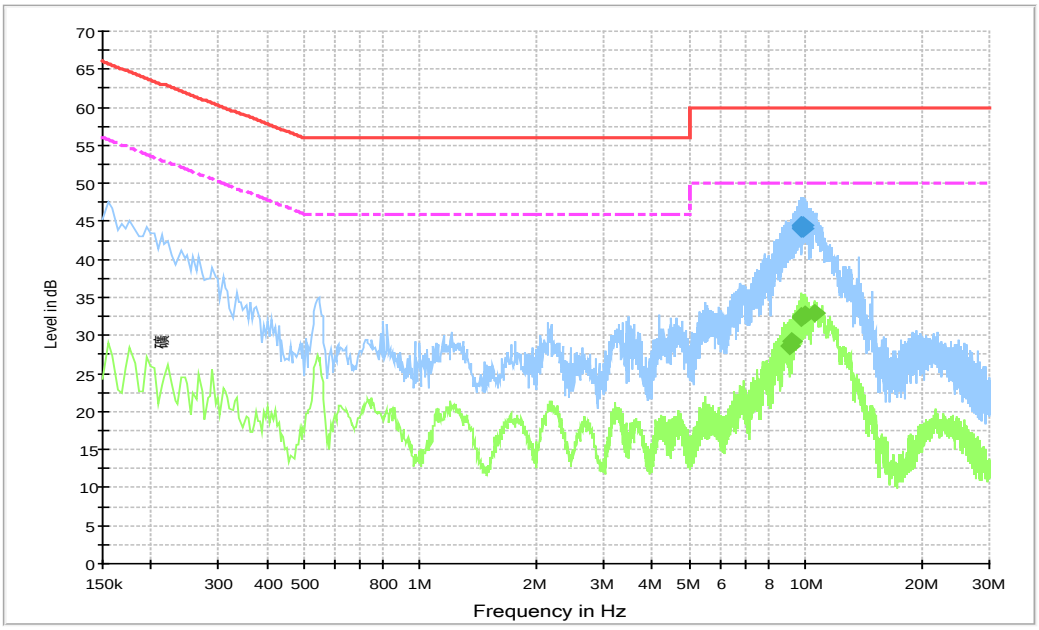

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
9.726001	44.1	GND	L1	10.7	15.9	60.0
9.744001	44.4	GND	L1	10.7	15.6	60.0
9.762001	44.3	GND	L1	10.7	15.7	60.0
9.798001	44.4	GND	L1	10.7	15.6	60.0
9.838501	44.5	GND	L1	10.7	15.5	60.0
9.906001	44.2	GND	L1	10.7	15.8	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
9.145501	28.7	GND	L1	10.7	21.3	50.0
9.195001	29.1	GND	L1	10.7	20.9	50.0
9.735001	32.3	GND	L1	10.7	17.7	50.0
9.780001	32.6	GND	L1	10.7	17.4	50.0
9.933001	32.8	GND	L1	10.7	17.2	50.0
10.572001	33.0	GND	L1	10.7	17.0	50.0

Traffic (CBA0058AGAC2):

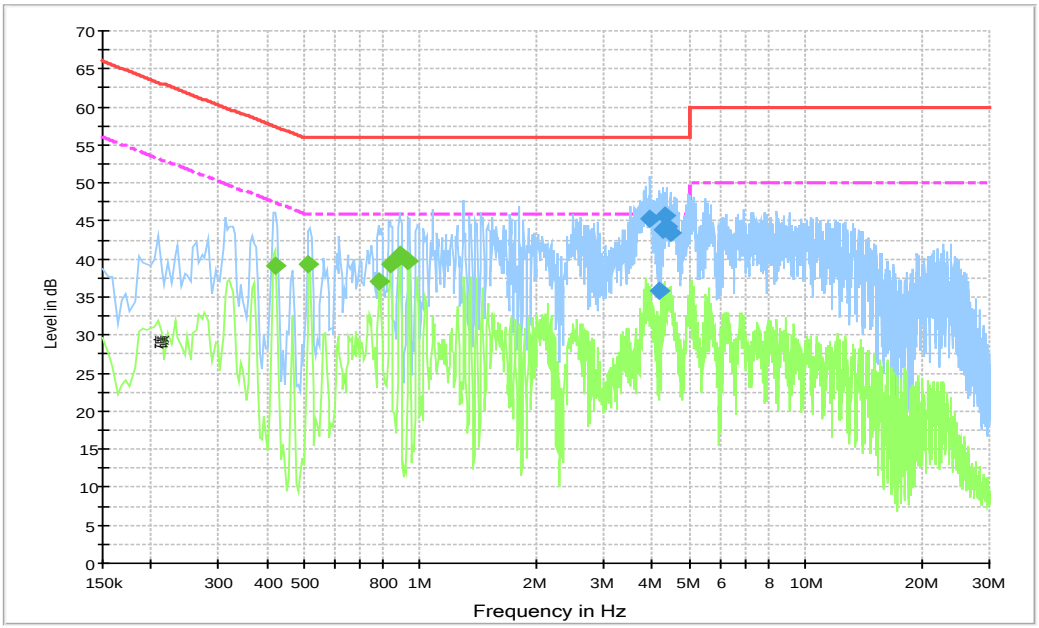

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
3.840001	43.1	GND	L1	10.4	12.9	56.0
3.889501	43.4	GND	L1	10.4	12.6	56.0
4.213501	35.4	GND	L1	10.5	20.6	56.0
4.263001	38.4	GND	L1	10.5	17.6	56.0
4.321501	46.4	GND	L1	10.5	9.6	56.0
4.357501	42.5	GND	L1	10.5	13.5	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.420001	42.3	GND	L1	10.3	5.2	47.4
0.519001	39.1	GND	L1	10.3	6.9	46.0
0.793501	35.5	GND	L1	10.3	10.5	46.0
0.843001	35.4	GND	L1	10.3	10.6	46.0
0.892501	35.0	GND	L1	10.3	11.0	46.0
0.942001	34.1	GND	L1	10.3	11.9	46.0

Traffic (CBA0058AGAC3):

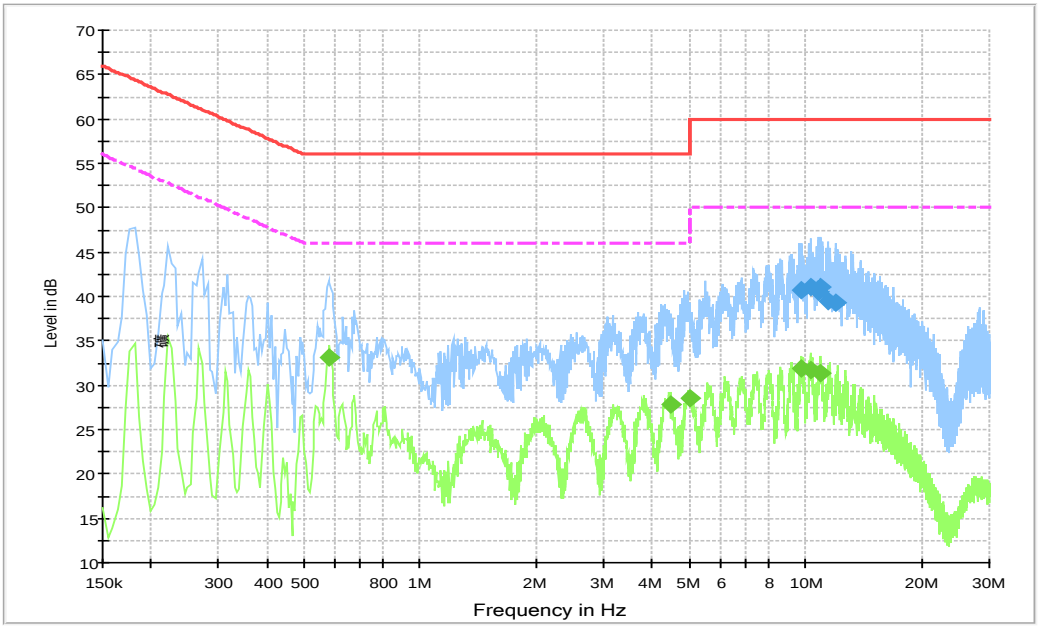

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
3.840001	43.1	GND	L1	10.4	12.9	56.0
3.889501	43.4	GND	L1	10.4	12.6	56.0
4.213501	35.4	GND	L1	10.5	20.6	56.0
4.263001	38.4	GND	L1	10.5	17.6	56.0
4.321501	46.4	GND	L1	10.5	9.6	56.0
4.357501	42.5	GND	L1	10.5	13.5	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.420001	42.3	GND	L1	10.3	5.2	47.4
0.519001	39.1	GND	L1	10.3	6.9	46.0
0.793501	35.5	GND	L1	10.3	10.5	46.0
0.843001	35.4	GND	L1	10.3	10.6	46.0
0.892501	35.0	GND	L1	10.3	11.0	46.0
0.942001	34.1	GND	L1	10.3	11.9	46.0

ANNEX B: Accreditation Certificate

China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(No. CNAS L0570)

Telecommunication Technology Labs,

Academy of Telecommunication Research, MIIT

No.52, Huayuan North Road, Haidian District, Beijing, China

No.51, Xueyuan Road, Haidian District, Beijing, China

to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing and calibration.

The scope of accreditation is detailed in the attached schedule bearing the same accreditation number as above. The schedule forms an integral part of this certificate.

Date of Issue: 2014-10-29

Date of Expiry: 2017-06-19

Date of Initial Accreditation: 1998-07-03

Signed on behalf of China National Accreditation Service for Conformity Assessment

China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).

No.CNAS AL 2

0011149

*****END OF REPORT*****