

Fig.A.6.2.28 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 18GHz – 26.5GHz)

Full Spectrum


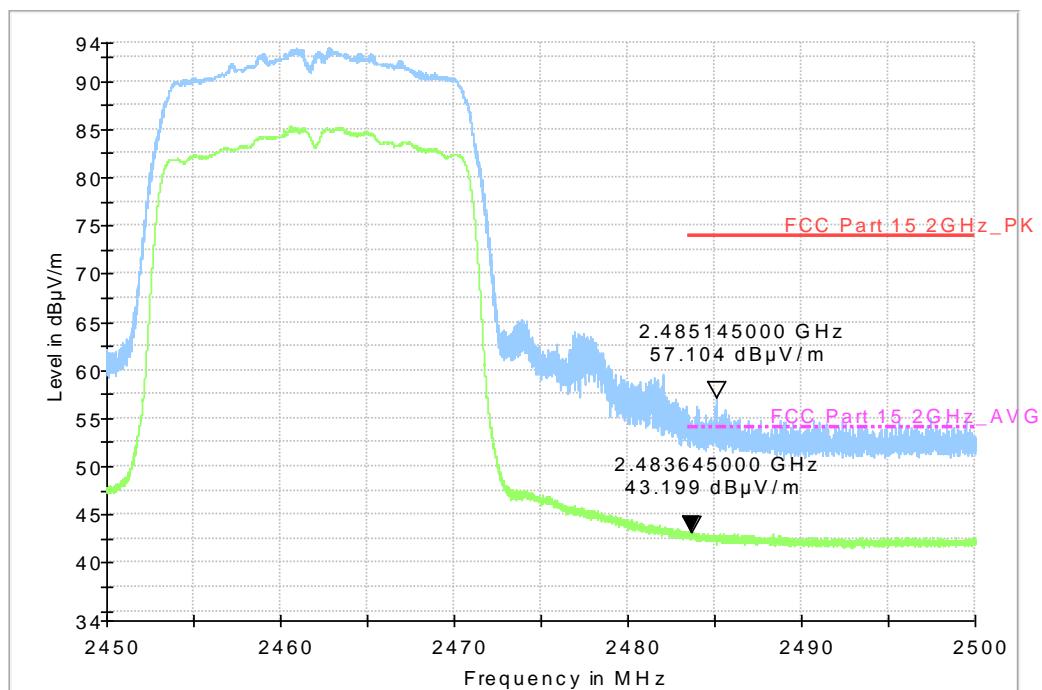


Fig.A.6.2.29 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

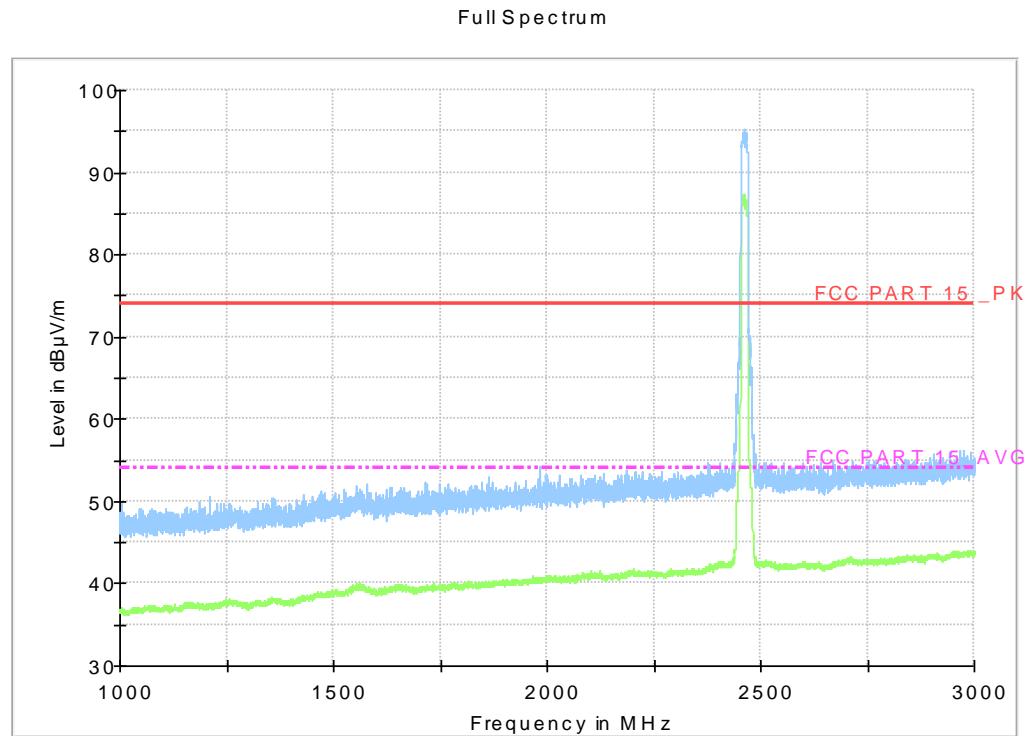

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig.A.6.2.30 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 1 GHz-3 GHz)

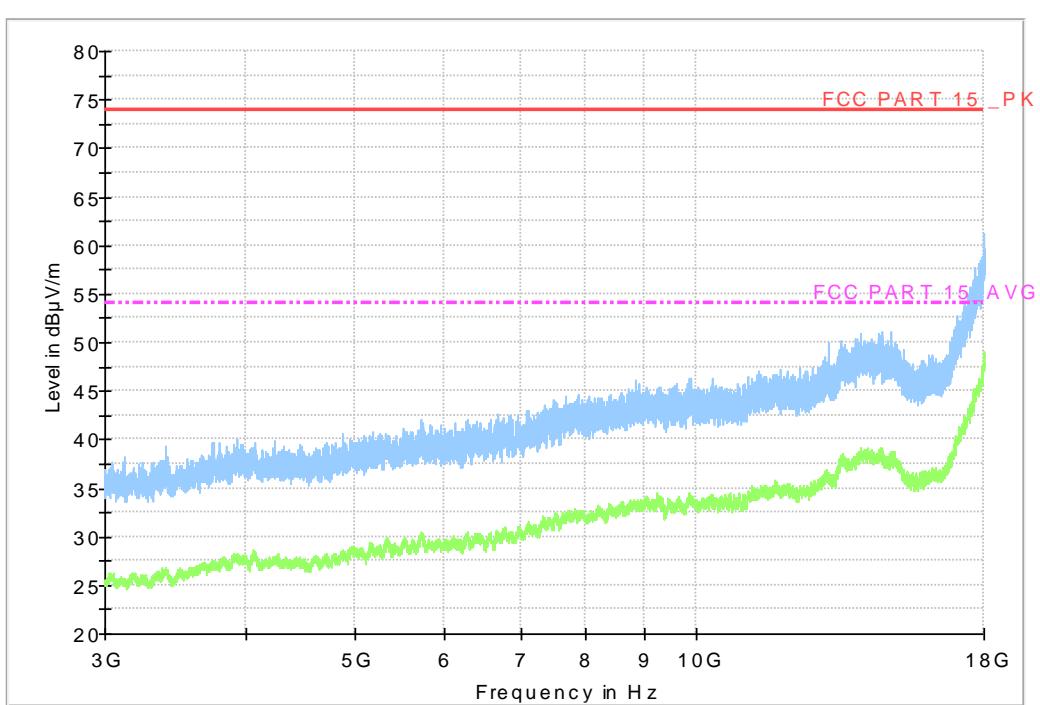


Fig.A.6.2.31 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 3 GHz-18 GHz)


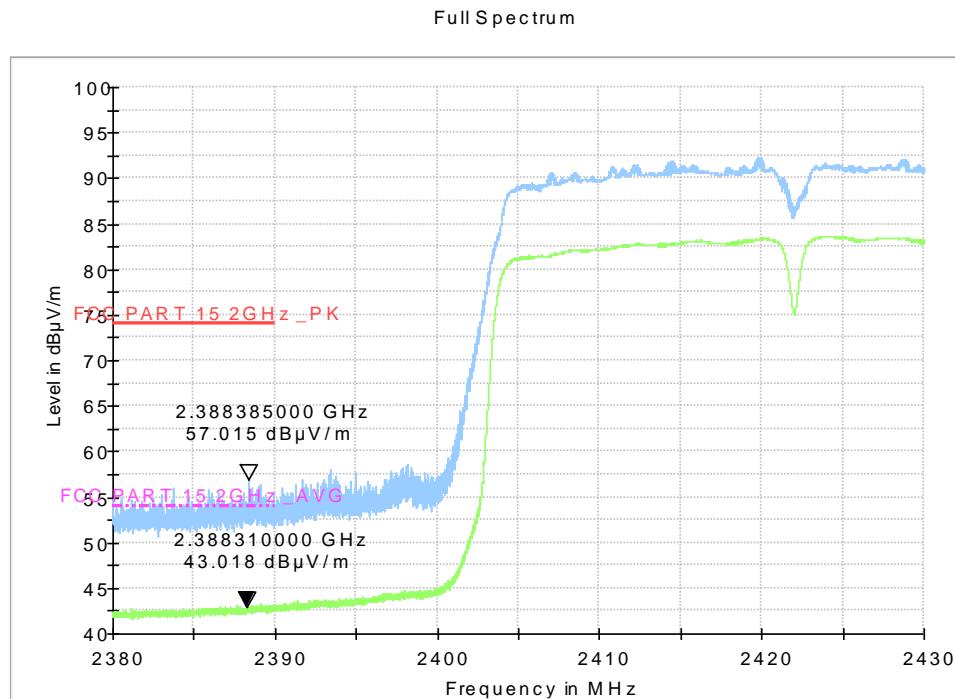


Fig.A.6.2.32 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.38 GHz - 2.43GHz

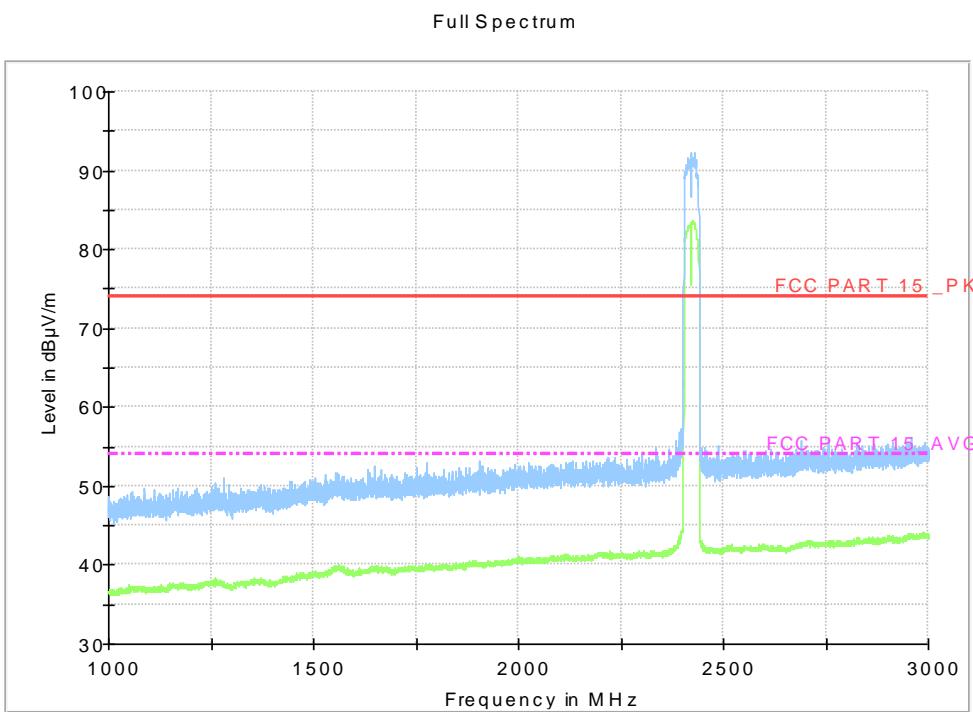

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig.A.6.2.33 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch3, 1 GHz-3 GHz)

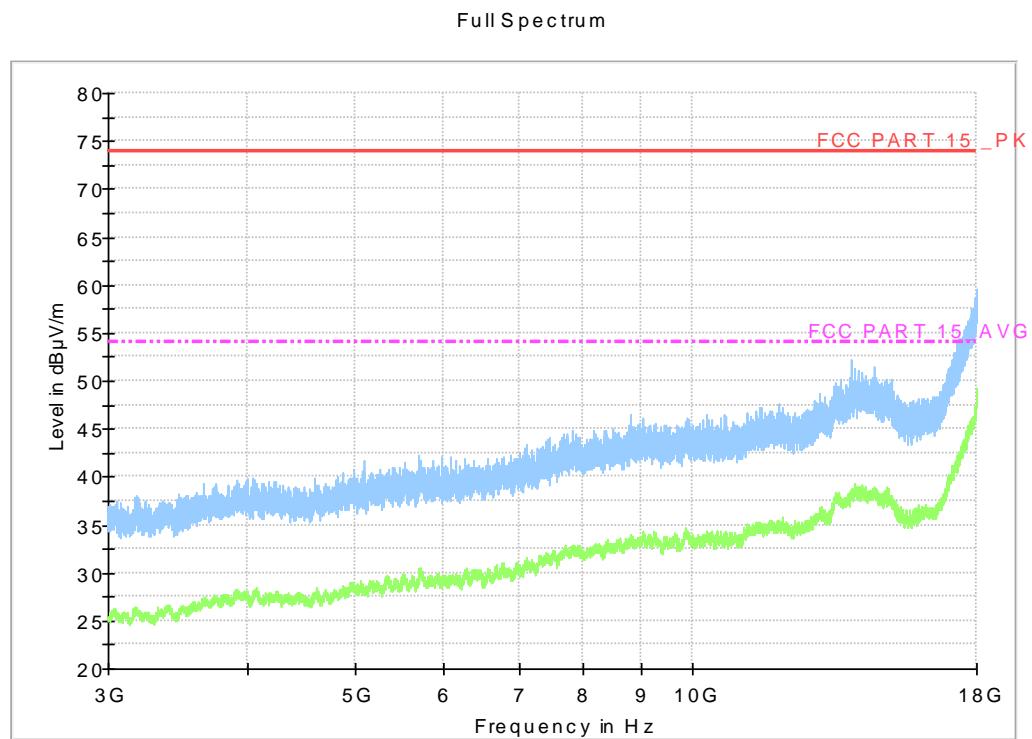


Fig.A.6.2.34 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch3, 3 GHz-18 GHz)


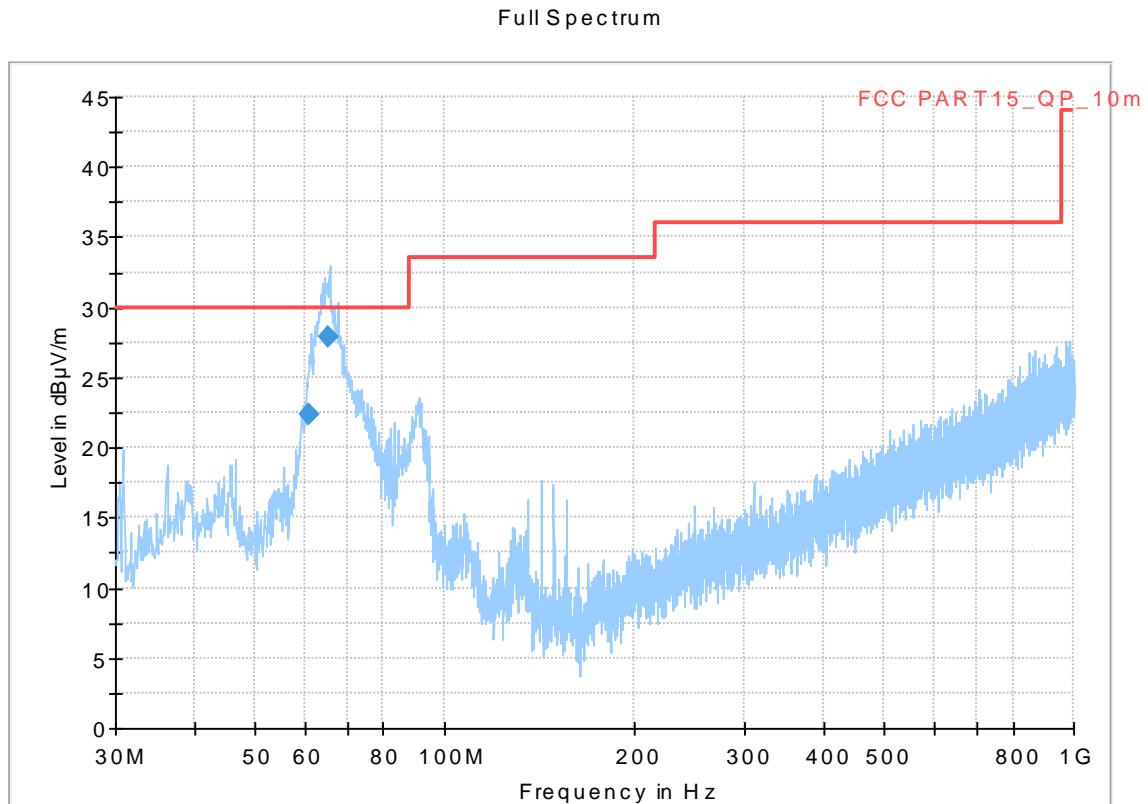


Fig.A.6.2.35 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 30 MHz-1 GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dB 磦/m)	Limit (dB 磦/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
60.841000	22.34	30.00	7.66	1000.	120.000	125.0	V	66.0
65.576000	27.91	30.00	2.09	1000.	120.000	195.0	V	112.0

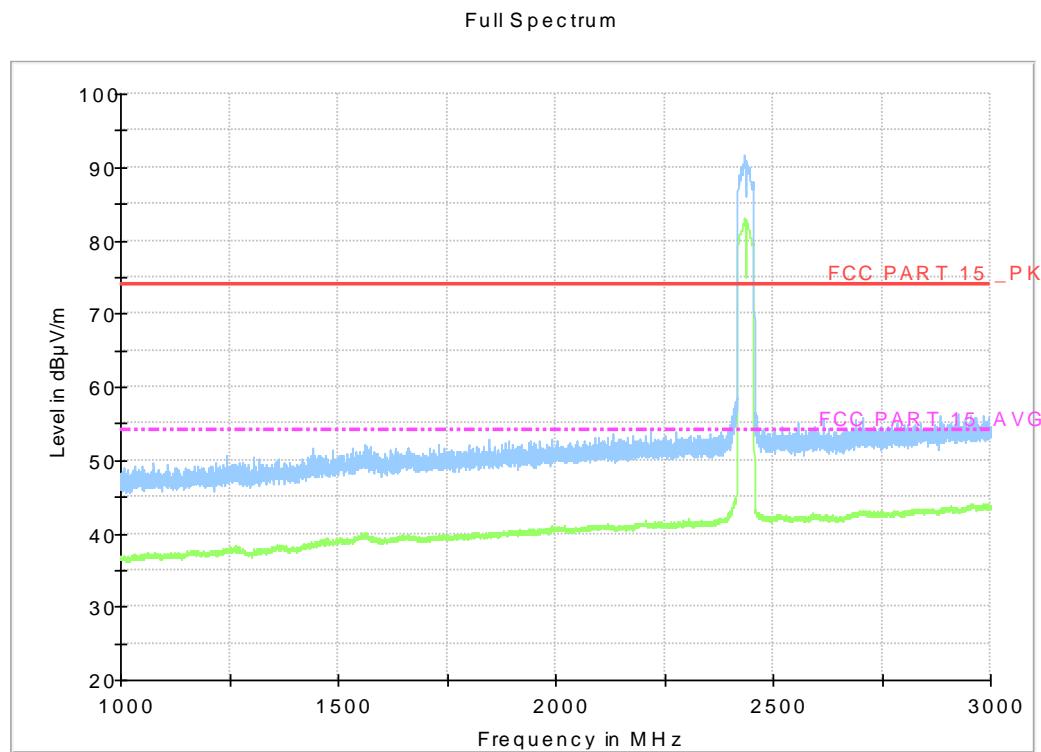

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig.A.6.2.36 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 1 GHz-3 GHz)

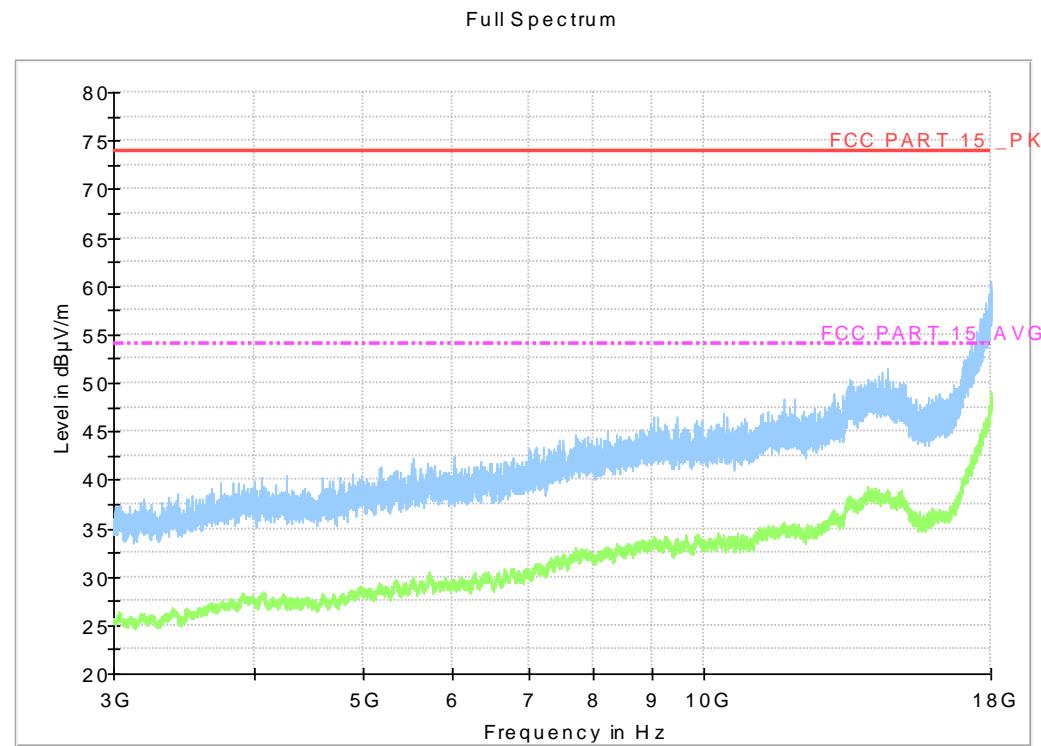


Fig.A.6.2.37 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 3 GHz-18 GHz)

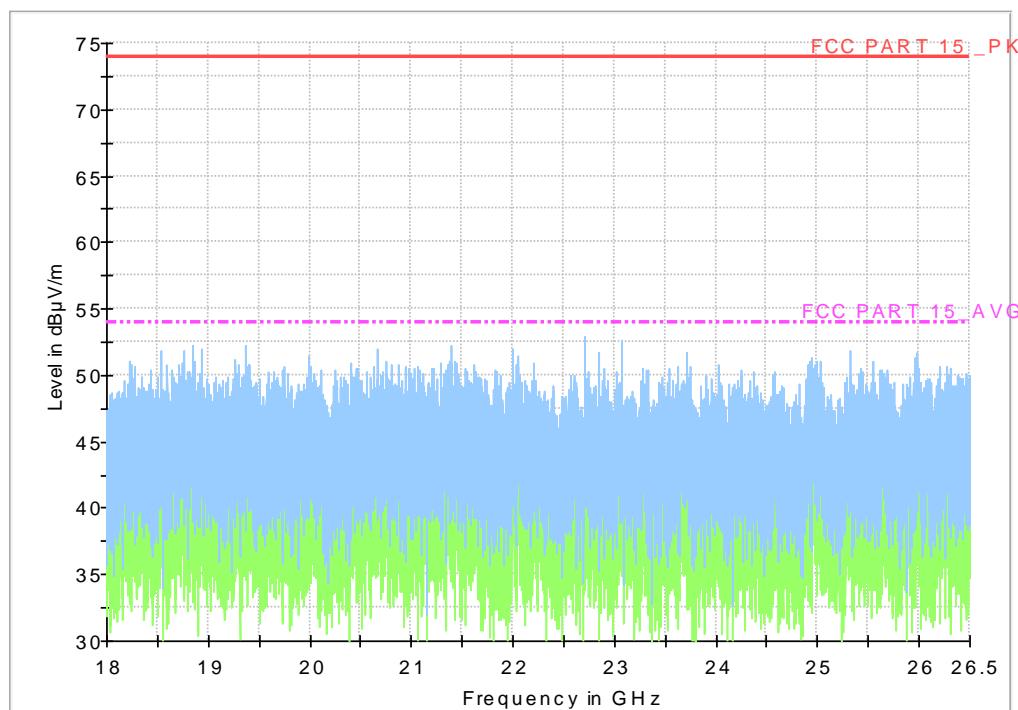


Fig.A.6.2.38 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 18GHz – 26.5GHz)

Full Spectrum


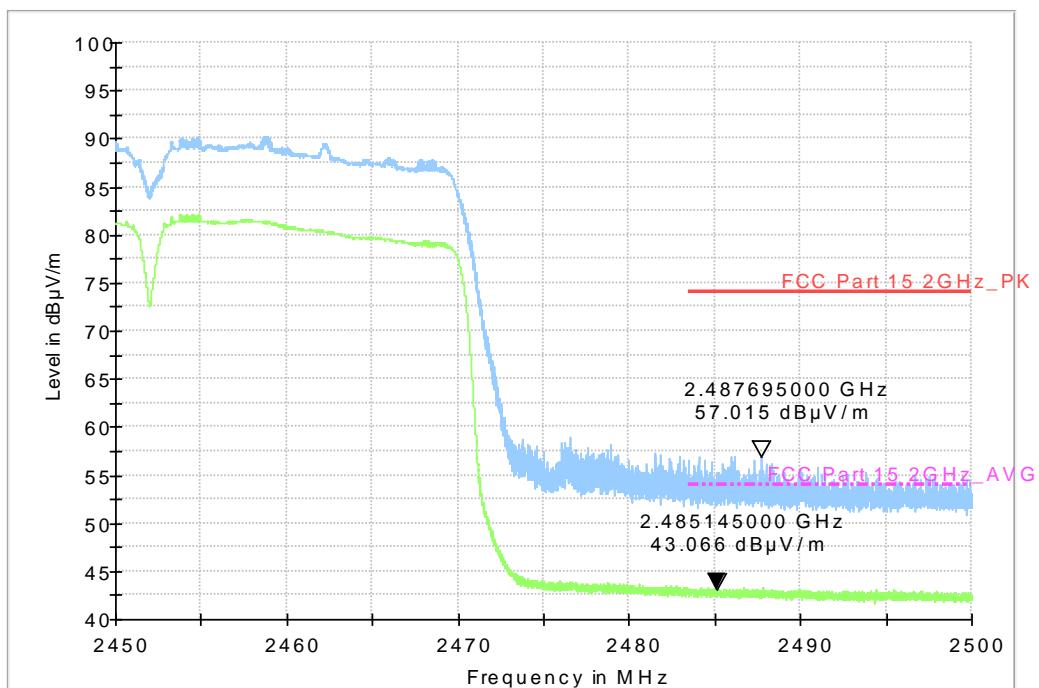


Fig.A.6.2.39 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz

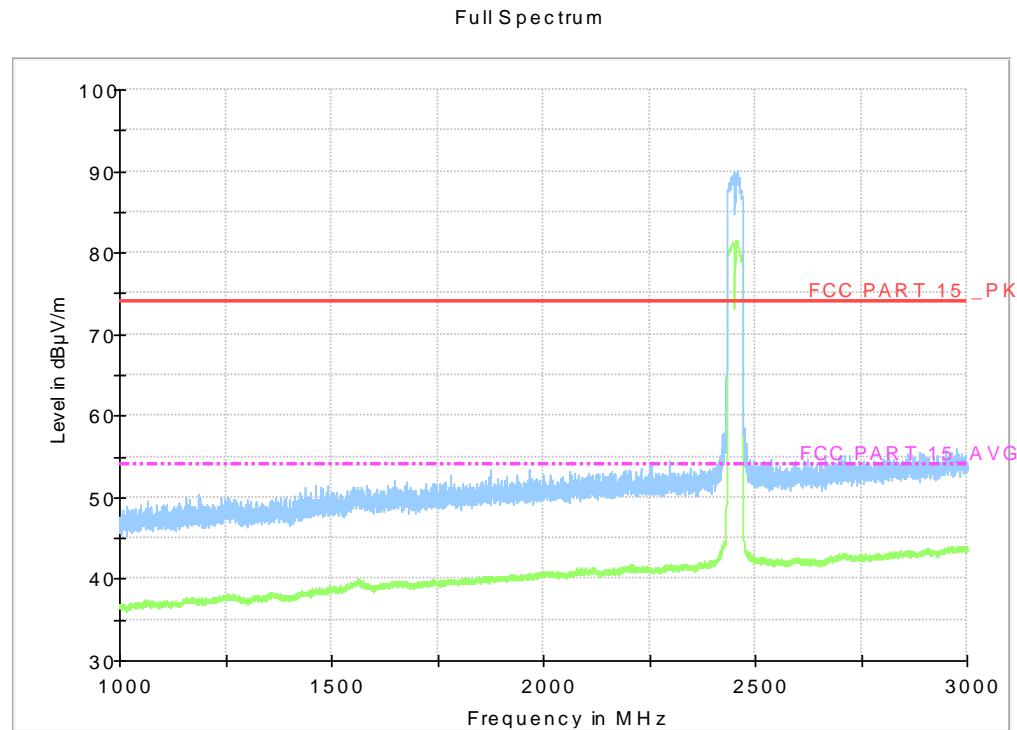

Note: the spike over the limit is the WLAN carrier frequency and coming from the radio equipment.

Fig.A.6.2.40 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch9, 1 GHz-3 GHz)

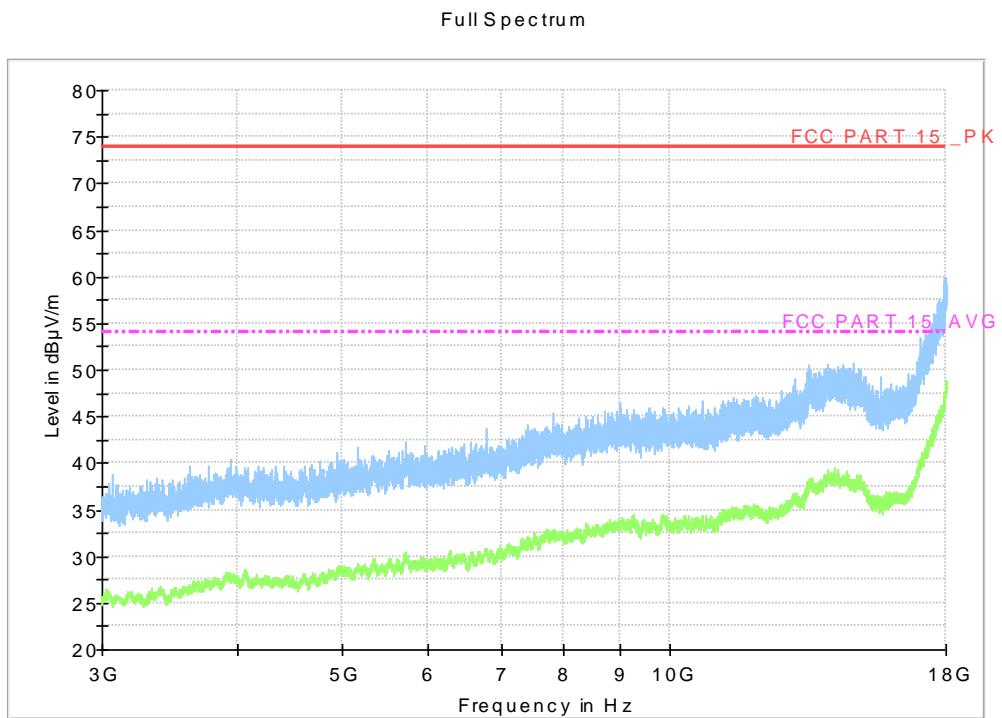


Fig.A.6.2.41 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch9, 3 GHz-18 GHz)

A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		802.11b	Idle		
0.15 to 0.5	66 to 56	Fig.A.7.1 Fig.A.7.2	Fig.A.7.3	P	
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.


WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		802.11b	Idle		
0.15 to 0.5	56 to 46	Fig.A.7.1 Fig.A.7.2	Fig.A.7.3	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:

Traffic: Set.10

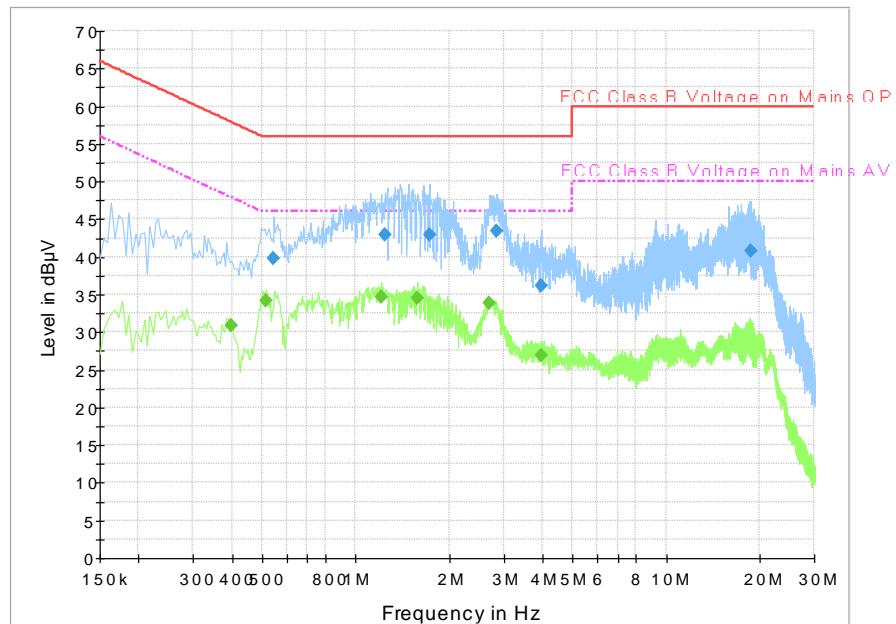
Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.546000	39.7	GND	L1	19.9	16.3	56.0
1.243500	42.9	GND	L1	19.7	13.1	56.0
1.729500	42.9	GND	N	19.7	13.1	56.0
2.845500	43.4	GND	L1	18.9	12.6	56.0
3.966000	36.2	GND	N	19.5	19.8	56.0
18.685500	40.7	GND	N	19.9	19.3	60.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.397500	30.9	GND	L1	19.9	17.0	47.9
0.514500	34.2	GND	L1	19.9	11.8	46.0
1.207500	34.6	GND	N	19.7	11.4	46.0
1.581000	34.5	GND	L1	19.7	11.5	46.0
2.706000	33.8	GND	N	19.2	12.2	46.0
3.948000	26.9	GND	L1	19.5	19.1	46.0

Traffic: Set.11

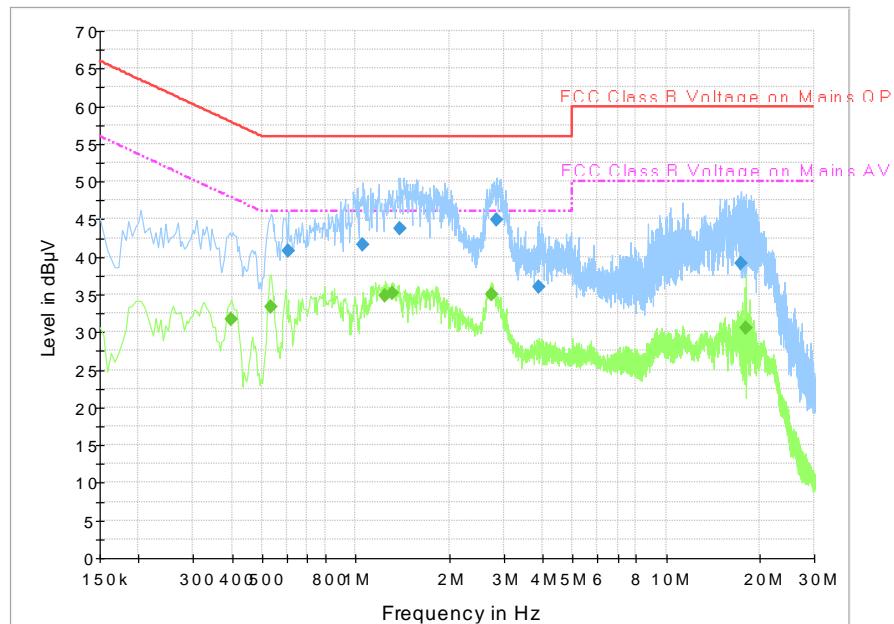
Fig.A.7.2 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.604500	40.7	GND	L1	19.8	15.3	56.0
1.054500	41.7	GND	N	19.7	14.3	56.0
1.392000	43.7	GND	L1	19.7	12.3	56.0
2.841000	44.8	GND	L1	18.9	11.2	56.0
3.898500	36.1	GND	L1	19.5	19.9	56.0
17.394000	39.2	GND	N	19.9	20.8	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.397500	31.8	GND	N	19.9	16.1	47.9
0.532500	33.3	GND	N	19.9	12.7	46.0
1.243500	34.8	GND	N	19.7	11.2	46.0
1.311000	35.1	GND	N	19.7	10.9	46.0
2.733000	35.0	GND	N	19.1	11.0	46.0
18.042000	30.5	GND	N	19.9	19.5	50.0

Idle: Set.10

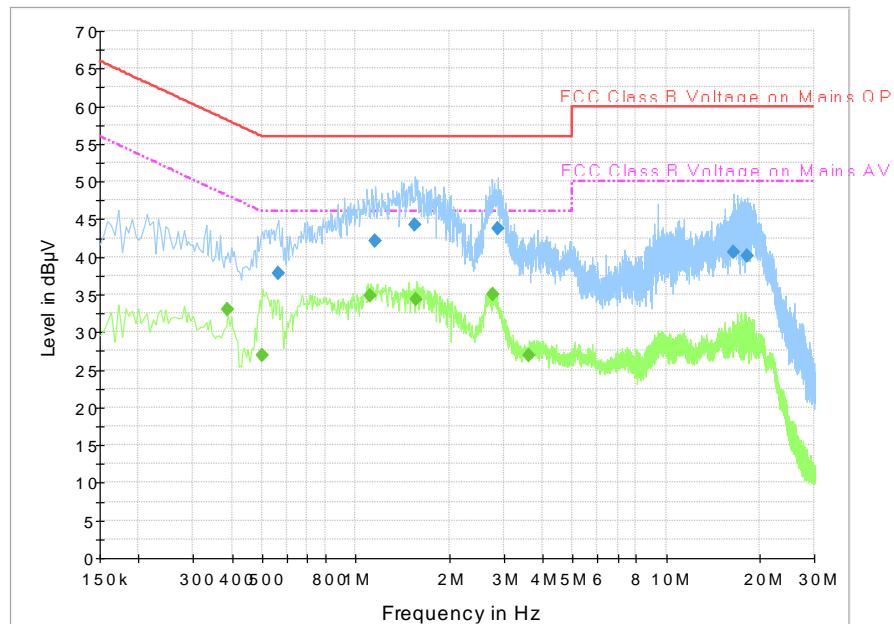
Fig.A.7.3 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.564000	37.9	GND	L1	19.9	18.1	56.0
1.158000	42.2	GND	N	19.7	13.8	56.0
1.554000	44.2	GND	L1	19.7	11.8	56.0
2.877000	43.8	GND	N	18.9	12.2	56.0
16.471500	40.6	GND	N	19.8	19.4	60.0
18.249000	40.2	GND	N	19.9	19.8	60.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.388500	33.1	GND	L1	19.9	15.0	48.1
0.501000	26.9	GND	N	19.9	19.1	46.0
1.117500	34.8	GND	L1	19.7	11.2	46.0
1.572000	34.3	GND	L1	19.7	11.7	46.0
2.760000	34.9	GND	N	19.0	11.1	46.0
3.619500	26.9	GND	L1	19.5	19.1	46.0

END OF REPORT