

FCC REPORT

(Bluetooth)

Applicant: TCL Communication Ltd.

Address of Applicant: 7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052

Equipment Under Test (EUT)

Product Name: LTE/UMTS/GSM mobile phone

Model No.: 5048A

Trade mark: alcatel

FCC ID: 2ACCJH107

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 17 Jan., 2022

Date of Test: 18 Jan., to 01 Mar., 2022

Date of report issued: 13 Apr., 2022

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	04 Mar., 2022	Original
01	13 Apr., 2022	Updated page20

Tested by:Mike.ou**Test Engineer****Date:**

13 Apr., 2022

Reviewed by:Winner Zhang**Project Engineer****Date:**

13 Apr., 2022

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST ENVIRONMENT AND MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	6
5.7 LABORATORY FACILITY.....	6
5.8 LABORATORY LOCATION.....	7
5.9 TEST INSTRUMENTS LIST	7
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 ANTENNA REQUIREMENT:	8
6.2 CONDUCTED OUTPUT POWER	9
6.2.1 Re-test statement.....	9
6.2.2 Test Results	9
6.3 EMISSIONS IN RESTRICTED FREQUENCY BANDS	11
6.4 SPURIOUS EMISSION.....	24
6.4.1 Radiated Emission Method.....	24
7 APPENDIX	34
8 TEST SETUP PHOTOGRAPH-DSS	35
8.1 TEST SETUP OF JIANYAN TESTING GROUP SHENZHEN CO., LTD.....	35
8.2 TEST SETUP OF SGS-CSTC STANDARDS TECHNICAL SERVICES, CO LTD. SHENZHEN BRANCH.....	36

4 Test Summary

Test Items	Section in CFR 47	Result
Antenna Requirement	15.203 & 15.247 (b)	Pass
AC Power Line Conducted Emission	15.207	Pass ¹
Conducted Peak Output Power	15.247 (b)(1)	Pass ²
20dB Occupied Bandwidth	15.247 (a)(1)	Pass ¹
Carrier Frequencies Separation	15.247 (a)(1)	Pass ¹
Hopping Channel Number	15.247 (a)(1)	Pass ¹
Dwell Time	15.247 (a)(1)	Pass ¹
Conducted Band Edge	15.247(d)	Pass ¹
Emissions in Restricted Frequency Bands	15.205 & 15.209	Pass ²
Conducted Spurious Emission	15.247(d)	Pass ¹
Radiated Spurious Emission	15.205 & 15.209	Pass ²

Remark:

1. Pass¹: Items data are refer from the original report issued by SGS-CSTC Standards Technical Services, Co., Ltd.Shenzhen Branch.(Date of Test: 2019/8/2-2019/8/21).The detailed data refer to Appendix- Bluetooth.
2. Pass²: These items are tested by JianYan Testing Group Shenzhen Co., Ltd.
3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).

Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02
---------------------	--

5 General Information

5.1 Client Information

Applicant:	TCL Communication Ltd.
Address:	7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052
Manufacturer:	TCL Communication Ltd.
Address:	7/F, Block F4, TCL Communication Technology Building, TCL International E City, Zhong Shan Yuan Road, Nanshan District, Shenzhen, Guangdong, P.R. China 518052
Factory:	Huizhou TCL Mobile Communication Co, Ltd
Address:	No. 86, Hechang 7th West Road, Zhongkai Hi-Tech Development District, Huizhou, Guangdong

5.2 General Description of E.U.T.

Product Name:	LTE/UMTS/GSM mobile phone
Model No.:	5048A
Operation Frequency:	2402MHz~2480MHz
Transfer rate:	1/2/3 Mbits/s
Number of channel:	79
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation technology:	FHSS
Antenna Type:	Integrated Antenna
Antenna gain:	0.25 dBi
Power supply:	<input checked="" type="checkbox"/> AC/DC Adapter
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
...
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Remark: Channel 0, 39 &78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Modes:	
Non-hopping mode:	Keep the EUT in continuous transmitting mode with worst case data rate.
Hopping mode:	Keep the EUT in hopping mode.
Remark	GFSK (1 Mbps) is the worst case mode.
Radiated Emission: The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	
<i>Remark: JianYan Testing Group Shenzhen Co., Ltd. is only responsible for the test project data of the above samples, and will keep the above samples for a month.</i>	

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

5.9 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
3m SAC	ETS	RFD-100	Q1984	04-14-2021	04-13-2024
BiConiLog Antenna	SCHWARZBECK	VULB9163	9163-1246	03-07-2021	03-06-2022
Biconical Antenna	SCHWARZBECK	VUBA 9117	9117#359	06-17-2021	06-17-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	912D-916	03-07-2021	03-06-2022
Broad-Band Horn Antenna	SCHWARZBECK	BBHA9170	1067	04-02-2021	04-01-2022
Broad-Band Horn Antenna	SCHWARZBECK	BBHA9170	1068	04-02-2021	04-01-2022
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-03-2021 02-17-2022	03-02-2022 02-16-2023
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-03-2021 02-17-2022	03-02-2022 02-16-2023
Spectrum analyzer	Keysight	N9010B	MY60240202	10-27-2021	10-26-2022
Band Reject Filter Group	Tonscend	JS0806	21B8060367	04-06-2021	04-05-2022
Low Pre-amplifier	SCHWARZBECK	BBV9743B	00305	03-07-2021	03-06-2022
High Pre-amplifier	SKET	LNPA_0118G-50	MF280208233	03-07-2021	03-06-2022
Cable	Qualwave	JYT3M-1G-NN-8M	JYT3M-1	03-07-2021	03-06-2022
Cable	Qualwave	JYT3M-18G-NN-8M	JYT3M-2	03-07-2021	03-06-2022
Cable	Qualwave	JYT3M-1G-BB-5M	JYT3M-3	03-07-2021	03-06-2022
Cable	Bost	JYT3M-40G-SS-8M	JYT3M-4	04-02-2021	04-01-2022
EMI Test Software	Tonscend	TS+	Version:3.0.0.1		

Conducted method:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9010B	MY60240202	10-27-2021	10-26-2022
Power Detector Box	MWRF-test	MW100-PSB	MW201020JYT	11-19-2021	11-18-2022
RF Control Box	MWRF-test	MW100-RFCB	MW200927JYT	N/A	N/A
DC Power Supply	Keysight	E3642A	MY60296194	11-27-2020	11-26-2023
Test Software	MWRF-tes	MTS 8310	Version: 2.0.0.0		

6 Test results and measurement data

6.1 Antenna requirement:


Standard requirement:	FCC Part 15 C Section 15.203 /247(b)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
E.U.T Antenna:	The BT antenna is an Integrated antenna which cannot replace by end-user, the best-case gain of the antenna is 0.25 dBi.

6.2 Conducted Output Power

6.2.1 Re-test statement

Re-test statement: The EUT is operating at the same power level with the original testing of SGS-CSTC Standards Technical Services, Co Ltd. Shenzhen Branch.

6.2.2 Test Results

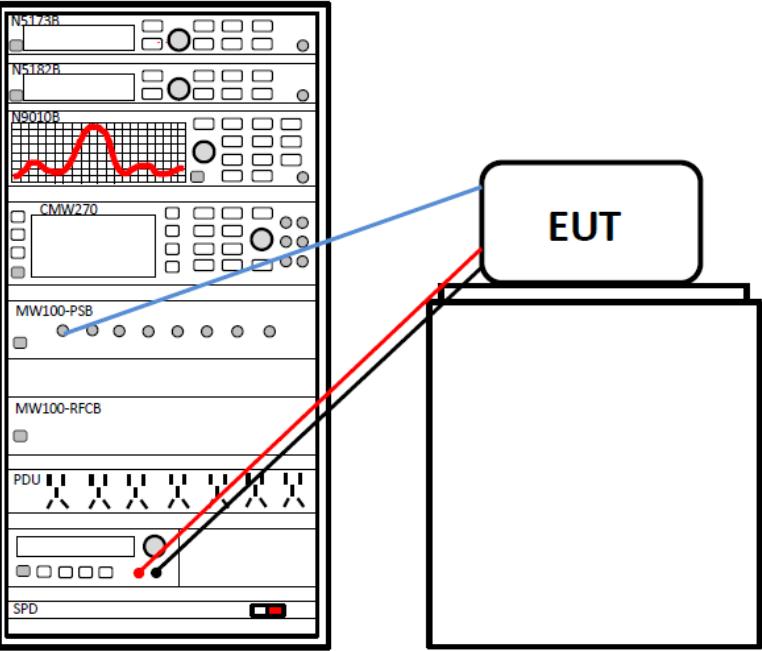Test Requirement:	FCC Part 15 C Section 15.247 (b)(1)
Receiver setup:	RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW \leq 1 MHz) RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW $>$ 1 MHz and $<$ 3MHz)
Limit:	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Non-hopping mode
Test results:	Pass


Measurement Data:

Mode	Test Channel	The Original Reports Level [dBm]	Re-Test Reports Level [dBm]	Power level
8DPSK	Lowest	6.01	5.69	7
	Middle	5.24	5.56	7
	Highest	5.20	4.91	7

Remark:


	The Original Reports	Re-Test Reports
File name:	test report BT	Test Report BT rev1
Test location:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch	JianYan Testing Group Shenzhen Co., Ltd.
The output power is re-test at JianYan Testing Group Shenzhen Co., Ltd.		

6.3 Emissions in Restricted Frequency Bands

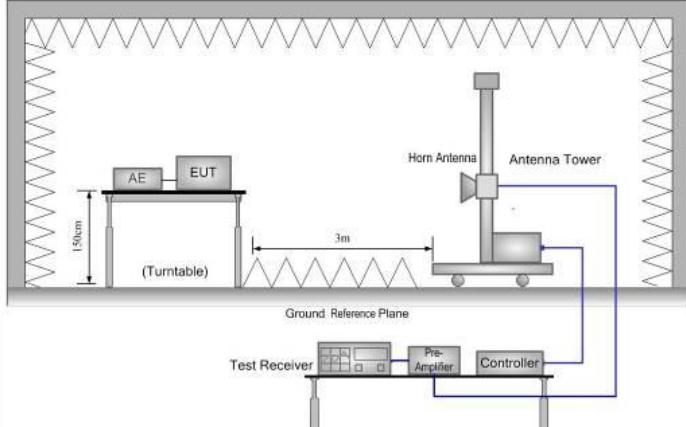Test Requirement:	FCC Part 15 C Section 15.209 and 15.205						
Test Frequency Range:	2310 MHz to 2390 MHz and 2483.5 MHz to 2500 MHz						
Test Distance:	3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Remark		
	Above 1GHz	Peak	1MHz	3MHz	Peak Value		
		RMS	1MHz	3MHz	Average Value		
Limit:	Frequency	Limit (dBuV/m @3m)		Remark			
	Above 1GHz	54.00		Average Value			
		74.00		Peak Value			
Test setup:							
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 						
Test Instruments:	Refer to section 5.9 for details						
Test mode:	Non-hopping mode						
Test results:	Passed						

GFSK Mode:

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

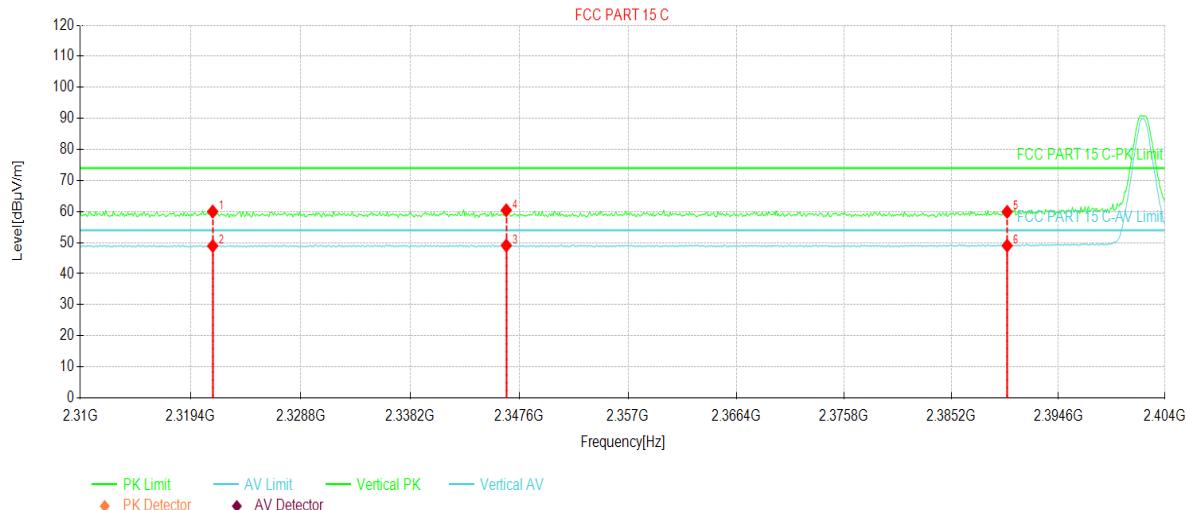


NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2321.2	24.65	60.00	35.35	74.00	14.00	328	144	PK	Vertical
2	2321.2	13.58	48.93	35.35	54.00	5.07	294	152	AV	Vertical
3	2346.4	13.54	49.07	35.53	54.00	4.93	264	137	AV	Vertical
4	2346.4	24.89	60.42	35.53	74.00	13.58	231	148	PK	Vertical
5	2390.0	24.08	59.92	35.84	74.00	14.08	186	150	PK	Vertical
6	2390.0	13.17	49.01	35.84	54.00	4.99	160	164	AV	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

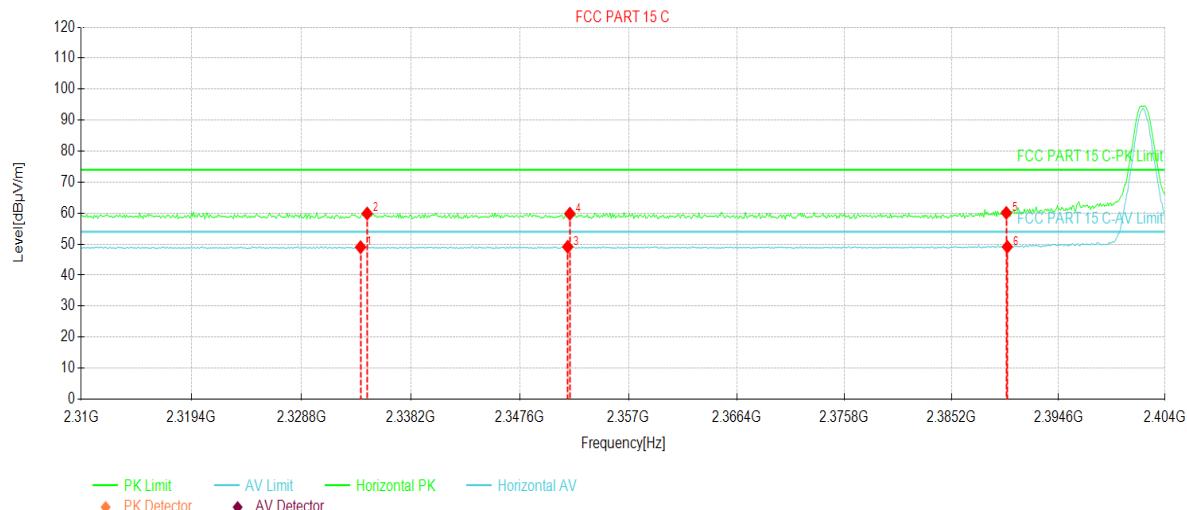


NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2333.8	13.58	49.02	35.44	54.00	4.98	249	141	AV	Horizontal
2	2334.4	24.44	59.88	35.44	74.00	14.12	271	134	PK	Horizontal
3	2351.7	13.56	49.13	35.57	54.00	4.87	310	152	AV	Horizontal
4	2351.9	24.25	59.82	35.57	74.00	14.18	346	148	PK	Horizontal
5	2390.0	24.24	60.08	35.84	74.00	13.92	297	133	PK	Horizontal
6	2390.0	13.29	49.13	35.84	54.00	4.87	323	146	AV	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

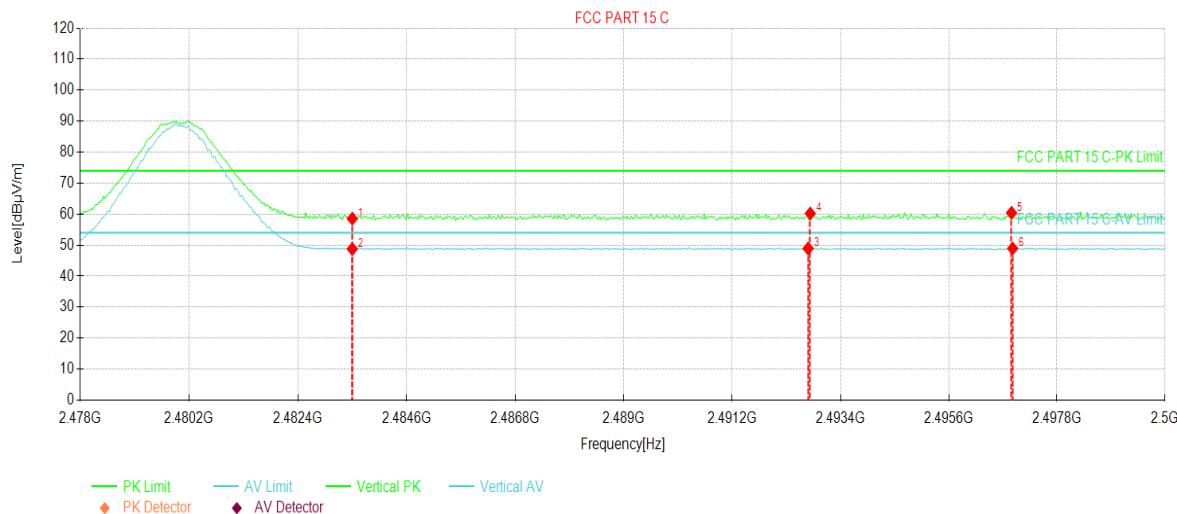


NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2483.5	22.83	58.55	35.72	74.00	15.45	258	137	PK	Vertical
2	2483.5	13.04	48.76	35.72	54.00	5.24	283	130	AV	Vertical
3	2492.7	13.22	48.92	35.70	54.00	5.08	264	143	AV	Vertical
4	2492.7	24.51	60.21	35.70	74.00	13.79	206	151	PK	Vertical
5	2496.8	24.73	60.42	35.69	74.00	13.58	319	164	PK	Vertical
6	2496.8	13.25	48.94	35.69	54.00	5.06	337	157	AV	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

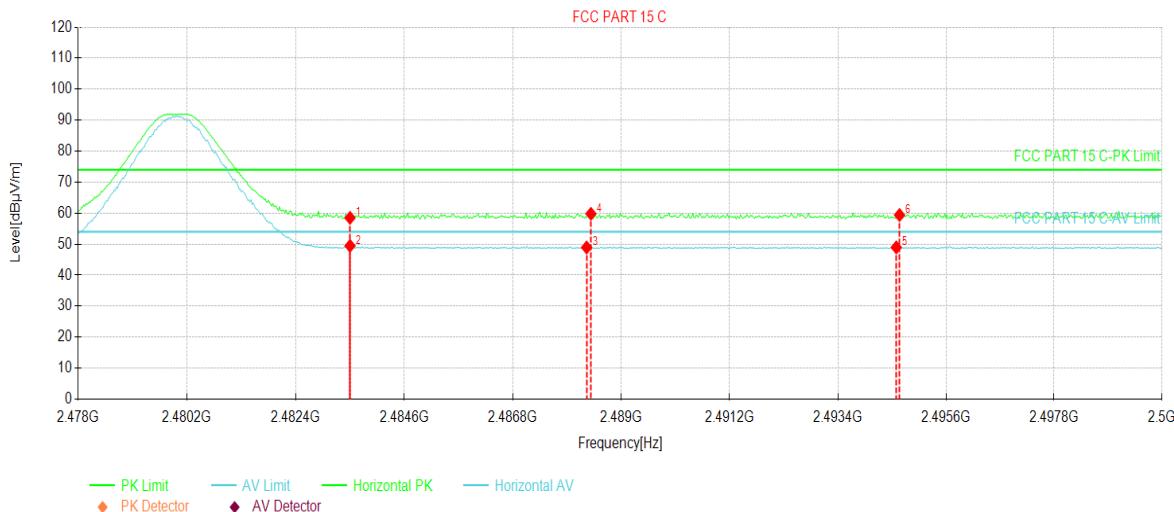


NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2483.5	22.76	58.48	35.72	74.00	15.52	190	133	PK	Horizontal
2	2483.5	13.74	49.46	35.72	54.00	4.54	220	149	AV	Horizontal
3	2488.2	13.22	48.93	35.71	54.00	5.07	130	152	AV	Horizontal
4	2488.3	24.09	59.80	35.71	74.00	14.20	168	146	PK	Horizontal
5	2494.5	13.26	48.95	35.69	54.00	5.05	309	153	AV	Horizontal
6	2494.6	23.72	59.41	35.69	74.00	14.59	328	164	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

$\pi/4$ -DQPSK mode

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

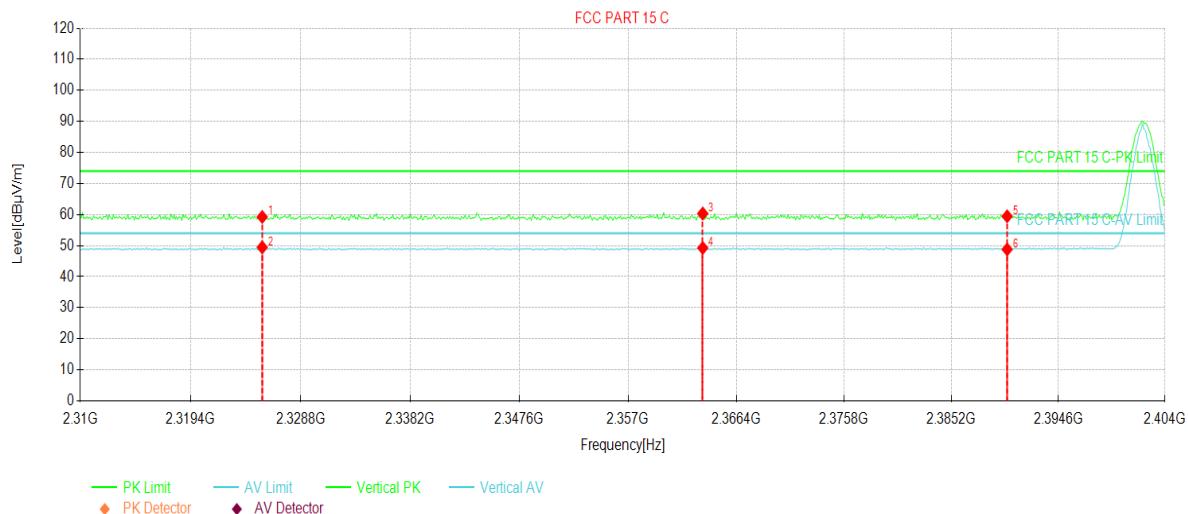


NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2325.5	23.86	59.24	35.38	74.00	14.76	315	164	PK	Vertical
2	2325.5	14.06	49.44	35.38	54.00	4.56	346	158	AV	Vertical
3	2363.4	24.69	60.34	35.65	74.00	13.66	276	142	PK	Vertical
4	2363.4	13.59	49.24	35.65	54.00	4.76	245	151	AV	Vertical
5	2390.0	23.60	59.44	35.84	74.00	14.56	13	136	PK	Vertical
6	2390.0	12.94	48.78	35.84	54.00	5.22	354	142	AV	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

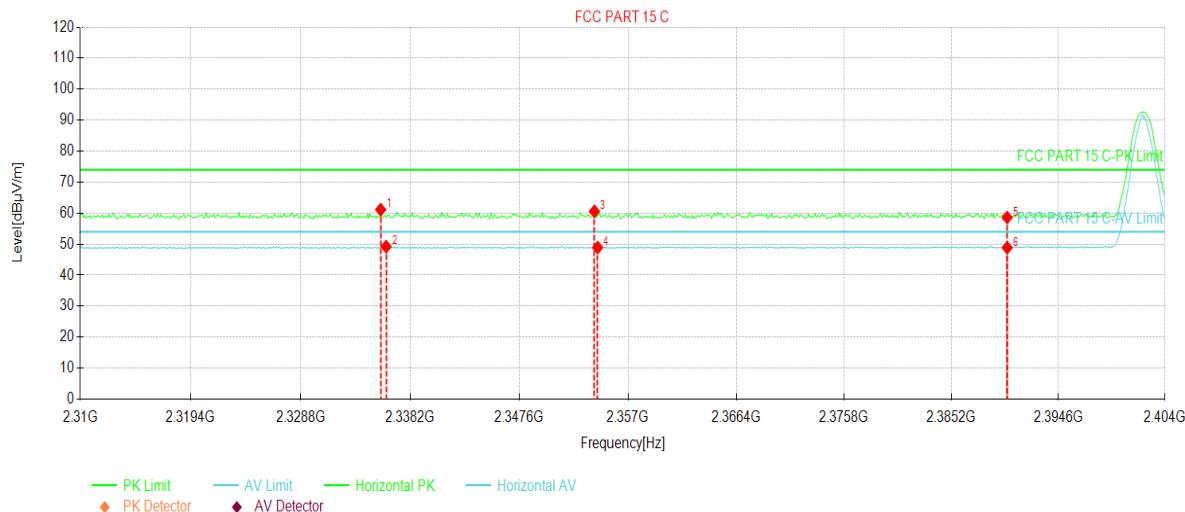


NO	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2335.6	25.67	61.12	35.45	74.00	12.88	157	131	PK	Horizontal
2	2336.1	13.74	49.20	35.46	54.00	4.80	189	141	AV	Horizontal
3	2354.0	25.00	60.58	35.58	74.00	13.42	279	150	PK	Horizontal
4	2354.3	13.32	48.91	35.59	54.00	5.09	310	162	AV	Horizontal
5	2390.0	22.75	58.59	35.84	74.00	15.41	324	138	PK	Horizontal
6	2390.0	13.01	48.85	35.84	54.00	5.15	352	146	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

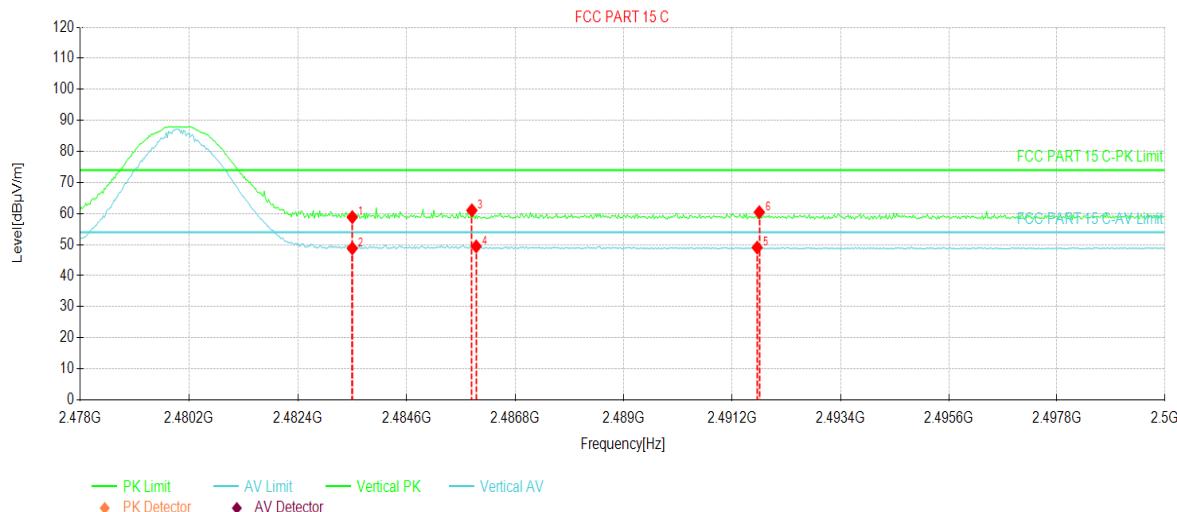


NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2483.5	23.12	58.84	35.72	74.00	15.16	17	148	PK	Vertical
2	2483.5	13.08	48.80	35.72	54.00	5.20	358	135	AV	Vertical
3	2485.9	25.33	61.04	35.71	74.00	12.96	267	152	PK	Vertical
4	2486.0	13.72	49.43	35.71	54.00	4.57	249	159	AV	Vertical
5	2491.7	13.35	49.05	35.70	54.00	4.95	334	161	AV	Vertical
6	2491.7	24.73	60.43	35.70	74.00	13.57	316	170	PK	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

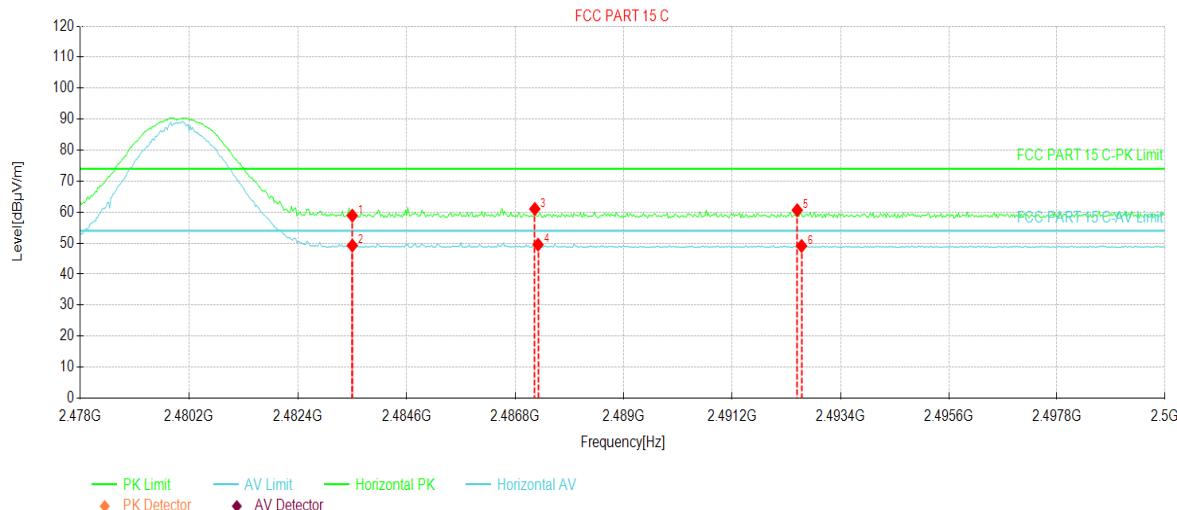


NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2483.5	23.16	58.88	35.72	74.00	15.12	341	141	PK	Horizontal
2	2483.5	13.50	49.22	35.72	54.00	4.78	324	136	AV	Horizontal
3	2487.1	25.32	61.03	35.71	74.00	12.97	179	150	PK	Horizontal
4	2487.2	13.80	49.51	35.71	54.00	4.49	194	158	AV	Horizontal
5	2492.5	24.93	60.63	35.70	74.00	13.37	259	161	PK	Horizontal
6	2492.6	13.39	49.09	35.70	54.00	4.91	247	151	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

8DPSK mode

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

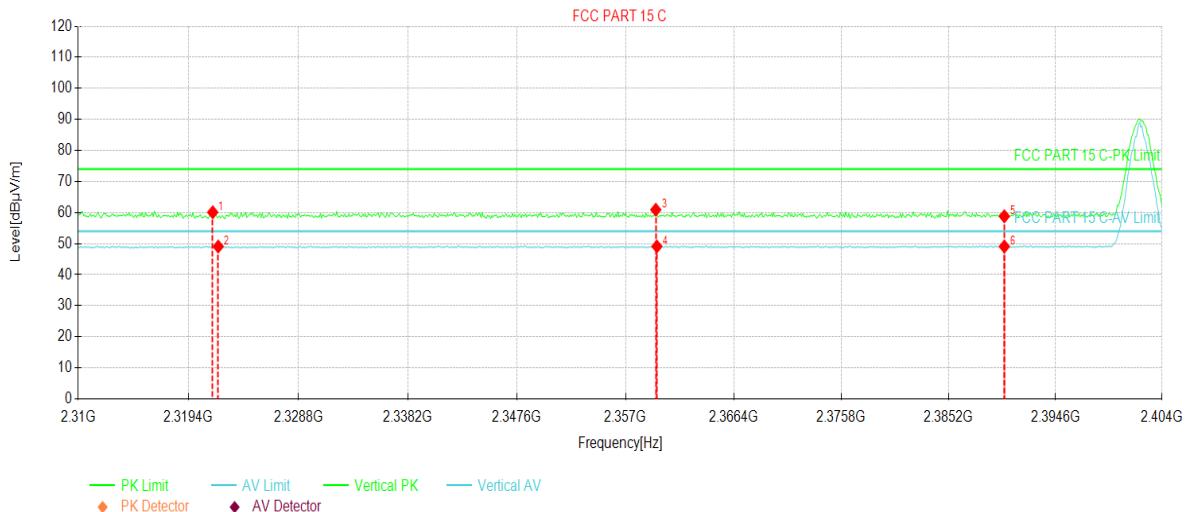


NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2321.4	24.75	60.10	35.35	74.00	13.90	348	138	PK	Vertical
2	2321.9	13.71	49.07	35.36	54.00	4.93	306	141	AV	Vertical
3	2359.6	25.29	60.91	35.62	74.00	13.09	279	130	PK	Vertical
4	2359.7	13.48	49.10	35.62	54.00	4.90	246	146	AV	Vertical
5	2390.0	22.96	58.80	35.84	74.00	15.20	239	150	PK	Vertical
6	2390.0	13.24	49.08	35.84	54.00	4.92	245	164	AV	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

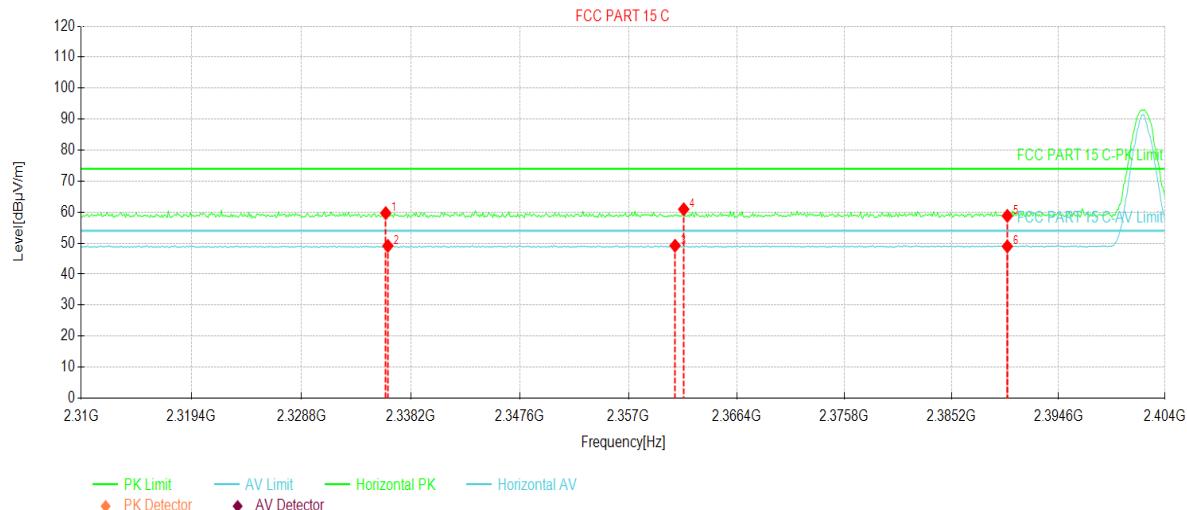


NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2336.0	24.22	59.68	35.46	74.00	14.32	318	134	PK	Horizontal
2	2336.2	13.65	49.11	35.46	54.00	4.89	284	146	AV	Horizontal
3	2361.0	13.55	49.18	35.63	54.00	4.82	302	151	AV	Horizontal
4	2361.7	25.30	60.94	35.64	74.00	13.06	271	159	PK	Horizontal
5	2390.0	22.96	58.80	35.84	74.00	15.20	326	161	PK	Horizontal
6	2390.0	13.10	48.94	35.84	54.00	5.06	345	154	AV	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

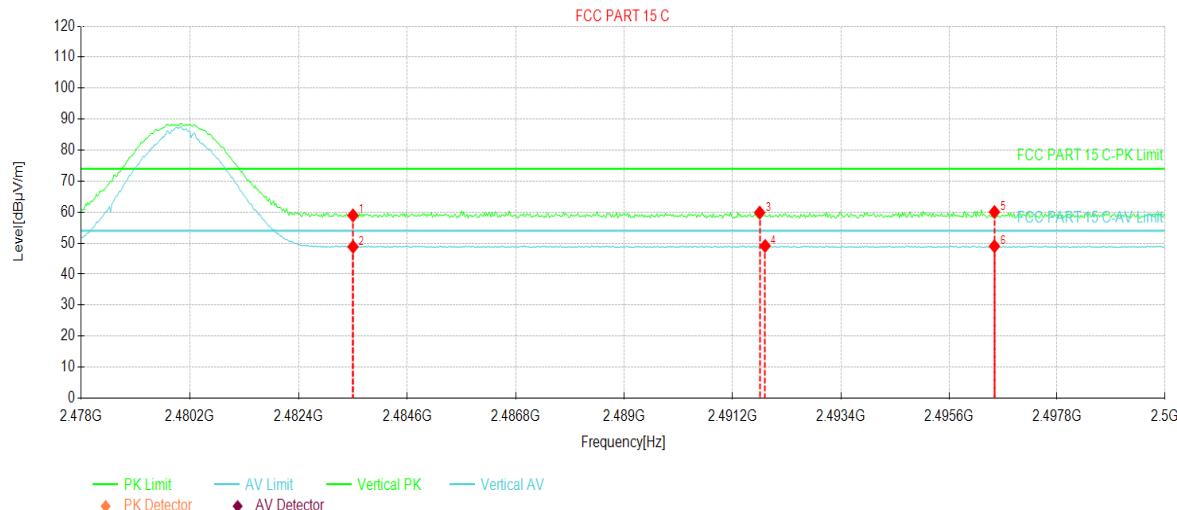


NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2483.5	23.24	58.96	35.72	74.00	15.04	275	142	PK	Vertical
2	2483.5	13.10	48.82	35.72	54.00	5.18	296	153	AV	Vertical
3	2491.7	24.15	59.85	35.70	74.00	14.15	315	136	PK	Vertical
4	2491.8	13.40	49.10	35.70	54.00	4.90	342	144	AV	Vertical
5	2496.5	24.36	60.05	35.69	74.00	13.95	358	151	PK	Vertical
6	2496.5	13.32	49.01	35.69	54.00	4.99	16	159	AV	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

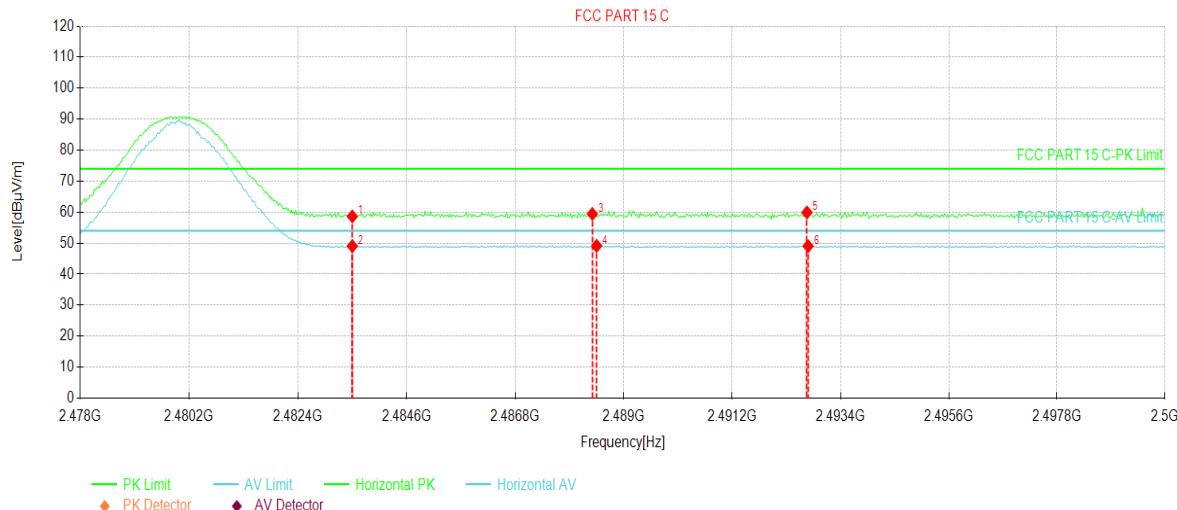



NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	2483.5	22.89	58.61	35.72	74.00	15.39	347	134	PK	Horizontal
2	2483.5	13.33	49.05	35.72	54.00	4.95	301	143	AV	Horizontal
3	2488.3	23.73	59.44	35.71	74.00	14.56	289	152	PK	Horizontal
4	2488.4	13.42	49.13	35.71	54.00	4.87	246	161	AV	Horizontal
5	2492.7	24.18	59.88	35.70	74.00	14.12	239	137	PK	Horizontal
6	2492.7	13.33	49.03	35.70	54.00	4.97	258	130	AV	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

6.4 Spurious Emission


6.4.1 Radiated Emission Method

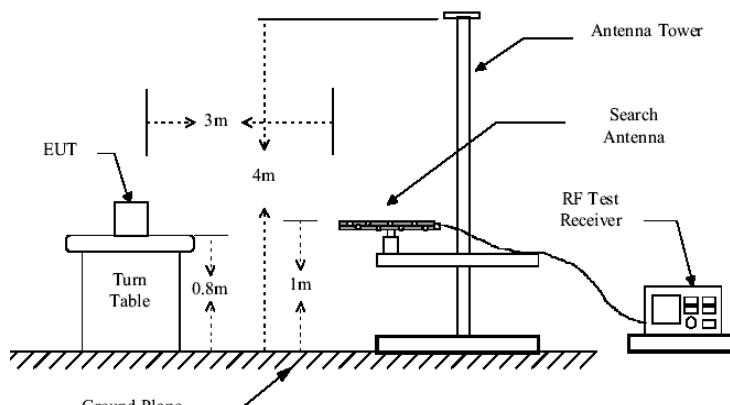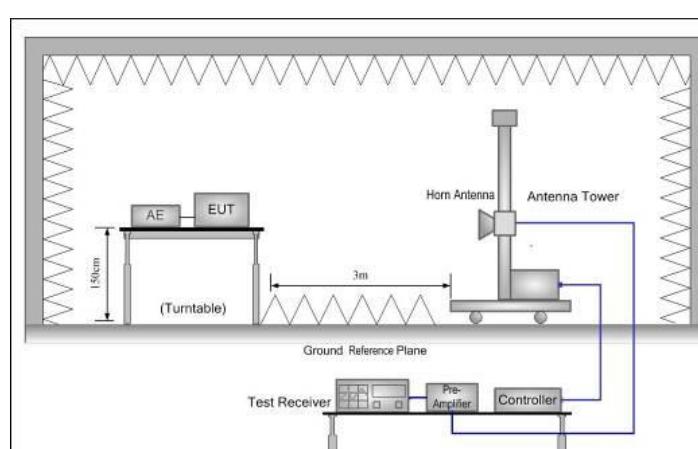Test Requirement:	FCC Part 15 C Section 15.209													
Test Frequency Range:	9 kHz to 25 GHz													
Test Distance:	3m													
Receiver setup:	Frequency	Detector	RBW	VBW	Remark									
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value									
	Above 1GHz	Peak	1MHz	3MHz	Peak Value									
Limit:		RMS	1MHz	3MHz	Average Value									
Frequency	Limit (dBuV/m @3m)		Remark											
30MHz-88MHz	40.0		Quasi-peak Value											
88MHz-216MHz	43.5		Quasi-peak Value											
216MHz-960MHz	46.0		Quasi-peak Value											
960MHz-1GHz	54.0		Quasi-peak Value											
Above 1GHz	54.0		Average Value											
	Test setup:		74.0		Peak Value									
Below 1GHz														
														
														
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz) /1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 													

	<ol style="list-style-type: none">2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Non-hopping mode
Test results:	Pass
Remark:	<ol style="list-style-type: none">1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.2. 9 kHz to 30 MHz is noise floor and lower than the limit 20dB, so only shows the data of above 30MHz in this report.

Measurement Data (worst case):**Below 1GHz:**

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

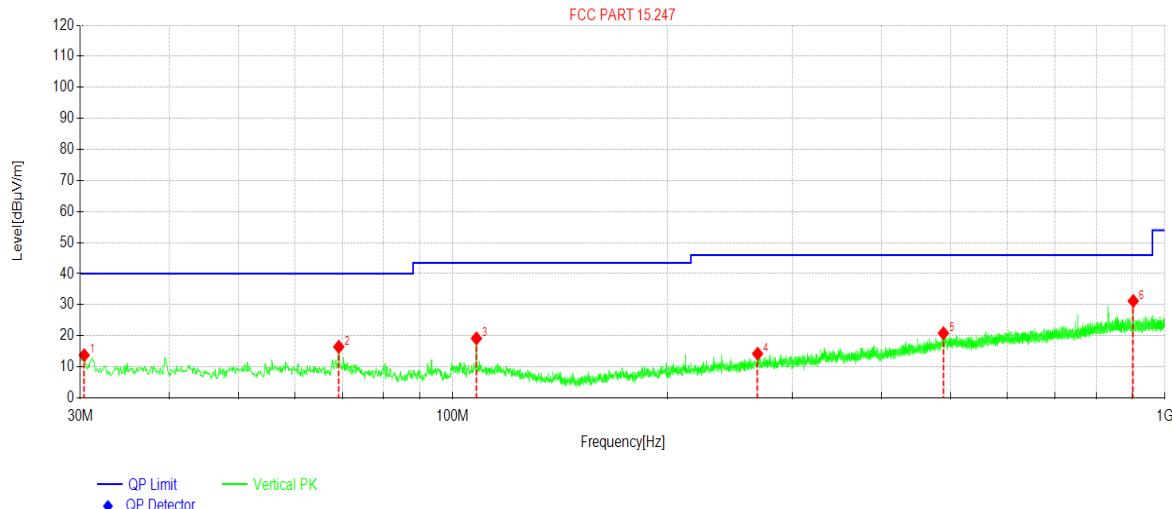
**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	30.388	29.82	13.75	-16.07	40.00	26.25	351	121	PK	Vertical
2	69.191	33.17	16.44	-16.73	40.00	23.56	328	115	PK	Vertical
3	107.99	35.08	19.14	-15.94	43.50	24.36	279	108	PK	Vertical
4	267.96	27.72	14.21	-13.51	46.00	31.79	249	116	PK	Vertical
5	488.66	28.17	20.81	-7.36	46.00	25.19	64	123	PK	Vertical
6	902.60	32.58	31.21	-1.37	46.00	14.79	52	130	PK	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
- The Aux Factor is a notch filter switch box loss, this item is not used.

Product name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 3.85V	Environment:	Temp: 24°C Huni: 57%

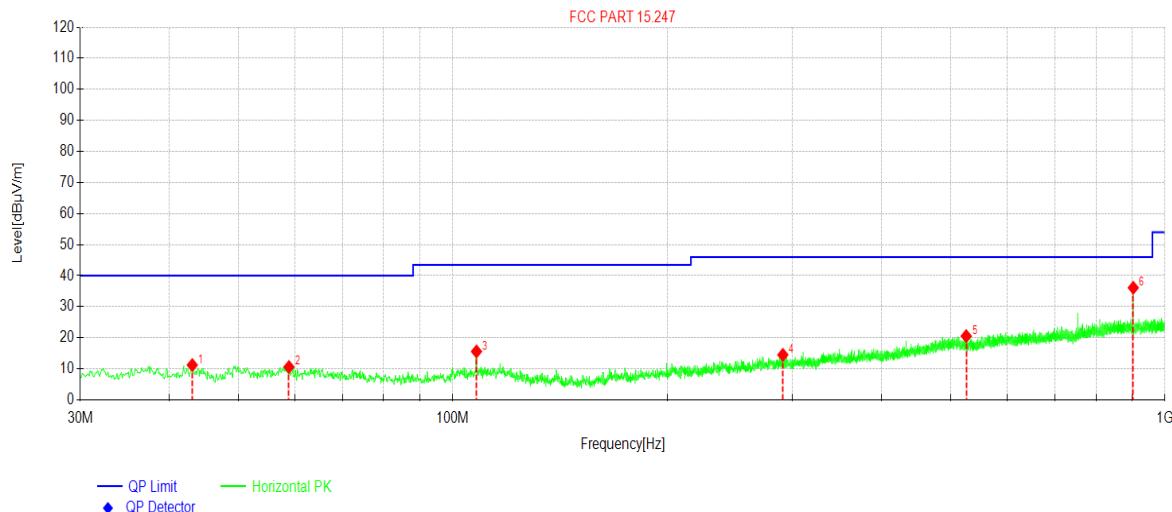

Suspected Data List										
NO	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	43.096	26.03	11.21	-14.82	40.00	28.79	345	130	PK	Horizontal
2	58.908	25.52	10.59	-14.93	40.00	29.41	289	128	PK	Horizontal
3	107.99	31.54	15.60	-15.94	43.50	27.90	98	115	PK	Horizontal
4	290.76	27.39	14.51	-12.88	46.00	31.49	105	110	PK	Horizontal
5	526.01	27.43	20.54	-6.89	46.00	25.46	246	108	PK	Horizontal
6	902.60	37.47	36.10	-1.37	46.00	9.90	230	102	PK	Horizontal

Remark:


- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
- The Aux Factor is a notch filter switch box loss, this item is not used.

Above 1GHz:

Remark:

1. When testing spurs above 1GHz, use Band Reject Filter Group to filter out fundamental signal
2. Tested all modulation modes and found that GFSK is the worst case mode, the report only reflects the worst mode

Product Name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	BT Tx Low CH
Test Frequency:	1 GHz ~ 25 GHz	Polarization:	Vertical
Test Voltage:	DC 3.85V	Environment:	Temp: 21.2°C Huni: 52%

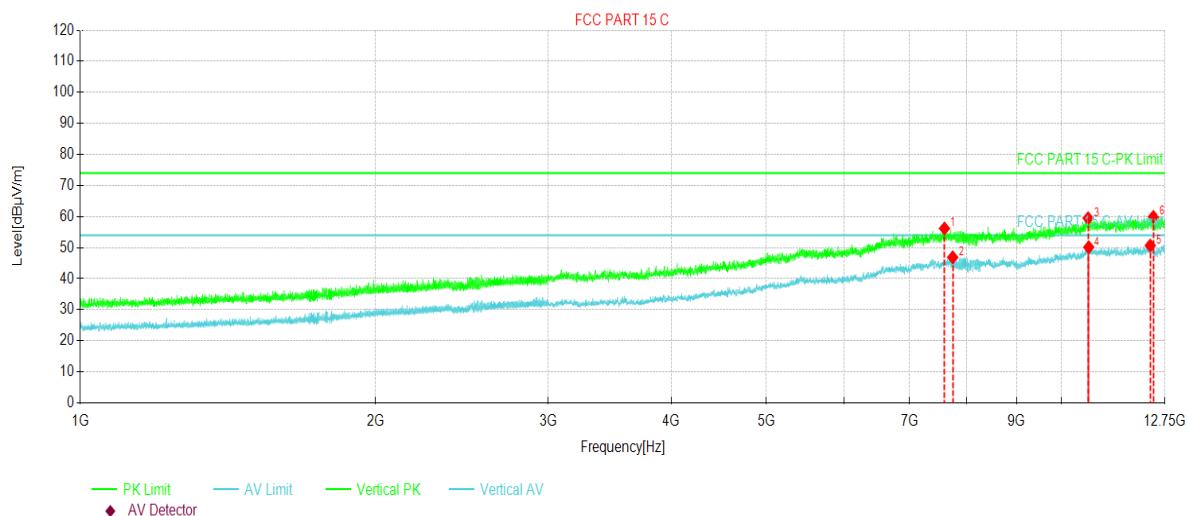


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	7599.56	55.15	56.18	1.03	74.00	17.82	304	160	PK	Vertical
2	7748.25	46.10	46.88	0.78	54.00	7.12	281	152	AV	Vertical
3	10645.22	52.39	59.47	7.08	74.00	14.53	15	142	PK	Vertical
4	10659.84	43.00	50.13	7.13	54.00	3.87	354	153	AV	Vertical
5	12316.13	42.83	50.66	7.83	54.00	3.34	314	133	AV	Vertical
6	12407.53	52.15	59.91	7.76	74.00	14.09	358	142	PK	Vertical

Remark:

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of above 12.75GHz are lower than the limit 20dB and not show in test report.

Product Name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	BT Tx Low CH
Test Frequency:	1 GHz ~ 25 GHz	Polarization:	Horizontal
Test Voltage:	DC 3.85V	Environment:	Temp: 21.2°C Huni: 52%

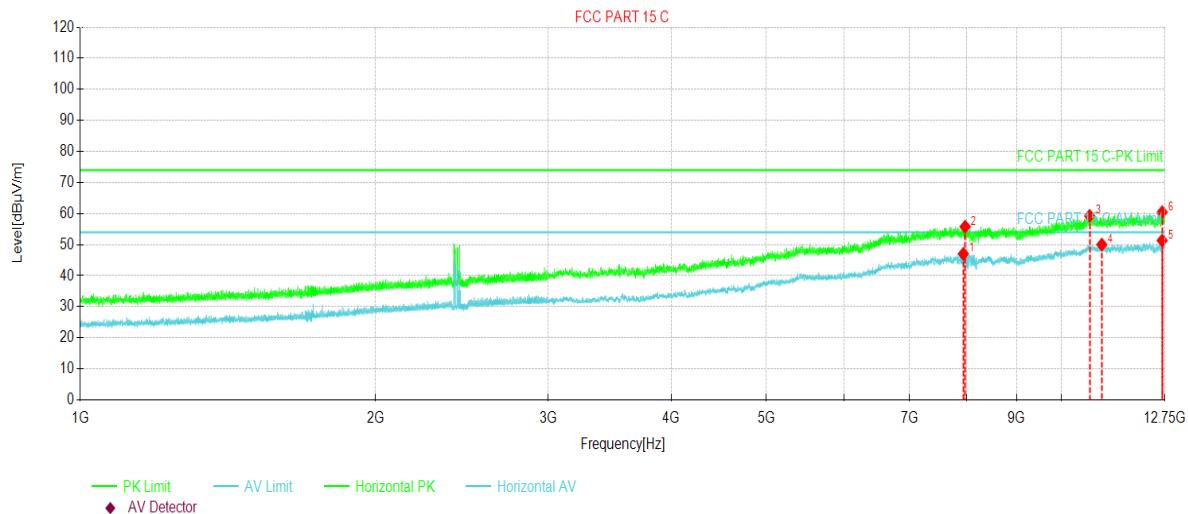


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	7943.25	46.07	47.03	0.96	54.00	6.97	150	135	AV	Horizontal
2	7976.16	54.83	55.76	0.93	74.00	18.24	190	141	PK	Horizontal
3	10683.00	52.04	59.25	7.21	74.00	14.75	240	150	PK	Horizontal
4	10992.56	42.55	50.01	7.46	54.00	3.99	284	162	AV	Horizontal
5	12664.69	43.07	51.33	8.26	54.00	2.67	319	133	AV	Horizontal
6	12665.91	52.17	60.44	8.27	74.00	13.56	330	144	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of above 12.75GHz are lower than the limit 20dB and not show in test report.

Product Name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	BT Tx Mid CH
Test Frequency:	1 GHz ~ 25 GHz	Polarization:	Vertical
Test Voltage:	DC 3.85V	Environment:	Temp: 21.2°C Huni: 52%

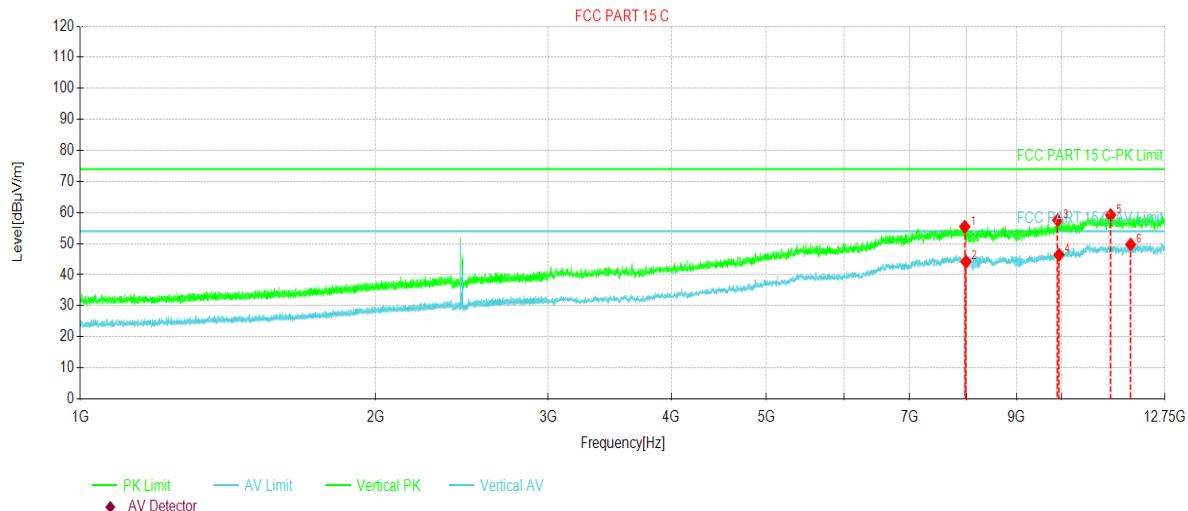


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	7970.06	54.50	55.43	0.93	74.00	18.57	249	143	PK	Vertical
2	7990.78	43.28	44.19	0.91	54.00	9.81	270	138	AV	Vertical
3	9911.53	52.45	57.56	5.11	74.00	16.44	319	151	PK	Vertical
4	9942.00	41.35	46.38	5.03	54.00	7.62	348	159	AV	Vertical
5	11224.13	51.64	59.21	7.57	74.00	14.79	320	160	PK	Vertical
6	11764.03	41.78	49.72	7.94	54.00	4.28	289	171	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of above 12.75GHz are lower than the limit 20dB and not show in test report.

Product Name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	BT Tx Mid CH
Test Frequency:	1 GHz ~ 25 GHz	Polarization:	Horizontal
Test Voltage:	DC 3.85V	Environment:	Temp: 21.2°C Huni: 52%

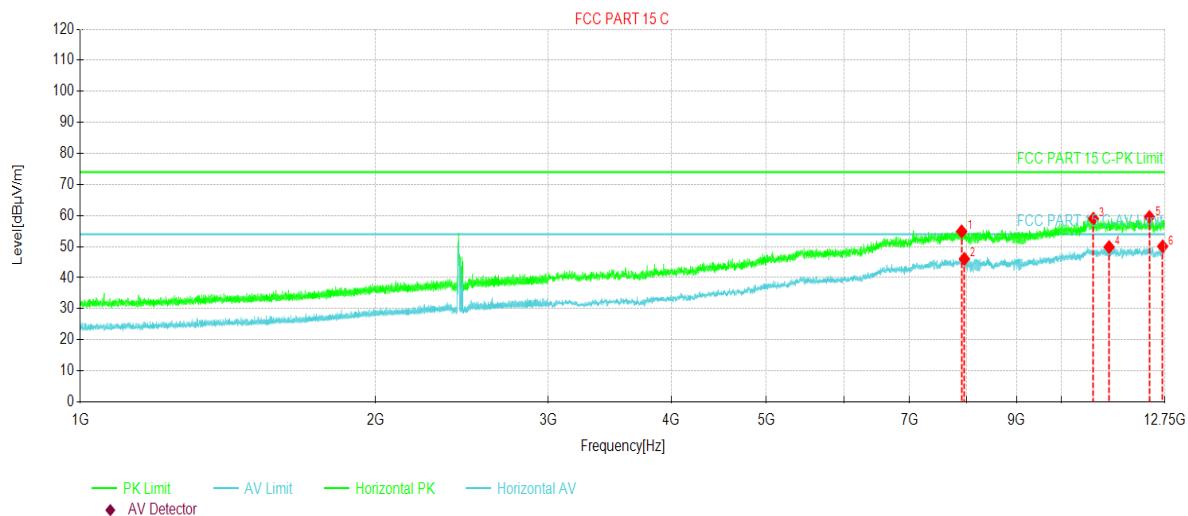


Suspected Data List										
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	7911.56	53.89	54.89	1.00	74.00	19.11	11	140	PK	Horizontal
2	7962.75	45.12	46.06	0.94	54.00	7.94	357	157	AV	Horizontal
3	10776.84	51.82	58.99	7.17	74.00	15.01	259	160	PK	Horizontal
4	11183.91	42.51	49.86	7.35	54.00	4.14	246	155	AV	Horizontal
5	12294.19	51.71	59.54	7.83	74.00	14.46	321	131	PK	Horizontal
6	12681.75	41.77	50.09	8.32	54.00	3.91	303	137	AV	Horizontal

Remark:

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of above 12.75GHz are lower than the limit 20dB and not show in test report.

Product Name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	BT Tx High CH
Test Frequency:	1 GHz ~ 25 GHz	Polarization:	Vertical
Test Voltage:	DC 3.85V	Environment:	Temp: 21.2°C Huni: 52%

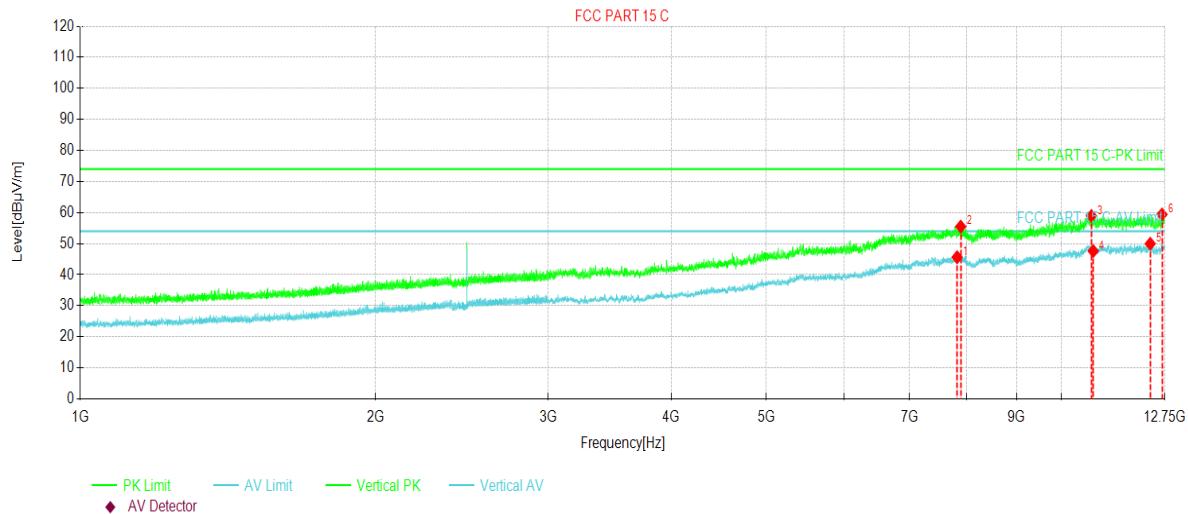


Suspected Data List										
NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	7827.47	44.60	45.62	1.02	54.00	8.38	302	142	AV	Vertical
2	7894.50	54.46	55.47	1.01	74.00	18.53	288	151	PK	Vertical
3	10729.31	51.69	58.91	7.22	74.00	15.09	310	137	PK	Vertical
4	10773.19	40.45	47.62	7.17	54.00	6.38	342	146	AV	Vertical
5	12316.13	42.14	49.97	7.83	54.00	4.03	301	153	AV	Vertical
6	12661.03	51.15	59.40	8.25	74.00	14.60	273	161	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of above 12.75GHz are lower than the limit 20dB and not show in test report.

Product Name:	LTE/UMTS/GSM mobile phone	Product model:	5048A
Test By:	Mike	Test mode:	BT Tx High CH
Test Frequency:	1 GHz ~ 25 GHz	Polarization:	Horizontal
Test Voltage:	DC 3.85V	Environment:	Temp: 21.2°C Huni: 52%

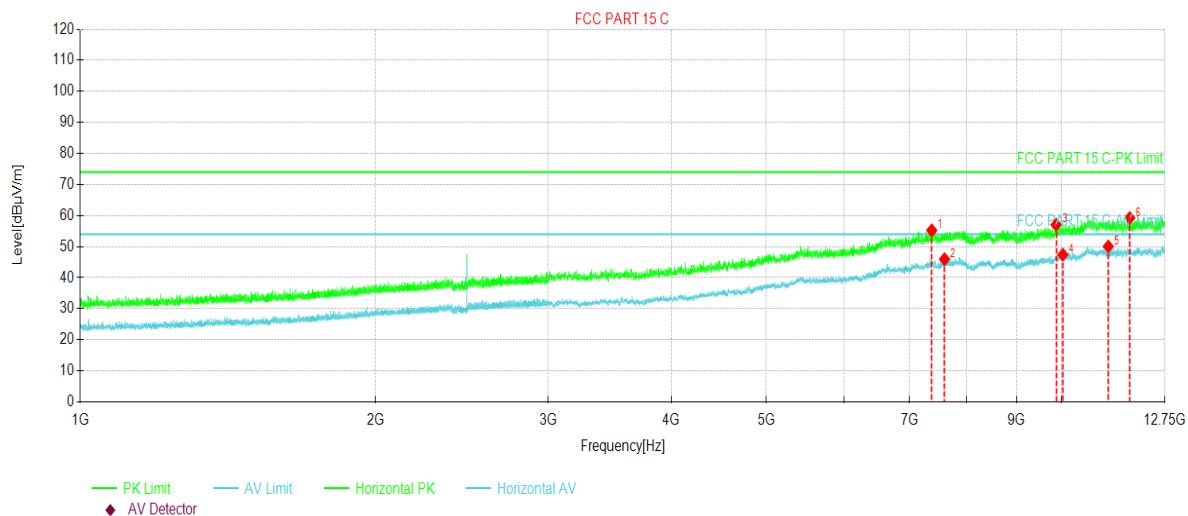

Suspected Data List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Height [cm]	Trace	Polarity
1	7375.31	55.05	55.23	0.18	74.00	18.77	259	151	PK	Horizontal
2	7600.78	44.93	45.96	1.03	54.00	8.04	233	161	AV	Horizontal
3	9876.19	52.15	57.06	4.91	74.00	16.94	313	140	PK	Horizontal
4	10033.4	42.44	47.42	4.98	54.00	6.58	291	146	AV	Horizontal
5	11160.75	42.77	50.06	7.29	54.00	3.94	314	131	AV	Horizontal
6	11737.22	51.22	59.20	7.98	74.00	14.80	350	137	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of above 12.75GHz are lower than the limit 20dB and not show in test report.

7 Appendix

The below Appendix was detail result tested by SGS-CSTC Standards Technical Services, Co., Ltd.Shenzhen Branch.

(Date of Test: 2019/8/2-2019/8/21).

<i>Appendix</i>	<i>Item</i>
<i>Appendix- Bluetooth</i>	<i>BT</i>