



# TEST REPORT

No. I20Z60720-EMC02

for

**TCL Communication Ltd.**

**GSM/UMTS/LTE Mobile phone**

**Model Name: 5007W,5007Z**

**FCC ID: 2ACCJH128**

**with**

**Hardware Version: 04**

**Software Version: 7HS05000**

**Issued Date: 2020-06-30**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

**Test Laboratory:**

**CTT-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## REPORT HISTORY

Report Number	Revision	Description	Issue Date
I20Z60720-EMC02	Rev.0	1 <sup>st</sup> edition	2020-06-22
I20Z60720-EMC02	Rev.1	Adding the 1xRTT power	2020-06-30

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. INTRODUCTION &amp; ACCREDITATION.....</b>	<b>4</b>
<b>1.2. TESTING LOCATION .....</b>	<b>4</b>
<b>1.3. TESTING ENVIRONMENT.....</b>	<b>5</b>
<b>1.4. PROJECT DATA .....</b>	<b>5</b>
<b>1.5. SIGNATURE .....</b>	<b>5</b>
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>6</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>6</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1. ABOUT EUT .....</b>	<b>7</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT .....</b>	<b>7</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>6.1. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>6.2. STATEMENTS.....</b>	<b>10</b>
<b>7. TEST FACILITIES UTILIZED .....</b>	<b>11</b>
<b>TEST SOFTWARE UTILIZED .....</b>	<b>11</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
<b>ANNEX A: DETAILED TEST RESULTS .....</b>	<b>12</b>
<b>A.1 OUTPUT POWER.....</b>	<b>12</b>
<b>A.2 EMISSION LIMIT .....</b>	<b>15</b>
<b>ANNEX B: PERSONS INVOLVED IN THIS TESTING .....</b>	<b>19</b>

## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,  
Haidian District, Beijing, P. R. China 100191

Location 3:CTTL (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology  
Development Area, Beijing, P. R. China 100176

### **1.3. Testing Environment**

Normal Temperature: 15-35°C  
Extreme Temperature: -10/+55°C  
Relative Humidity: 20-75%

### **1.4. Project data**

Testing Start Date: 2020-05-15  
Testing End Date: 2020-06-06

### **1.5. Signature**



Zhang Ying  
(Prepared this test report)



Wang Junqing  
(Reviewed this test report)



Liu Baodian  
(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	GSM/UMTS/LTE Mobile phone
Model Name	5007W,5007Z
FCC ID	2ACCJH128
Antenna	Embedded
Output power	24.49dBm maximum EIRP measured for CDMA BC(1)
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-20°C to +60°C

Note: Photographs of EUT are shown in ANNEX A of this test report.

#### **3.2. Internal Identification of EUT**

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT66a	015735000206684	04	7HS05000	2020-05-15

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

AE ID*	Description
AE1	Battery
AE1	
Model	TLp034F1
Manufacturer	BYD
Capacitance	4000mAh

\*AE ID: is used to identify the test sample in the lab internally.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-19
FCC Part 22	PUBLIC MOBILE SERVICES	Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	10-1-19
ANSI/TIA-102.CAAA -E	DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

## 5. LABORATORY ENVIRONMENT

**Control room / conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber 2** (8.6 meters X 6.1 meters X 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (SvSWR)	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

**Semi-anechoic chamber 2 / Fully-anechoic chamber 3** (10 meters X 6.7 meters X 6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	<±3.5 dB, 3 m distance
Site voltage standing-wave ratio (SvSWR)	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of test results

Abbreviations used in this clause:				
Verdict Column	P	Pass		
	F	Fail		
	NA	Not applicable		
	NM	Not measured		
Location Column	1/2/3/4	The test is performed in test location 1, 2, 3 or 4 which are described in section 1.1 of this report		

#### CDMA800

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Output Power	22.913(a.2)	ANNEX A	P	2
2	Emission Limit	22.917(a), 2.1051	ANNEX A	P	2

#### CDMA1900

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Output Power	24.232(c)	ANNEX A	P	2
2	Emission Limit	24.238(a), 2.1051	ANNEX A	P	2

### 6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by TMC according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1. This report only deals with the CDMA functions among the features described in section 3.

## 7. Test Facilities Utilized

NO.	Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
1	Universal Radio Communication Tester	CMU200	108646	R&S	2020-12-24	1 year
2	Spectrum Analyzer	FSU	200030	R&S	2021-06-01	1 year
3	Climate Chamber	SH-242	93008556	ESPEC	2020-12-21	3 year
4	Wireless Communication Test Set	E5515E	MY53211012	Agilent	2020-08-06	1 year
5	EMI Antenna	VULB9163	9163-235	Schwarzbeck	2021-03-12	1 year
6	EMI Antenna	3117	00058889	ETS-Lindgren	2020-11-18	1 year
7	EMI Antenna	3117	00119021	ETS-Lindgren	2021-01-14	1 year
8	EMI Antenna	9117	177	Schwarzbeck	2021-10-12	1 year
9	Signal Generator	N5183A	MY49060052	R&S	2021-06-24	1 year
10	Test Receiver	E4440A	MY48250642	Agilent	2021-03-13	1 year
11	Universal Radio Communication Tester	CMW500	143008	R&S	2020-11-26	1 year
12	Power Amplifier	5S1G4	0341863	AR	/	

## Test Software Utilized

Test Item	Test Software and Version	Software Vendor
ERP/EIRP/RSE	Tile V7.2.3.5	ETS-Lindgren

## 8. Measurement Uncertainty

Note: Expanded measurement uncertainty for this test item is  $U = 5.16 \text{ dB}$ ,  $k = 2$ .

## ANNEX A: Detailed Test Results

## A.1 OUTPUT POWER

## Reference

## FCC: CFR Part 22.913

### A.1.1 Summary

During the process of testing, the EUT was controlled via Agilent Universal Radio Communication Tester (E5515C) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

### A.1.2 Radiated

### A.1.2.1 Description

This is the test for the maximum radiated power from the EUT.

Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts".

Part 24.232(c) specifies "Mobile and portable stations are limited to 2 watts EIRP".

Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695–1710 MHz and 1755–1780 MHz bands are limited to 1 watt EIRP".

### A.1.2.2 Method of Measurement

NASI C63.26 chapter 5.2.5.5: when working in decibels (i.e., logarithmic scale), the ERP and EIRP represent the sum of the transmit antenna gain (in dBd or dBi, respectively) and the conducted RF output power (expressed in dB relative to watts or milliwatts).

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Mea}} + G_T$$

Where

ERP or EIRP      effective radiated power or equivalent isotropically radiated power, respectively  
(expressed in the same units as  $P_{\text{Mea}}$  , e.g., dBm or dBW)

$P_{\text{Mea}}$  measured transmitter output power or PSD, in dBm or dBW

$G_T$  gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{dBd} = \text{dBi} - 2.15$$

### CDMA800- ERP

#### Limits

Band	Peak ERP (dBm)
CDMA800(BC0)	≤38.45dBm (7W)

#### Measurement result

#### EVDO Rev.0

Frequency (MHz)	Conducted output power (dBm)	G <sub>T</sub> (dBd)	Radiated output power (dBm)
824.70	23.97	-5.45	18.52
836.52	24.37	-5.45	18.92
848.31	24.62	-5.45	19.17

#### EVDO Rev.A

Frequency (MHz)	Conducted output power (dBm)	G <sub>T</sub> (dBd)	Radiated output power (dBm)
824.70	23.99	-5.45	18.54
836.52	24.39	-5.45	18.94
848.31	24.61	-5.45	19.16

#### EVDO 1x RTT

Frequency (MHz)	Conducted output power (dBm)	G <sub>T</sub> (dBd)	Radiated output power (dBm)
824.70	23.94	-5.45	18.49
836.52	24.21	-5.45	18.76
848.31	24.42	-5.45	18.97

### CDMA1900- EIRP

#### Limits

Band	Peak EIRP (dBm)
CDMA1900(BC1)	≤33dBm (2W)

#### Measurement result

#### EVDO Rev.0

Frequency (MHz)	Conducted output power (dBm)	G <sub>T</sub> (dBi)	Radiated output power (dBm)
1851.25	24.00	-0.4	23.60
1880.00	24.03	-0.4	23.63
1908.75	24.04	-0.4	23.64

**EVDO Rev.A**

Frequency (MHz)	Conducted output power (dBm)	$G_T$ (dBi)	Radiated output power (dBm)
1851.25	24.21	-0.4	23.81
1880.00	24.17	-0.4	23.77
1908.75	24.17	-0.4	23.77

**EVDO 1x RTT**

Frequency (MHz)	Conducted output power (dBm)	$G_T$ (dBi)	Radiated output power (dBm)
1851.25	24.89	-0.4	24.49
1880.00	24.80	-0.4	24.40
1908.75	24.77	-0.4	24.37

## A.2 EMISSION LIMIT

### Reference

FCC: CFR 2.1051, Part 22.917(a), 24.238(a).


#### A.2.1 Measurement Method

The measurements procedures in TIA-603-E-2016 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in Part 22.917(a) and 24.238(a). The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of CDMA800 and CDMA 1900.

**The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

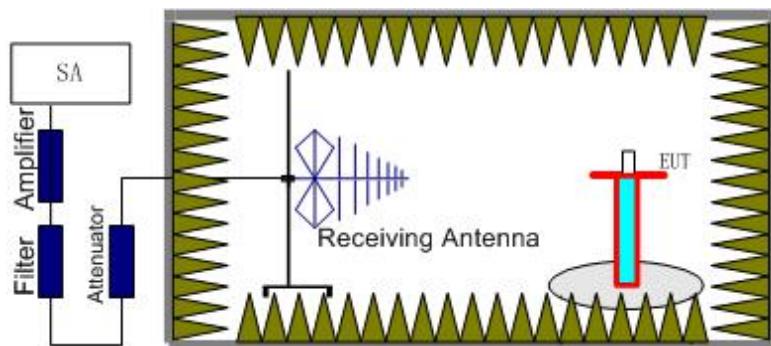

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

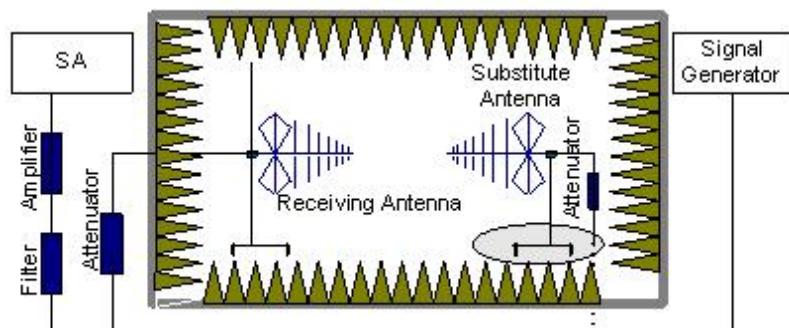

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is

connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dB}$ .

### A.2.2 Measurement Limit

Part 22.917(a) and 24.238(a) all specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the CDMA BC0 (836.52MHz, 848.31MHz and 824.7MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the CDMA BC0 or CDMA BC1 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

**The worst cases:**
**CDMA BC0, Channel 384/836.52MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1672.01	-55.41	-3.58	5.19	2.15	-55.95	-13.00	42.90	V
2510.00	-40.83	-4.63	6.12	2.15	-41.49	-13.00	28.50	V
3342.02	-46.58	-5.31	7.82	2.15	-46.22	-13.00	33.20	H
4192.02	-55.13	-6.19	9.09	2.15	-54.38	-13.00	41.40	H
5018.01	-53.71	-6.57	9.93	2.15	-52.50	-13.00	39.50	V
5865.01	-53.28	-7.28	10.53	2.15	-52.18	-13.00	39.20	H

**CDMA BC0, Channel 777/848.31MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1698.01	-55.18	-3.60	5.14	2.15	-55.79	-13.00	42.80	V
2544.00	-43.24	-4.66	6.18	2.15	-43.87	-13.00	30.90	H
3390.02	-55.51	-5.35	7.94	2.15	-55.07	-13.00	42.10	V
4240.02	-54.69	-6.25	9.14	2.15	-53.95	-13.00	41.00	H
5091.01	-53.81	-6.75	10.03	2.15	-52.68	-13.00	39.70	V
5944.01	-53.76	-7.47	10.51	2.15	-52.87	-13.00	39.90	V

**CDMA BC0, Channel 1013/824.7MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1650.01	-60.06	-3.57	5.23	2.15	-60.55	-13.00	47.50	V
2474.00	-46.93	-4.60	6.02	2.15	-47.66	-13.00	34.70	V
3304.02	-55.42	-5.29	7.73	2.15	-55.13	-13.00	42.10	V
4118.02	-55.66	-6.04	9.02	2.15	-54.83	-13.00	41.80	H
4939.01	-54.71	-6.71	9.84	2.15	-53.73	-13.00	40.70	H
5766.01	-53.24	-7.24	10.55	2.15	-52.08	-13.00	39.10	H

**CDMA BC1, Channel 25/1851.25MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.02	-56.18	-6.43	8.48	-54.13	-13.00	41.13	V
5557.02	-56.04	-7.19	10.59	-52.64	-13.00	39.64	H
7402.01	-55.64	-8.12	12.08	-51.68	-13.00	38.68	H
9261.01	-54.56	-9.06	13.26	-50.36	-13.00	37.36	V
11105.01	-51.79	-9.81	13.18	-48.42	-13.00	35.42	V
12963.01	-49.40	-10.48	13.48	-46.40	-13.00	33.40	V

**CDMA BC1, Channel 600/1880.00MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3751.02	-56.32	-6.29	8.55	-54.06	-13.00	41.06	V
5639.02	-56.51	-7.27	10.57	-53.21	-13.00	40.21	H
7526.01	-54.48	-8.28	12.22	-50.54	-13.00	37.54	V
9393.01	-54.83	-9.04	13.34	-50.53	-13.00	37.53	V
11271.01	-49.81	-9.82	13.15	-46.48	-13.00	33.48	V
13157.01	-48.07	-10.69	13.72	-45.04	-13.00	32.04	V

**CDMA BC1, Channel 1175/1908.75MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3817.02	-56.38	-6.09	8.64	-53.83	-13.00	40.83	H
5719.02	-55.72	-7.30	10.56	-52.46	-13.00	39.46	V
7660.01	-54.28	-8.25	12.33	-50.20	-13.00	37.20	V
9572.01	-53.11	-9.28	13.33	-49.06	-13.00	36.06	V
11470.01	-49.86	-9.89	13.11	-46.64	-13.00	33.64	V
13369.01	-47.92	-10.57	14.02	-44.47	-13.00	31.47	V

Sample calculation: 3817.02MHz

$$\begin{aligned}
 \text{Peak ERP (dBm)} &= \text{PMea}(-56.38\text{dBm}) + \text{Pcl}(-6.09\text{dB}) + \text{Ga} (8.64 \text{ dBi}) \\
 &= -53.83\text{dBm}
 \end{aligned}$$

**ANNEX B: Persons involved in this testing**

Test Item	Tester
Emission Limit	Chen Tianwei, Zhang Baoguang

**\*\*\*END OF REPORT\*\*\***