



FCC PART 15C TEST REPORT No.I22Z61606-IOT03

for

TCL Communication Ltd.

GSM/UMTS/LTE /NR Mobile phone

T609DL

With

FCC ID: 2ACCJH168

Hardware Version: 04

Software Version: JSS8

Issued Date: 2022-12-08

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22Z61606-IOT03	Rev.0	1st edition	2022-12-08

CONTENTS

CONTENTS	3
1. TEST LATORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	5
1.4. PROJECT DATE	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS	9
6.3. TEST CONDITIONS	9
7. TEST EQUIPMENTS UTILIZED	10
8. MEASUREMENT UNCERTAINTY	10
8.1. TRANSMITTER OUTPUT POWER	10
8.2. PEAK POWER SPECTRAL DENSITY	10
8.3. OCCUPIED 6dB BANDWIDTH	10
8.4. BAND EDGES COMPLIANCE	10
8.5. SPURIOUS EMISSIONS	10
ANNEX A: MEASUREMENT RESULTS	11
A.1. MEASUREMENT METHOD	11
A.2. MAXIMUM PEAK OUTPUT POWER	11
A.2.1 ANTENNA GAIN	11
A.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED	11
A.3. PEAK POWER SPECTRAL DENSITY	13
A.4. OCCUPIED 6dB BANDWIDTH	13



No.I22Z61606-IOT03

ANNEX B: EUT PARAMETERS.....	19
ANNEX C: ACCREDITATION CERTIFICATE.....	19

1. TEST LATORATORY

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.3. TestingEnvironment

Normal Temperature: 15-35℃


Relative Humidity: 20-75%

1.4. Project date

Testing Start Date: 2022-09-19


Testing End Date: 2022-12-08

1.5. Signature



Xie Xiuzhen

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Pang Shuai

(Approved this test report)

2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Telephone: +86 755 3661 1621
Fax: +86 755 3661 2000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Telephone: +86 755 3661 1621
Fax: +86 755 3661 2000-81722

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

EQUIPMENT(AE)

3.1. About EUT

Description	GSM/UMTS/LTE /NR Mobile phone
Model name	T609DL
FCC ID	2ACCJH168
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.85V

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	016320000212823	04	JSS8

*EUT ID: is used to identify the test sample in the lab internally.
EUT1 is used for Conduction test.

3.3. General Description

Equipment Under Test (EUT) is a model of GSM/UMTS/LTE /NR Mobile phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E:	
	15.205 Restricted bands of operation;	2018
	15.209 Radiated emission limits, general requirements;	
	15.407 General technical requirements	
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from	2013
	Low-Voltage Electrical and Electronic Equipment in the	
	Range of 9 kHz to 40 GHz	
UNII: KDB 789033	General U-NII Test Procedures New Rules v02r01	2017-12
D02		

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2023-05-15
2	Test Receiver	ESCI	100344	R&S	1 year	2023-03-21
3	LISN	ENV216	101200	R&S	1 year	2023-06-29
4	Shielding Room	S81	/	ETS-Lindgren	/	/

8. Measurement Uncertainty

8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5. Spurious Emissions

Conducted (k=1.96)


Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

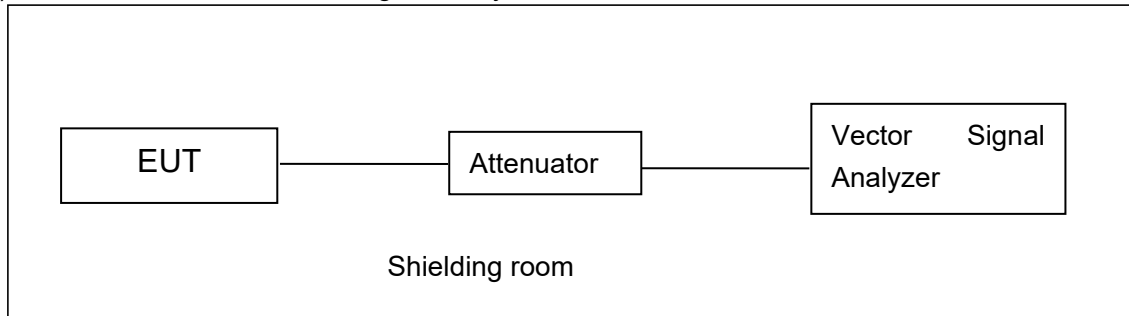

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

A.2.1 Antenna Gain

Antenna gain is -0.68dBi and the value is supplied by the applicant or manufacturer.

A.2.2. Maximum Average Output Power-Conducted

Measurement Results:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	18.92	19.28	18.53

The data rate 6Mbps is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	17.98	17.82	17.75

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac (20MHz)	MCS0	17.95	17.86	17.61

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	13.92	14.12

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac (40MHz)	MCS0	12.62	12.83

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac (80MHz)	MCS0	12.27

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

The duty cycle of all mode are 100%

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	3.86	P
	157	3.14	P
	165	3.12	P
802.11n HT20	149	3.48	P
	157	3.26	P
	165	2.82	P
802.11n HT40	151	-3.30	P
	159	-3.42	P
802.11ac HT80	155	-8.58	P

Conclusion: PASS

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
802.11a	149	Fig.1	16.30	P
	157	Fig.2	17.55	P
	165	Fig.3	16.35	P
802.11n HT20	149	Fig.4	17.60	P
	157	Fig.5	17.55	P
	165	Fig.6	17.60	P
802.11n HT40	151	Fig.7	36.32	P
	159	Fig.8	36.32	P

802.11ac HT80	155	Fig.9	76.32	P
---------------	-----	-------	-------	---

Conclusion: PASS

Test graphs as below:

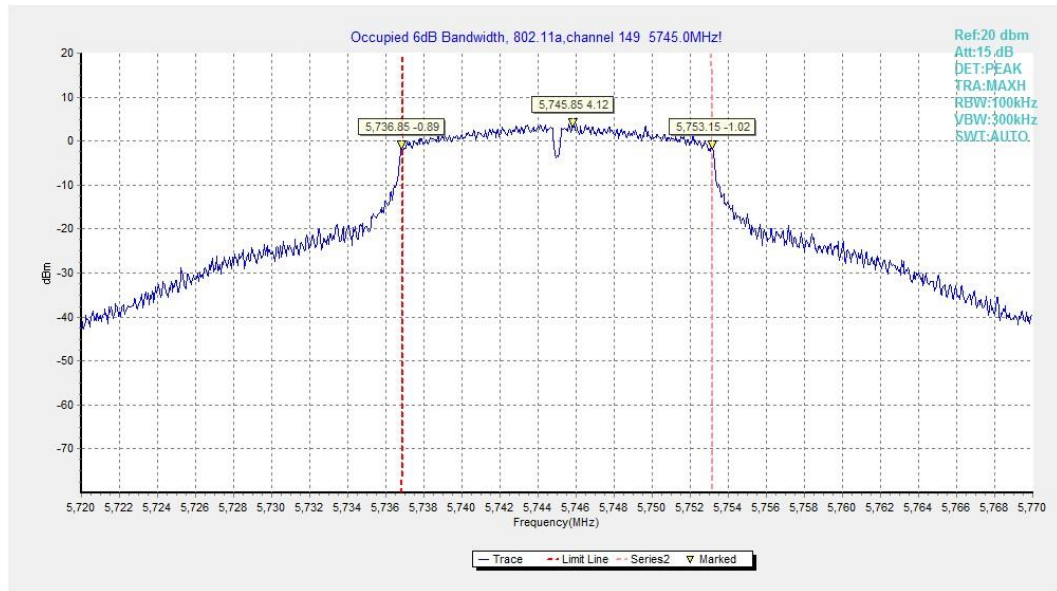


Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)

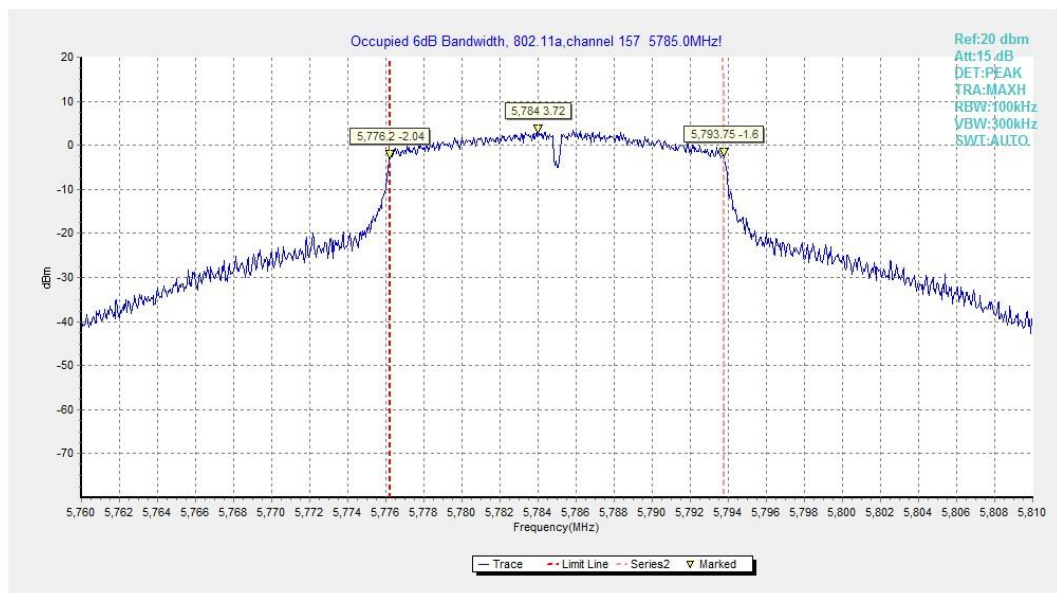


Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)

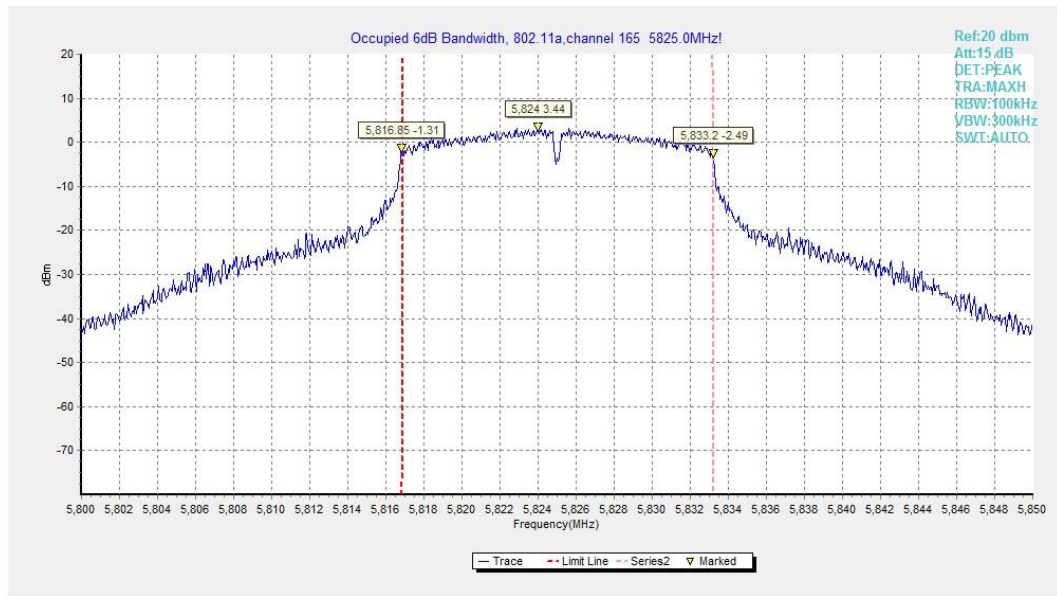


Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)

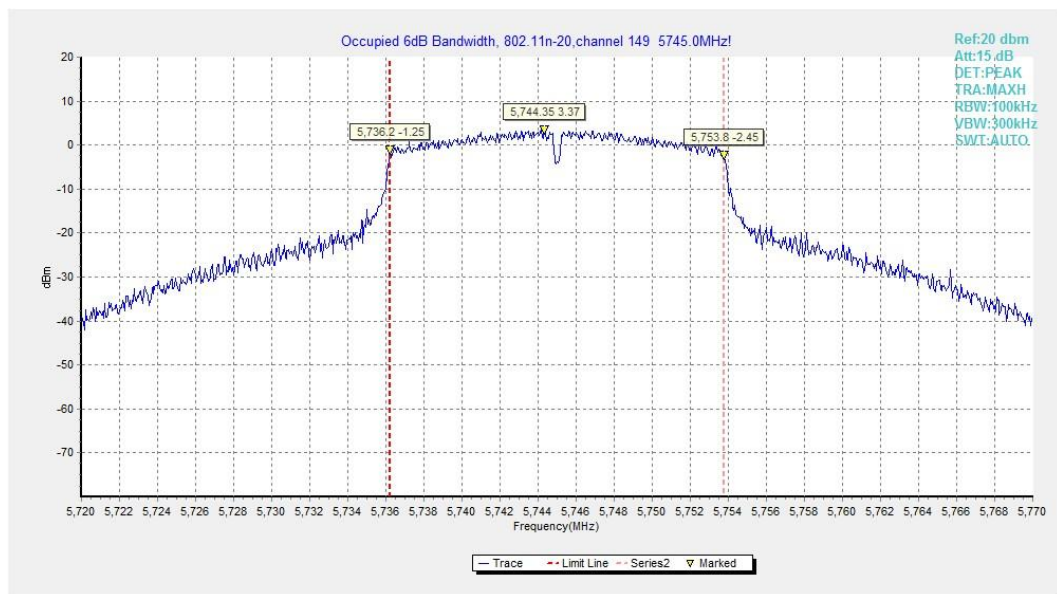


Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

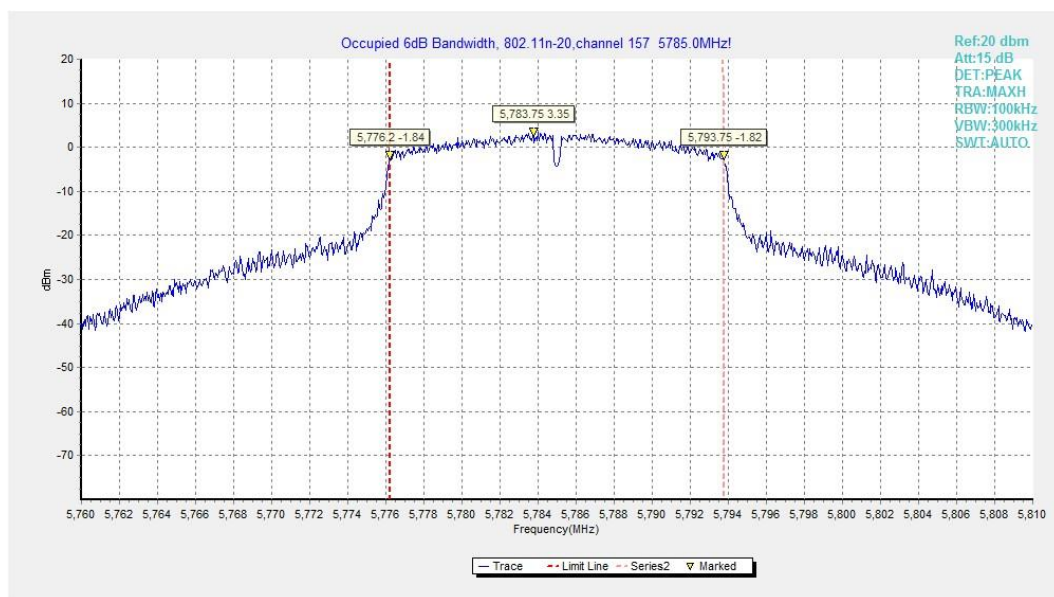


Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)

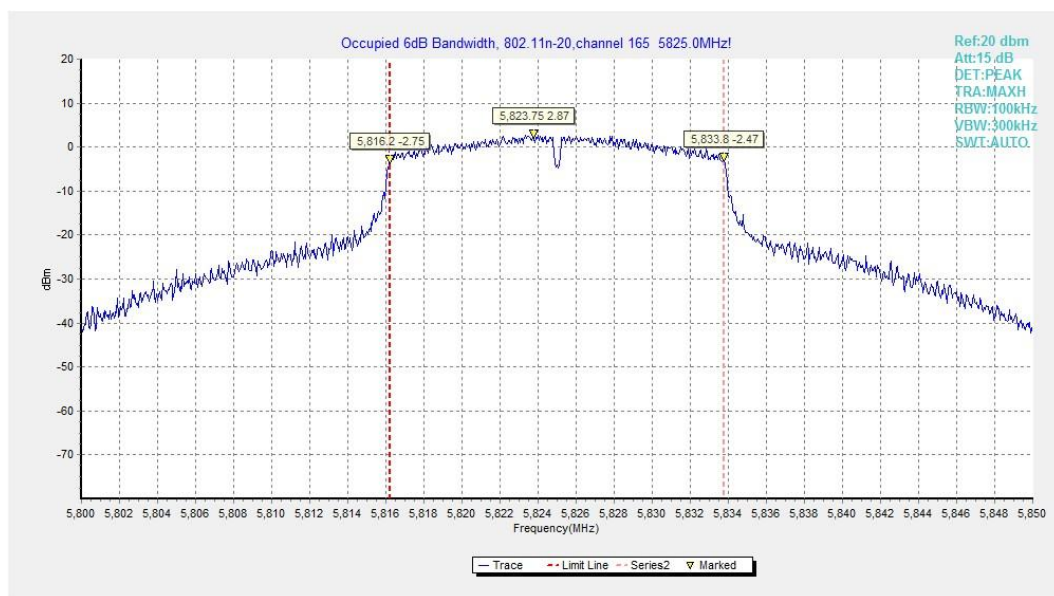


Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

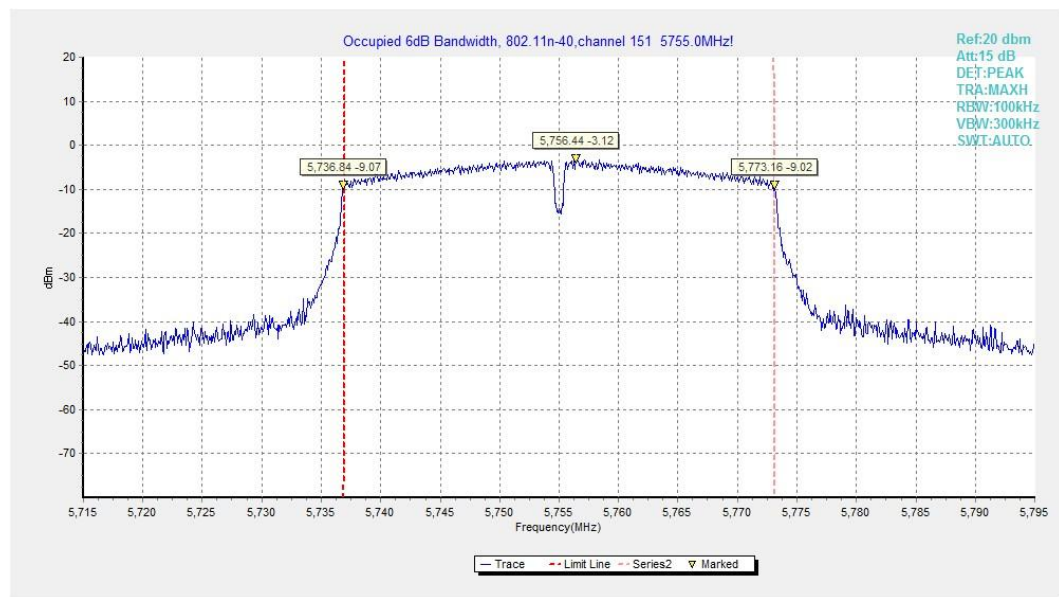


Fig. 7 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)

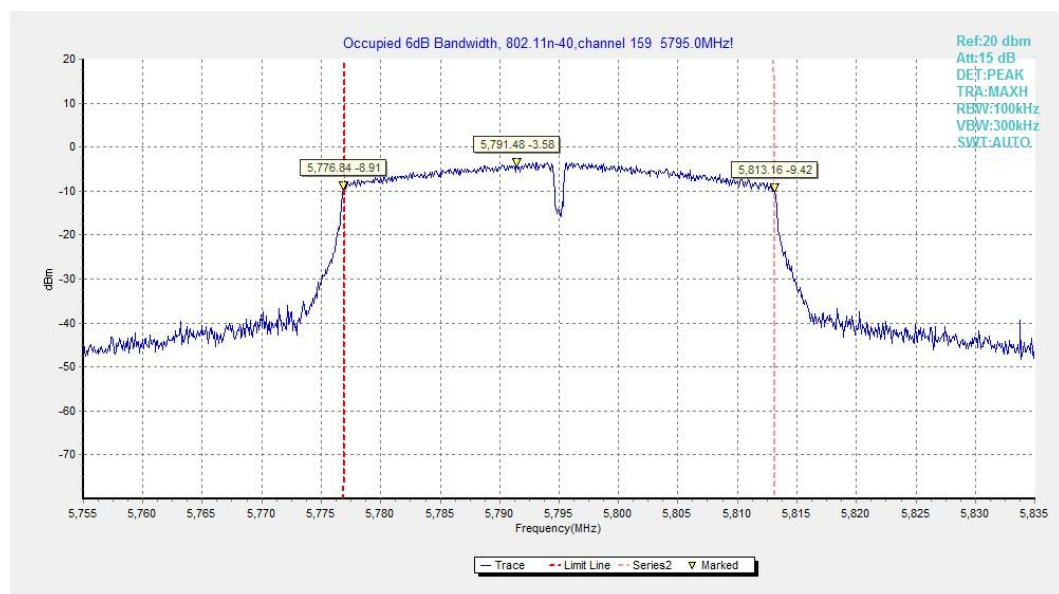


Fig. 8 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)

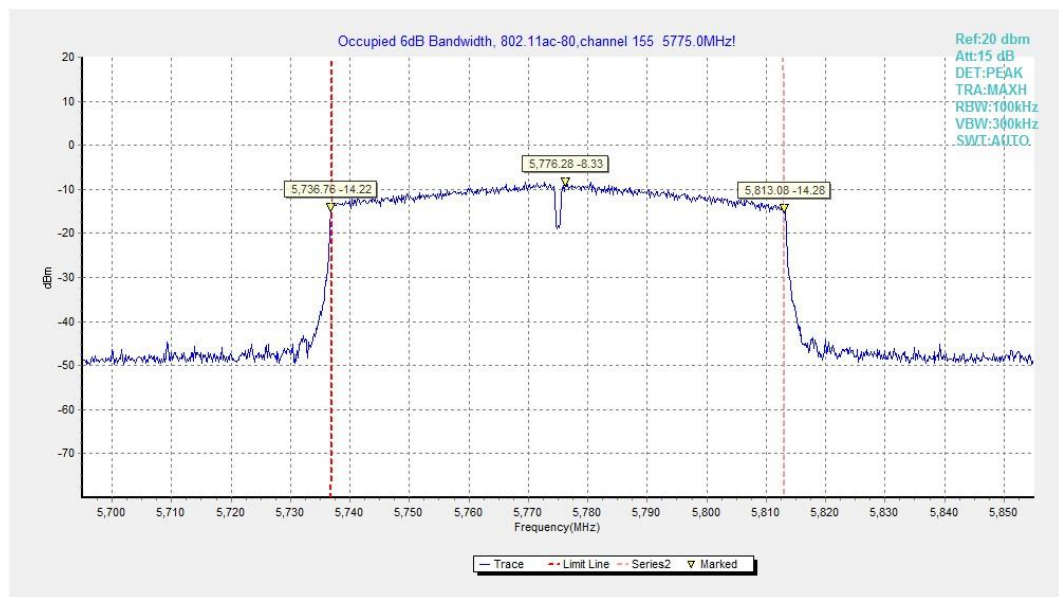


Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology NVLAP[®]  ILAC-MRA Certificate of Accreditation to ISO/IEC 17025:2017 NVLAP LAB CODE: 600118-0 Telecommunication Technology Labs, CAICT Beijing China <i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i> Electromagnetic Compatibility & Telecommunications <i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i> 2022-10-01 through 2023-09-30 <i>Effective Dates</i>   <i>For the National Voluntary Laboratory Accreditation Program</i>	
---	--

*** END OF REPORT BODY ***