



No.24T04Z102397-006

For

TCL Communication Ltd.

GSM/UMTS/LTE/NR Mobile phone

Model Name: T440W

with

Hardware Version: 04

Software Version: 7ASK

FCC ID: 2ACCJH185

Issued Date: 2024-12-6

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample




Picture 2: Left Head Touch Cheek Position

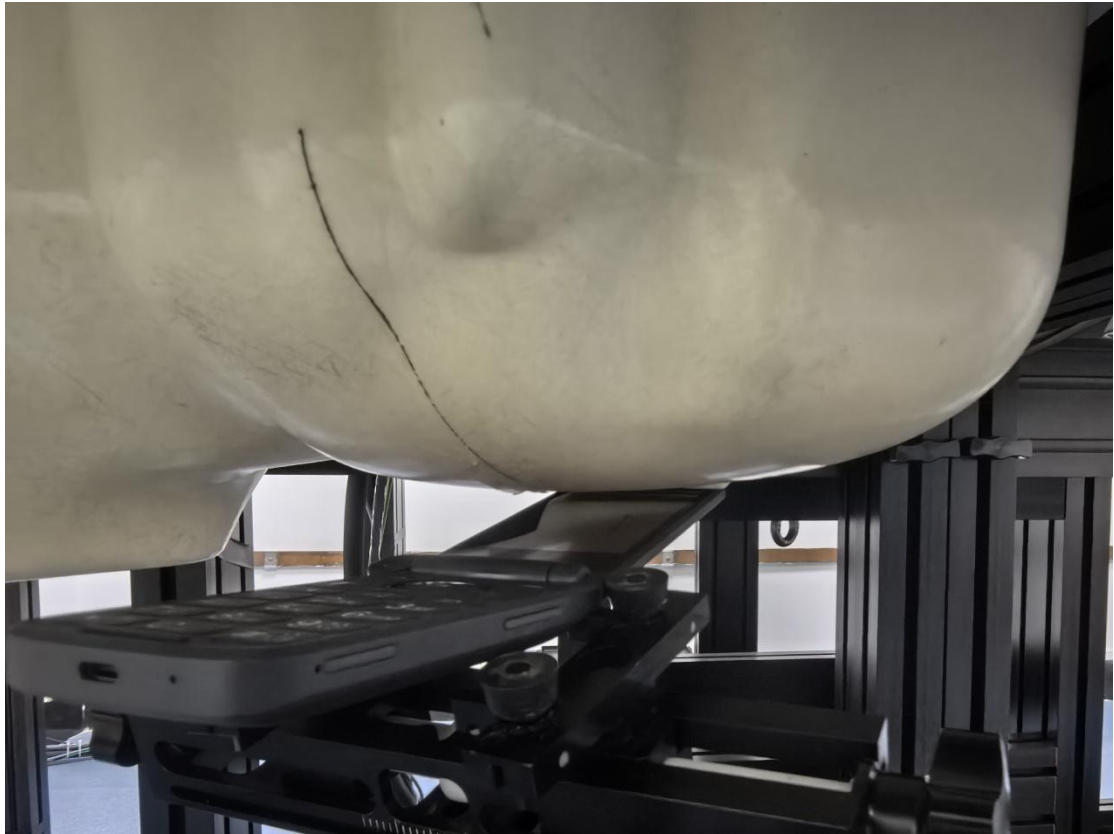

Picture 3: Left Head Tilt 15° Position

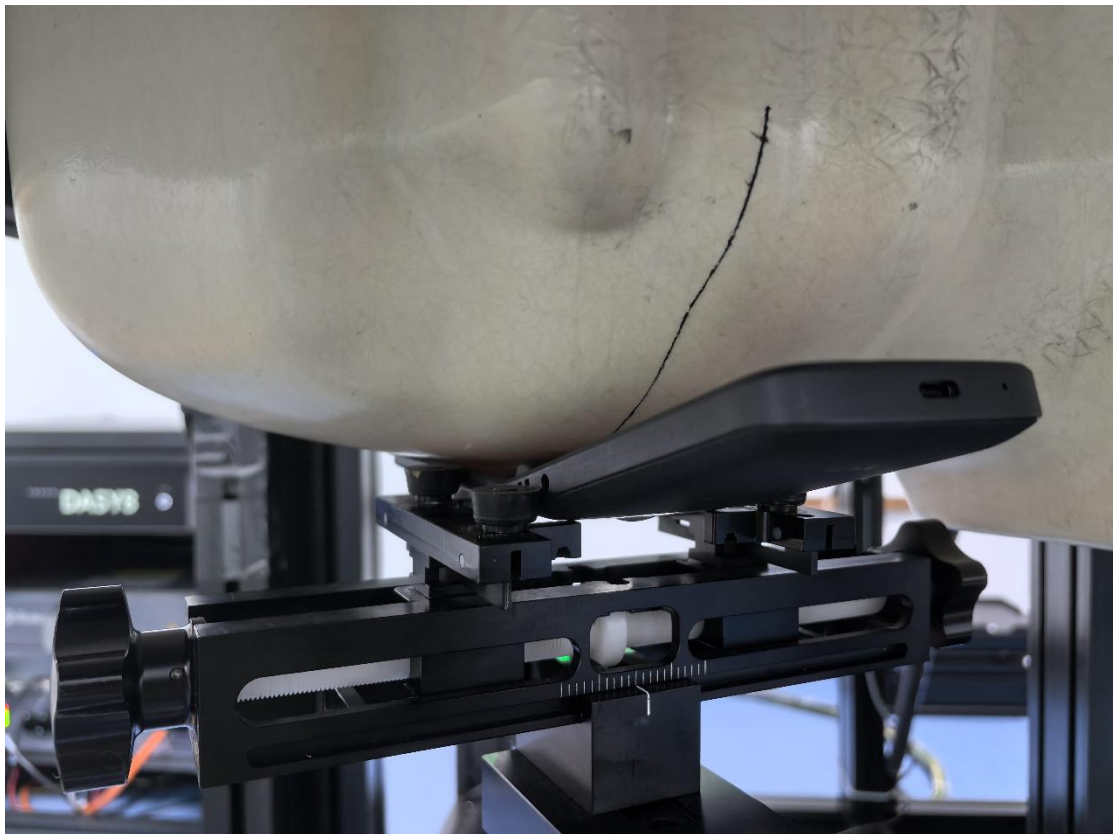

Picture 4: Right Head Touch Cheek Position

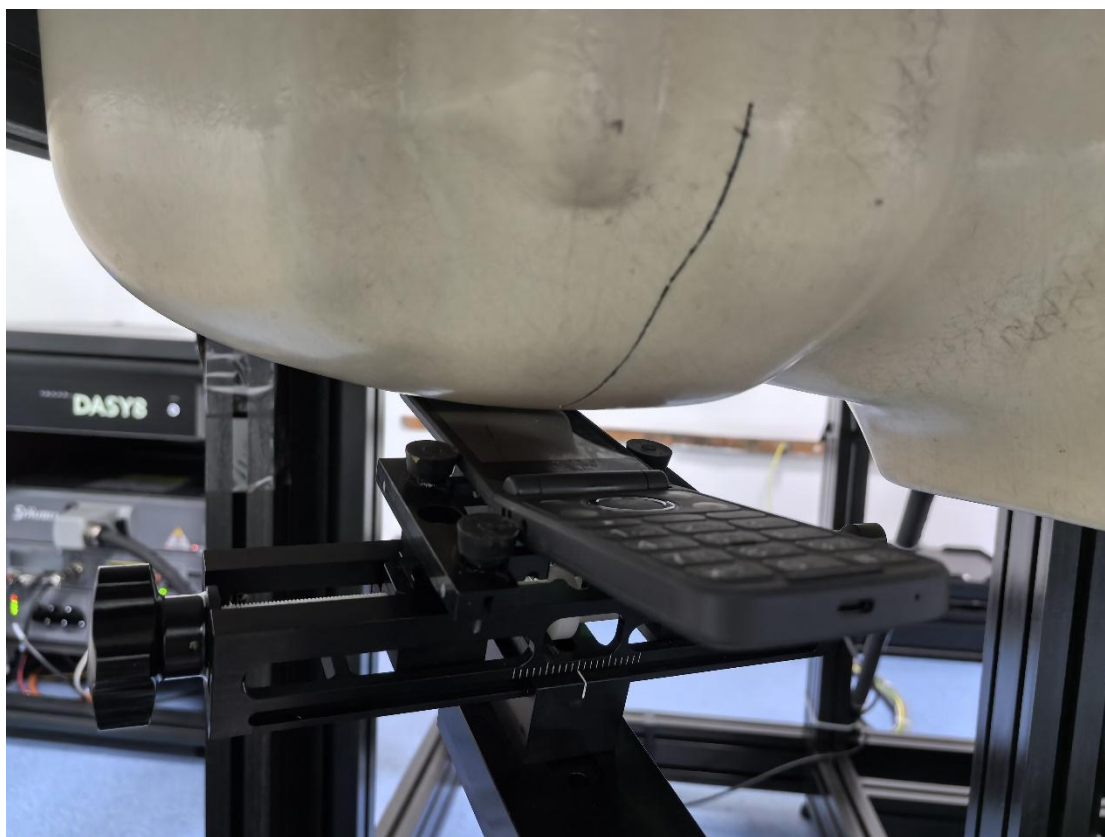

Picture 5: Right Head Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 12 test positions all with the distance =15/10/0mm between the EUT and the phantom bottom:




Picture 6: Front 10mm




Picture 7: Rear off 10mm

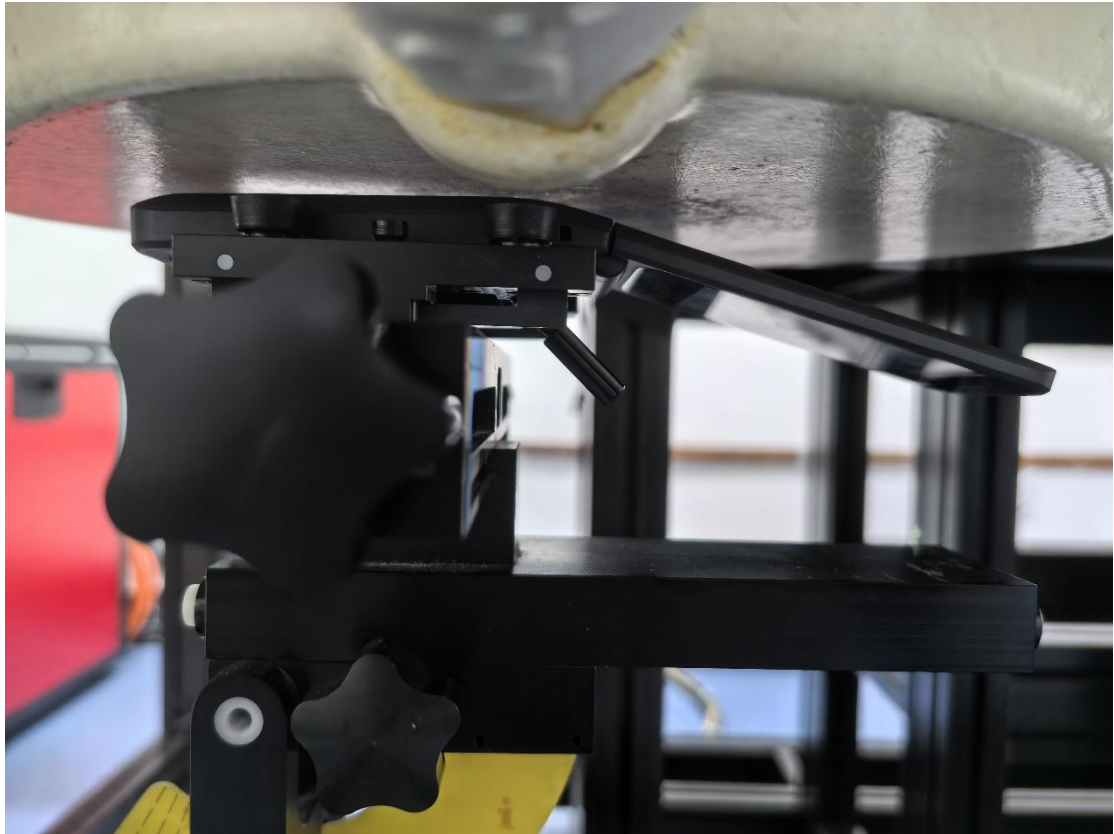


Picture 8: Rear on 10mm

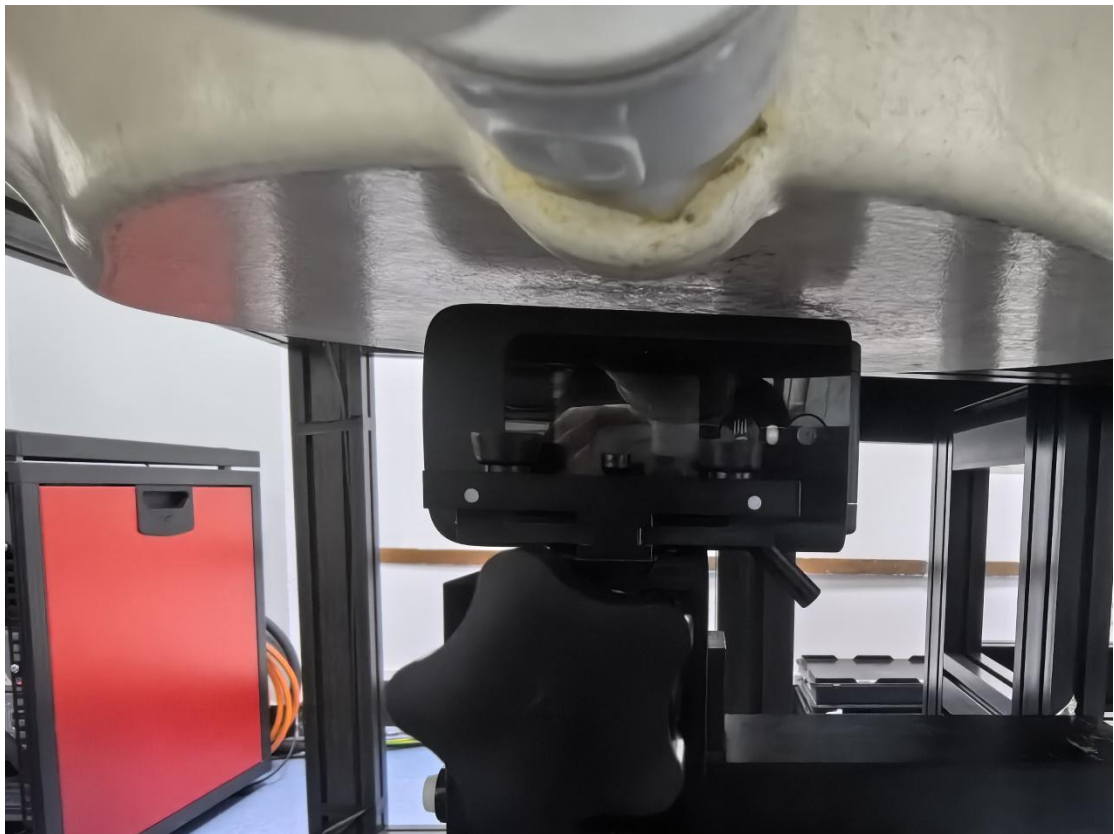


Picture 9: Left 10mm

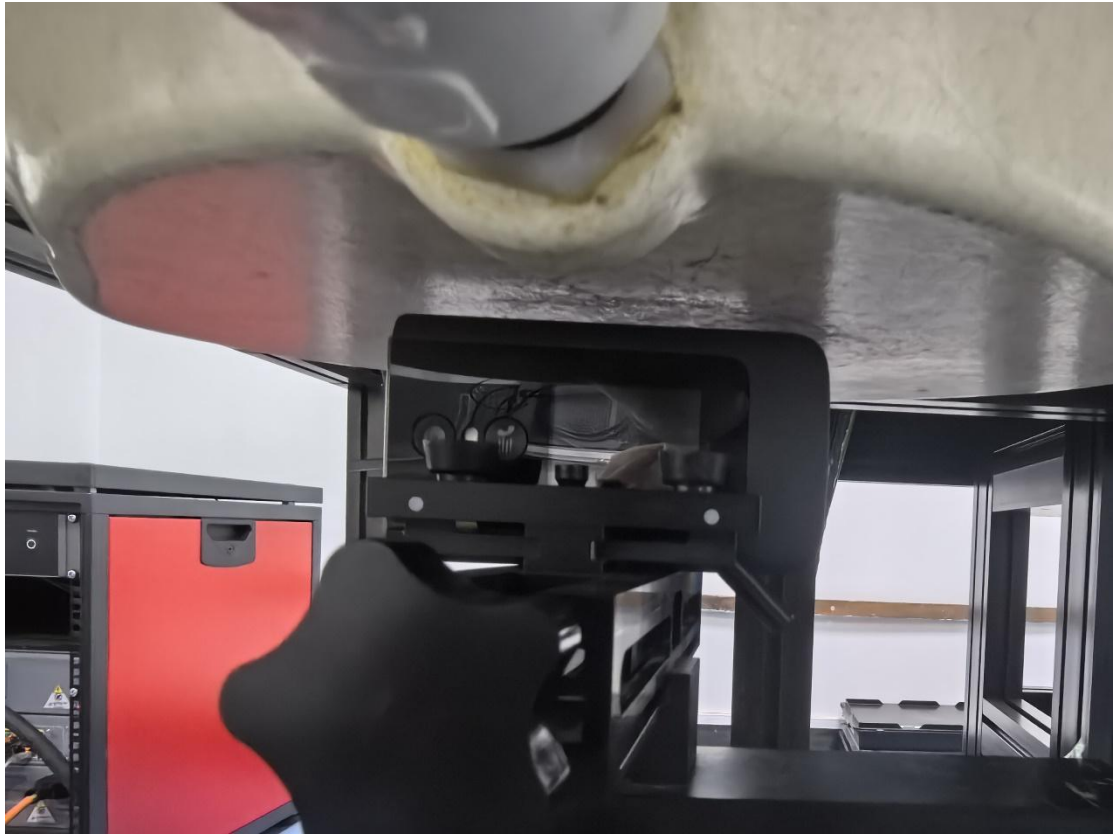


Picture 10: Right 10mm

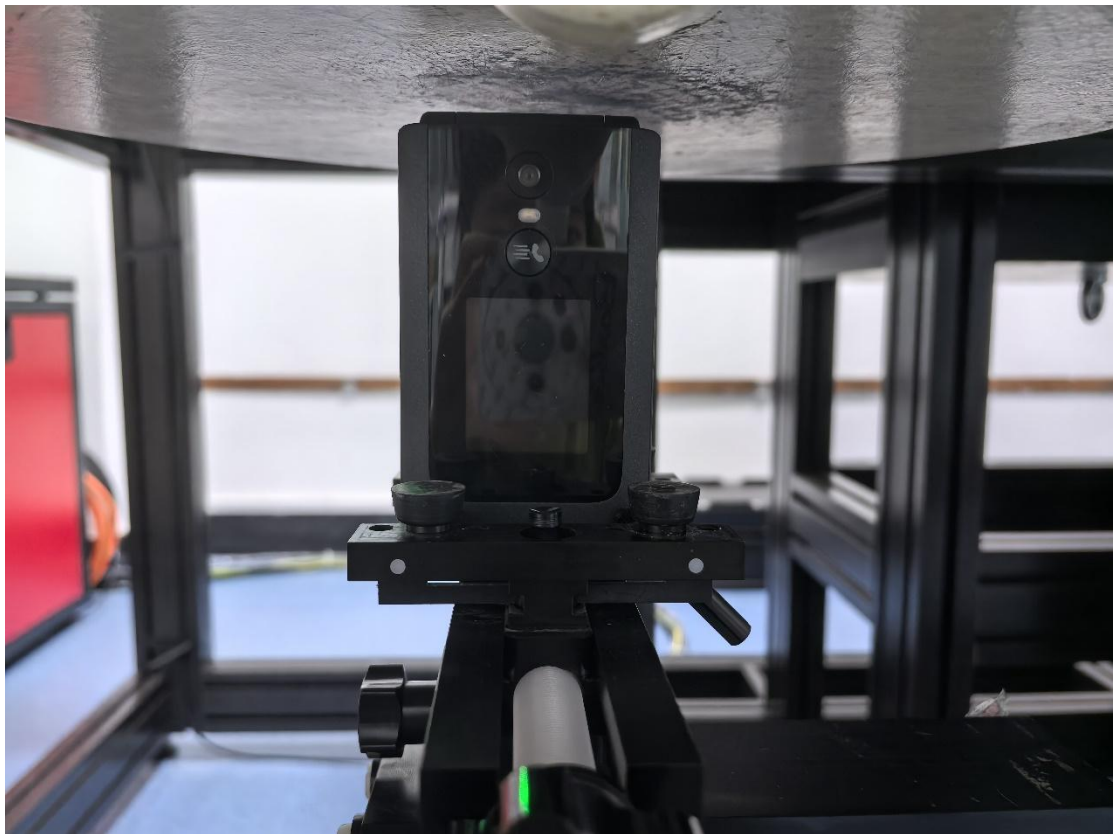


Picture 11: Top 10mm

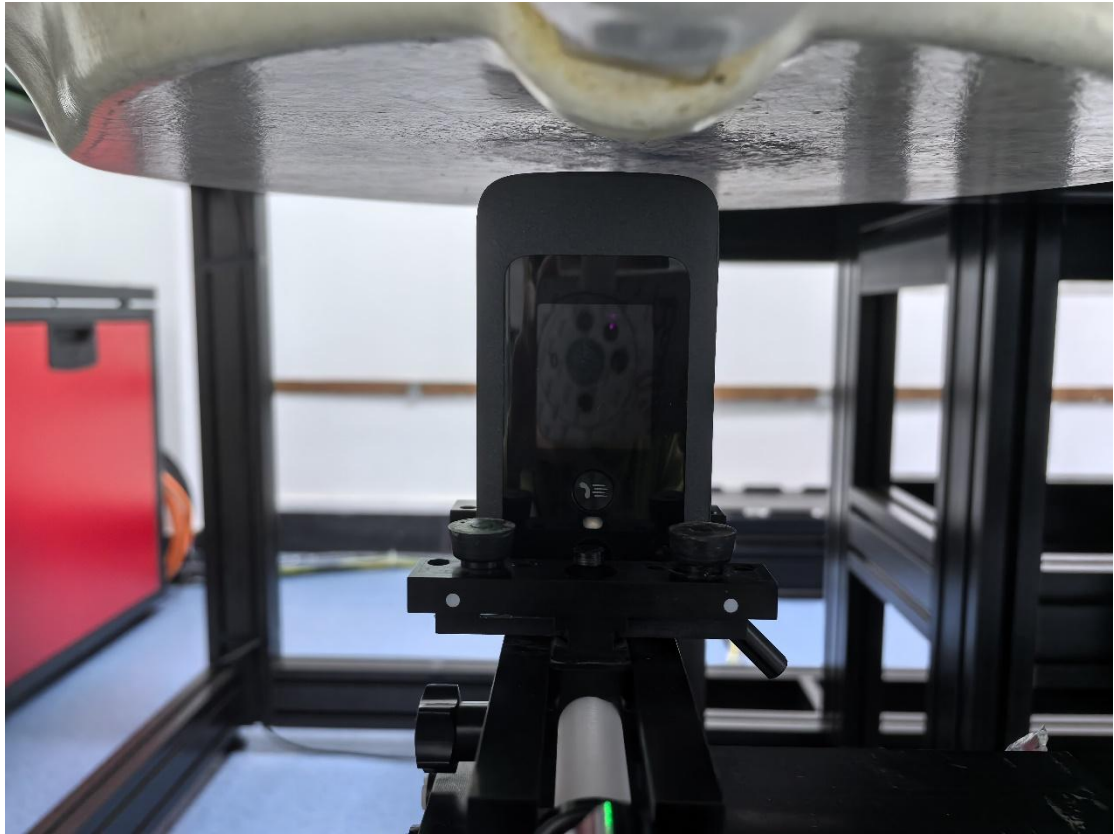


Picture 12: Bottom 10mm

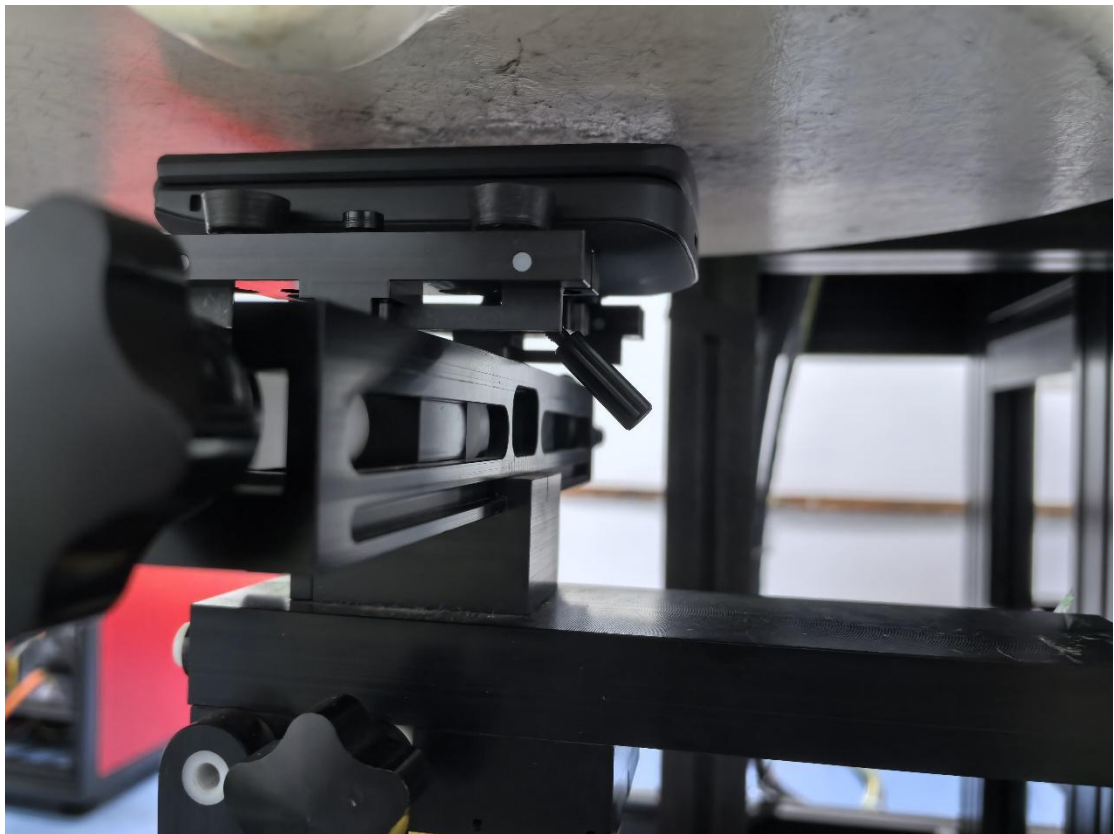

Picture 13: Front 15mm

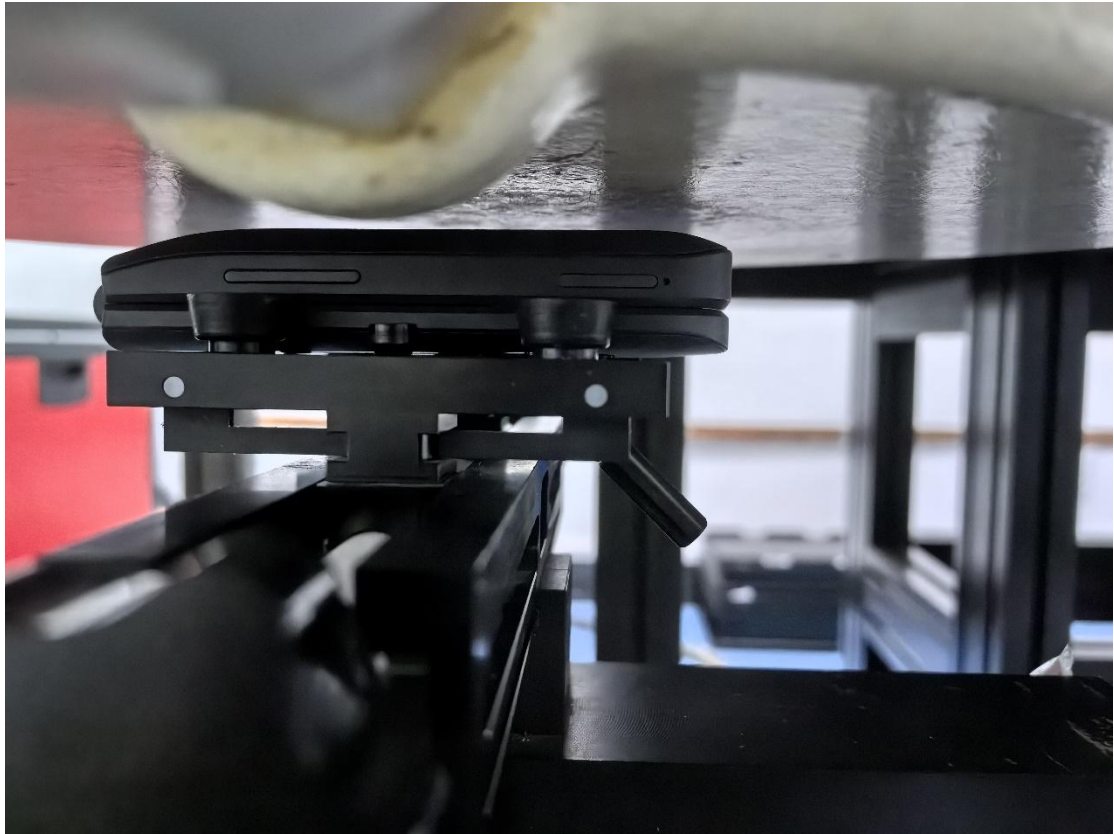

Picture 14: Rear off 15mm

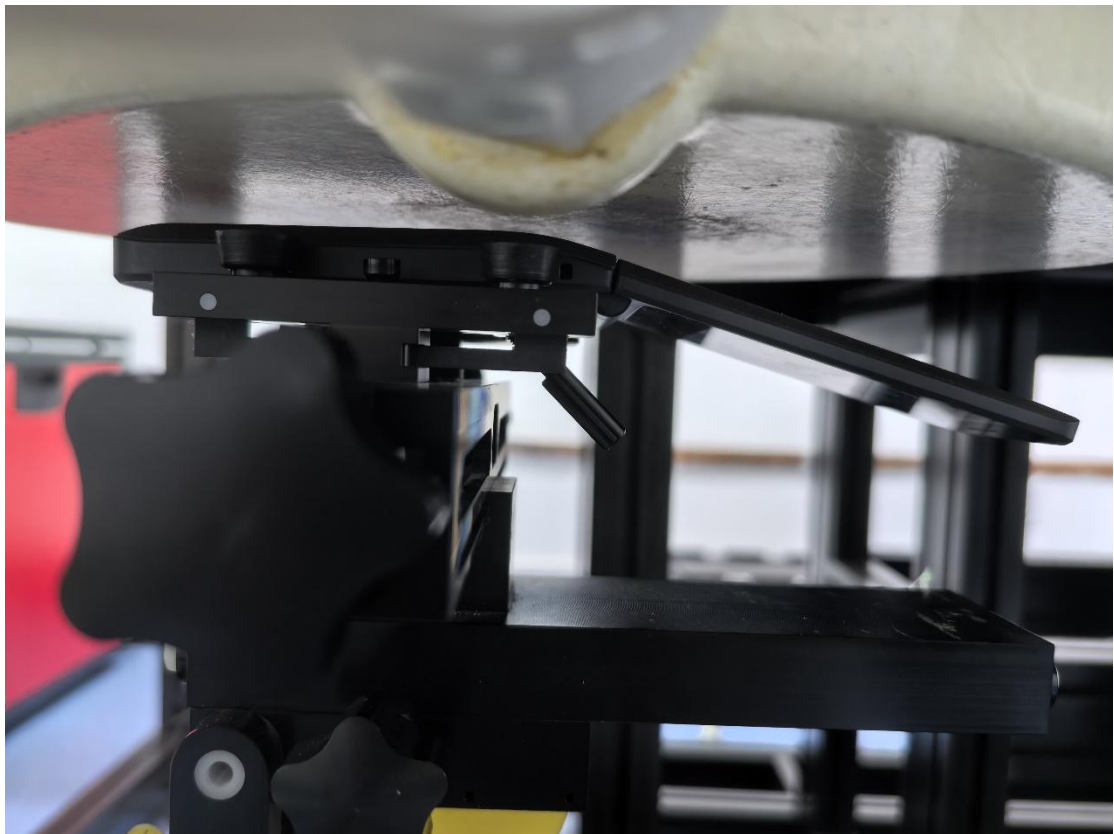

Picture 15: Rear on 15mm



Picture 16: Rear off 0mm



Picture 17: Bottom 0mm

Transmit Antenna Separation Distances



Picture 18 Antenna Locations