



FCC PART 15B TEST REPORT

No. 25T04Z100757-014

for

TCL Communication Ltd.

GSM/UMTS/LTE/NR Mobile phone

Model Name: T951P

FCC ID: 2ACCJH188

with

Hardware Version: 05

Software Version: 9ESH

Issued Date: 2025-06-27

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04Z100757-014	Rev.0	1 st edition	2025-06-27

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS	8
4.1. REFERENCE DOCUMENTS FOR TESTING	8
5. SUMMARY OF TEST RESULTS	9
6. TEST EQUIPMENTS UTILIZED	10
7. MEASUREMENT UNCERTAINTY	12
ANNEX A: EUT PHOTOGRAPH	13
ANNEX B: MEASUREMENT RESULTS	14
ANNEX C: TEST LAYOUT	28
ANNEX D: PERSONS INVOLVED IN THIS TESTING	29

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

CTTL (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2025-05-08
Testing End Date: 2025-06-19

1.5. Signature



Zhang Ying
(Prepared this test report)



An Hui
(Reviewed this test report)



Shi Suolan
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address/Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Contact Person: Ting Wang
Contact Email: ting.wang.hz@tcl.com
Telephone: +86 752 2639091
Fax: 0086-755-36612000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address/Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science
Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Contact Person: Ting Wang
Contact Email: ting.wang.hz@tcl.com
Telephone: +86 752 2639091
Fax: 0086-755-36612000-81722

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM/UMTS/LTE/NR Mobile phone
Model Name	T951P
FCC ID:	2AC CJH188

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
UT28a	356448870204477/ 356448870204584	05	9ESH
UT29a	356448870204444/ 356448870204550	05	9ESH

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacturer
AE1	Battery	TLp050D7	VEKEN
AE2-1	Charger	QC16US	PUAN
AE2-2	Charger	QC16EU	BaiJunDa
AE3-1	USB cable	CDA0000308C1	JUWEI
AE3-1	USB cable	CDA0000305C1	JUWEI

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.3	UT28a + AE1 + AE2-1 + AE3	Charger1
Set.4	UT28a + headset	FM
Set.5	UT28a + AE1 + AE3-1 + PC	USB1
Set.6	UT28a + AE1 + AE3-2 + PC	USB2
Set.7	UT29a + AE1 + AE2-2 + AE3	Charger 2

Note:

Equipment Under Test (EUT) is a model of GSM Mobile phone.

It supports

GSM Band GSM 850/900/1800/1900 MHz

UMTS Band Bands 1/2/4/5/8

LTE Band Bands 1/2/3/4/5/7/8/12/13/14/17/25/26/28/30/38/40/41/42/48/66/71

NR Band Bands 1/2/3/5/7/12/28/38/40/41/48/66/71/78

It has USB memory function.

The device contains receivers which tune and operate between 30MHz-960MHz in the following mode: GSM 850MHz, WCDMA 850MHz, LTE bands 12/13/14/17/26/71, NR bands 5/71.



All licensed band receivers that tune in the range of 30MHz-960MHz are investigated. Only the worst-case emissions are reported.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2023
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(huayuan North Road) CTTL(BDA)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(huayuan North Road) CTTL(BDA)

6. Test Equipments Utilized

Huayuan North Road

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESW44	103023	R&S	2026-05-07	1 year
2	EMI Antenna	VULB 9163	01222	SCHWARZBECK	2025-09-11	1 year
3	EMI Antenna	3115	6914	ETS-Lindgren	2026-03-31	1 year
4	LISN	ENV216	101200	R&S	2026-06-05	1 year
5	Test Receiver	ESCI	100344	R&S	2026-04-01	1 year
6	Universal Communication Tester	CMW500	150344	R&S	2026-01-15	1 year
7	Universal Radio Communication Tester	CMX500	102710	R&S	2026-04-01	1 year

BDA RE SAC/FAC3

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESCI 3	100766	R&S	2026-05-07	1 year
2	LISN	ENV216	101459	R&S	2026-05-07	1 year
3	Test Receiver	ESR26	101372	R&S	2026-01-15	1 year
4	EMI Antenna	VULB 9163	01177	R&S	2025-11-19	1 year
5	EMI Antenna	3115	00167252	Schwarzbeck	2026-04-13	1 year
6	Universal Radio Communication Tester	SP9500	20482	StarPoint	2026-1-10	2 Years
7	Universal Radio Communication Tester	CMW500	167943	R&S	2026-01-25	1 year
8	Universal Radio Communication Tester	CMW500	127406	R&S	2026-01-18	2 Years

Huayuan North Road

Test Item	Test Software and Version	Software Vendor
Conducted emission	EMC32 V8.53.0	R&S
Radiated emission	EMC32 V11.50.00	R&S

BDA

Test Item	Test Software and Version	Software Vendor
-----------	---------------------------	-----------------



No.25T04Z100757-014

Conducted Emission	EMC32 V8.53.0	R&S
Radiated emission	EMC32 V8.53.0	R&S

7. Measurement Uncertainty

Where relevant, the following measurement uncertainty(worse case) levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Location 1: CTTL(Huayuan North Road)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	4.72dB(k=2)
	1GHz-6GHz	4.84dB(k=2)
Conducted Emission	150kHz-30MHz	AC Power Line: 3.08dB(k=2)

Location 1: CTTL(BDA)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	5.37dB
Conducted Emission	150kHz-30MHz	AC Power Line: 3.10dB(k=2)



ANNEX A: EUT photograph

Please refer to External photos and Internal photos documents for EUT photograph.

ANNEX B: MEASUREMENT RESULTS

B.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

B.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB/OTG mode of MS and charging mode of MS) at distances of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

B.1.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

B.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

B.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

B.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Summary of radiated emission:

Setup	Function	Conclusion
Set.3	Charger+Real Camera+ RX GSM 850M	Pass
Set.3	Charger+ Front Camera + RX WCDMA band 5	Pass
Set.3	Charger+MP4 + RX LTE band 12	Pass
Set.3	Charger+MP4 + RX LTE band 13	Pass
Set.3	Charger+MP4 + RX LTE band 14	Pass
Set.3	Charger+MP4 + RX LTE band 17	Pass
Set.3	Charger+MP4 + RX LTE band 26	Pass
Set.3	Charger+ Real Camera + RX LTE band 71	Pass
Set.3	Charger+ Real Camera + RX NR band 5	Pass
Set.3	Charger+Front Camera + RX NR band 71	Pass
Set.4	FM	Pass
Set.5	USB TO PC	Pass
Set.6	USB TO PC	Pass
Set.7	Charger+ Real Camera + RX NR band 5	Pass

Measurement results for Set.3, Charger+ Real Camera + RX NR band 5 idle

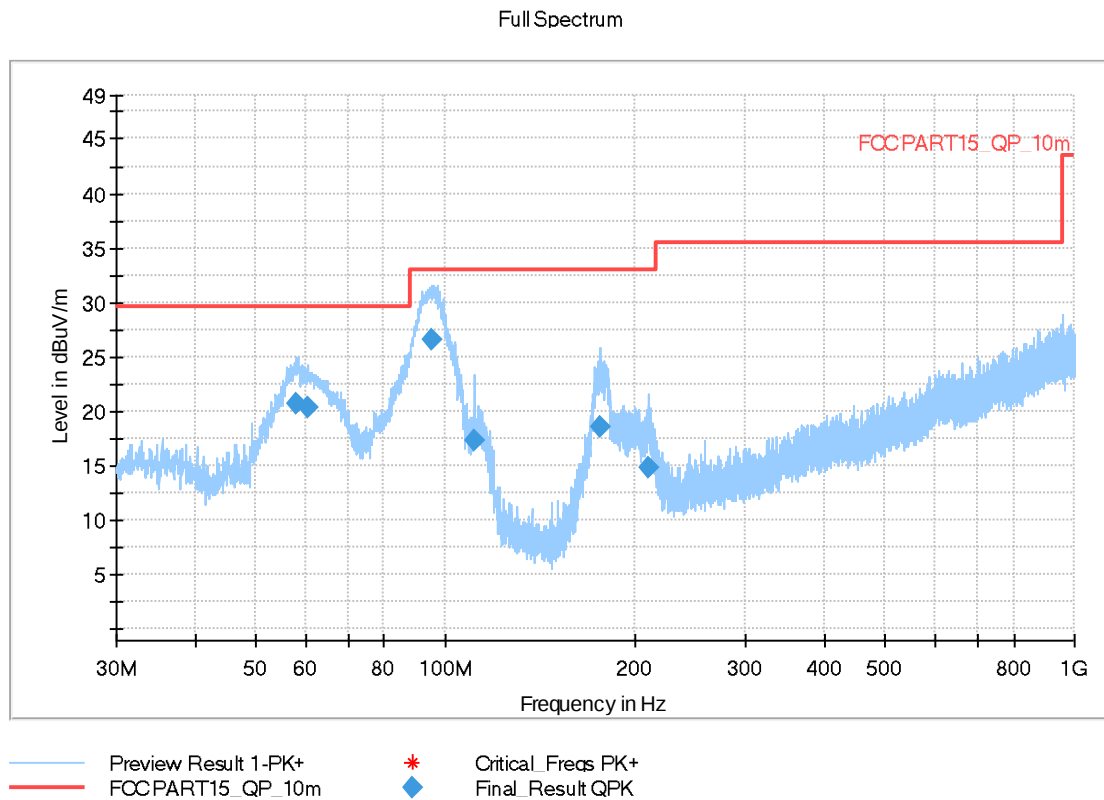


Figure A.1 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
58.081500	20.71	29.54	8.83	100.0	V	-15.0
60.361000	20.35	29.54	9.19	100.0	V	15.0
95.475000	26.53	33.06	6.53	107.0	V	-37.0
111.043500	17.29	33.06	15.77	216.0	V	158.0
175.985000	18.51	33.06	14.55	107.0	V	-15.0
210.032000	14.82	33.06	18.24	225.0	V	61.0

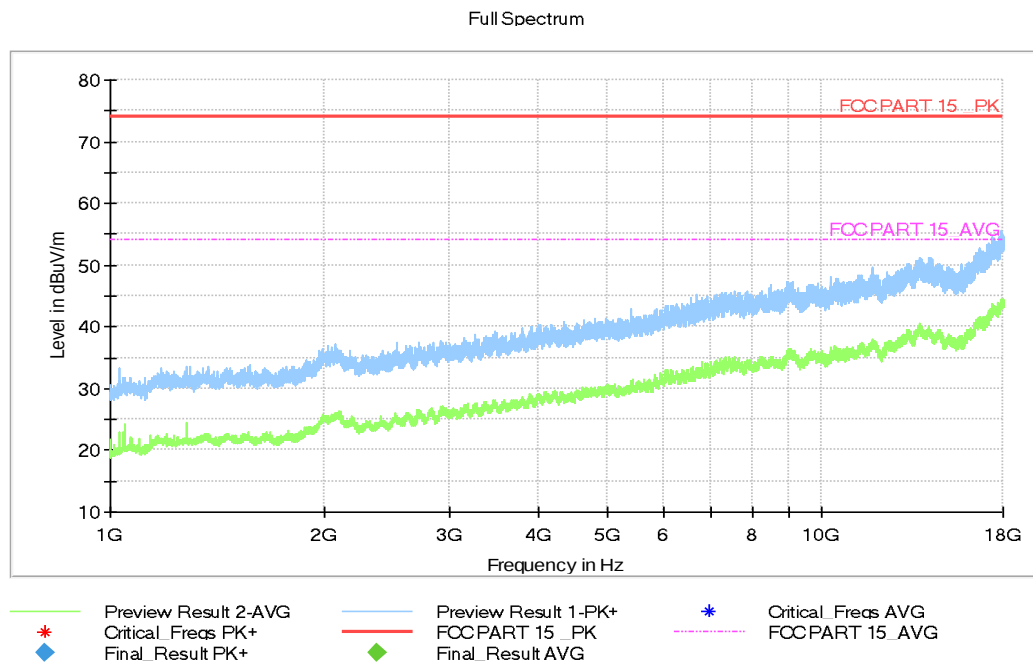


Figure A.2 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17890.500	44.55	-26.80	45.40	25.95	54.00	9.45	H
17923.500	44.29	-26.80	45.40	25.69	54.00	9.71	H
17957.500	44.22	-26.80	45.40	25.62	54.00	9.78	H
17922.800	44.13	-26.80	45.40	25.53	54.00	9.87	H
17928.600	44.08	-26.80	45.40	25.48	54.00	9.92	H
17949.700	44.00	-26.80	45.40	25.40	54.00	10.00	H

Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17988.800	55.20	-26.80	45.40	36.60	74.00	18.80	V
17898.000	55.08	-26.80	45.40	36.48	74.00	18.92	H
17614.400	54.69	-28.23	44.40	38.52	74.00	19.31	H
17976.500	54.64	-26.80	45.40	36.04	74.00	19.36	V
17973.800	54.57	-26.80	45.40	35.97	74.00	19.43	V
17943.900	54.54	-26.80	45.40	35.94	74.00	19.46	H

Measurement results for Set.7, Charger+ Real Camera + RX NR band 5 idle

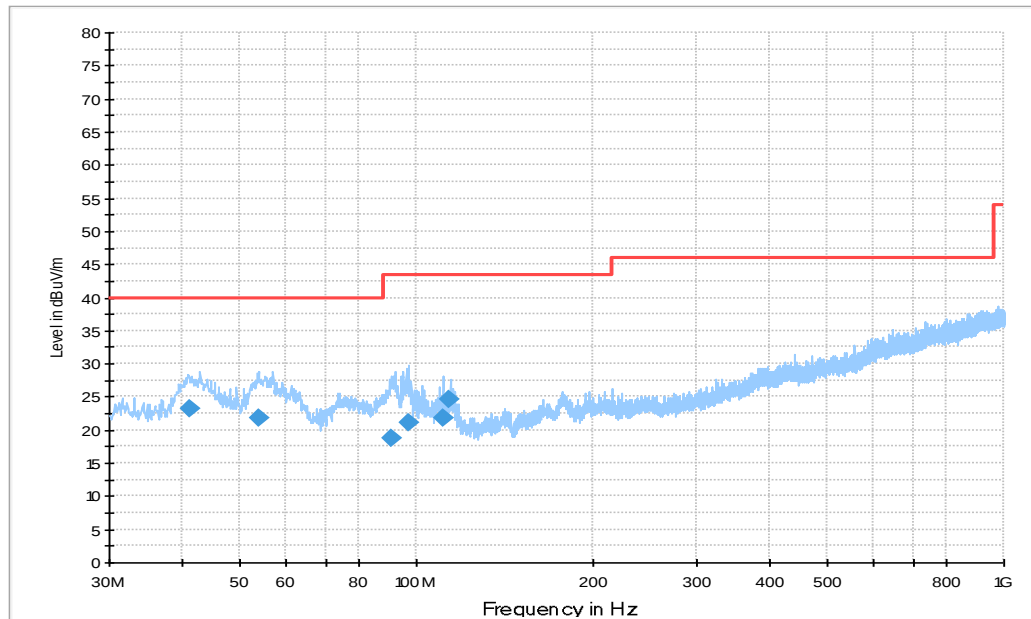


Figure A.1 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
41.061000	23.2	40.0	16.8	125.0	V	22.0
53.942000	21.9	40.0	18.1	125.0	V	81.0
90.996000	18.8	43.5	24.7	125.0	V	177.0
97.224000	21.1	43.5	22.4	100.0	V	248.0
110.901000	21.7	43.5	21.8	125.0	V	93.0
113.999000	24.6	43.5	18.9	100.0	V	106.0

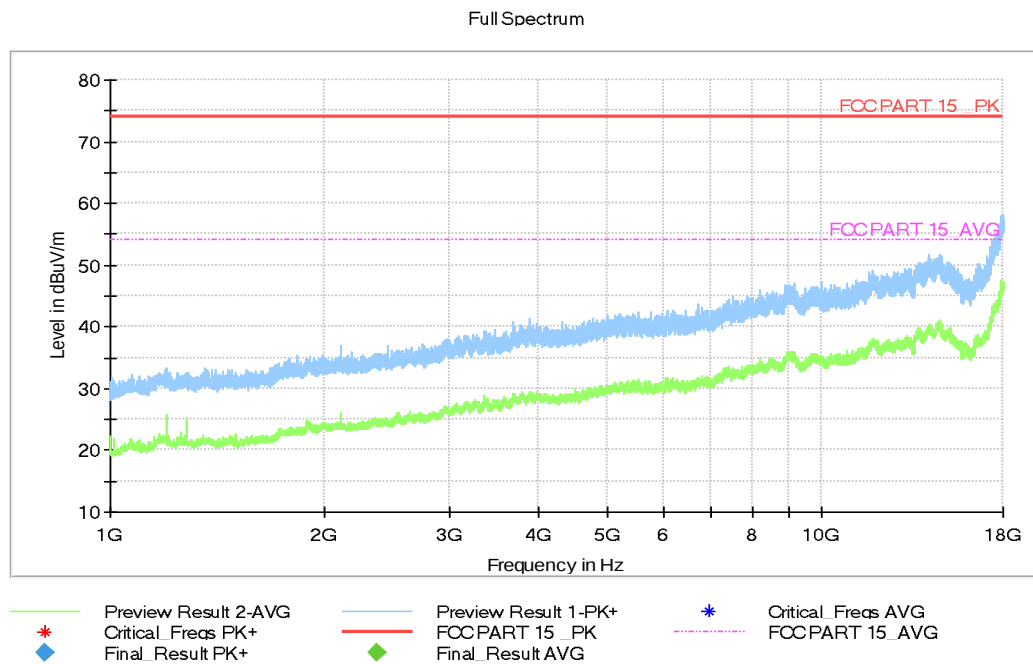


Figure A.2 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17944.900	47.67	-26.80	45.40	29.07	54.00	6.33	H
17954.400	47.45	-26.80	45.40	28.85	54.00	6.55	V
17967.400	47.11	-26.80	45.40	28.51	54.00	6.89	H
17946.300	47.09	-26.80	45.40	28.49	54.00	6.91	V
17974.200	47.03	-26.80	45.40	28.43	54.00	6.97	H
17968.400	47.02	-26.80	45.40	28.42	54.00	6.98	H

Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17949.700	58.15	-26.80	45.40	39.55	74.00	15.85	V
17932.300	57.97	-26.80	45.40	39.37	74.00	16.03	V
17906.800	57.93	-26.80	45.40	39.33	74.00	16.07	H
17936.400	57.62	-26.80	45.40	39.02	74.00	16.38	V
17958.200	57.57	-26.80	45.40	38.97	74.00	16.43	V
17929.300	57.55	-26.80	45.40	38.95	74.00	16.45	V

Measurement results for Set.6, USB to PC transfer:

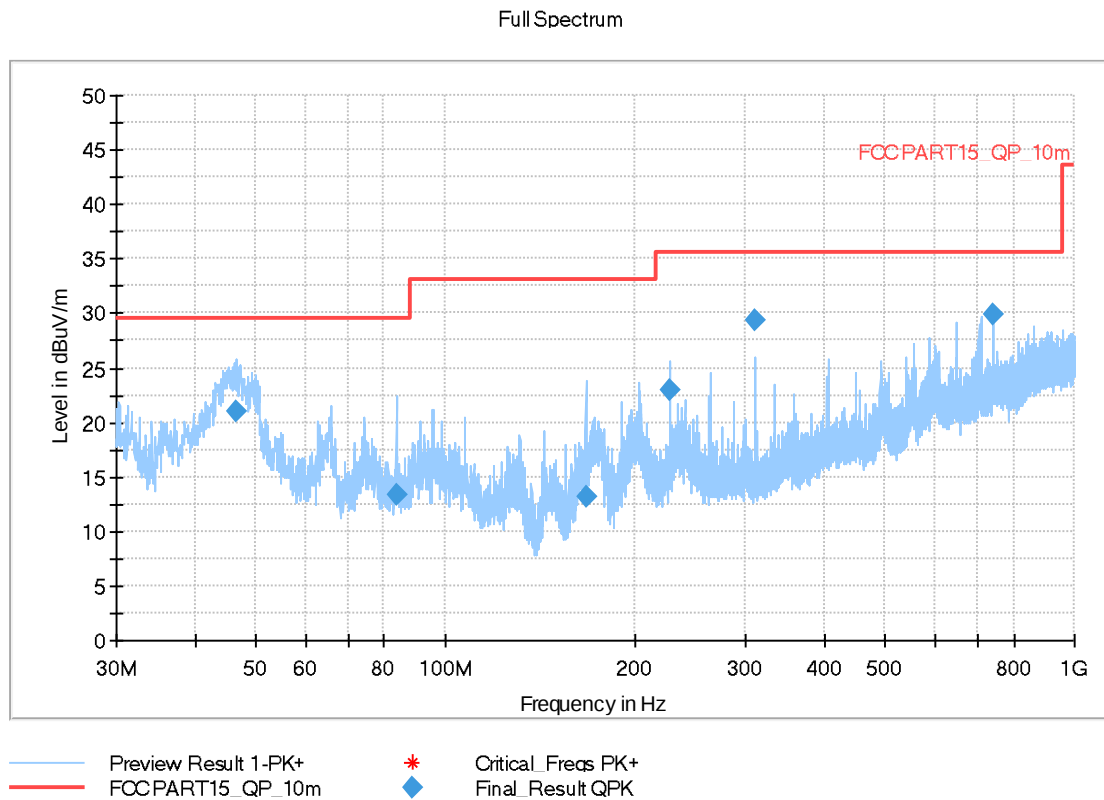


Figure A.3 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
46.538500	20.95	29.54	8.59	225.0	V	291.0
83.592500	13.26	29.54	16.28	175.0	V	45.0
167.255000	13.20	33.06	19.86	124.0	V	293.0
226.958500	22.97	35.56	12.59	125.0	V	7.0
310.621000	29.45	35.56	6.11	275.0	H	14.0
744.017000	29.84	35.56	5.72	225.0	V	263.0

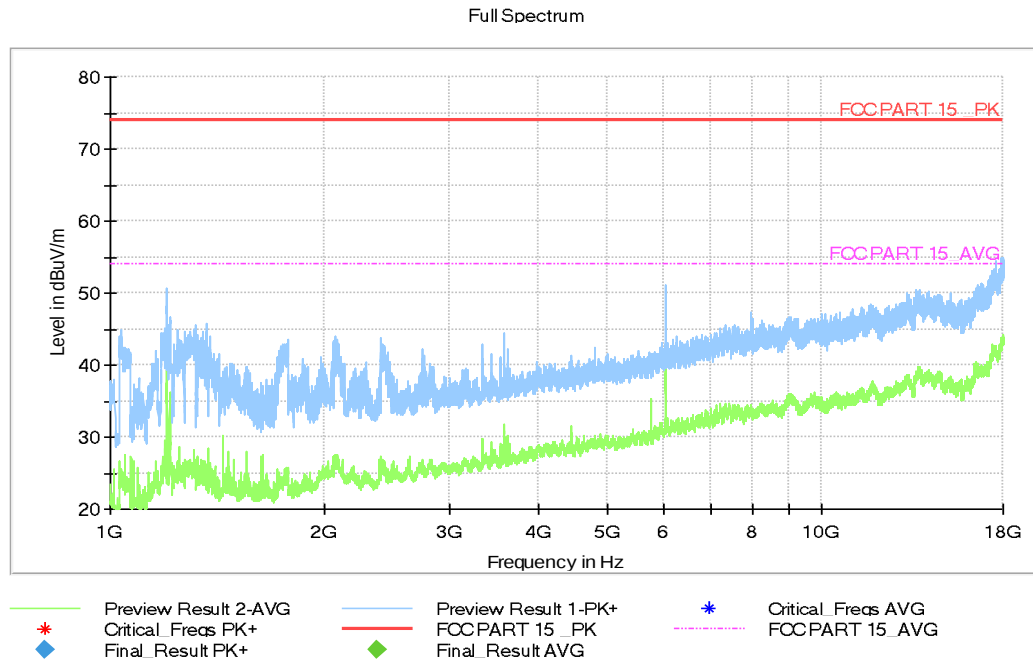


Figure A.4 Radiated Emission from 1GHz to 18GHz

Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
6051.000	48.99	-36.15	34.70	50.44	54.00	5.01	H
6051.400	48.81	-36.15	34.70	50.26	54.00	5.19	H
6050.700	46.42	-36.15	34.70	47.87	54.00	7.58	H
6051.700	46.02	-36.15	34.70	47.47	54.00	7.98	H
17936.400	43.79	-26.80	45.40	25.19	54.00	10.21	V
17990.800	43.79	-26.80	45.40	25.19	54.00	10.21	H

Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17926.600	54.92	-26.80	45.40	36.32	74.00	19.08	H
17967.400	54.92	-26.80	45.40	36.32	74.00	19.08	V
17970.800	54.70	-26.80	45.40	36.10	74.00	19.30	V
17975.500	54.70	-26.80	45.40	36.10	74.00	19.30	H
17932.700	54.69	-26.80	45.40	36.09	74.00	19.31	V
17914.000	54.55	-26.80	45.40	35.95	74.00	19.45	H

Measurement results for Set.4, FM function:

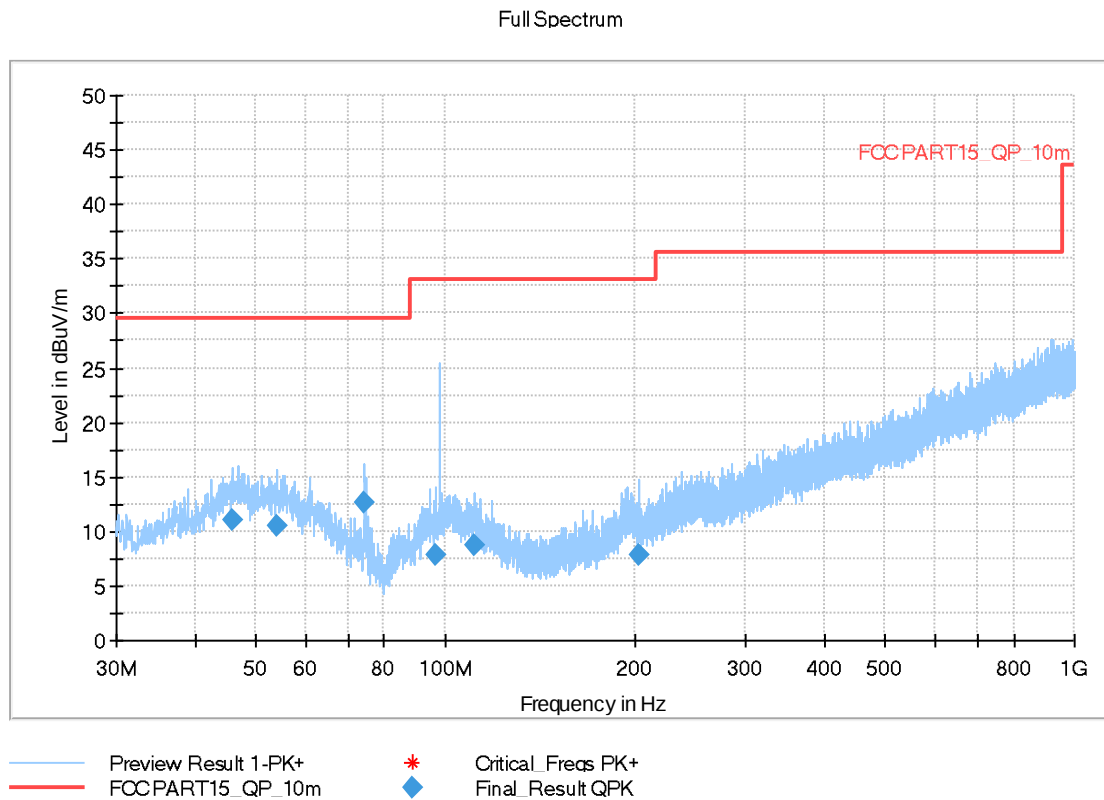


Figure A.5 Radiated Emission from 30MHz to 1GHz

QP detector

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
45.956500	11.00	29.54	18.54	192.0	H	315.0
53.959000	10.46	29.54	19.08	181.0	H	68.0
74.474500	12.69	29.54	16.85	125.0	V	36.0
96.348000	7.84	33.06	25.22	321.0	V	241.0
111.334500	8.77	33.06	24.29	192.0	V	285.0
203.096500	7.77	33.06	25.29	314.0	H	83.0

B.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

B.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

B.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

B.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

B.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

Measurement results:

The measurement results showed as followed are worst cases, and the combinations of different batteries, cables and headsets were considered if applicable.

Summary of conducted emission:

Setup	Function	Conclusion
Set.3	Charger+Real Camera+ RX GSM 850M	Pass
Set.3	Charger+ Front Camera + RX WCDMA band 5	Pass
Set.3	Charger+MP4 + RX LTE band 12	Pass
Set.3	Charger+MP4 + RX LTE band 26	Pass
Set.3	Charger+ Real Camera + RX NR band 5	Pass



Set.3	Charger+Front Camera + RX NR band 71	Pass
Set.5	USB TO PC	Pass
Set.6	USB TO PC	Pass
Set.7	Charger+ Real Camera + RX NR band 5	Pass

B.2.5 Measurement Results

Measurement results for Set.3, Charger+MP4 + RX LTE band 12idle

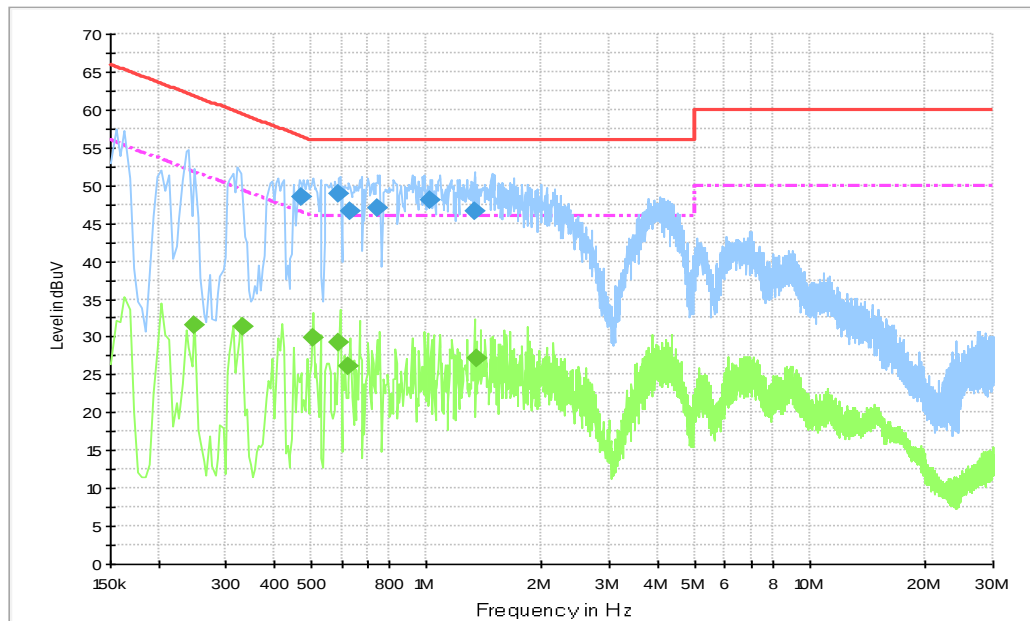


Fig A.6 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.473500	48.5	N	20.2	8.0	56.5
0.586000	48.9	N	20.1	7.1	56.0
0.631000	46.6	N	20.1	9.4	56.0
0.743500	47.0	N	20.1	9.0	56.0
1.022500	48.1	N	20.0	8.0	56.0
1.333000	46.6	N	20.0	9.4	56.0

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.248500	31.5	N	20.0	20.3	51.8
0.334000	31.4	N	20.1	17.9	49.4
0.505000	30.0	N	20.2	16.0	46.0
0.586000	29.3	N	20.1	16.7	46.0
0.622000	26.0	N	20.1	20.0	46.0
1.346500	27.2	N	20.0	18.8	46.0

Measurement results for Set.7, Charger+ Real Camera + RX NR band 5 idle

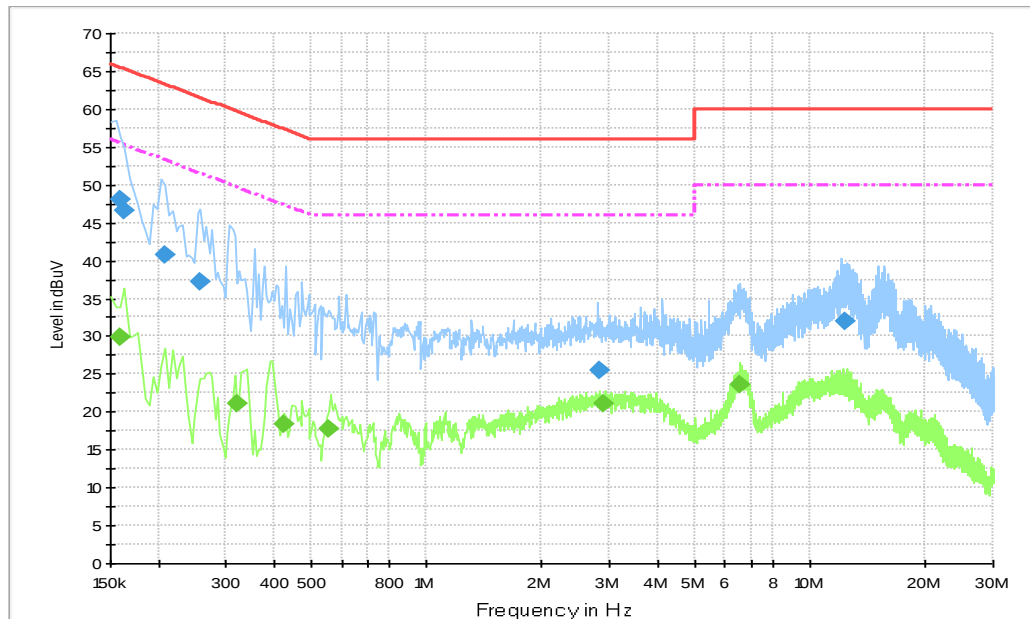


Fig A.6 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.159000	48.2	N	20.1	17.4	65.5
0.163000	46.6	N	20.1	18.7	65.3
0.208000	40.7	N	20.0	22.6	63.3
0.257500	37.1	N	20.0	24.4	61.5
2.827000	25.5	N	20.0	30.5	56.0
12.263500	31.9	N	20.2	28.1	60.0

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.159000	29.8	N	20.1	25.7	55.5
0.320500	21.1	L1	20.0	28.6	49.7
0.424000	18.4	L1	20.1	29.0	47.4
0.559000	17.8	L1	20.0	28.2	46.0
2.894500	21.2	L1	19.9	24.8	46.0
6.557500	23.7	L1	19.9	26.3	50.0

Measurement results for Set.6, USB TO PC transfer:

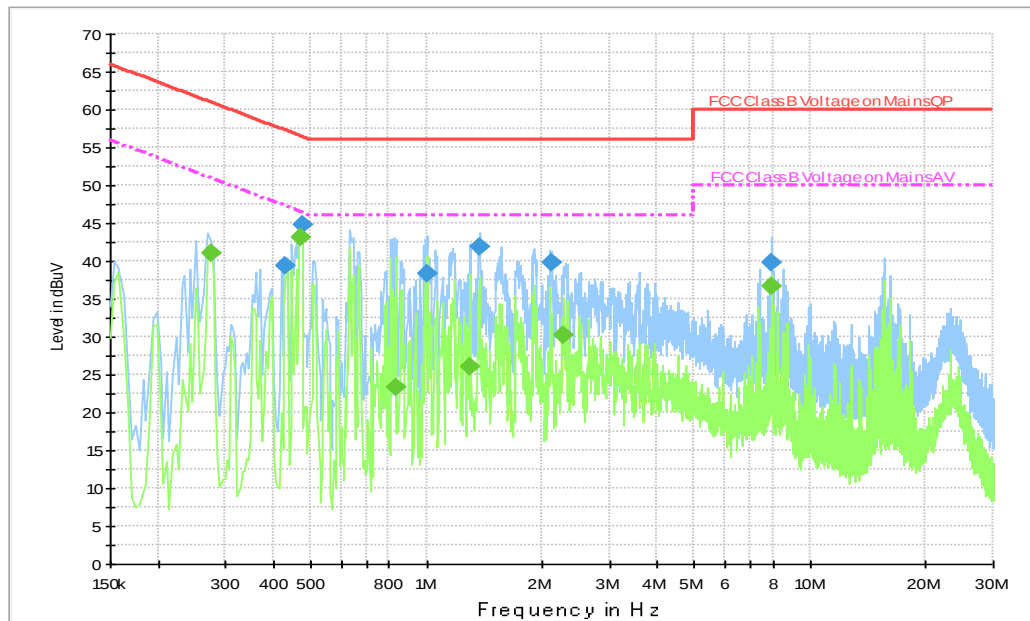


Fig A.7 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.430000	39.3	N	19.9	18.0	57.3
0.474000	44.8	N	19.9	11.6	56.4
1.006000	38.4	L1	19.9	17.6	56.0
1.378000	41.8	L1	19.9	14.2	56.0
2.122000	39.7	L1	19.8	16.3	56.0
7.926000	39.8	N	19.7	20.2	60.0

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.274000	41.0	L1	19.9	10.0	51.0
0.470000	43.1	N	19.9	3.4	46.5
0.830000	23.4	L1	19.9	22.6	46.0
1.294000	26.1	L1	19.9	19.9	46.0
2.286000	30.1	L1	19.8	15.9	46.0
7.926000	36.6	L1	19.9	13.4	50.0



ANNEX C: Test Layout

Please refer to Test setup photos documents for test layout.

ANNEX D: Persons involved in this testing

Test Item	Tester
Conducted emission	Zhang Tianli & Chen Tianwei
Radiated emission	Li Pengfei & Zhang Tianli & Sun Tianyuan

*****END OF REPORT*****