



FCC PART 15C TEST REPORT No. I17Z40067-SRD06

for

TCL Communication Ltd.

GSM Quad-band/HSPA-UMTS Six-band/LTE 13-band mobile phone

With

BBB100-2

FCC ID: 2ACCJN018

Hardware Version:05

Software Version: AAJ048

Issued Date: 2017-03-30



Note:The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504 Email: cttl_terminals@catr.cn. www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17Z40067-SRD06	Rev.0	1st edition	2017-03-16
I17Z40067-SRD06	Rev.1	Add the power result of 11ac-40 MCS9,11ac-80 MCS9	2017-03-30

CONTENTS

CONTENTS	3
1. TEST LATORATORY.....	7
1.1. TESTING LOCATION	7
1.2. PROJECT DATA	7
1.3. SIGNATURE	7
2. CLIENT INFORMATION.....	8
2.1. APPLICANT INFORMATION.....	8
2.2. MANUFACTURER INFORMATION.....	8
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
3.1. ABOUT EUT	9
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	9
3.4. GENERAL DESCRIPTION.....	10
4. REFERENCE DOCUMENTS.....	11
4.1. DOCUMENTS SUPPLIED BY APPLICANT	11
4.2. REFERENCE DOCUMENTS FOR TESTING.....	11
5. LABORATORY ENVIRONMENT.....	11
6. SUMMARY OF TEST RESULTS	12
6.1. SUMMARY OF TEST RESULTS.....	12
6.2. STATEMENTS.....	12
6.3. TEST CONDITIONS	12
7. TEST EQUIPMENTS UTILIZED	13
TEST SOFTWARE UTILIZED	13
ANNEX A: MEASUREMENT RESULTS.....	14
A.1. MEASUREMENT METHOD	14
A.2. MAXIMUM PEAK OUTPUT POWER	15
A.2.1. MAXIMUM PEAK OUTPUT POWER-CONDUCTED	15
A.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED	18
A.3. PEAK POWER SPECTRAL DENSITY	19
A.4. OCCUPIED 6dB BANDWIDTH	19
FIG. 1 OCCUPIED 6dB BANDWIDTH (802.11A, CH 149).....	20
FIG. 2 OCCUPIED 6dB BANDWIDTH (802.11A, CH 157).....	21
FIG. 3 OCCUPIED 6dB BANDWIDTH (802.11A, CH 165).....	21
FIG. 4 OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 149)	22
FIG. 5 OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 157)	22
FIG. 6 OCCUPIED 6dB BANDWIDTH (802.11N-HT20, CH 165)	23

FIG. 7	OCCUPIED 6dB BANDWIDTH (802.11AC-HT20, CH 149)	23
FIG. 8	OCCUPIED 6dB BANDWIDTH (802.11AC-HT20, CH 157)	24
FIG. 9	OCCUPIED 6dB BANDWIDTH (802.11AC-HT20, CH 165)	24
FIG. 10	OCCUPIED 6dB BANDWIDTH (802.11N-HT40, CH 151)	25
FIG. 11	OCCUPIED 6dB BANDWIDTH (802.11N-HT40, CH 159)	25
FIG. 12	OCCUPIED 6dB BANDWIDTH (802.11AC-HT40, CH 151)	26
FIG. 13	OCCUPIED 6dB BANDWIDTH (802.11AC-HT40, CH 159)	26
FIG. 14	OCCUPIED 6dB BANDWIDTH (802.11AC-HT80, CH 155)	27
A.5.	TRANSMITTER SPURIOUS EMISSION	28
A.5.1	TRANSMITTER SPURIOUS EMISSION - CONDUCTED	28
FIG. 15	CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 30 MHz-1 GHz).....	30
FIG. 16	CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 1 GHz -12 GHz).....	31
FIG. 17	CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 12 GHz-25 GHz)	31
FIG. 18	CONDUCTED SPURIOUS EMISSION (802.11A, CH149, 25 GHz-40 GHz)	32
FIG. 19	CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 30 MHz-1 GHz).....	32
FIG. 20	CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 1 GHz -12 GHz).....	33
FIG. 21	CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 12 GHz-25 GHz)	33
FIG. 22	CONDUCTED SPURIOUS EMISSION (802.11A, CH157, 25 GHz-40 GHz)	34
FIG. 23	CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 30 MHz-1 GHz).....	34
FIG. 24	CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 1 GHz -12 GHz).....	35
FIG. 25	CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 12 GHz-25 GHz)	35
FIG. 26	CONDUCTED SPURIOUS EMISSION (802.11A, CH165, 25 GHz-40 GHz)	36
FIG. 27	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 30 MHz-1 GHz)	36
FIG. 28	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 1 GHz -12 GHz).....	37
FIG. 29	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 12 GHz-25 GHz).....	37
FIG. 30	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH149, 25 GHz-40 GHz).....	38
FIG. 31	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 30 MHz-1 GHz)	38
FIG. 32	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 1 GHz -12 GHz).....	39
FIG. 33	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 12 GHz-25 GHz).....	39
FIG. 34	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH157, 25 GHz-40 GHz).....	40
FIG. 35	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 30 MHz-1 GHz)	41
FIG. 36	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 1 GHz -12 GHz).....	41
FIG. 37	CONDUCTED SPURIOUS EMISSION (802.11N-HT20, CH165, 12 GHz-25 GHz).....	41
FIG. 38	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH165, 25 GHz-40 GHz).....	42
FIG. 39	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH149, 30 MHz-1 GHz).....	42
FIG. 40	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH149, 1 GHz -12 GHz).....	43
FIG. 41	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH149, 12 GHz-25 GHz).....	43
FIG. 42	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH149, 25 GHz-40 GHz).....	44
FIG. 43	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH157, 30 MHz-1 GHz).....	44
FIG. 44	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH157, 1 GHz -12 GHz).....	45
FIG. 45	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH157, 12 GHz-25 GHz).....	45
FIG. 46	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH157, 25 GHz-40 GHz).....	46
FIG. 47	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH165, 30 MHz-1 GHz).....	46
FIG. 48	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH165, 1 GHz -12 GHz).....	47

FIG. 49	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH165, 12 GHz-25 GHz).....	47
FIG. 50	CONDUCTED SPURIOUS EMISSION (802.11AC-HT20, CH165, 25 GHz-40 GHz).....	48
FIG. 51	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 30 MHz-1 GHz)	48
FIG. 52	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 1 GHz -12 GHz)	49
FIG. 53	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 12 GHz-25 GHz).....	49
FIG. 54	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH151, 25 GHz-40 GHz).....	50
FIG. 55	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 30 MHz-1 GHz)	50
FIG. 56	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 1 GHz -12 GHz)	51
FIG. 57	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 12 GHz-25 GHz).....	51
FIG. 58	CONDUCTED SPURIOUS EMISSION (802.11N-HT40, CH159, 25 GHz-40 GHz).....	52
FIG. 59	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH151, 30 MHz-1 GHz)	52
FIG. 60	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH151, 1 GHz -12 GHz).....	53
FIG. 61	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH151, 12 GHz-25 GHz).....	53
FIG. 62	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH151, 25 GHz-40 GHz).....	54
FIG. 63	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH159, 30 MHz-1 GHz)	54
FIG. 64	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH159, 1 GHz -12 GHz).....	55
FIG. 65	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH159, 12 GHz-25 GHz).....	55
FIG. 66	CONDUCTED SPURIOUS EMISSION (802.11AC-HT40, CH159, 25 GHz-40 GHz).....	56
FIG. 67	CONDUCTED SPURIOUS EMISSION (802.11AC-HT80, CH155, 30 MHz-1 GHz)	56
FIG. 68	CONDUCTED SPURIOUS EMISSION (802.11AC-HT80, CH155, 1 GHz -12 GHz).....	57
FIG. 69	CONDUCTED SPURIOUS EMISSION (802.11AC-HT80, CH155, 12 GHz-25 GHz).....	57
FIG. 70	CONDUCTED SPURIOUS EMISSION (802.11AC-HT80, CH155, 25 GHz-40 GHz).....	58
A.5.2 TRANSMITTER SPURIOUS EMISSION - RADIATED		59
A.6. BAND EDGES COMPLIANCE		70
A6.1 BAND EDGES - CONDUCTED.....		70
FIG. 71	BAND EDGES (802.11A, 5745MHz)	71
FIG. 72	BAND EDGES (802.11A, 5825MHz)	71
FIG. 73	BAND EDGES (802.11N-HT20, 5745MHz).....	72
FIG. 74	BAND EDGES (802.11N-HT20, 5825MHz).....	73
FIG. 75	BAND EDGES (802.11AC-HT20, 5745MHz).....	73
FIG. 76	BAND EDGES (802.11AC-HT20, 5825MHz).....	74
FIG. 77	BAND EDGES (802.11N-HT40, 5755MHz).....	74
FIG. 78	BAND EDGES (802.11N-HT40, 5795MHz).....	74
FIG. 79	BAND EDGES (802.11AC-HT40, 5755MHz).....	75
FIG. 80	BAND EDGES (802.11AC-HT40, 5795MHz).....	75
FIG. 81	BAND EDGES (802.11AC-HT80, 5775MHz).....	76
FIG. 82	BAND EDGES (802.11AC-HT80, 5775MHz).....	76
A6.2 BAND EDGES - RADIATED		77
FIG. 83	BAND EDGES (802.11A, 5745MHz)	78
FIG. 84	BAND EDGES (802.11A, 5825MHz)	78
FIG. 85	BAND EDGES (802.11N-HT20, 5745MHz).....	78
FIG. 86	BAND EDGES (802.11N-HT20, 5825MHz).....	79
FIG. 87	BAND EDGES (802.11N-HT40, 5755MHz).....	79
FIG. 88	BAND EDGES (802.11N-HT40, 5795MHz).....	80



A.7. AC POWERLINE CONDUCTED EMISSION.....	83
FIG. 89 AC POWERLINE CONDUCTED EMISSION-802.11A	84
FIG. 90 AC POWERLINE CONDUCTED EMISSION-IDLE.....	85
FIG. 91 AC POWERLINE CONDUCTED EMISSION-802.11A	86
FIG. 92 AC POWERLINE CONDUCTED EMISSION-802.11A	87

1. TEST LATORATORY

1.1. Testing Location

Conducted testing Location: CTTL(huayuan North Road)


Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.2. Project data

Testing Start Date: 2016-12-28


Testing End Date: 2017-03-30

1.3. Signature




Jiang Xue

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Lv Songdong

(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCL Communication Ltd
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: /
Country: China
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: /
Country: China
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM Quad-band/HSPA-UMTS Six-band/LTE 13-band mobile phone
Model name	BBB100-2
FCC ID	2ACCJN018
WLAN Frequency Range	ISM Band: 5725MHz~5850MHz
Number of Channels	CH149 151 153 155 157 159 161 165
Type of modulation	OFDM
Voltage	3.8V DC by Battery

Note: Photographs of EUT are shown in ANNEX C of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	/	05	AAJ048
EUT2	/	05	AAJ048

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	battery	/	/
AE2	battery	/	/
AE3	Travel charger	/	16TCT-CH-1886
AE4	Travel charger	/	16TCT-CH-1872
AE5	Travel charger	/	16TCT-CH-0005
AE6	Travel charger	/	/
AE7	Travel charger	/	/
AE8	USB Cable	/	/
AE9	USB Cable	/	/

AE1

Model	BAT-63108-003
SN	CAC3440001C3
Manufacturer	ATL
Capacitance	3440 mAh
Nominal voltage	3.85V

AE2

Model	TLp034E1
SN	CAC3440003C1

Manufacturer	BYD
Capacitance	3440 mAh
Nominal voltage	3.85V
AE3	
Name	CBA0060AGHC1
Model	QC10US
Manufacturer	BYD
Length of cable	/
AE4	
Name	CBA0060ACHC1
Model	QC10AU
Manufacturer	BYD
Length of cable	/
AE5	
Name	CBA0060AJHC1
Model	QC10IN
Manufacturer	BYD
Length of cable	/
AE6	
Name	CBA0060AAHC1
Model	QC10EU
Manufacturer	BYD
Length of cable	/
AE7	
Name	CBA0060ABHC1
Model	QC10UK
Manufacturer	BYD
Length of cable	/
AE8	
Model	CDA0000105CF
Manufacturer	LUXSHARE
Length of cable	99cm
AE9	
Model	CDA0000108C2
Manufacturer	SHENGHUA
Length of cable	99cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

Equipment Under Test (EUT) is a GSM Quad-band/HSPA-UMTS Six-band/LTE 13-band mobile phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	
FCC Part15	15.209 Radiated emission limits, general requirements;	2015
	Subpart E—Unlicensed National Information Infrastructure Devices	
	Methods of Measurement of Radio-Noise Emissions from	
ANSI C63.10	Low-Voltage Electrical and Electronic Equipment in the	2013
	Range of 9 kHz to 40 GHz	

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407(e)	/	P
Band Edges Compliance	15.407 (b)	/	P
Transmitter Spurious Emission - Conducted	15.407,15.205	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P
99% Occupied Bandwidth	/	/	P
Transmitter Spurious Emission - Radiated < 30MHz	15.407, 15.209	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacture as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.8V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2016-06-07	2017-06-06
2	Test Receiver	ESCI	100948	Rohde & Schwarz	2016-07-06	2017-07-05
3	LISN	ENV216	101200	Rohde & Schwarz	2016-07-11	2017-07-10
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	2017-03-02	2018-03-01
2	Loop antenna	HFH2-Z2	829324/007	Rohde & Schwarz	2014-12-17	2017-12-16
3	BiLog Antenna	VULB9163	301	Schwarzbeck	2014-12-17	2017-12-16
4	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2014-12-16	2017-12-15
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	2014-06-18	2017-06-17
6	Vector Signal Analyzer	FSV40	101047	Rohde & Schwarz	2016-06-29	2017-06-28
7	Semi-anechoic chamber	/	CT000332-1074	Frankonia German	/	/

Test Software Utilized


Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V8.40.0	R&S
Conducted Continuous Emission	EMC32 V8.52.0	R&S

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

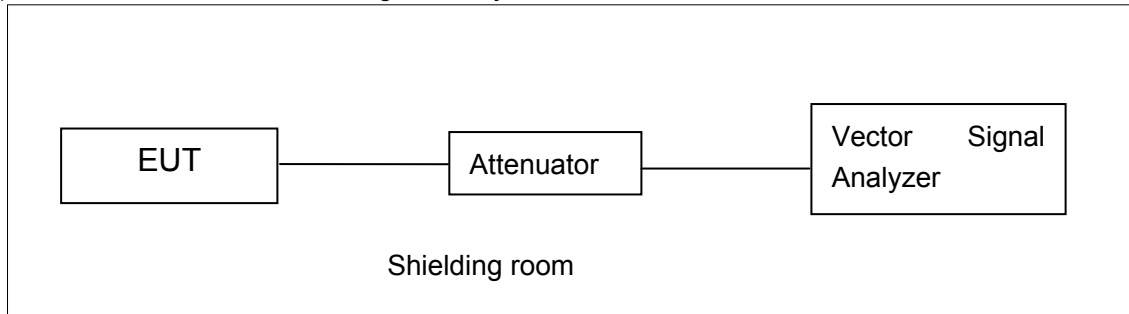


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

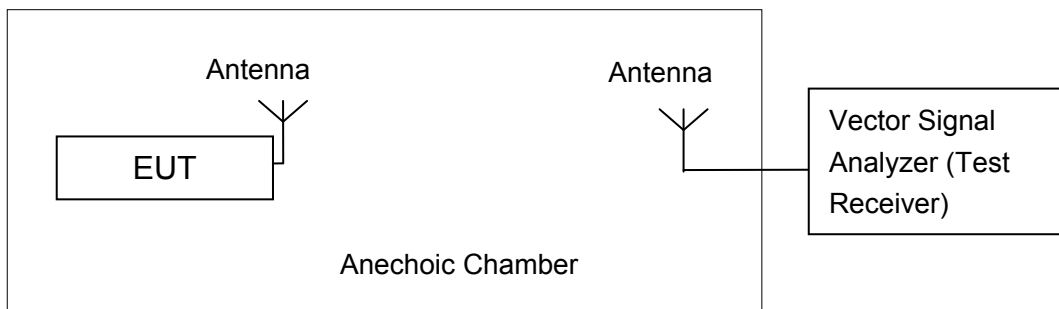

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

A.2.1. Maximum Peak Output Power-conducted

Measurement Results:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	22.43	/	/
	9	22.45	/	/
	12	22.09	/	/
	18	22.17	/	/
	24	22.46	/	/
	36	22.59	21.75	21.73
	48	22.29	/	/
	54	22.32	/	/

The data rate 36Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n (20MHz)	MCS0	22.46	/	/
	MCS1	22.51	/	/
	MCS2	22.60	21.32	21.33
	MCS3	22.23	/	/
	MCS4	22.24	/	/
	MCS5	22.32	/	/
	MCS6	21.21	/	/
	MCS7	21.25	/	/

The data rate MCS2 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac (20MHz)	MCS0	22.49	21.29	21.24
	MCS1	22.33	/	/
	MCS2	22.03	/	/
	MCS3	21.65	/	/
	MCS4	21.46	/	/
	MCS5	21.26	/	/
	MCS6	20.50	/	/
	MCS7	20.23	/	/
	MCS8	19.13		

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n (40MHz)	MCS0	21.91	/
	MCS1	21.98	/
	MCS2	21.96	/
	MCS3	22.29	21.45
	MCS4	21.42	/
	MCS5	21.48	/
	MCS6	20.28	/
	MCS7	20.35	/

The data rate MCS3 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac (40MHz)	MCS0	22.57	22.09
	MCS1	22.42	/
	MCS2	22.12	/
	MCS3	21.70	/
	MCS4	21.60	/
	MCS5	21.17	/
	MCS6	20.41	/
	MCS7	20.29	/

	MCS8	19.39	/
	MCS9	19.28	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac (80MHz)	MCS0	21.70
	MCS1	21.21
	MCS2	21.29
	MCS3	20.67
	MCS4	20.58
	MCS5	20.55
	MCS6	19.46
	MCS7	19.47
	MCS8	18.74
	MCS9	18.45

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

A.2.2. Maximum Average Output Power-Conducted

Method of Measurement: See ANSI C63.10-clause 12.3.2.2 Method SA-1

802.11a mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	14.37	13.32	13.16

802.11n-HT20 mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz(Ch165)
802.11n(20MHz)	14.43	13.31	13.23

802.11ac-HT20 mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz(Ch165)
802.11ac(20MHz)	14.41	13.35	13.27

802.11n-HT40 mode

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz(Ch159)
802.11n(40MHz)	13.72	13.18

802.11ac-HT40 mode

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz(Ch159)
802.11ac(40MHz)	14.62	14.12

802.11ac-HT80 mode

Mode	Test Result (dBm)
	5775MHz (Ch155)
802.11ac(80MHz)	13.66

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	9.33	P
	157	8.08	P
	165	7.62	P
802.11n HT20	149	7.83	P
	157	6.52	P
	165	6.68	P
802.11ac HT20	149	8.03	P
	157	6.78	P
	165	7.02	P
802.11n HT40	151	4.62	P
	159	3.53	P
802.11ac HT40	151	5.97	P
	159	5.54	P
802.11ac HT80	155	1.64	P

Conclusion: PASS

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407(e)	≥ 500

The measurement is made according to KDB789033 D02 .

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11a	149	Fig.1	16500	P
	157	Fig.2	16500	P

	165	Fig.3	16500	P
802.11n HT20	149	Fig.4	17600	P
	157	Fig.5	17600	P
	165	Fig.6	17600	P
802.11ac HT20	149	Fig.7	17600	P
	157	Fig.8	17600	P
	165	Fig.9	17600	P
802.11n HT40	151	Fig.10	35520	P
	159	Fig.11	35200	P
802.11ac HT40	151	Fig.12	35200	P
	159	Fig.13	35200	P
802.11ac HT80	155	Fig.14	75200	P

Conclusion: PASS

Test graphs as below:

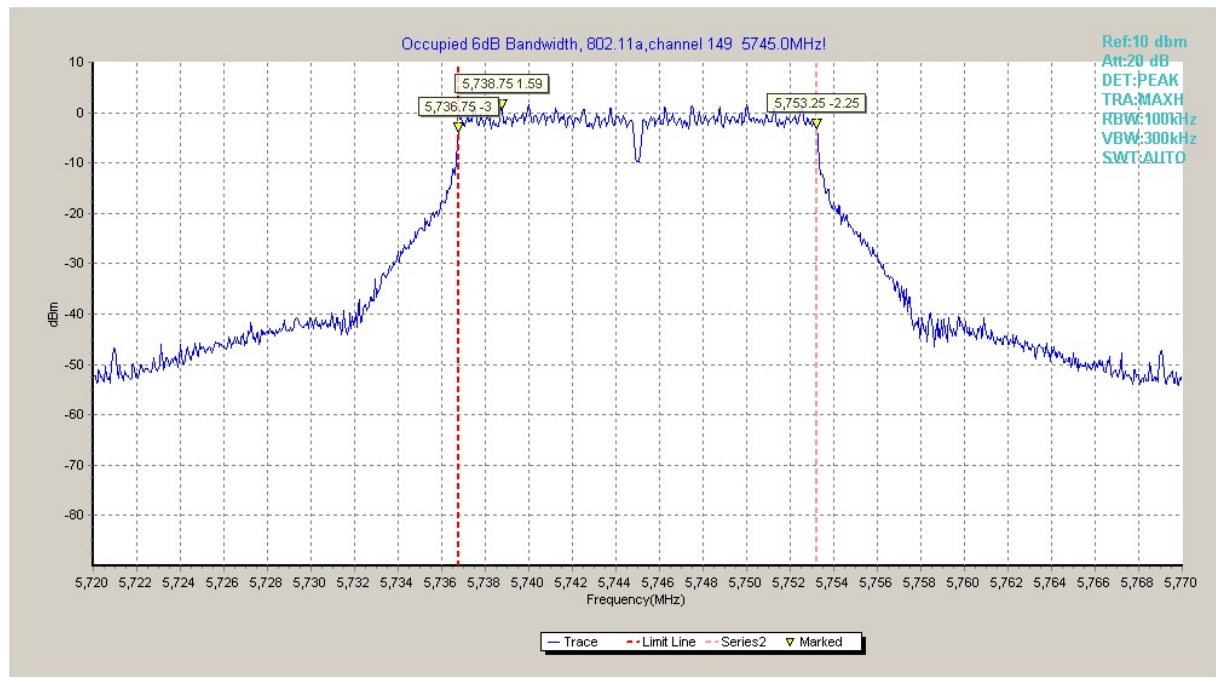


Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)

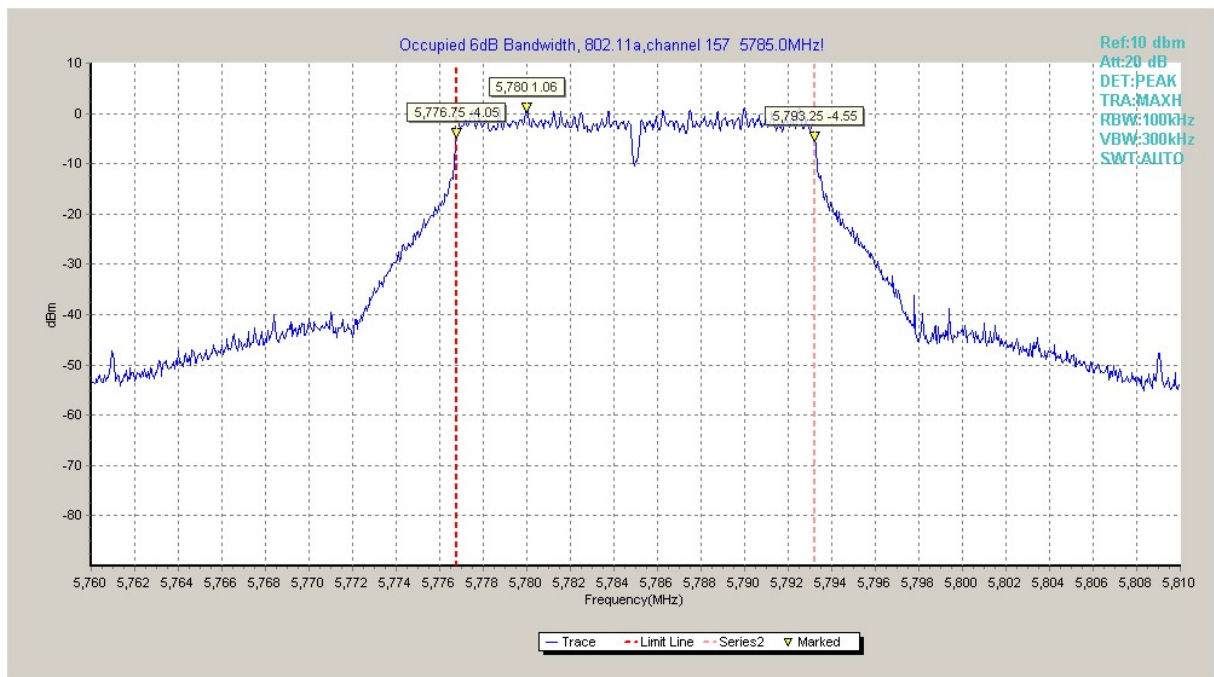


Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)

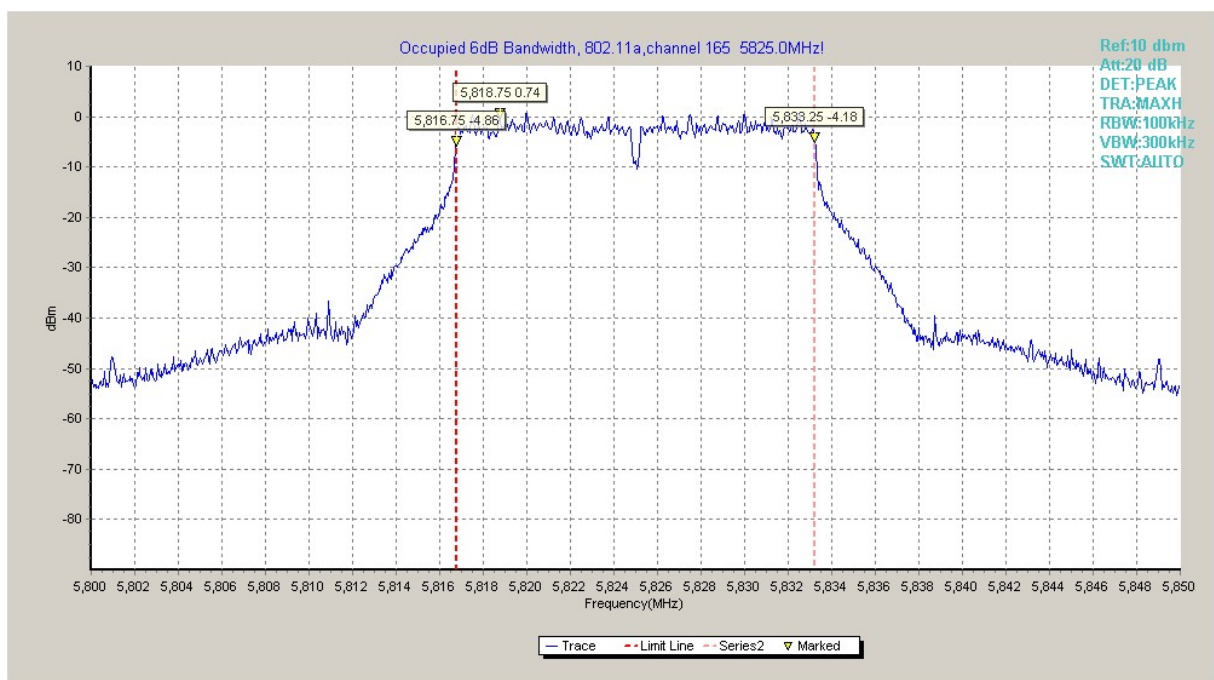


Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)

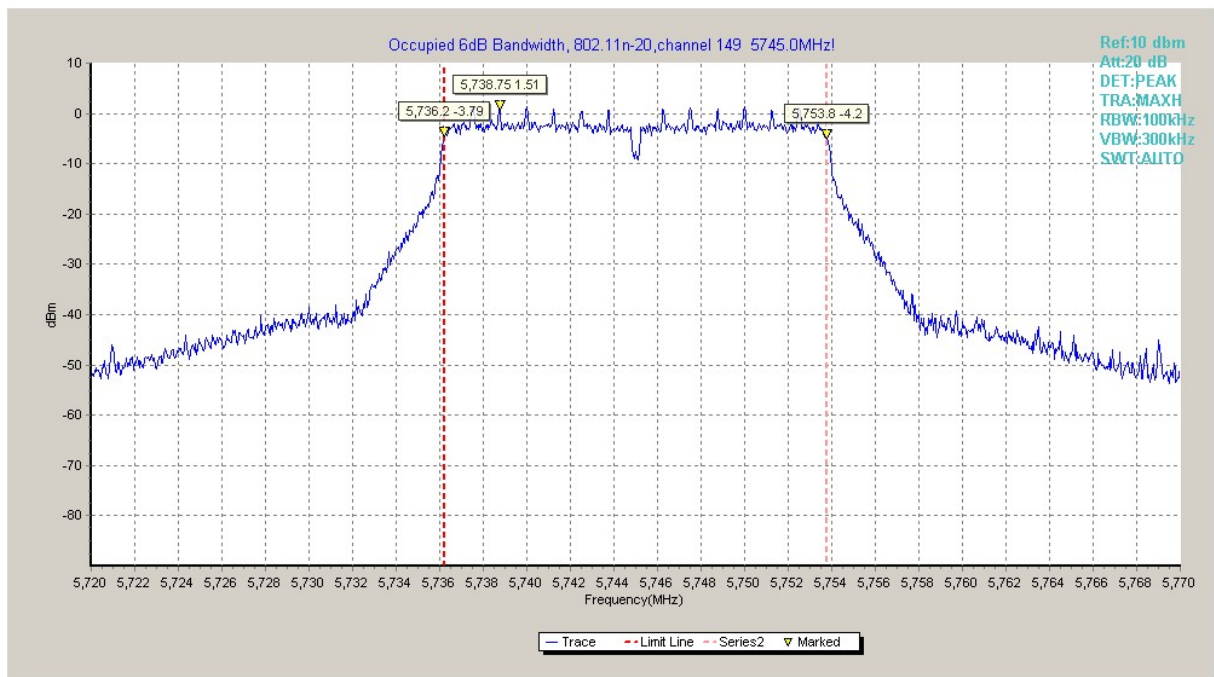


Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

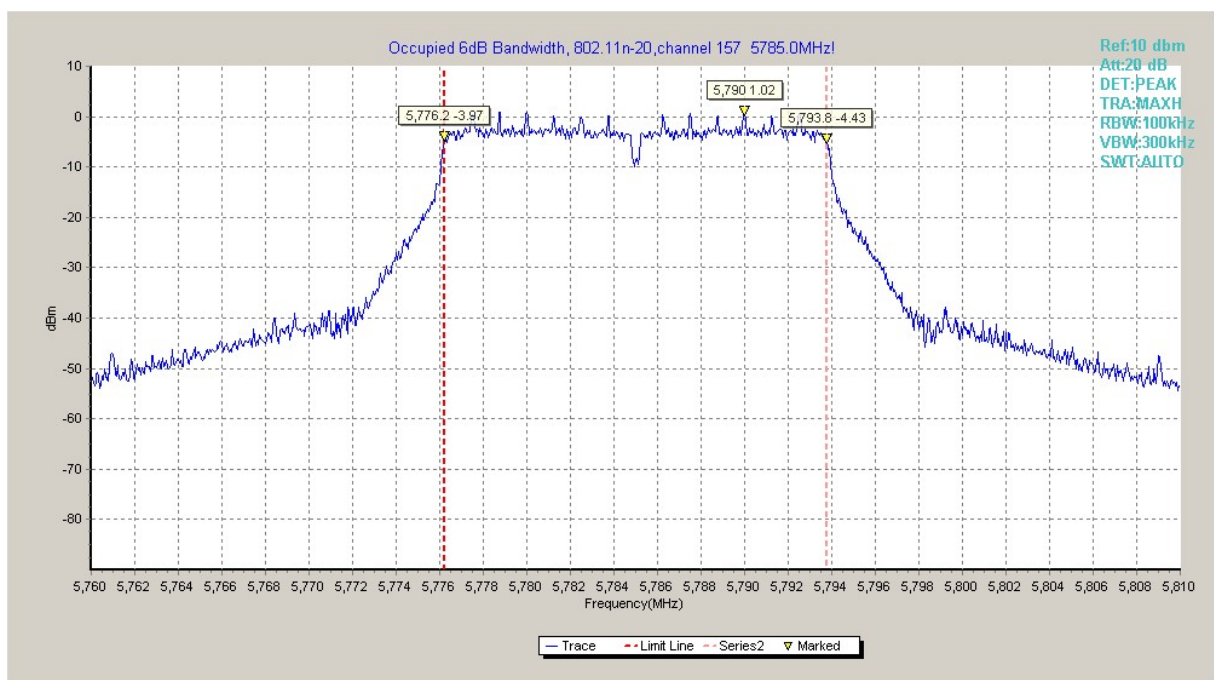


Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)

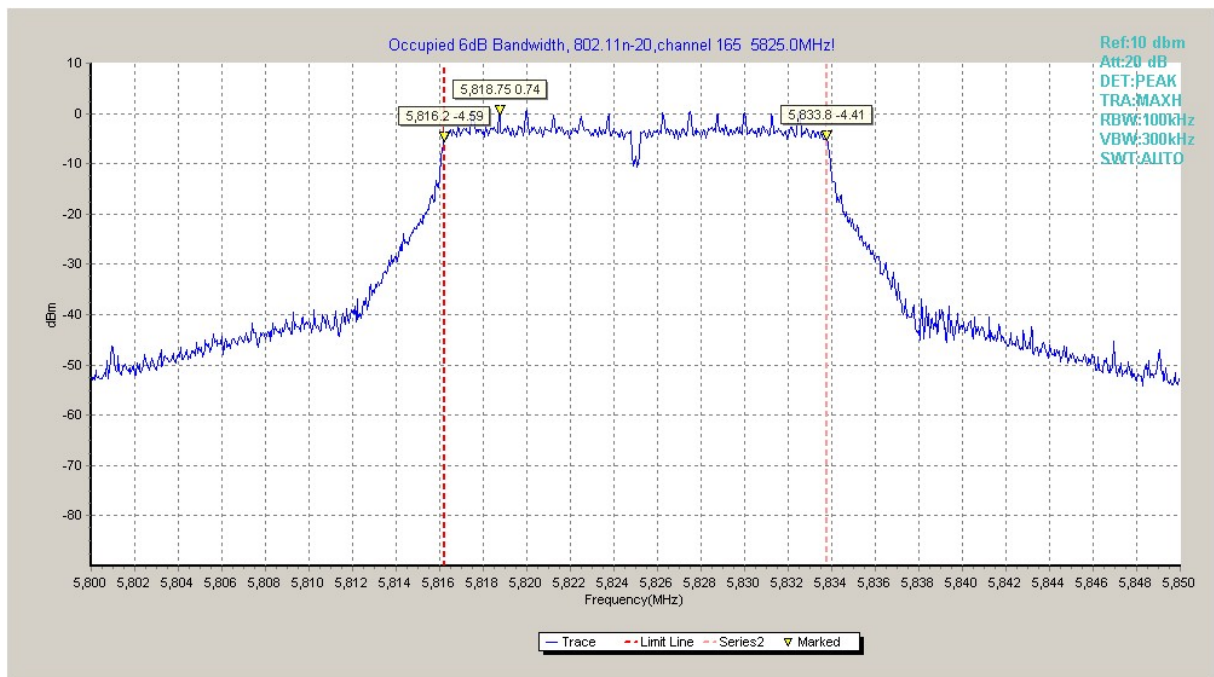


Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

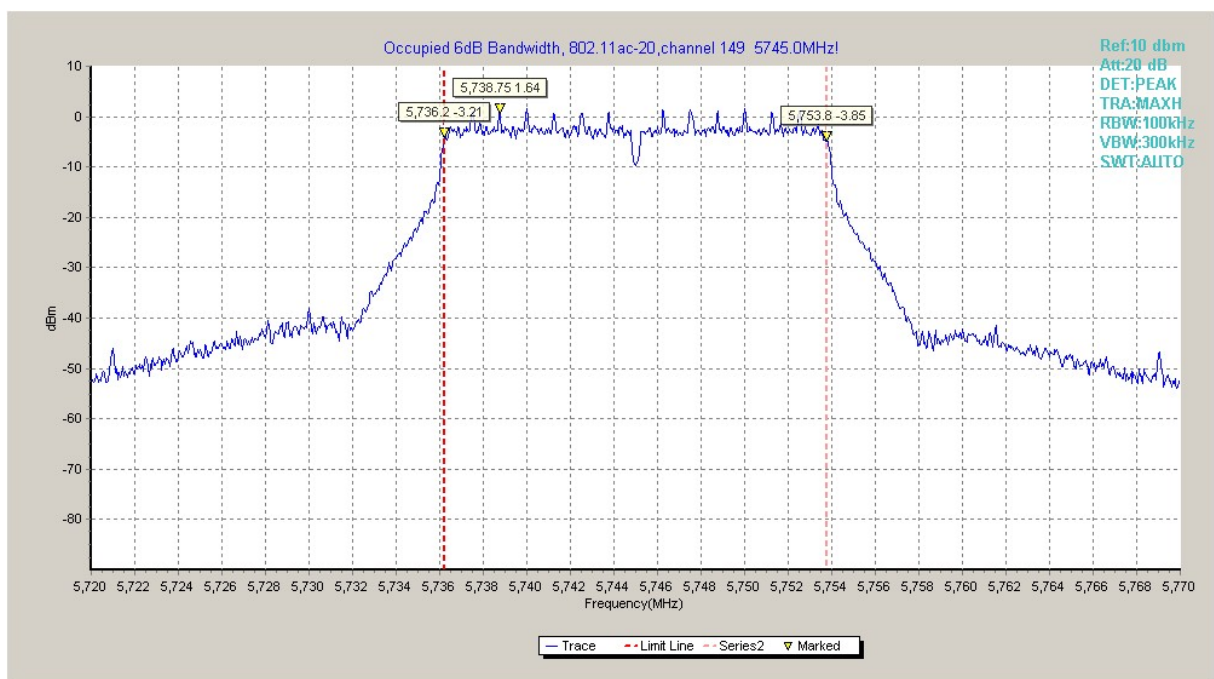


Fig. 7 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 149)

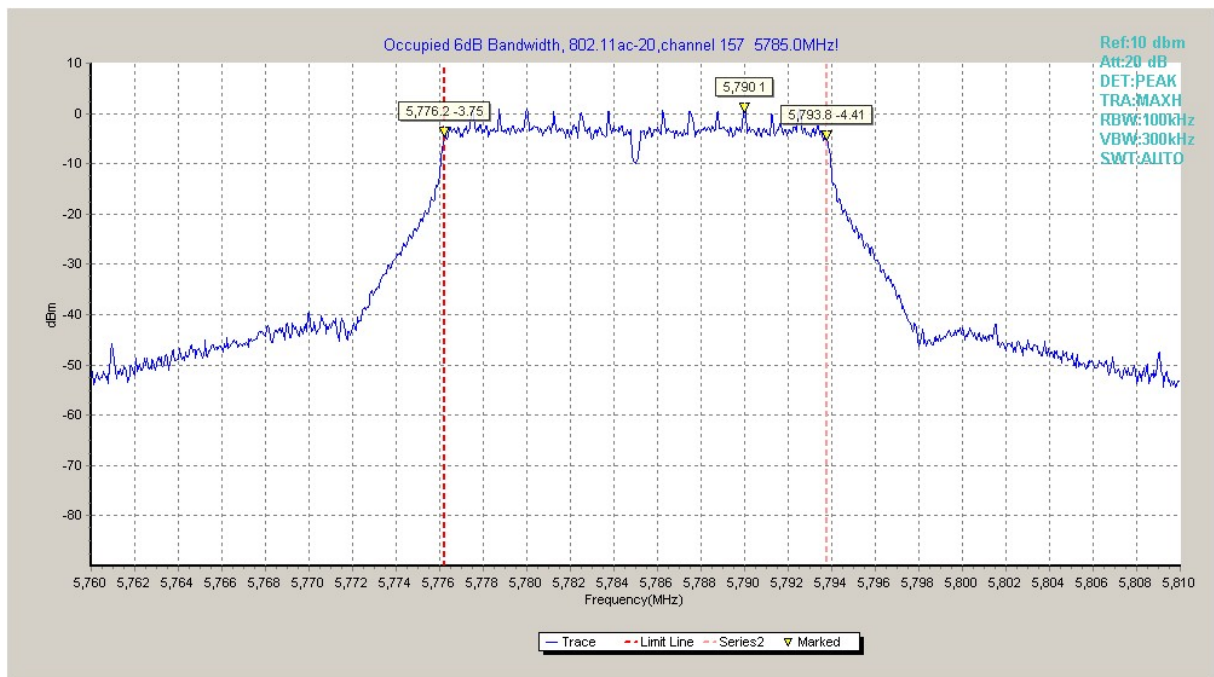


Fig. 8 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 157)

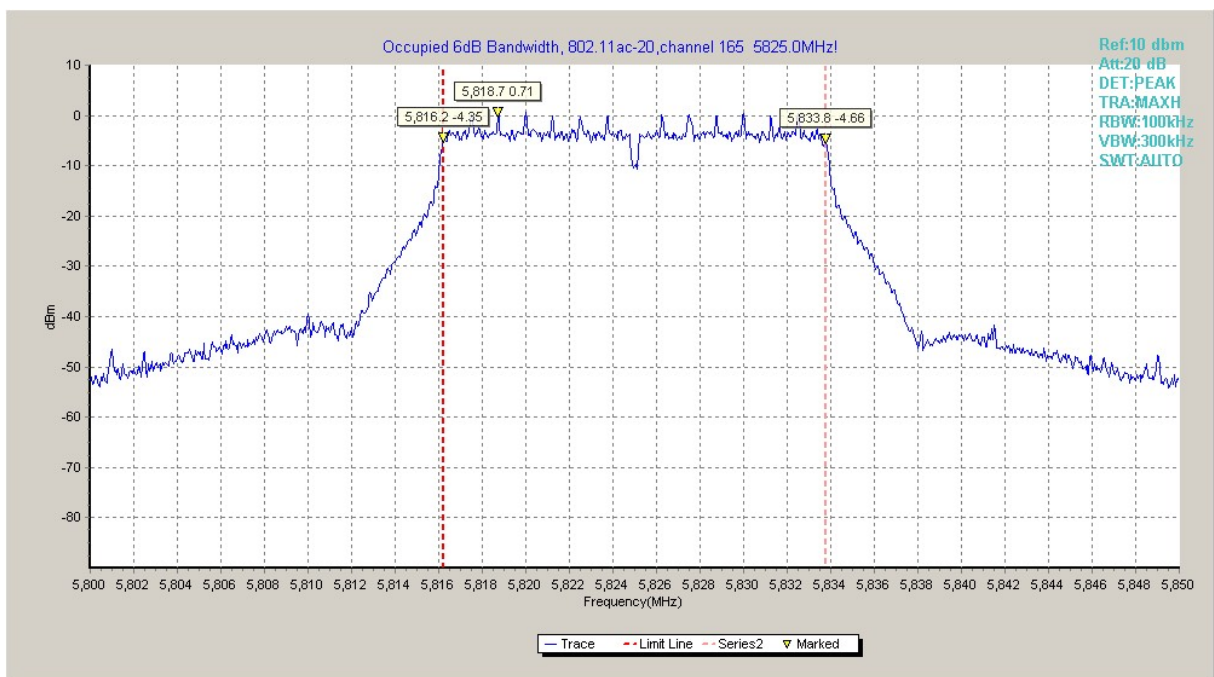


Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 165)

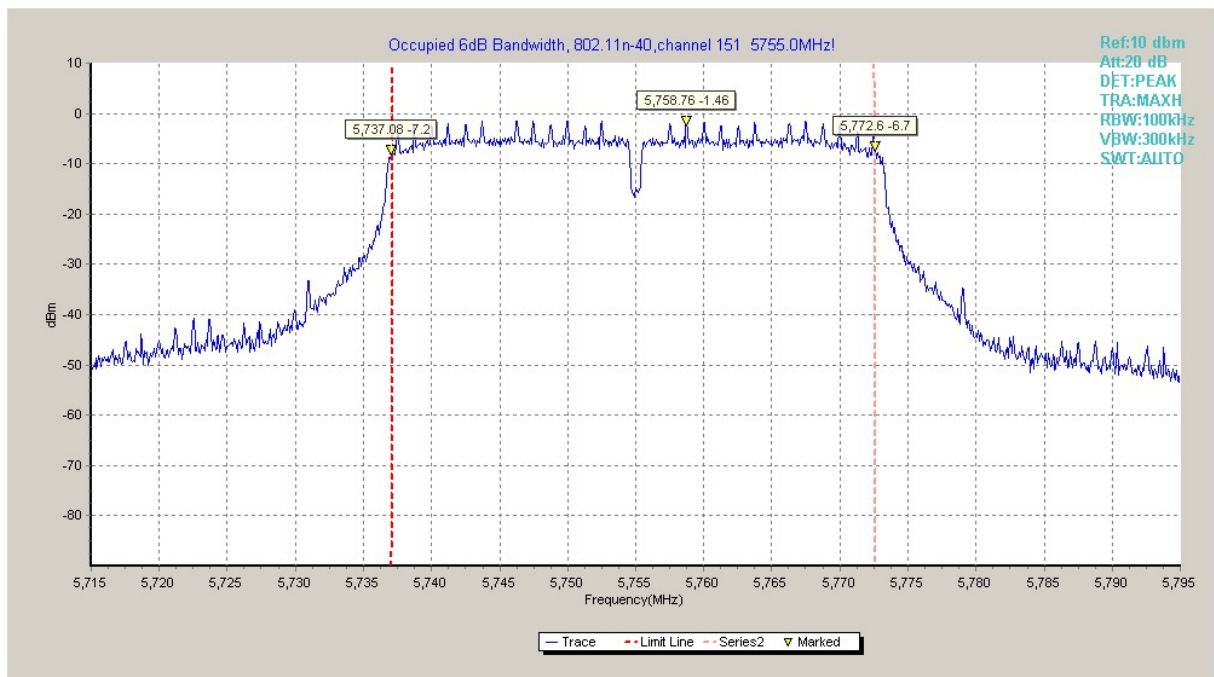


Fig. 10 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)

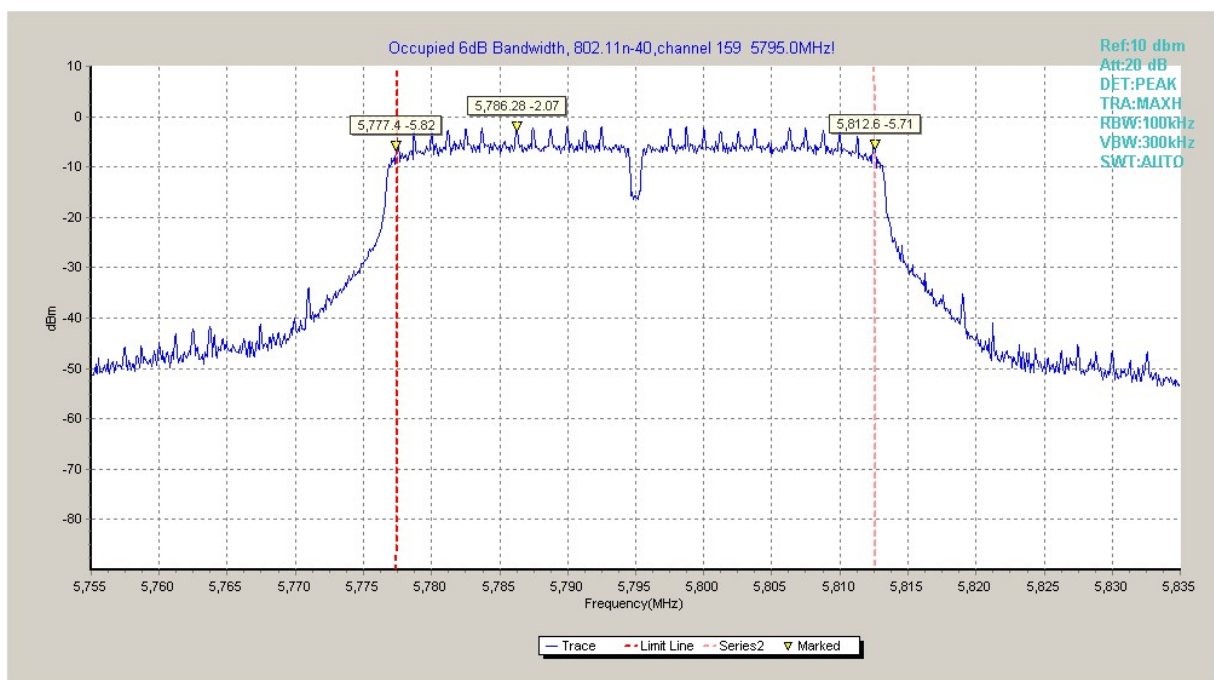


Fig. 11 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)

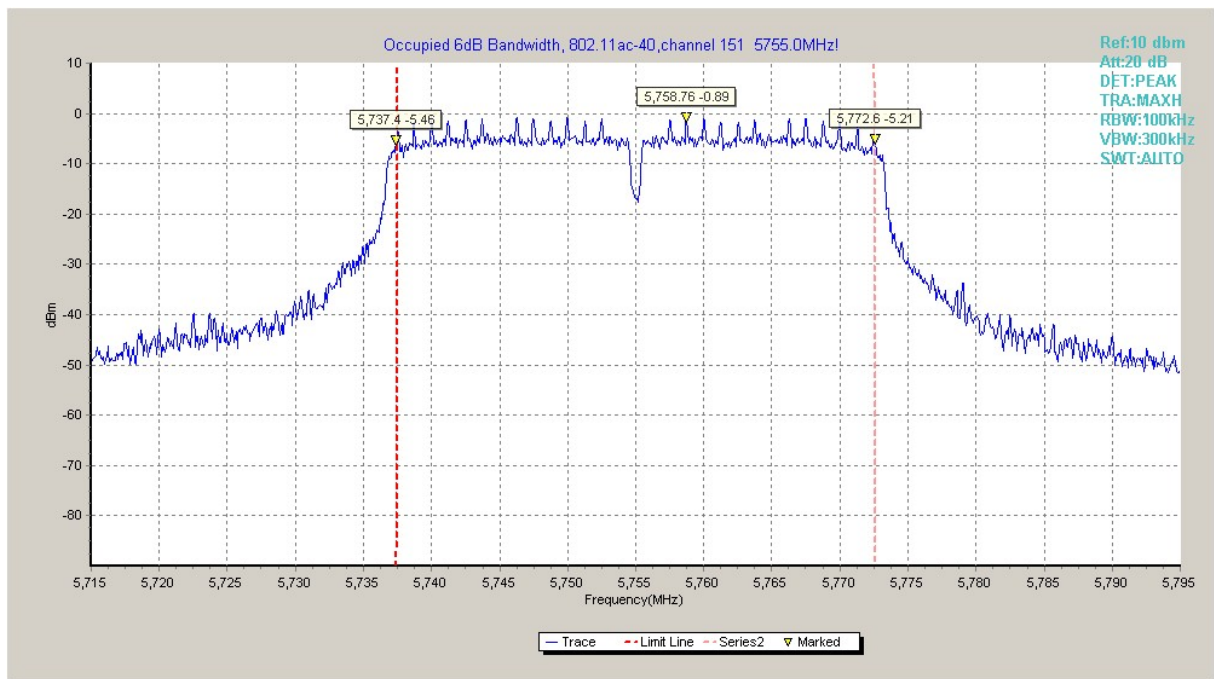


Fig. 12 Occupied 6dB Bandwidth (802.11ac-HT40, Ch 151)

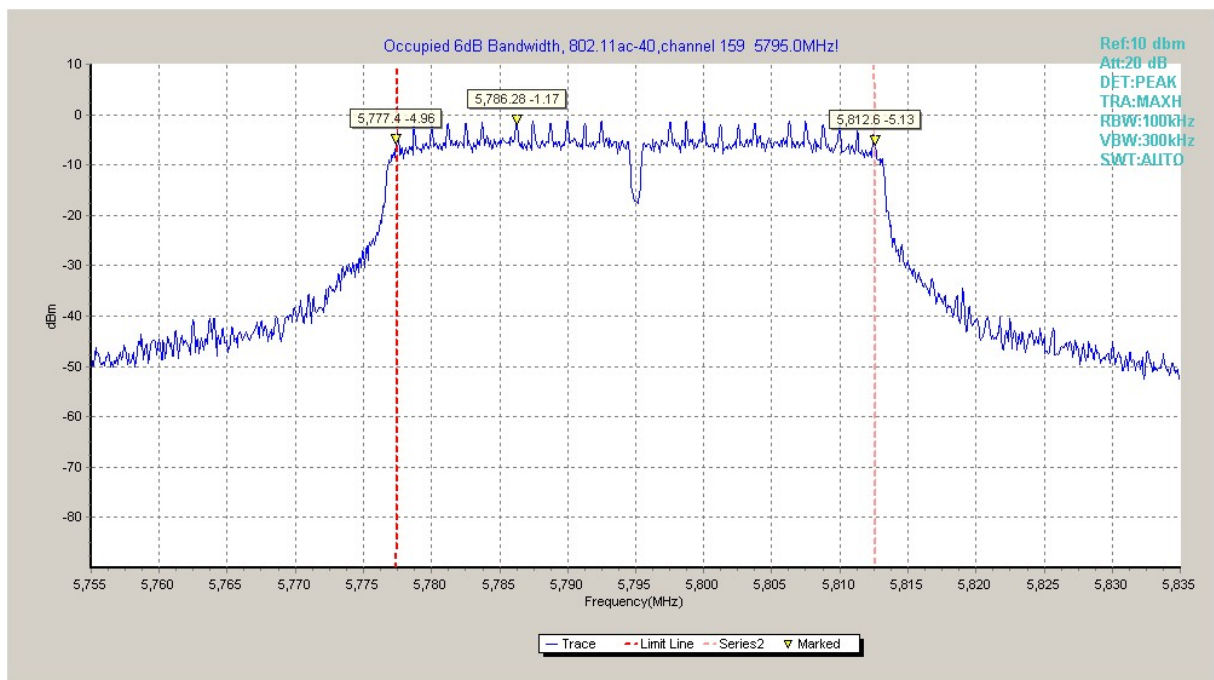


Fig. 13 Occupied 6dB Bandwidth (802.11ac-HT40, Ch 159)

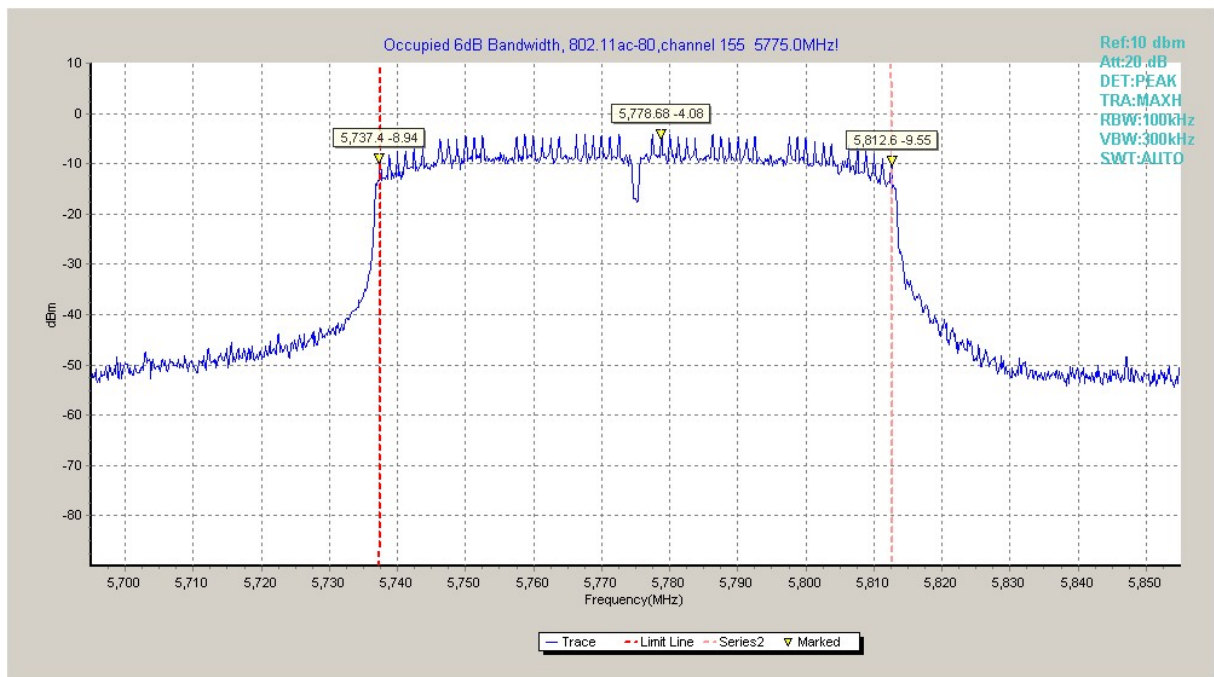


Fig. 14 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)

A.5. Transmitter Spurious Emission

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤ 3.6GHz	0.82
3.6GHz ≤ f ≤ 8GHz	1.55
8GHz ≤ f ≤ 20GHz	1.86
20GHz ≤ f ≤ 22GHz	1.90
22GHz ≤ f ≤ 26GHz	2.20

A.5.1 Transmitter Spurious Emission - Conducted

Measurement Results:

802.11a mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	30 MHz ~ 1 GHz	Fig.15	P
		1 GHz ~ 12 GHz	Fig.16	P
		12 GHz ~ 25 GHz	Fig.17	P
		25 GHz ~ 40 GHz	Fig.18	P
	157	30 MHz ~ 1 GHz	Fig.19	P
		1 GHz ~ 12 GHz	Fig.20	P
		12 GHz ~ 25 GHz	Fig.21	P
		25 GHz ~ 40 GHz	Fig.22	P
	165	30 MHz ~ 1 GHz	Fig.23	P
		1 GHz ~ 12 GHz	Fig.24	P
		12 GHz ~ 25 GHz	Fig.25	P
		25 GHz ~ 40 GHz	Fig.26	P

802.11n-HT20 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT20	149	30 MHz ~ 1 GHz	Fig.27	P
		1 GHz ~ 12 GHz	Fig.28	P
		12 GHz ~ 25 GHz	Fig.29	P
		25 GHz ~ 40 GHz	Fig.30	P
	157	30 MHz ~ 1 GHz	Fig.31	P
		1 GHz ~ 12 GHz	Fig.32	P
		12 GHz ~ 25 GHz	Fig.33	P
		25 GHz ~ 40 GHz	Fig.34	P
	165	30 MHz ~ 1 GHz	Fig.35	P
		1 GHz ~ 12 GHz	Fig.36	P
		12 GHz ~ 25 GHz	Fig.37	P
		25 GHz ~ 40 GHz	Fig.38	P

802.11ac-HT20 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11ac HT20	149	30 MHz ~ 1 GHz	Fig.39	P
		1 GHz ~ 12 GHz	Fig.40	P
		12 GHz ~ 25 GHz	Fig.41	P
		25 GHz ~ 40 GHz	Fig.42	P
	157	30 MHz ~ 1 GHz	Fig.43	P
		1 GHz ~ 12 GHz	Fig.44	P
		12 GHz ~ 25 GHz	Fig.45	P
		25 GHz ~ 40 GHz	Fig.46	P
	165	30 MHz ~ 1 GHz	Fig.47	P
		1 GHz ~ 12 GHz	Fig.48	P
		12 GHz ~ 25 GHz	Fig.49	P
		25 GHz ~ 40 GHz	Fig.50	P

802.11n-HT40 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	151	30 MHz ~ 1 GHz	Fig.51	P
		1 GHz ~ 12 GHz	Fig.52	P
		12 GHz ~ 25 GHz	Fig.53	P
		25 GHz ~ 40 GHz	Fig.54	P
	159	30 MHz ~ 1 GHz	Fig.55	P
		1 GHz ~ 12 GHz	Fig.56	P
		12 GHz ~ 25 GHz	Fig.57	P
		25 GHz ~ 40 GHz	Fig.58	P

802.11ac-HT40 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11ac HT40	151	30 MHz ~ 1 GHz	Fig.59	P
		1 GHz ~ 12 GHz	Fig.60	P
		12 GHz ~ 25 GHz	Fig.61	P
		25 GHz ~ 40 GHz	Fig.62	P
	159	30 MHz ~ 1 GHz	Fig.63	P
		1 GHz ~ 12 GHz	Fig.64	P
		12 GHz ~ 25 GHz	Fig.65	P
		25 GHz ~ 40 GHz	Fig.66	P

802.11ac-HT80 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11ac HT80	155	30 MHz ~ 1 GHz	Fig.67	P
		1 GHz ~ 12 GHz	Fig.68	P
		12 GHz ~ 25 GHz	Fig.69	P
		25 GHz ~ 40 GHz	Fig.70	P

Conclusion: PASS

Test graphs as below:

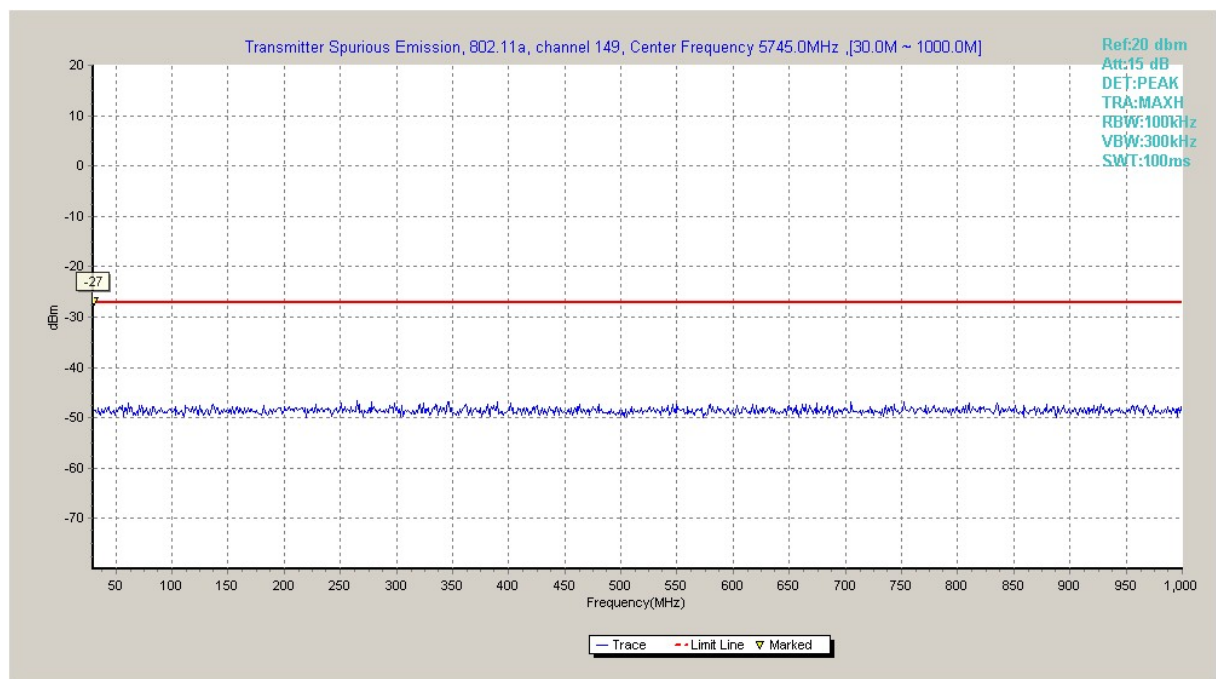


Fig. 15 Conducted Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)

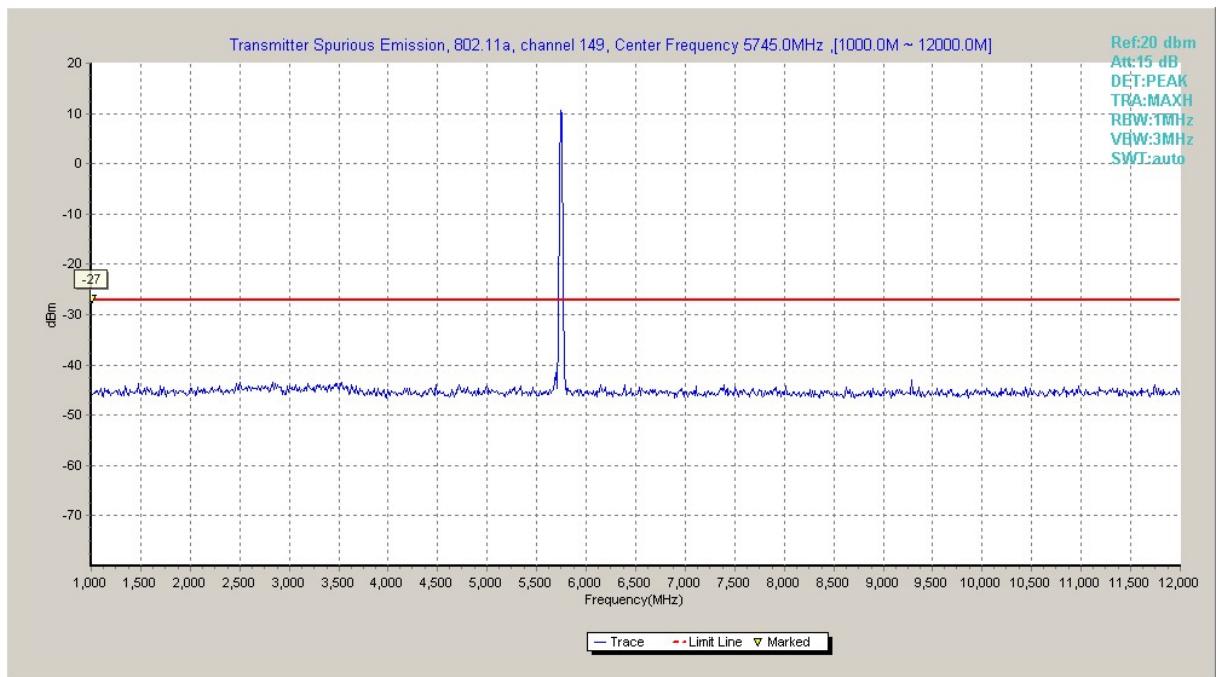


Fig. 16 Conducted Spurious Emission (802.11a, Ch149, 1 GHz -12 GHz)

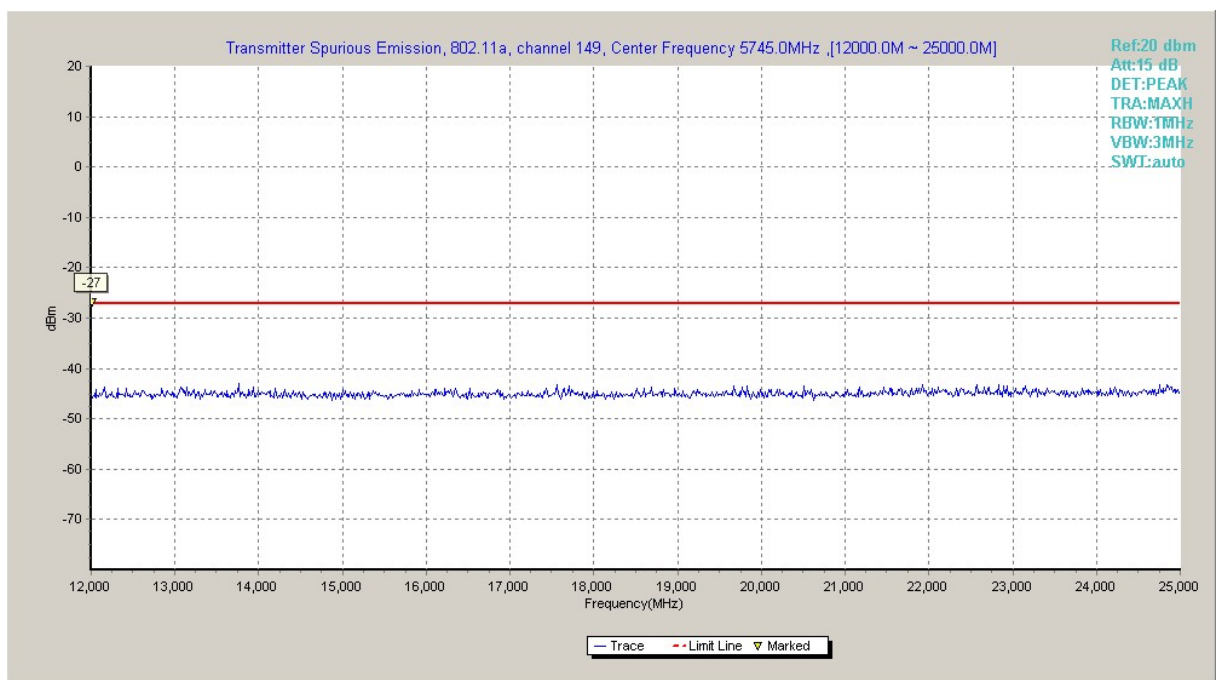


Fig. 17 Conducted Spurious Emission (802.11a, Ch149, 12 GHz-25 GHz)

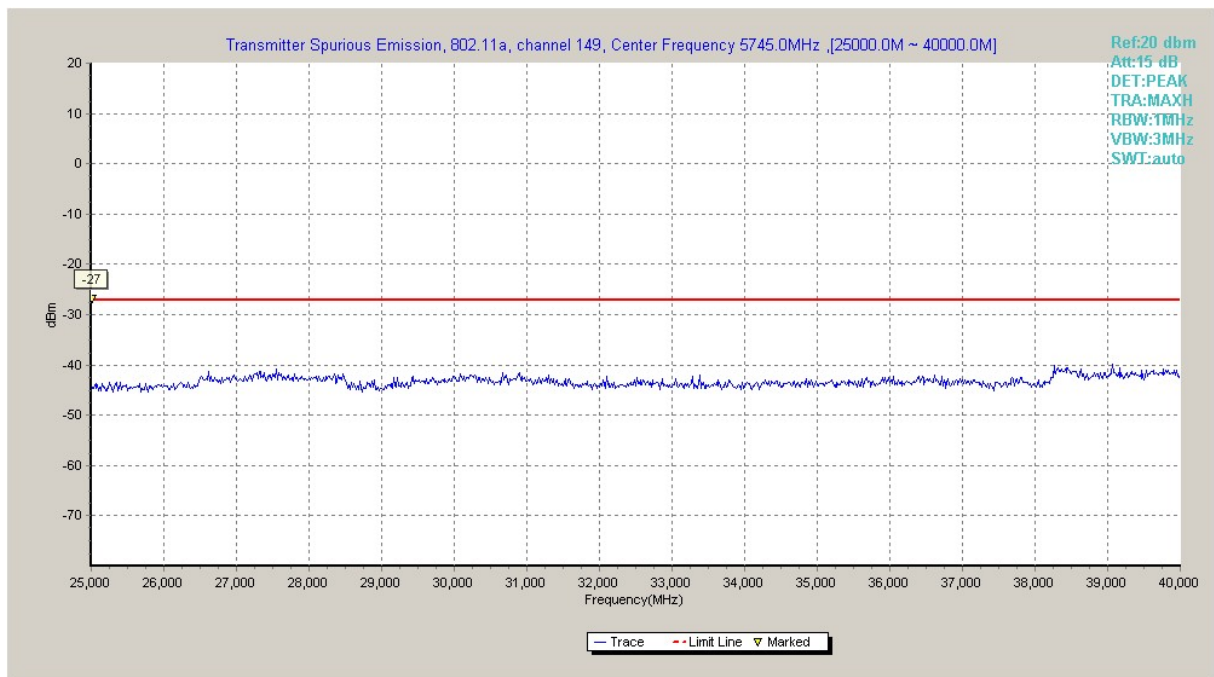


Fig. 18 Conducted Spurious Emission (802.11a, Ch149, 25 GHz-40 GHz)

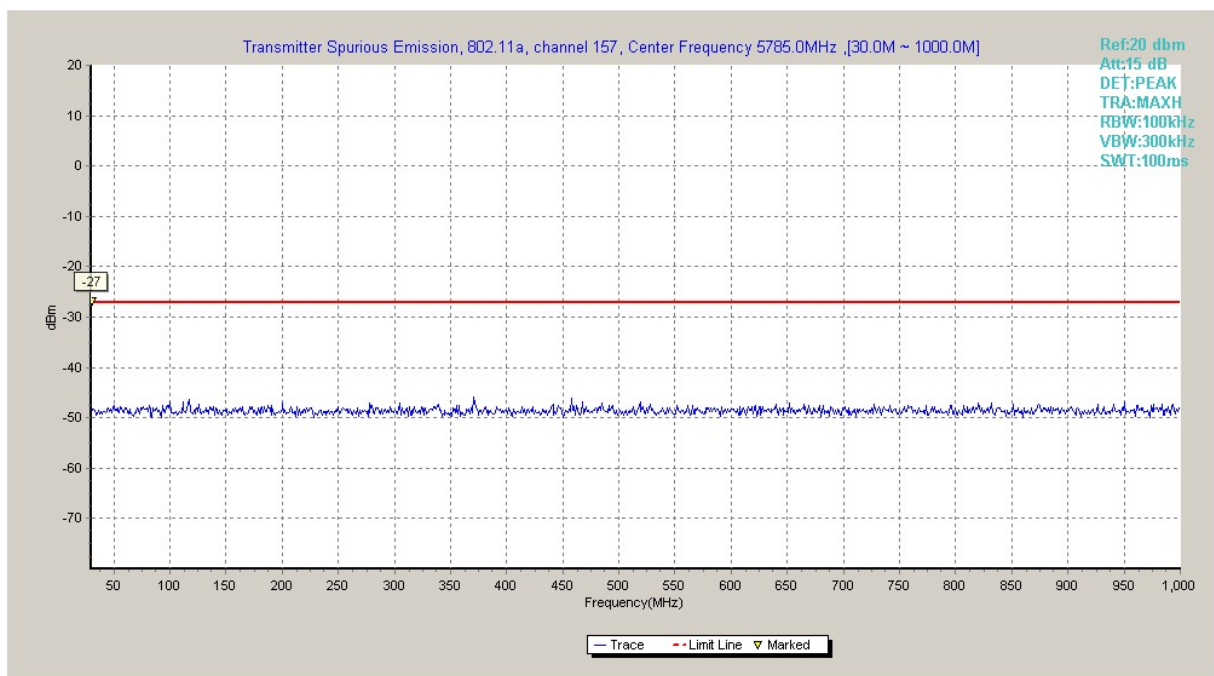


Fig. 19 Conducted Spurious Emission (802.11a, Ch157, 30 MHz-1 GHz)

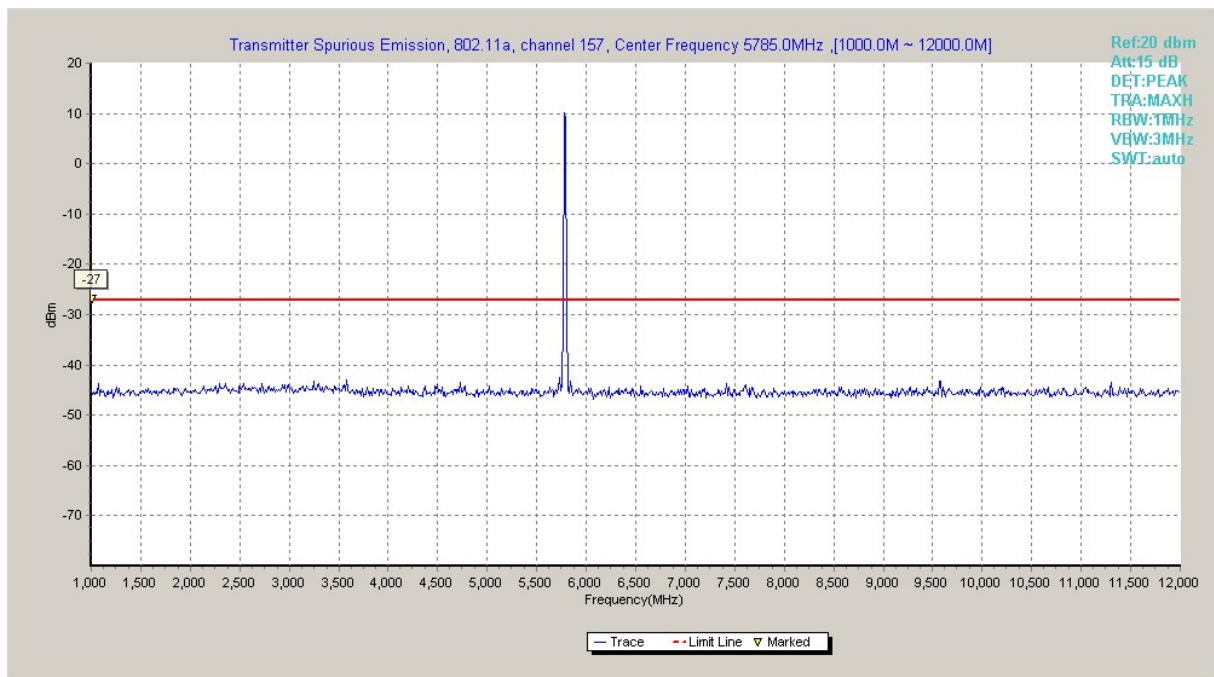


Fig. 20 Conducted Spurious Emission (802.11a, Ch157, 1 GHz -12 GHz)

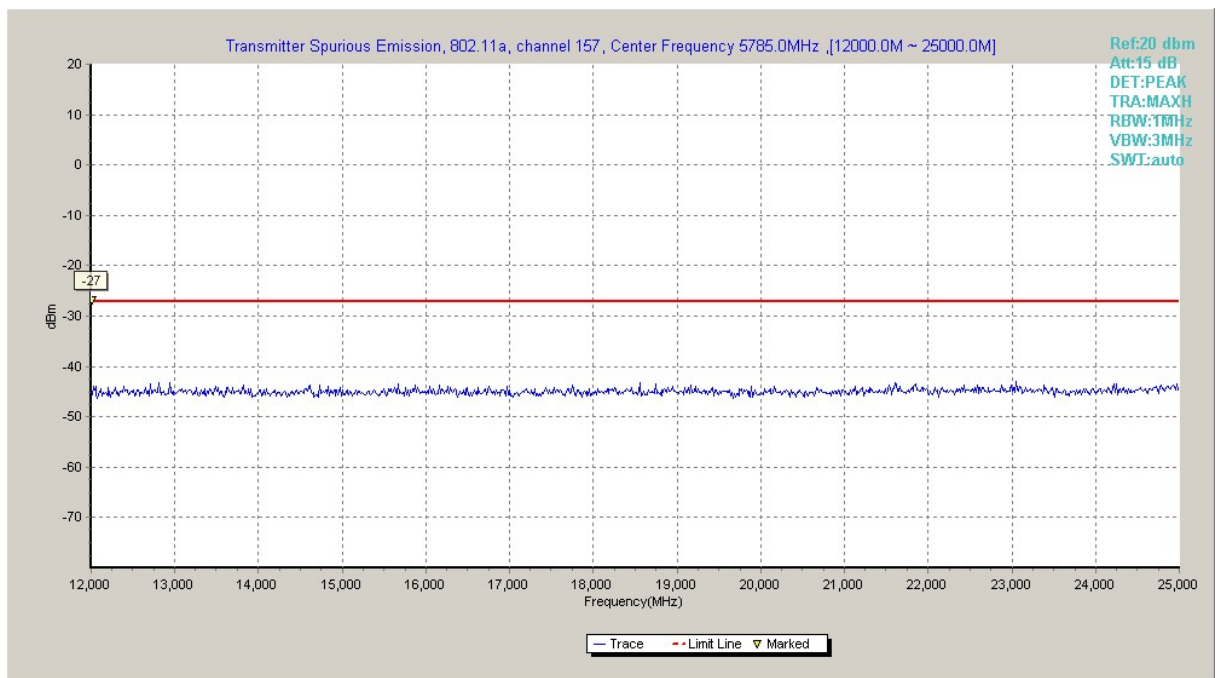


Fig. 21 Conducted Spurious Emission (802.11a, Ch157, 12 GHz-25 GHz)

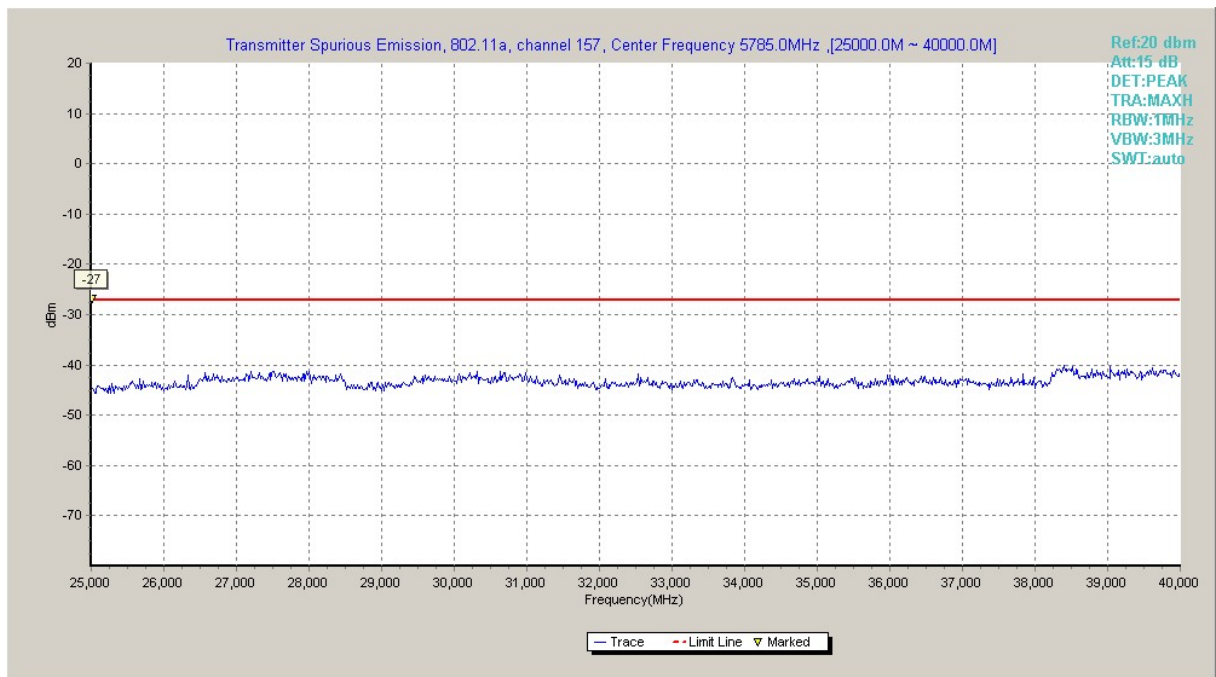


Fig. 22 Conducted Spurious Emission (802.11a, Ch157, 25 GHz-40 GHz)

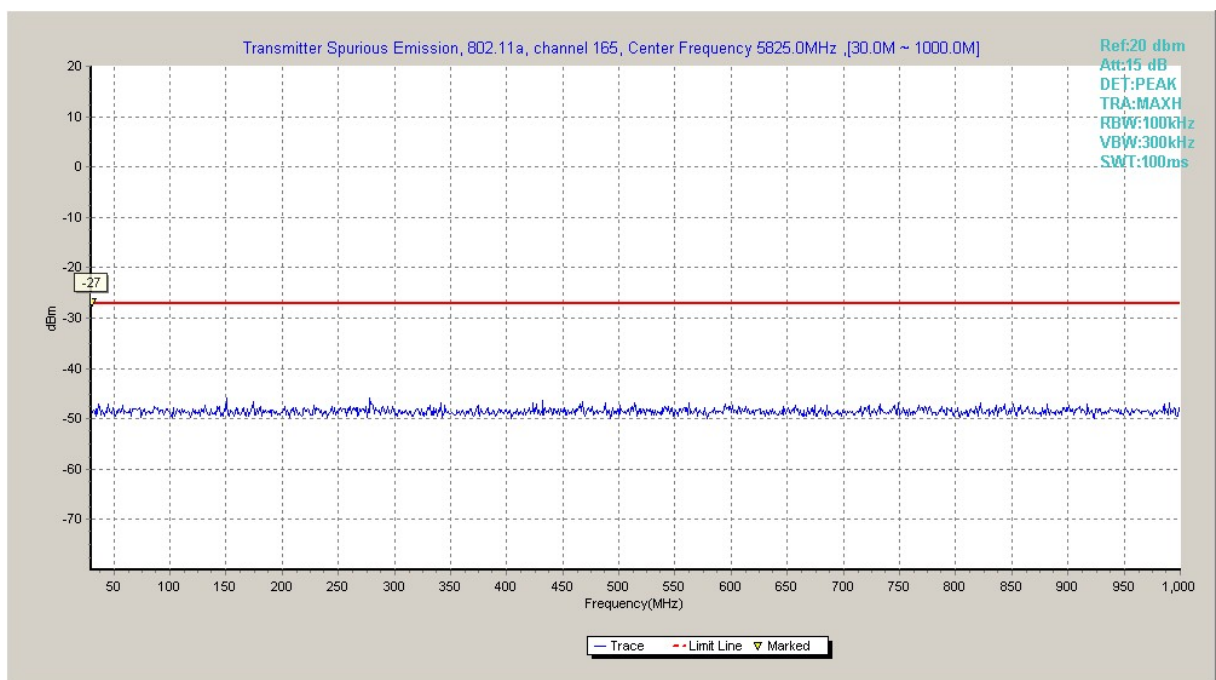


Fig. 23 Conducted Spurious Emission (802.11a, Ch165, 30 MHz-1 GHz)

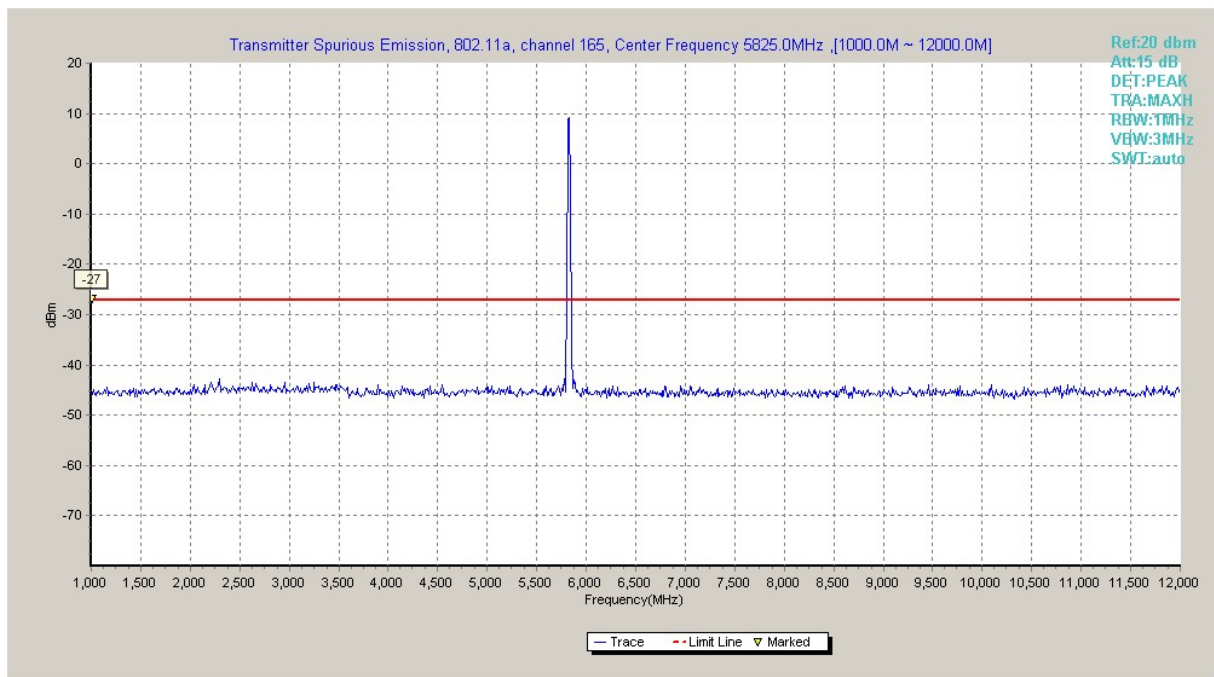


Fig. 24 Conducted Spurious Emission (802.11a, Ch165, 1 GHz -12 GHz)

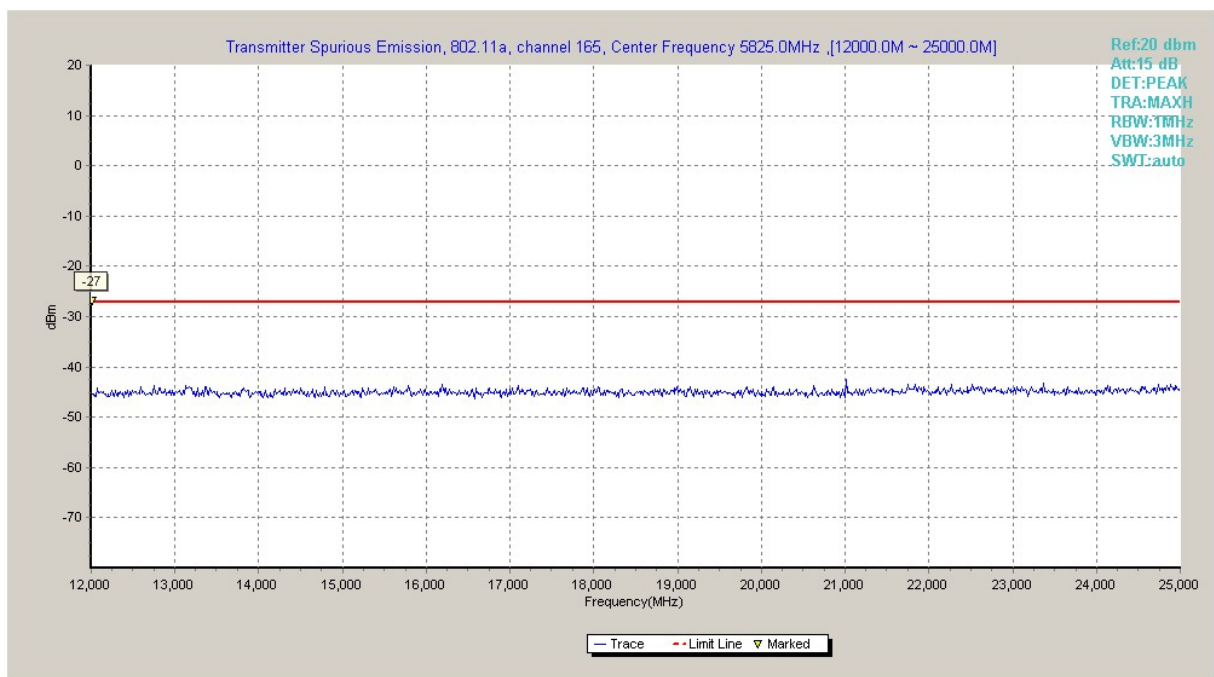


Fig. 25 Conducted Spurious Emission (802.11a, Ch165, 12 GHz-25 GHz)

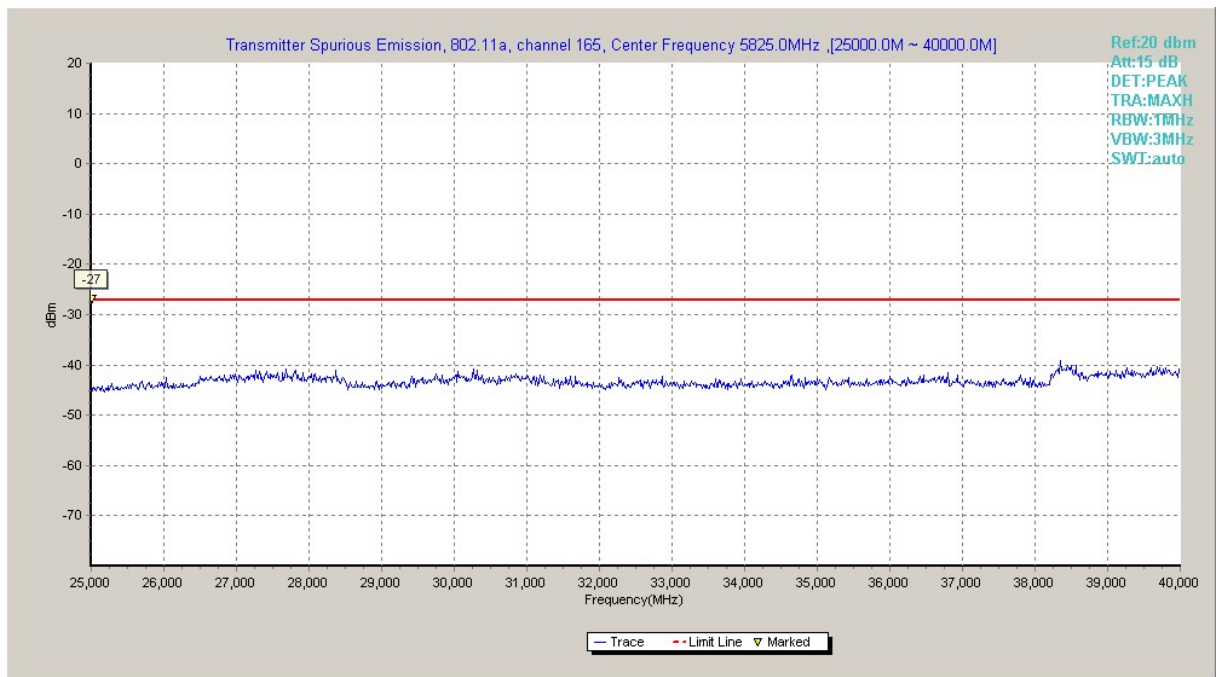


Fig. 26 Conducted Spurious Emission (802.11a, Ch165, 25 GHz-40 GHz)

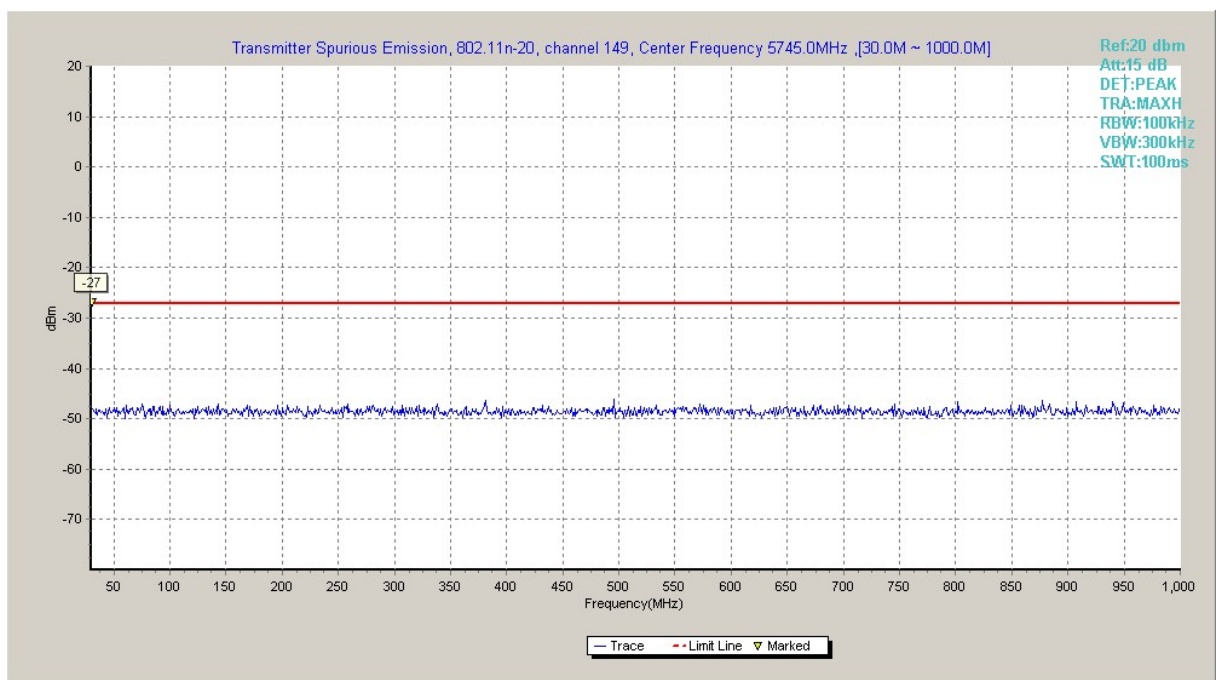


Fig. 27 Conducted Spurious Emission (802.11n-HT20, Ch149, 30 MHz-1 GHz)

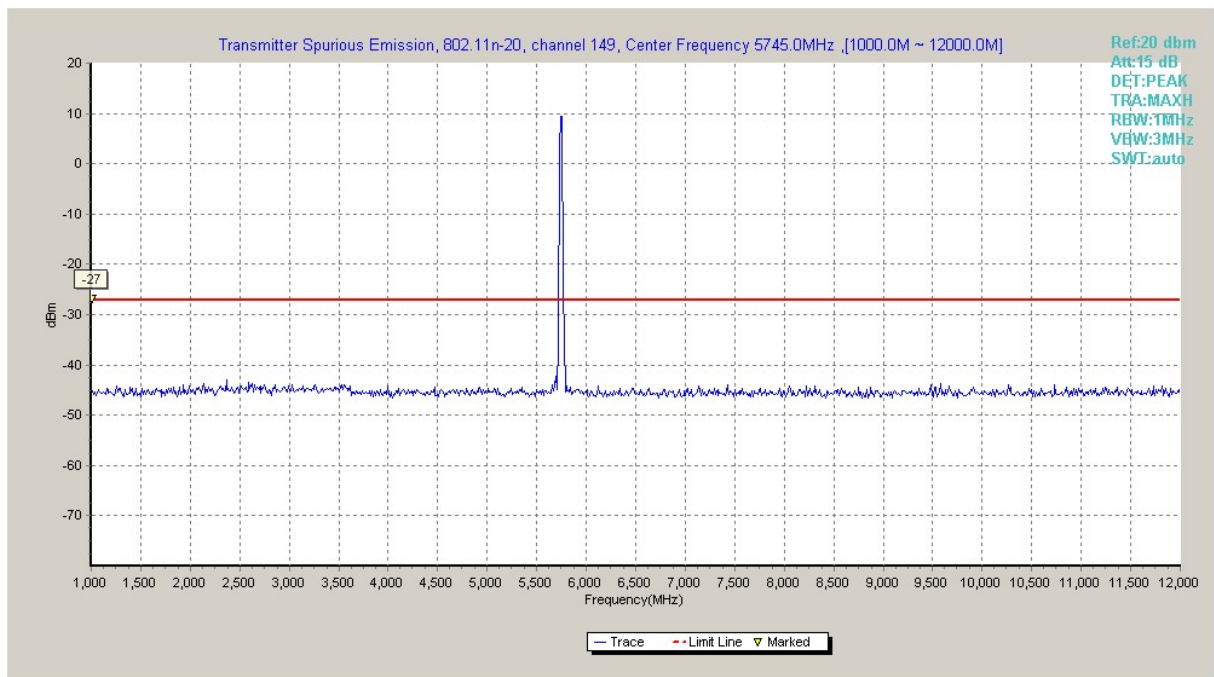


Fig. 28 Conducted Spurious Emission (802.11n-HT20, Ch149, 1 GHz -12 GHz)

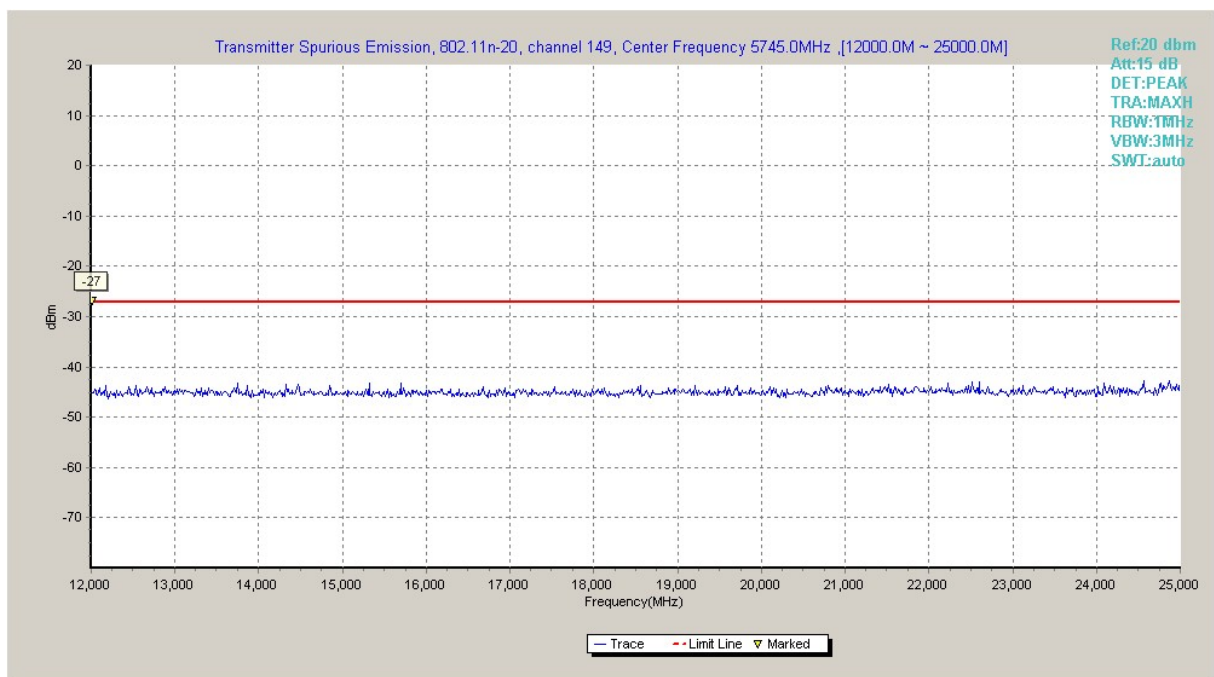


Fig. 29 Conducted Spurious Emission (802.11n-HT20, Ch149, 12 GHz-25 GHz)

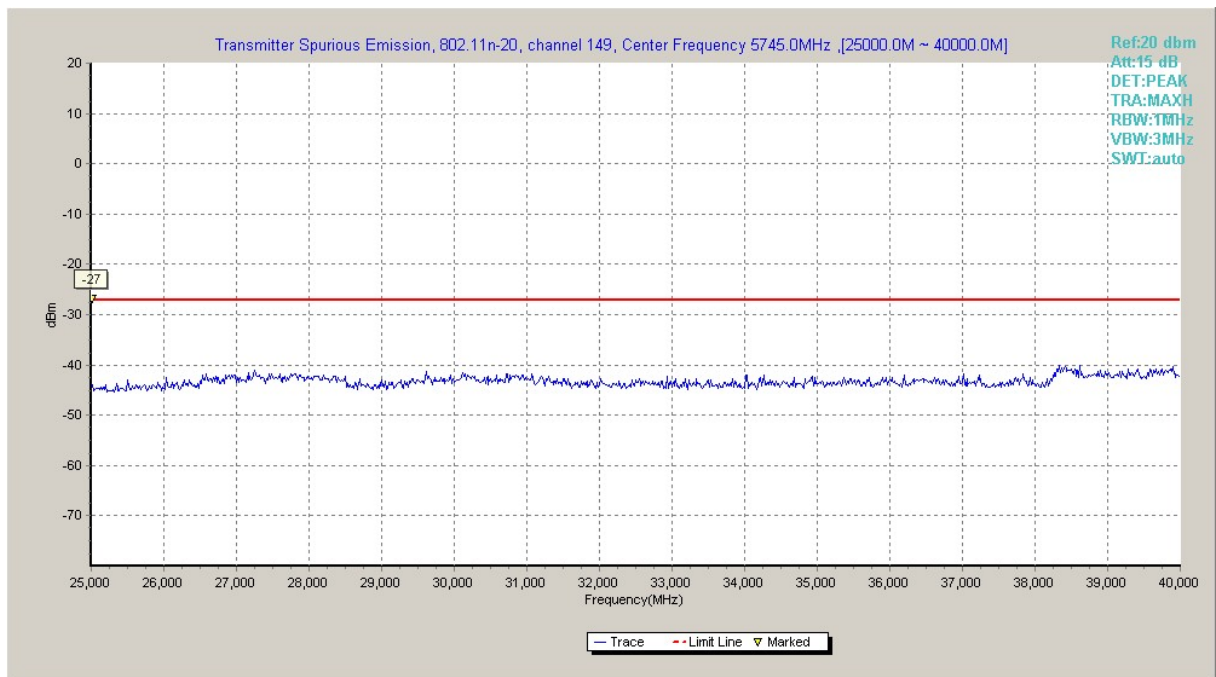


Fig. 30 Conducted Spurious Emission (802.11n-HT20, Ch149, 25 GHz-40 GHz)

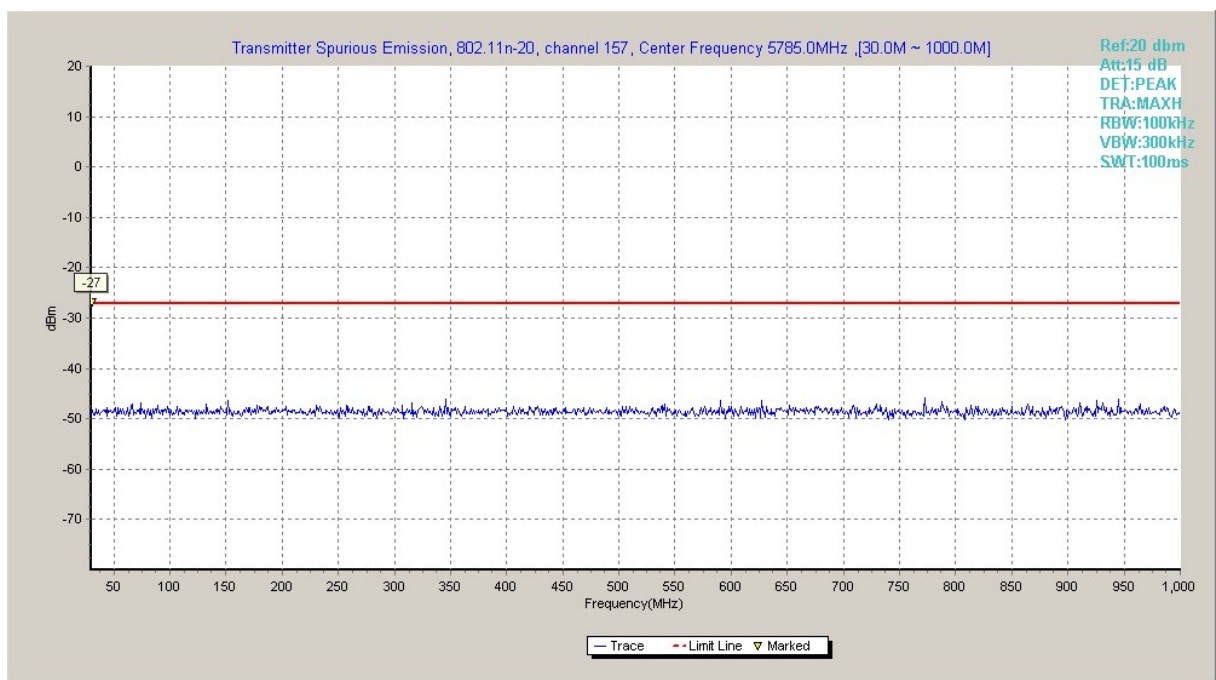


Fig. 31 Conducted Spurious Emission (802.11n-HT20, Ch157, 30 MHz-1 GHz)

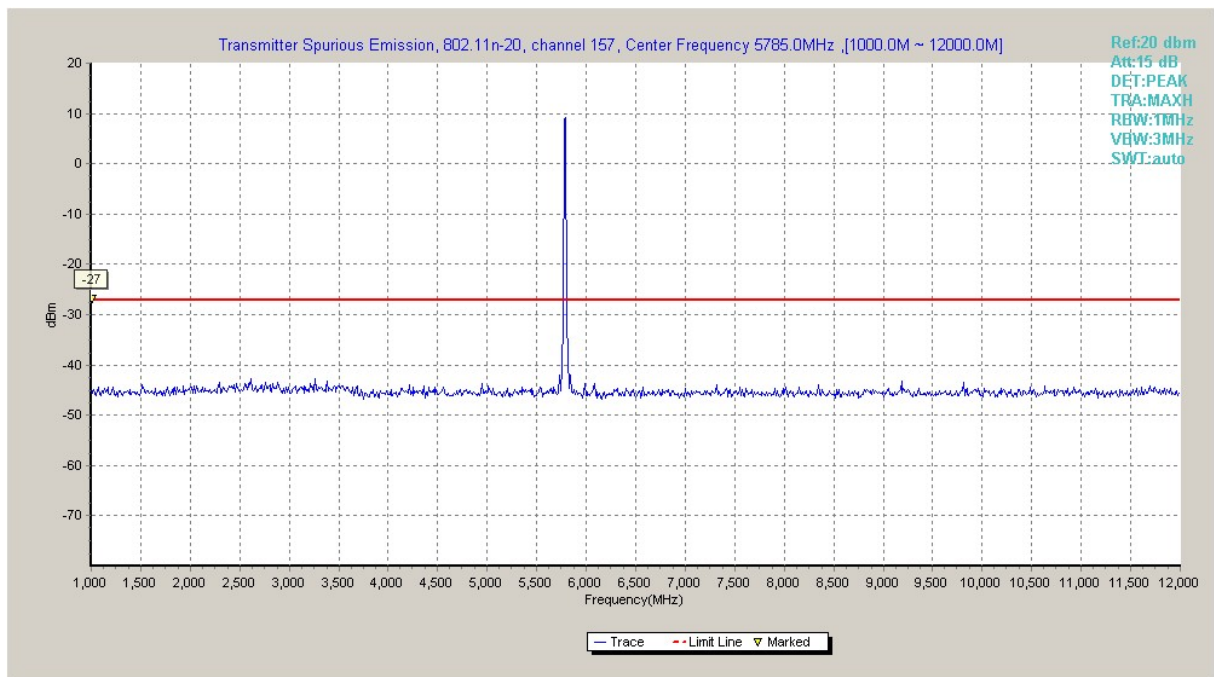


Fig. 32 Conducted Spurious Emission (802.11n-HT20, Ch157, 1 GHz -12 GHz)

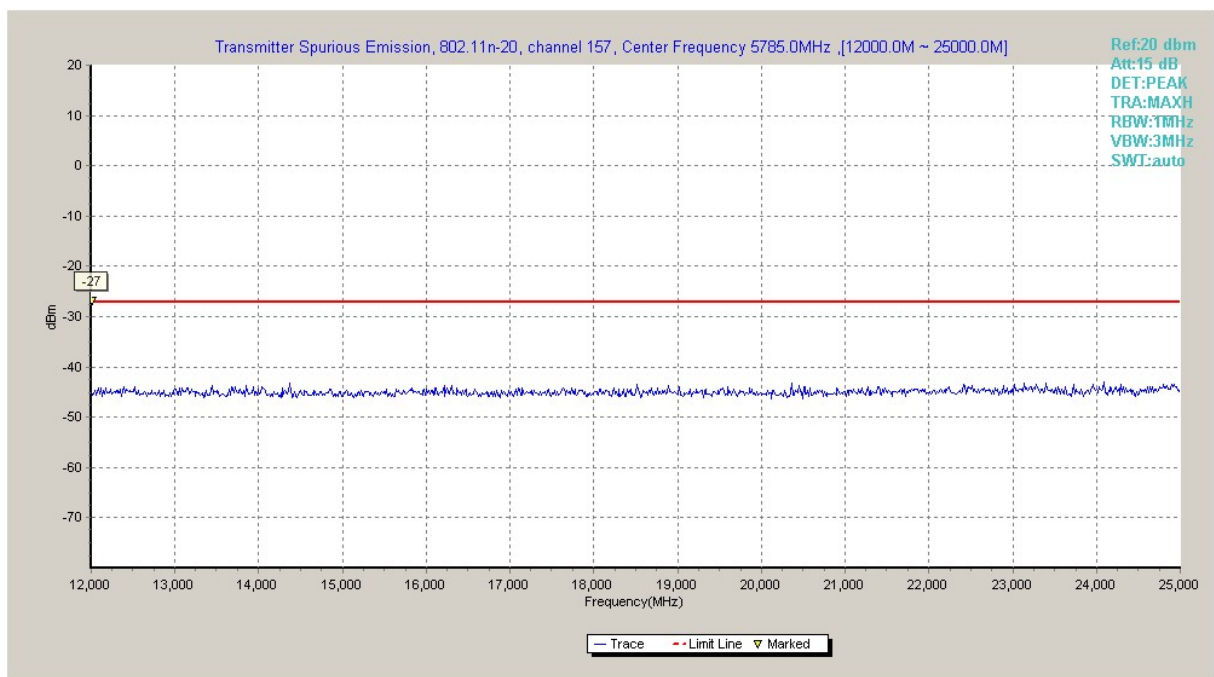


Fig. 33 Conducted Spurious Emission (802.11n-HT20, Ch157, 12 GHz-25 GHz)

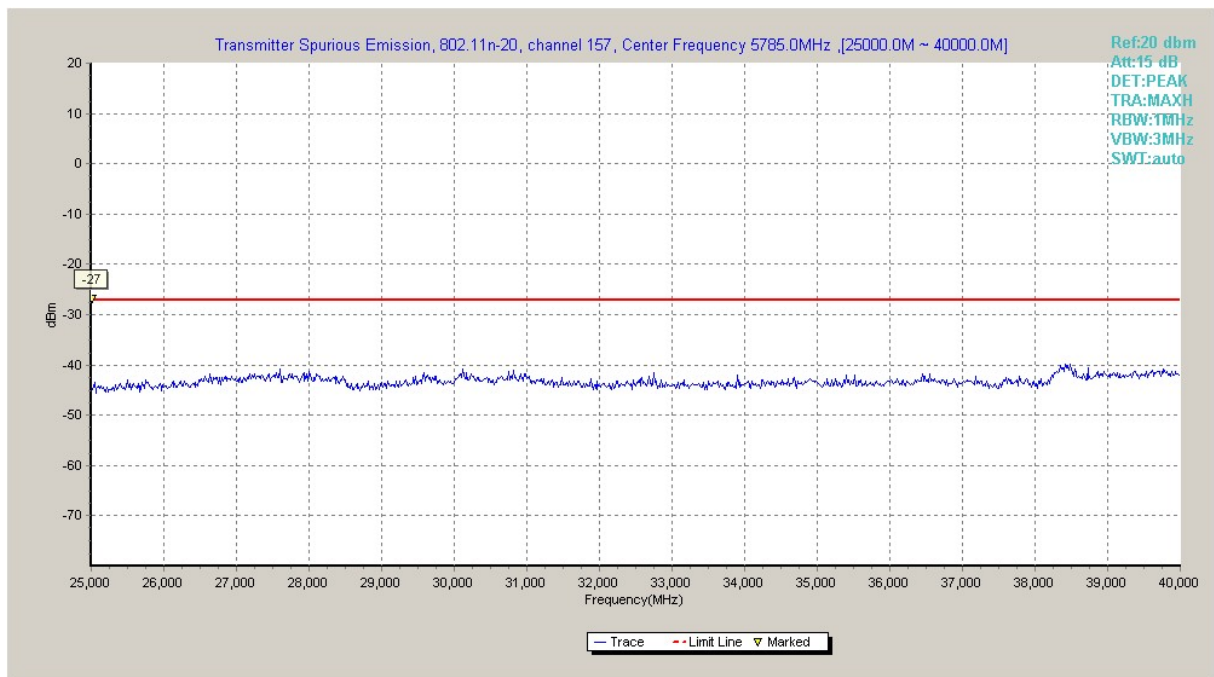


Fig. 34 Conducted Spurious Emission (802.11n-HT20, Ch157, 25 GHz-40 GHz)

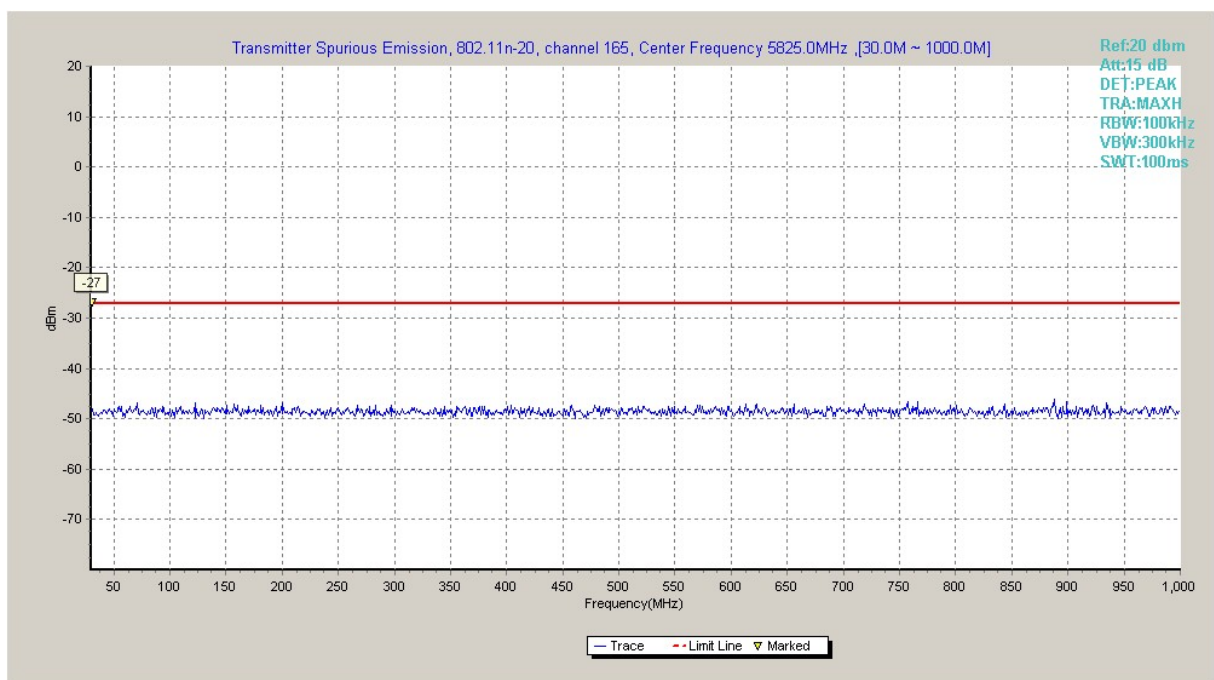


Fig. 35 Conducted Spurious Emission (802.11n-HT20, Ch165, 30 MHz-1 GHz)

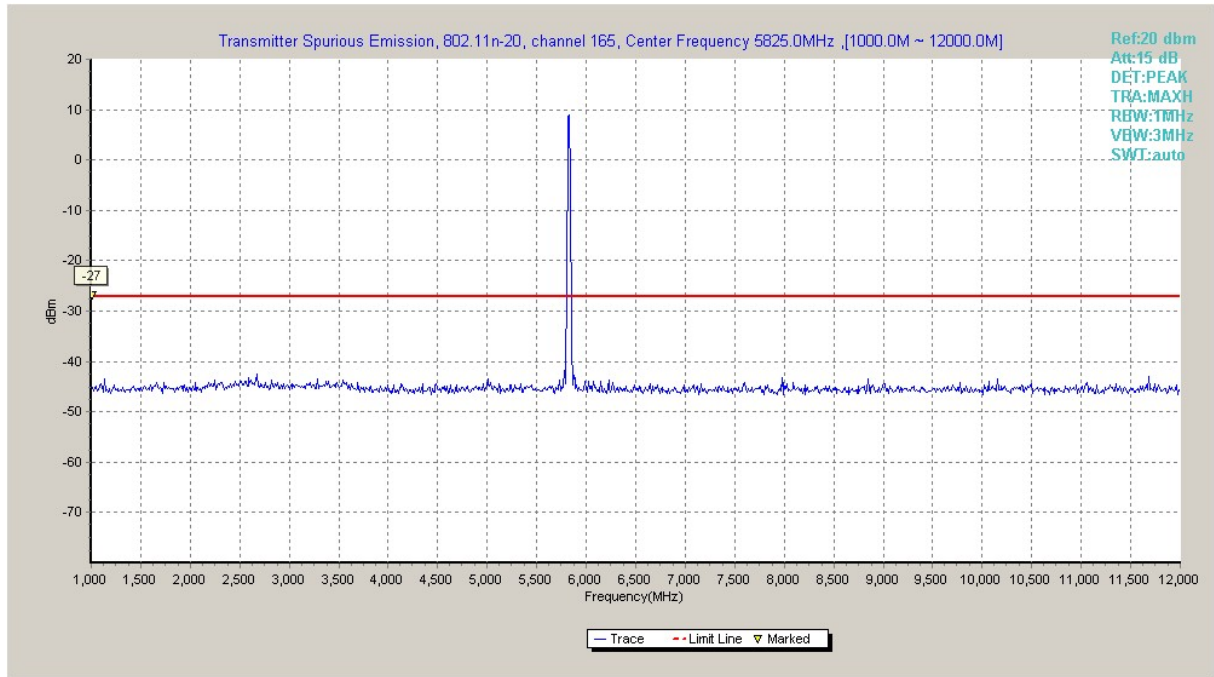


Fig. 36 Conducted Spurious Emission (802.11n-HT20, Ch165, 1 GHz -12 GHz)

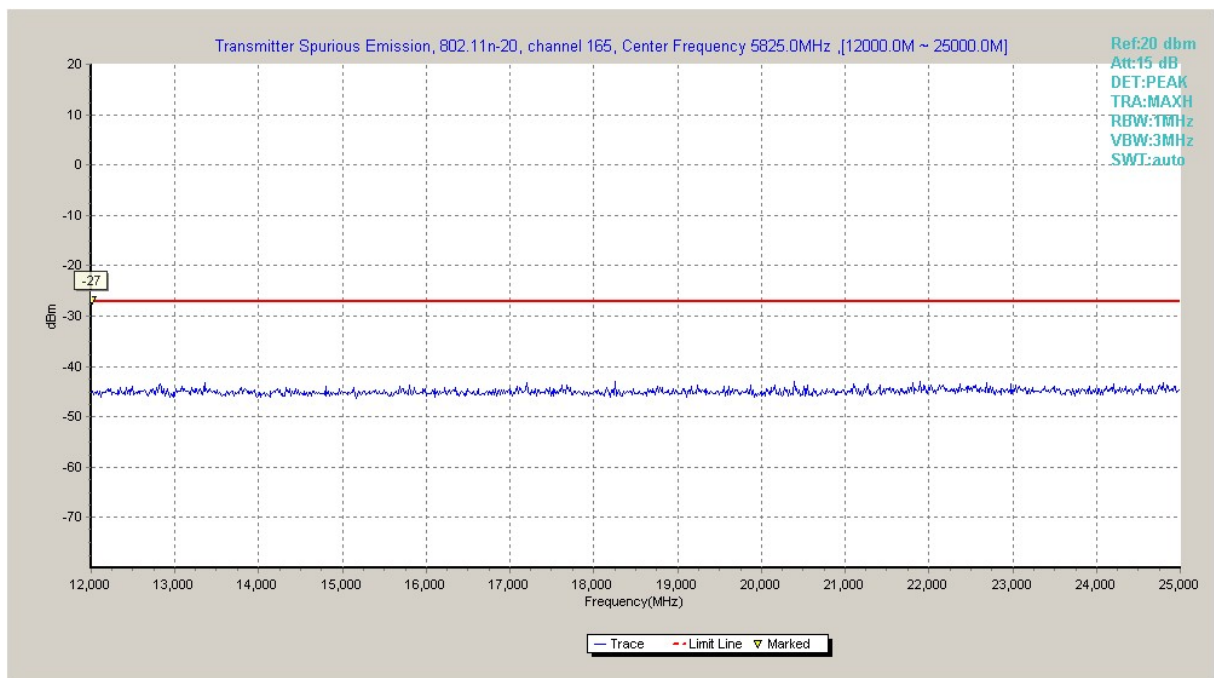


Fig. 37 Conducted Spurious Emission (802.11n-HT20, Ch165, 12 GHz-25 GHz)

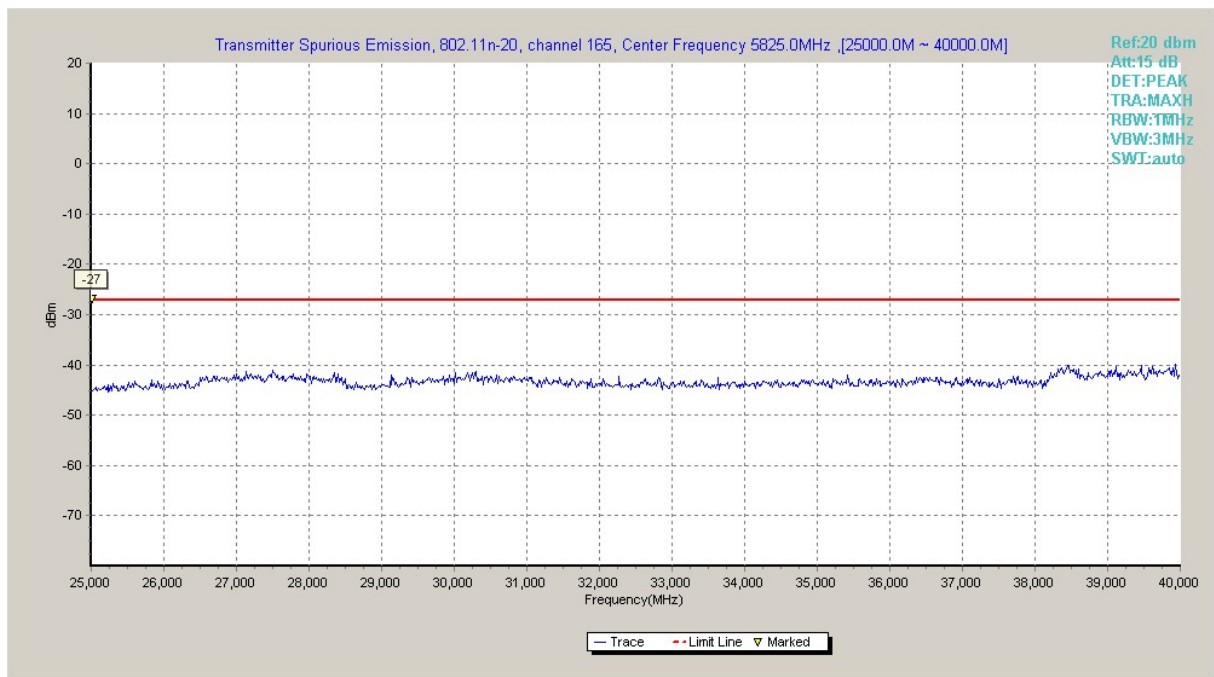


Fig. 38 Conducted Spurious Emission (802.11ac-HT20, Ch165, 25 GHz-40 GHz)

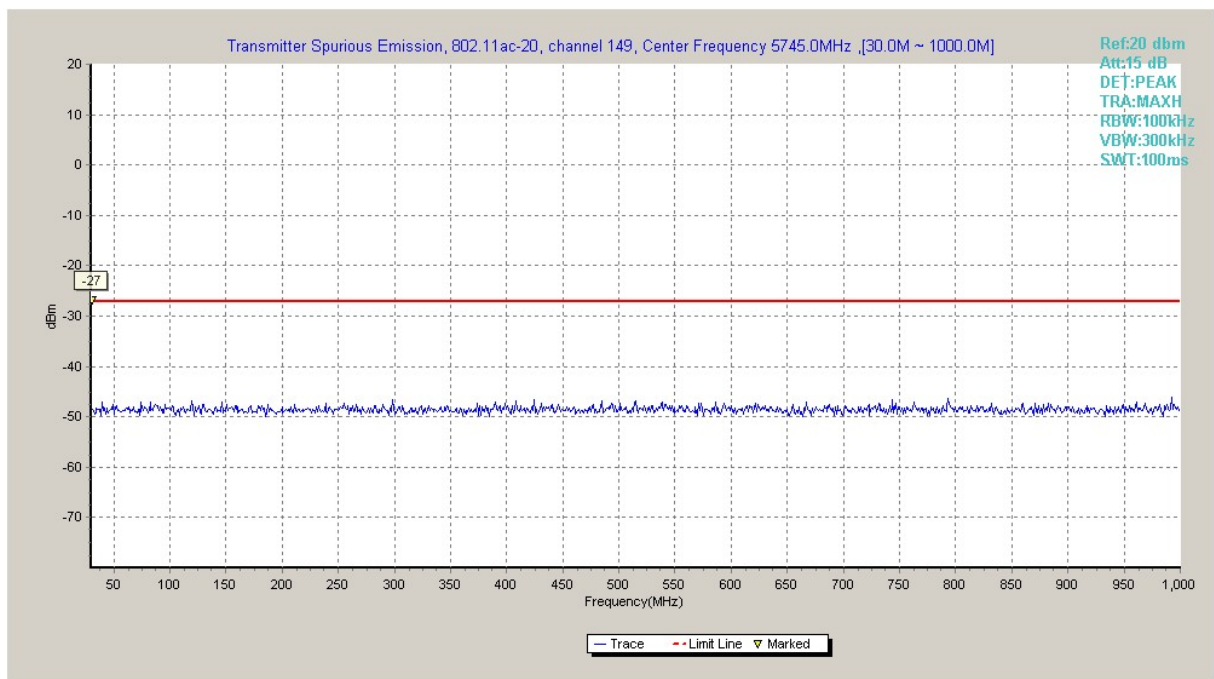


Fig. 39 Conducted Spurious Emission (802.11ac-HT20, Ch149, 30 MHz-1 GHz)

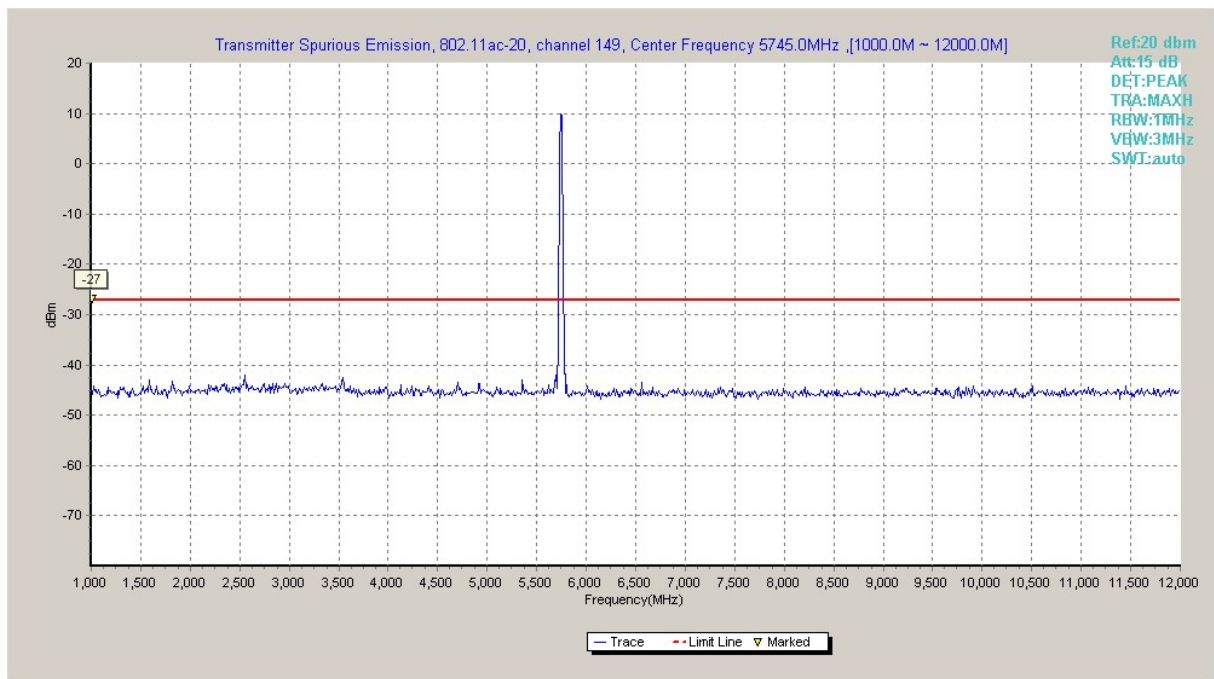


Fig. 40 Conducted Spurious Emission (802.11ac-HT20, Ch149, 1 GHz -12 GHz)

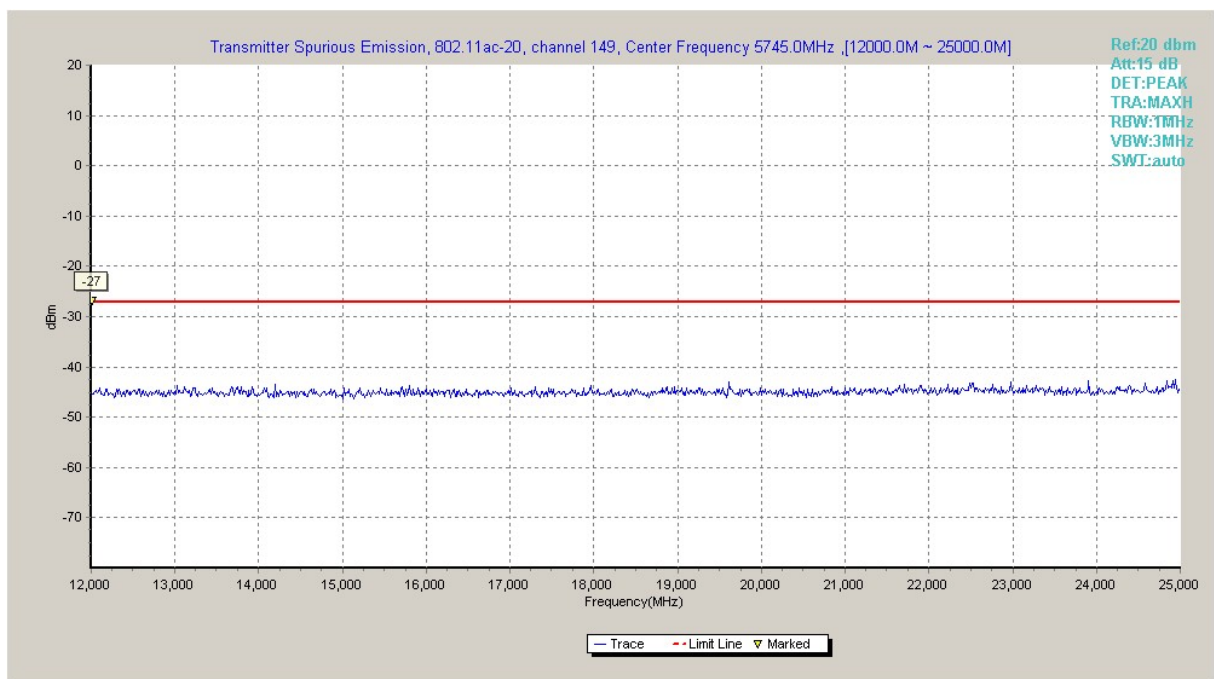


Fig. 41 Conducted Spurious Emission (802.11ac-HT20, Ch149, 12 GHz-25 GHz)

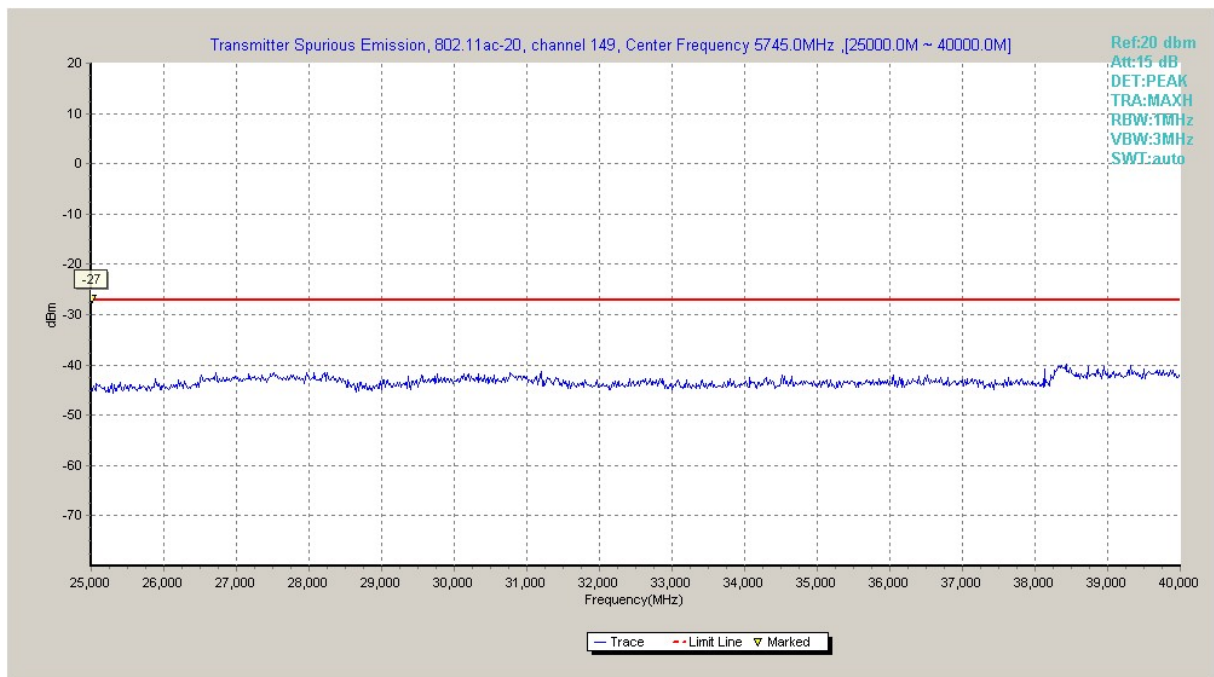


Fig. 42 Conducted Spurious Emission (802.11ac-HT20, Ch149, 25 GHz-40 GHz)

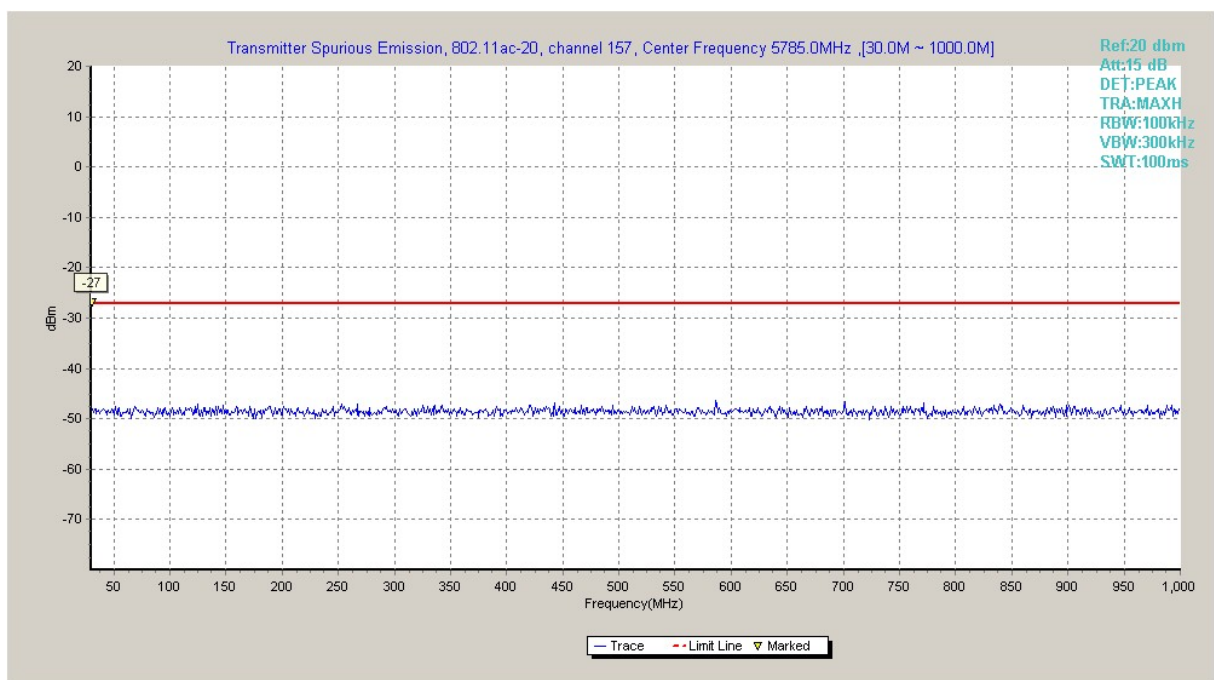


Fig. 43 Conducted Spurious Emission (802.11ac-HT20, Ch157, 30 MHz-1 GHz)