



No. I19Z62156-SEM01

For

TCL Communication Ltd.

**HSUPA/HSDPA/UMTS 5 Bands/GSM Quad Bands/LTE 17 bands
mobile phone**

Model name: T799B

With

Hardware Version:04

Software Version: 4D2Y

FCC ID: 2ACCJN034

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

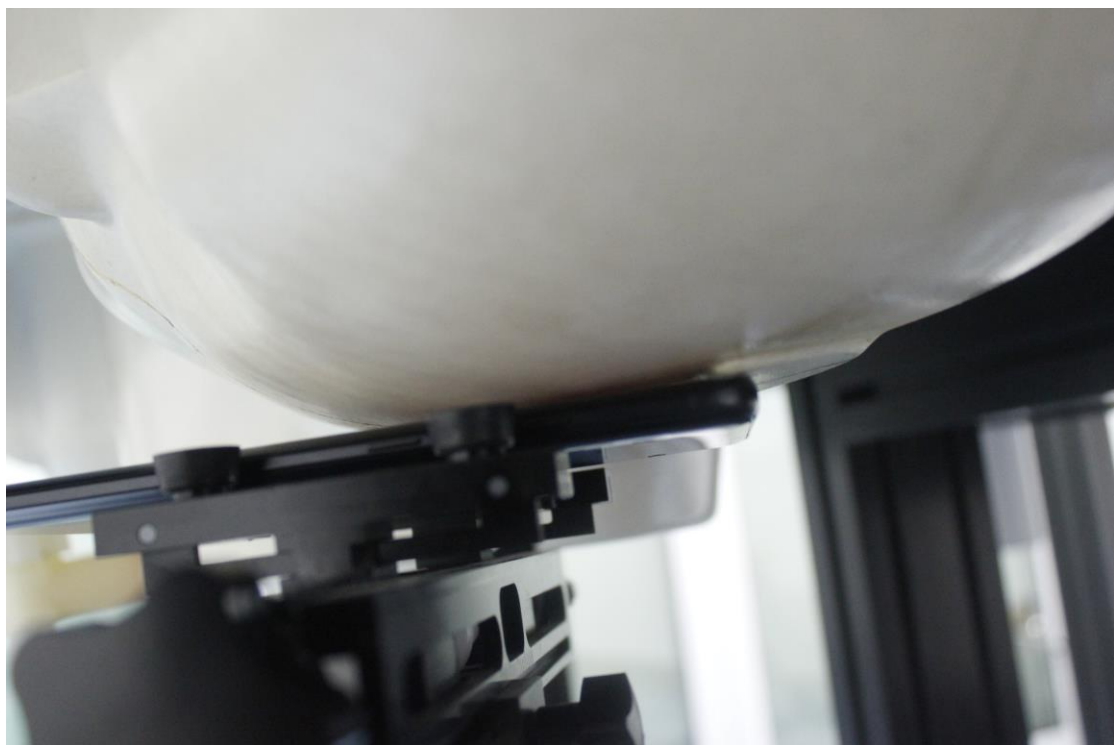


Picture 2: Left Hand Touch Cheek Position

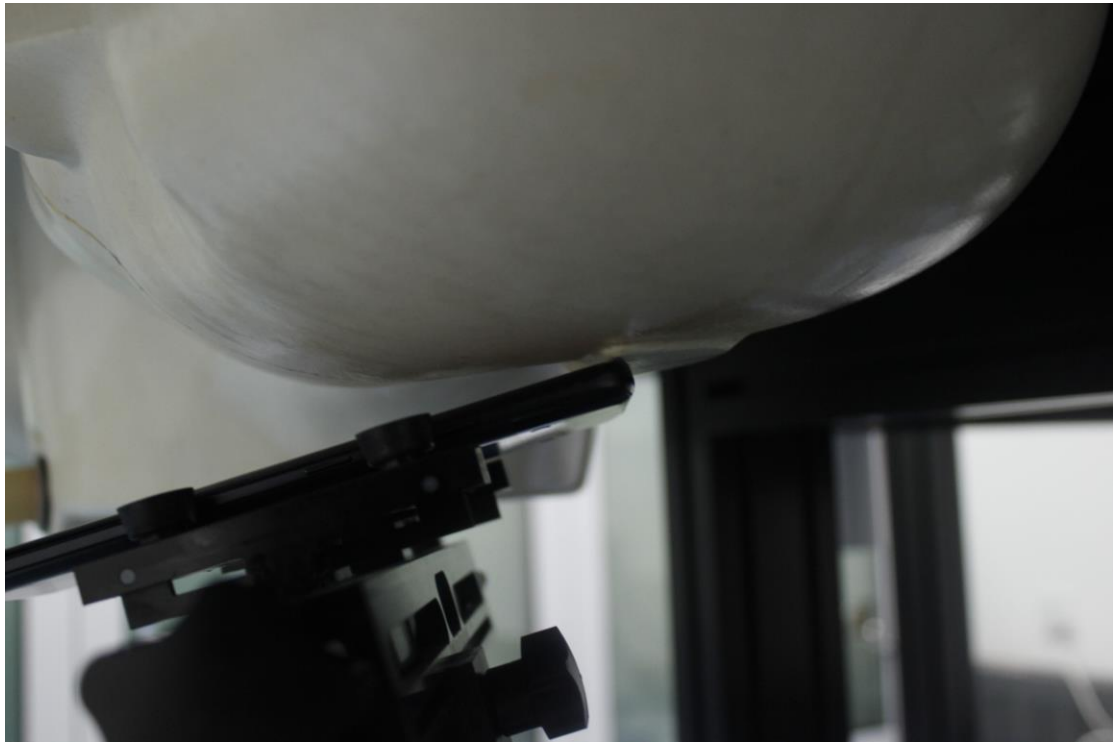

Picture 3: Left Hand Tilt 15° Position

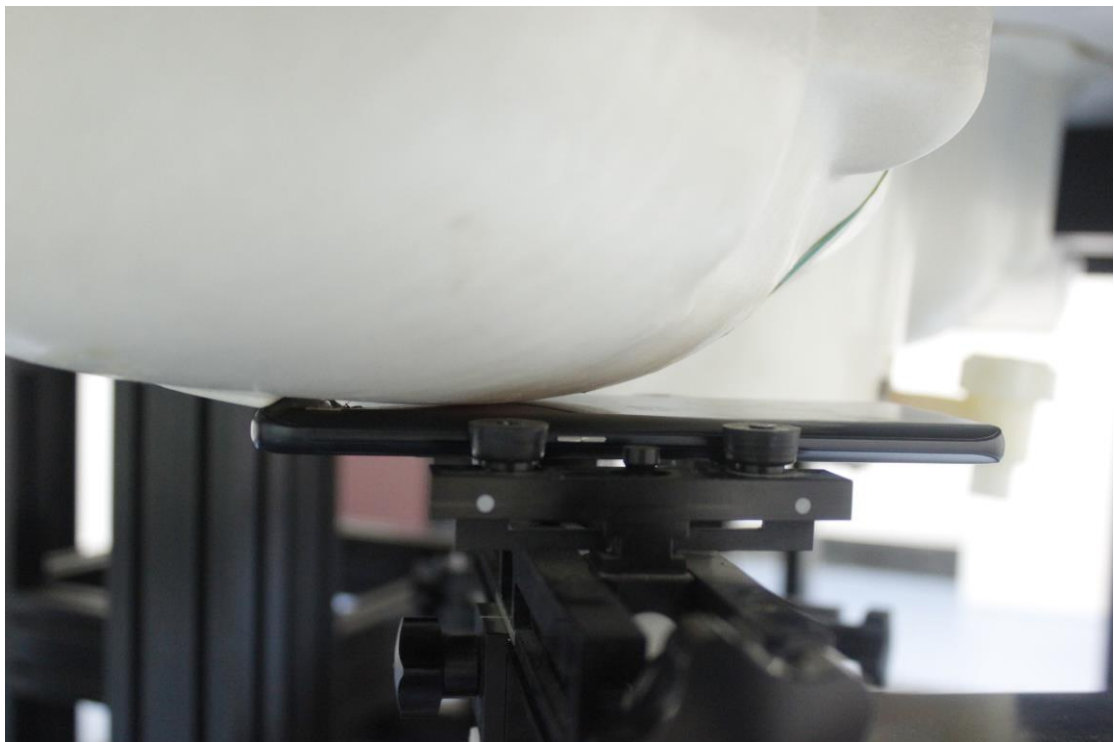

Picture 4: Right Hand Touch Cheek Position

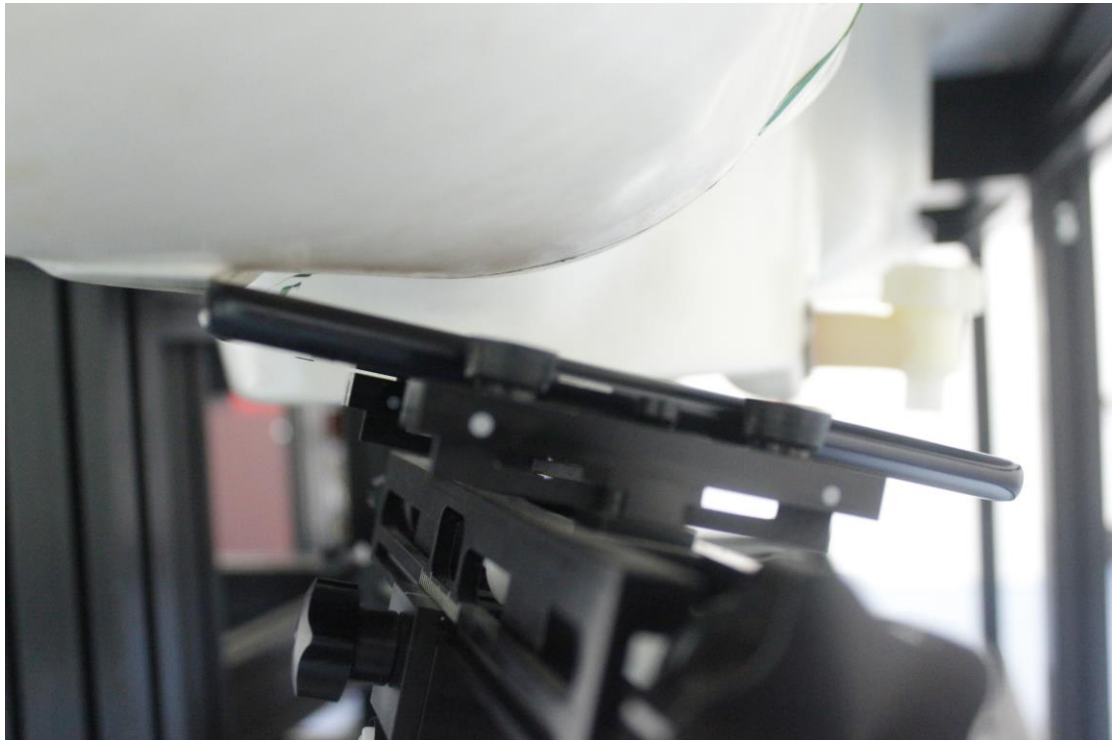

Picture 5: Right Hand Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 8 test positions all with the distance =10/15mm between the EUT and the phantom bottom:



Picture 6: Front 10mm



Picture 7: Rear 10mm



Picture 8: Left 10mm



Picture 9: Right 10mm




Picture 10: Top 10mm




Picture 11: Bottom 10mm



Picture 12: Front 15mm

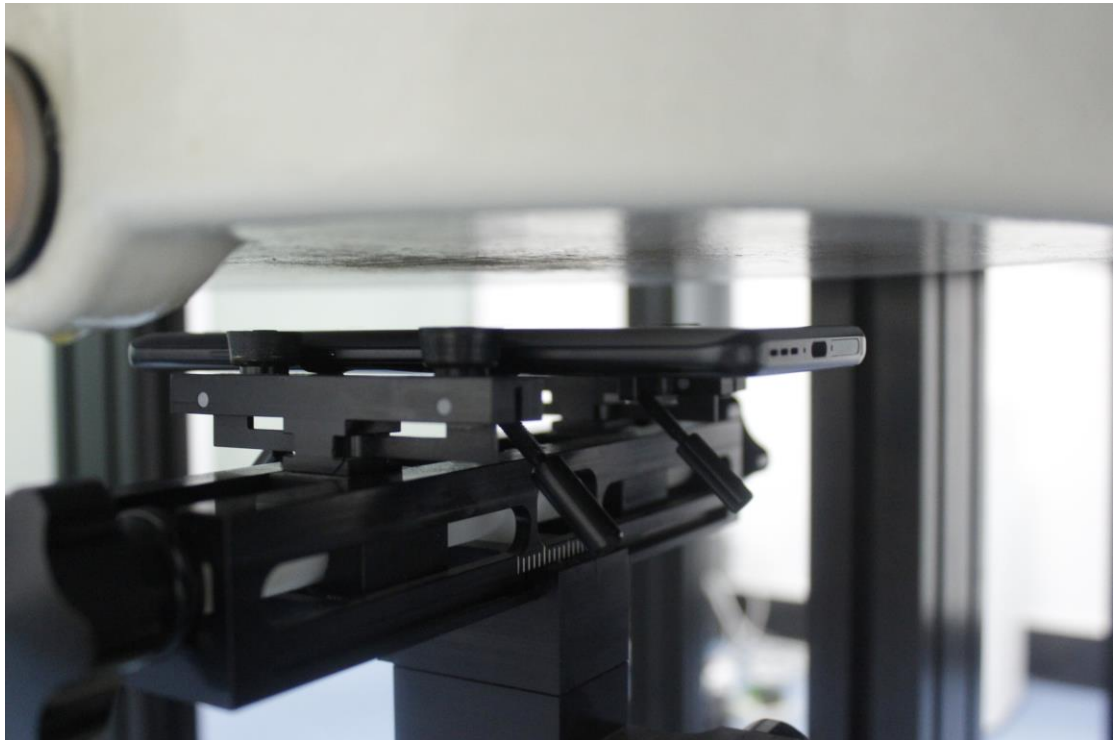

Picture 13: Rear 15mm

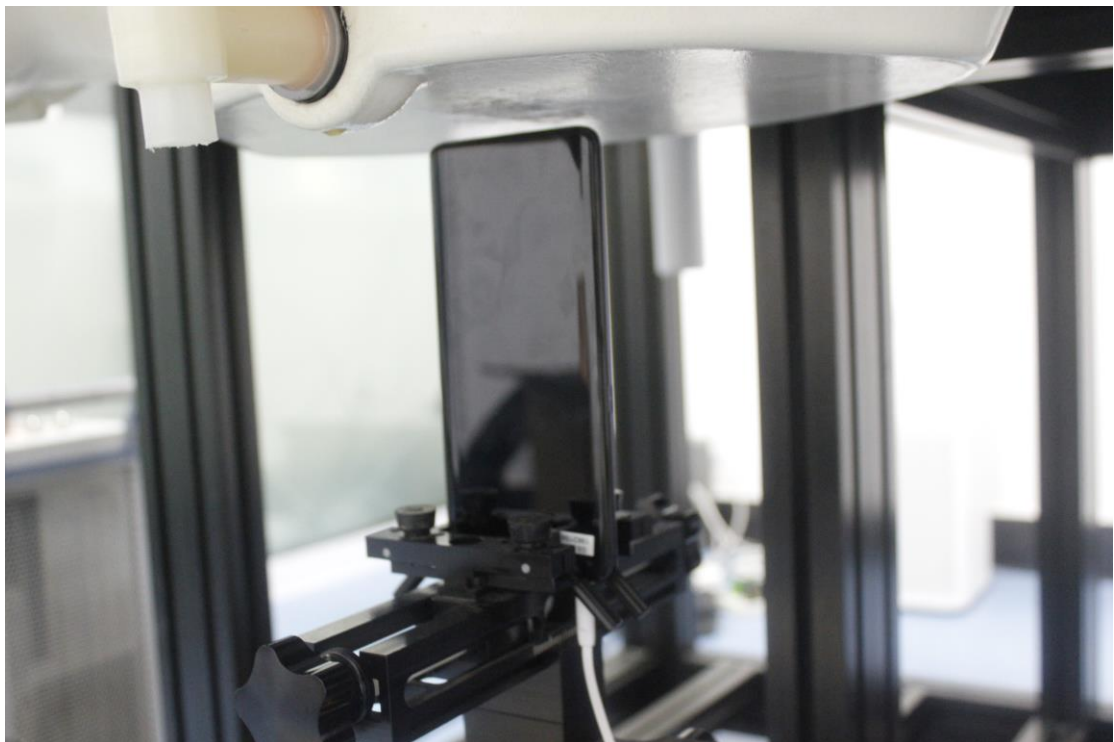

Picture 14: Bottom 10mm with Headset