



No. I20Z62131-SEM05

For

TCL Communication Ltd.

GSM/UMTS/LTE mobile phone

Model name: 4056S, 4056SPP, 4056V

With

Hardware Version: 03

Software Version: 5ERAZZ00

FCC ID: 2ACCJN048

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample




Picture 2: Left Hand Touch Cheek Position



Picture 3: Left Hand Tilt 15° Position

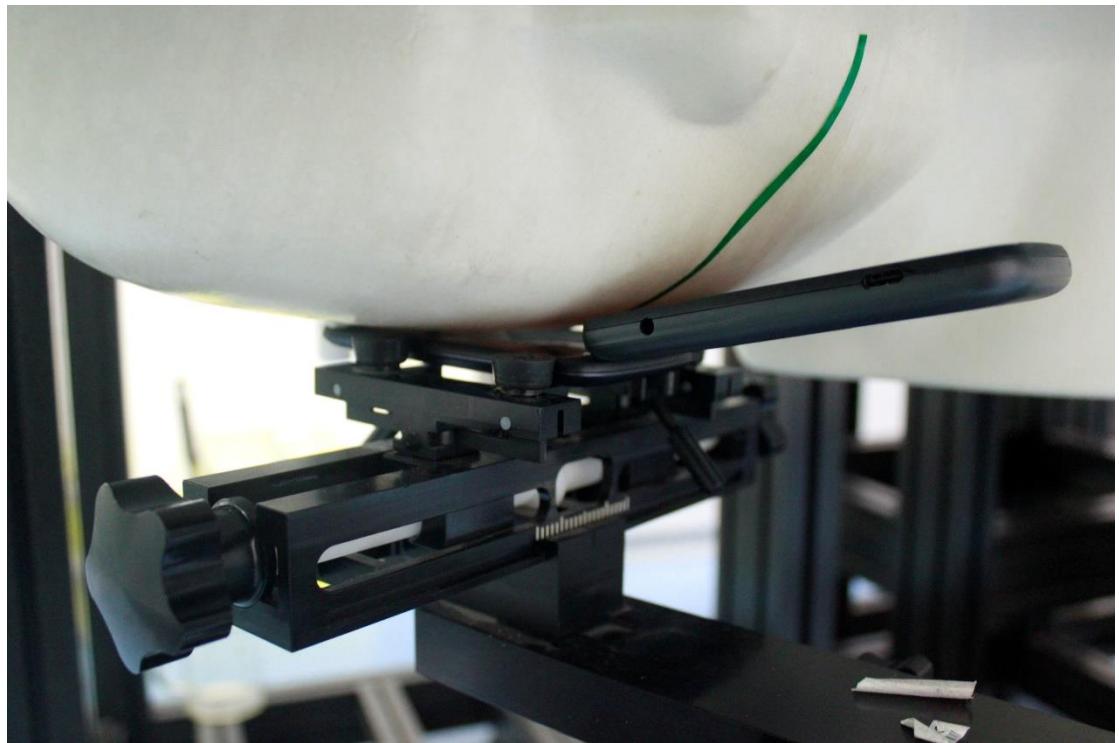

Picture 4: Right Hand Touch Cheek Position

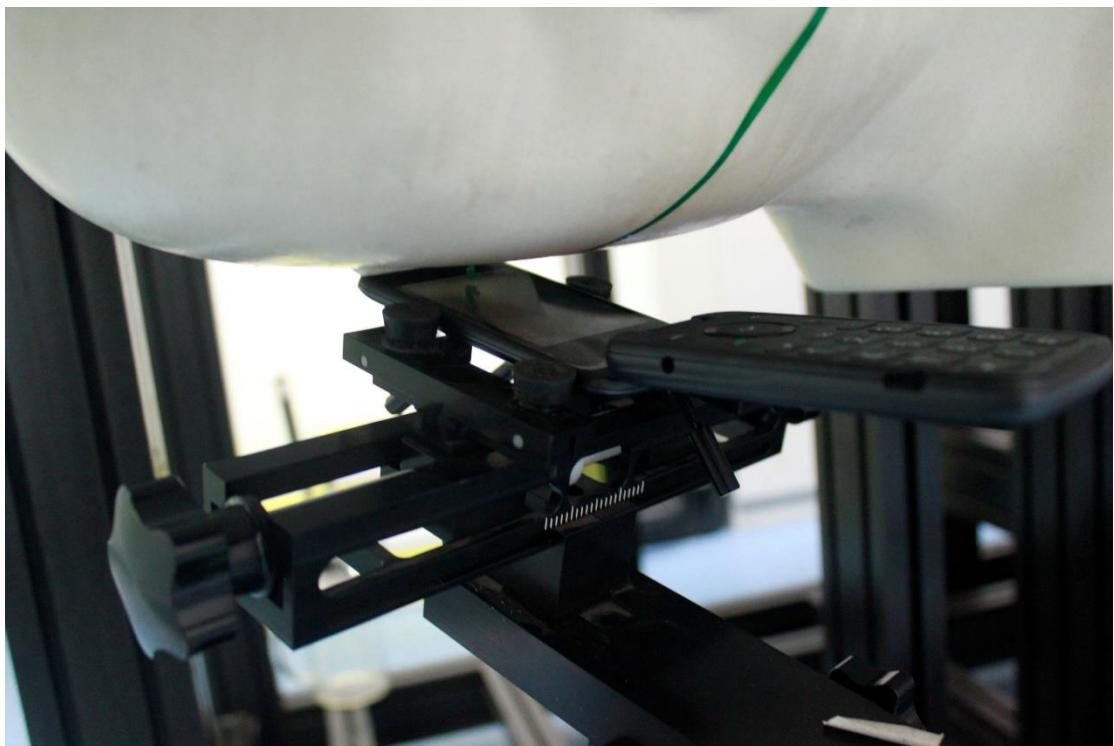

Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =10/15mm between the EUT and the phantom bottom:




Picture 6: Front 10mm



Picture 7: Rear 10mm

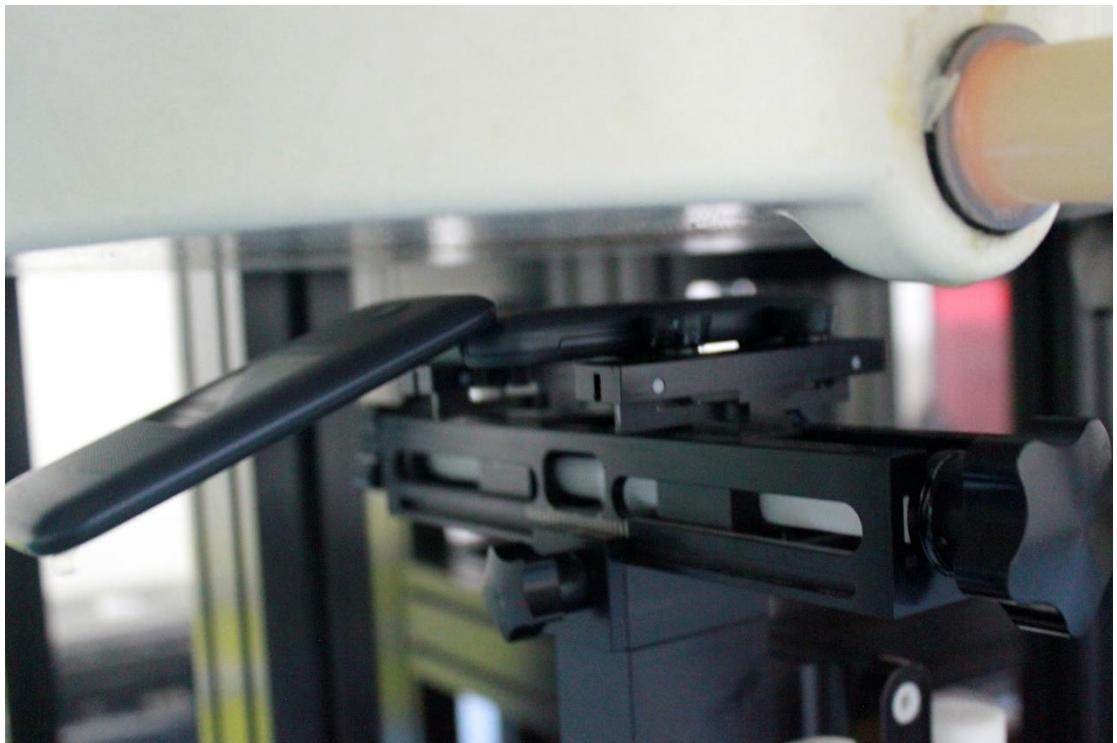

Picture 8: Rear unfold 10mm

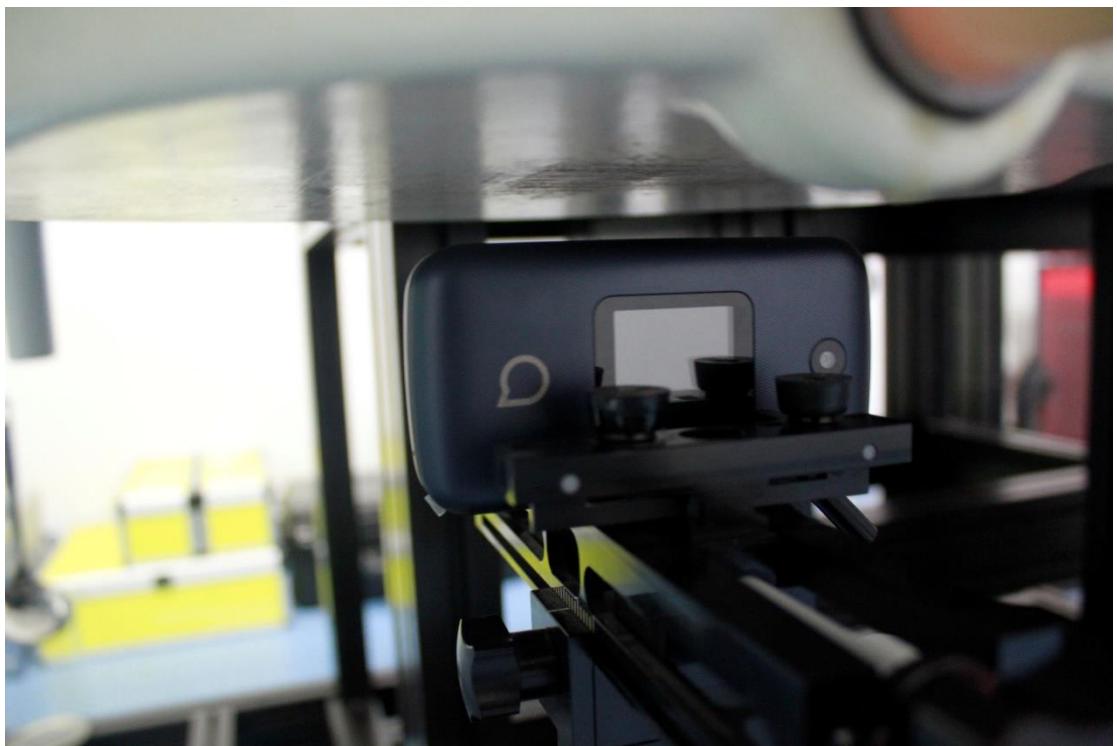


Picture 9: Left 10mm



Picture 10: Right 10mm



Picture 11: Top 10mm

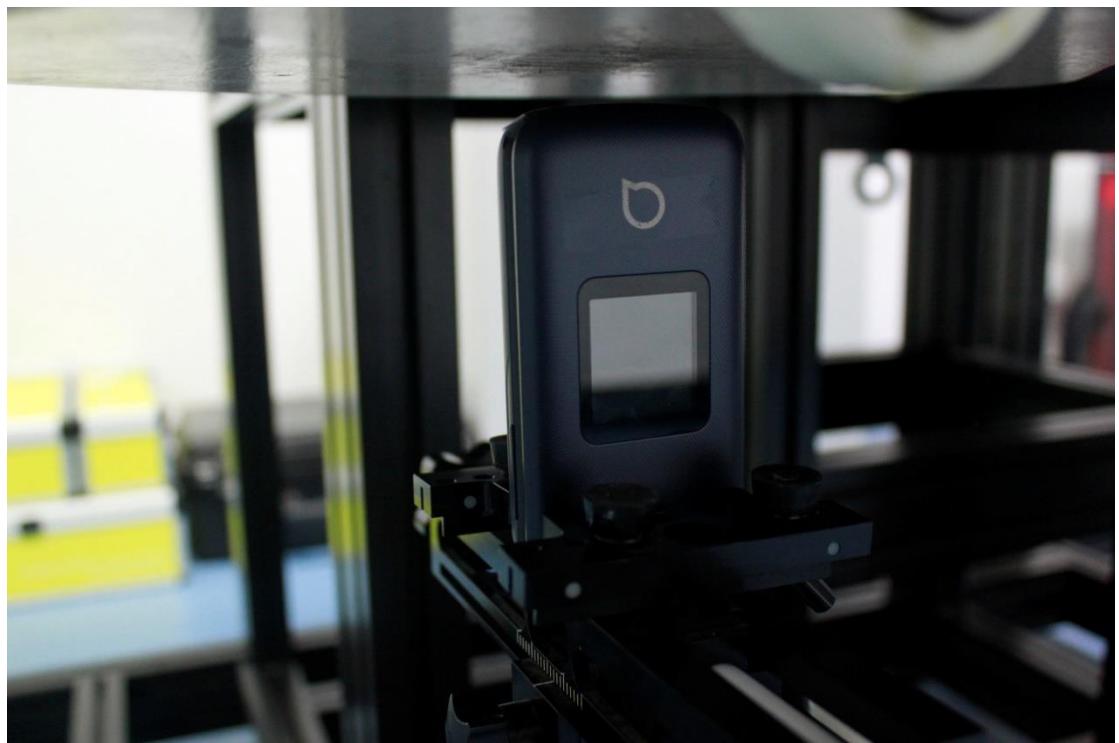


Picture 12: Bottom 10mm



Picture 13: Front 15mm




Picture 14: Rear 15mm

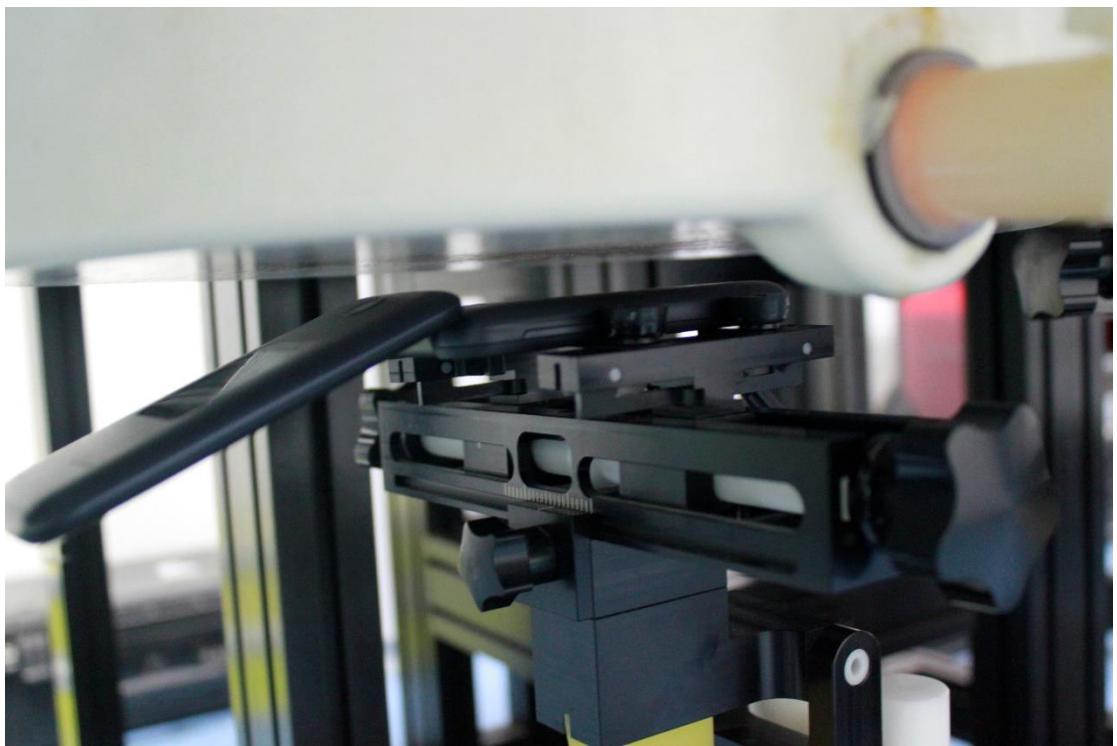

Picture 15: Rear unfold 15mm



Picture 16: Rear 10mm with Headset

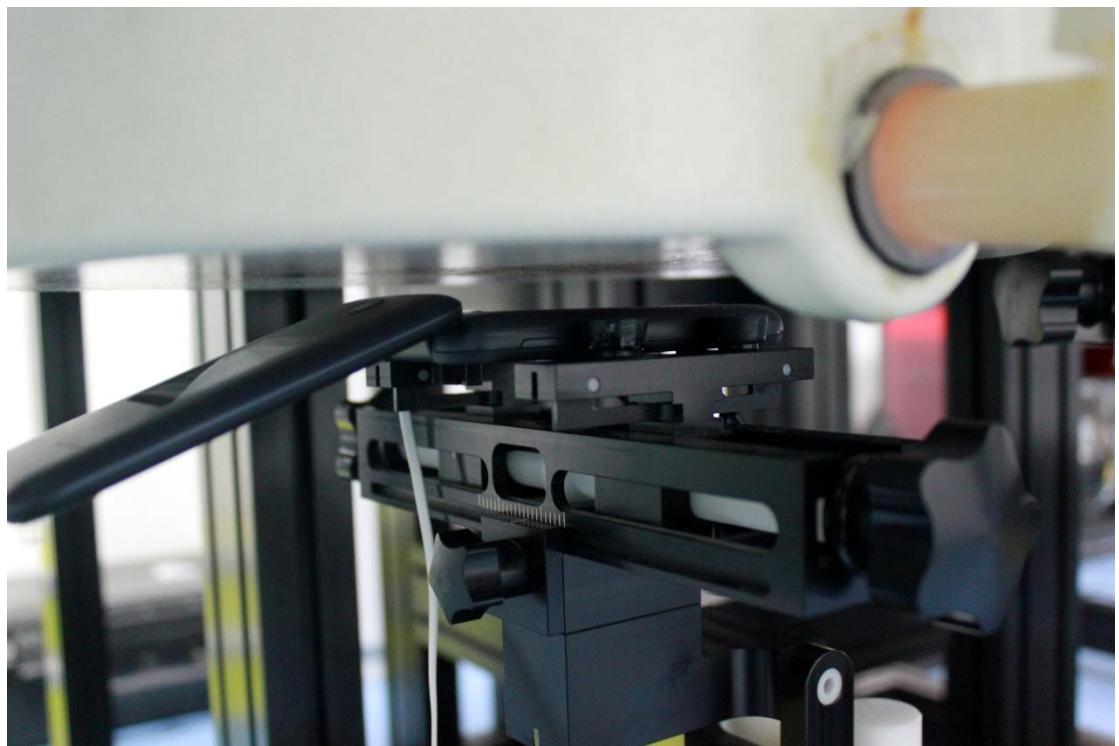

Picture 17: Rear unfold 10mm with Headset



Picture 18: Rear 15mm with Headset