

Date: 2025/8/8

01_LTE Band 12_10M_QPSK_1RB_0Offset_Back_10mm_Ch23095


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f=707.500$ MHz; $\sigma=0.871$ S/m; $\epsilon_r=44.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.320 W/kg; SAR (10g) = 0.228 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.338 W/kg; SAR (10g) = 0.260 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 92.9 %

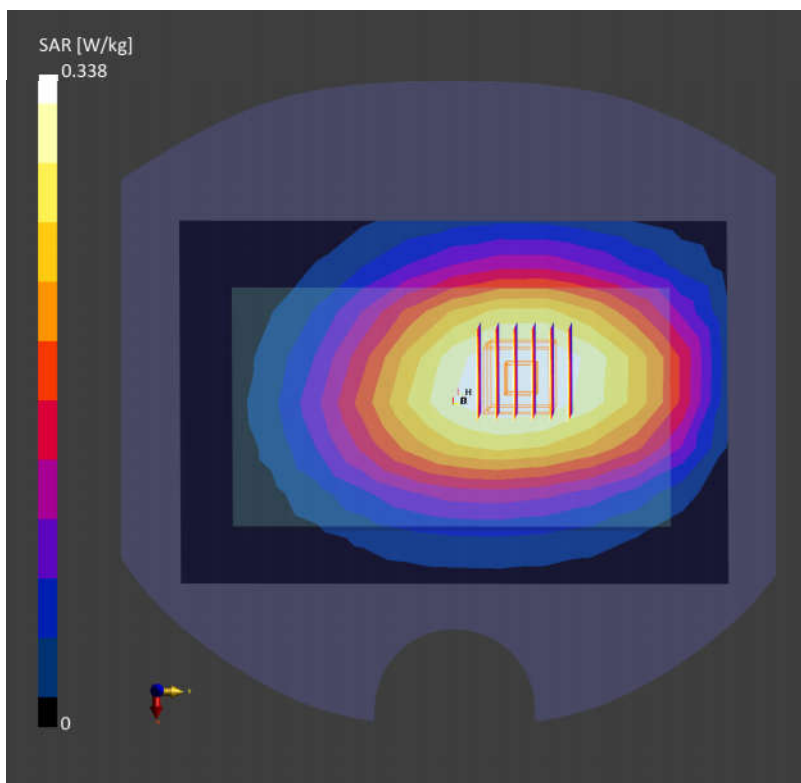

Date: 2025/8/8

02_LTE Band 13_10M_QPSK_1RB_0Offset_Front_10mm_Ch23230


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f=782.000$ MHz; $\sigma=0.896$ S/m; $\epsilon_r=43.8$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.476 W/kg; SAR (10g) = 0.336 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.502 W/kg; SAR (10g) = 0.381 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 93.3 %

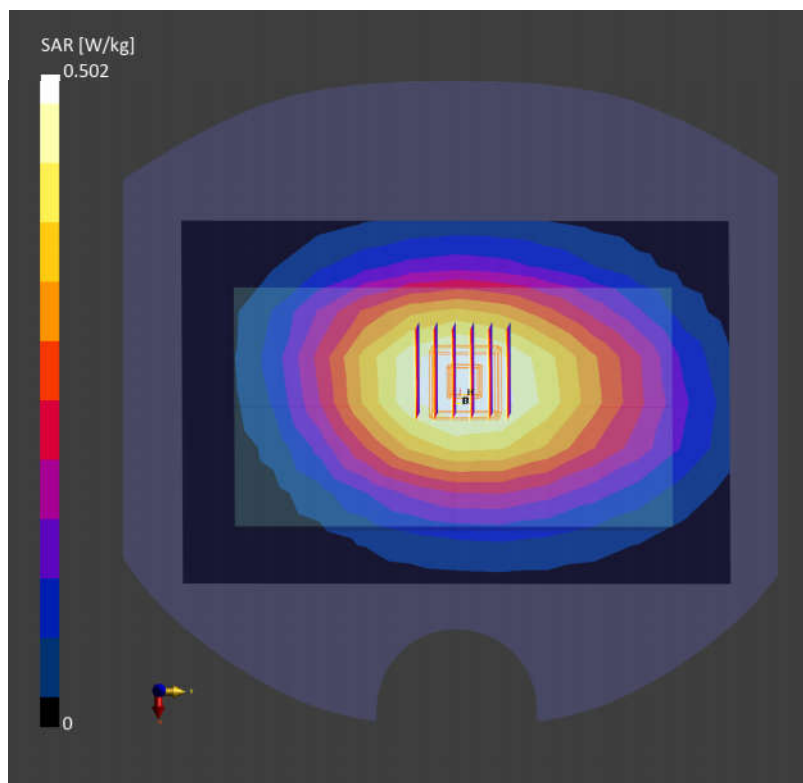

Date: 2025/8/11

03_LTE Band 5_10M_QPSK_1RB_0Offset_Back_10mm_Ch20525


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 836.500 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f= 836.500$ MHz; $\sigma= 0.914$ S/m; $\epsilon_r = 43.6$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.445 W/kg; SAR (10g) = 0.309 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.462 W/kg; SAR (10g) = 0.344 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 92.1 %

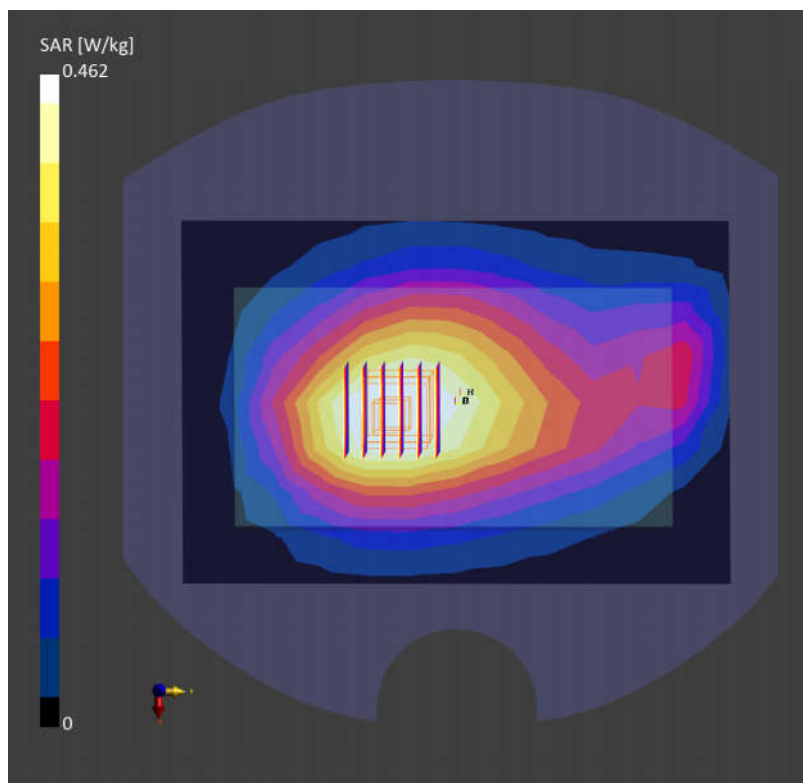

Date: 2025/8/11

04_FR1 n5_25M_QPSK_1RB_1Offset_DFT-15_Back_10mm_Ch167300

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)

RBPosition:Mid AntennaCfg:SISO; Frequency: 836.500 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.410 W/kg; SAR (10g) = 0.287 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.434 W/kg; SAR (10g) = 0.336 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 94.6 %

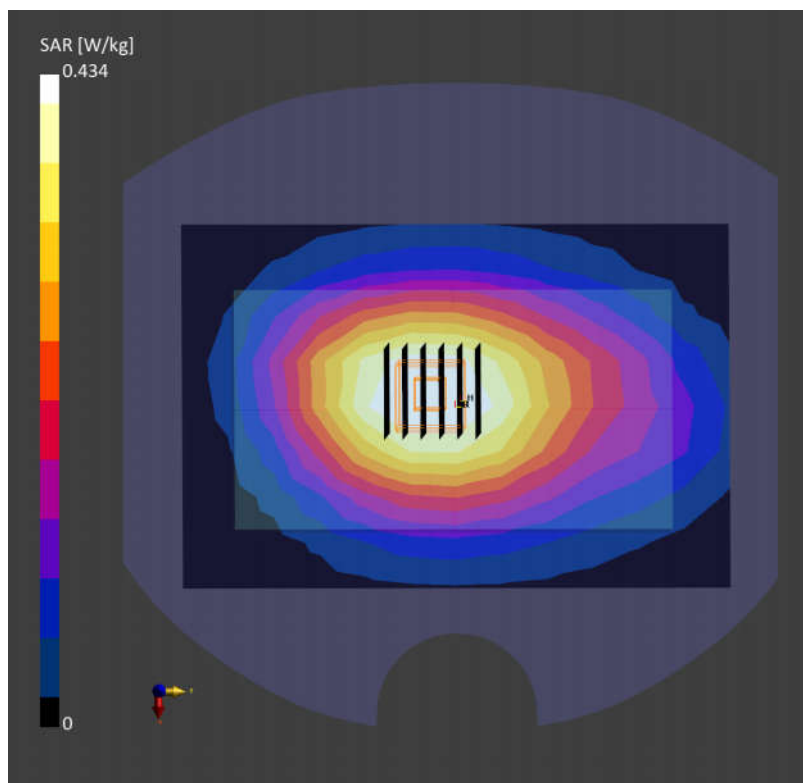

Date: 2025/8/13

05_LTE Band 66_20M_QPSK_1RB_0Offset_Bottom Side_24mm_Ch132322


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1
 Medium: Head Simulating Liquid Medium parameters used: $f=1745.000$ MHz; $\sigma=1.34$ S/m; $\epsilon_r=41.9$
 Ambient Temperature: 23.5°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.458 W/kg; SAR (10g) = 0.275 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.06 dB
 SAR (1g) = 0.469 W/kg; SAR (10g) = 0.296 W/kg
 Smallest distance from peaks to all points 3 dB below = 17.8 mm
 Ratio of SAR at M2 to SAR at M1 = 89.1 %

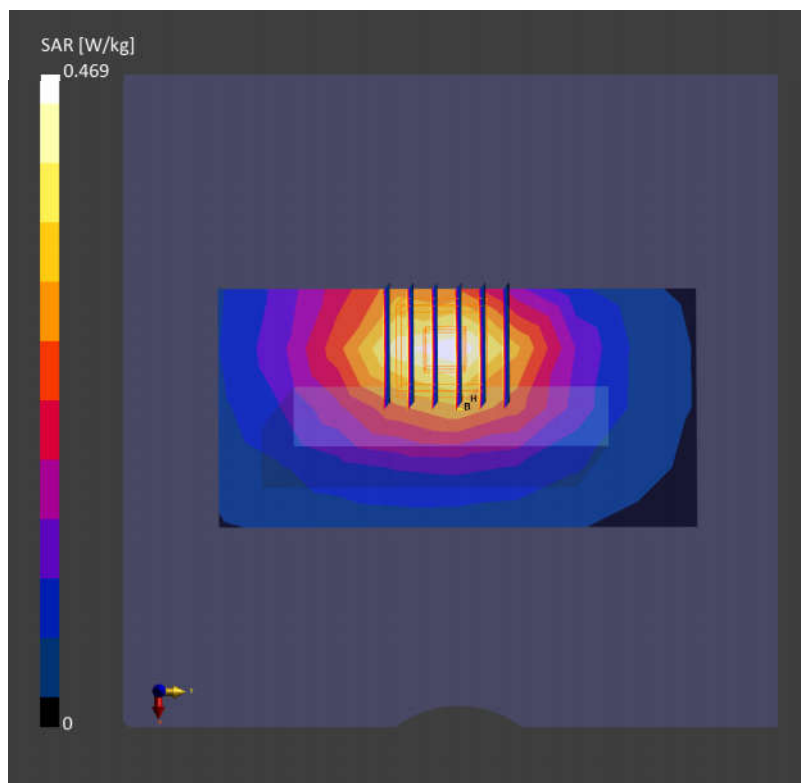

Date: 2025/8/13

06_FR1 n66_45M_QPSK_120RB_60Offset_DFT-15_Bottom Side_10mm_Ch349000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 45 MHz, QPSK, 15 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f=1745.000$ MHz; $\sigma=1.34$ S/m; $\epsilon_r=41.9$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.531 W/kg; SAR (10g) = 0.277 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.553 W/kg; SAR (10g) = 0.311 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 88.0 %

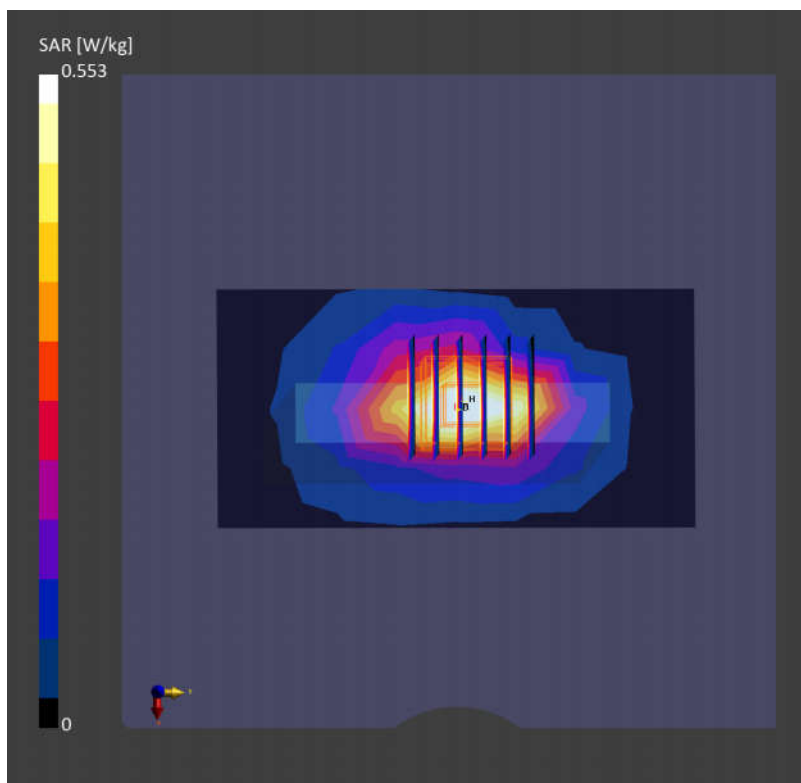

Date: 2025/8/16

07_LTE Band 2_20M_QPSK_1RB_0Offset_Bottom Side_24mm_Ch18900


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f=1880.000$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=41.7$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.549 W/kg; SAR (10g) = 0.331 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.09 dB
SAR (1g) = 0.589 W/kg; SAR (10g) = 0.364 W/kg
Smallest distance from peaks to all points 3 dB below = 19.0 mm
Ratio of SAR at M2 to SAR at M1 = 88.7 %

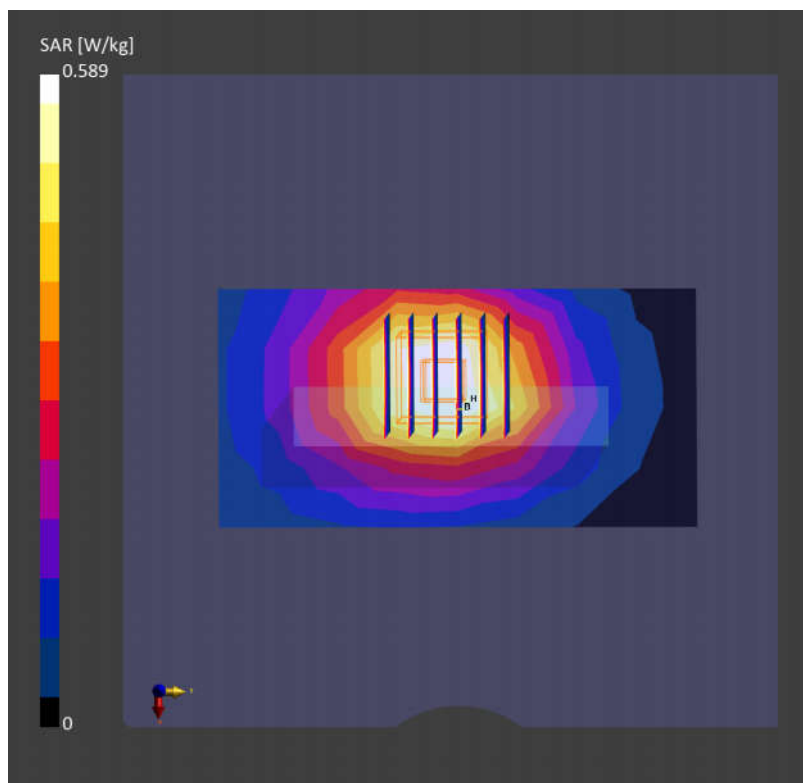

Date: 2025/8/16

08_FR1 n2_40M_QPSK_108RB_54Offset_DFT-15_Bottom Side_10mm_Ch376000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)

RBPosition:Mid AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.684 W/kg; SAR (10g) = 0.351 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.713 W/kg; SAR (10g) = 0.397 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

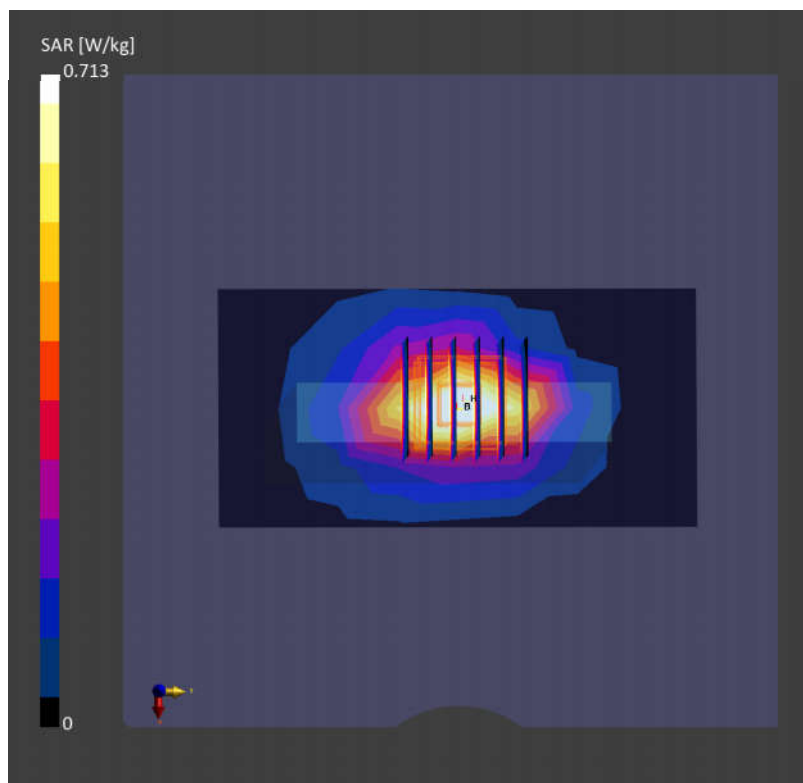

Date: 2025/8/17

09_LTE Band 7_20M_QPSK_1RB_0Offset_Left Side_10mm_Ch21100


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f= 2535.000$ MHz; $\sigma= 1.89$ S/m; $\epsilon_r = 40.8$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.429 W/kg; SAR (10g) = 0.228 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.434 W/kg; SAR (10g) = 0.236 W/kg
Smallest distance from peaks to all points 3 dB below = 13.4 mm
Ratio of SAR at M2 to SAR at M1 = 83.7 %

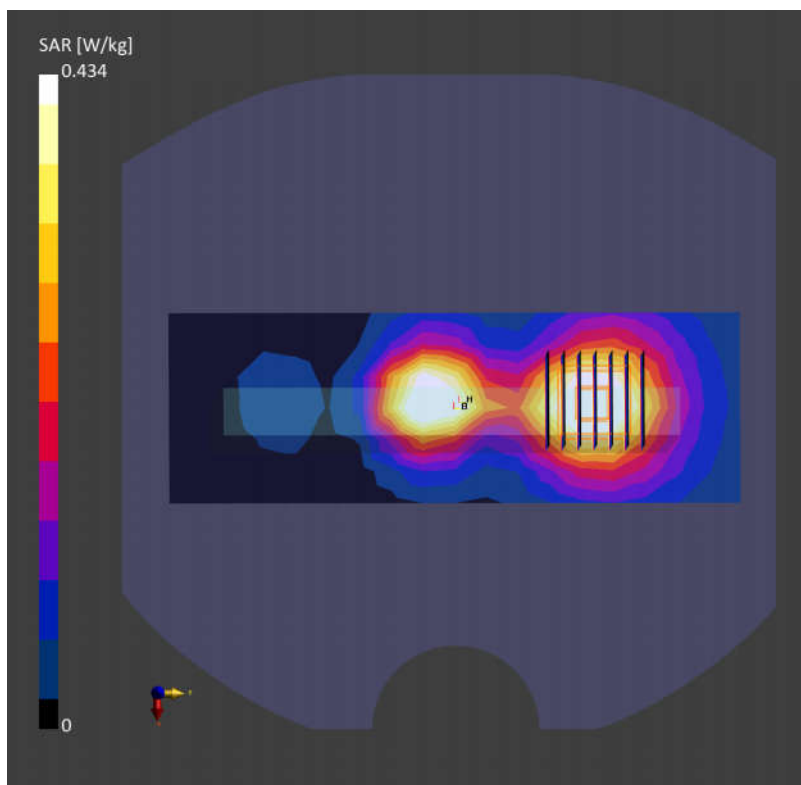

Date: 2025/8/12

10_LTE Band 48_20M_QPSK_1RB_0Offset_Right Side_10mm_Ch56640


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 3690.000 MHz; Duty Cycle: 1:1.59
Medium: Head Simulating Liquid Medium parameters used: $f= 3690.000$ MHz; $\sigma= 3.05$ S/m; $\epsilon_r = 38.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.186 W/kg; SAR (10g) = 0.080 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.13 dB
SAR (1g) = 0.190 W/kg; SAR (10g) = 0.079 W/kg
Smallest distance from peaks to all points 3 dB below = 11.7 mm
Ratio of SAR at M2 to SAR at M1 = 74.7 %

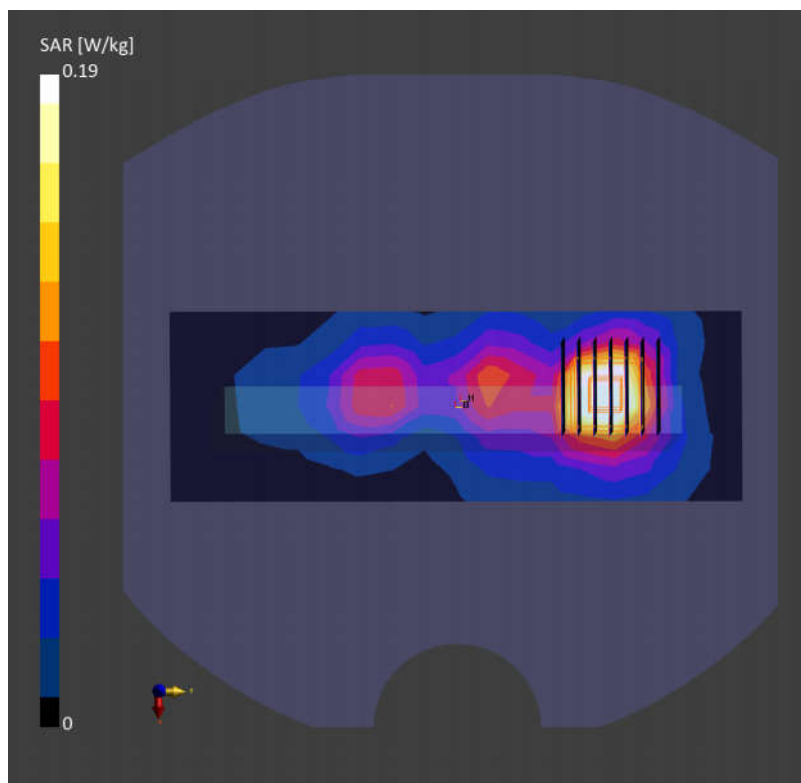

Date: 2025/8/12

11_FR1 n48_40M_QPSK_1RB_1Offset_DFT-30_Top Side_10mm_Ch641666

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)

RBPosition:Mid AntennaCfg:SISO; Frequency: 3624.990 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 3624.985$ MHz; $\sigma = 2.81$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.320 W/kg; SAR (10g) = 0.137 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.335 W/kg; SAR (10g) = 0.148 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

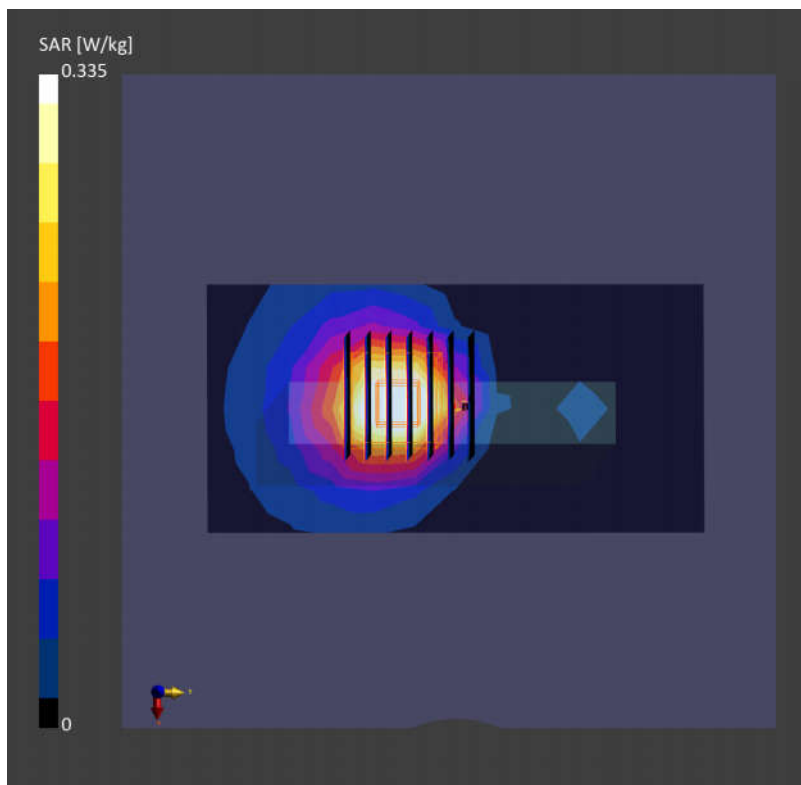

Date: 2025/8/9

12_FR1 n77_100M_QPSK_1RB_1Offset_Top Side_19mm_Ch633332


Communication System: 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:Mid
AntennaCfg:SISO; Frequency: 3499.980 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f= 3499.980$ MHz; $\sigma= 2.94$ S/m; $\epsilon_r = 37.2$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.99, 6.86, 6.89); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.576 W/kg; SAR (10g) = 0.279 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.08 dB
SAR (1g) = 0.582 W/kg; SAR (10g) = 0.286 W/kg
Smallest distance from peaks to all points 3 dB below = 15.6 mm
Ratio of SAR at M2 to SAR at M1 = 78.8 %

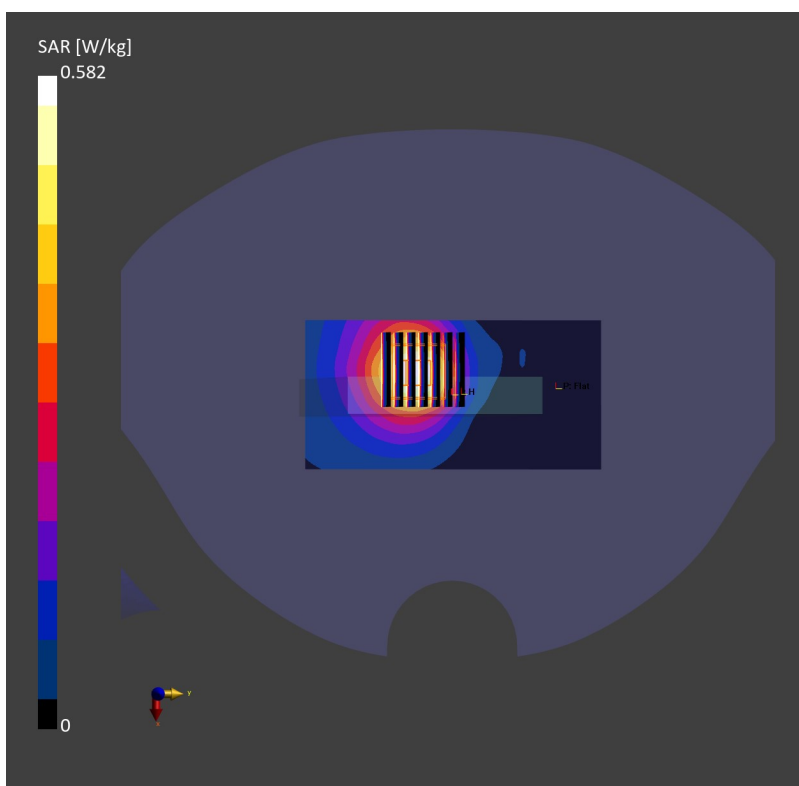

Date: 2025/8/24

13_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2462.000 MHz; Duty Cycle: 1:1.004

Medium: Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.248 W/kg; SAR (10g) = 0.126 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.275 W/kg; SAR (10g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 84.4 %

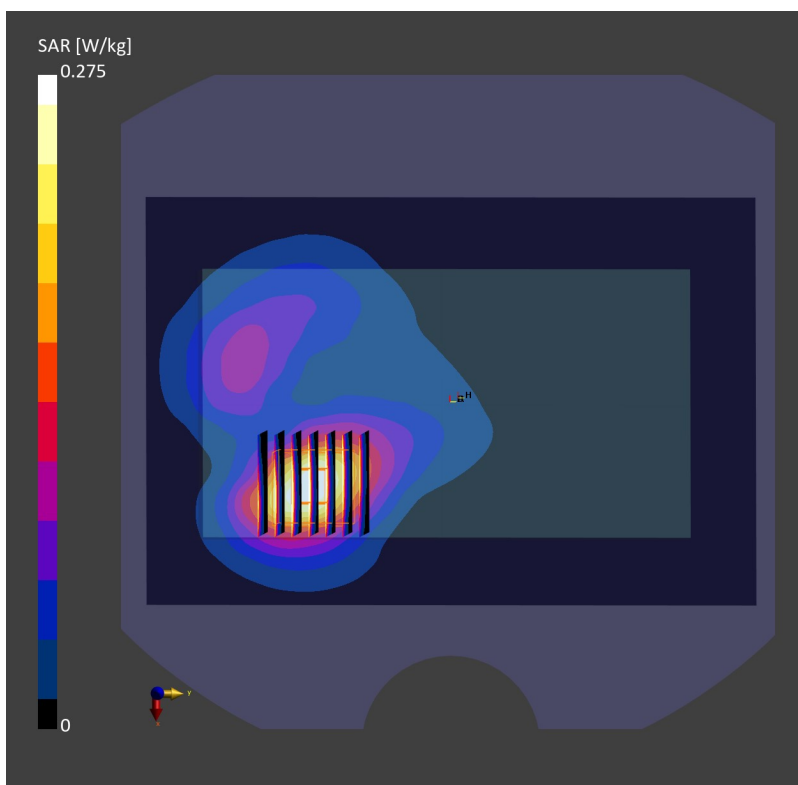

Date: 2025/8/25

14_WLAN5GHz_802.11a 6Mbps_Left Side_10mm_Ch44


Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5220.000 MHz; Duty Cycle: 1:1.029
Medium: Head Simulating Liquid Medium parameters used: $f= 5220.000$ MHz; $\sigma= 4.57$ S/m; $\epsilon_r = 36.3$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.367 W/kg; SAR (10g) = 0.135 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.11 dB
SAR (1g) = 0.442 W/kg; SAR (10g) = 0.157 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 63.4 %

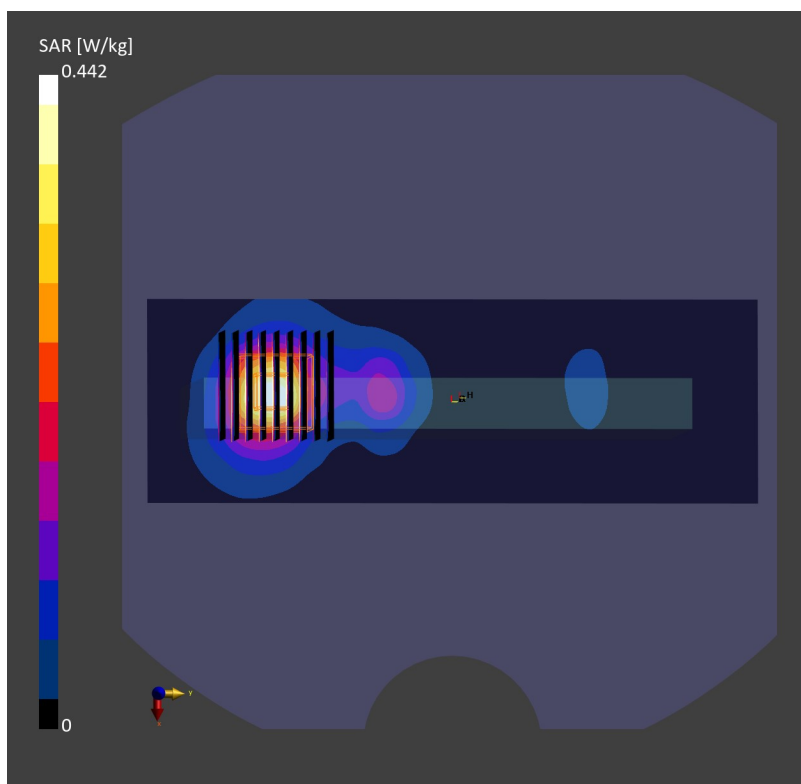

Date: 2025/8/25

15_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch165

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5825.000 MHz; Duty Cycle: 1:1.029
Medium: Head Simulating Liquid Medium parameters used: $f = 5825.000$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 35.3$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.52, 5.42, 5.44); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.285 W/kg; SAR (10g) = 0.106 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.09 dB
SAR (1g) = 0.317 W/kg; SAR (10g) = 0.114 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 57.5 %

