

FCC Test Report

FCC ID : 2ACDL-C600

Equipment : Canary Flex Home Security Device

Model No. : CAN600

Brand Name : Canary

Applicant : Canary Connect, Inc.

Address : 606 West 28th Street, 7th Floor New York NY

10001, USA

Standard : 47 CFR FCC Part 15.247

Received Date : Aug. 18, 2016

Tested Date : Aug. 22 ~ Aug. 29, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Felix Sung / Serior Engineer Along Chew Assistant Manage

TaF
Testing Laboratory
2732

Report No.: FR681802AD Page: 1 of 46



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	g
1.6	Measurement Uncertainty	g
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	Unwanted Emissions into Restricted Frequency Bands	14
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	30
3.4	Conducted Output Power	35
3.5	Number of Hopping Frequency	36
3.6	20dB and Occupied Bandwidth	39
3.7	Channel Separation	41
3.8	Number of Dwell Time	43
4	TEST LABORATORY INFORMATION	46



Release Record

Report No.	Version	Description	Issued Date
FR681802AD	Rev. 01	Initial issue	Oct. 12, 2016

Report No.: FR681802AD Page: 3 of 46



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.779MHz 43.37 (Margin -12.63dB) - QP	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 550.00MHz	Pass
15.209	Italialed Lillissions	44.48 (Margin -1.52dB) – QP	r ass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 8.39	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR681802AD Page: 4 of 46



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz) Bluetooth Ch. Frequency Channel Number Data Rate							
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps			
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps			
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps			

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: Bluetooth BR uses a GFSK.

Note 3: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK and 8DPSK.

1.1.2 Antenna Details

Ant. No.	Туре	Gain (dBi) Connector		Remark
1	PIFA	3.4	UFL	

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	Power by 5Vdc adapter & 2 x 3.63Vdc batteries in parallel connection
rower Supply Type	rower by 5vdc adapter & 2 x 5.05vdc batteries in parallel conflection

1.1.4 Accessories

	Accessories						
No.	Equipment	Description					
1	Adapter	Brand: canary Model: CAN100USAPT I/P: 100-240Vac, 50/60Hz, 0.3A O/P: 5Vdc, 2000mA Manufacturer: Vanze					
2	Adapter	Brand: canary Model: CAN100USAPT I/P: 100-240Vac, 50/60Hz, 0.35A O/P: 5Vdc, 2000mA Manufacturer: T&W					
3	Li-ion Rechargeable Battery (x2)	Brand: Sunwoda Model: SUN-INTE-16 Rating: 3.63Vdc, 3350mAh					
4	USB cable (black) For charging use	2.41m shielded without core.					
5	USB cable (white) For charging use	2.41m shielded without core.					

Report No.: FR681802AD Page: 5 of 46



1.1.5 Channel List

Frequency band (MHz)					2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

1.1.6 Test Tool and Duty Cycle

Test Tool	Console
-----------	---------

1.1.7 Power Setting

Modulation Mode		Test Frequency (MHz)	
Wiodulation Wiode	2402	2441	2480
GFSK/1Mbps	Default	Default	Default
π/4-DQPSK/2Mbps	Default	Default	Default
8DPSK/3Mbps	Default	Default	Default


Report No.: FR681802AD Page: 6 of 46



1.2 Local Support Equipment List

	Support Equipment List							
No.	No. Equipment Brand Model FCC ID Signal cable / Length (m)							
1	Notebook	DELL	Latitude E6430	DoC				

1.3 Test Setup Chart

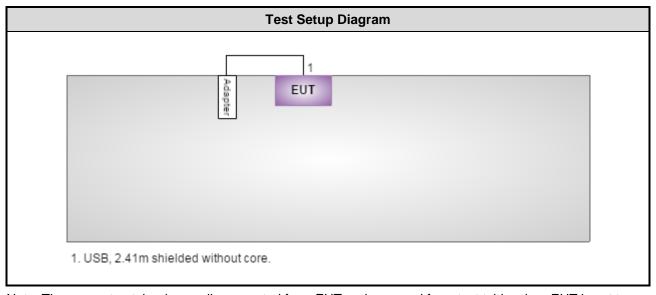

Note: The support notebook was disconnected from EUT and removed from test table when EUT is set to transmit continuously.

Report No.: FR681802AD Page: 7 of 46



1.4 The Equipment List

Test Item	Conducted Emission	Conducted Emission						
Test Site	Conduction room 1 /	Conduction room 1 / (CO01-WS)						
Instrument	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016			
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016			
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016			
Measurement Software AUDIX e3 6.120210k NA NA								
Note: Calibration Interval of instruments listed above is one year.								

Test Item	Radiated Emission									
Test Site	966 chamber1 / (03CH01-WS)									
Instrument	Manufacturer Model No. Serial No. Calibration Date Calibration Un									
Spectrum Analyzer	R&S	FSV40	101498	Dec. 13, 2015	Dec. 12, 2016					
Receiver	R&S	ESR3	101658	Nov. 04, 2015	Nov. 03, 2016					
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 04, 2016	Aug. 03, 2017					
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 16, 2015	Dec. 15, 2016					
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016					
Preamplifier	EMC	EMC02325	980225	Aug. 05, 2016	Aug. 04, 2017					
Preamplifier	Agilent	83017A	MY39501308	Oct. 02, 2015	Oct. 01, 2016					
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 10, 2015	Dec. 09, 2016					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 10, 2015	Dec. 09, 2016					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 10, 2015	Dec. 09, 2016					
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 10, 2015	Dec. 09, 2016					
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 10, 2015	Dec. 09, 2016					
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 16, 2015	Nov. 15, 2016					
Measurement Software	AUDIX	e3	6.120210g	NA	NA					
Note: Calibration Inte	rval of instruments listed	d above is one year.								

Test Item	RF Conducted									
Test Site	(TH01-WS)									
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until					
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2016	Feb. 16, 2017					
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016					
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016					
AC POWER SOURCE	APC	AFC-500W	F312060012	Oct. 26, 2015	Oct. 25, 2016					
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA					
	Software Sporton Sporton 1.3.30 Note: Calibration Interval of instruments listed above is one year.									

Report No.: FR681802AD Page: 8 of 46



1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty								
Parameters	Uncertainty							
Bandwidth	±34.134 Hz							
Conducted power	±0.808 dB							
Power density	±0.463 dB							
Conducted emission	±2.670 dB							
AC conducted emission	±2.90 dB							
Radiated emission ≤ 1GHz	±3.66 dB							
Radiated emission > 1GHz	±5.63 dB							

Report No.: FR681802AD Page: 9 of 46



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	24°C / 59%	Howard Huang
Radiated Emissions	03CH01-WS	22-24°C / 60-62%	Vincent Yeh
RF Conducted	TH01-WS	24°C / 65%	Alex Huang

➤ FCC site registration No.: 181692➤ IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	GFSK	2441	1Mbps	
Radiated Emissions ≤ 1GHz	GFSK	2441	1Mbps	
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	
Conducted Output Power	GFSK л/4 QDPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	
Number of Hopping Channels	GFSK 8DPSK	2402~2480 2402~2480	1Mbps 3Mbps	
Hopping Channel Separation	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	
Dwell Time	GFSK 8DPSK	2402 2402	1Mbps 3Mbps	

NOTE:

Report No.: FR681802AD Page: 10 of 46

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Adapter Vanze and T&W had been covered during the pretest. The worst adapter is Vanze, therefore the following test results came out from this.



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit								
Frequency Emission (MHz) Quasi-Peak Average								
0.15-0.5	66 - 56 *	56 - 46 *						
0.5-5	56	46						
5-30	60	50						
Note 1: * Decreases with the logarithm of the frequency.								

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

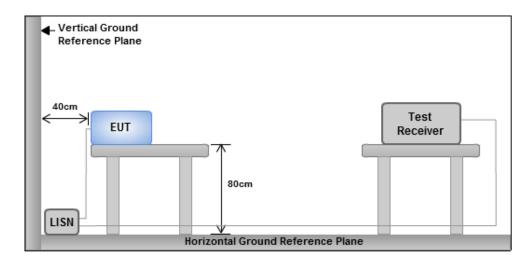


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR681802AD Page: 11 of 46




3.1.4 Test Result of Conducted Emissions

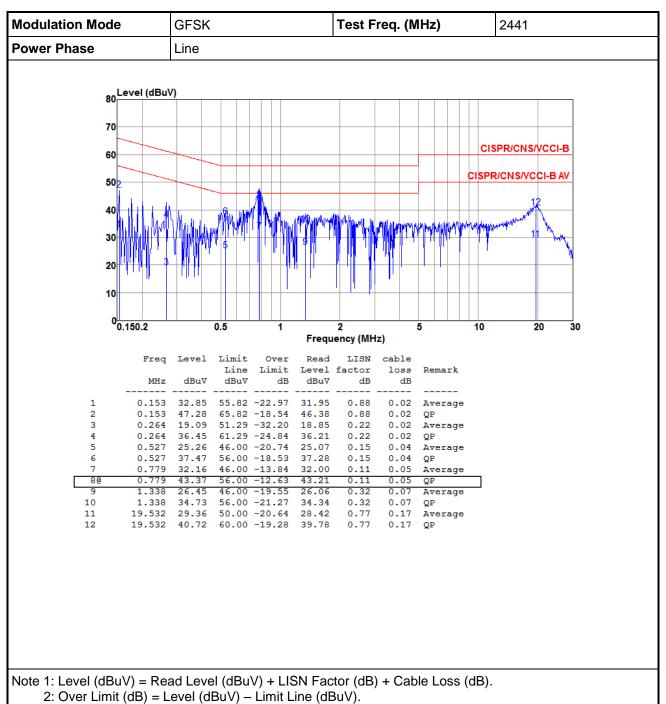

Report No.: FR681802AD Page: 12 of 46



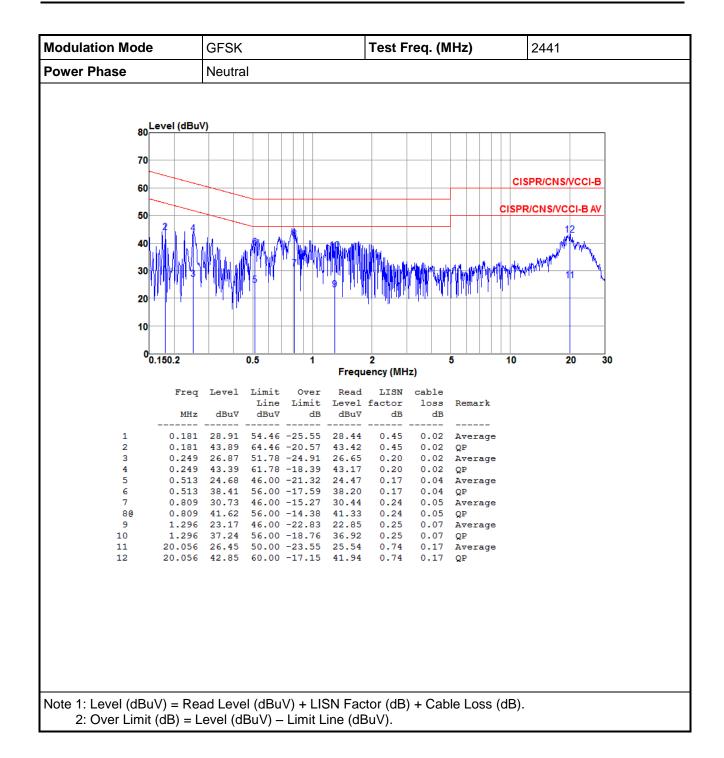

Report No.: FR681802AD Page: 13 of 46



3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit										
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)							
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300							
0.490~1.705	24000/F(kHz)	33.8 - 23	30							
1.705~30.0	30	29	30							
30~88	100	40	3							
88~216	150	43.5	3							
216~960	200	46	3							
Above 960	500	54	3							

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. Radiated emission above 1GHz / Peak value RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for harmonics

The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:


3.
$$20\log \text{ (Duty cycle)} = 20\log \frac{1\text{s} / 1600 * 5}{100 \text{ ms}} = -30.1 \text{dB}$$

4. Radiated emission above 1GHz / Average value for other emissions RBW=1MHz, VBW=1/T and Peak detector

Report No.: FR681802AD Page: 14 of 46




3.2.3 Test Setup

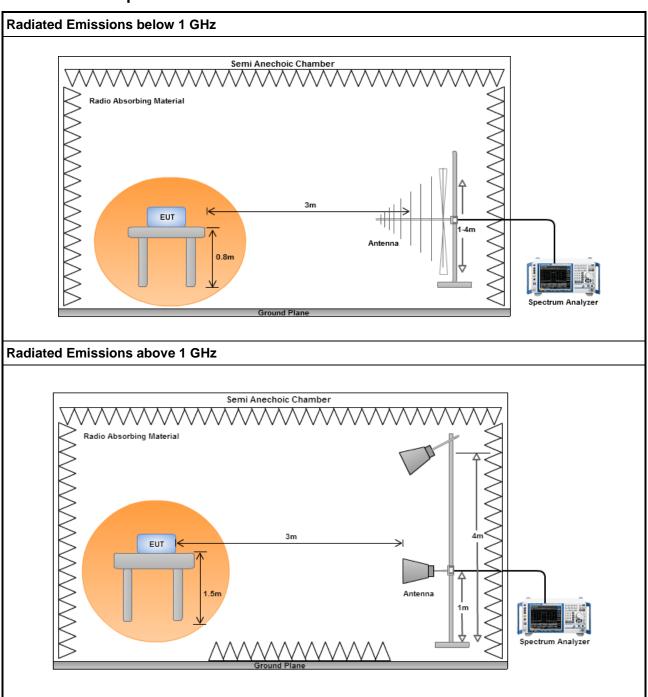

Report No.: FR681802AD Page: 15 of 46



3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

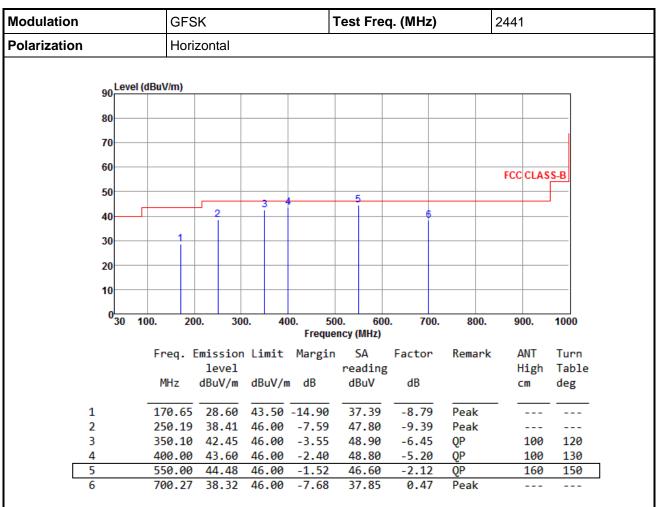

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR681802AD Page: 16 of 46



Modulation GFSK				-	Test Fre	eq. (MHz)		2441				
Polarization	Verti	cal										
	90 Le	evel (dBu	V/m)									
	00											
	80											
	70											
	60											
										FCC	CLAS	S-B
	50						5					
	40			2	3	4	- 1					
	30-	1										
	30											
	20											
	10											
	030	100.	200	0. 30	0. 4		00. 60 ency (MHz)	00. 700.	800.	90	0.	1000
		F	rea. E	missior	ı Limit	Margin	SA	Factor	Remark	Al	NT	Turn
				level			readin				igh	Table
		ı	MHz	dBuV/m	dBuV/	m dB	dBuV	dB		CI	m	deg
	1	1	18.27	30.25	43.50	-13.25	40.72	-10.47	Peak			
	2		50.19			-9.38	46.01		Peak			
	3		50.10			-10.33	42.12		Peak			
	4		99.57	37.56			42.77		Peak			
	5		49.92	41.02			43.14		Peak			
•	6	/	00.27	34.23	46.00	-11.77	33.76	0.47	Peak			

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR681802AD Page: 17 of 46



3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

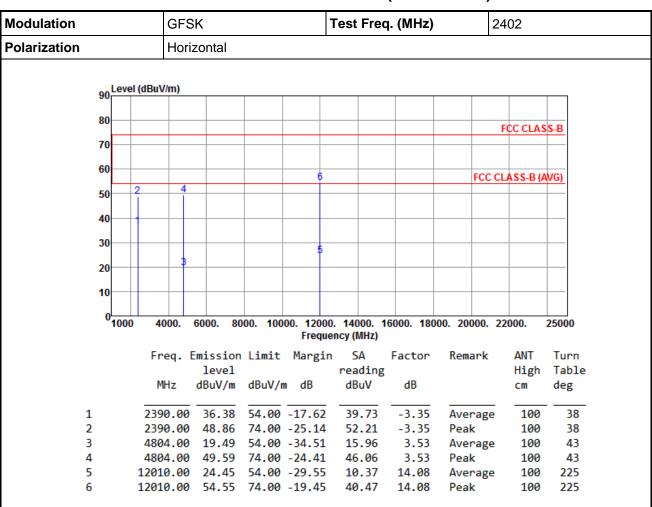

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR681802AD Page: 18 of 46



Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

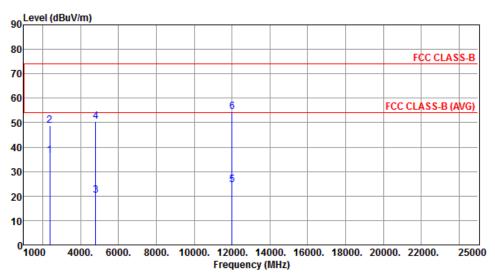

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
				47.40					
1	2390.00	36.52	54.00	-1/.48	39.87	-3.35	Average	138	211
2	2390.00	48.80	74.00	-25.20	52.15	-3.35	Peak	138	211
3	4804.00	20.34	54.00	-33.66	16.81	3.53	Average	336	78
4	4804.00	50.44	74.00	-23.56	46.91	3.53	Peak	336	78
5	12010.00	24.50	54.00	-29.50	10.42	14.08	Average	100	118
6	12010.00	54.60	74.00	-19.40	40.52	14.08	Peak	100	118

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR681802AD Page: 19 of 46



4

5

6

7

8

Modulation	GFSK	GFSK		Т	est Freq	. (MHz)	24	141	
Polarization	Horizo	ntal		•					
	•								
90 Level (di	BuV/m)								
80							F	FCC CLAS	S-B
70									
60									
3	6	8					FCC CI	ASS-B (A	VG)
50	ì	8							
40									
30									
30									
20		1 7							
10									
1000	4000. 60	000. 800	0. 10000		14000. 16 cy (MHz)	6000. 1 800	00. 20000. 22	2000.	25000
	Freq. Em:	ission	Limit			Factor	Remark	ANT	Turn
		level		_	reading			High	Table
	MHz di	BuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1 - 2	390.00	36.18	54.00 -	17.82	39.53	-3.35	Average	100	42
		49.51			52.86	-3.35	Peak	100	42
3 2	483.50	36.68	54.00 -	17.32	39.61	-2.93	Average	100	136

52.14

15.11

45.21

9.91

40.01

-2.93

3.78

3.78

8.43

8.43

Peak

Peak

Peak

Average

Average

100

100

100

100

100

136

45

45

136

136

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

2483.50 49.21 74.00 -24.79

4882.00 48.99 74.00 -25.01

7323.00 18.34 54.00 -35.66

7323.00 48.44 74.00 -25.56

54.00 -35.11


4882.00 18.89

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR681802AD Page: 20 of 46



Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical		

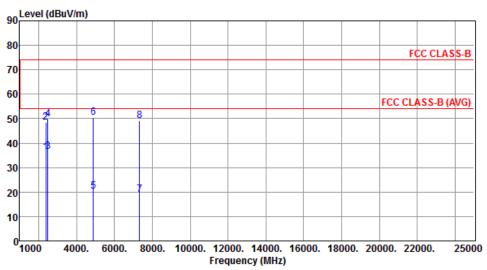

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.30	54.00	-17.70	39.65	-3.35	Average	134	212
2	2390.00	48.38	74.00	-25.62	51.73	-3.35	Peak	134	212
3	2483.50	36.62	54.00	-17.38	39.55	-2.93	Average	100	235
4	2483.50	49.66	74.00	-24.34	52.59	-2.93	Peak	100	235
5	4882.00	20.28	54.00	-33.72	16.50	3.78	Average	332	79
6	4882.00	50.38	74.00	-23.62	46.60	3.78	Peak	332	79
7	7323.00	19.01	54.00	-34.99	10.58	8.43	Average	100	235
8	7323.00	49.11	74.00	-24.89	40.68	8.43	Peak	100	235

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR681802AD Page: 21 of 46



4

5

6

4960.00

7440.00

44.43

19.26

7440.00 49.36 74.00 -24.64

74.00 -29.57

54.00 -34.74

40.39

10.70

40.80

4.04

8.56

8.56

Peak

Peak

Average

100


100

100

45

162

162

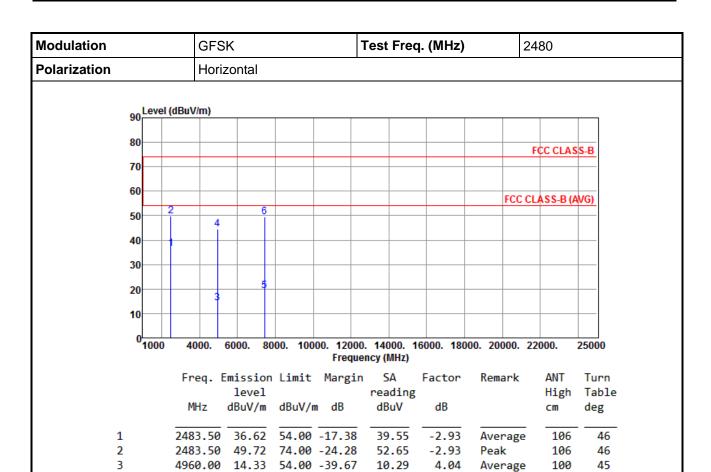


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR681802AD Page: 22 of 46



Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

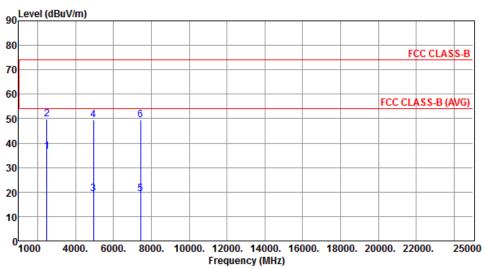


		Emission level		Ū	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	36.57	54.00	-17.43	39.50	-2.93	Average	125	213
2	2483.50	49.81	74.00	-24.19	52.74	-2.93	Peak	125	213
3	4960.00	19.32	54.00	-34.68	15.28	4.04	Average	337	68
4	4960.00	49.42	74.00	-24.58	45.38	4.04	Peak	337	68
5	7440.00	19.24	54.00	-34.76	10.68	8.56	Average	100	225
6	7440.00	49.34	74.00	-24.66	40.78	8.56	Peak	100	225

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR681802AD Page: 23 of 46



3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

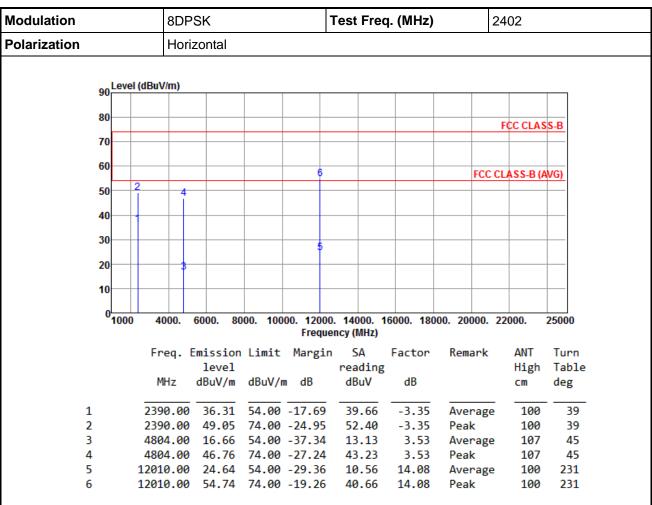

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR681802AD Page: 24 of 46



Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical		

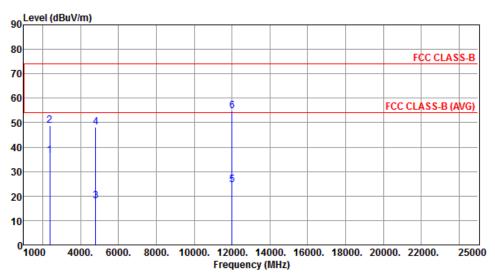


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	J	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.48	54.00	-17.52	39.83	-3.35	Average	135	210
2	2390.00	48.74	74.00	-25.26	52.09	-3.35	Peak	135	210
3	4804.00	18.07	54.00	-35.93	14.54	3.53	Average	322	76
4	4804.00	48.17	74.00	-25.83	44.64	3.53	Peak	322	76
5	12010.00	24.73	54.00	-29.27	10.65	14.08	Average	100	121
6	12010.00	54.83	74.00	-19.17	40.75	14.08	Peak	100	121

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR681802AD Page: 25 of 46



Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal		

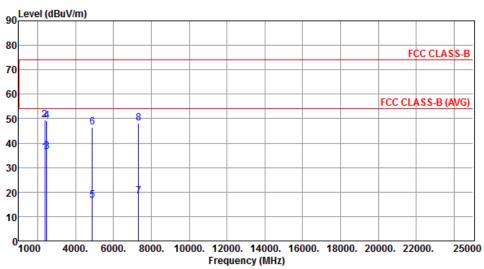


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.09	54.00	-17.91	39.44	-3.35	Average	100	40
2	2390.00	49.42	74.00	-24.58	52.77	-3.35	Peak	100	40
3	2483.50	36.55	54.00	-17.45	39.48	-2.93	Average	100	40
4	2483.50	49.16	74.00	-24.84	52.09	-2.93	Peak	100	40
5	4882.00	16.46	54.00	-37.54	12.68	3.78	Average	100	48
6	4882.00	46.56	74.00	-27.44	42.78	3.78	Peak	100	48
7	7323.00	18.10	54.00	-35.90	9.67	8.43	Average	100	139
8	7323.00	48.20	74.00	-25.80	39.77	8.43	Peak	100	139

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR681802AD Page: 26 of 46



Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical		

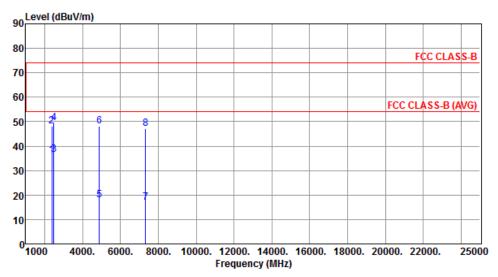

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	36.12	54.00	-17.88	39.47	-3.35	Average	130	210
2	2390.00	48.26	74.00	-25.74	51.61	-3.35	Peak	130	210
3	2483.50	36.56	54.00	-17.44	39.49	-2.93	Average	130	210
4	2483.50	49.57	74.00	-24.43	52.50	-2.93	Peak	130	210
5	4882.00	17.99	54.00	-36.01	14.21	3.78	Average	334	80
6	4882.00	48.09	74.00	-25.91	44.31	3.78	Peak	334	80
7	7323.00	17.05	54.00	-36.95	8.62	8.43	Average	100	236
8	7323.00	47.15	74.00	-26.85	38.72	8.43	Peak	100	236

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR681802AD Page: 27 of 46



4

5

Modulation			8DP	SK		-	Test Fred	q. (MHz)	2	2480	
Polarization			Hori	zontal		"			\ 		
	90	Level	(dBuV/m)								
	80										
										FCC CLAS	S-B
	70										
	60								500		100
	50		2 .	6					FCC	CLASS-B (A	WG)
	50		4								
	40										
	30			\perp							
				5							
	20		3								
	10										
	0										
		1000	4000.	6000. 80	00. 100). 14000. 1 ency (MHz)	16000. 180	00. 20000.	22000.	25000
			Freq. I	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
			-	level			reading			High	Table
			MHz	dBuV/m	dBuV/ı	m dB	dBuV	dB		cm	deg
1	L		2483.50	36.52	54.00	-17.48	39.45	-2.93	Average	107	44
2			2483.50				52.72	-2.93	Peak	107	44
3	3		4960.00	16.73	54.00	-37.27	12.69	4.04	Average	100	44

42.79

10.48

4.04

8.56

8.56

Peak

Peak

Average

100

100

100

44

161

161

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

4960.00 46.83 74.00 -27.17


7440.00 19.04 54.00 -34.96 10.48 7440.00 49.14 74.00 -24.86 40.58

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR681802AD Page: 28 of 46



Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical		

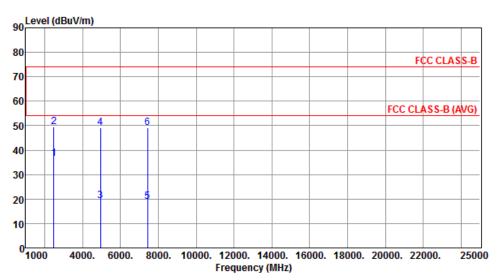

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	36.60	54.00	-17.40	39.53	-2.93	Average	126	213
2	2483.50	49.57	74.00	-24.43	52.50	-2.93	Peak	126	213
3	4960.00	19.14	54.00	-34.86	15.10	4.04	Average	336	68
4	4960.00	49.24	74.00	-24.76	45.20	4.04	Peak	336	68
5	7440.00	19.03	54.00	-34.97	10.47	8.56	Average	100	223
6	7440.00	49.13	74.00	-24.87	40.57	8.56	Peak	100	223

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR681802AD Page: 29 of 46



3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference Level Measurement

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

3.3.3 Test Setup




Report No.: FR681802AD Page: 30 of 46




3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

GFSK

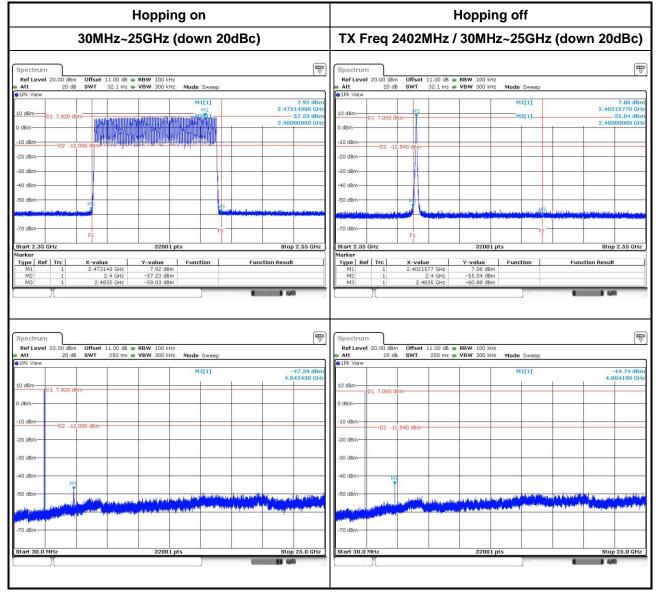

Report No.: FR681802AD Page: 31 of 46




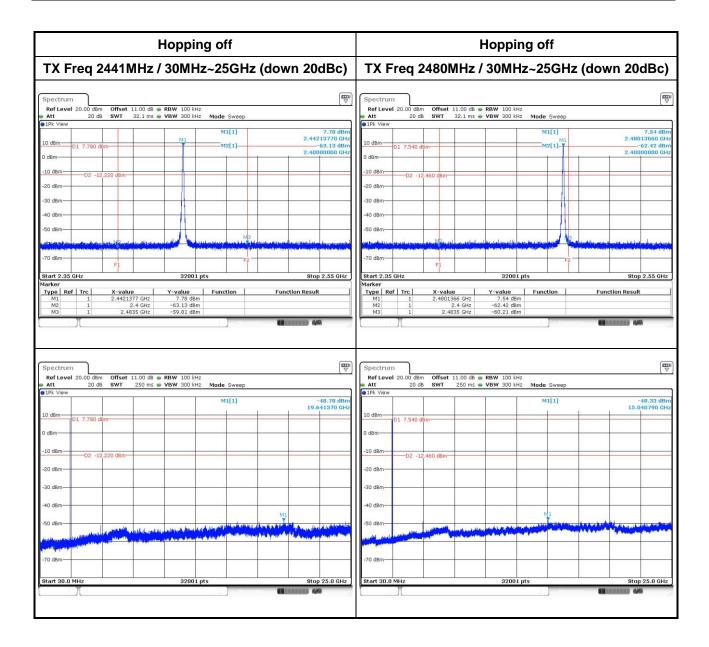

Report No.: FR681802AD Page: 32 of 46




8DPSK

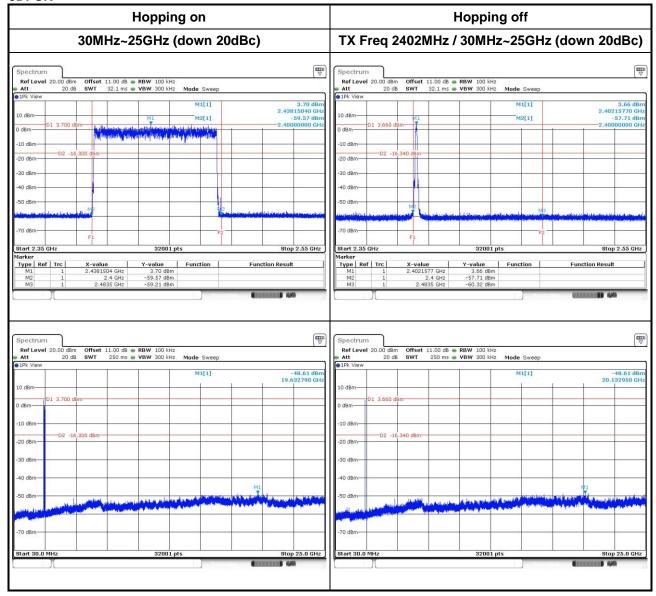

Report No.: FR681802AD Page: 33 of 46



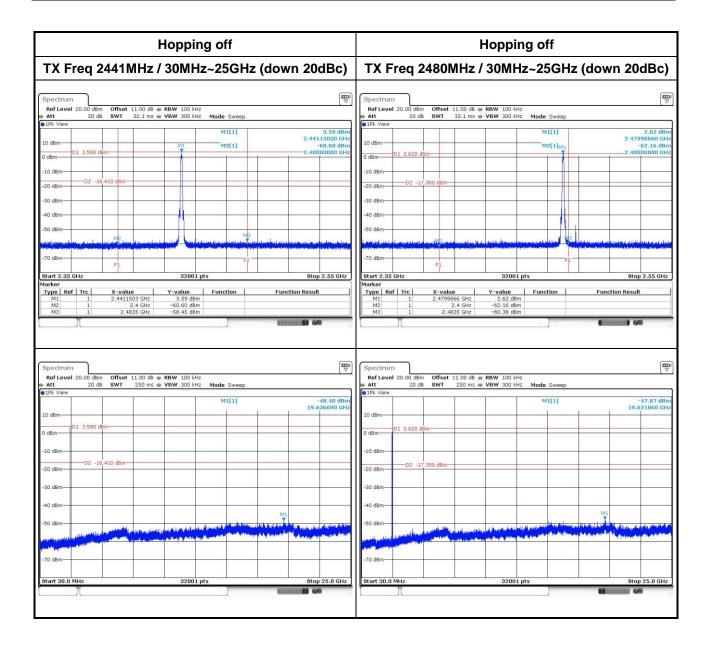

Report No.: FR681802AD Page: 34 of 46



3.4 Conducted Output Power

3.4.1 Limit of Conducted Output Power

1 Watt For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
0.125 Watt For all other frequency hopping systems in the 2400–2483.5 MHz band.
0.125 Watt For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

- A wideband power meter is used for power measurement. Bandwidth of power senor and meter is 50MHz
- 2 If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup



Report No.: FR681802AD Page: 35 of 46



3.4.4 Test Result of Conducted Output Power

Modulation Mode	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (mW)
GFSK	2402	5.92	7.72	125
GFSK	2441	6.90	8.39	125
GFSK	2480	6.73	8.28	125
л/4 DQPSK	2402	4.73	6.75	125
л/4 DQPSK	2441	5.05	7.03	125
л/4 DQPSK	2480	4.30	6.33	125
8DPSK	2402	4.98	6.97	125
8DPSK	2441	5.35	7.28	125
8DPSK	2480	4.52	6.55	125

Modulation Mode	Freq. (MHz)	AV Output Power (mW)	AV Output Power (dBm)
GFSK	2402	5.69	7.55
GFSK	2441	6.64	8.22
GFSK	2480	6.49	8.12
л/4 DQPSK	2402	2.69	4.29
л/4 DQPSK	2441	2.77	4.42
л/4 DQPSK	2480	2.33	3.67
8DPSK	2402	2.69	4.29
8DPSK	2441	2.77	4.42
8DPSK	2480	2.32	3.66

Note: Average power is for reference only.

Report No.: FR681802AD Page: 36 of 46



3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

3.5.2 Test Procedures

- 1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
- 2 Allow trace to stabilize.


3.5.3 Test Setup



Report No.: FR681802AD Page: 37 of 46



3.5.4 Test Result of Number of Hopping Frequency

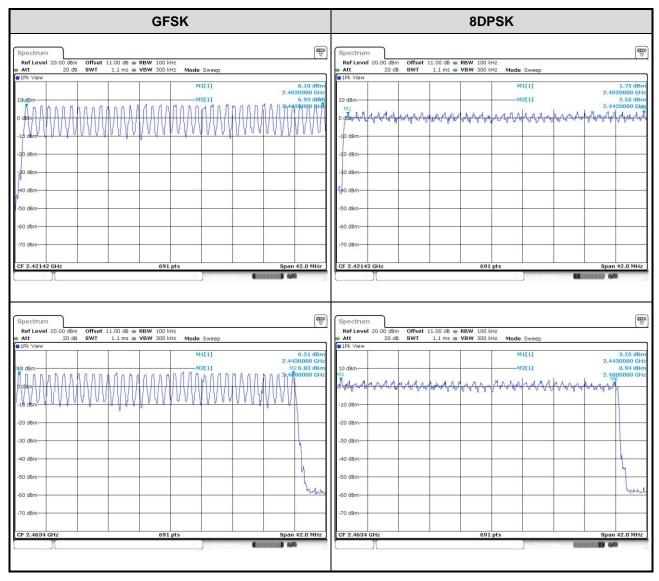

Report No.: FR681802AD Page: 38 of 46



3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


20dB Bandwidth

- 1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak, Trace max hold
- 2 Allow trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Sample, Trace max hold
- 2 Allow trace to stabilize
- 3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup




Report No.: FR681802AD Page: 39 of 46



3.6.3 Test result of 20dB and Occupied Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
GFSK	2402	1.030	0.925
GFSK	2441	1.026	0.925
GFSK	2480	1.026	0.920
8DPSK	2402	1.322	1.207
8DPSK	2441	1.326	1.207
8DPSK	2480	1.322	1.203

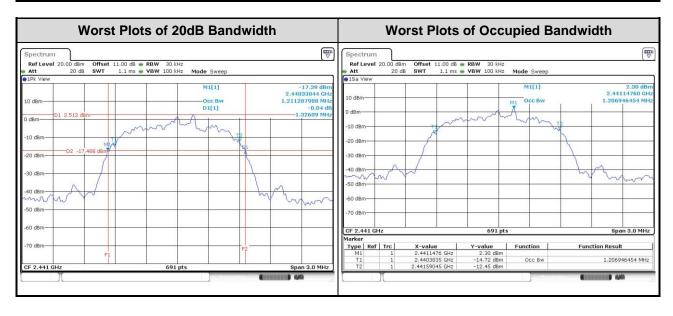

Report No.: FR681802AD Page: 40 of 46



3.7 Channel Separation


3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures

- 1. Set RBW=100kHz, VBW=300kHz, Sweep time = Auto, Detector=Peak Trace max hold
- 2 Allow trace to stabilize
- 3 Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup




Report No.: FR681802AD Page: 41 of 46



3.7.4 Test result of Channel Separation

Modulation Mode	Freq. (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)
GFSK	2402	1.003	1.030	0.687
GFSK	2441	1.003	1.026	0.684
GFSK	2480	1.003	1.026	0.684
8DPSK	2402	1.003	1.322	0.881
8DPSK	2441	1.003	1.326	0.884
8DPSK	2480	1.003	1.322	0.881

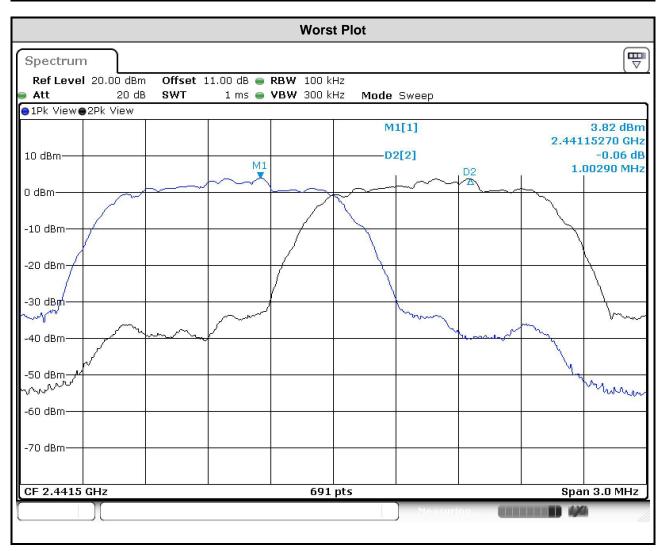

Report No.: FR681802AD Page: 42 of 46



3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures

- Set RBW=100kHz,VBW=300kHz,Sweep time = 500us(DH1),2ms(DH3),4ms(DH5), Detector=Peak, Span=0Hz,Trace max hold
- 2 Enable gating and trigger function of spectrum analyzer to measure burst on time.
- 3. The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds.
- 4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 5.06 x 31.6 = 160 within 31.6 seconds.
- The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 3.37 x 31.6 = 106.6 within 31.6 seconds

3.8.3 Test Setup




Report No.: FR681802AD Page: 43 of 46




3.8.4 Test Result of Dwell Time

Modulation Mode	Freq. (MHz)	Length of Transmission Time (msec)	Number of Transmission in a 31.6 (79 Hopping*0.4)	Result (s)	Limit (s)
GFSK-DH1	2402	0.44058	320	0.141	0.4
GFSK-DH3	2402	1.69058	160	0.270	0.4
GFSK-DH5	2402	2.97754	106.6	0.317	0.4
8DPSK-DH1	2402	0.46014	320	0.147	0.4
8DPSK-DH3	2402	1.69203	160	0.271	0.4
8DPSK-DH5	2402	2.94855	106.6	0.314	0.4

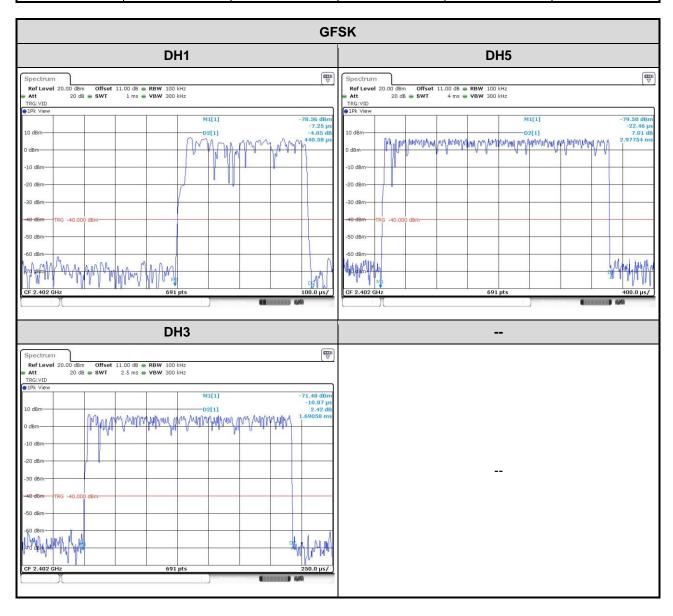

Report No.: FR681802AD Page: 44 of 46



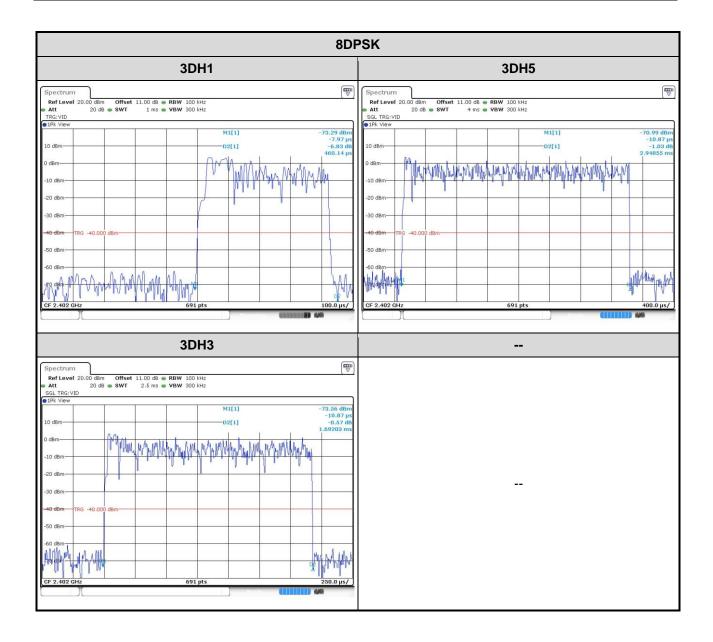

Report No.: FR681802AD Page: 45 of 46



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR681802AD Page: 46 of 46