

RF EXPOSURE Test Report

Product: Power Bank

Trade Mark: N/A

Model Number: PB0608

FCC ID: 2ACFF-PB0608

Prepared for

C-SMARTLINK INFORMATION TECHNOLOGY CO., LIMITED
101 to 501, Factory Building 1, No. 91 Hengping Road, Baoan Community,
Yuanshan Street, Longgang District, Shenzhen

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China
Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110
Website: <http://www.sz-hongbiao.com>

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	DESCRIPTION OF EUT	5
1.2	TEST MODE.....	6
1.3	TEST SETUP	6
1.4	ANCILLARY EQUIPMENT	6
2	TEST FACILITIES AND ACCREDITATIONS	7
2.1	TEST LABORATORY	7
2.2	ENVIRONMENTAL CONDITIONS	7
2.3	MEASUREMENT UNCERTAINTY	7
2.4	TEST SOFTWARE	7
3	LIST OF TEST EQUIPMENT	8
4	RF EXPOSURE.....	9
4.1	MAXIMUM PERMISSIBLE EXPOSURE	9
4.1.1.	<i>Limit</i>	9
4.1.2.	<i>Test Procedures</i>	9
4.1.3.	<i>Test Setup</i>	9
4.1.4.	<i>Test Result</i>	10
5	PHOTOGRAPHS OF THE TEST SETUP.....	12

TEST RESULT CERTIFICATION**Applicant's Name** : C-SMARTLINK INFORMATION TECHNOLOGY CO., LIMITEDAddress : 101 to 501, Factory Building 1, No. 91 Hengping Road, Baoan
Community, Yuanshan Street, Longgang District, Shenzhen**Manufacturer's Name** : C-Smartlink Information Technology Co., Ltd.Address : 101 to 501, Factory Building 1, No. 91 Hengping Road, Baoan
Community, Yuanshan Street, Longgang District, Shenzhen**Factory's Name 1** : HUNAN C-SMARTLINK TECHNOLOGY CO.,LTDAddress : Building 5-6-7-8, Chengnan Electronic Information Industrial
Park, Chenxi Industrial Development Zone, Chenxi County,
Huaihua, Hunan Province**Factory's Name 2** : C-Smartlink Information Technology Co., Ltd.Address : 101 to 501, Factory Building 1, No. 91 Hengping Road, Baoan
Community, Yuanshan Street, Longgang District, Shenzhen**Product description**

Product name : Power Bank

Model Number : PB0608


Standards : FCC CFR 47 PART 1 , 1.1310

Test procedure : KDB 680106 D01 Wireless Power Transfer v04


This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test :


Date (s) of performance of tests : June 03, 2025~ July 03, 2025

Test Result..... : **Pass****Testing Engineer** :

(Z o e S u)

Technical Manager :

(G a r y L u)

Authorized Signatory :

(L e o S u)

[illegible]

1 General Description

1.1 Description of EUT

Product name:	Power Bank
Model name:	PB0608
Series Model:	MOPB0608, SEPB0608, STPB0608, SGPB0608, VIPB0608, SKPB0608, LIPB0608, KAPB0608, HOPB0608, HSPB0608, GMPB0608, FAPB0608, EXPB0608, AIPB0608, USPB0608, XFPB0608, PB0608* PB0608-A, MOPB0608-A, SEPB0608-A, STPB0608-A, SGPB0608-A, VIPB0608-A, SKPB0608-A, LIPB0608-A, KAPB0608-A, HOPB0608-A, HSPB0608-A, GMPB0608-A, FAPB0608-A, EXPB0608-A, AIPB0608-A, USPB0608-A, XFPB0608-A, ***PB0608-A
Different of series model:	All the models are the same circuit and module, except the colour and model No. For model PB0608*: The "*" can be replaced by one letter from A-Z or blank, indicate different sales customers and sales markets. For model PB0608-A, MOPB0608-A, SEPB0608-A, STPB0608-A, SGPB0608-A, VIPB0608-A, SKPB0608-A, LIPB0608-A, KAPB0608-A, HOPB0608-A, HSPB0608-A, GMPB0608-A, FAPB0608-A, EXPB0608-A, AIPB0608-A, USPB0608-A, XFPB0608-A, ***PB0608-A: The 1st to 3rd "*" can be replaced by one or two or three letters from A-Z or blank, indicate different sales customers and sales markets. The "A" can be replaced by BK, WH, PNK, RED, GRY, PLE, BLU, GLD, SIL, YEL, GRN, DGR, CAM or DGY, indicate different colour for enclosure, eg. BK indicate enclosure with black colour, WH indicate enclosure with white colour, PNK indicate enclosure with pink colour, RED indicate enclosure with red colour, GRY indicate enclosure with grey colour, PLE indicate enclosure with purple colour, BLU indicate enclosure with blue colour, GLD indicate enclosure with gold colour, SIL indicate enclosure with silver colour, YEL indicate enclosure with yellow colour, GRN indicate enclosure with green colour, DGR indicate enclosure with dark green colour, CAM indicate enclosure with camouflage colour, DGY indicate enclosure with dark grey colour.
Operation frequency:	115kHz-205kHz, 360kHz
Operational mode:	Wireless charging
Modulation type:	ASK
Antenna type:	Coil Antenna

Battery:	DC 7.7V, 5000mAh, 38.5Wh
Power supply:	Cell: 5000mAh*2pcs Rated Capacity: 6000mAh (5V=3A) Battery Capacity: 5000mAh, 7.7V, 38.5Wh Type-C Input: 5V=3A, 9V=3A, 12V=2.5A Type-C Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2.33A, 20V=1.75A (PPS: 3.3V-11V=3A) Wireless Output: 5W, 7.5W, 10W, 15W Total Output: 35W (Max)
Adapter information:	N/A

1.2 Test Mode

Pretest Test Mode	Description of Mode
1	AC/DC adapter+Wireless Output: 5W
2	AC/DC adapter+Wireless Output: 7.5W
3	Wireless Output: 10W
4	Wireless Output: 15W

Note: All modes have been tested, and the report only reflects the test results of the worst mode (Final Test Mode), When the prototype is powered by the adapter, it can only perform 5W, 7.5W wireless charging output.

1.3 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Phone	iPhone 12pro Max	FF2LDX4T60 D5H	Apple Inc
Adapter	CD289	35810	Ugreen Group Limited

2 Test Facilities and Accreditations

2.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

2.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

2.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
E-field	± 2.5 dB	
H-field	± 4.2 dB	
Temperature	± 1 degree	
Humidity	± 5 %	

2.4 Test Software

Software name	Manufacturer	Model	Version
MAGPy V2.6	Schmid & Partner Engineering AG	MAGPy V2.6	V2.6

3 List of Test Equipment

Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E077	Magnetic Amplitude and Gradient Probe System	Schmid & Partner Engineering AG	MAGPy -8H3D+E3D	3107	2024-03-15	2026-03-14
2	HB-E078	Magnetic Amplitude and Gradient Probe System	Schmid & Partner Engineering AG	MAGPy-DAS	3097	2024-03-15	2026-03-14

Note: the calibration interval of the above test instruments is 24 months and the calibrations are traceable to international system unit (SI).

4 RF Exposure

4.1 Maximum Permissible Exposure

4.1.1. Limit

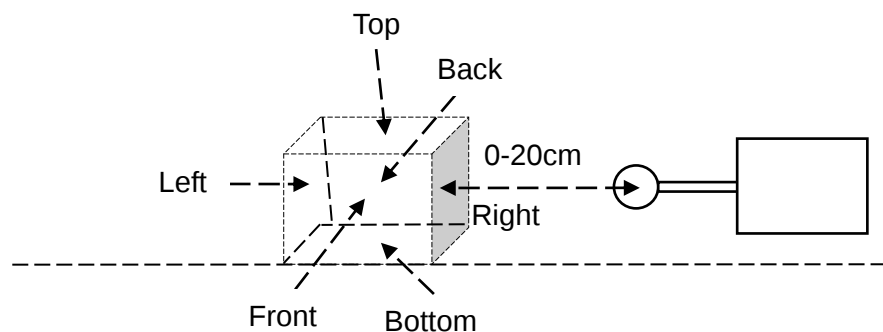
Frequency range(MHz)	Electric field strength(V/m)	Magnetic field strength(A/m)	Power density(mW/cm ²)	Averaging time(minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0 6	6
300-1500	/	/	f/300	6
1500-100000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100000	/	/	1	30

f = frequency in MHz * = Plane-wave equivalent power density

4.1.2. Test Procedures

- The RF exposure test was performed in anechoic chamber.
- Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm.
- The highest emission level was recorded and compared with limit.

4.1.3. Test Setup



4.1.4. Test Result

For portable exposure condition:

Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.

H-field measurements taken every 2 cm (starting as close to 20 cm as possible) on each edge/top surface of the host/client pair were also evaluated for portable use conditions. The report reflects data for the worst 0 cm test distance mode only.

Test condition 1: Mode 2 operating mode with client device (1 % battery status of client device).

Measurement results directly tested using MAGPy.

Maximum permissible Exposure(115kHz-205kHz)				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<1%	Top	0	33.9	1.12
<1%	Left	0	47	0.25
<1%	Right	0	4.13	0.8
<1%	Front	0	23	0.79
<1%	Back	0	10.7	0.42
<1%	Bottom	0	39.2	0.37
Limit			614	1.63
Margin Limit (%)			7.65%	68.71%

When setting MAGPy to select compliance location as probe tip, the measured value is extrapolated to 0mm as the result.

Maximum permissible Exposure(115kHz-205kHz)				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<1%	Top	0	80	1.55
<1%	Left	0	56.5	0.37
<1%	Right	0	4.39	1.23
<1%	Front	0	19.1	1.28
<1%	Back	0	14.8	1.49
<1%	Bottom	0	28.2	0.88
Limit			614	1.63
Margin Limit (%)			13.03%	95.09%

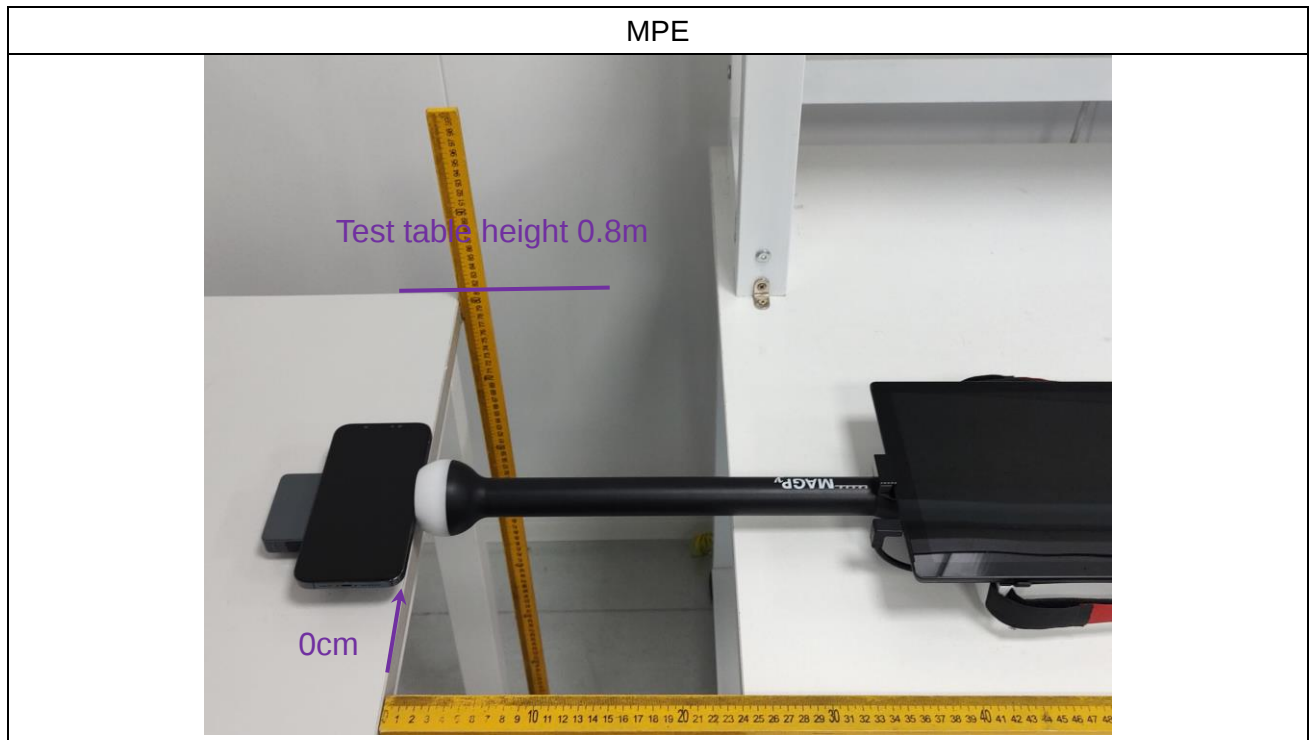
Test condition 1: Mode 4 operating mode with client device (1 % battery status of client device).
Measurement results directly tested using MAGPy.

Maximum permissible Exposure(360kHz)				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<1%	Top	0	40.8	0.11
<1%	Left	0	109	0.09
<1%	Right	0	10.8	0.15
<1%	Front	0	17.3	0.19
<1%	Back	0	25.9	0.37
<1%	Bottom	0	88.9	0.13
Limit			614	1.63
Margin Limit (%)			17.75%	22.7%

When setting MAGPy to select compliance location as probe tip, the measured value is extrapolated to 0mm as the result.

Maximum permissible Exposure(360kHz)				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<1%	Top	0	78	0.47
<1%	Left	0	190	0.19
<1%	Right	0	12.6	0.64
<1%	Front	0	13.4	0.67
<1%	Back	0	23.8	1.43
<1%	Bottom	0	92.9	0.42
Limit			614	1.63
Margin Limit (%)			30.94%	87.73%

5 Photographs of the Test Setup



***** END OF REPORT *****