

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : Rugged Android Tablet

Trademark : ARBOR

Model Name : GT78-VN

Family Model : GT78-VNAG, GT78V-VNB, GT78-VNC,
GT78V-VND, GT78V-VN*, P78P-E,
GT78-VNxxxxxxxxxx (x=0-9, a-z, A-Z and "-")

Report No. : S21091802205001

FCC ID : 2ACHW-GT78VN

Prepared for

ARBOR Technology Corp.

10F., No.700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name: ARBOR Technology Corp.
 Address.....: 10F., No.700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan

Manufacturer's Name.....: ARBOR Technology Corp.
 Address.....: 10F., No.700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan

Product description

Product name.....: Rugged Android Tablet
 Trademark: ARBOR
 Model Name: GT78-VN
 Family Model.....: GT78-VNAG, GT78V-VNB, GT78-VNC, GT78V-VND, GT78V-VN*, P78P-E, GT78-VNxxxxxxxx (x=0-9, a-z, A-Z and "-")
 FCC 47 CFR Part 2(2.1093)

Standards: ANSI/IEEE C95.1-1992
 IEEE Std 1528-2013
 Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests: Sep. 30, 2021 ~ Oct. 19, 2021
 Date of Issue: Dec. 30, 2021
 Test Result: **Pass**

Prepared By : Jacob Chen
 (Test Engineer) : (Jacob Chen)

Approved By : Alex
 (Lab Manager) : (Alex Li)

※ ※ **Revision History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Dec. 30, 2021	Jacob Chen

TABLE OF CONTENTS

1. General Information	1
1.1. RF exposure limits	1
1.2. Statement of Compliance.....	2
1.3. EUT Description	2
1.4. Test specification(s)	4
1.5. Ambient Condition	4
2. SAR Measurement System	5
2.1. SATIMO SAR Measurement Set-up Diagram	5
2.2. Robot	6
2.3. E-Field Probe	7
2.3.1. E-Field Probe Calibration.....	7
2.4. SAM phantoms	8
2.4.1. Technical Data	9
2.5. Device Holder	10
2.6. Test Equipment List	11
3. SAR Measurement Procedures	13
3.1. Power Reference.....	13
3.2. Area scan & Zoom scan	13
3.3. Description of interpolation/extrapolation scheme	15
3.4. Volumetric Scan	15
3.5. Power Drift	15
4. System Verification Procedure.....	16
4.1. Tissue Verification.....	16
4.1.1. Tissue Dielectric Parameter Check Results	17
4.2. System Verification Procedure	18
4.2.1. System Verification Results	19
5. SAR Measurement variability and uncertainty	20
5.1. SAR measurement variability	20
5.2. SAR measurement uncertainty.....	20
6. RF Exposure Positions	21
6.1. Rugged Android Tablet host platform exposure conditions	21
7. RF Output Power	22
7.1. GSM Conducted Power	22
7.2. WCDMA Conducted Power.....	23
7.3. LTE Conducted Power.....	23
7.4. WLAN & Bluetooth Output Power.....	37
7.4.1. Output Power Results Of WLAN	37
7.4.2. Output Power Results Of Bluetooth	39
8. Antenna Location.....	41

9. Antenna Location.....	42
10. Stand-alone SAR test exclusion	52
11. SAR Results	53
11.1. SAR measurement results	53
11.1.1. SAR measurement Result of GSM850.....	53
11.1.2. SAR measurement Result of GSM1900.....	53
11.1.3. SAR measurement Result of WCDMA Band 2.....	53
11.1.4. SAR measurement Result of WCDMA Band 5.....	54
11.1.5. SAR measurement Result of LTE Band 2	54
11.1.6. SAR measurement Result of LTE Band 4	55
11.1.7. SAR measurement Result of LTE Band 5	56
11.1.8. SAR measurement Result of LTE Band 7	56
11.1.9. SAR measurement Result of LTE Band 12	57
11.1.10. SAR measurement Result of LTE Band 17	57
11.1.11. SAR measurement Result of LTE Band 41	58
11.1.12. SAR measurement Result of WLAN 2.4G.....	59
11.1.13. SAR measurement Result of WLAN 5.2G.....	59
11.1.14. SAR measurement Result of WLAN 5.3G.....	59
11.1.15. SAR measurement Result of WLAN 5.6G.....	59
11.1.16. SAR measurement Result of WLAN 5.8G.....	60
11.2. SAR Summation Scenario	60
12. Appendix A. Photo documentation.....	61
13. Appendix B. System Check Plots	62
14. Appendix C. Plots of High SAR Measurement	81
15. Appendix D. Calibration Certificate.....	114

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
 TRUNK LIMIT
 1.6 W/kg
 APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for GT78-VN are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
1-g Body (Separation distance of 0mm)		1.202	0.147	0.361	N/A
Max Simultaneous Tx	Body	1.563	1.349	1.563	1.536

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information	
Product Name	Rugged Android Tablet
Trade Name	ARBOR
Model Name	GT78-VN
Family Model	GT78-VNAG, GT78V-VNB, GT78-VNC, GT78V-VND, GT78V-VN*, P78P-E, GT78-VNxxxxxxxxxx (x=0-9, a-z, A-Z and "-")
FCC ID	2ACHW-GT78VN
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna	FPC Antenna
Battery Information	DC 3.8V, 6200mAh, 23.56Wh
HW Version	GT78VN_MB_R0.2
SW Version	N/A
Device Operating Configurations	
Supporting Mode(s)	GSM 850/1900, WCDMA Band 2/5, LTE Band 2/4/5/7/12/17/41, WLAN 2.4G/5G, Bluetooth, NFC
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK) NFC(ASK)
Device Class	B

Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	LTE Band 41	2560-2660	
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.3G	5260-5320	
	WLAN 5.6G	5500-5700	
	WLAN 5.8G	5745-5825	
	Bluetooth	2402-2480	
	NFC	13.56	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		
	3, tested with power control all Max.(LTE Band 12)		
	3, tested with power control all Max.(LTE Band 17)		
3, tested with power control all Max.(LTE Band 41)			

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 616217 D04 SAR for laptop and tablets

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

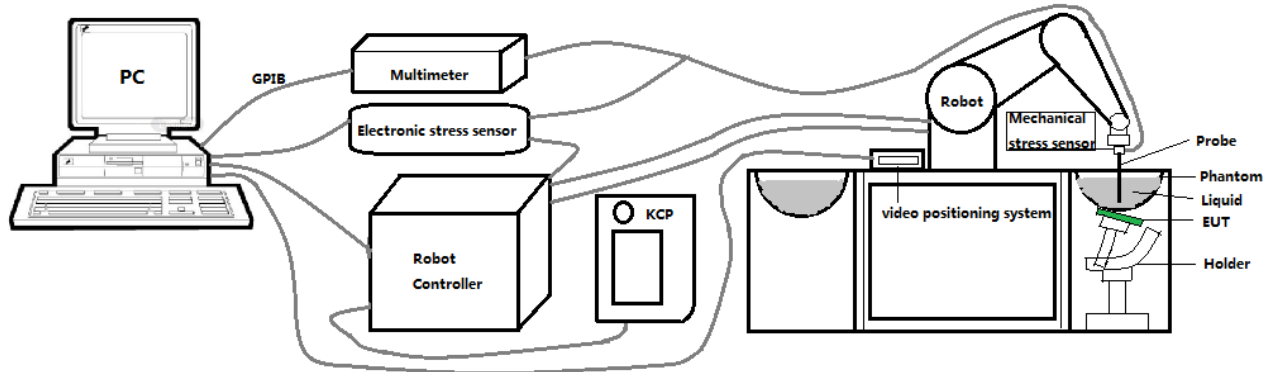

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter : 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.08 dB
 - Axial isotropy: ± 0.01 dB
 - Hemispherical Isotropy: ± 0.01 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 8mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm ±0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

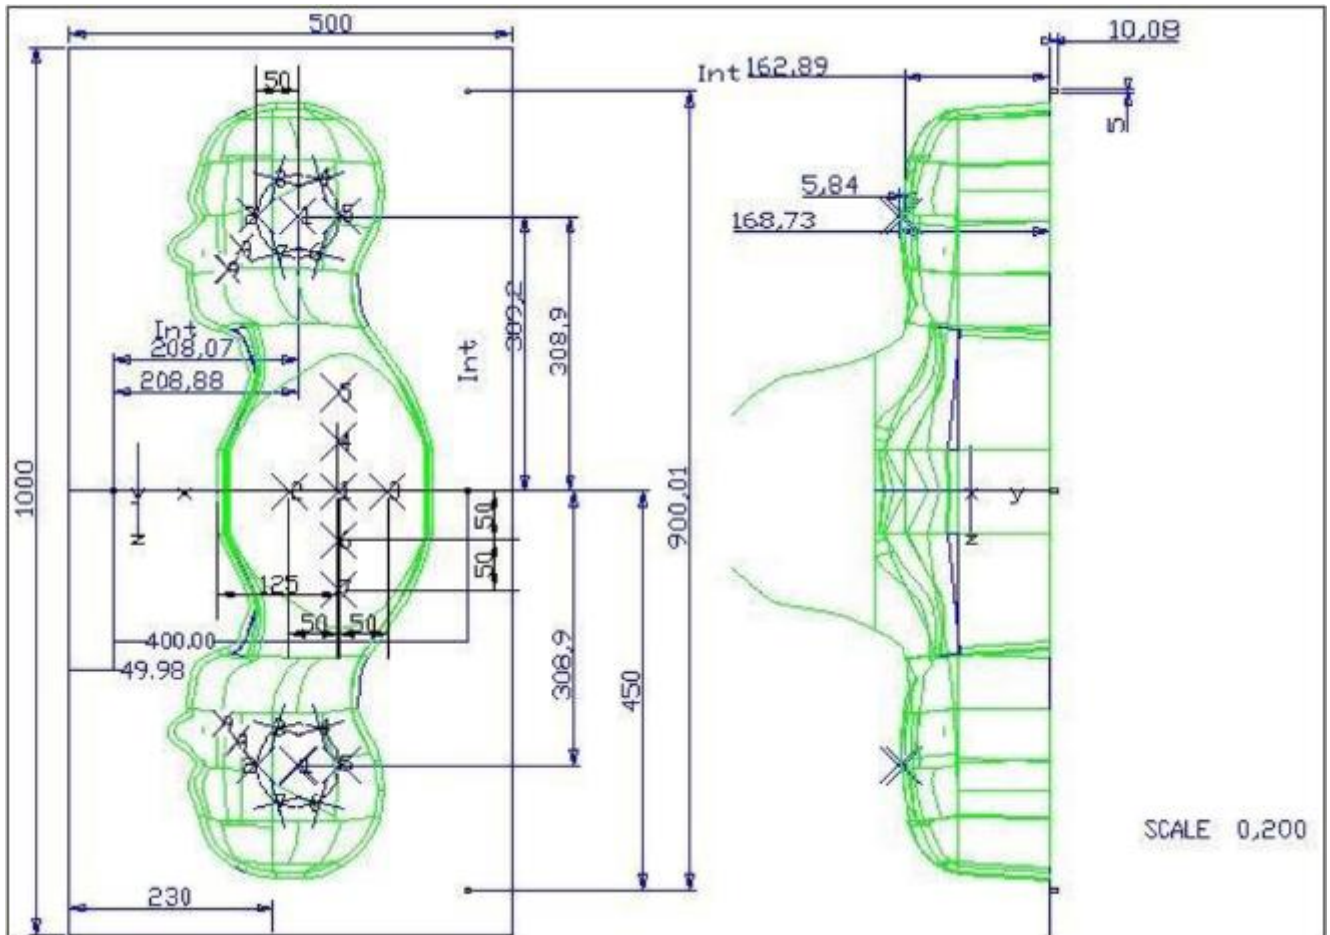


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
	1	2	1	2	1	2
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 µm.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

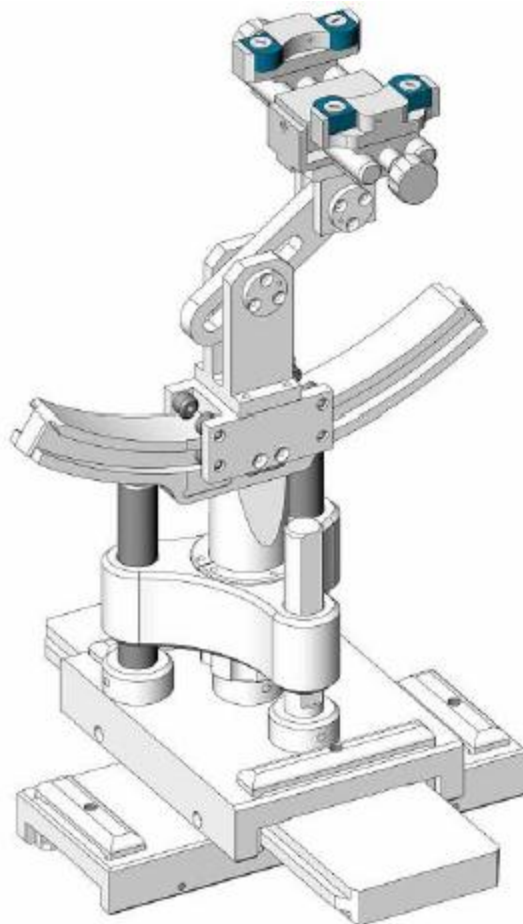

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
<input checked="" type="checkbox"/>	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Mar. 01, 2021	Feb. 28, 2022
<input checked="" type="checkbox"/>	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
<input checked="" type="checkbox"/>	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
<input checked="" type="checkbox"/>	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
<input checked="" type="checkbox"/>	R&S	Universal radio communication tester	CMU200	117858	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	R&S	Wideband radio communication tester	CMW500	103917	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	HP	Network Analyzer	8753D	3410J01136	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Jul. 01, 2021	Jun. 30, 2022

<input checked="" type="checkbox"/>	Agilent	Power meter	E4419B	MY45102538	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	MY41495644	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	US39212148	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2020	Jul. 16, 2023

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	½·δ·ln(2) ± 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°	
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δz _{Zoom} (n-1)	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful form multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is define in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.


4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
	750	835	900	1800	1900	2000	2450	2600	5200	5800
Frequency Band (MHz)										
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

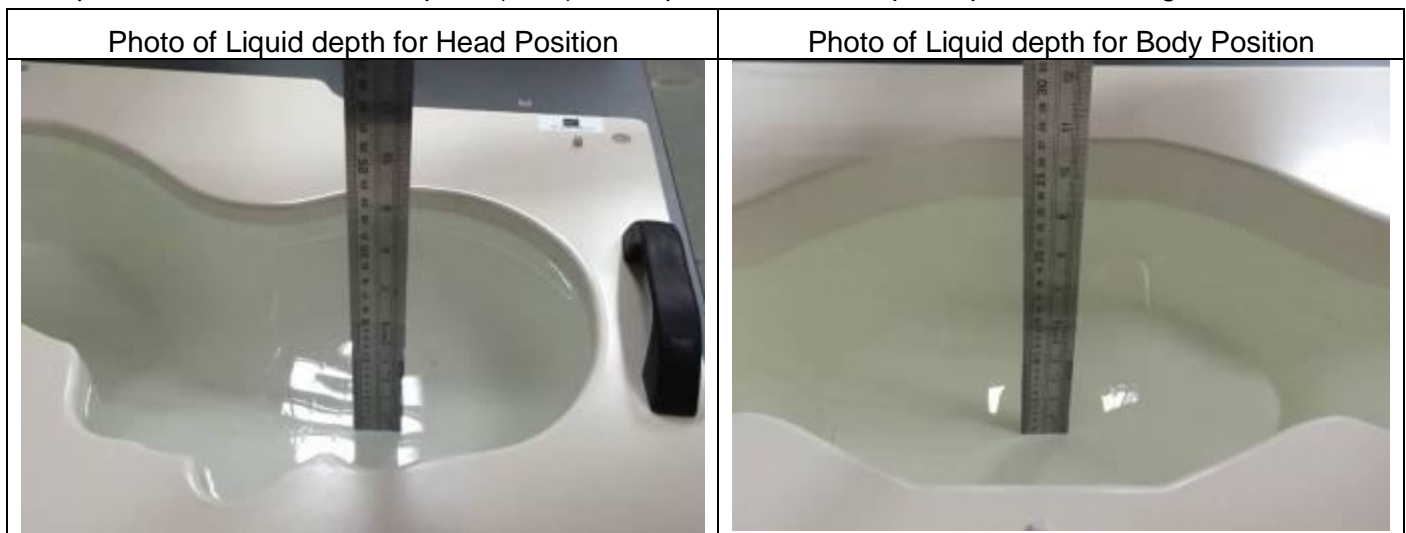

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	41.94	0.89	21.6 °C	Oct. 13, 2021
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	42.83	0.93	21.6 °C	Oct. 09, 2021
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.35	1.37	21.8 °C	Oct. 10, 2021
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.78	1.46	21.4 °C	Oct. 13, 2021
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.73	1.77	21.7 °C	Oct. 11, 2021
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	39.55	1.96	21.3 °C	Sep. 30, 2021
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	37.51	4.55	21.6 °C	Oct. 08, 2021
Head 5600	5600	35.50 (33.73~37.28)	5.07 (4.82~5.32)	36.64	4.99	21.7 °C	Oct. 19, 2021
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	36.35	5.17	21.9 °C	Oct. 09, 2021

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

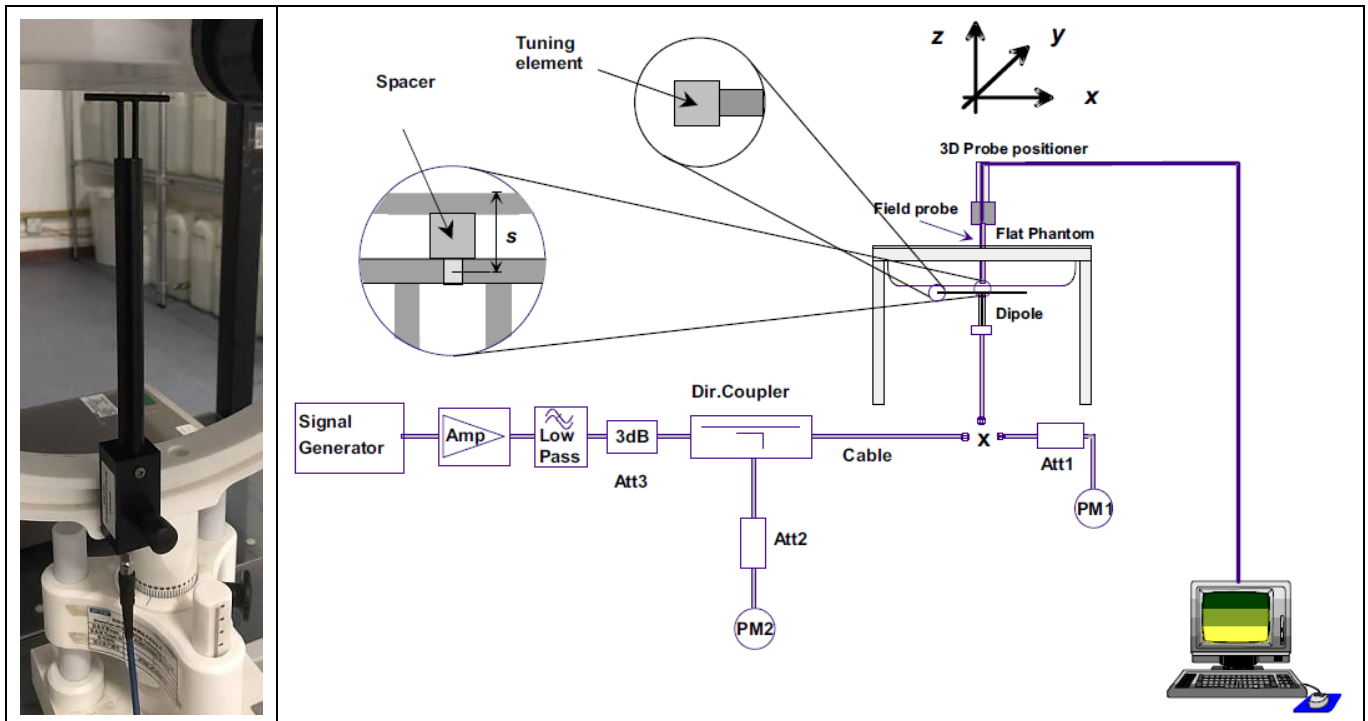

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
750MHz	8.53 (7.68~9.38)	5.56 (5.01~6.11)	8.91	5.39	21.6 °C	Oct. 13, 2021
835MHz	9.84 (8.86~10.82)	6.22 (5.60~6.84)	10.03	6.50	21.6 °C	Oct. 09, 2021
1800MHz	37.96 (34.17~41.75)	19.81 (17.83~21.79)	38.85	19.22	21.8 °C	Oct. 10, 2021
1900MHz	40.37 (36.34~44.40)	20.48 (18.44~22.52)	40.09	19.80	21.4 °C	Oct. 13, 2021
2450MHz	53.69 (48.33~59.05)	23.94 (21.55~26.33)	52.21	25.05	21.7 °C	Oct. 11, 2021
2600MHz	55.83 (50.25~61.41)	24.19 (21.78~26.60)	59.47	26.35	21.3 °C	Sep. 30, 2021
5200MHz	162.34 (146.11~178.57)	55.42 (49.88~60.96)	149.99	57.29	21.6 °C	Oct. 08, 2021
5600MHz	174.92 (157.43~192.41)	58.63 (52.77~64.49)	173.04	54.56	21.7 °C	Oct. 19, 2021
5800MHz	178.89 (161.01~196.77)	59.32 (53.39~65.25)	180.08	62.53	21.9 °C	Oct. 09, 2021

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Rugged Android Tablet host platform exposure conditions

Refer to KDB616217 D04, when the modular approach is used, transmitters and modules must be initially tested for standalone operations in generic host conditions according to the following minimum test separation distance and antenna installation requirements for incorporation in the tablet platform. The separation distance required for incorporation in qualified hosts is described in KDB 447498; item 5) of section 4.1 and item 1) of section 5.2.2 etc.

- ≤ 5 mm between the antenna and user for both back surface and edge exposure conditions
- the antennas used by the host must have been tested for equipment approval or qualify for SAR test exclusion
- the antenna polarization, physical orientation, rotation and installation configurations used by the host must have been tested for compliance or qualify for test exclusion
- when the *SAR Test Exclusion Threshold* in KDB 447498 applies, a *test separation distance* of 5 mm is required to determine test exclusion for the tablet platform

The antennas embedded in tablets are typically ≤ 5 mm from the outer housing. The required antenna to user test separation distance is a “not to exceed test” distance required to apply the modular approach. Instead of the typical zero gap tablet edge test requirement between the edge of a tablet and the user, when an antenna has been tested at ≤ 5 mm according to the modular approach it can be incorporated into tablets with at least twice the tested distance from the outer housing of the tablet edge; otherwise, the tablet edge zero gap test requirement applies. When the dedicated host approach is applied, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	32.50	32.11	32.16	32.19	23.47	23.08	23.13	23.16
GPRS(GMSK, 1 TS)	32.50	32.14	32.15	32.21	23.47	23.11	23.12	23.18
GPRS(GMSK, 2 TS)	31.50	31.44	31.45	31.44	25.48	25.42	25.43	25.42
GPRS(GMSK, 3 TS)	30.00	29.89	29.93	29.85	25.74	25.63	25.67	25.59
GPRS(GMSK, 4 TS)	29.00	28.90	28.94	28.81	25.99	25.89	25.93	25.80
EDGE(GMSK, 1 TS)	27.00	26.93	26.38	26.85	17.97	17.90	17.35	17.82
EDGE(GMSK, 2 TS)	26.00	25.90	25.55	25.29	19.98	19.88	19.53	19.27
EDGE(GMSK, 3 TS)	24.50	24.06	23.22	23.16	20.24	19.80	18.96	18.90
EDGE(GMSK, 4 TS)	22.50	22.36	21.92	21.89	19.49	19.35	18.91	18.88
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GSM (GMSK)	29.50	29.23	29.23	29.26	20.47	20.20	20.20	20.23
GPRS(GMSK, 1 TS)	29.50	29.24	29.23	29.28	20.47	20.21	20.20	20.25
GPRS(GMSK, 2 TS)	29.00	28.57	28.52	28.59	22.98	22.55	22.50	22.57
GPRS(GMSK, 3 TS)	27.00	26.81	26.77	26.81	22.74	22.55	22.51	22.55
GPRS(GMSK, 4 TS)	26.00	25.71	25.66	25.68	22.99	22.70	22.65	22.67
EDGE(GMSK, 1 TS)	26.00	25.68	25.96	25.60	16.97	16.65	16.93	16.57
EDGE(GMSK, 2 TS)	25.50	25.30	24.55	24.47	19.48	19.28	18.53	18.45
EDGE(GMSK, 3 TS)	23.50	23.02	22.89	22.48	19.24	18.76	18.63	18.22
EDGE(GMSK, 4 TS)	22.00	21.82	21.31	21.34	18.99	18.81	18.30	18.33

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 TS) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 TS) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 TS) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 TS) - 3.01 dB

7.2. WCDMA Conducted Power

WCDMA Band 2		Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up	9262	9400	9538	
Frequency (MHz)		1852.4	1880	1907.6	
RMC12.2K	23.00	22.81	22.72	22.66	
HSDPA Sub 1	22.00	21.81	21.76	21.69	
HSDPA Sub 2	22.00	21.55	21.44	21.20	
HSDPA Sub 3	20.50	20.45	20.14	20.34	
HSDPA Sub 4	20.50	20.35	19.94	20.03	
HSUPA Sub 1	22.00	20.76	21.54	21.56	
HSUPA Sub 2	22.00	21.73	21.65	21.51	
HSUPA Sub 3	20.50	19.96	20.38	20.33	
HSUPA Sub 4	22.00	21.83	21.76	21.69	
HSUPA Sub 5	21.00	20.45	20.96	20.94	
WCDMA Band 5		Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up	4132	4182	4233	
Frequency (MHz)		826.4	836.4	846.6	
RMC12.2K	22.50	22.32	22.20	22.23	
HSDPA Sub 1	21.50	21.36	21.22	21.27	
HSDPA Sub 2	21.00	21.00	20.82	20.82	
HSDPA Sub 3	20.00	19.51	19.91	19.47	
HSDPA Sub 4	20.00	19.92	19.79	19.70	
HSUPA Sub 1	21.50	21.08	21.04	21.10	
HSUPA Sub 2	21.50	19.94	21.09	21.19	
HSUPA Sub 3	20.50	19.81	19.97	20.06	
HSUPA Sub 4	21.50	21.39	21.21	21.24	
HSUPA Sub 5	20.50	20.15	20.48	20.49	

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band	1.4MHz	QPSK	1	0	23.00	21.65	22.48	22.45
			1	2	23.00	22.76	22.64	22.59

2			1	5	23.00	22.61	22.53	22.43
			3	0	23.00	22.59	22.59	22.58
			3	1	23.00	22.67	22.58	22.60
			3	2	23.00	22.63	22.59	22.60
			6	0	22.00	21.62	21.56	21.47
		16QAM	1	0	22.00	21.79	21.41	21.69
			1	2	22.00	21.92	21.58	21.78
			1	5	22.00	21.81	21.41	21.65
			3	0	22.00	21.90	21.73	21.75
			3	1	22.00	21.90	21.73	21.78
			3	2	22.00	21.94	21.71	21.78
			6	0	21.00	20.83	20.75	20.71
			Band	Band Width	Modulation	RB Configuration		Tune-up
RB Size	RB Offset	18615/1851.5				18900/1880	19185/1908.5	
LTE Band 2	3MHz	QPSK	1	0	23.00	22.60	22.52	22.41
			1	7	23.00	22.92	22.77	22.77
			1	14	23.00	22.70	22.46	22.37
			8	0	22.00	21.59	21.48	21.42
			8	4	22.00	21.64	21.52	21.47
			8	7	22.00	21.62	21.53	21.41
			15	0	22.00	21.58	21.50	21.45
		16QAM	1	0	22.50	21.55	21.92	21.73
			1	7	22.50	21.80	22.21	21.99
			1	14	22.50	21.45	21.92	21.67
			8	0	21.00	20.60	20.54	20.50
			8	4	21.00	20.62	20.57	20.52
			8	7	21.00	20.59	20.52	20.50
			15	0	21.00	20.64	20.52	20.47
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	23.00	22.53	22.39	22.39
			1	12	23.00	22.91	22.74	22.84
			1	24	23.00	22.51	22.40	22.34
			12	0	22.00	21.64	21.50	21.45
			12	6	22.00	21.68	21.59	21.53
			12	11	22.00	21.63	21.49	21.44

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
		16QAM	25	0	22.00	21.63	21.52	21.49
			1	0	22.50	21.87	21.73	21.94
			1	12	22.50	22.25	22.28	22.37
			1	24	22.50	21.85	21.77	21.94
			12	0	21.00	20.56	20.56	20.50
			12	6	21.00	20.62	20.60	20.58
			12	11	21.00	20.60	20.54	20.51
			25	0	21.00	20.65	20.48	20.50
LTE Band 2	10MHz	QPSK	1	0	23.00	22.62	22.51	22.47
			1	24	23.00	22.77	22.63	22.53
			1	49	23.00	22.60	22.48	22.38
			25	0	22.00	21.66	21.55	21.58
			25	12	22.00	21.59	21.57	21.53
			25	24	22.00	21.71	21.58	21.47
			50	0	22.00	21.68	21.56	21.58
		16QAM	1	0	22.50	21.47	21.95	21.77
			1	24	22.50	21.62	22.12	21.79
			1	49	22.50	21.51	21.92	21.67
			25	0	21.00	20.66	20.63	20.63
			25	12	21.00	20.64	20.54	20.60
			25	24	21.00	20.71	20.63	20.50
			50	0	21.00	20.65	20.58	20.61
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band 2	15MHz	QPSK	1	0	23.00	22.55	22.54	22.43
			1	37	23.00	22.80	22.74	22.78
			1	74	23.00	22.39	22.49	22.28
			36	0	22.00	21.69	21.61	21.59
			36	18	22.00	21.65	21.58	21.56
			36	37	22.00	21.62	21.56	21.45
			75	0	22.00	21.68	21.58	21.55
		16QAM	1	0	22.50	22.03	21.74	21.68
			1	37	22.50	22.27	22.03	21.98
			1	74	22.50	21.91	21.71	21.53

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
			36	0	21.00	20.70	20.67	20.50
			36	18	21.00	20.66	20.62	20.54
			36	37	21.00	20.64	20.62	20.42
			75	0	21.00	20.64	20.55	20.56
LTE Band 2	20MHz	QPSK	1	0	23.00	22.55	22.49	22.51
			1	49	23.00	22.67	22.65	22.65
			1	99	23.00	22.44	22.47	22.33
			50	0	22.00	21.59	21.58	21.63
			50	24	22.00	21.58	21.57	21.64
			50	49	22.00	21.57	21.54	21.41
			100	0	22.00	21.56	21.59	21.56
		16QAM	1	0	22.50	21.83	21.79	21.87
			1	49	22.50	21.97	21.93	22.06
			1	99	22.50	21.76	21.78	21.77
			50	0	21.00	20.58	20.64	20.73
			50	24	21.00	20.59	20.63	20.65
			50	49	21.00	20.54	20.62	20.51
			100	0	21.00	20.61	20.55	20.53

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	24.00	23.28	23.30	23.31
			1	2	24.00	23.43	23.45	23.46
			1	5	24.00	23.28	23.32	23.33
			3	0	23.50	23.34	23.41	23.41
			3	1	23.50	23.37	23.42	23.42
			3	2	23.50	23.36	23.43	23.39
			6	0	22.50	22.30	22.34	22.33
		16QAM	1	0	23.00	22.38	22.51	22.22
			1	2	23.00	22.52	22.61	22.37
			1	5	23.00	22.44	22.49	22.21
			3	0	23.00	22.51	22.56	22.58
			3	1	23.00	22.52	22.60	22.57
			3	2	23.00	22.51	22.63	22.61

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
			6	0	22.00	21.44	21.52	21.51
LTE Band 4	3MHz	QPSK	1	0	24.00	23.32	23.26	23.34
			1	7	24.00	23.64	23.61	23.71
			1	14	24.00	23.28	23.35	23.36
			8	0	22.50	22.30	22.34	22.34
			8	4	22.50	22.35	22.39	22.37
			8	7	22.50	22.30	22.34	22.33
			15	0	22.50	22.30	22.36	22.31
		16QAM	1	0	23.50	22.67	22.53	22.24
			1	7	23.50	23.04	23.02	22.29
			1	14	23.50	22.66	22.52	22.25
			8	0	21.50	21.35	21.35	21.35
			8	4	21.50	21.35	21.39	21.39
			8	7	21.50	21.32	21.33	21.33
			15	0	21.50	21.35	21.27	21.42
LTE Band 4	5MHz	QPSK	1	0	24.00	23.15	23.27	23.21
			1	12	24.00	23.58	23.73	23.64
			1	24	24.00	23.13	23.32	23.25
			12	0	22.50	22.27	22.32	22.35
			12	6	22.50	22.36	22.40	22.42
			12	11	22.50	22.29	22.39	22.34
			25	0	22.50	22.33	22.36	22.36
		16QAM	1	0	23.50	22.51	22.76	22.61
			1	12	23.50	22.90	23.16	23.02
			1	24	23.50	22.56	22.81	22.64
			12	0	21.50	21.32	21.36	21.34
			12	6	21.50	21.39	21.43	21.39
			12	11	21.50	21.37	21.37	21.36
			25	0	21.50	21.30	21.33	21.43
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	10MHz	QPSK	1	0	24.00	23.33	23.37	23.29
			1	24	24.00	23.45	23.55	23.44
			1	49	24.00	23.29	23.43	23.31
			25	0	22.50	22.33	22.35	22.40
			25	12	22.50	22.35	22.36	22.35
			25	24	22.50	22.31	22.40	22.40
			50	0	22.50	22.38	22.35	22.40
		16QAM	1	0	23.00	22.48	22.22	22.69
			1	24	23.00	22.61	22.35	22.87
			1	49	23.00	22.50	22.24	22.77
			25	0	21.50	21.32	21.35	21.46
			25	12	21.50	21.35	21.39	21.39
			25	24	21.50	21.41	21.45	21.45
			50	0	21.50	21.40	21.36	21.42
LTE Band 4	15MHz	QPSK	1	0	24.00	23.23	23.32	23.34
			1	37	24.00	23.62	23.58	23.62
			1	74	24.00	23.26	23.30	23.28
			36	0	23.00	22.35	22.40	22.42
			36	18	23.00	22.37	22.49	22.47
			36	37	23.00	22.36	22.50	22.38
			75	0	22.50	22.38	22.43	22.45
		16QAM	1	0	23.50	22.37	22.73	22.50
			1	37	23.50	22.75	23.02	22.79
			1	74	23.50	22.39	22.69	22.49
			36	0	21.50	21.30	21.42	21.49
			36	18	21.50	21.33	21.47	21.45
			36	37	21.50	21.33	21.48	21.46
			75	0	21.50	21.42	21.42	21.44
LTE Band	20MHz	QPSK	1	0	24.00	23.21	23.23	23.32
			1	49	24.00	23.37	23.56	23.51

4			1	99	24.00	23.25	23.33	23.25	
			50	0	22.50	22.28	22.33	22.42	
			50	24	22.50	22.34	22.39	22.45	
			50	49	22.50	22.37	22.39	22.33	
			100	0	22.50	22.34	22.36	22.38	
	16QAM			1	0	23.00	22.47	22.52	22.59
				1	49	23.00	22.70	22.73	22.84
				1	99	23.00	22.51	22.58	22.67
				50	0	22.00	21.27	21.41	21.49
				50	24	22.00	21.36	21.45	21.53
				50	49	22.00	21.39	21.43	21.42
				100	0	21.50	21.39	21.37	21.43

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	22.50	21.93	21.79	21.74
			1	2	22.50	22.07	21.90	21.79
			1	5	22.50	22.18	21.76	21.74
			3	0	22.00	21.98	21.88	21.84
			3	1	22.00	21.98	21.90	21.84
			3	2	22.00	21.95	21.86	21.82
			6	0	21.00	20.89	20.80	20.77
		16QAM	1	0	21.50	21.09	21.03	20.67
			1	2	21.50	21.18	21.15	20.80
			1	5	21.50	21.05	21.02	20.66
			3	0	21.50	21.12	21.11	21.00
			3	1	21.50	21.09	21.13	21.04
			3	2	21.50	21.07	21.12	21.03
6	0	20.50	20.12	20.02	20.00			
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	22.50	21.97	21.90	21.91
			1	7	22.50	22.26	22.17	22.22
			1	14	22.50	21.66	21.82	21.81
			8	0	21.00	20.94	20.86	20.80
			8	4	21.00	20.95	20.88	20.82

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
		16QAM	8	7	21.00	20.92	20.85	20.78
			15	0	21.00	20.89	20.83	20.79
			1	0	22.00	21.16	20.85	21.32
			1	7	22.00	21.38	21.10	21.65
			1	14	22.00	21.15	20.78	21.28
			8	0	20.00	19.99	19.88	19.90
			8	4	20.00	20.00	19.90	19.92
			8	7	20.00	19.92	19.84	19.86
			15	0	20.00	19.87	19.96	19.87
LTE Band 5	5MHz	QPSK	1	0	22.50	21.86	21.80	21.73
			1	12	22.50	22.25	22.19	22.24
			1	24	22.50	21.83	21.77	21.69
			12	0	21.00	20.99	20.80	20.93
			12	6	21.00	20.99	20.95	20.95
			12	11	21.00	20.93	20.86	20.80
			25	0	21.00	20.96	20.86	20.88
		16QAM	1	0	22.00	21.36	21.20	21.15
			1	12	22.00	21.77	21.58	21.63
			1	24	22.00	21.41	21.11	21.14
			12	0	20.50	19.99	19.84	19.94
			12	6	20.50	20.01	19.89	20.01
			12	11	20.50	19.97	19.79	19.91
			25	0	20.00	19.95	19.91	19.92
					QPSK	1	0	22.50
1	24	22.50				22.08	22.01	21.96
16QAM	1	49			22.50	22.02	21.85	21.79
	25	0			21.50	21.04	20.90	21.00
	25	12			21.50	21.00	20.92	20.94
	25	24			21.50	21.01	20.87	20.90
	50	0			21.50	21.03	20.87	20.96
	1	0			21.50	21.10	20.90	21.24
1	24	21.50			21.31	20.91	21.40	

			1	49	21.50	21.12	20.77	21.26
			25	0	20.50	20.06	19.92	20.02
			25	12	20.50	20.04	19.90	19.99
			25	24	20.50	20.05	19.89	19.96
			50	0	20.50	20.15	19.91	19.99

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	21.50	21.35	20.86	21.11
			1	12	21.50	21.36	20.93	20.96
			1	24	21.50	21.24	20.96	21.02
			12	0	20.50	20.28	20.00	20.07
			12	6	20.50	20.28	19.93	20.02
			12	11	20.50	20.22	20.04	20.09
			25	0	20.50	20.17	19.98	20.00
		16QAM	1	0	21.00	20.50	20.07	20.25
			1	12	21.00	20.43	20.15	20.22
			1	24	21.00	20.41	20.19	20.21
			12	0	19.50	19.29	19.15	18.97
			12	6	19.50	19.20	19.13	19.00
			12	11	19.50	19.17	19.16	19.03
			25	0	19.50	19.40	19.07	19.11

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	21.50	21.10	21.28	21.27
			1	24	21.50	21.02	21.23	21.23
			1	49	21.50	20.80	21.21	21.19
			25	0	20.50	20.19	20.03	20.04
			25	12	20.50	20.15	19.98	19.90
			25	24	20.50	19.99	20.03	19.92
			50	0	20.50	20.19	20.01	19.92
		16QAM	1	0	21.50	21.26	20.62	21.04
			1	24	21.50	21.25	20.72	21.03
			1	49	21.50	21.17	20.75	20.98
			25	0	19.50	19.29	19.21	19.13
			25	12	19.50	19.24	19.18	19.09

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
			25	24	19.50	19.20	19.29	19.12
			50	0	19.50	19.30	19.04	19.10
LTE Band 7	15MHz	QPSK	1	0	21.50	21.21	21.03	21.32
			1	37	21.50	20.91	21.06	21.25
			1	74	21.50	20.86	21.05	21.22
			36	0	20.50	20.15	19.99	20.02
			36	18	20.50	20.06	20.03	19.99
			36	37	20.50	20.02	20.01	19.87
			75	0	20.50	20.06	20.03	20.02
		16QAM	1	0	21.50	20.81	20.89	21.10
			1	37	21.50	20.61	20.91	21.09
			1	74	21.50	20.50	20.99	21.03
			36	0	19.50	19.40	19.09	19.21
			36	18	19.50	19.27	19.12	19.26
			36	37	19.50	19.13	19.20	19.15
			75	0	19.50	19.17	19.24	19.00
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK	1	0	21.50	21.19	20.93	21.24
			1	49	21.50	20.94	21.04	21.17
			1	99	21.50	20.87	21.06	21.23
			50	0	20.50	20.15	20.03	20.09
			50	24	20.50	19.99	20.04	20.04
			50	49	20.50	19.91	20.03	20.05
			100	0	20.50	19.97	19.90	20.12
		16QAM	1	0	20.50	20.48	19.81	19.92
			1	49	20.50	20.18	20.04	19.90
			1	99	20.50	20.06	20.11	19.85
			50	0	19.50	19.28	19.11	19.29
			50	24	19.50	19.23	19.21	19.27
			50	49	19.50	19.07	19.19	19.22
			100	0	19.50	19.20	19.17	19.18

Band	Band	Modulation	RB	Tune-up	Channel/Frequency(MHz)
------	------	------------	----	---------	------------------------

	Width		Configuration					
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	24.00	23.32	23.16	23.08
			1	2	24.00	23.45	23.32	23.18
			1	5	24.00	23.33	23.17	23.05
			3	0	23.50	23.32	23.30	23.17
			3	1	23.50	23.37	23.28	23.17
			3	2	23.50	23.32	23.25	23.14
		16QAM	6	0	22.50	22.36	22.24	22.09
			1	0	22.50	22.37	22.36	21.95
			1	2	22.50	22.48	22.44	22.04
			1	5	22.50	22.39	22.34	21.92
			3	0	22.50	22.40	22.44	22.26
			3	1	22.50	22.48	22.43	22.26
			3	2	22.50	22.48	22.41	22.28
6	0	21.50	21.49	21.38	21.27			
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	24.00	23.40	23.28	23.16
			1	7	24.00	23.71	23.79	23.29
			1	14	24.00	23.35	23.27	23.08
			8	0	22.50	22.35	22.25	22.13
			8	4	22.50	22.37	22.30	22.15
			8	7	22.50	22.37	22.22	22.11
			15	0	22.50	22.35	22.20	22.13
		16QAM	1	0	23.00	22.43	22.17	22.51
			1	7	23.00	22.80	22.38	22.89
			1	14	23.00	22.48	21.98	22.44
			8	0	21.50	21.36	21.23	21.20
			8	4	21.50	21.38	21.28	21.21
			8	7	21.50	21.35	21.18	21.19
15	0	21.50	21.30	21.28	21.24			
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE	5MHz	QPSK	1	0	24.00	23.24	23.17	23.13

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
Band 12			1	12	24.00	23.68	23.38	23.53
			1	24	24.00	23.19	23.12	23.01
			12	0	22.50	22.37	22.21	22.19
			12	6	22.50	22.38	22.34	22.19
			12	11	22.50	22.38	22.09	22.18
			25	0	22.50	22.37	22.20	22.22
		16QAM	1	0	23.00	22.47	22.54	22.54
			1	12	23.00	22.93	22.80	22.92
			1	24	23.00	22.62	22.29	22.52
			12	0	21.50	21.34	21.24	21.20
			12	6	21.50	21.36	21.31	21.21
			12	11	21.50	21.38	21.11	21.20
			25	0	21.50	21.44	21.14	21.21
LTE Band 12	10MHz	QPSK	1	0	24.00	23.37	23.30	23.23
			1	24	24.00	23.44	23.43	23.36
			1	49	24.00	23.35	23.21	23.12
			25	0	22.50	22.36	22.16	22.35
			25	12	22.50	22.38	22.24	22.21
			25	24	22.50	22.48	22.10	22.16
			50	0	22.50	22.43	22.11	22.28
		16QAM	1	0	23.00	22.40	22.26	22.59
			1	24	23.00	22.67	22.22	22.61
			1	49	23.00	22.32	21.99	22.50
			25	0	22.00	21.40	21.19	21.32
			25	12	22.00	21.43	21.24	21.22
			25	24	22.00	21.52	21.08	21.16
50	0	22.00	21.50	21.11	21.28			

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	23.50	22.98	22.95	22.88
			1	12	23.50	23.35	23.33	23.29
			1	24	23.50	22.96	22.93	22.77
			12	0	22.50	21.96	22.05	21.99

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23780/709	23790/710	23800/711
			12	6	22.50	22.12	22.03	21.98
			12	11	22.50	21.98	21.84	21.96
			25	0	22.00	21.98	21.96	21.96
		16QAM	1	0	23.00	22.57	22.20	22.08
			1	12	23.00	22.86	22.46	22.50
			1	24	23.00	22.37	22.13	22.13
			12	0	21.50	20.98	20.95	21.02
			12	6	21.50	21.09	20.91	21.00
			12	11	21.50	21.02	20.81	20.97
			25	0	21.00	20.97	20.97	20.94
LTE Band 17	10MHz	QPSK	1	0	23.50	23.08	23.03	23.00
			1	24	23.50	23.23	23.16	23.06
			1	49	23.50	22.96	22.96	22.88
			25	0	22.50	21.93	22.07	22.11
			25	12	22.50	21.97	21.97	21.96
			25	24	22.50	21.87	21.88	21.94
		16QAM	50	0	22.50	21.93	21.99	22.08
			1	0	22.50	22.27	21.96	22.38
			1	24	22.50	22.12	21.89	22.36
			1	49	22.50	22.07	21.82	22.29
			25	0	21.50	20.94	21.06	21.13
			25	12	21.50	20.98	20.98	20.97
			25	24	21.50	20.80	20.85	20.95
			50	0	21.50	20.94	20.95	21.07

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40315/2562.5	40790/2610	41265/2657.5
LTE Band 41	5MHz	QPSK	1	0	24.50	23.81	23.68	23.80
			1	12	24.50	24.10	23.96	24.18
			1	24	24.50	23.82	23.66	23.82
			12	0	23.00	22.83	22.84	22.85
			12	6	23.00	22.90	22.93	22.89
			12	11	23.00	22.89	22.83	22.78
			25	0	23.00	22.86	22.86	22.85

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40340/2565	40790/2610	41240/2655
		16QAM	1	0	24.00	23.02	23.11	23.28
			1	12	24.00	23.29	23.34	23.54
			1	24	24.00	23.08	23.07	23.24
			12	0	22.50	21.73	21.91	21.96
			12	6	22.50	21.84	21.99	22.03
			12	11	22.50	21.80	21.90	21.89
			25	0	22.00	21.82	21.88	21.97
LTE Band 41	10MHz	QPSK	1	0	24.50	23.84	23.78	23.72
			1	24	24.50	24.07	23.96	23.96
			1	49	24.50	23.92	23.77	23.80
			25	0	23.00	22.88	22.91	22.96
			25	12	23.00	22.93	22.91	22.88
			25	24	23.00	22.96	22.93	22.84
		16QAM	50	0	23.00	22.91	22.91	22.93
			1	0	23.50	23.26	23.03	22.79
			1	24	23.50	23.46	23.22	22.95
			1	49	23.50	23.34	23.06	22.78
			25	0	22.50	21.89	22.00	22.08
			25	12	22.50	21.93	22.00	22.03
			25	24	22.50	21.95	22.01	21.95
			50	0	22.50	21.85	21.97	22.05
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40365/2567.5	40790/2610	41215/2652.5
LTE Band 41	15MHz	QPSK	1	0	24.50	23.81	23.69	23.70
			1	37	24.50	24.12	23.97	24.11
			1	74	24.50	23.81	23.65	23.82
			36	0	23.00	22.88	22.83	22.88
			36	18	23.00	22.93	22.88	22.87
			36	37	23.00	22.90	22.84	22.85
			75	0	23.00	22.91	22.84	22.88
		16QAM	1	0	23.50	22.96	23.07	23.23
			1	37	23.50	23.28	23.35	23.48
			1	74	23.50	23.02	23.05	23.19
			36	0	22.00	21.87	21.81	21.92

			36	18	22.00	21.96	21.84	21.96
			36	37	22.00	21.92	21.82	21.86
			75	0	22.00	21.88	21.89	21.92
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40390/2570	40790/2610	41190/2650
LTE Band 41	20MHz	QPSK	1	0	24.50	23.74	23.68	23.64
			1	49	24.50	24.02	24.00	23.96
			1	99	24.50	23.79	23.66	23.74
			50	0	23.00	22.83	22.91	22.97
			50	24	23.00	22.88	22.90	22.90
			50	49	23.00	22.77	22.90	22.80
			100	0	23.00	22.80	22.89	22.90
		16QAM	1	0	23.50	22.97	22.98	22.95
			1	49	23.50	23.26	23.25	23.21
			1	99	23.50	23.05	23.00	22.89
			50	0	22.50	21.77	22.00	22.13
			50	24	22.50	21.81	21.97	22.09
			50	49	22.50	21.69	21.97	21.96
			100	0	22.50	21.77	21.94	22.01

7.4. WLAN & Bluetooth Output Power

7.4.1. Output Power Results Of WLAN

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	15.00	13.95
	6	2437	15.00	14.70
	11	2462	15.00	13.83
802.11g	1	2412	12.50	12.40
	6	2437	12.50	12.18
	11	2462	12.50	12.30
802.11n HT20	1	2412	13.00	12.65
	6	2437	13.00	12.53
	11	2462	13.00	12.58
802.11n HT40	3	2422	13.00	11.73
	6	2437	13.00	12.51
	9	2452	13.00	11.77

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	36	5180	10.00	8.31
	40	5200	10.00	8.25
	48	5240	10.00	9.62
802.11n HT20	36	5180	8.00	7.37
	40	5200	8.00	7.86
	48	5240	8.00	7.61
802.11n HT40	38	5190	7.00	6.44
	46	5230	7.00	6.72
802.11ac VHT20	36	5180	8.00	7.38
	40	5200	8.00	7.84
	48	5240	8.00	7.20
802.11ac VHT40	38	5190	7.00	6.50
	46	5230	7.00	6.09
802.11ac VHT80	42	5210	6.50	6.17

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	52	5260	10.00	9.80
	56	5280	10.00	9.46
	64	5320	10.00	9.21
802.11n HT20	52	5260	9.50	9.12
	56	5280	9.50	8.42
	64	5320	9.50	8.78
802.11n HT40	54	5270	8.00	7.83
	62	5310	8.00	6.14
802.11ac VHT20	52	5260	9.00	8.98
	56	5280	9.00	8.39
	64	5320	9.00	8.80
802.11ac VHT40	54	5270	8.00	7.85
	62	5310	8.00	6.22
802.11ac VHT80	58	5290	6.50	6.34

NOTE: Power measurement results of WLAN 5.3G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
------	---------	-----------------	---------	--------------------

802.11a	100	5500	10.00	9.27
	120	5600	10.00	9.26
	140	5700	10.00	9.63
802.11n	100	5500	9.00	7.92
	120	5600	9.00	8.83
	140	5700	9.00	8.70
802.11n	102	5510	8.00	6.83
	118	5590	8.00	7.72
	134	5670	8.00	6.49
802.11ac (VHT20)	100	5500	9.00	8.60
	120	5600	9.00	8.95
	140	5700	9.00	8.62
802.11ac (VHT40)	102	5510	7.50	7.24
	118	5590	7.50	7.17
	134	5670	7.50	6.65
802.11ac (VHT80)	106	5530	7.00	6.96
	122	5610	7.00	6.45

NOTE: Power measurement results of WLAN 5.6G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	149	5745	10.00	9.49
	157	5785	10.00	9.87
	165	5825	10.00	9.81
802.11n HT20	149	5745	9.00	8.83
	157	5785	9.00	7.98
	165	5825	9.00	8.02
802.11n HT40	151	5755	8.00	7.55
	159	5795	8.00	7.56
802.11ac VHT20	149	5745	9.00	8.84
	157	5785	9.00	8.40
	165	5825	9.00	8.51
802.11ac VHT40	151	5755	8.00	7.04
	159	5795	8.00	7.76
802.11ac VHT80	155	5775	7.50	7.18


NOTE: Power measurement results of WLAN 5.8G.

7.4.2. Output Power Results Of Bluetooth

BR+EDR	Output Power (dBm)				
	Channel	Tune-up	Data Rates		
			1M	2M	3M
0CH	7.000	6.994	6.669	6.842	
39CH	9.000	8.856	8.578	8.755	
78CH	9.000	8.255	7.918	8.615	

BLE	Channel	Tune-up	Output Power (dBm)
	0CH	2.000	1.526
	19CH	3.000	2.766
	39CH	3.000	2.297

8. Antenna Location

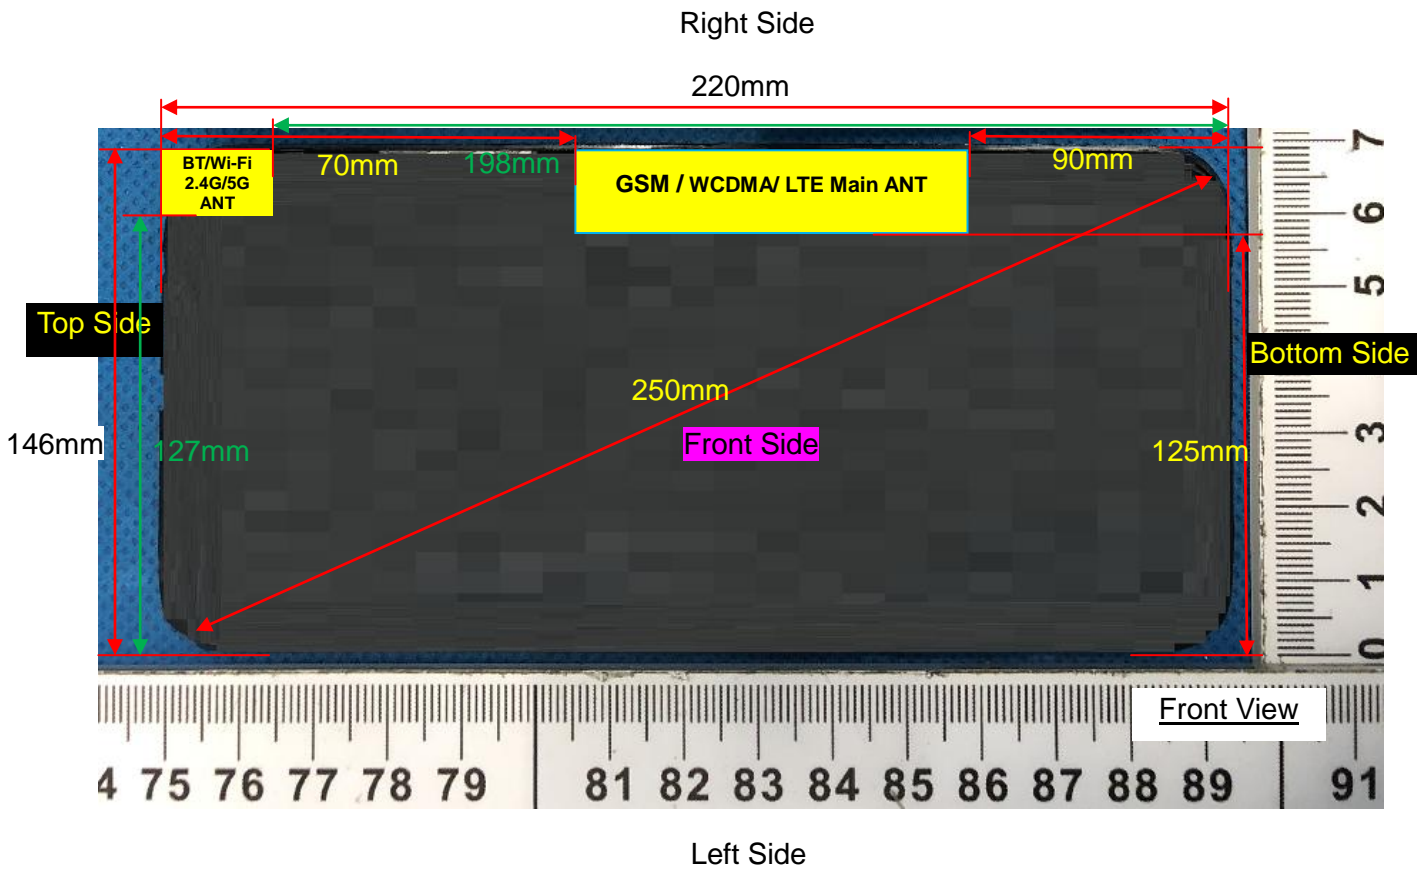


Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	5	5	125	5	70	90
WLAN & Bluetooth	5	5	127	5	5	198

Note: When the minimum separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

9. Antenna Location

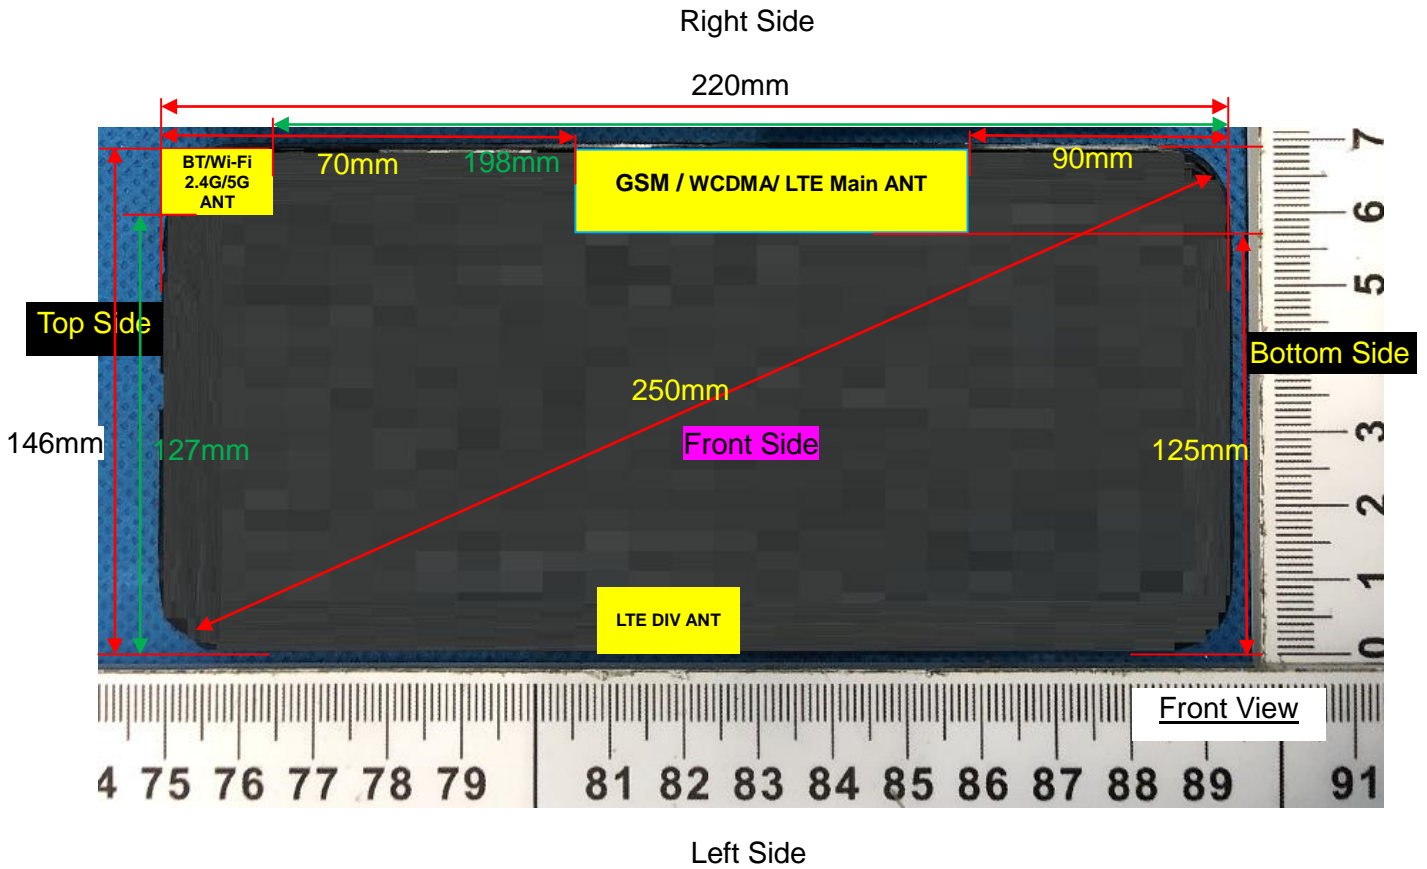

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	5	5	125	5	70	90
WLAN & Bluetooth	5	5	127	5	5	198

Note: When the minimum separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Positions for SAR tests		
Test separation distances ≤ 50 mm		
Exposure Positions	Tune-up Maximum power of WLAN 2.4G	
	15.00dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	9.9
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	9.9
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5

	SAR exclusion threshold	9.9
	SAR testing required?	YES
	Antenna to user(mm)	5
Top Side	SAR exclusion threshold	9.9
	SAR testing required?	YES
	Tune-up Maximum power of WLAN 5.2G	
Exposure Positions	10.00dBm	
	Antenna to user(mm)	5
Front Side	SAR exclusion threshold	4.6
	SAR testing required?	YES
	Antenna to user(mm)	5
Back Side	SAR exclusion threshold	4.6
	SAR testing required?	YES
	Antenna to user(mm)	5
Right Side	SAR exclusion threshold	4.6
	SAR testing required?	YES
	Antenna to user(mm)	5
Top Side	SAR exclusion threshold	4.6
	SAR testing required?	YES
	Tune-up Maximum power of WLAN 5.3G	
Exposure Positions	10.00dBm	
	Antenna to user(mm)	5
Front Side	SAR exclusion threshold	4.6
	SAR testing required?	YES
	Antenna to user(mm)	5
Back Side	SAR exclusion threshold	4.6
	SAR testing required?	YES
	Antenna to user(mm)	5
Right Side	SAR exclusion threshold	4.6
	SAR testing required?	YES
	Antenna to user(mm)	5
Top Side	SAR exclusion threshold	4.6
	SAR testing required?	YES
	Tune-up Maximum power of WLAN 5.6G	
Exposure Positions	10.00dBm	
	Antenna to user(mm)	5
Front Side	SAR exclusion threshold	4.8
	SAR testing required?	YES
	Antenna to user(mm)	5
Back Side	SAR exclusion threshold	4.8

	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	4.8
	SAR testing required?	YES
Top Side	Antenna to user(mm)	5
	SAR exclusion threshold	4.8
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of WLAN 5.8G	
	10.00dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	4.8
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	4.8
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	4.8
	SAR testing required?	YES
Top Side	Antenna to user(mm)	5
	SAR exclusion threshold	4.8
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of GSM850	
	32.50dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	327.9
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	327.9
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	327.9
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of GSM1900	
	29.50dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	246.3
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	246.3
	SAR testing required?	YES

Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	246.3
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of WCDMA Band2	
	23.00dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	55.2
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	55.2
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	55.2
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of WCDMA Band5	
	22.50dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	32.8
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	32.8
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	32.8
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of LTE Band2	
	23.00dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	55.2
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	55.2
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	55.2
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of LTE Band4	
	24.00dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	52.9

	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	52.9
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	52.9
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of LTE Band5	
	22.50dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	32.8
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	32.8
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	32.8
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of LTE Band7	
	21.50dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	45.3
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	45.3
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	45.3
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of LTE Band12	
	24.00dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	42.6
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	42.6
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	42.6
	SAR testing required?	YES

Exposure Positions	Tune-up Maximum power of LTE Band17	
	23.50dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	38.0
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	38.0
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	38.0
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of LTE Band41	
	24.50dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	91.9
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	91.9
	SAR testing required?	YES
Right Side	Antenna to user(mm)	5
	SAR exclusion threshold	91.9
	SAR testing required?	YES

NOTE: Refer to section 4.3.1 of KDB 447498 D01.

Positions for SAR tests		
Test separation distances > 50 mm		
Exposure Positions	Tune-up Maximum power of WLAN 2.4G	
	15.00dBm	31.62mW
Left Side	Antenna to user(mm)	127
	SAR exclusion threshold(mW)	886
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	198
	SAR exclusion threshold(mW)	1576
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of WLAN 5.2G	
	10.00dBm	10.00mW
Left Side	Antenna to user(mm)	127
	SAR exclusion threshold(mW)	836
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	198

	SAR exclusion threshold(mW)	1546
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of WLAN 5.3G	
	10dBm	10.00mW
Left Side	Antenna to user(mm)	127
	SAR exclusion threshold(mW)	835
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	198
	SAR exclusion threshold(mW)	1545
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of WLAN 5.6G	
	10.00dBm	10.00mW
Left Side	Antenna to user(mm)	127
	SAR exclusion threshold(mW)	833
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	198
	SAR exclusion threshold(mW)	1543
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of WLAN 5.8G	
	10.00dBm	10.00mW
Left Side	Antenna to user(mm)	127
	SAR exclusion threshold(mW)	832
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	198
	SAR exclusion threshold(mW)	1542
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of GSM850	
	32.50dBm	1778.28mW
Left Side	Antenna to user(mm)	125
	SAR exclusion threshold(mW)	582
	SAR testing required?	YES
Top Side	Antenna to user(mm)	70
	SAR exclusion threshold(mW)	275
	SAR testing required?	YES
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	387
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of GSM1900	
	29.50dBm	891.25mW
Left Side	Antenna to user(mm)	125

	SAR exclusion threshold(mW)	859
	SAR testing required?	YES
Top Side	Antenna to user(mm)	70
	SAR exclusion threshold(mW)	309
	SAR testing required?	YES
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	509
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of WCDMA Band2	
	23.00dBm	199.53mW
Left Side	Antenna to user(mm)	125
	SAR exclusion threshold(mW)	859
	SAR testing required?	NO
Top Side	Antenna to user(mm)	70
	SAR exclusion threshold(mW)	309
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	509
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of WCDMA Band5	
	22.50dBm	177.83mW
Left Side	Antenna to user(mm)	125
	SAR exclusion threshold(mW)	582
	SAR testing required?	NO
Top Side	Antenna to user(mm)	70
	SAR exclusion threshold(mW)	275
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	387
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of LTE Band2	
	23.00dBm	199.53mW
Left Side	Antenna to user(mm)	125
	SAR exclusion threshold(mW)	859
	SAR testing required?	NO
Top Side	Antenna to user(mm)	70
	SAR exclusion threshold(mW)	309
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	509

	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of LTE Band4	
	24.00dBm	251.19mW
Left Side	Antenna to user(mm)	125
	SAR exclusion threshold(mW)	859
	SAR testing required?	NO
Top Side	Antenna to user(mm)	70
	SAR exclusion threshold(mW)	309
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	509
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of LTE Band5	
	22.50dBm	177.83mW
Left Side	Antenna to user(mm)	125
	SAR exclusion threshold(mW)	582
	SAR testing required?	NO
Top Side	Antenna to user(mm)	70
	SAR exclusion threshold(mW)	275
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	387
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of LTE Band7	
	21.50dBm	141.25mW
Left Side	Antenna to user(mm)	125
	SAR exclusion threshold(mW)	829
	SAR testing required?	NO
Top Side	Antenna to user(mm)	70
	SAR exclusion threshold(mW)	279
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	479
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of LTE Band12	
	24.00dBm	251.19mW
Left Side	Antenna to user(mm)	125
	SAR exclusion threshold(mW)	582
	SAR testing required?	NO
Top Side	Antenna to user(mm)	70

	SAR exclusion threshold(mW)	275
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	387
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of LTE Band17	
	23.50dBm	223.87mW
Left Side	Antenna to user(mm)	125
	SAR exclusion threshold(mW)	582
	SAR testing required?	NO
Top Side	Antenna to user(mm)	70
	SAR exclusion threshold(mW)	275
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	387
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of LTE Band41	
	24.50dBm	281.84mW
Left Side	Antenna to user(mm)	125
	SAR exclusion threshold(mW)	829
	SAR testing required?	NO
Top Side	Antenna to user(mm)	70
	SAR exclusion threshold(mW)	279
	SAR testing required?	YES
Bottom Side	Antenna to user(mm)	90
	SAR exclusion threshold(mW)	479
	SAR testing required?	NO

NOTE: Refer to section 4.3.1 of KDB 447498 D01.

10. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	9.00	7.94	5	2.480	2.50	3.00	Yes

NOTE: Standalone SAR test exclusion for Bluetooth

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}} / x] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Body	9.00	7.94	5	2.48	7.5	0.334

NOTE: Estimated SAR calculation for Bluetooth.

11. SAR Results

11.1. SAR measurement results

11.1.1. SAR measurement Result of GSM850

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	189/836.4	GPRS(GMSK 4TS)	0.528	0.280	-1.92	28.94	29.00	0.535	2021/10/09
Back Side	189/836.4	GPRS(GMSK 4TS)	0.872	0.482	-1.82	28.94	29.00	0.884	2021/10/09
Back Side Repeated	189/836.4	GPRS(GMSK 4TS)	0.868	0.479	0.35	28.94	29.00	0.880	2021/10/09
Left Side	189/836.4	GPRS(GMSK 4TS)	0.184	0.097	0.29	28.94	29.00	0.187	2021/10/09
Right Side	189/836.4	GPRS(GMSK 4TS)	0.506	0.274	3.28	28.94	29.00	0.513	2021/10/09
Top Side	189/836.4	GPRS(GMSK 4TS)	0.196	0.103	2.45	28.94	29.00	0.199	2021/10/09
Bottom Side	189/836.4	GPRS(GMSK 4TS)	0.391	0.212	1.40	28.94	29.00	0.396	2021/10/09
Back Side	128/824.2	GPRS(GMSK 4TS)	0.704	0.389	-2.51	28.90	29.00	0.720	2021/10/09
Back Side	251/848.8	GPRS(GMSK 4TS)	0.800	0.438	0.57	28.81	29.00	0.836	2021/10/09

NOTE: Body SAR test results of GSM850

11.1.2. SAR measurement Result of GSM1900

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 4TS)	0.078	0.047	3.75	25.66	26.00	0.084	2021/10/13
Back Side	661/1880	GPRS(GMSK 4TS)	0.097	0.059	-2.28	25.66	26.00	0.105	2021/10/13
Left Side	661/1880	GPRS(GMSK 4TS)	0.028	0.017	1.09	25.66	26.00	0.030	2021/10/13
Right Side	661/1880	GPRS(GMSK 4TS)	0.055	0.032	3.84	25.66	26.00	0.059	2021/10/13
Top Side	661/1880	GPRS(GMSK 4TS)	0.036	0.020	1.25	25.66	26.00	0.039	2021/10/13
Bottom Side	661/1880	GPRS(GMSK 4TS)	0.030	0.018	0.25	25.66	26.00	0.032	2021/10/13

NOTE: Body SAR test results of GSM1900

11.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Body	Test channel	Test Mode	SAR Value (W/kg)	Power Drift	Conducted power	Tune-up power	Scaled SAR	Date
-----------------------	--------------	-----------	------------------	-------------	-----------------	---------------	------------	------

with 0mm	/Freq.		1g	10g	(±5%)	(dBm)	(dBm)	1g (W/Kg)	
Front Side	9400/1880	RMC12.2K	0.690	0.371	3.88	22.72	23.00	0.736	2021/10/13
Back Side	9400/1880	RMC12.2K	1.127	0.612	-0.68	22.72	23.00	1.202	2021/10/13
Back Side Repeated	9400/1880	RMC12.2K	1.121	0.610	0.20	22.72	23.00	1.196	2021/10/13
Right Side	9400/1880	RMC12.2K	0.633	0.337	-1.51	22.72	23.00	0.675	2021/10/13
Back Side	9262/1852.4	RMC12.2K	0.920	0.480	2.87	22.81	23.00	0.961	2021/10/13
Back Side	9538/1907.6	RMC12.2K	0.978	0.531	2.39	22.66	23.00	1.058	2021/10/13

NOTE: Body SAR test results of WCDMA Band 2

11.1.4. SAR measurement Result of WCDMA Band 5

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	RMC12.2K	0.378	0.220	-3.72	22.20	22.50	0.405	2021/10/09
Back Side	4182/836.4	RMC12.2K	0.611	0.375	0.03	22.20	22.50	0.655	2021/10/09
Right Side	4182/836.4	RMC12.2K	0.341	0.207	-2.01	22.20	22.50	0.365	2021/10/09

NOTE: Body SAR test results of WCDMA Band 5

11.1.5. SAR measurement Result of LTE Band 2

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	18900/1880	20M QPSK(1,49)	0.724	0.389	-3.59	22.65	23.00	0.785	2021/10/13
Back Side	18900/1880	20M QPSK(1,49)	1.097	0.646	0.94	22.65	23.00	1.189	2021/10/13
Back Side Repeated	18900/1880	20M QPSK(1,49)	1.090	0.641	0.25	22.65	23.00	1.181	2021/10/13
Right Side	18900/1880	20M QPSK(1,49)	0.671	0.351	3.79	22.65	23.00	0.727	2021/10/13
Back Side	18700/1860	20M QPSK(1,49)	0.992	0.519	-1.33	22.67	23.00	1.070	2021/10/13
Back	19100/1900	20M	1.037	0.548	0.51	22.65	23.00	1.124	2021/10/13

Side		QPSK(1,49)							
50%RB									
Front Side	18900/1880	20M QPSK(50,24)	0.416	0.213	0.50	21.57	22.00	0.459	2021/10/13
Back Side	18900/1880	20M QPSK(50,24)	0.650	0.337	-2.20	21.57	22.00	0.718	2021/10/13
Right Side	18900/1880	20M QPSK(50,24)	0.362	0.186	3.73	21.57	22.00	0.400	2021/10/13
100%RB									
Back Side	18900/1880	20M QPSK(100,0)	0.630	0.317	1.25	21.59	22.00	0.692	2021/10/13

NOTE: Body SAR test results of LTE Band 2

11.1.6. SAR measurement Result of LTE Band 4

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20175/1732.5	20M QPSK(1,49)	0.696	0.381	-1.85	23.56	24.00	0.770	2021/10/10
Back Side	20175/1732.5	20M QPSK(1,49)	1.050	0.643	-0.52	23.56	24.00	1.162	2021/10/10
Back Side Repeated	20175/1732.5	20M QPSK(1,49)	1.046	0.639	1.43	23.56	24.00	1.158	2021/10/10
Right Side	20175/1732.5	20M QPSK(1,49)	0.649	0.359	-0.47	23.56	24.00	0.718	2021/10/10
Back Side	20050/1720	20M QPSK(1,49)	0.944	0.528	1.26	23.37	24.00	1.091	2021/10/10
Back Side	20300/1745	20M QPSK(1,49)	1.003	0.544	-0.49	23.51	24.00	1.123	2021/10/10
50%RB									
Front Side	20175/1732.5	20M QPSK(50,24)	0.369	0.200	-5.00	22.39	22.50	0.378	2021/10/10
Back Side	20175/1732.5	20M QPSK(50,24)	0.678	0.374	-2.28	22.39	22.50	0.695	2021/10/10
Right Side	20175/1732.5	20M QPSK(50,24)	0.346	0.188	-1.97	22.39	22.50	0.355	2021/10/10
100%RB									
Back Side	20175/1732.5	20M	0.653	0.360	-2.18	22.36	22.50	0.674	2021/10/10

		QPSK(100,0)							
--	--	-------------	--	--	--	--	--	--	--

NOTE: Body SAR test results of LTE Band 4

11.1.7. SAR measurement Result of LTE Band 5

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20525/836.5	10M QPSK(1,24)	0.480	0.288	3.42	22.01	22.50	0.537	2021/10/09
Back Side	20525/836.5	10M QPSK(1,24)	0.783	0.480	-0.12	22.01	22.50	0.877	2021/10/09
Right Side	20525/836.5	10M QPSK(1,24)	0.451	0.271	-3.46	22.01	22.50	0.505	2021/10/09
Back Side	20450/829	10M QPSK(1,24)	0.648	0.397	2.14	22.08	22.50	0.714	2021/10/09
Back Side	20600/844	10M QPSK(1,24)	0.705	0.415	1.53	21.96	22.50	0.798	2021/10/09
50%RB									
Front Side	20525/836.5	10M QPSK(25,0)	0.249	0.168	-1.98	20.90	21.50	0.286	2021/10/09
Back Side	20525/836.5	10M QPSK(25,0)	0.466	0.253	-0.36	20.90	21.50	0.535	2021/10/09
Right Side	20525/836.5	10M QPSK(25,0)	0.264	0.146	4.51	20.90	21.50	0.303	2021/10/09
100%RB									
Back Side	20525/836.5	10M QPSK(50,0)	0.440	0.233	1.35	20.87	21.50	0.509	2021/10/09

NOTE: Body SAR test results of LTE Band 5

11.1.8. SAR measurement Result of LTE Band 7

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front	21100/2535	20M	0.408	0.203	-0.43	20.93	21.50	0.465	2021/9/30

Side		QPSK(1,0)							
Back Side	21100/2535	20M QPSK(1,0)	0.653	0.325	-2.00	20.93	21.50	0.745	2021/9/30
Right Side	21100/2535	20M QPSK(1,0)	0.204	0.102	-3.29	20.93	21.50	0.233	2021/9/30
50%RB									
Front Side	21100/2535	20M QPSK(50,0)	0.216	0.111	0.26	20.03	20.50	0.241	2021/9/30
Back Side	21100/2535	20M QPSK(50,0)	0.360	0.191	-3.40	20.03	20.50	0.401	2021/9/30
Right Side	21100/2535	20M QPSK(50,0)	0.103	0.052	3.67	20.03	20.50	0.115	2021/9/30

NOTE: Body SAR test results of LTE Band 7

11.1.9. SAR measurement Result of LTE Band 12

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23095/707.5	10M QPSK(1,24)	0.456	0.287	2.21	23.43	24.00	0.520	2021/10/13
Back Side	23095/707.5	10M QPSK(1,24)	0.745	0.469	-0.38	23.43	24.00	0.849	2021/10/13
Right Side	23095/707.5	10M QPSK(1,24)	0.413	0.255	-1.12	23.43	24.00	0.471	2021/10/13
50%RB									
Front Side	23095/707.5	10M QPSK(25,24)	0.229	0.151	0.13	22.10	22.50	0.251	2021/10/13
Back Side	23095/707.5	10M QPSK(25,24)	0.395	0.238	3.54	22.10	22.50	0.433	2021/10/13
Right Side	23095/707.5	10M QPSK(25,24)	0.242	0.129	0.41	22.10	22.50	0.265	2021/10/13

NOTE: Body SAR test results of LTE Band 12

11.1.10. SAR measurement Result of LTE Band 17

Test Position of Body	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g	Date
			1g	10g					

with 0mm								(W/Kg)	
1RB									
Front Side	23790/710	10M QPSK(1,24)	0.426	0.262	2.03	23.16	23.50	0.461	2021/10/13
Back Side	23790/710	10M QPSK(1,24)	0.696	0.437	-0.41	23.16	23.50	0.753	2021/10/13
Right Side	23790/710	10M QPSK(1,24)	0.391	0.245	3.54	23.16	23.50	0.423	2021/10/13
50%RB									
Front Side	23790/710	10M QPSK(25,0)	0.216	0.155	-1.78	22.07	22.50	0.238	2021/10/13
Back Side	23790/710	10M QPSK(25,0)	0.396	0.244	-2.38	22.07	22.50	0.437	2021/10/13
Right Side	23790/710	10M QPSK(25,0)	0.203	0.129	1.30	22.07	22.50	0.224	2021/10/13

NOTE: Body SAR test results of LTE Band 17

11.1.11. SAR measurement Result of LTE Band 41

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	40790/2610	20M QPSK(1,49)	0.366	0.180	2.16	24.00	24.50	0.411	2021/9/30
Back Side	40790/2610	20M QPSK(1,49)	0.561	0.282	-1.24	24.00	24.50	0.629	2021/9/30
Right Side	40790/2610	20M QPSK(1,49)	0.330	0.159	3.46	24.00	24.50	0.370	2021/9/30
Top Side	40790/2610	20M QPSK(1,49)	0.258	0.125	3.96	24.00	24.50	0.289	2021/9/30
50%RB									
Front Side	40790/2610	20M QPSK(50,0)	0.216	0.096	3.42	22.91	23.00	0.221	2021/9/30
Back Side	40790/2610	20M QPSK(50,0)	0.327	0.162	2.22	22.91	23.00	0.334	2021/9/30
Right Side	40790/2610	20M QPSK(50,0)	0.193	0.080	-0.19	22.91	23.00	0.197	2021/9/30
Top Side	40790/2610	20M QPSK(50,0)	0.143	0.064	-2.84	22.91	23.00	0.146	2021/9/30

NOTE: Body SAR test results of LTE Band 41

11.1.12. SAR measurement Result of WLAN 2.4G

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11b	0.108	0.056	2.60	14.70	15.00	0.116	2021/10/11
Back Side	6/2437	802.11b	0.137	0.072	-1.12	14.70	15.00	0.147	2021/10/11
Right Side	6/2437	802.11b	0.070	0.036	-3.84	14.70	15.00	0.075	2021/10/11
Top Side	6/2437	802.11b	0.068	0.035	3.29	14.70	15.00	0.073	2021/10/11

NOTE: Body SAR test results of WLAN 2.4G

11.1.13. SAR measurement Result of WLAN 5.2G

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	40/5200	802.11a	0.168	0.101	-0.07	8.25	10.00	0.251	2021/10/08
Back Side	40/5200	802.11a	0.239	0.167	1.09	8.25	10.00	0.358	2021/10/08
Right Side	40/5200	802.11a	0.140	0.083	-2.96	8.25	10.00	0.209	2021/10/08
Top Side	40/5200	802.11a	0.126	0.077	0.82	8.25	10.00	0.189	2021/10/08

NOTE: Body SAR test results of WLAN 5.2G

11.1.14. SAR measurement Result of WLAN 5.3G

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	56/5280	802.11a	0.228	0.100	-0.35	9.46	10.00	0.258	2021/10/08
Back Side	56/5280	802.11a	0.319	0.166	-1.01	9.46	10.00	0.361	2021/10/08
Right Side	56/5280	802.11a	0.195	0.087	-0.48	9.46	10.00	0.221	2021/10/08
Top Side	56/5280	802.11a	0.162	0.073	-1.05	9.46	10.00	0.183	2021/10/08

NOTE: Body SAR test results of WLAN 5.3G

11.1.15. SAR measurement Result of WLAN 5.6G

Test Position of Body with	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g	Date
			1g	10g					

0mm								(W/Kg)	
Front Side	120/5600	802.11a	0.102	0.043	0.38	9.26	10.00	0.121	2021/10/19
Back Side	120/5600	802.11a	0.167	0.071	2.11	9.26	10.00	0.198	2021/10/19
Right Side	120/5600	802.11a	0.085	0.036	3.38	9.26	10.00	0.101	2021/10/19
Top Side	120/5600	802.11a	0.095	0.038	2.82	9.26	10.00	0.113	2021/10/19

NOTE: Body SAR test results of WLAN 5.6G

11.1.16. SAR measurement Result of WLAN 5.8G

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	157/5785	802.11a	0.180	0.096	0.63	9.87	10.00	0.185	2021/10/09
Back Side	157/5785	802.11a	0.294	0.161	-3.03	9.87	10.00	0.303	2021/10/09
Right Side	157/5785	802.11a	0.160	0.088	-1.76	9.87	10.00	0.165	2021/10/09
Top Side	157/5785	802.11a	0.144	0.078	4.00	9.87	10.00	0.148	2021/10/09

NOTE: Body SAR test results of WLAN 5.8G

11.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- Scalar SAR summation < 1.6W/kg.
- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DTS			
Body	Front Side	0.785	0.116	0.901	N/A	N/A
	Back Side	1.202	0.147	1.349	N/A	N/A
	Left Side	0.187	N/A	0.187	N/A	N/A
	Right Side	0.727	0.075	0.802	N/A	N/A
	Top Side	0.289	0.073	0.362	N/A	N/A
	Bottom Side	0.396	N/A	0.396	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	NII			
Body	Front Side	0.785	0.258	1.043	N/A	N/A
	Back Side	1.202	0.361	1.563	N/A	N/A

	Left Side	0.187	N/A	0.187	N/A	N/A
	Right Side	0.727	0.221	0.948	N/A	N/A
	Top Side	0.289	0.189	0.478	N/A	N/A
	Bottom Side	0.396	N/A	0.396	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Body	Front Side	0.785	0.334	1.119	N/A	N/A
	Back Side	1.202	0.334	1.536	N/A	N/A
	Left Side	0.187	0.334	0.521	N/A	N/A
	Right Side	0.727	0.334	1.061	N/A	N/A
	Top Side	0.289	0.334	0.623	N/A	N/A
	Bottom Side	0.396	0.334	0.730	N/A	N/A

12. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

13. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 750MHz
MEASUREMENT 2 System Performance Check - 835MHz
MEASUREMENT 3 System Performance Check - 1800MHz
MEASUREMENT 4 System Performance Check - 1900MHz
MEASUREMENT 5 System Performance Check - 2450MHz
MEASUREMENT 6 System Performance Check - 2600MHz
MEASUREMENT 7 System Performance Check - 5200MHz
MEASUREMENT 8 System Performance Check - 5600MHz
MEASUREMENT 9 System Performance Check - 5800MHz

MEASUREMENT 1


Date of measurement: 13/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW750</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	41.937987
Relative permittivity (imaginary part)	21.418140
Conductivity (S/m)	0.892423
Variation (%)	-2.190000

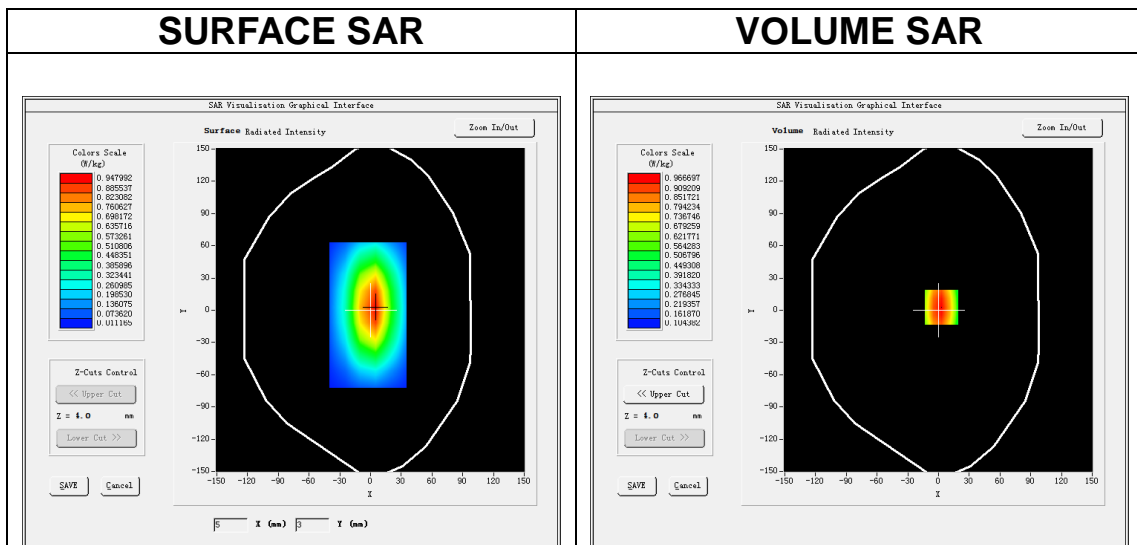

Maximum location: X=3.00, Y=3.00
SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.539341
SAR 1g (W/Kg)	0.891283

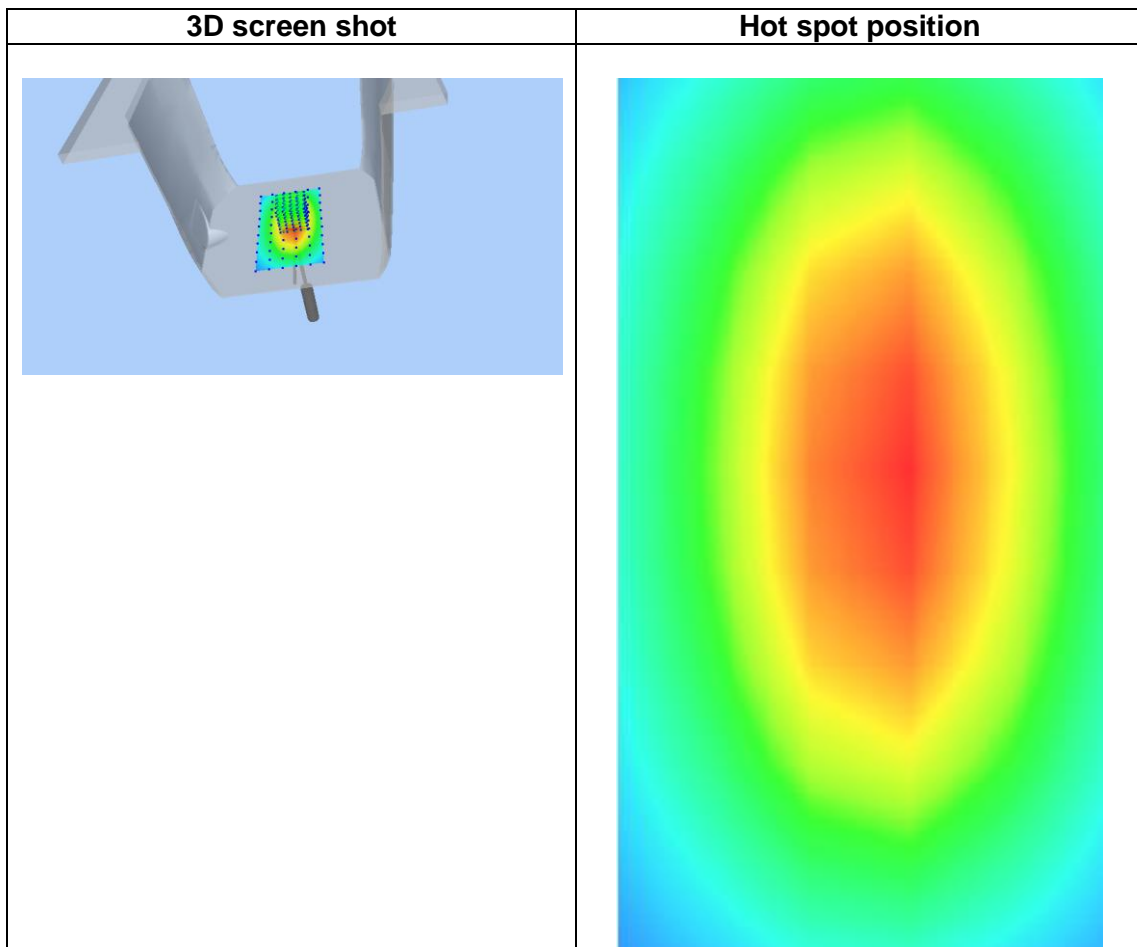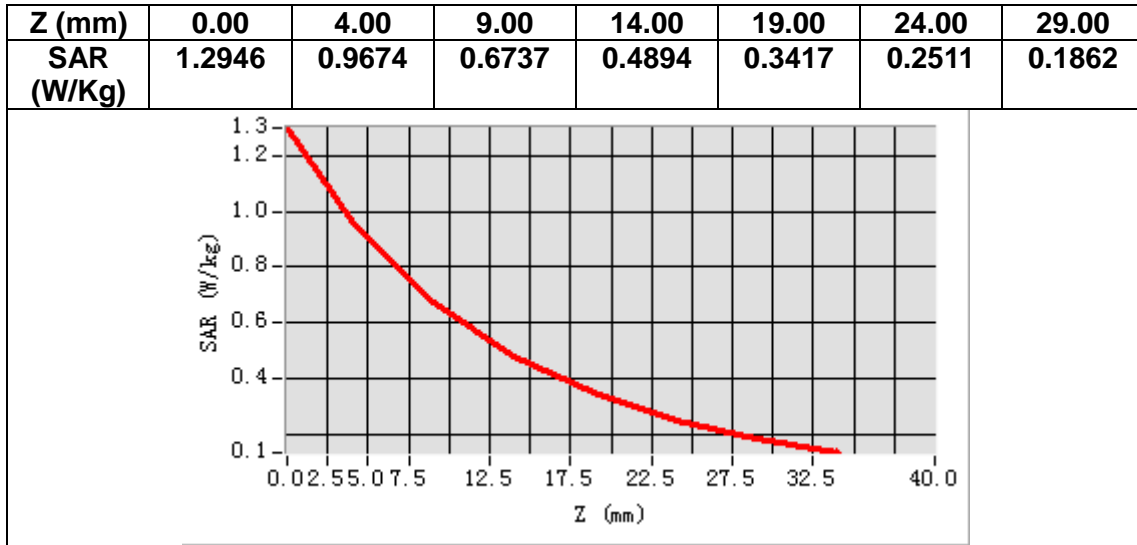

MEASUREMENT 2


Date of measurement: 9/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW835</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	835.000000
Relative permittivity (real part)	42.825107
Relative permittivity (imaginary part)	19.989977
Conductivity (S/m)	0.927313
Variation (%)	-2.670000

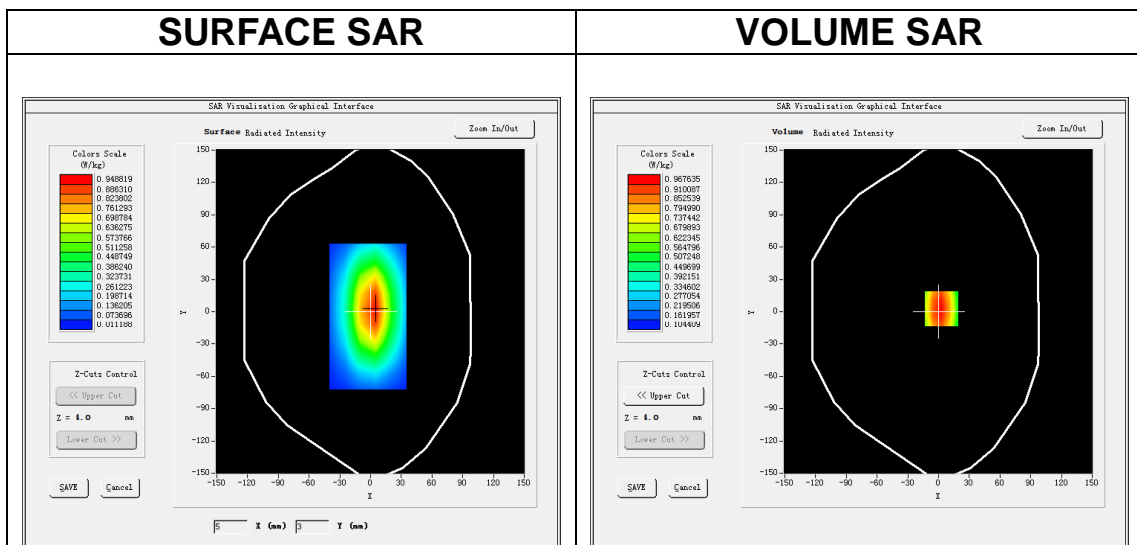

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.650126
SAR 1g (W/Kg)	1.003040

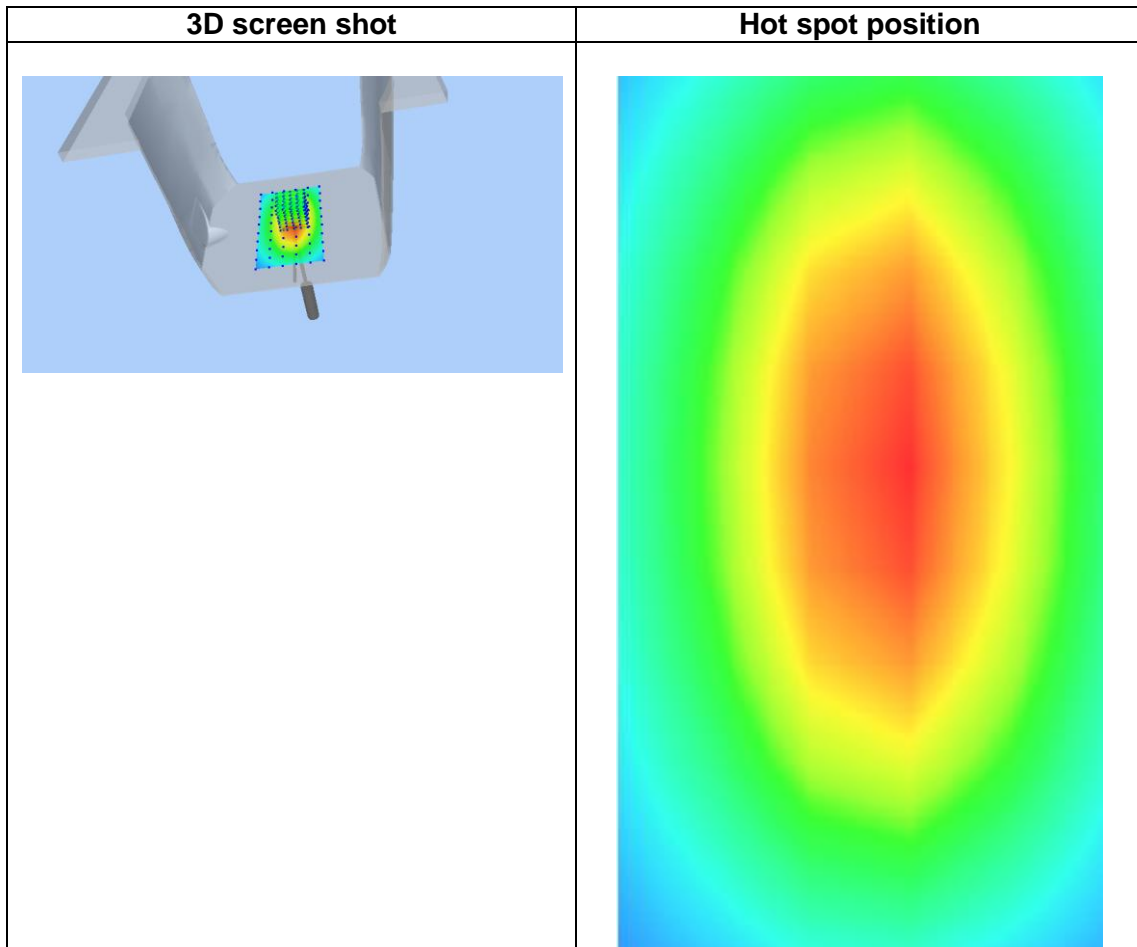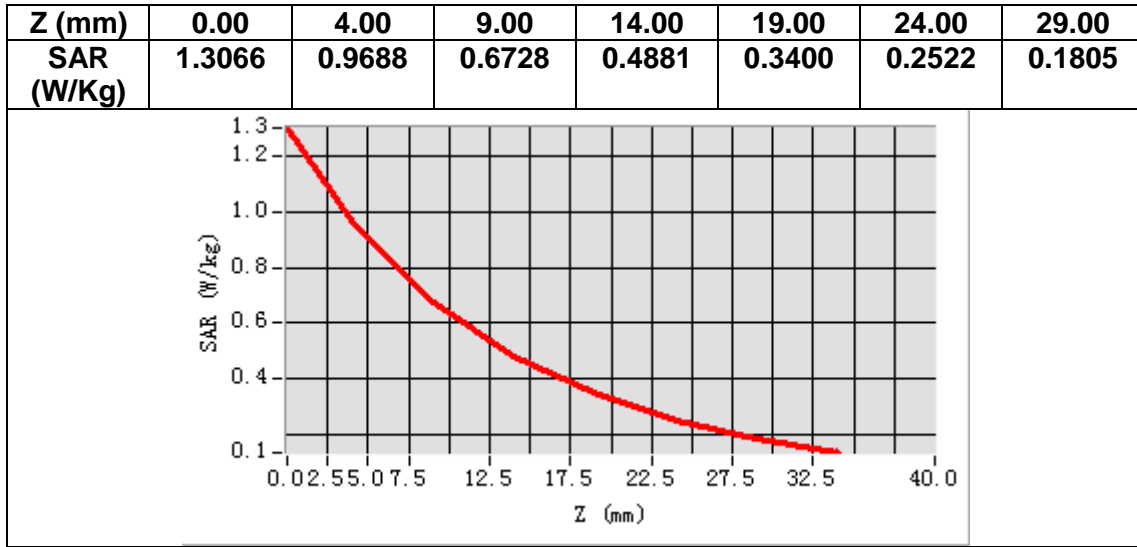

MEASUREMENT 3


Date of measurement: 10/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.353053
Relative permittivity (imaginary part)	13.722180
Conductivity (S/m)	1.372218
Variation (%)	0.320000

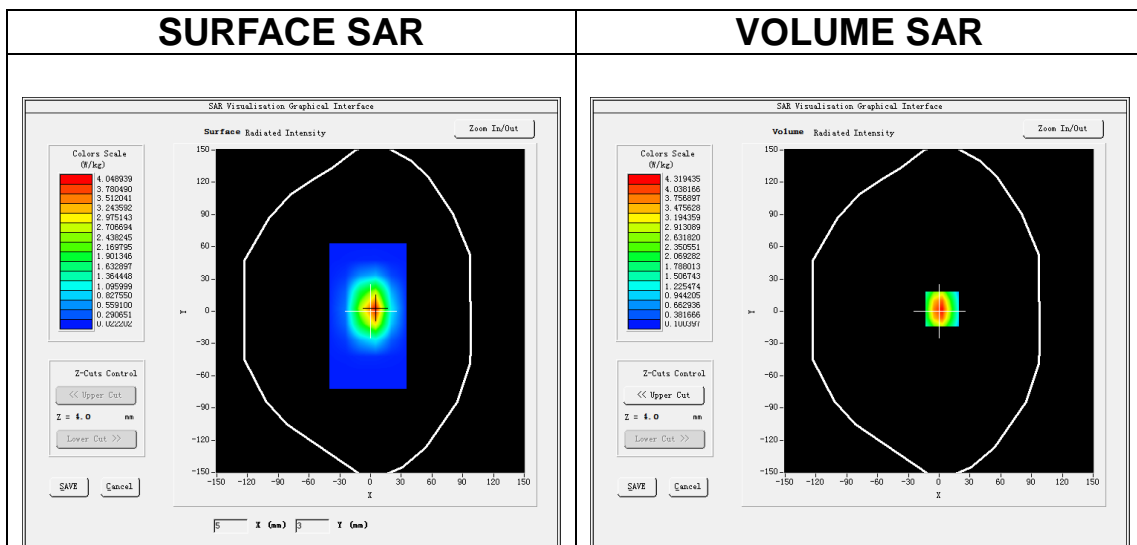

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	1.922002
SAR 1g (W/Kg)	3.885175

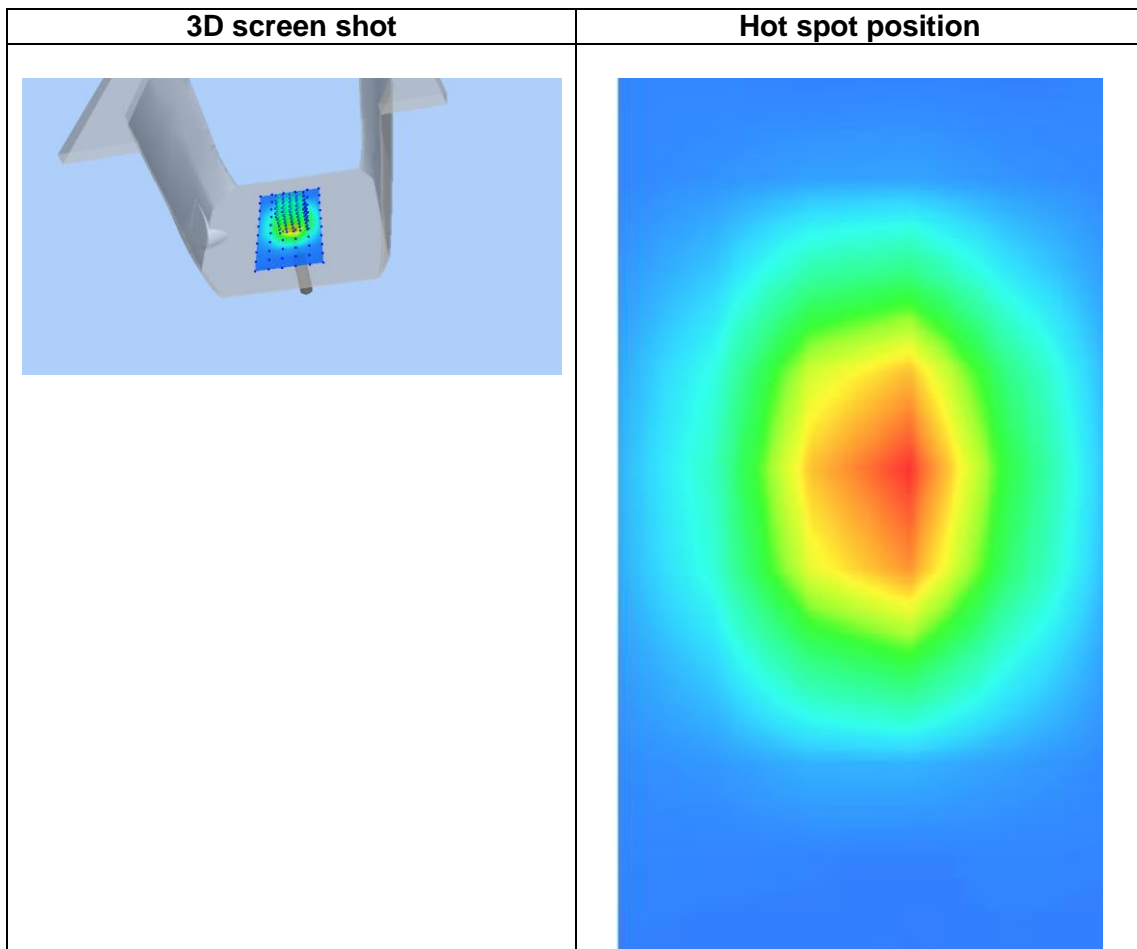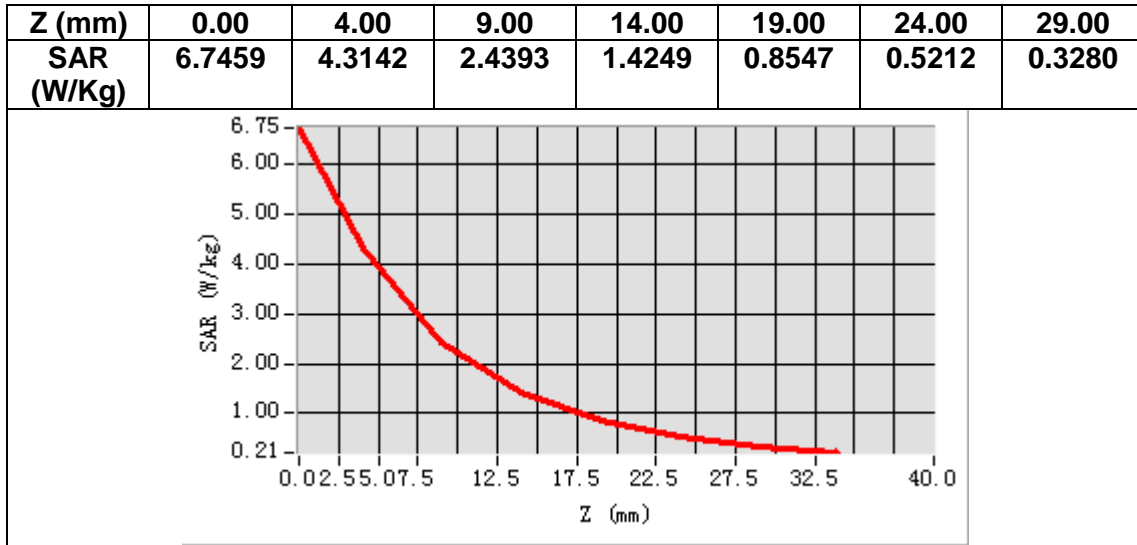

MEASUREMENT 4


Date of measurement: 13/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1900</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.777082
Relative permittivity (imaginary part)	13.833655
Conductivity (S/m)	1.460219
Variation (%)	3.170000

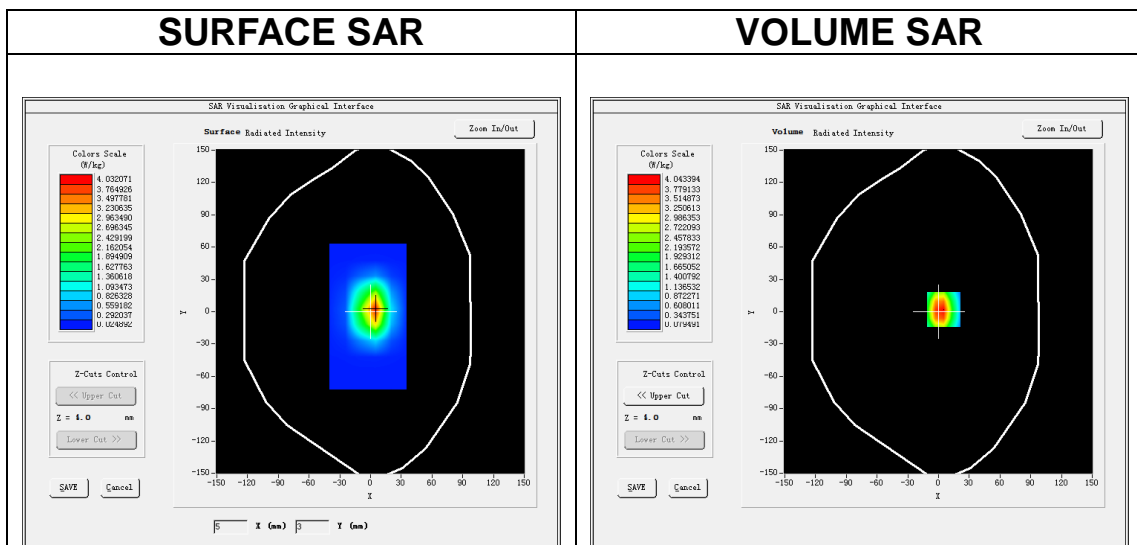




Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	1.980139
SAR 1g (W/Kg)	4.009320

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.3276	4.0479	2.2623	1.3059	0.7697	0.4531	0.2750

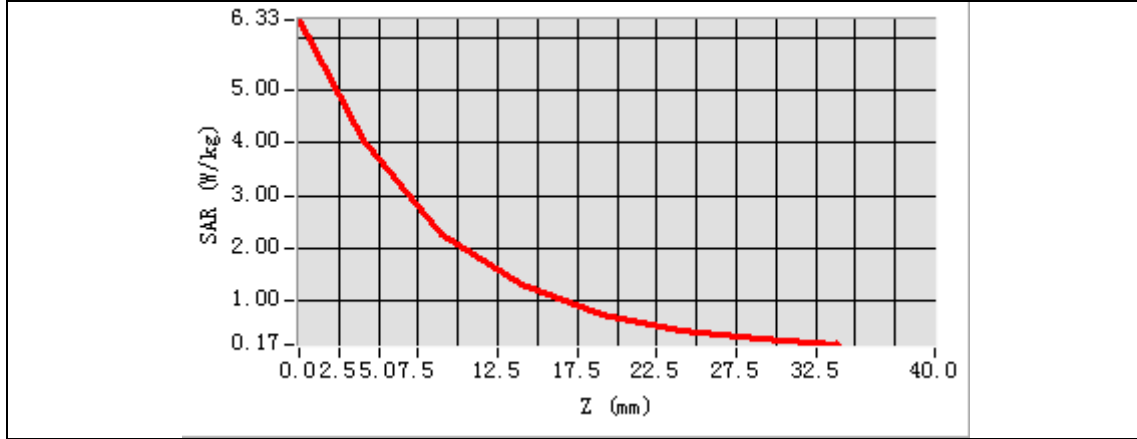

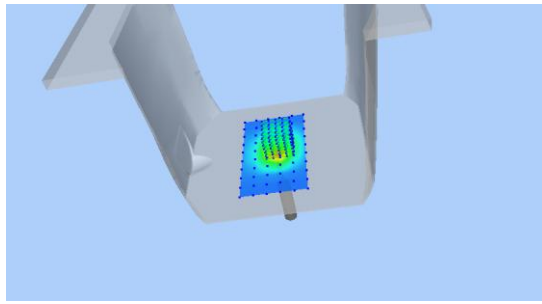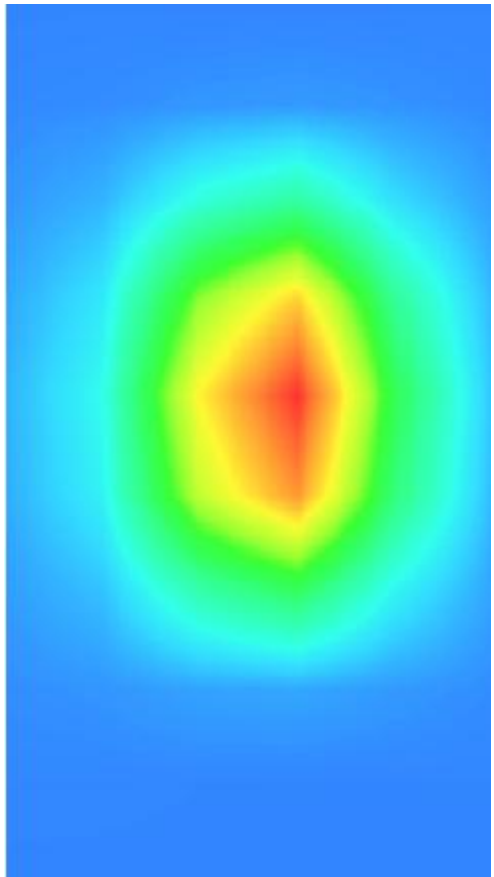3D screen shot	Hot spot position
	

MEASUREMENT 5


Date of measurement: 11/10/2021

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW2450</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	2450.000000
Relative permittivity (real part)	40.733711
Relative permittivity (imaginary part)	12.969064
Conductivity (S/m)	1.765234
Variation (%)	-1.050000

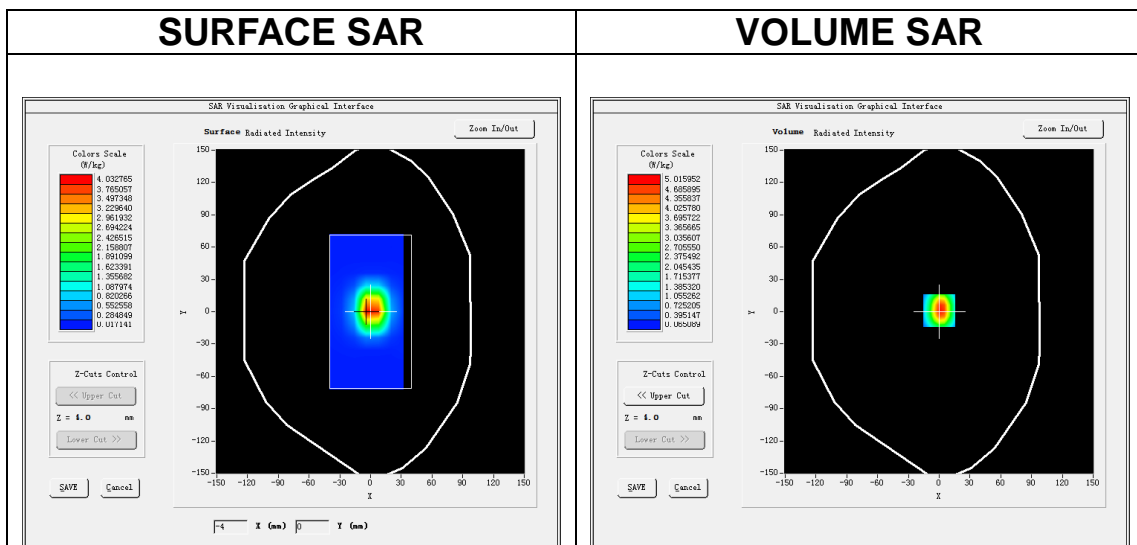

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.505366
SAR 1g (W/Kg)	5.221333

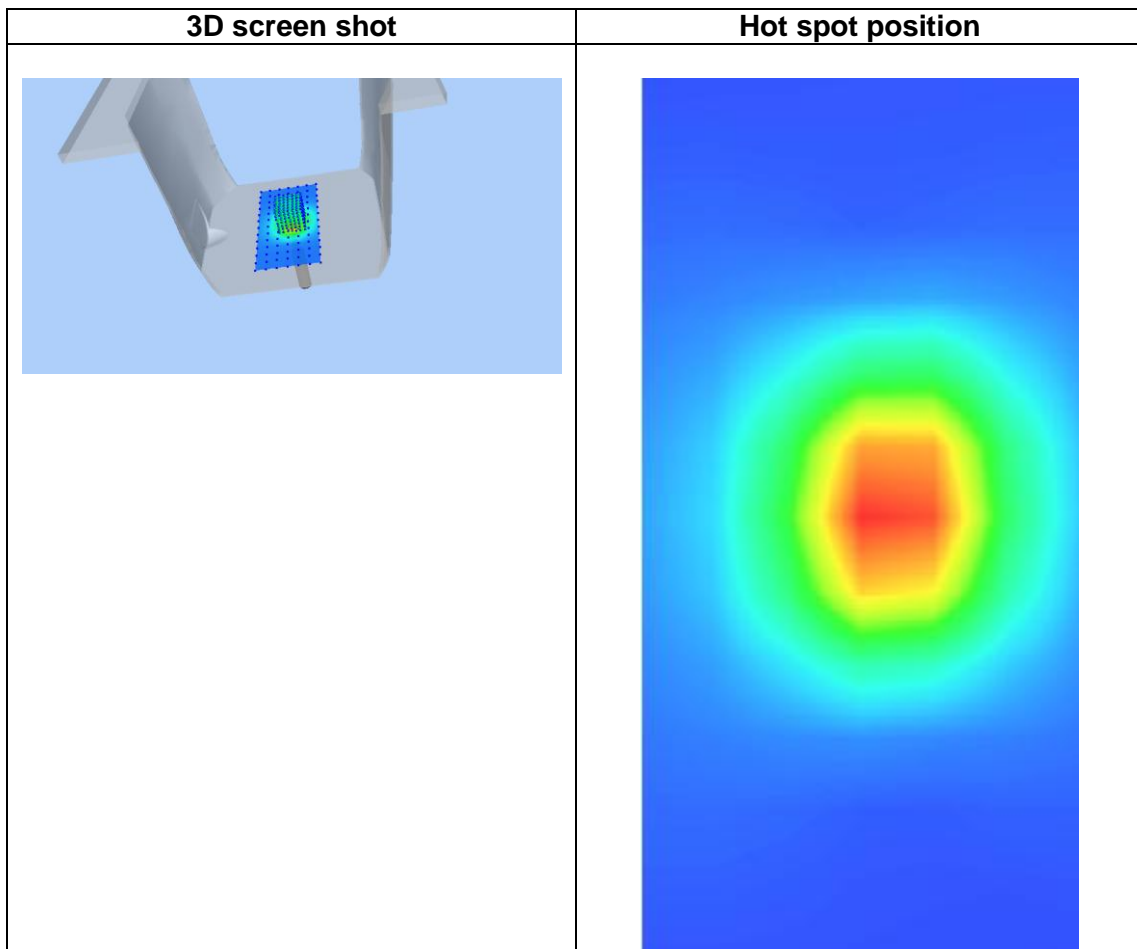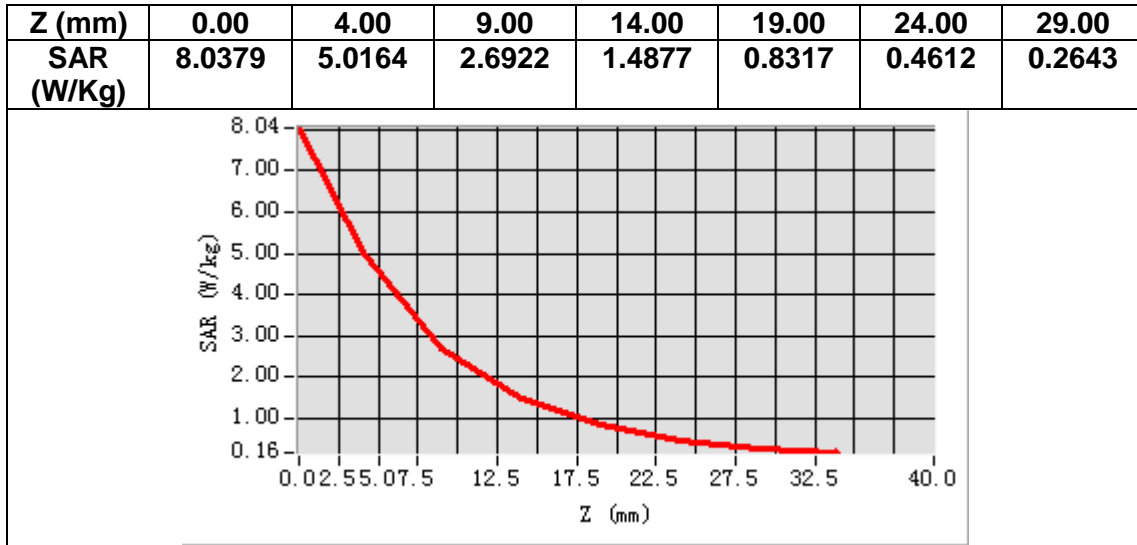

MEASUREMENT 6


Date of measurement: 30/9/2021

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW2600</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	2600.000000
Relative permittivity (real part)	39.552462
Relative permittivity (imaginary part)	13.537502
Conductivity (S/m)	1.955417
Variation (%)	2.900000

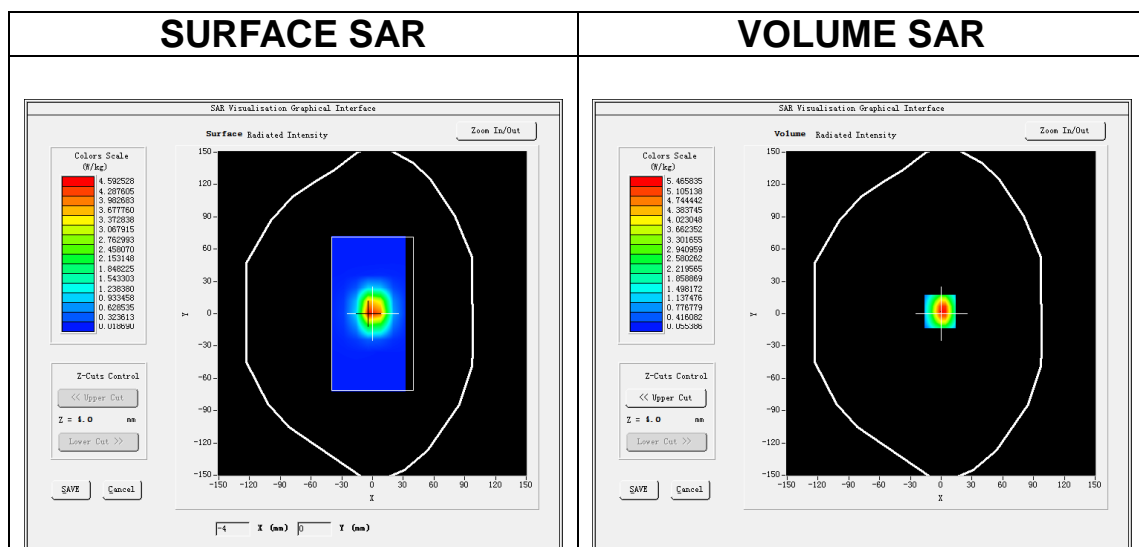

Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg

SAR 10g (W/Kg)	2.635174
SAR 1g (W/Kg)	5.947177

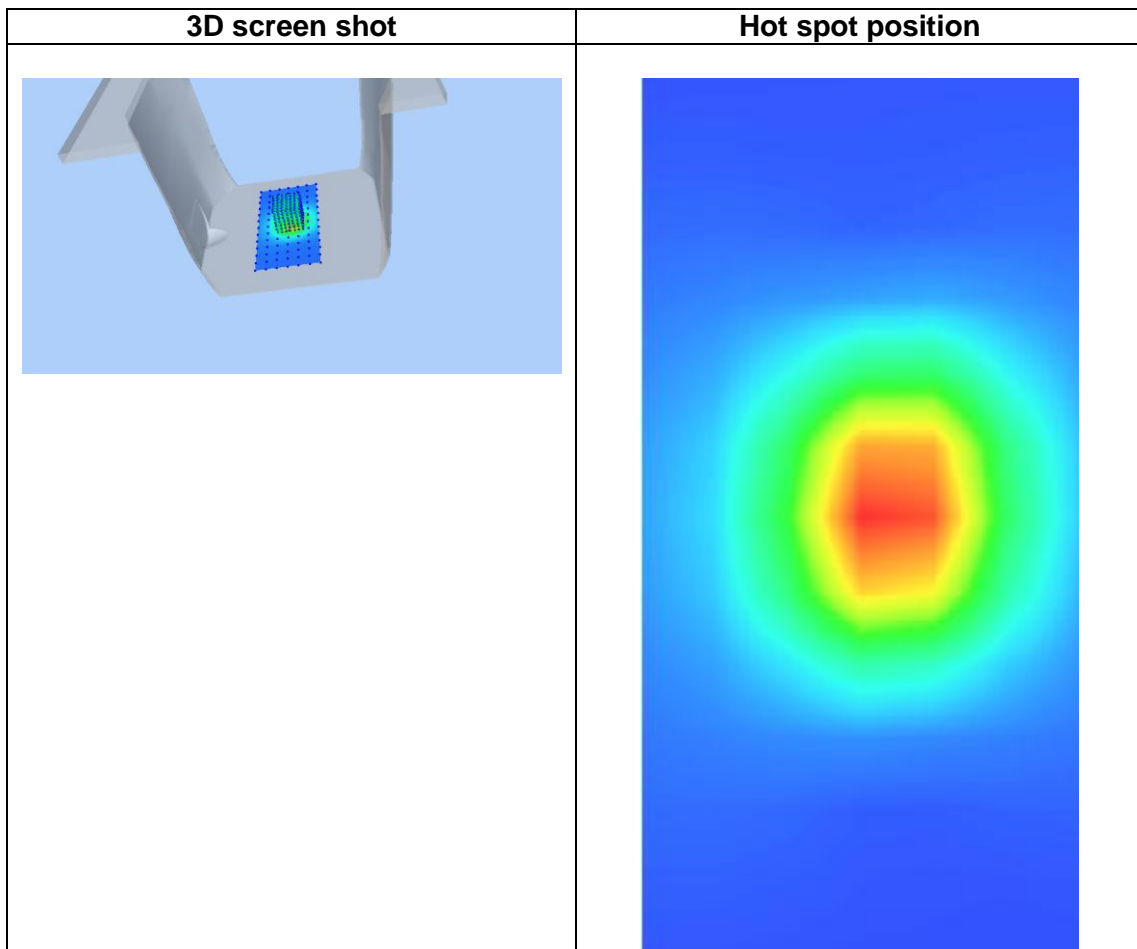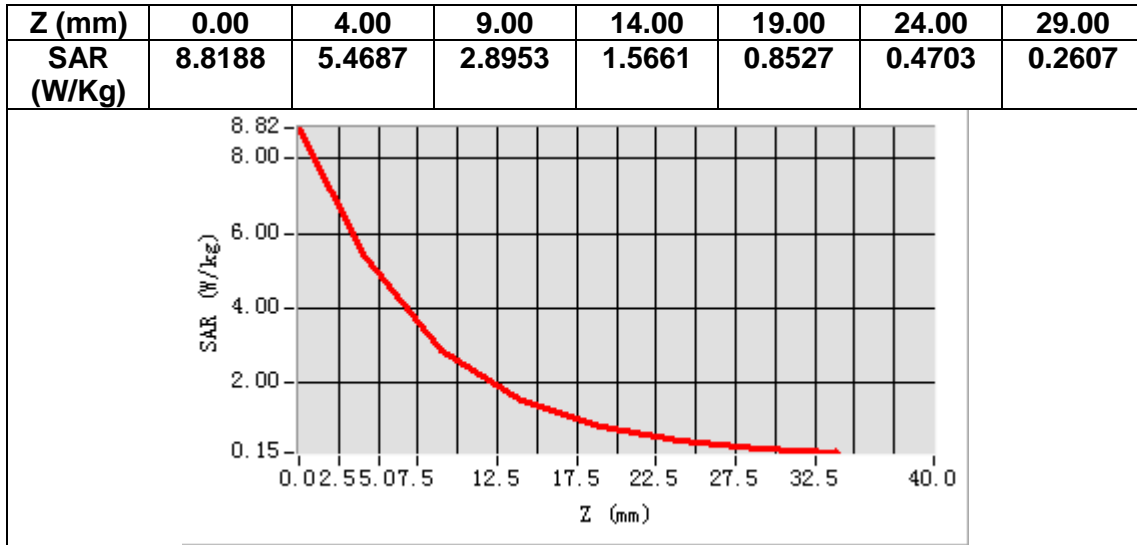

MEASUREMENT 7


Date of measurement: 8/10/2021

A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW5200</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	37.508985
Relative permittivity (imaginary part)	15.750310
Conductivity (S/m)	4.550090
Variation (%)	0.610000

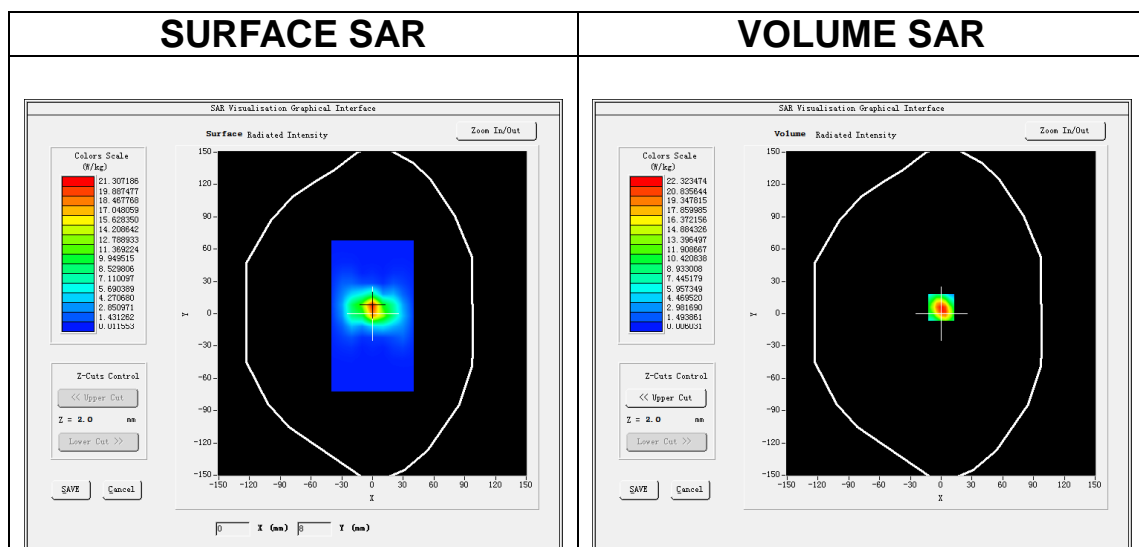




Maximum location: X=0.00, Y=6.00

SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.729153
SAR 1g (W/Kg)	14.999124

Z (m m)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	37.830	22.354	11.336	5.6665	2.8260	1.4036	0.7178	0.3660	0.1869	0.1096	0.0557	0.0326

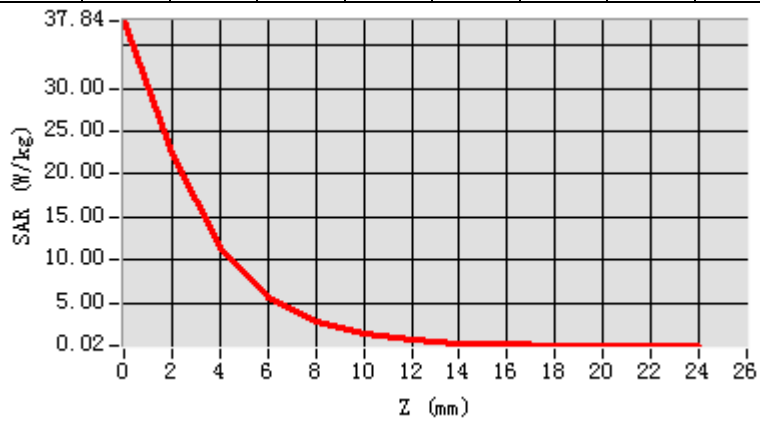

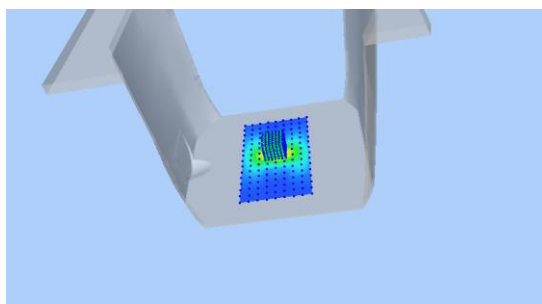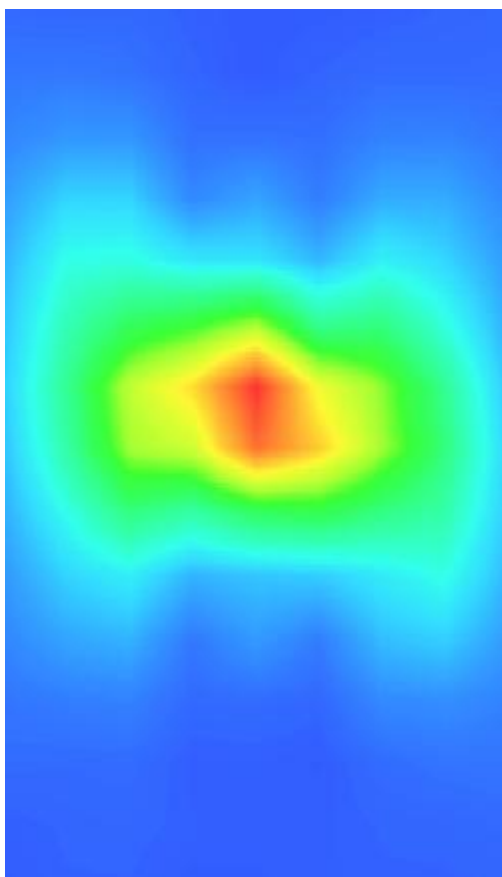3D screen shot	Hot spot position
	

MEASUREMENT 8


Date of measurement: 19/10/2021

A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW5600</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5600.000000
Relative permittivity (real part)	36.636611
Relative permittivity (imaginary part)	16.053614
Conductivity (S/m)	4.994458
Variation (%)	2.700000

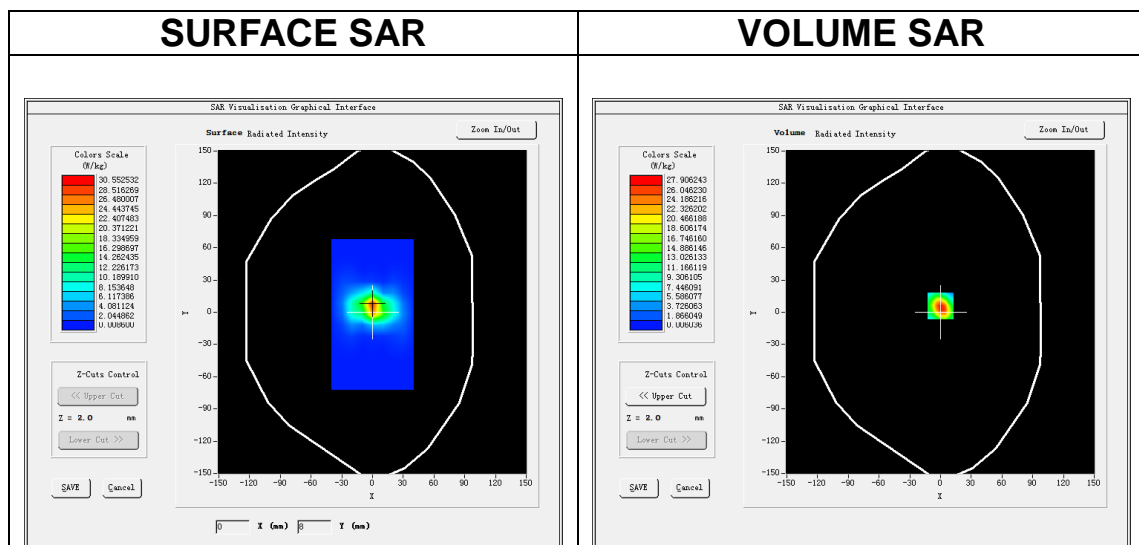




Maximum location: X=0.00, Y=6.00

SAR Peak: 51.23 W/kg

SAR 10g (W/Kg)	5.456359
SAR 1g (W/Kg)	17.304354

Z (m)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SA R (W/Kg)	54.130	31.966	16.374	8.1704	4.0875	3.8158	1.0358	0.4631	0.2717	0.1312	0.0704	0.0536

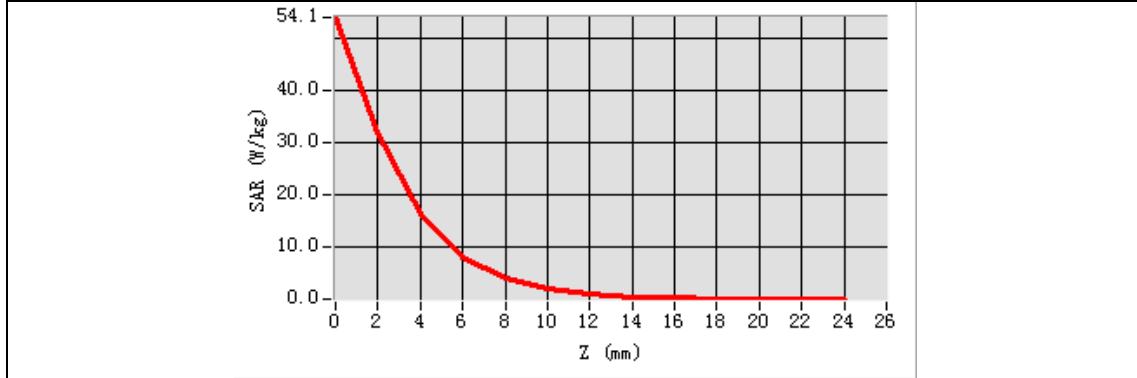

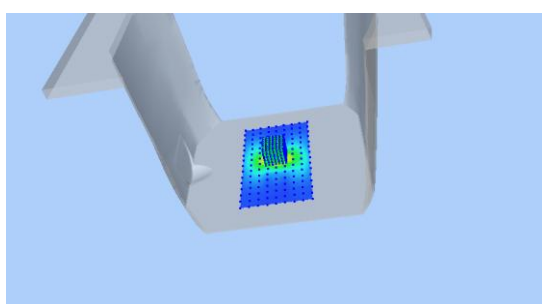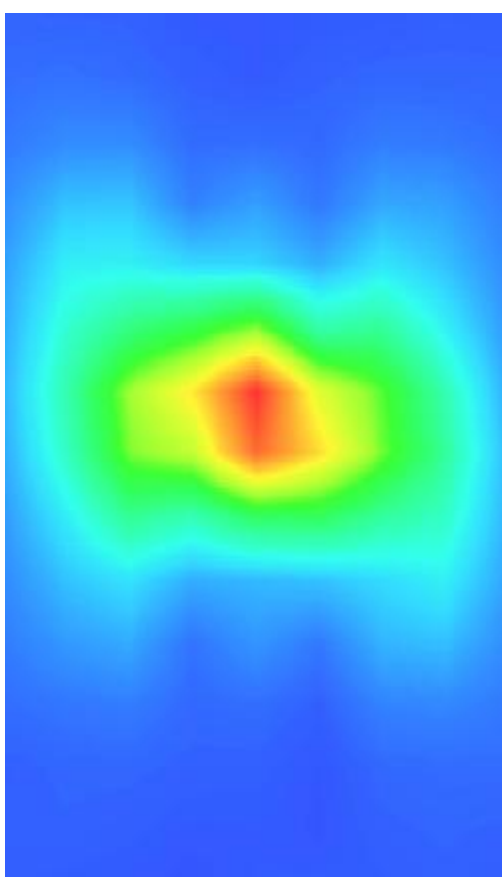3D screen shot	Hot spot position
	

MEASUREMENT 9


Date of measurement: 9/10/2021

A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW5800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	36.345182
Relative permittivity (imaginary part)	16.049354
Conductivity (S/m)	5.171459
Variation (%)	0.810000

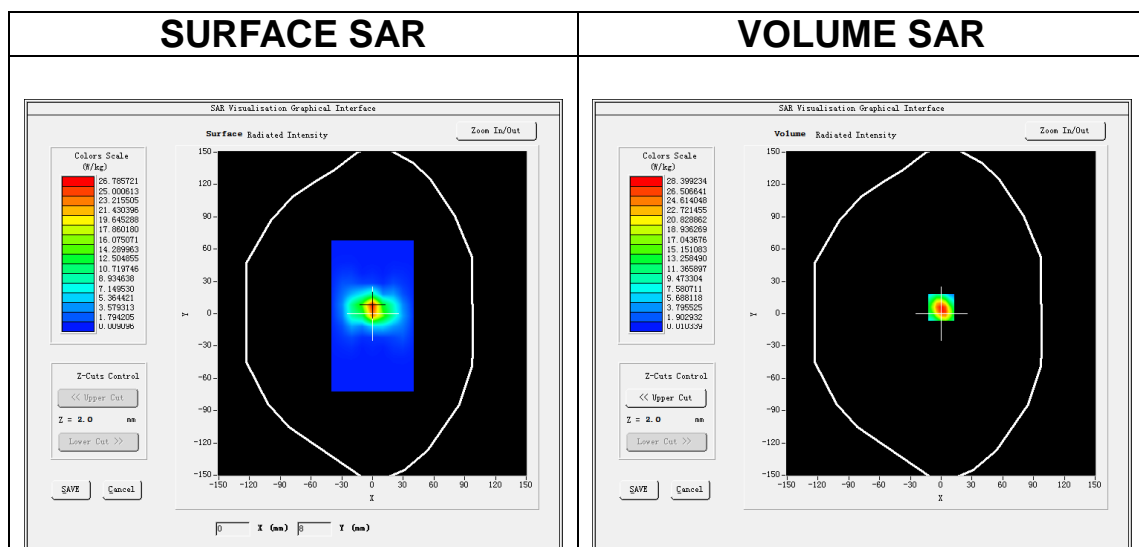


Maximum location: X=0.00, Y=6.00


SAR Peak: 50.97 W/kg

SAR 10g (W/Kg)	6.253384
SAR 1g (W/Kg)	18.008137


Z (m)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	48.062	28.383	14.450	7.2918	3.6447	1.8240	0.9220	0.4623	0.2458	0.1306	0.0762	0.0447

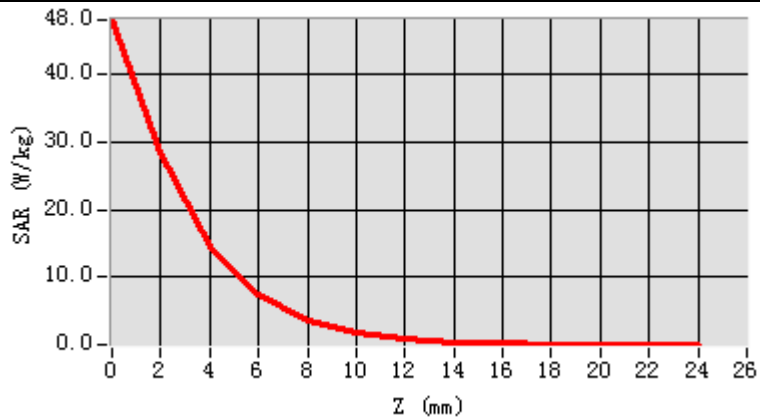

3D screen shot

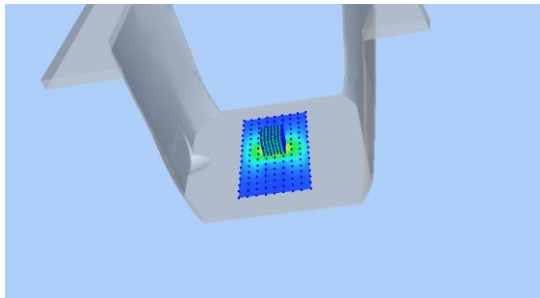

Hot spot position

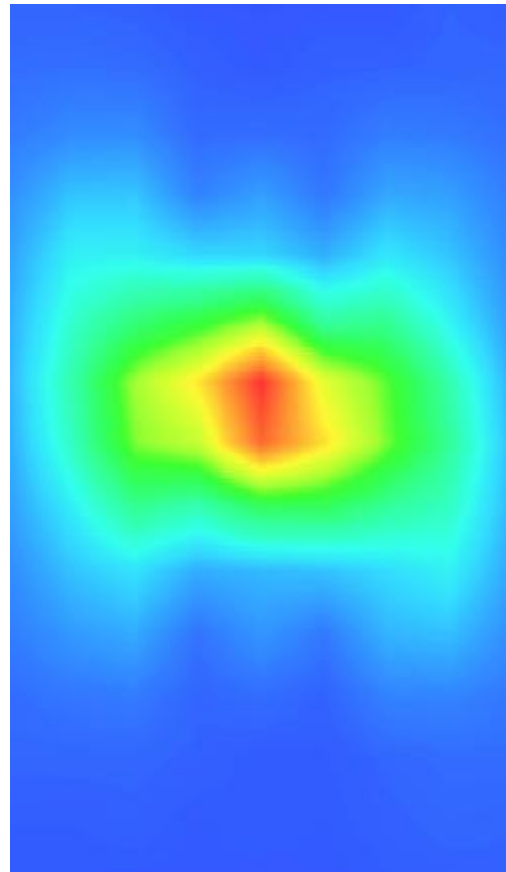

14. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Body
MEASUREMENT 2 GSM 1900 Body
MEASUREMENT 3 WCDMA Band 2 Body
MEASUREMENT 4 WCDMA Band 5 Body
MEASUREMENT 5 WLAN 5.2G Body
MEASUREMENT 6 WLAN 5.3G Body
MEASUREMENT 7 WLAN 5.6G Body
MEASUREMENT 8 WLAN 5.8G Body
MEASUREMENT 9 WLAN 2.4G Body
MEASUREMENT 10 LTE Band 2 Body
MEASUREMENT 11 LTE Band 4 Body
MEASUREMENT 12 LTE Band 5 Body
MEASUREMENT 13 LTE Band 7 Body
MEASUREMENT 14 LTE Band 12 Body
MEASUREMENT 15 LTE Band 17 Body
MEASUREMENT 16 LTE Band 41 Body

MEASUREMENT 1


Date of measurement: 9/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>GSM850</u>
Channels	<u>Middle</u>
Signal	<u>TDMA (Crest factor: 2.0)</u>

B. SAR Measurement Results



Frequency (MHz)	836.400000
Relative permittivity (real part)	42.740768
Relative permittivity (imaginary part)	20.015818
Conductivity (S/m)	0.930068
Variation (%)	-1.820000

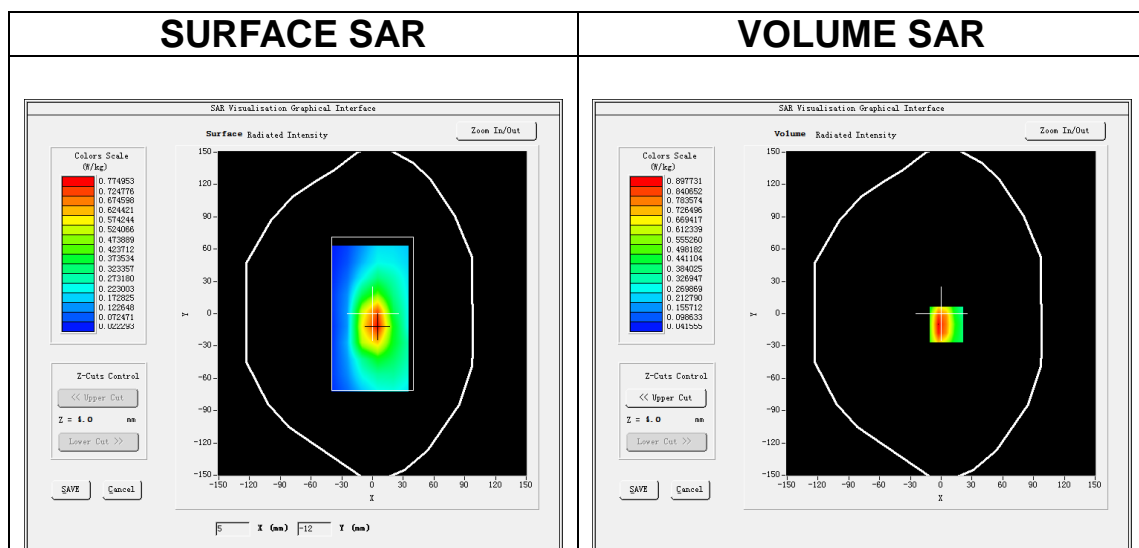

Maximum location: X=5.00, Y=-10.00

SAR Peak: 1.44 W/kg

SAR 10g (W/Kg)	0.482086
SAR 1g (W/Kg)	0.872487

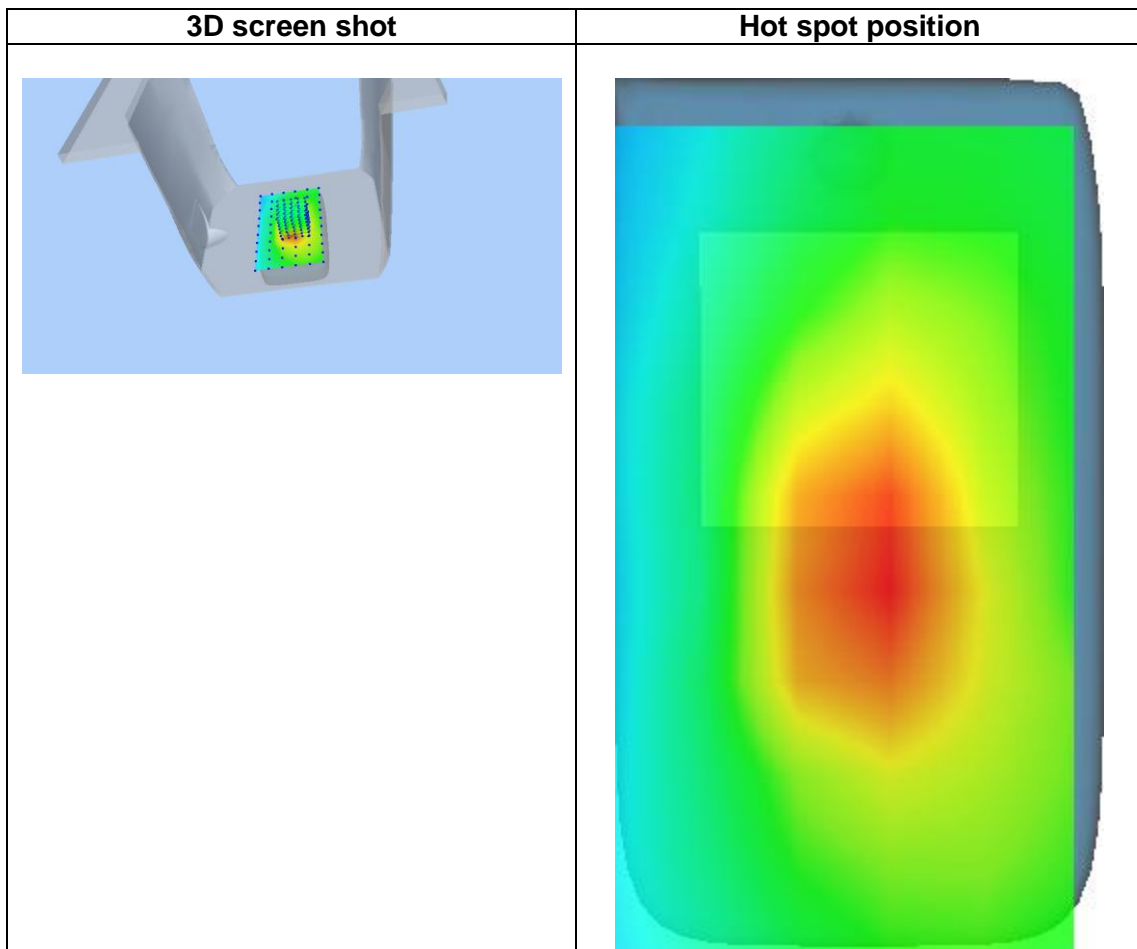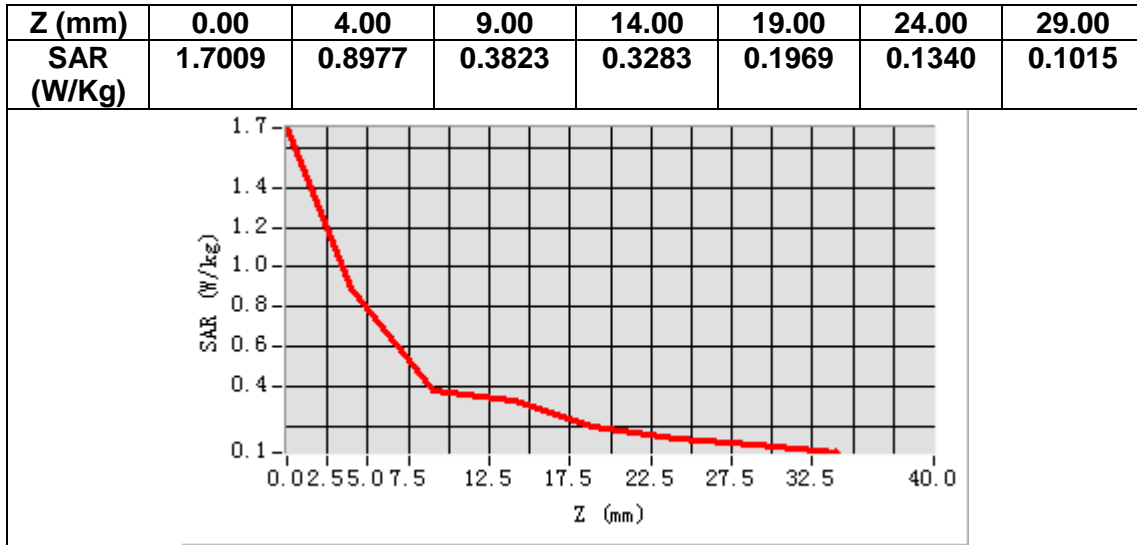

MEASUREMENT 2


Date of measurement: 13/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>GSM1900</u>
Channels	<u>Middle</u>
Signal	<u>TDMA (Crest factor: 2.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.863483
Relative permittivity (imaginary part)	13.851455
Conductivity (S/m)	1.446708
Variation (%)	-2.280000

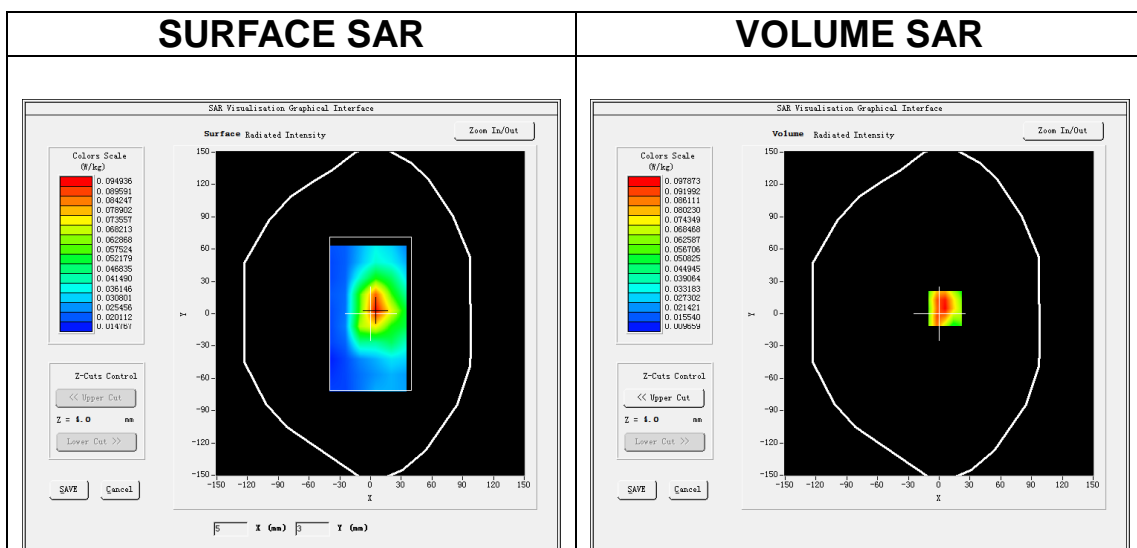

Maximum location: X=6.00, Y=5.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.058733
SAR 1g (W/Kg)	0.096920

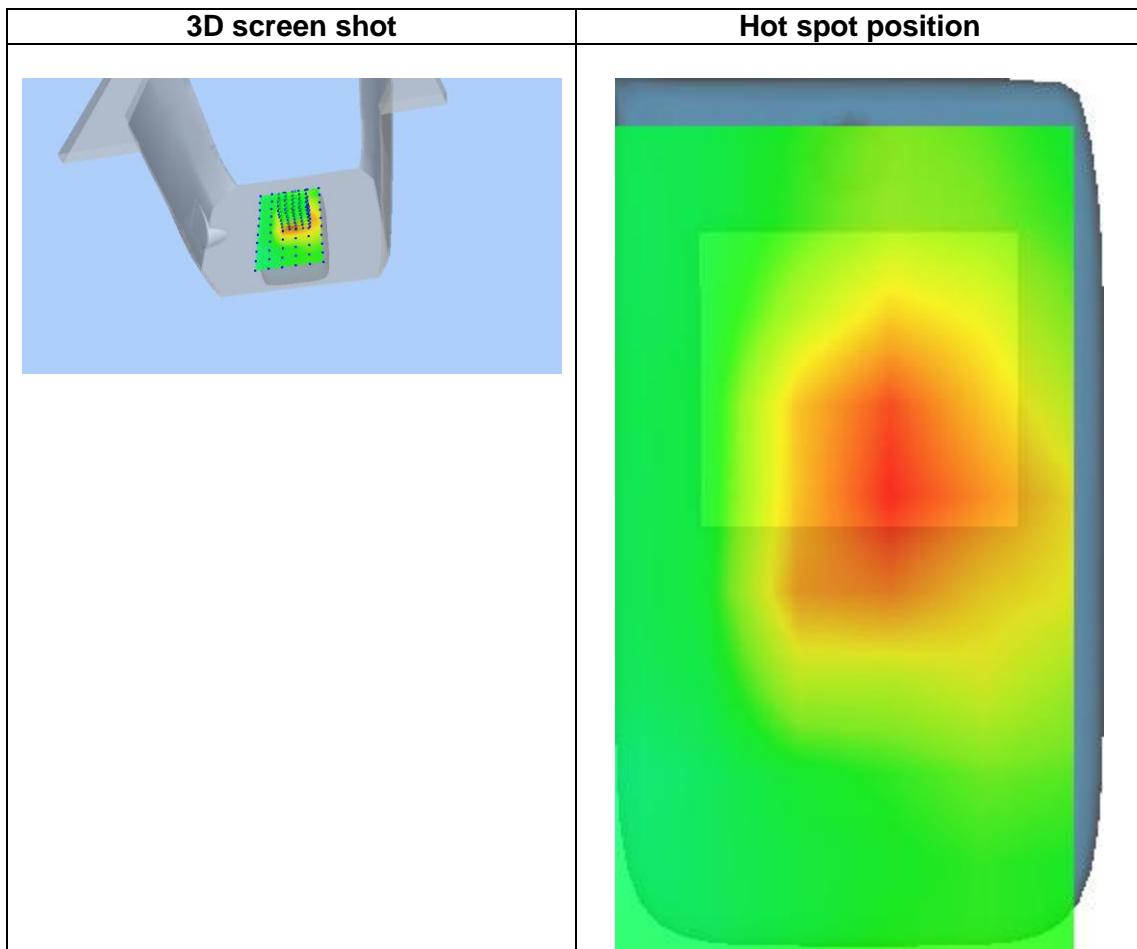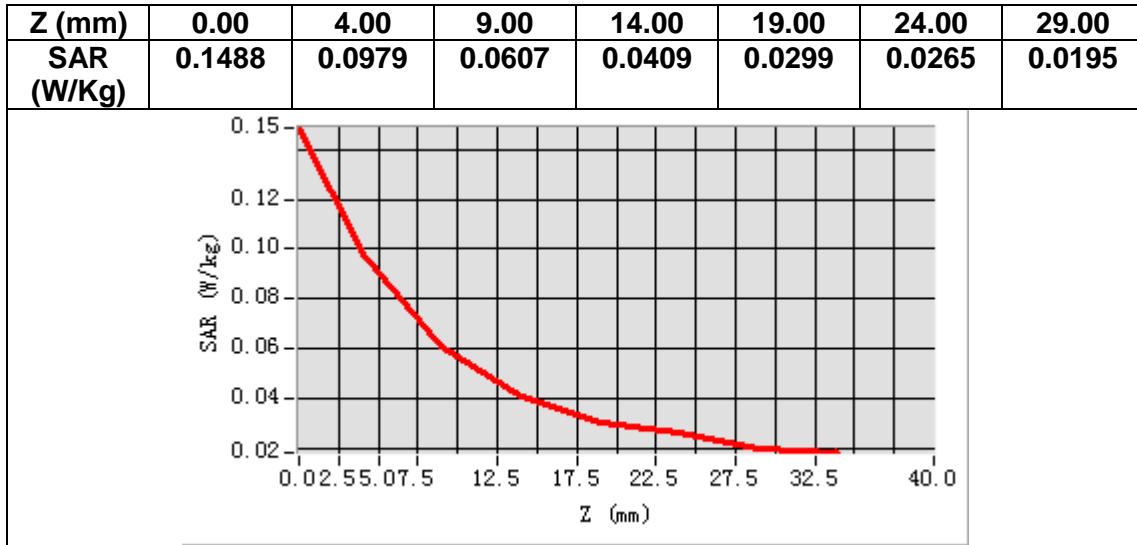

MEASUREMENT 3


Date of measurement: 13/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>Band2 WCDMA1900</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.863483
Relative permittivity (imaginary part)	13.851455
Conductivity (S/m)	1.446708
Variation (%)	-0.680000

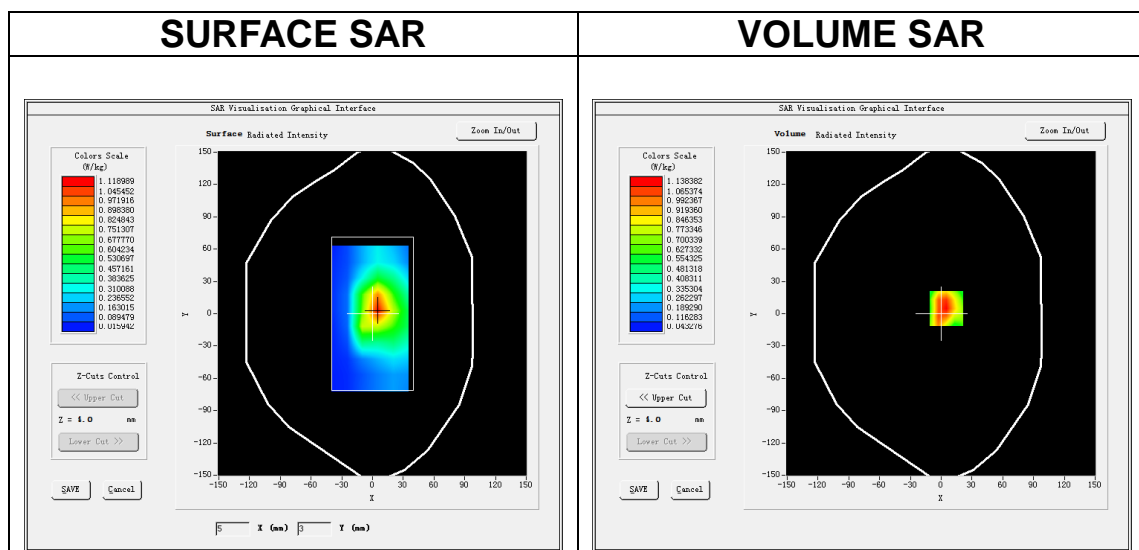




Maximum location: X=5.00, Y=5.00

SAR Peak: 1.79 W/kg

SAR 10g (W/Kg)	0.612438
SAR 1g (W/Kg)	1.126895

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.7869	1.1384	0.6337	0.3659	0.2146	0.1310	0.0827

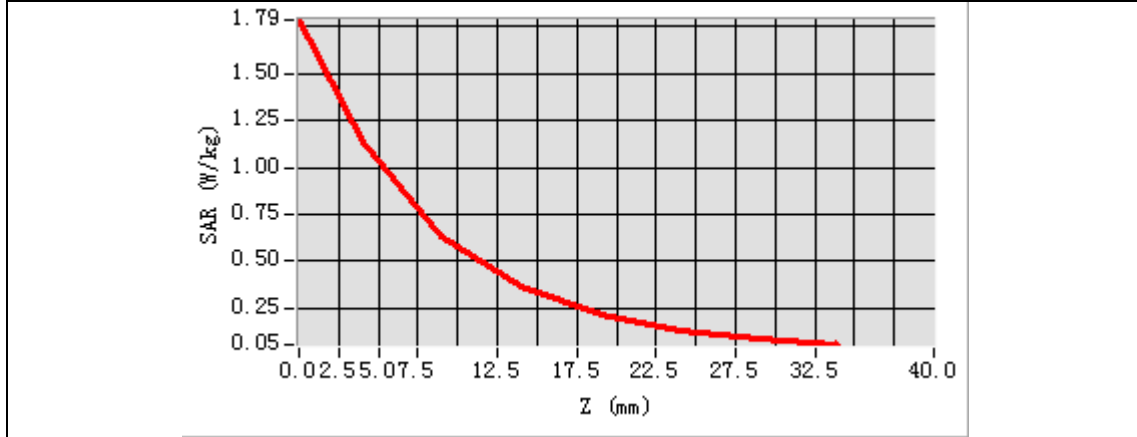

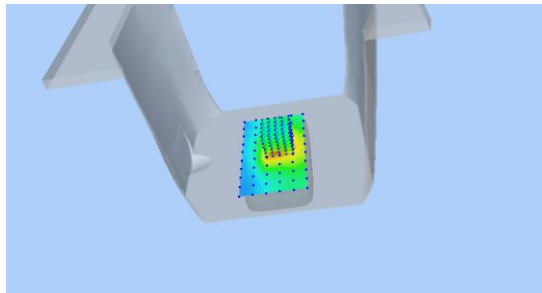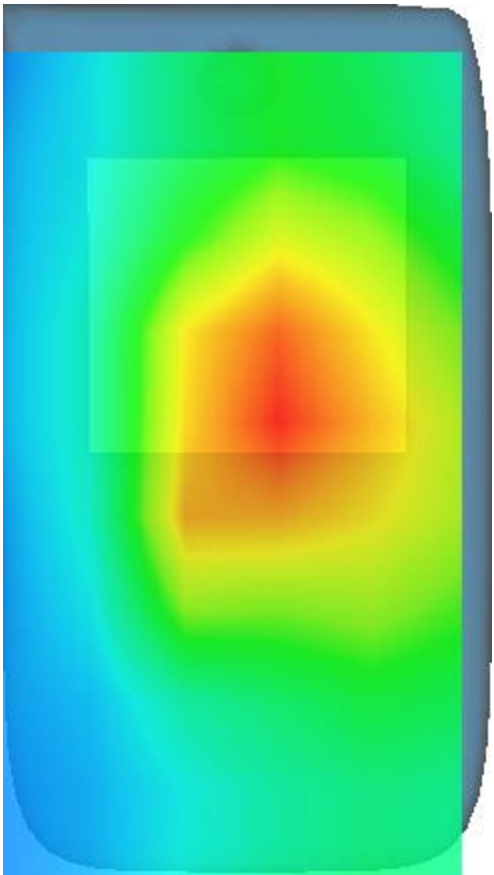3D screen shot	Hot spot position
	

MEASUREMENT 4


Date of measurement: 9/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>Band5 WCDMA850</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	836.400000
Relative permittivity (real part)	42.740768
Relative permittivity (imaginary part)	20.015818
Conductivity (S/m)	0.930068
Variation (%)	0.030000

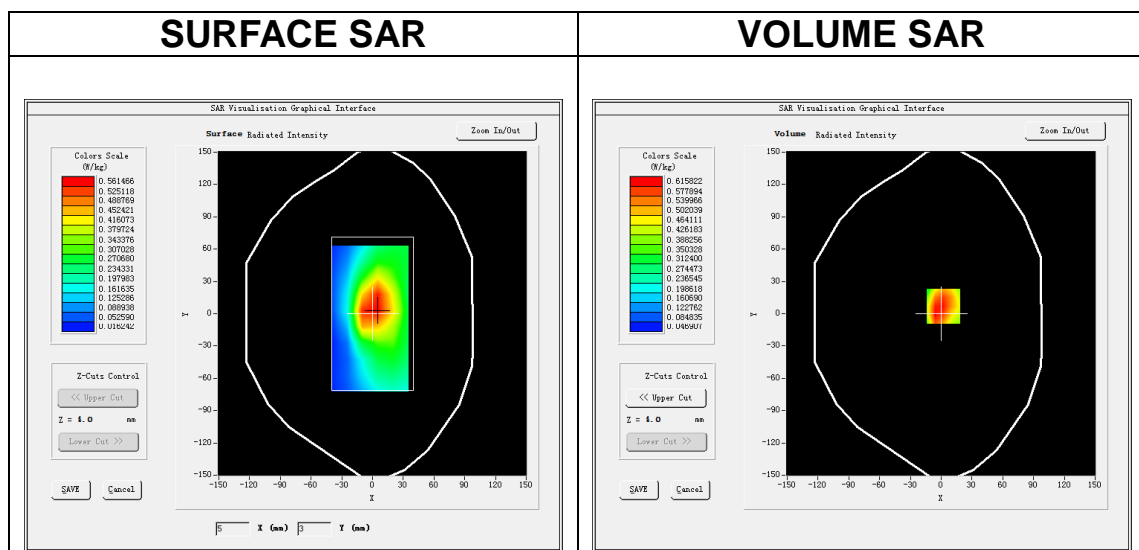

Maximum location: X=2.00, Y=7.00

SAR Peak: 0.90 W/kg

SAR 10g (W/Kg)	0.375174
SAR 1g (W/Kg)	0.610852

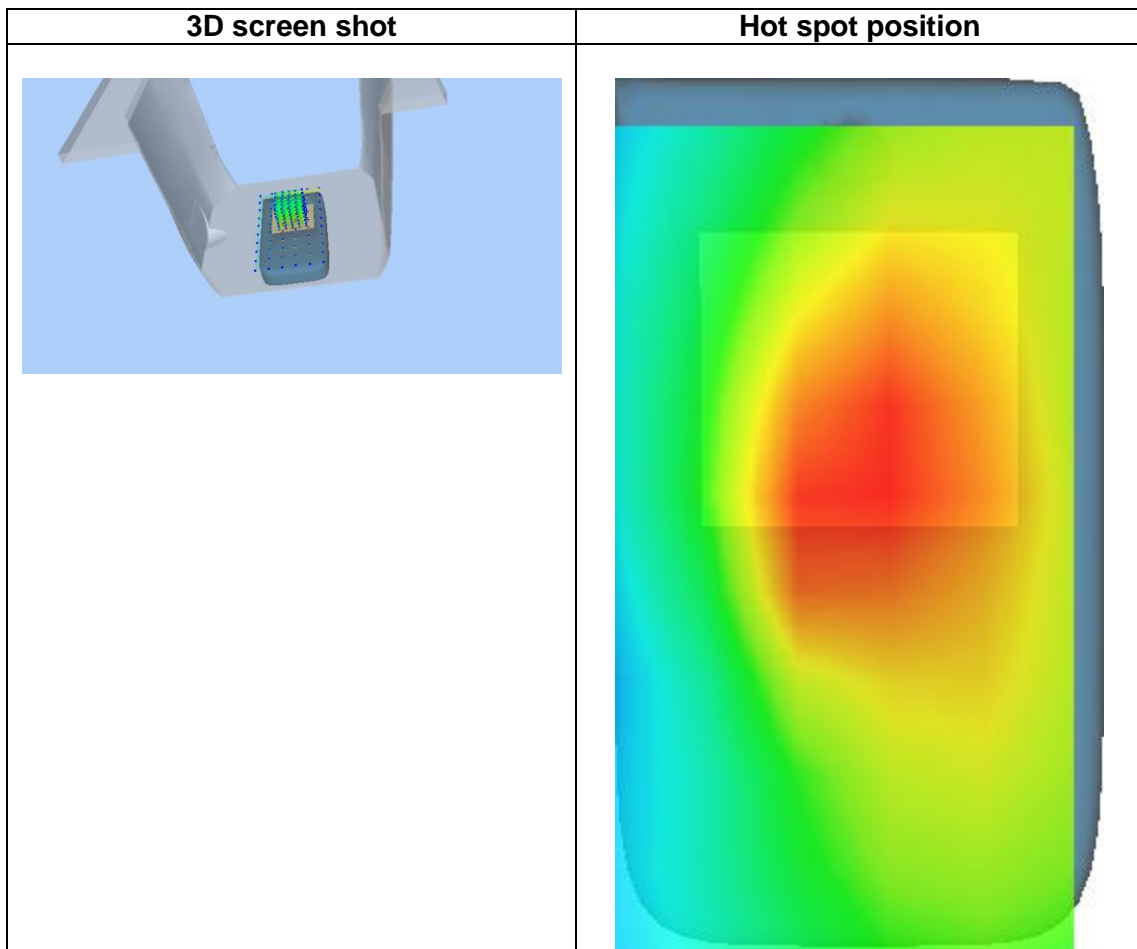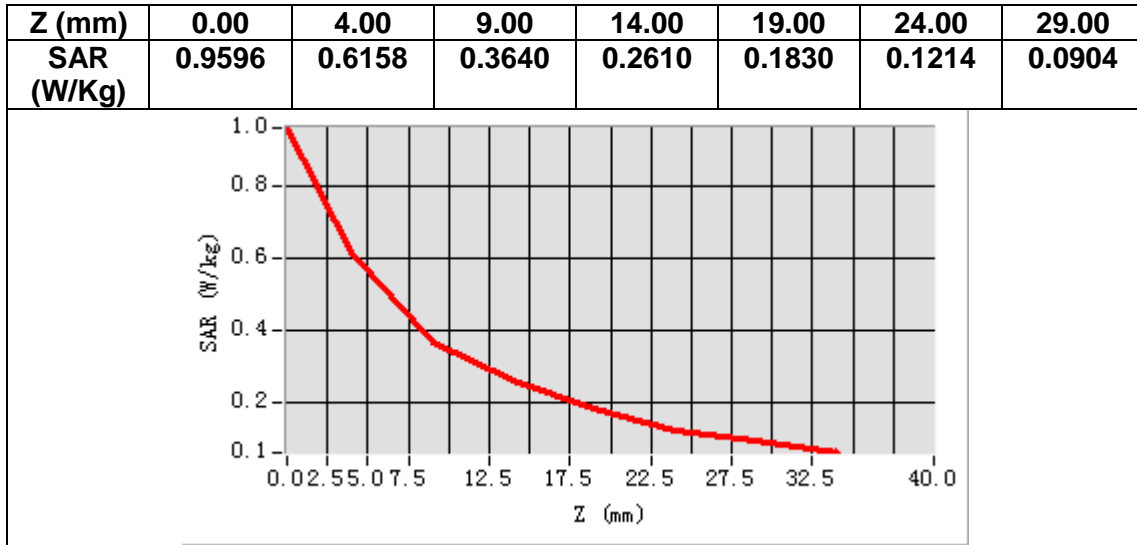

MEASUREMENT 5


Date of measurement: 8/10/2021

A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11a U-NII</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	37.508985
Relative permittivity (imaginary part)	15.750310
Conductivity (S/m)	4.550090
Variation (%)	1.090000

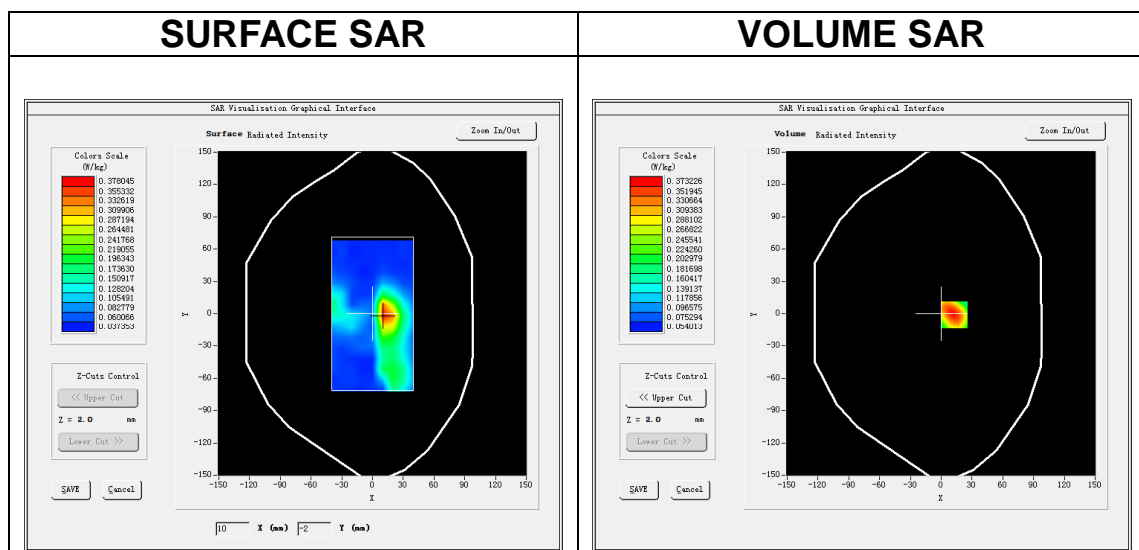




Maximum location: X=13.00, Y=-1.00

SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)	0.167146
SAR 1g (W/Kg)	0.238864

Z (m)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.4610	0.3732	0.3094	0.2541	0.2082	0.1714	0.1450	0.1282	0.1186	0.0949	0.0795	0.0804

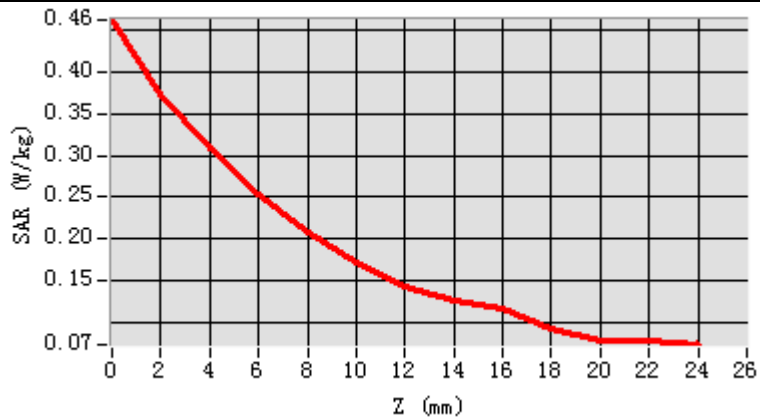

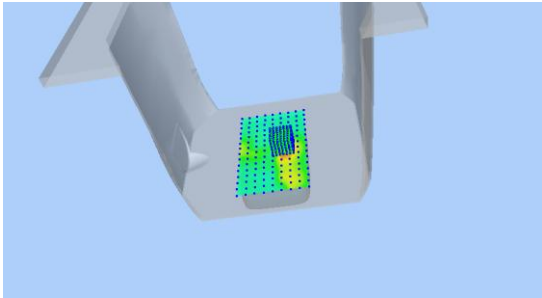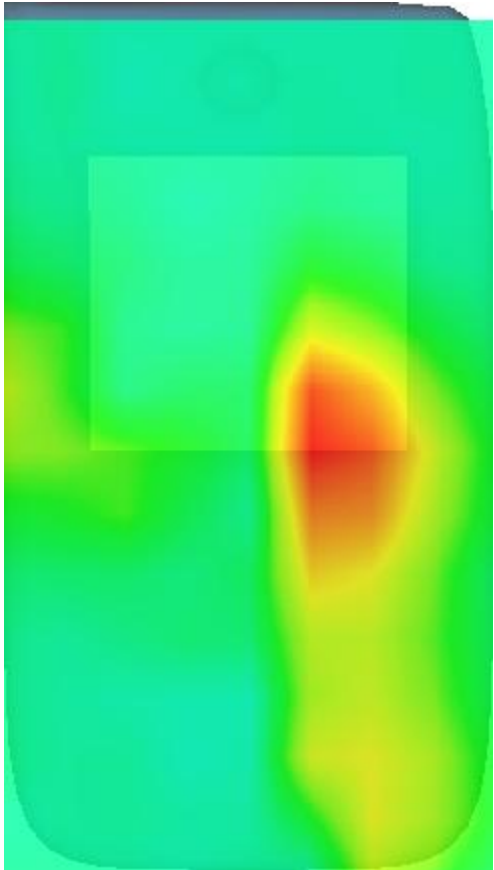3D screen shot	Hot spot position
	

MEASUREMENT 6


Date of measurement: 8/10/2021

A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11a U-NII</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5280.000000
Relative permittivity (real part)	37.399790
Relative permittivity (imaginary part)	15.835469
Conductivity (S/m)	4.645071
Variation (%)	-1.010000

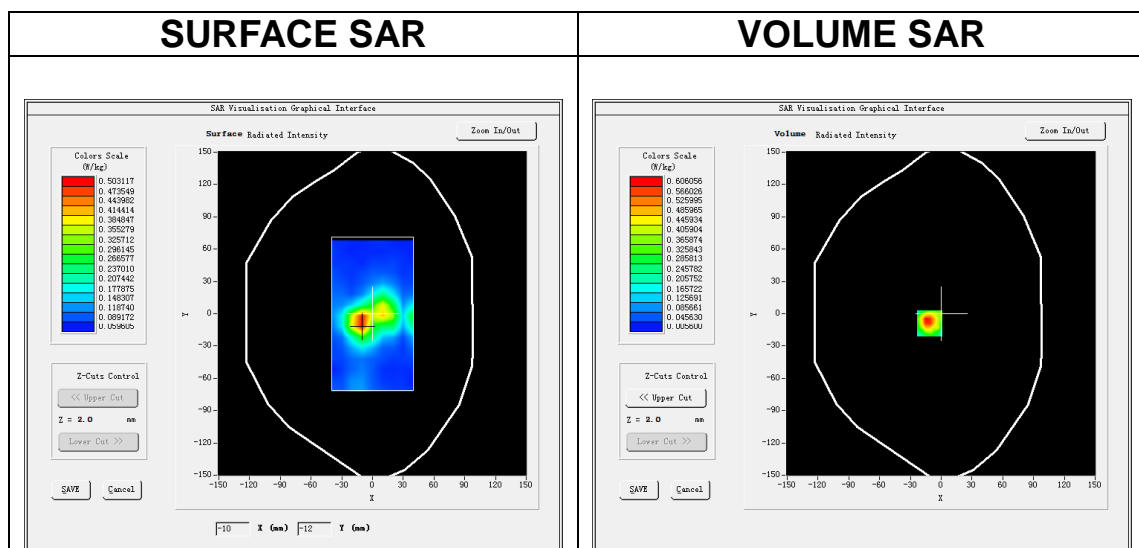




Maximum location: X=-11.00, Y=-9.00

SAR Peak: 1.08 W/kg

SAR 10g (W/Kg)	0.165509
SAR 1g (W/Kg)	0.318824

Z (m)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	1.0165	0.6061	0.2559	0.1979	0.1119	0.0905	0.0759	0.0768	0.0714	0.0633	0.0601	0.0654

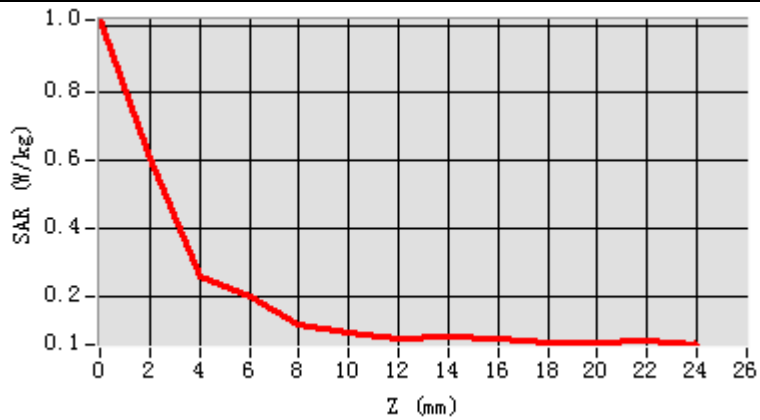

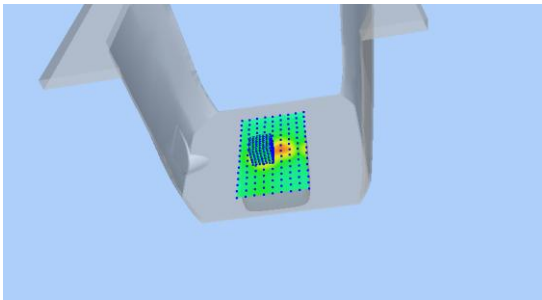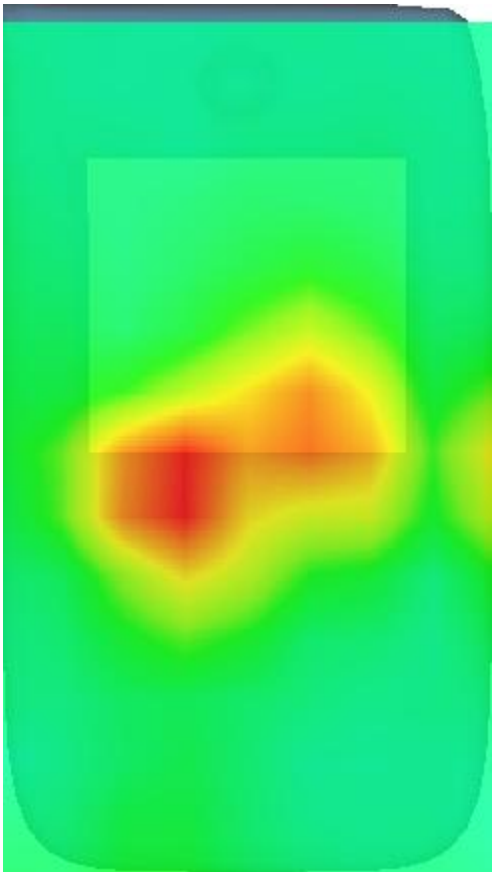3D screen shot	Hot spot position
	

MEASUREMENT 7


Date of measurement: 19/10/2021

A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11a U-NII</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5600.000000
Relative permittivity (real part)	36.636611
Relative permittivity (imaginary part)	16.053614
Conductivity (S/m)	4.994458
Variation (%)	2.110000

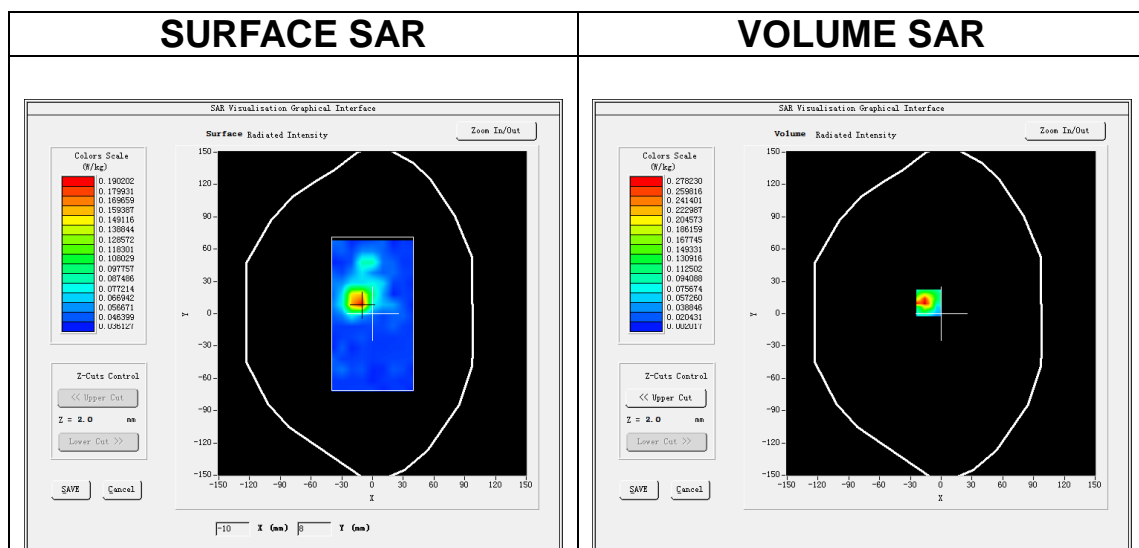




Maximum location: X=-12.00, Y=10.00

SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.070898
SAR 1g (W/Kg)	0.166984

Z (m)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.4693	0.2782	0.1020	0.0969	0.0525	0.0572	0.0477	0.0418	0.0396	0.0431	0.0375	0.0376

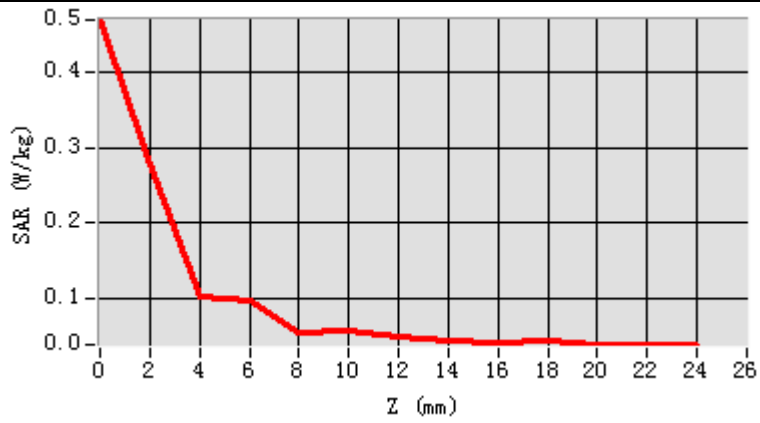

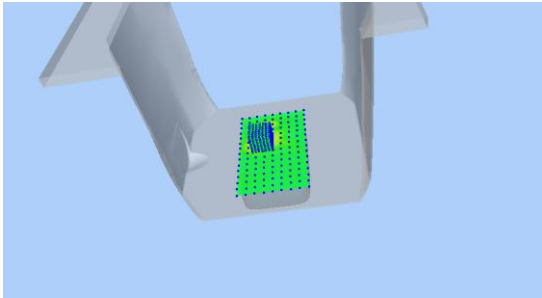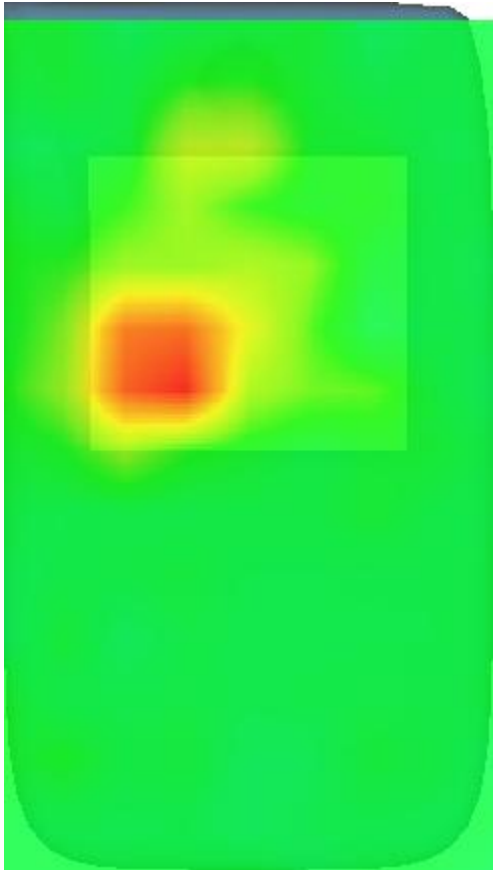3D screen shot	Hot spot position
	

MEASUREMENT 8


Date of measurement: 9/10/2021

A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11a U-NII</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	36.421133
Relative permittivity (imaginary part)	15.924911
Conductivity (S/m)	5.118089
Variation (%)	-3.030000

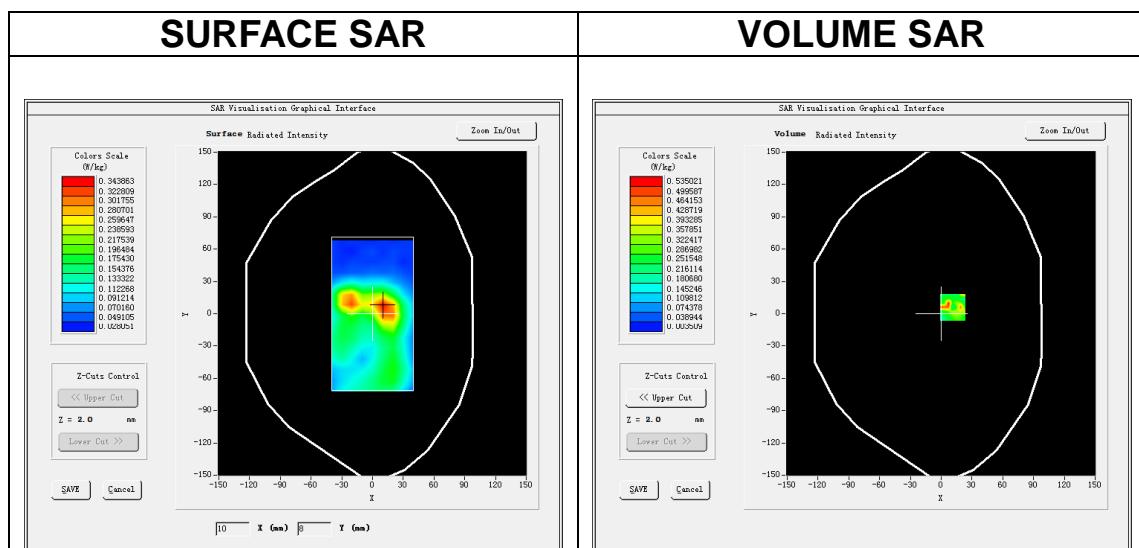




Maximum location: X=11.00, Y=6.00

SAR Peak: 0.93 W/kg

SAR 10g (W/Kg)	0.161489
SAR 1g (W/Kg)	0.293774

Z (m)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.8631	0.5350	0.2716	0.2044	0.1767	0.1395	0.1305	0.0983	0.0971	0.0652	0.0615	0.0539

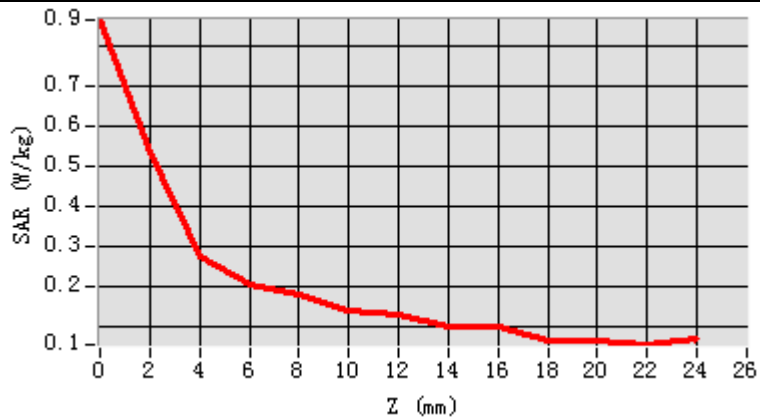

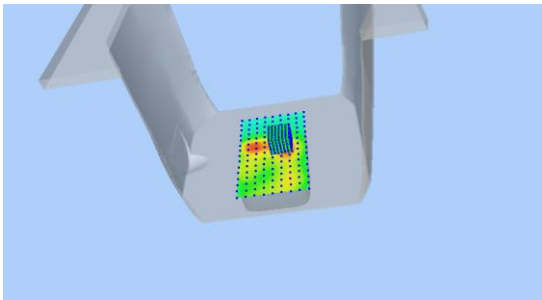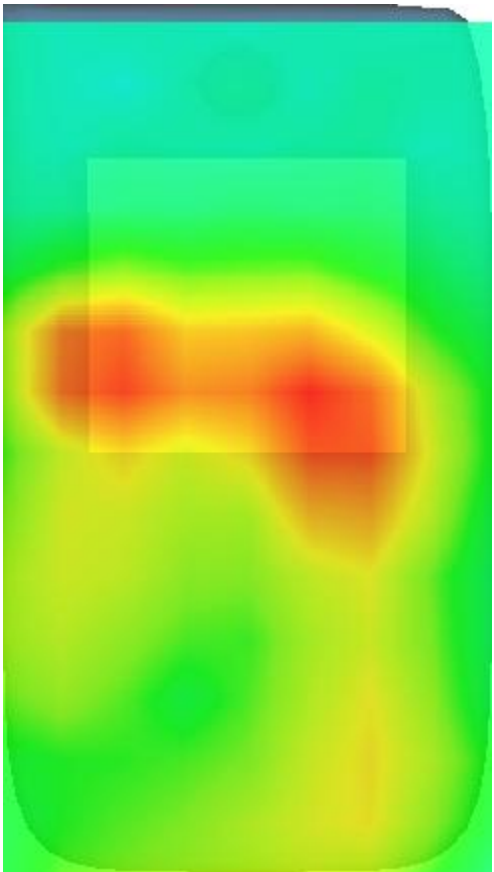3D screen shot	Hot spot position
	

MEASUREMENT 9


Date of measurement: 11/10/2021

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11b ISM</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11b (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	2437.000000
Relative permittivity (real part)	40.785811
Relative permittivity (imaginary part)	12.887564
Conductivity (S/m)	1.744833
Variation (%)	-1.120000

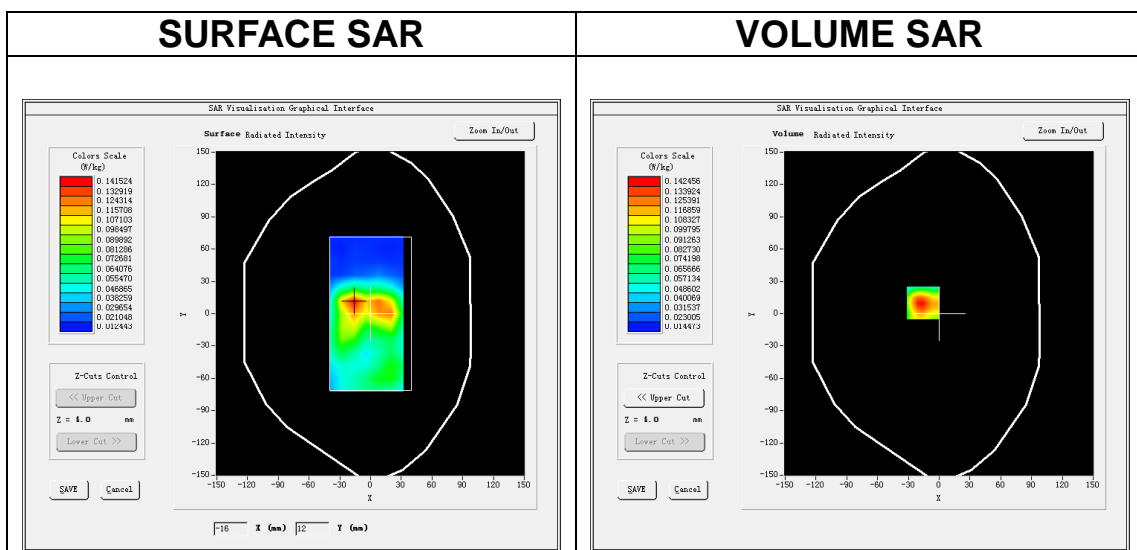

Maximum location: X=-16.00, Y=10.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.072101
SAR 1g (W/Kg)	0.136565

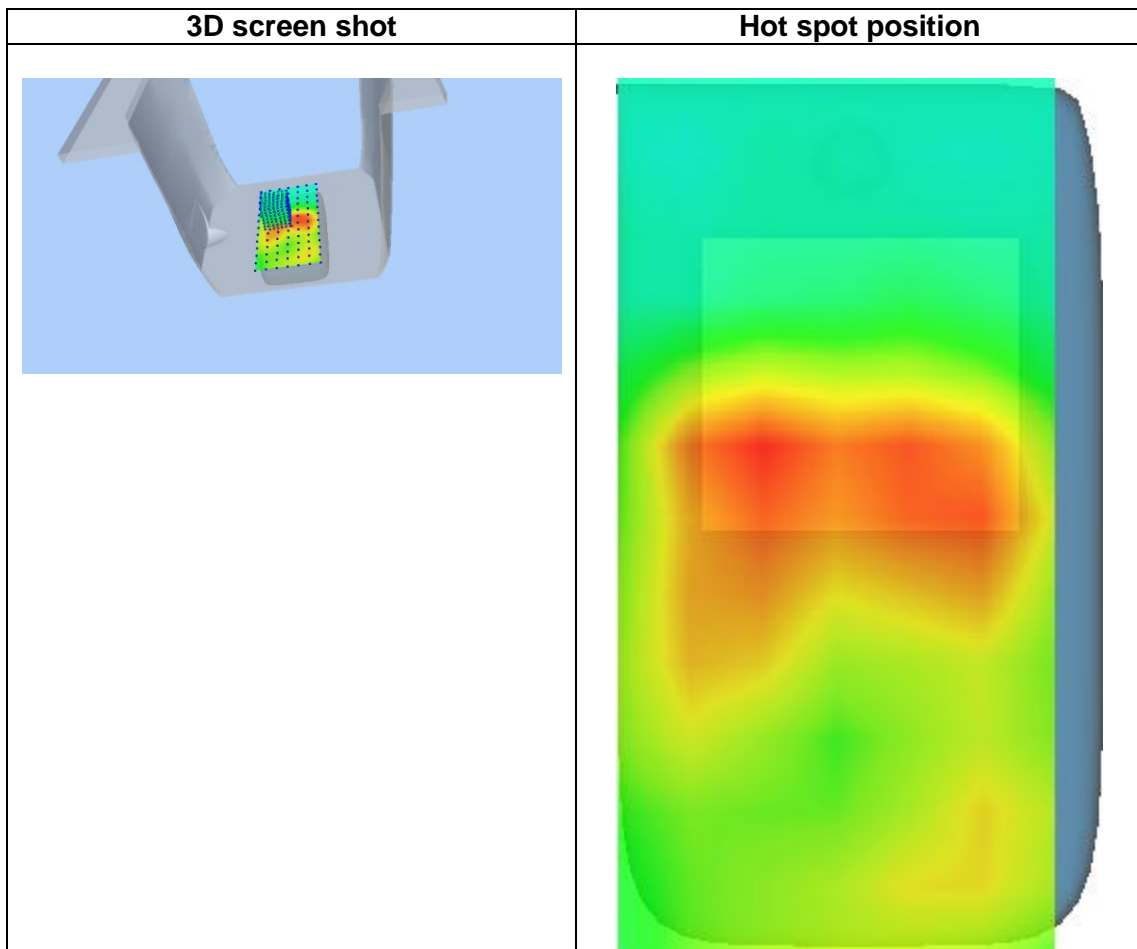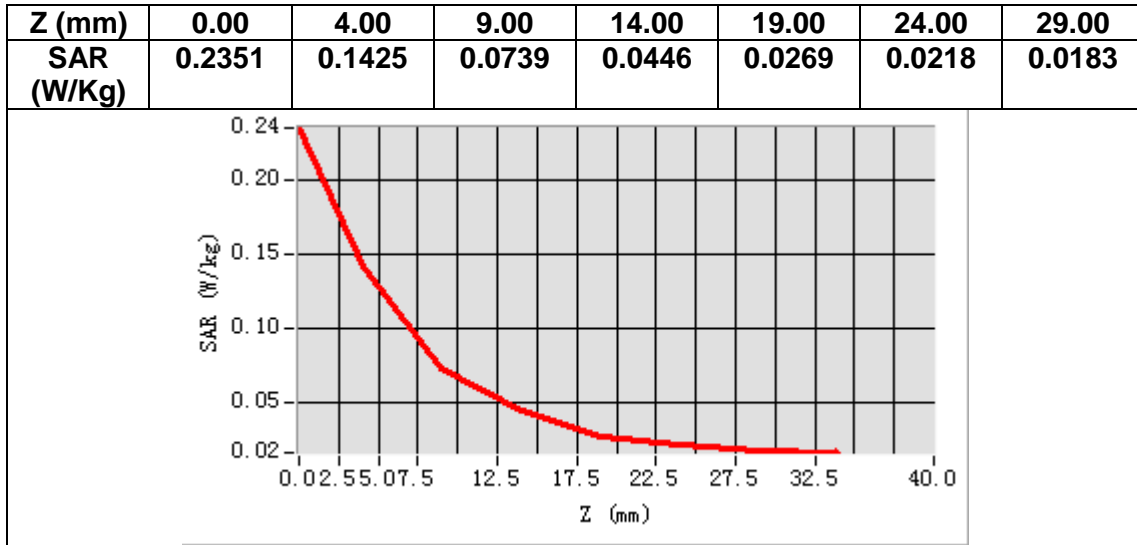

MEASUREMENT 10


Date of measurement: 13/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 2</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.863483
Relative permittivity (imaginary part)	13.851455
Conductivity (S/m)	1.446708
Variation (%)	0.940000

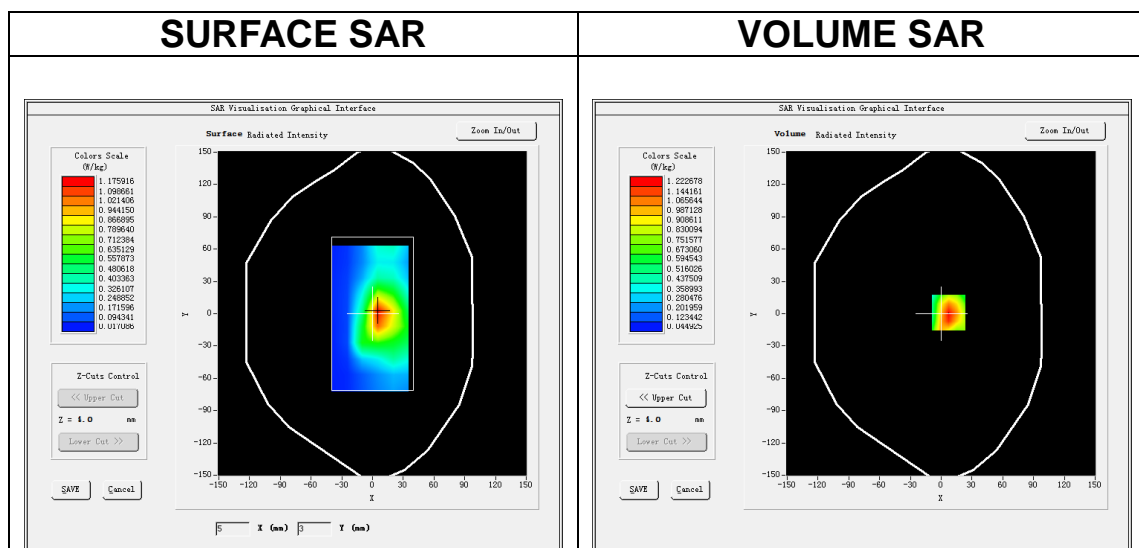

Maximum location: X=7.00, Y=1.00

SAR Peak: 1.94 W/kg

SAR 10g (W/Kg)	0.646432
SAR 1g (W/Kg)	1.097050

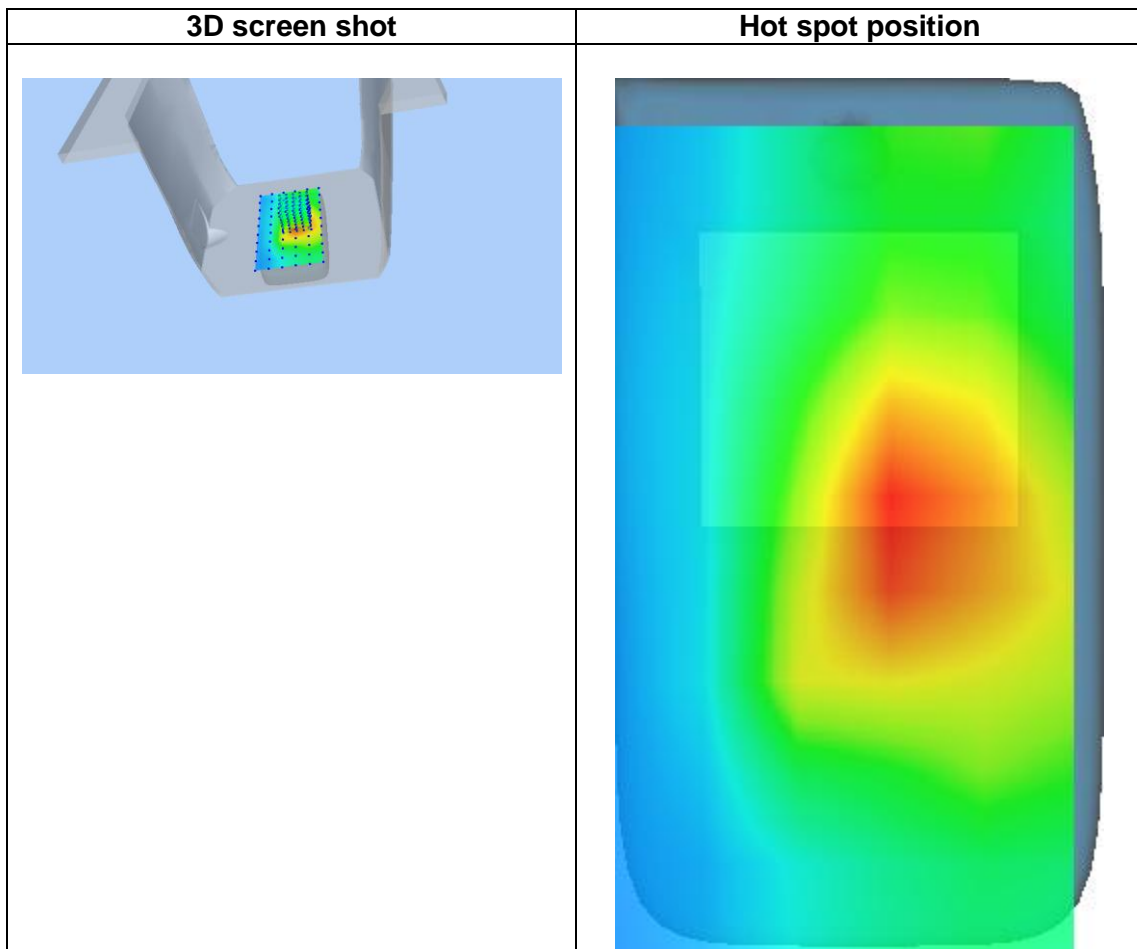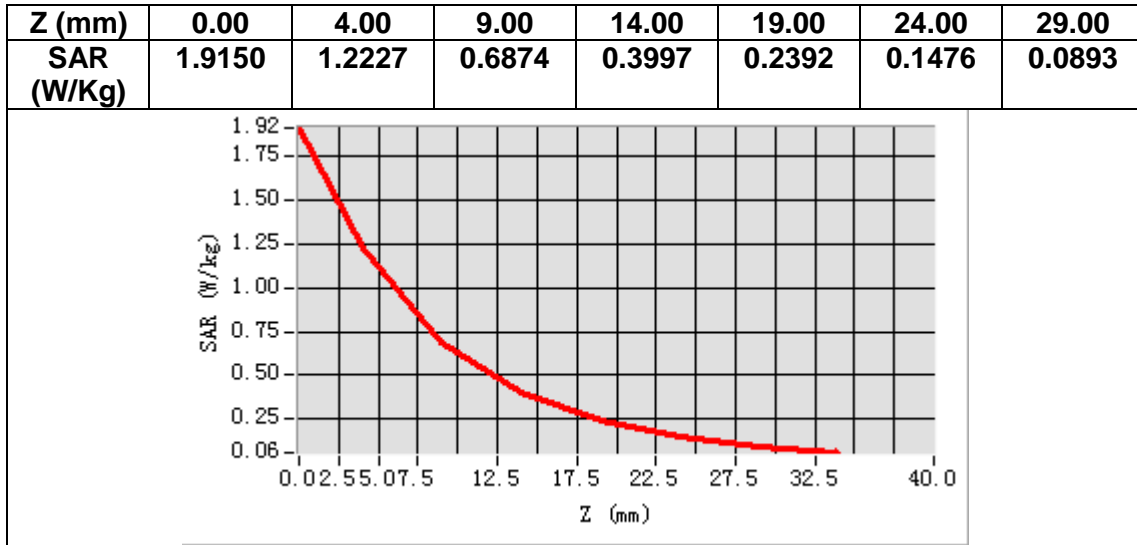

MEASUREMENT 11


Date of measurement: 10/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 4</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.812753
Relative permittivity (imaginary part)	13.674480
Conductivity (S/m)	1.316169
Variation (%)	-0.520000

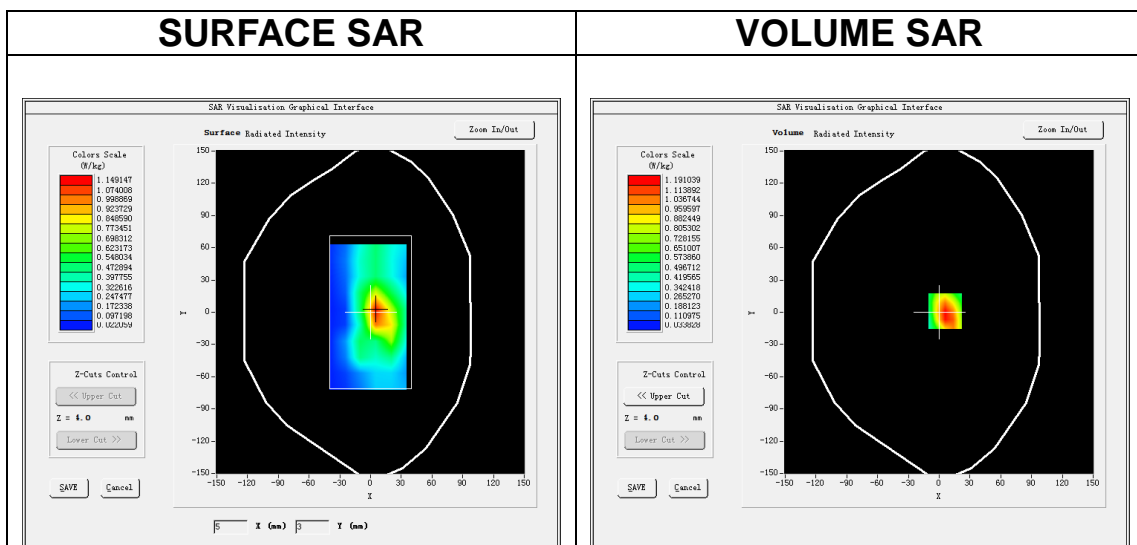

Maximum location: X=6.00, Y=1.00
SAR Peak: 1.85 W/kg

SAR 10g (W/Kg)	0.643482
SAR 1g (W/Kg)	1.049824

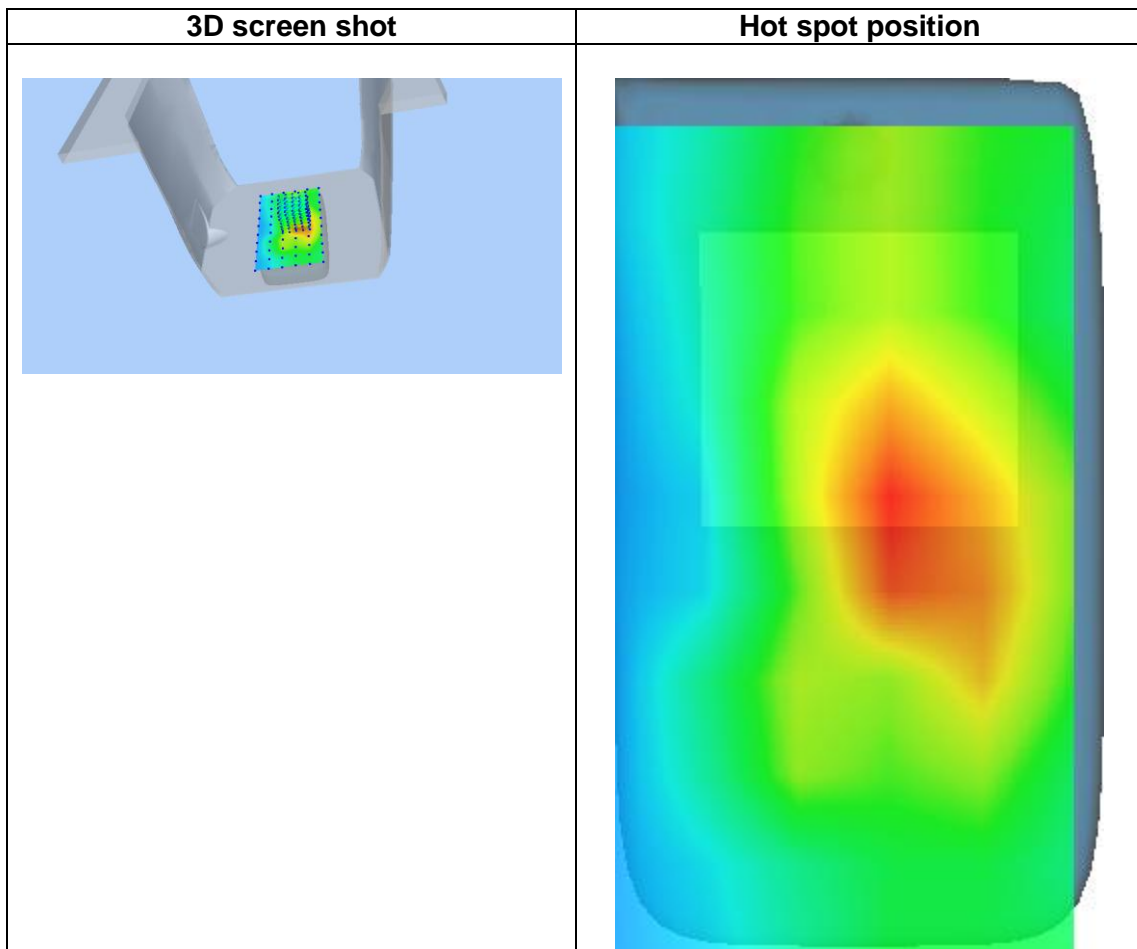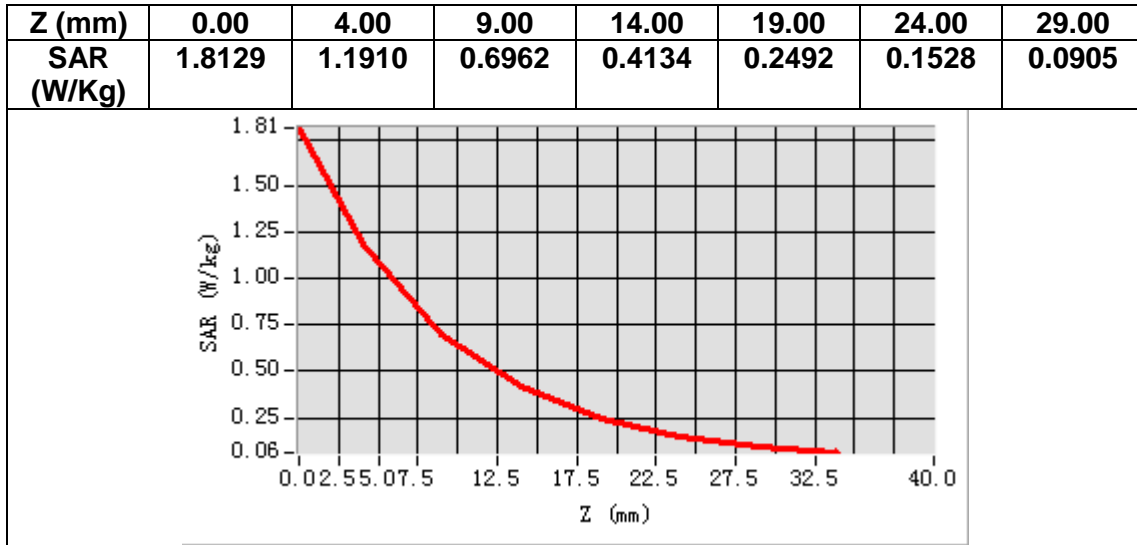

MEASUREMENT 12


Date of measurement: 9/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 5</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	836.500000
Relative permittivity (real part)	42.743359
Relative permittivity (imaginary part)	20.014477
Conductivity (S/m)	0.930117
Variation (%)	-0.120000

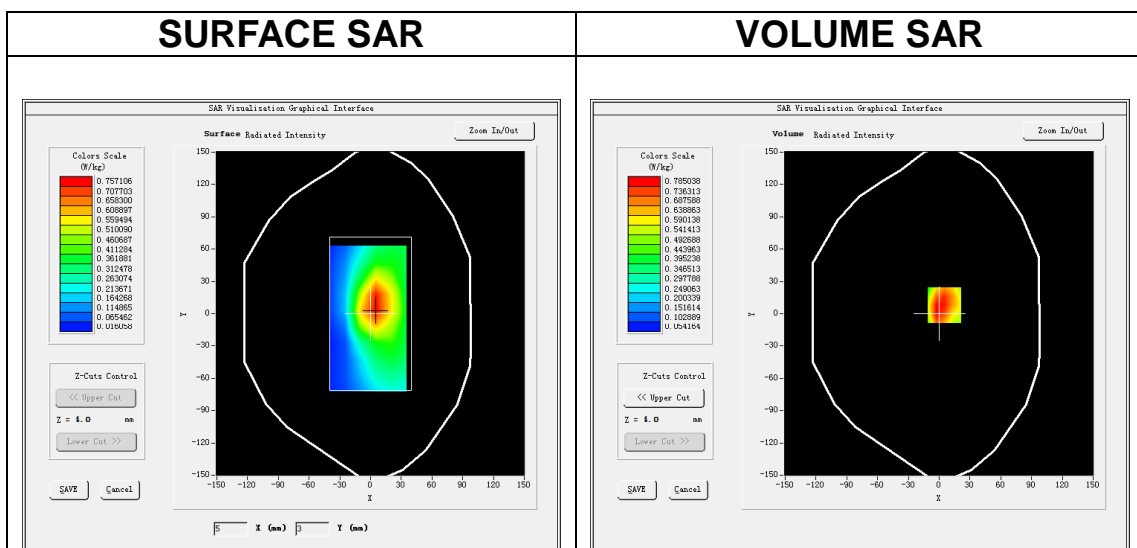

Maximum location: X=5.00, Y=8.00

SAR Peak: 1.15 W/kg

SAR 10g (W/Kg)	0.480213
SAR 1g (W/Kg)	0.783194

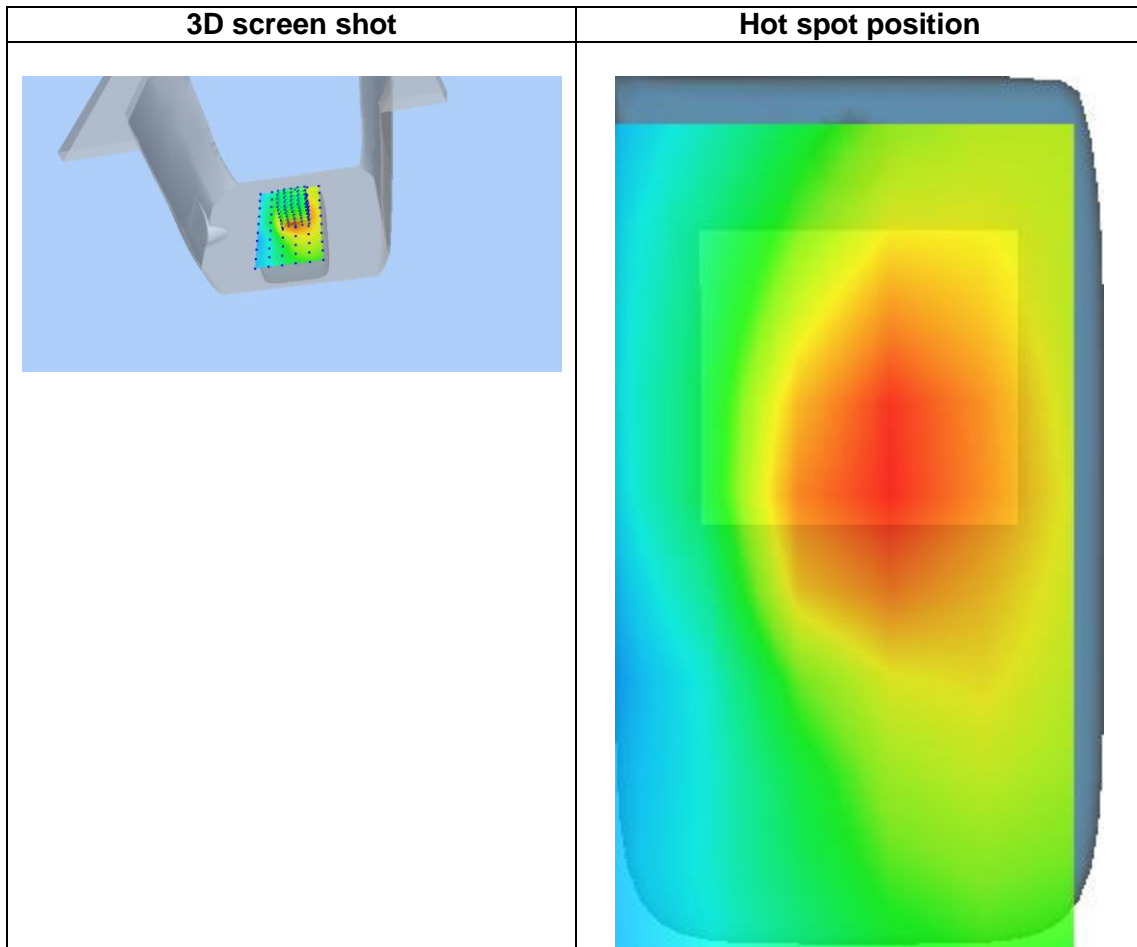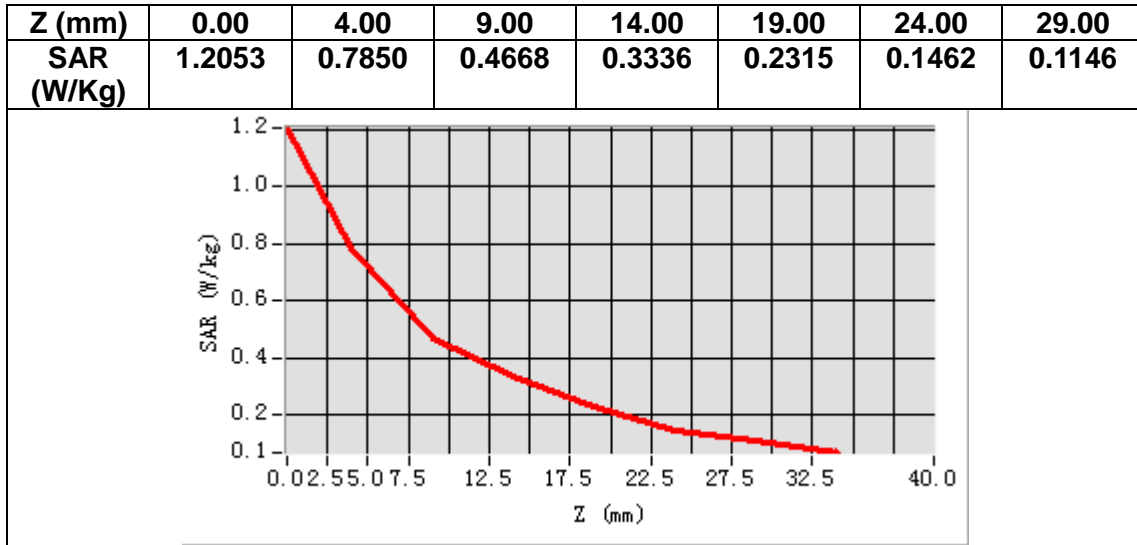

MEASUREMENT 13


Date of measurement: 30/9/2021

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 7</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.887762
Relative permittivity (imaginary part)	13.405402
Conductivity (S/m)	1.887927
Variation (%)	-2.000000

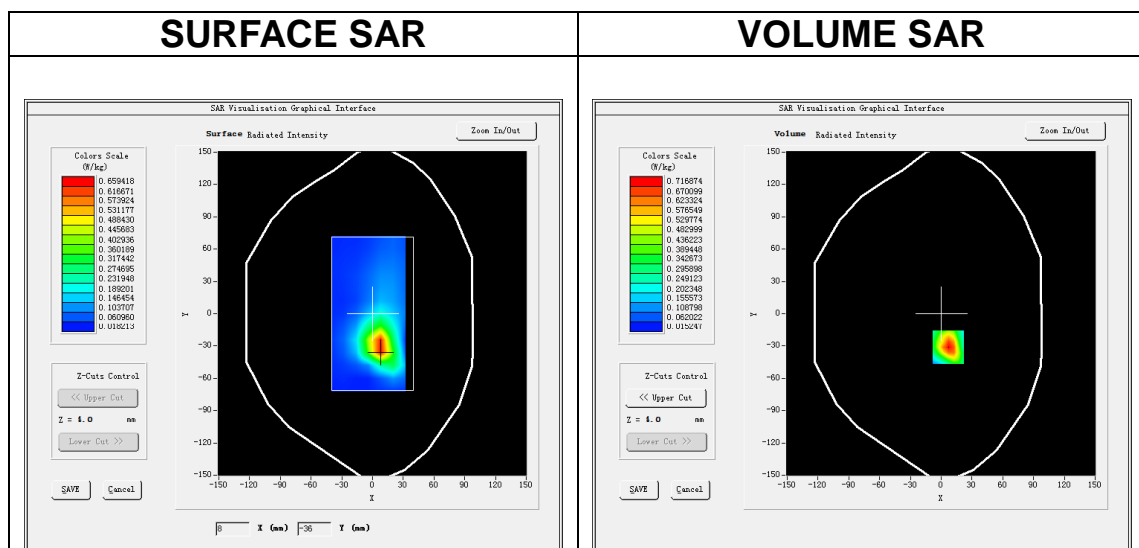

Maximum location: X=7.00, Y=-31.00

SAR Peak: 1.14 W/kg

SAR 10g (W/Kg)	0.325084
SAR 1g (W/Kg)	0.652872

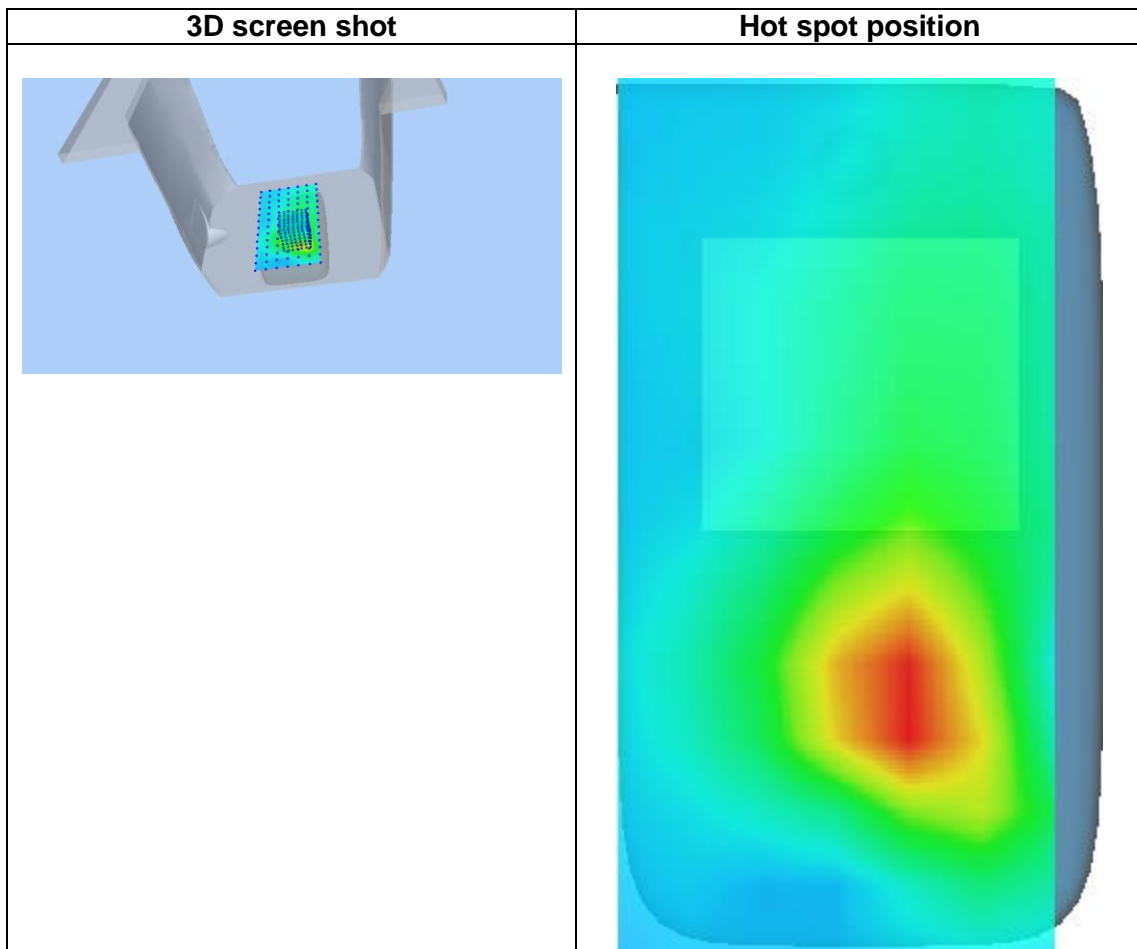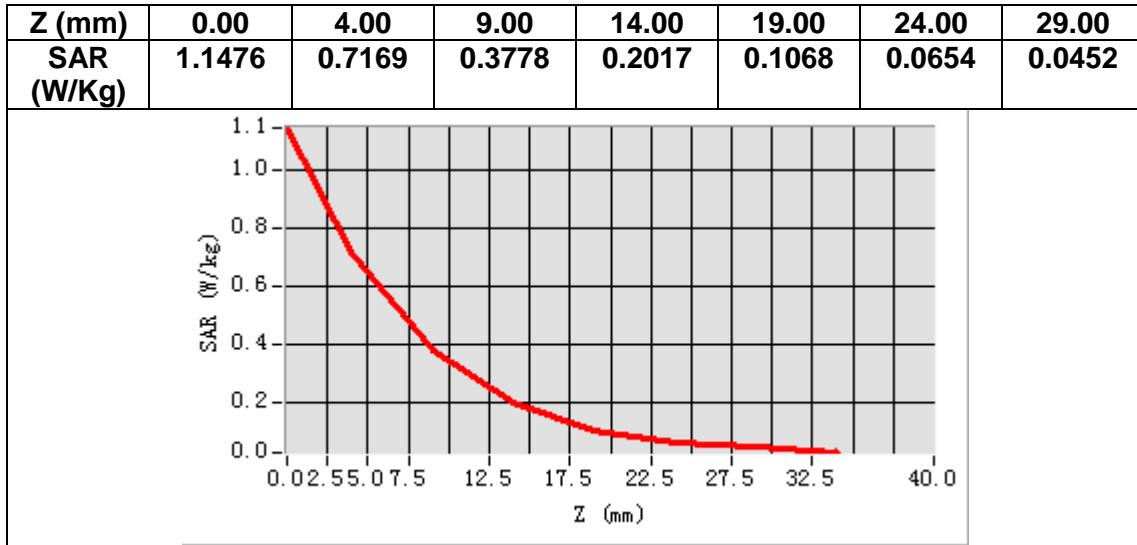

MEASUREMENT 14


Date of measurement: 13/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 12</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	707.500000
Relative permittivity (real part)	42.480637
Relative permittivity (imaginary part)	21.729891
Conductivity (S/m)	0.854105
Variation (%)	-0.380000

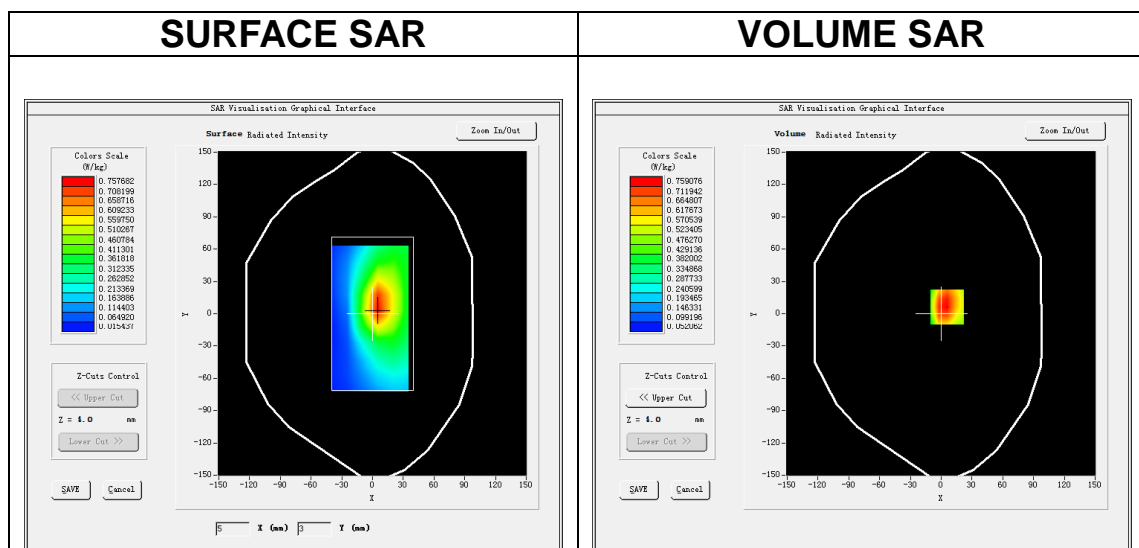

Maximum location: X=6.00, Y=6.00

SAR Peak: 1.12 W/kg

SAR 10g (W/Kg)	0.469020
SAR 1g (W/Kg)	0.744605

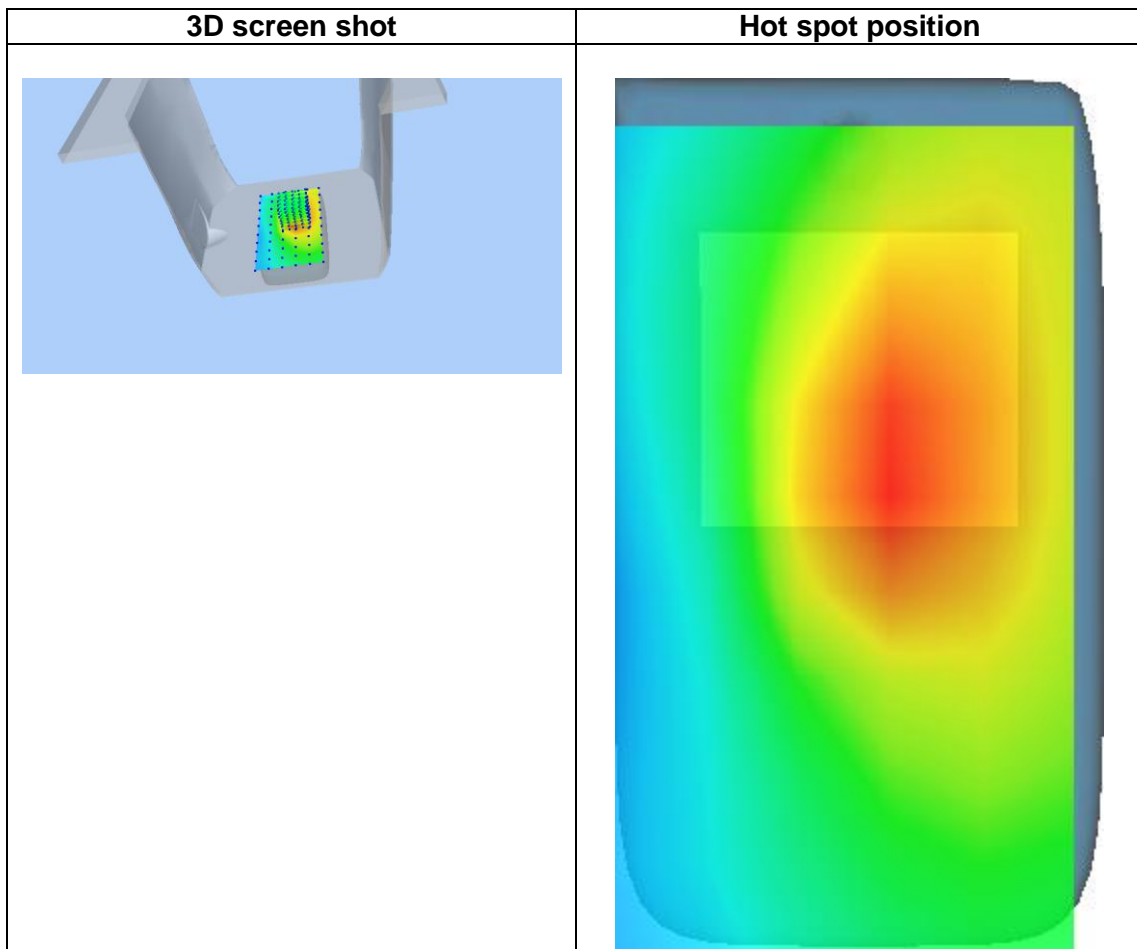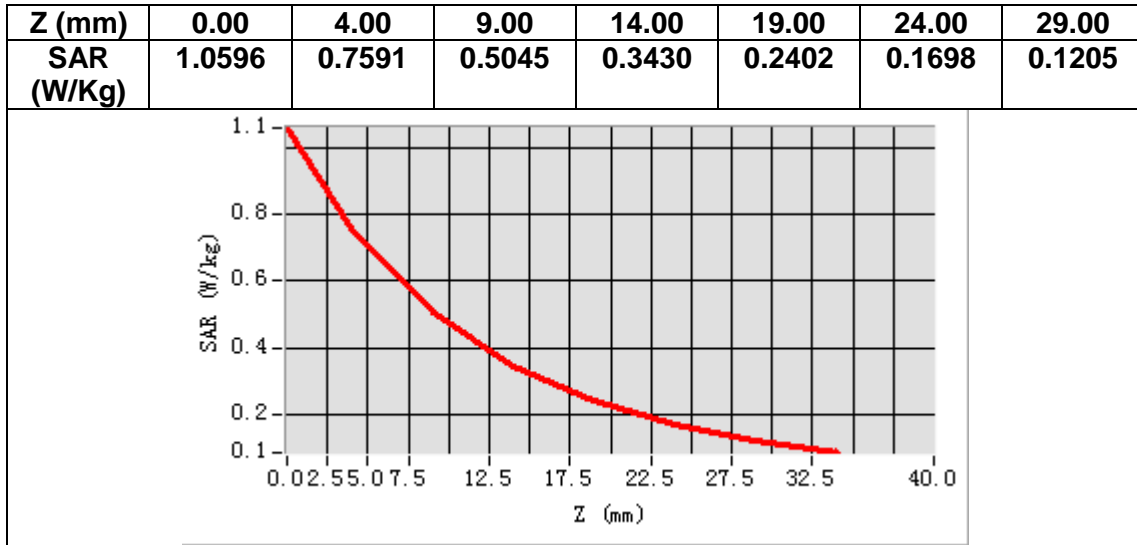

MEASUREMENT 15


Date of measurement: 13/10/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 17</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	710.000000
Relative permittivity (real part)	42.465286
Relative permittivity (imaginary part)	21.670340
Conductivity (S/m)	0.854775
Variation (%)	-0.410000

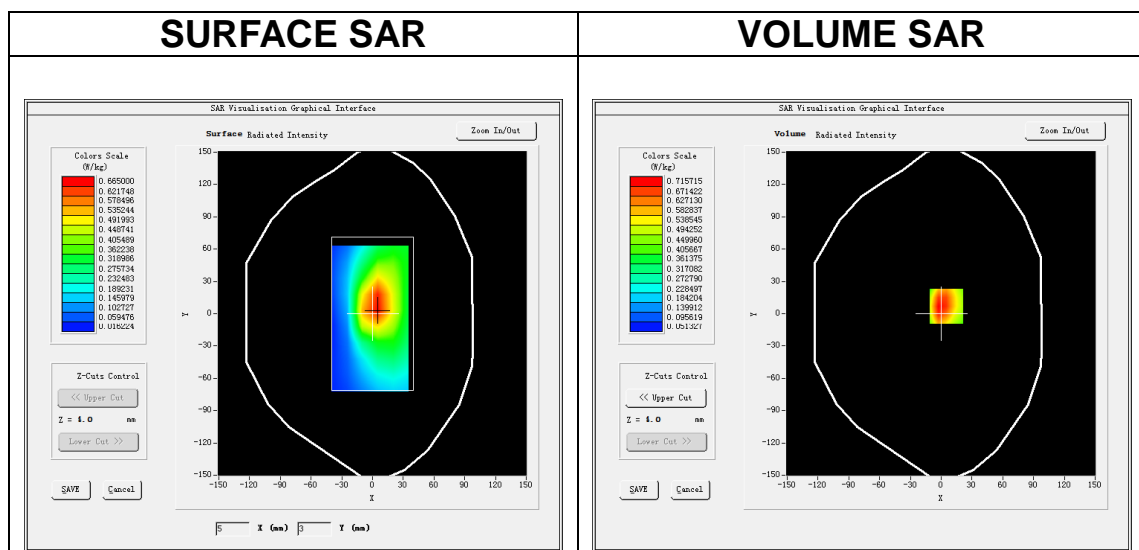

Maximum location: X=5.00, Y=7.00

SAR Peak: 1.06 W/kg

SAR 10g (W/Kg)	0.437072
SAR 1g (W/Kg)	0.696259

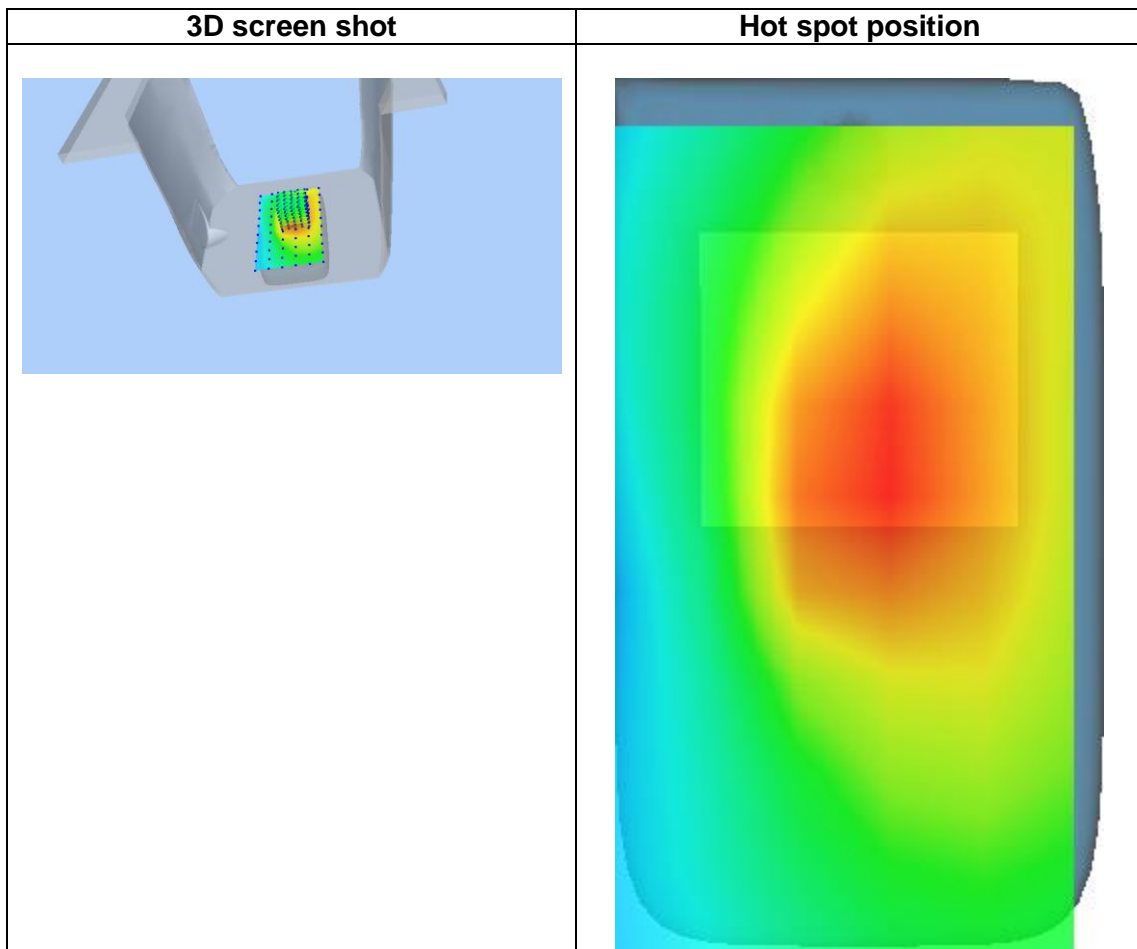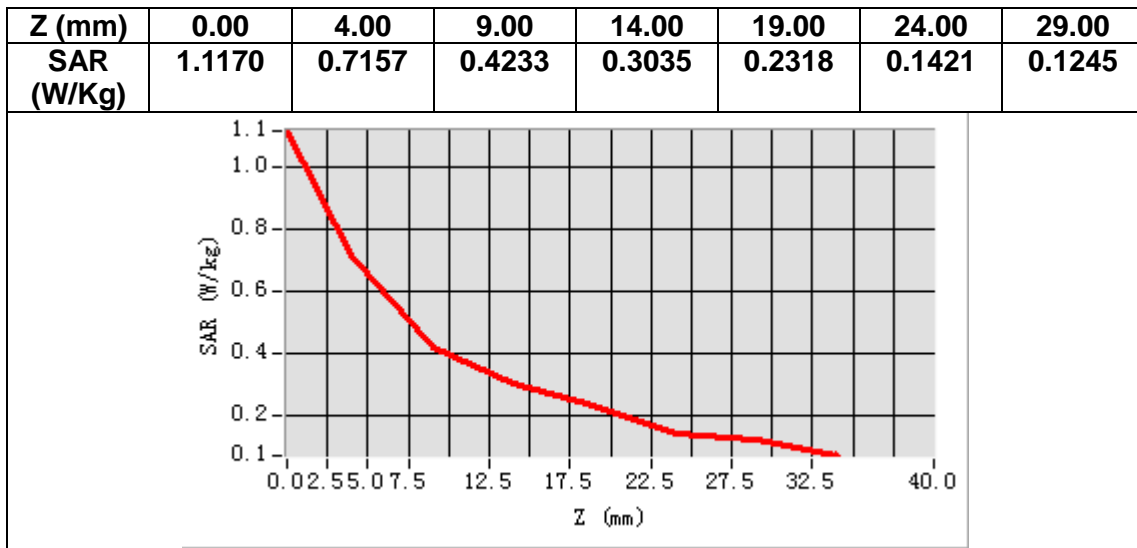

MEASUREMENT 16


Date of measurement: 30/9/2021

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 41</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.6)</u>

B. SAR Measurement Results



Frequency (MHz)	2610.000000
Relative permittivity (real part)	39.468262
Relative permittivity (imaginary part)	13.587402
Conductivity (S/m)	1.970173
Variation (%)	-1.240000

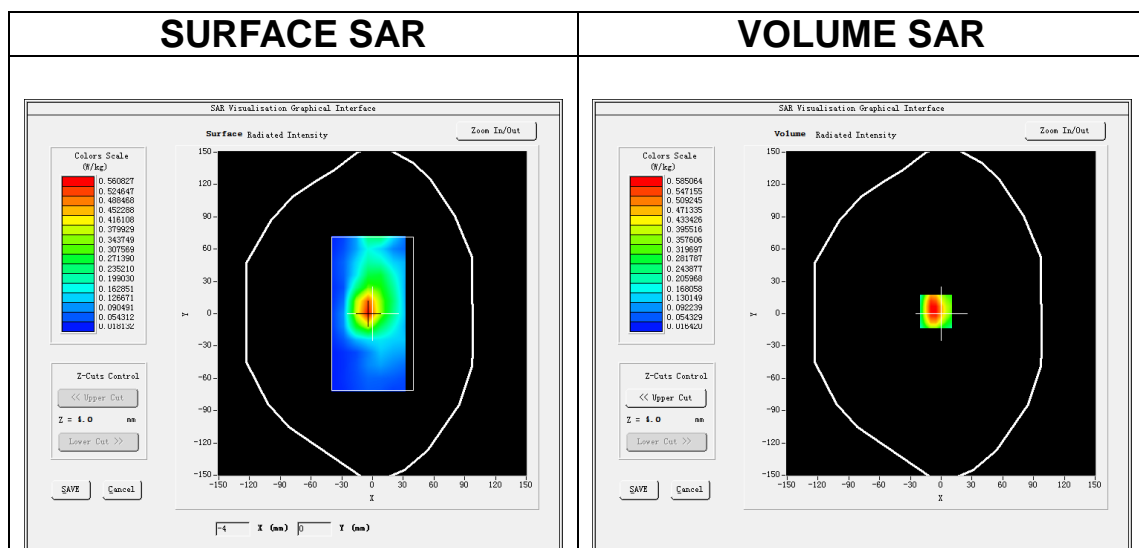

Maximum location: X=-5.00, Y=2.00

SAR Peak: 0.98 W/kg

SAR 10g (W/Kg)	0.282314
SAR 1g (W/Kg)	0.561473

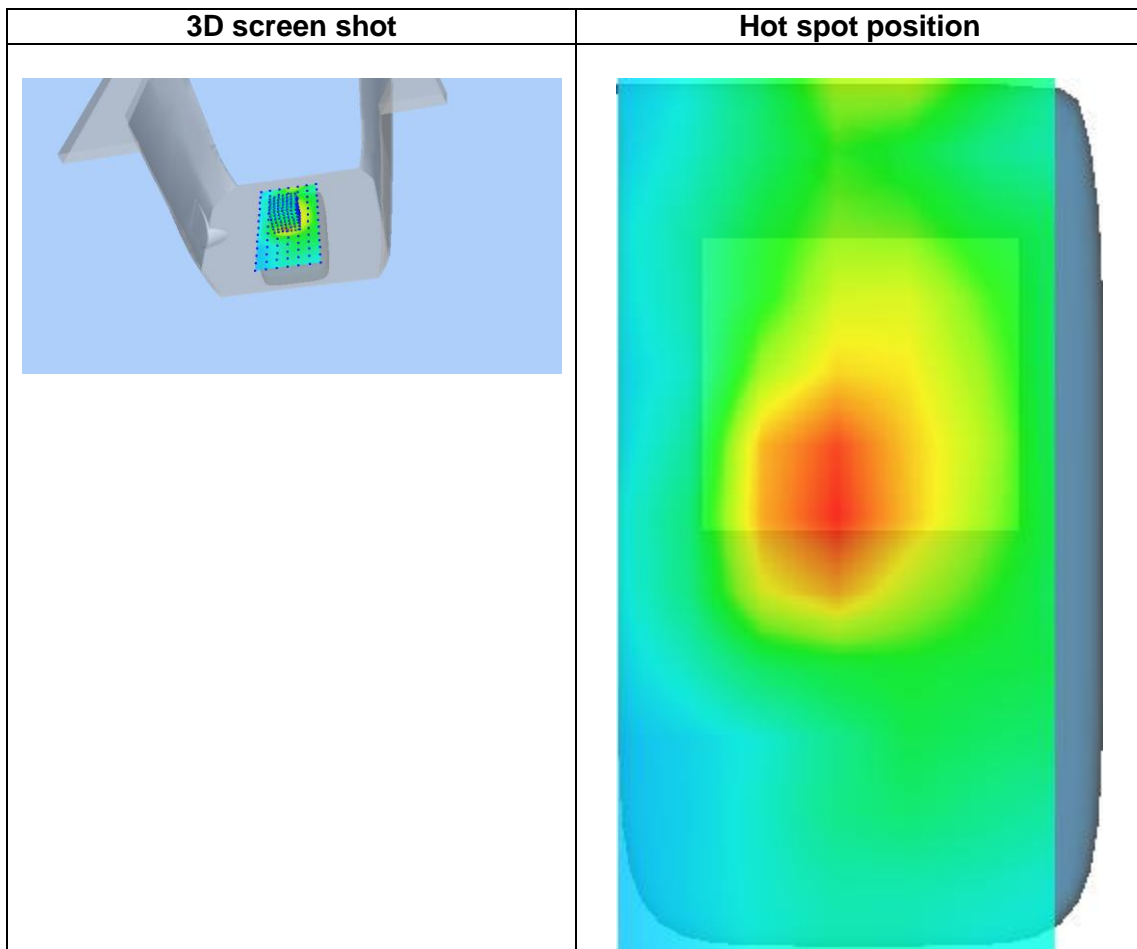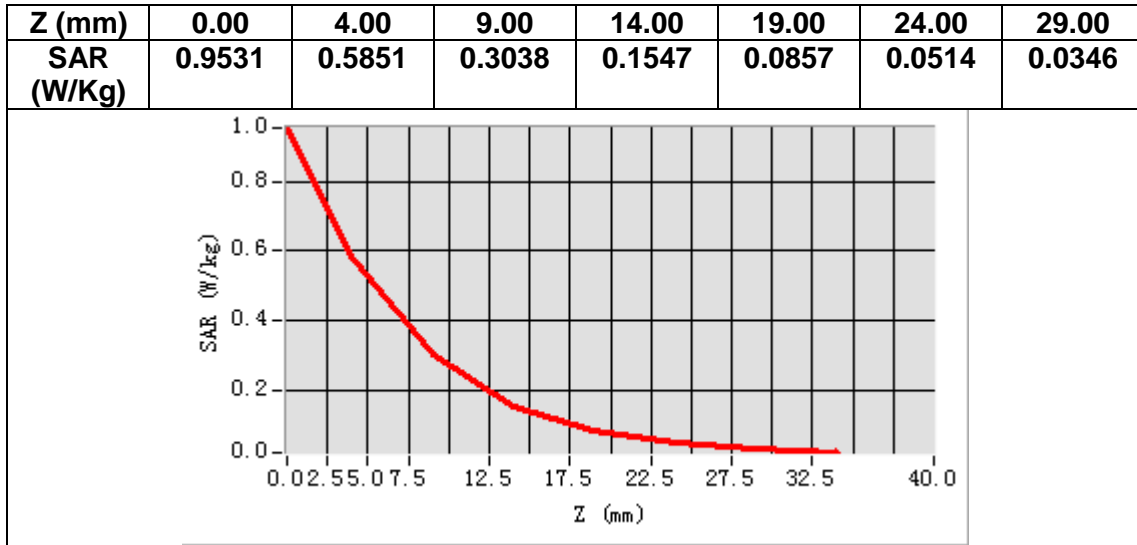

15. Appendix D. Calibration Certificate

Table of contents
E Field Probe - SN 08/16 EPGO287
750 MHz Dipole - SN 03/15 DIP 0G750-355
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
5000-6000 MHz Dipole - SN 13/14 WGA 33



COMOSAR E-Field Probe Calibration Report

Ref : ACR.60.1.21.MVGB.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 08/16 EPGO287

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 03/01/2021



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

Summary:

This document presents the method and results from an accredited COMOSAR E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

	Name	Function	Date	Signature
Prepared by :	Jérôme Luc	Technical Manager	3/1/2021	<i>JLS</i>
Checked by :	Jérôme Luc	Technical Manager	3/1/2021	<i>JLS</i>
Approved by :	Yann Toutain	Laboratory Director	3/1/2021	<i>Yann Toutain</i>

2021.03.01 13:07:12 +01'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Jérôme Luc	3/1/2021	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.1	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	8
5.4	Isotropy	9
6	List of Equipment	10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 08/16 EPGO287
Product Condition (new / used)	Used
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.211 MΩ Dipole 2: R2=0.199 MΩ Dipole 3: R3=0.199 MΩ

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG’s COMOSAR E field Probes are built in accordance to the IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.1 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \delta SAR_{be} \frac{(d_{be} + d_{step})^2 (e^{-d_{be}/\delta})}{2d_{step} \delta/2} \text{ for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

- SAR_{uncertainty} is the uncertainty in percent of the probe boundary effect
- d_{be} is the distance between the surface and the closest *zoom-scan* measurement point, in millimetre
- Δ_{step} is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
- δ is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
- ΔSAR_{be} in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

The measured worst case boundary effect SAR uncertainty [%] for scanning distances larger than 4mm is 1.0% Limit ,2%).

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Expanded uncertainty 95 % confidence level k = 2					14 %

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 SENSITIVITY IN AIR

Normx dipole 1 (µV/(V/m) ²)	Normy dipole 2 (µV/(V/m) ²)	Normz dipole 3 (µV/(V/m) ²)
0.72	0.66	0.77

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
107	110	110

Calibration curves $e_i=f(V)$ (i=1,2,3) allow to obtain E-field value using the formula:


$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$



COMOSAR E-FIELD PROBE CALIBRATION REPORT


Ref: ACR.60.1.21.MVGB.A

Calibration curves

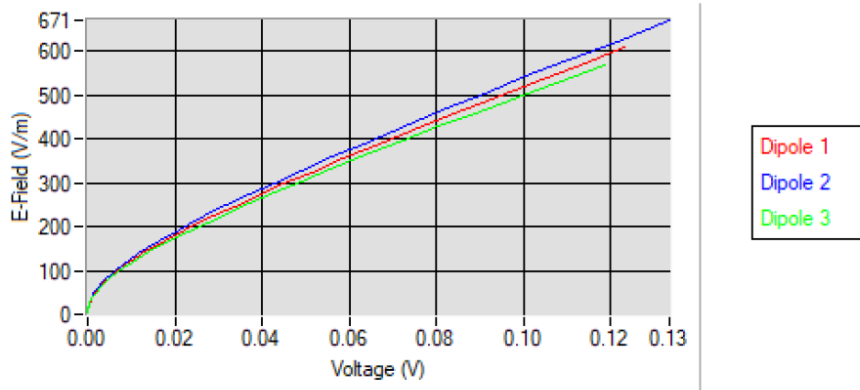

5.2 LINEARITY

Linearity

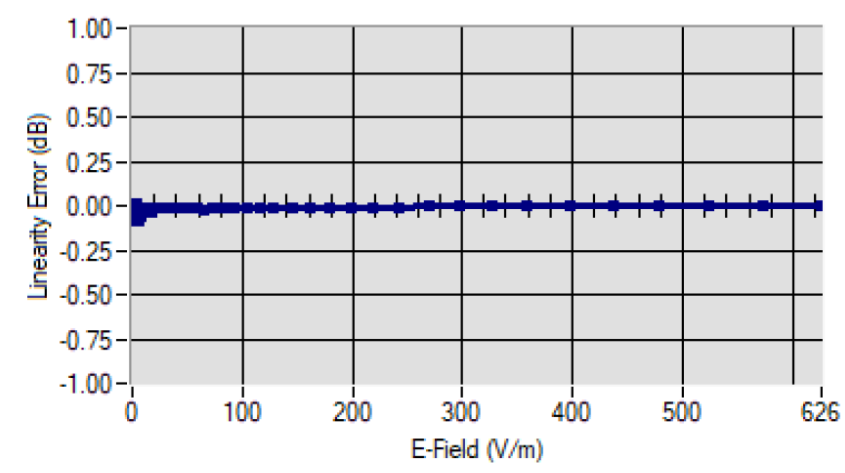

Linearity: +/-1.90% (+/-0.08dB)



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz +/- 100MHz)	ConvF
HL750	750	1.49
HL850	835	1.50
HL900	900	1.61
HL1800	1800	1.73
HL1900	1900	1.91
HL2000	2000	1.97
HL2300	2300	1.92
HL2450	2450	1.98
HL2600	2600	1.87
HL3300	3300	1.79
HL3500	3500	1.85
HL3700	3700	1.79
HL3900	3900	2.07
HL4200	4200	2.21
HL4600	4600	2.25
HL4900	4900	2.05
HL5200	5200	1.80
HL5400	5400	2.05
HL5600	5600	2.16
HL5800	5800	2.07

LOWER DETECTION LIMIT: 8mW/kg




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

5.4 ISOTROPY

HL1800 MHz





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	05/2019	05/2022
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	05/2019	05/2022
Multimeter	Keithley 2000	1160271	02/2020	02/2023
Signal Generator	Rohde & Schwarz SMB	106589	04/2019	04/2022
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	05/2019	05/2022
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44220687	05/2020	05/2023



SAR Reference Dipole Calibration Report

Ref : ACR.60.2.21.MVGB.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE**

FREQUENCY: 750 MHZ

SERIAL NO.: SN 03/15 DIP0G750-355

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 03/01/2021



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed at MVG, using the COMOSAR test bench. The test results covered by accreditation are traceable to the International System of Units (SI).